

承認書

SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

WIN-LONG

客 戶 料 號:

CUST P/N:

音 澤 料 號:

FINE P/N:

G43.5*0.8-20.5-0.08*48P-10TS*6.5UH-L15MM+BJ

產 品 型 號:

DESC:

Φ43.5MMX0.8MM

日 期:

DATE:

2023/09/01

版 本:

Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

Dongguan Yinze electronic technology Co., LTD

3F, Building D, No.40 Fulong Education Road, Shipai Town, Dongguan City

TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	G43.5*0.8-20.5-0.08*48P-10T S-6.5UH-L15MM+BJ	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	新镭闪
---------------	---	----------------	----------------------------	-----

一、尺寸 DIMENSION:(mm)

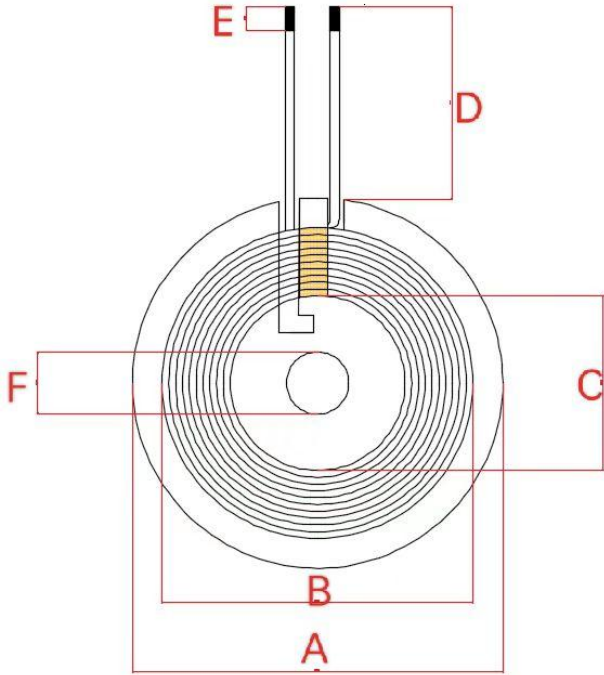

A	43.5±0.3
B	38.3±0.5
C	20.5±0.5
D	15 ±2
E	3±2
F	5.3±0.2
G	
H	
I	
K	

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	漆包线 0.08*48P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5H ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100m Ω		LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2023.08.01	