



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02



Certificate #6613.01

FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China

Manufacturer or Supplier:	Qingdao Intelligent & Precise Electronics Co., Ltd.
Address:	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China
Product:	WiFi/BT Module
Brand Name:	Hisense
Model Name:	MWH648S
FCC ID:	2AJVQ-MWH648S
Date of tests:	Feb.07, 2025 ~ Mar.10, 2025

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247
 ANSI C63.10-2020

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department

Date: Mar.10, 2025 Date: Mar.10, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
1.1 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	11
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
2.3 DUTY CYCLE OF TEST SIGNAL	14
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
2.5 DESCRIPTION OF SUPPORT UNITS	15
3 TEST TYPES AND RESULTS.....	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
3.1.2 TEST INSTRUMENTS.....	16
3.1.3 TEST PROCEDURES	17
3.1.4 DEVIATION FROM TEST STANDARD	17
3.1.5 TEST SETUP.....	18
3.1.6 EUT OPERATING CONDITIONS	18
3.1.7 TEST RESULTS	19
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	21
3.2.2 TEST INSTRUMENTS.....	22
3.2.3 TEST PROCEDURES	23
3.2.4 DEVIATION FROM TEST STANDARD	23
3.2.5 TEST SETUP.....	24
3.2.6 EUT OPERATING CONDITIONS	25
3.2.7 TEST RESULTS	26
3.3 6 dB BANDWIDTH MEASUREMENT	136
3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	136
3.3.2 TEST INSTRUMENTS.....	136
3.3.3 TEST PROCEDURE	136
3.3.4 DEVIATION FROM TEST STANDARD	138
3.3.5 TEST SETUP.....	138
3.3.6 EUT OPERATING CONDITIONS	138



3.3.7 TEST RESULTS	139
3.4 CONDUCTED OUTPUT POWER.....	140
3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	140
3.4.2 TEST SETUP.....	140
3.4.3 TEST INSTRUMENTS.....	140
3.4.4 TEST PROCEDURES	140
3.4.5 DEVIATION FROM TEST STANDARD	140
3.4.6 EUT OPERATING CONDITIONS	140
3.4.7 TEST RESULTS	141
3.4.7.1 MAXIMUM PEAK OUTPUT POWER	141
3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)	142
3.5 POWER SPECTRAL DENSITY MEASUREMENT	143
3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	143
3.5.2 TEST SETUP.....	143
3.5.3 TEST INSTRUMENTS.....	143
3.5.4 TEST PROCEDURE.....	143
3.5.5 DEVIATION FROM TEST STANDARD	143
3.5.6 EUT OPERATING CONDITION	143
3.5.7 TEST RESULTS	144
3.6 OUT OF BAND EMISSION MEASUREMENT	145
3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	145
3.6.2 TEST SETUP.....	145
3.6.3 TEST INSTRUMENTS.....	145
3.6.4 TEST PROCEDURE.....	145
3.6.5 DEVIATION FROM TEST STANDARD	146
3.6.6 EUT OPERATING CONDITION	146
3.6.7 TEST RESULTS	146
3.7 ANTENNA REQUIREMENTS.....	147
3.7.1 STANDARD APPLICABLE	147
3.7.2 ANTENNA CONNECTED CONSTRUCTION.....	147
3.7.3 ANTENNA GAIN.....	147
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	147
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	
148	
6 APPENDIX 1.....	149
WLAN 2.4G	149



Test Report No.: PSU-NQN2502260117RF02

7 APPENDIX 2 BLE 217



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2502260117RF02	Original release	Mar.10, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

Note : 1.Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

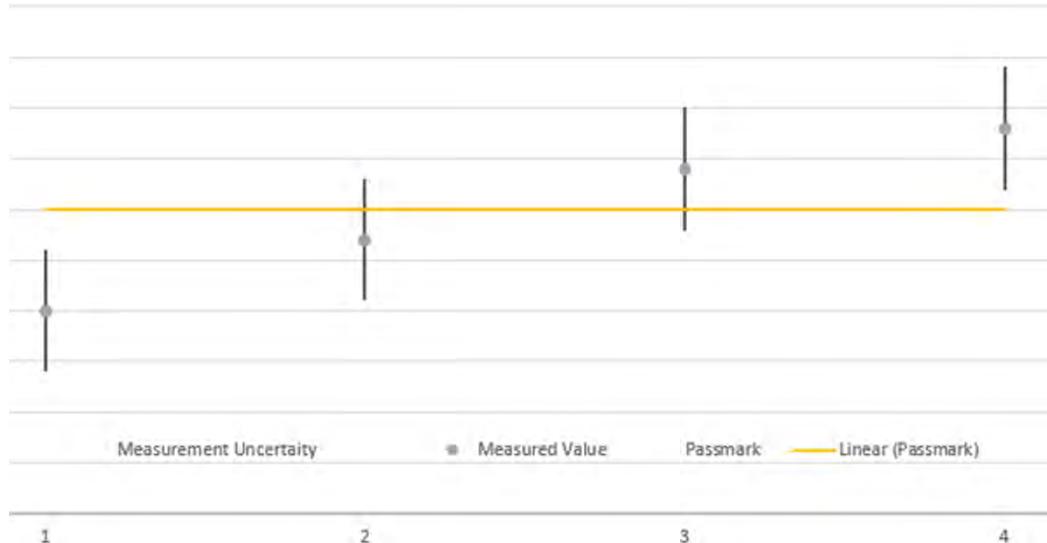

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	WiFi/BT Module
BRAND NAME*	Hisense
MODEL NAME*	MWH648S
NOMINAL VOLTAGE*	3.3Vdc (DC supply)
MODULATION *	DSSS, OFDM, OFDMA, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n(HT20)/ax(HE20): up to 144.4 Mbps 802.11n(HT40)/ax(HE40): up to 300 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps 802.11ax 20 (RU26/52/106/242): up to 286.8Mbps 802.11ax 40 (RU26/52/106/242/RU484): up to 573.5Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20/40)/ax(HE20/40) 2402-2480MHz for BT-LE(GFSK) 2412-2462MHz for ax(20M RU26/52/106/242)/ax (40M 26/52/106/242/RU484)
MAX. OUTPUT POWER	WLAN: 416.869mW (Maximum) BT-LE: 2.677mW (Maximum) RU WLAN: 769.130mW (Maximum)
ANTENNA TYPE*	Dipole Antenna with 3.55dBi gain for WIFI and BLE
Directional Gain:	For Power/PSD: 3.55dBi(Uncorrelated) for WIFI
Beamforming Directional Gain:	N/A
HW VERSION*	V1.00
SW VERSION*	N/A
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	N/A



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2502260117RF02

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a MIMO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	2TX /2RX
802.11g	2TX /2RX
802.11n(HT20)/ax(HE20)	2TX /2RX
802.11n(HT40)/ax(HE40)	2TX /2RX
802.11ax (20MHz RU 26/52/106/242)	2TX /2RX
802.11ax (40MHz RU 26/52/106/242/484)	2TX /2RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX
BT_LE(S2)	1TX /1RX
BT_LE(S8)	1TX /1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), 802.11ax20 (HE20); 802.11ax20 (RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), 802.11ax40 (HE40); 802.11ax40 (RU 26/52/106/242/484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax 20	1 to 11	1, 6, 11	OFDMA	MCS0
802.11ax 40	3 to 9	3	OFDMA	MCS0
802.11ax 20 (RU 26)	1 to 11	1, 6, 11	OFDMA	MCS0
BT-LE	0 to 39	39	GFSK	1.0



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax 20	1 to 11	1, 6, 11	OFDMA	MCS0
802.11ax 40	3 to 9	3	OFDMA	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax 20	1 to 11	1, 6, 11	OFDMA	MCS0
802.11ax 40	3 to 9	3	OFDMA	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
802.11ax 20	1 to 11	1, 6, 11	OFDMA	MCS0
802.11ax 40	3 to 9	3	OFDMA	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.3V By DC Supply	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 3.3V By DC Supply	Hanwen Xu
PLC	25deg. C, 52%RH	DC 3.3V By DC Supply	Hanwen Xu
APCM	25deg. C, 60%RH	DC 3.6V By DC Supply	Hanwen Xu

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thinkpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Mar.28,24	Mar.27,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Mar.28,24	Mar.27,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.27,24	Apr.26,25
CABLE	Rohde&Schwarz	W601	N/A	Apr.27,24	Apr.26,25

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 24 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

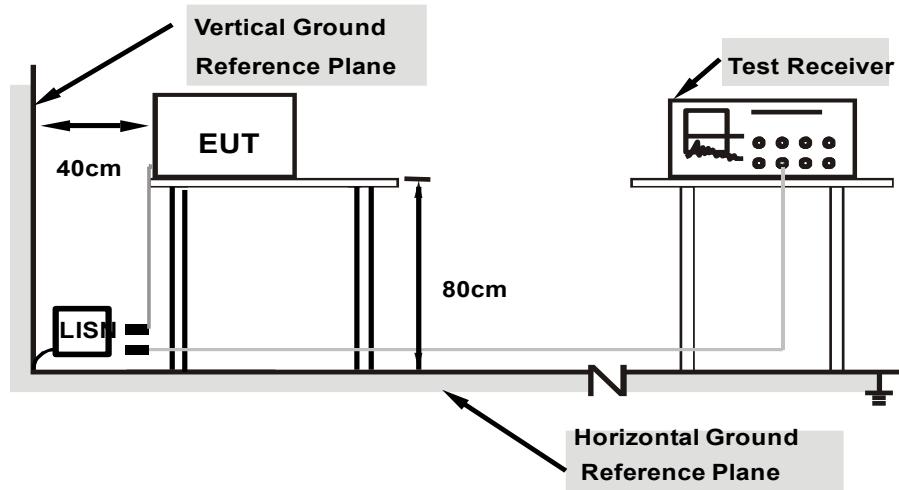

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

3.1.7 TEST RESULTS


BLE

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr.}(dB)$$

Sample calculation: $(46.21 \text{ dB}\mu\text{V}) = (35.81 \text{ dB}\mu\text{V}) + (10.4 \text{ dB})$, the corresponding frequency is 0.186182MHz.

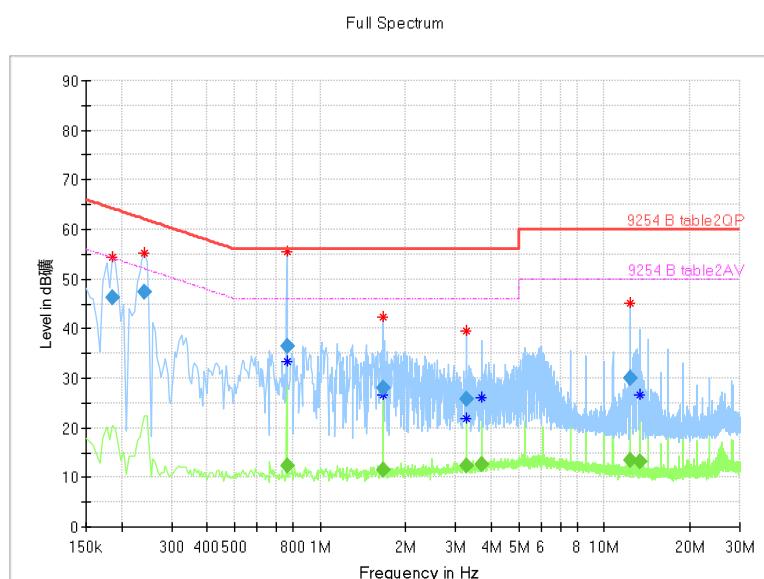

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPea k	CAverag e	Limit (dB _礦)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)	Pmea (dB _{μV})
0.186182	46.21	---	64.21	17.99	5000.0	9.000	L1	10.4	35.81
0.240455	47.51	---	62.08	14.57	5000.0	9.000	L1	10.4	37.11
0.765091	36.32	---	56.00	19.68	5000.0	9.000	N	10.4	25.92
0.765091	---	12.37	46.00	33.63	5000.0	9.000	N	10.4	1.97
1.669636	---	11.50	46.00	34.50	5000.0	9.000	L1	10.4	1.10
1.669636	28.02	---	56.00	27.98	5000.0	9.000	N	10.4	17.62
3.279727	25.75	---	56.00	30.25	5000.0	9.000	L1	10.4	15.35
3.279727	---	12.39	46.00	33.61	5000.0	9.000	L1	10.4	1.99
3.695818	---	12.48	46.00	33.52	5000.0	9.000	N	10.4	2.08
12.356841	30.12	---	60.00	29.88	5000.0	9.000	N	10.9	19.22
12.361364	---	13.40	50.00	36.60	5000.0	9.000	N	10.9	2.50
13.388023	---	13.12	50.00	36.88	5000.0	9.000	N	10.9	2.22




WIFI2.4

A “reference path loss” Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr.}(dB)$$

Sample calculation: $(32.62 \text{ dB}\mu\text{V}) = (3.02 \text{ dB}\mu\text{V}) + (29.6 \text{ dB})$, the corresponding frequency is 0.188379MHz.

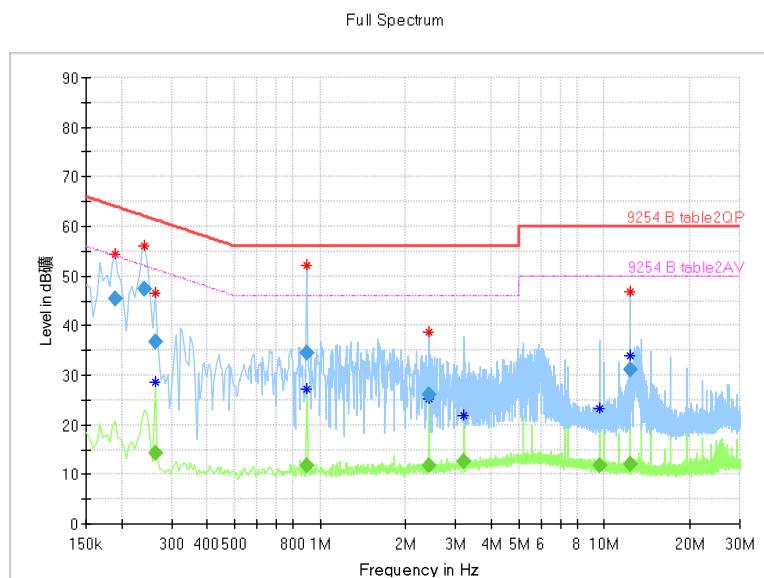

L+N Line MEASUREMENT RESULT:

Frequency (MHz)	QuasiPea k	CAverag e	Limit (dB _礦)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)	Pmea (dB _{µV})
0.190705	45.54	---	64.01	18.46	5000.0	9.000	L1	10.4	35.14
0.240455	47.45	---	62.08	14.63	5000.0	9.000	L1	10.4	37.05
0.263068	36.78	---	61.33	24.55	5000.0	9.000	N	10.4	26.38
0.263068	---	14.25	51.33	37.08	5000.0	9.000	N	10.4	3.85
0.896250	34.53	---	56.00	21.47	5000.0	9.000	L1	10.4	24.13
0.900773	---	11.76	46.00	34.24	5000.0	9.000	N	10.4	1.36
2.411364	---	11.74	46.00	34.26	5000.0	9.000	L1	10.4	1.34
2.411364	26.03	---	56.00	29.97	5000.0	9.000	L1	10.4	15.63
3.211886	---	12.49	46.00	33.51	5000.0	9.000	L1	10.4	2.09
9.665818	---	11.80	50.00	38.20	5000.0	9.000	N	10.7	0.9
12.379455	---	12.16	50.00	37.84	5000.0	9.000	N	10.9	1.26
12.379455	31.10	---	60.00	28.90	5000.0	9.000	N	10.9	20.2



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,23	Aug.21,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,23	Feb.22,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Sep.06,23	Sep.05,25
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25

NOTE:

1. The calibration interval of the above test instruments is 12/ 24 /36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

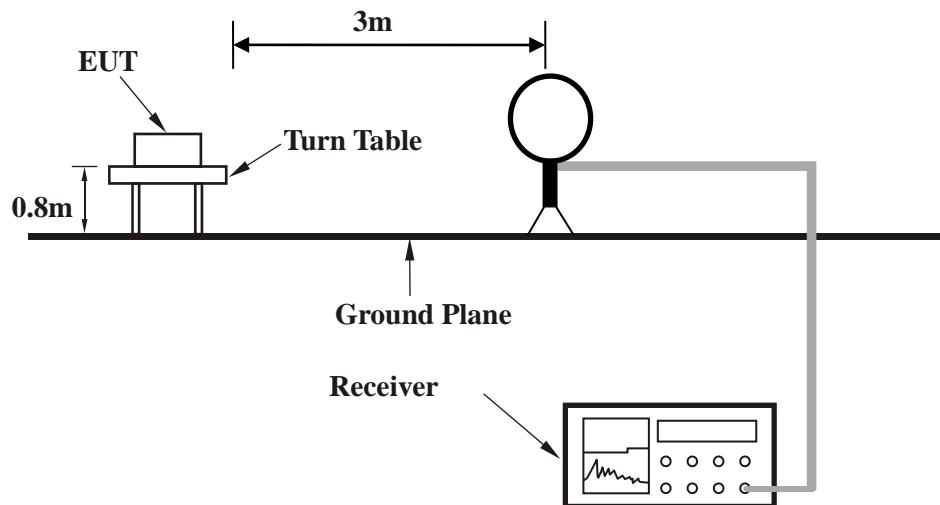


< Frequency Range 30MHz~1GHz >

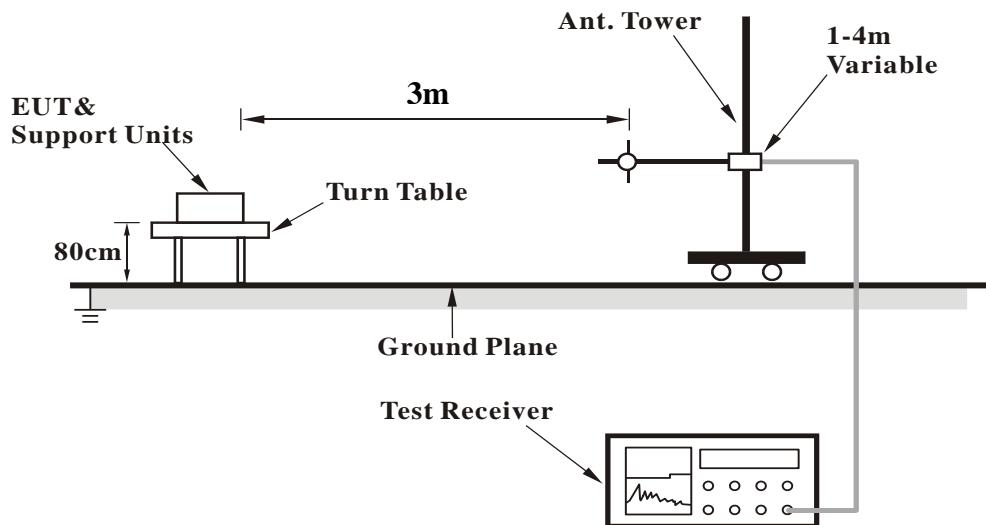



<Frequency Range above 1GHz>

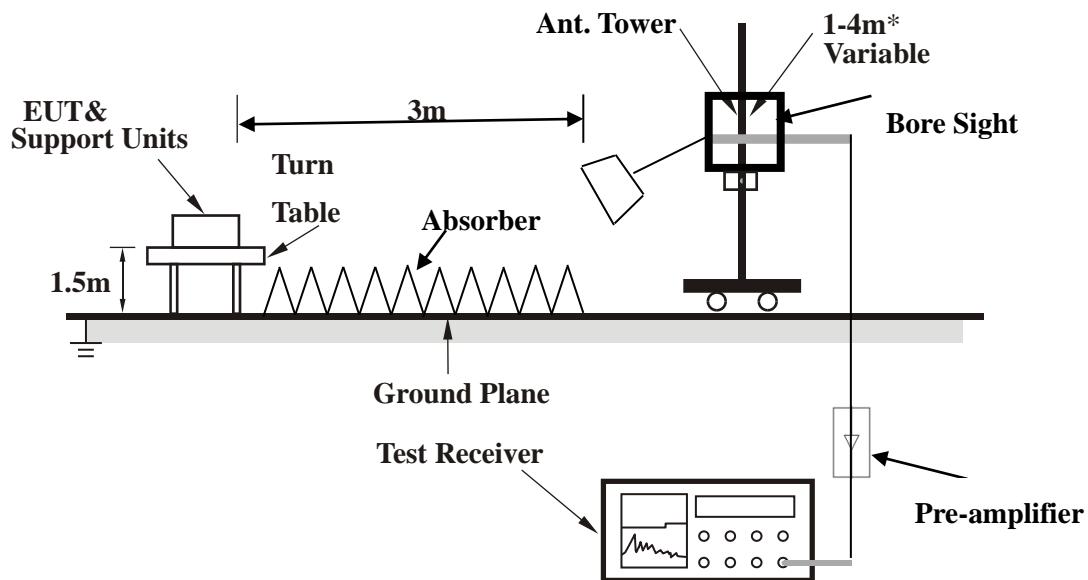

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Radiated Emission Band Edge for BLE

Full Spectrum

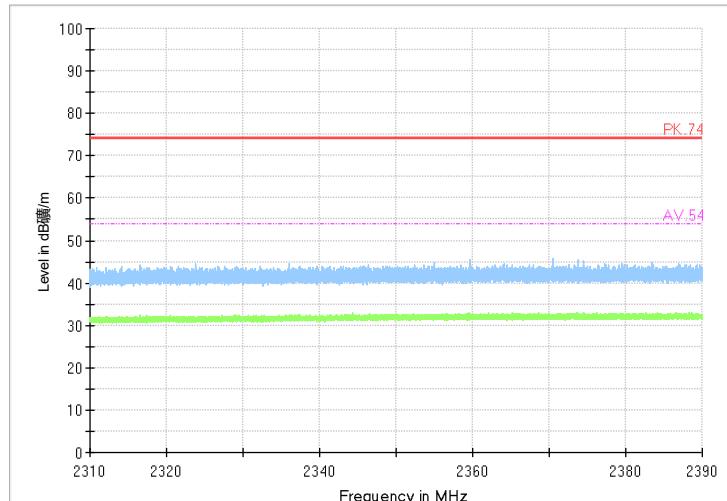


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 1Mbps)

Polarity: Vertical

Full Spectrum

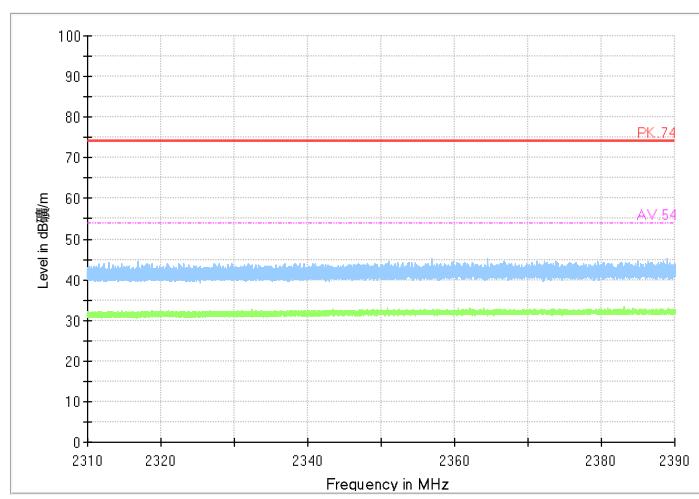

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 1Mbps)


Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

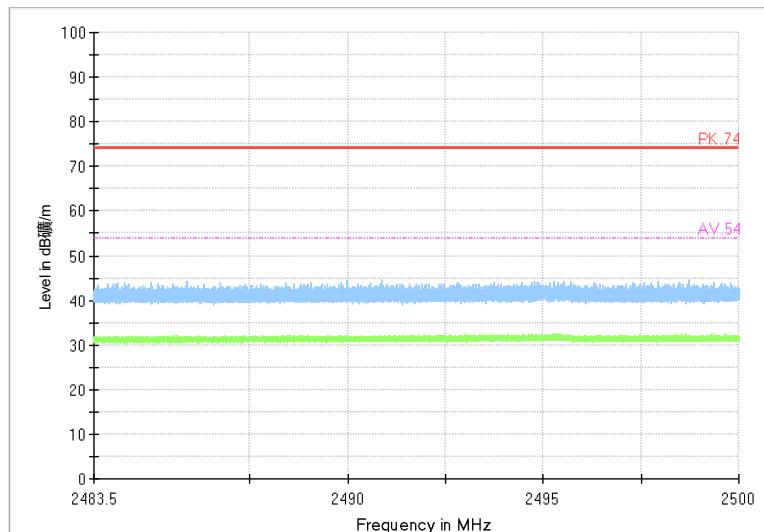


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 1Mbps)

Polarity: Vertical

Full Spectrum

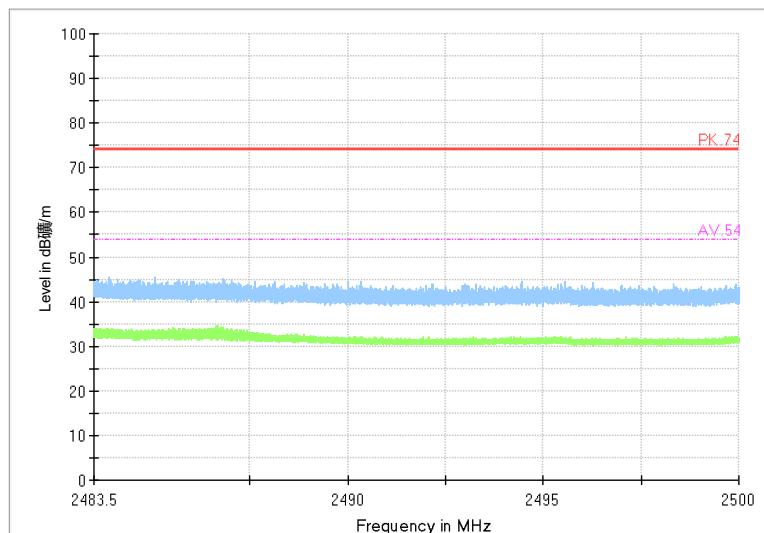

Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 1Mbps)


Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

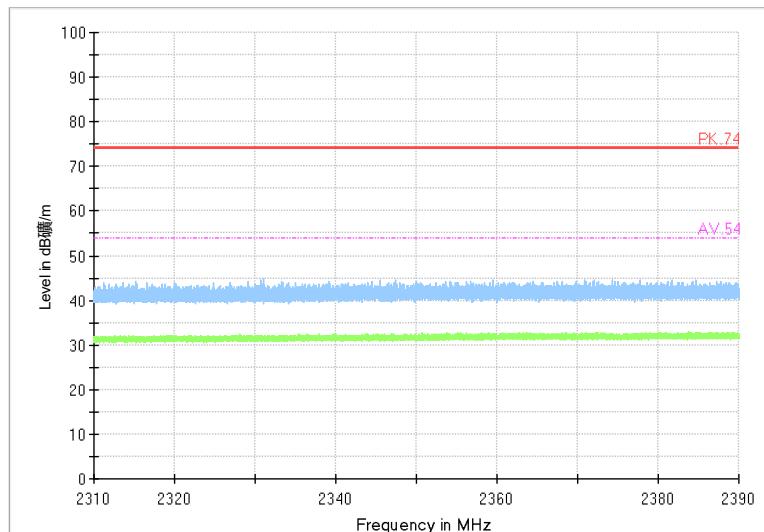


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 2Mbps)

Polarity: Vertical

Full Spectrum

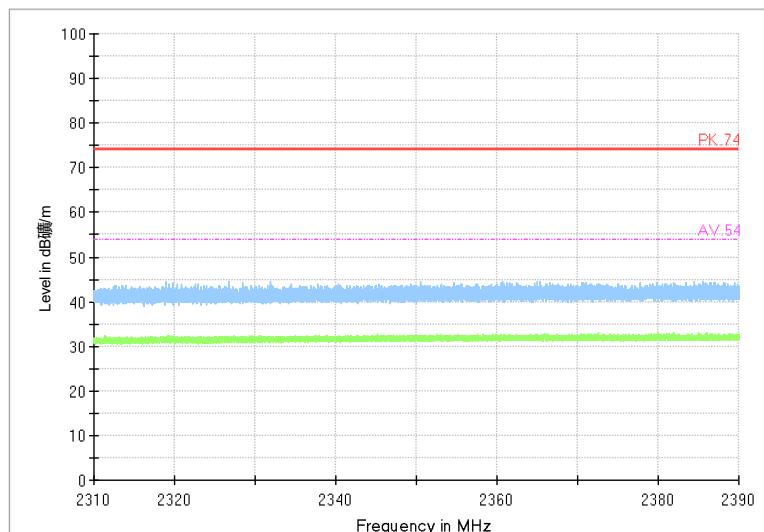

Carrier frequency (MHz): 2402


Channel No.:0

Test Mode: GFSK (LE 2Mbps)

Polarity: Horizontal



Full Spectrum

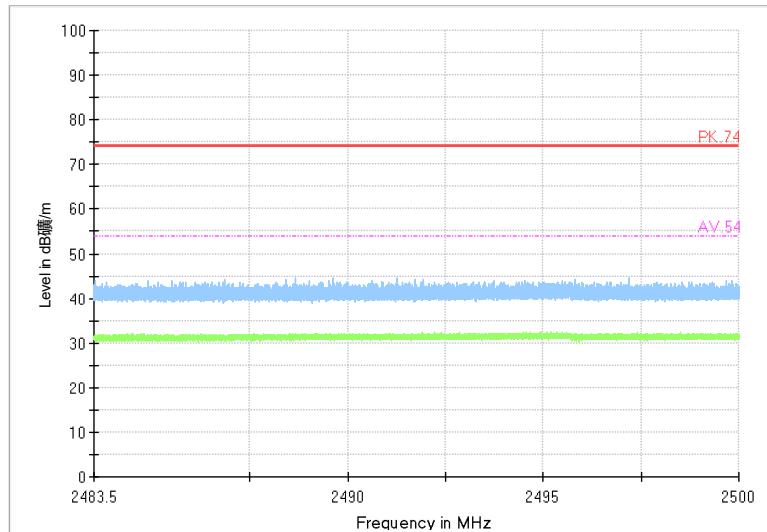


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 2Mbps)

Polarity: Vertical

Full Spectrum

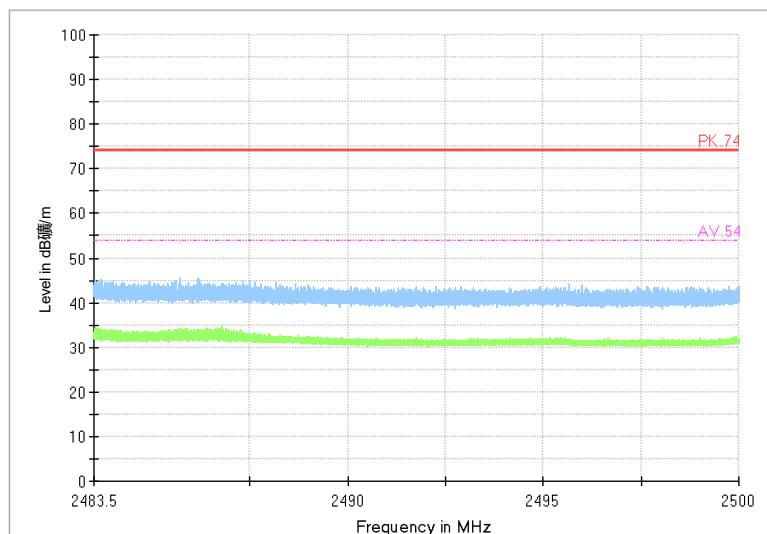

Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (LE 2Mbps)


Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

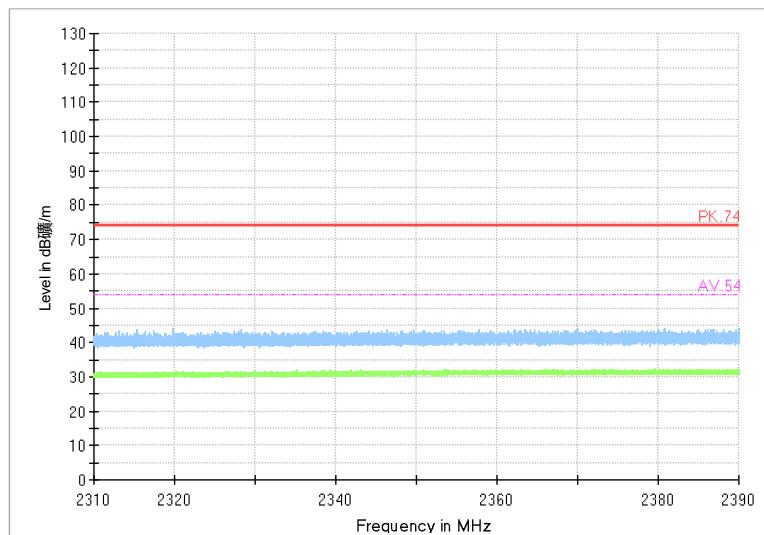


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (BLE Coded(125kHz S=8))

Polarity: Vertical

Full Spectrum

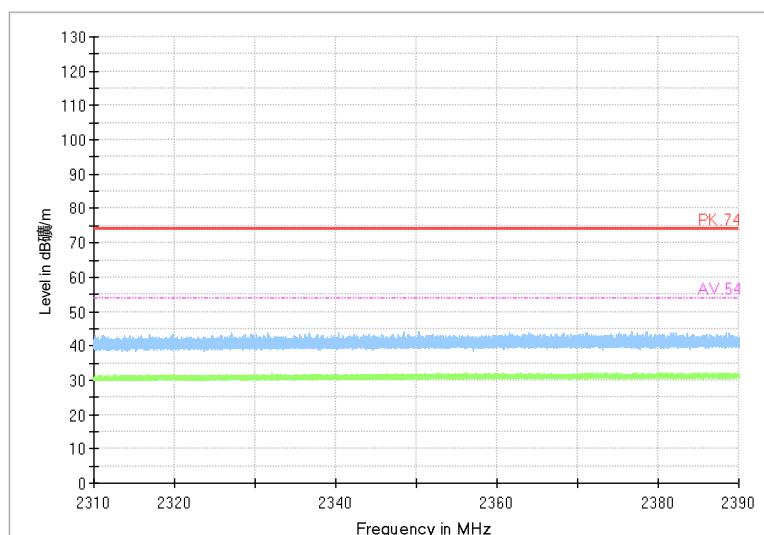

Carrier frequency (MHz): 2402

Channel No.:0


Test Mode: GFSK (BLE Coded(125kHz S=8))

Polarity: Horizontal



Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

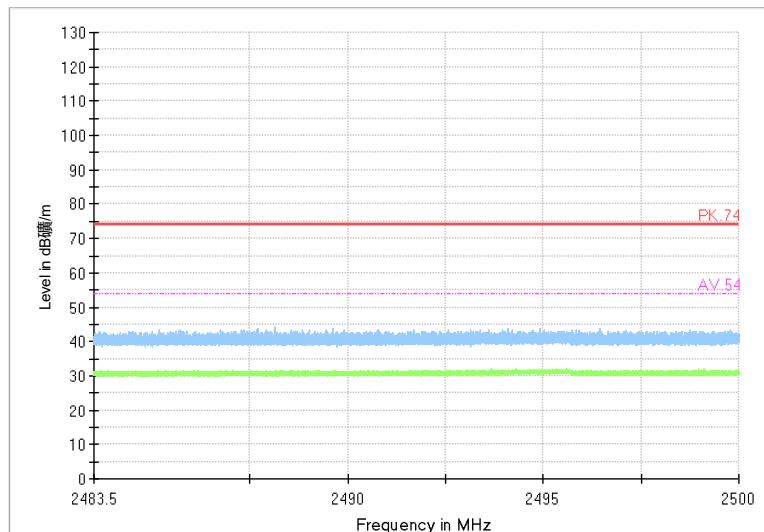


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (BLE Coded(125kHz S=8))

Polarity: Vertical

Full Spectrum

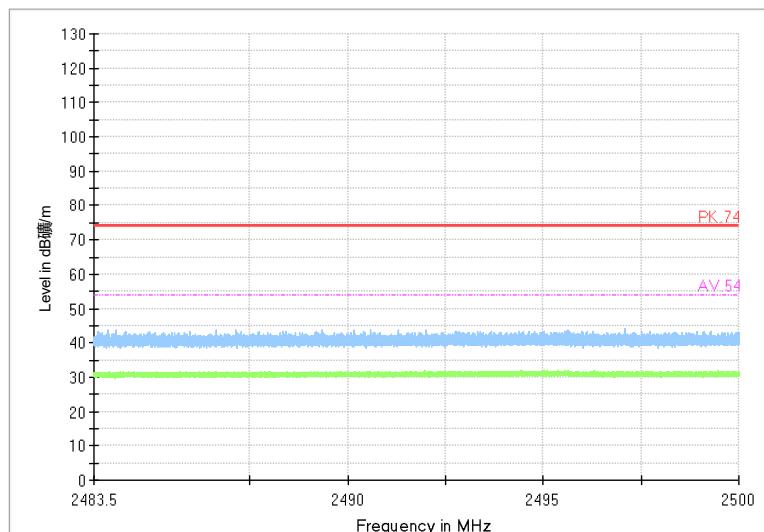

Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (BLE Coded(125kHz S=8))


Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

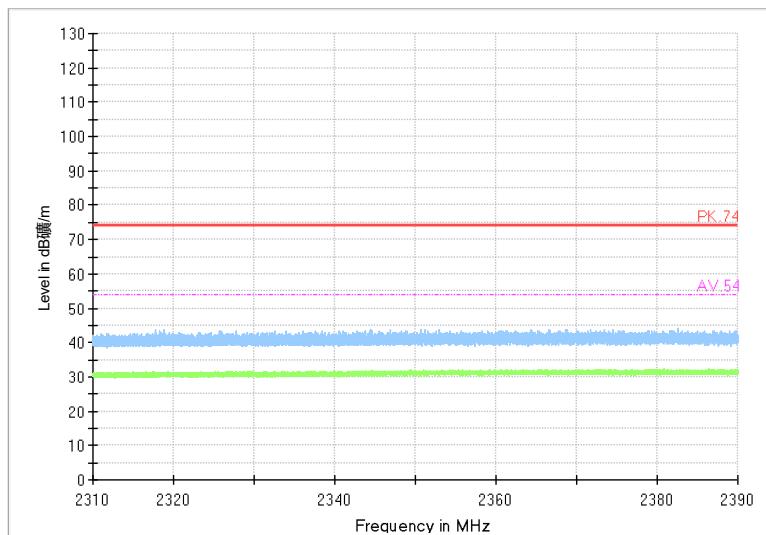


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (BLE Coded(500kHz S=2))

Polarity: Vertical

Full Spectrum

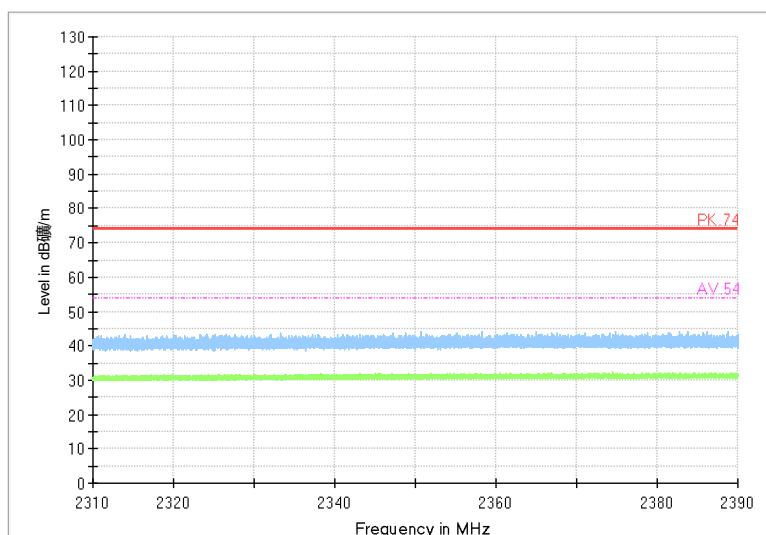

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (BLE Coded(500kHz S=2))


Polarity: Horizontal



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

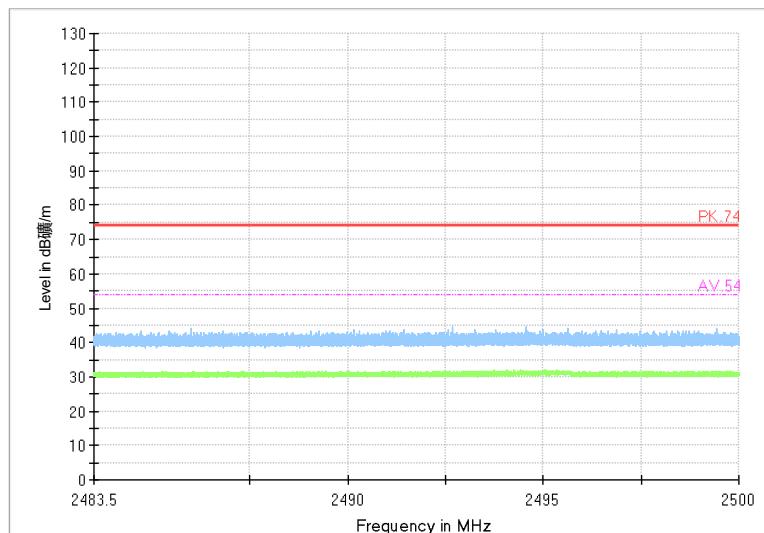


Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (BLE Coded(500kHz S=2))

Polarity: Vertical

Full Spectrum

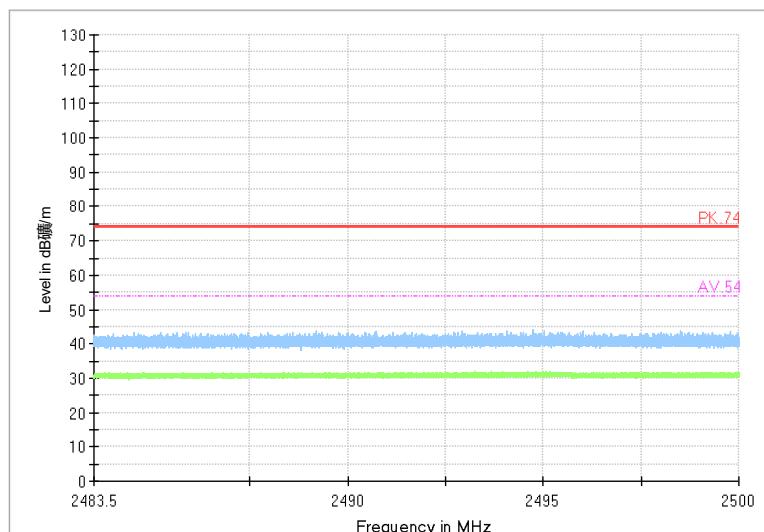

Carrier frequency (MHz): 2480

Channel No.:39

Test Mode: GFSK (BLE Coded(500kHz S=2))

Polarity: Horizontal



Radiated Emission for BLE

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result = $P_{mea} + A_{Rpl}$

Sample calculation: $(30.02 \text{ dB}\mu\text{V/m}) = (49.02 \text{ dBuV}) + (-19 \text{ dB/m})$, the corresponding frequency is 348.523333MHz.

For GFSK (LE 1Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
348.523333	30.02	-19	49.02	Vertical	46.00	15.98
419.843000	26.00	-17	43.00	Vertical	46.00	20.00
627.286000	22.58	-13	35.58	Vertical	46.00	23.42
699.161333	20.38	-11	31.38	Horizontal	46.00	25.62
766.761667	23.86	-10	33.86	Horizontal	46.00	22.14
836.368667	24.93	-9	33.93	Horizontal	46.00	21.07

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
836.328667	26.07	-9	35.07	Vertical	46.00	19.93
769.657333	25.13	-10	35.13	Vertical	46.00	20.87
932.617333	27.38	-8	35.38	Vertical	46.00	18.62
279.063667	27.18	-21	48.18	Vertical	46.00	18.82
419.810667	26.01	-17	43.01	Vertical	46.00	19.99
348.871333	30.70	-19	49.70	Horizontal	46.00	15.30

Channel No.:39

Frequency	Result	A_{Rpl}	P_{mea}	Polarity	Limit	Margin
Huarui 7layers High Technology (Suzhou) Co., Ltd.	Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province				Tel: +86 (0557) 368 1008	



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

(MHz)	(dBuV/m)	(dB)	(dBuV/m)		(dBuV/m)	(dB)
839.659000	26.42	-9	35.42	Vertical	46.00	19.58
769.657333	25.99	-10	35.99	Vertical	46.00	20.01
909.693000	26.27	-8	34.27	Vertical	46.00	19.73
279.581000	24.96	-21	45.96	Vertical	46.00	21.04
418.258667	26.60	-17	43.60	Vertical	46.00	19.40
348.515667	32.53	-19	51.53	Vertical	46.00	13.47

For GFSK (LE 2Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
836.716667	25.99	-9	34.99	Vertical	46.00	20.01
766.747333	25.59	-10	35.59	Vertical	46.00	20.41
959.971333	25.99	-7	32.99	Vertical	46.00	20.01
278.902000	25.31	-21	46.31	Vertical	46.00	20.69
419.843000	25.76	-17	42.76	Vertical	46.00	20.24
349.259333	28.92	-19	47.92	Vertical	46.00	17.08

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
121.729667	20.30	-27	47.30	Vertical	43.50	23.20
279.904333	26.40	-21	47.40	Vertical	46.00	19.60
349.841333	30.56	-19	49.56	Vertical	46.00	15.44
418.161667	26.46	-17	43.46	Vertical	46.00	19.54
766.973667	25.04	-10	35.04	Vertical	46.00	20.96
836.328667	26.40	-9	35.40	Vertical	46.00	19.60

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
279.807333	25.77	-21	46.77	Vertical	46.00	20.23
349.873667	28.99	-19	47.99	Vertical	46.00	17.01
418.194000	27.20	-17	44.20	Vertical	46.00	18.80



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

479.918333	23.56	-16	39.56	Vertical	46.00	22.44
696.972000	24.69	-11	35.69	Vertical	46.00	21.31
767.038333	24.72	-10	34.72	Vertical	46.00	21.28

For GFSK (BLE Coded(125kHz S=8))

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
923.143667	25.51	-8	33.51	Vertical	46.00	20.49
839.659000	26.70	-9	35.70	Vertical	46.00	19.30
766.682667	25.42	-10	35.42	Vertical	46.00	20.58
348.968333	29.52	-19	48.52	Vertical	46.00	16.48
419.778333	26.39	-17	43.39	Vertical	46.00	19.61
119.983667	24.05	-27	51.05	Vertical	43.50	19.45

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
839.723667	27.78	-9	36.78	Vertical	46.00	18.22
942.996333	25.34	-8	33.34	Vertical	46.00	20.66
768.364000	25.29	-10	35.29	Vertical	46.00	20.71
836.296333	26.35	-9	35.35	Vertical	46.00	19.65
418.194000	25.11	-17	42.11	Vertical	46.00	20.89
348.548000	30.34	-19	49.34	Vertical	46.00	15.66

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
927.896667	25.07	-8	33.07	Vertical	46.00	20.93
766.682667	24.90	-10	34.90	Vertical	46.00	21.10
767.814333	24.74	-10	34.74	Vertical	46.00	21.26
119.983667	22.81	-27	49.81	Vertical	43.50	20.69
419.810667	28.33	-17	45.33	Vertical	46.00	17.67
348.677333	29.39	-19	48.39	Vertical	46.00	16.61



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

For GFSK (BLE Coded(500kHz S=2))

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
836.296333	25.81	-9	34.81	Vertical	46.00	20.19
697.004333	25.03	-11	36.03	Vertical	46.00	20.97
822.587000	25.29	-9	34.29	Vertical	46.00	20.71
349.873667	28.80	-19	47.80	Vertical	46.00	17.20
119.983667	22.52	-27	49.52	Vertical	43.50	20.98
956.996667	25.48	-7	32.48	Vertical	46.00	20.52

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
836.296333	25.12	-9	34.12	Vertical	46.00	20.88
697.004333	25.23	-11	36.23	Vertical	46.00	20.77
822.587000	25.20	-9	34.20	Vertical	46.00	20.80
349.873667	28.81	-19	47.81	Vertical	46.00	17.19
119.983667	22.53	-27	49.53	Vertical	43.50	20.97
956.996667	25.42	-7	32.42	Vertical	46.00	20.58


Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
839.626667	27.25	-9	36.25	Vertical	46.00	18.75
949.980333	25.98	-7	32.98	Vertical	46.00	20.02
769.722000	24.93	-10	34.93	Vertical	46.00	21.07
348.418667	29.53	-19	48.53	Vertical	46.00	16.47
418.258667	26.56	-17	43.56	Vertical	46.00	19.44
119.983667	25.03	-27	52.03	Vertical	43.50	18.47



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

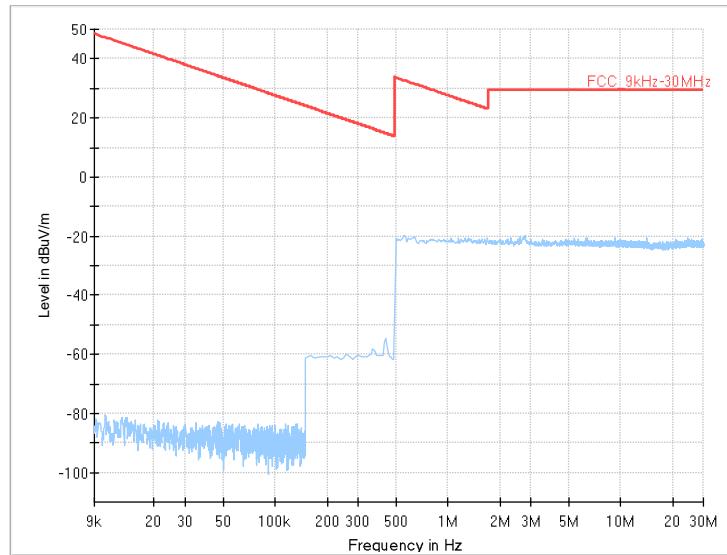


Frequency Range: 9kHz -30MHz

Detector: QP mode


Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.



Channel No.:0

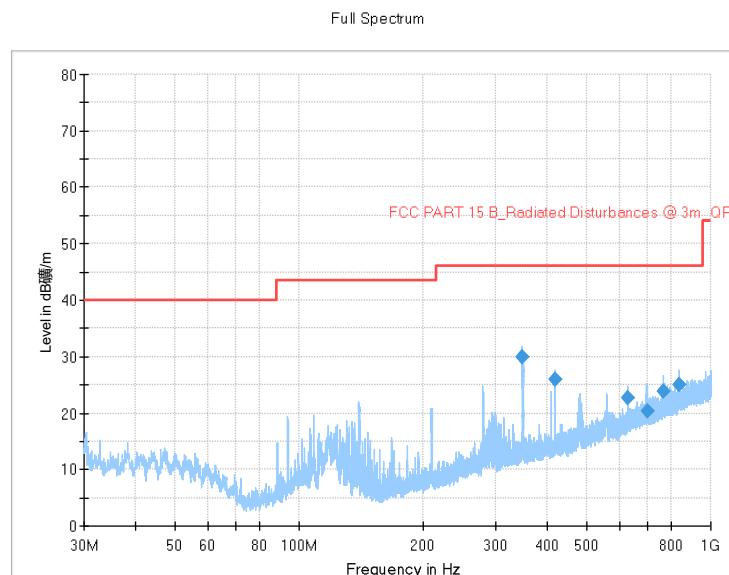

Frequency Range: 30MHz-1GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

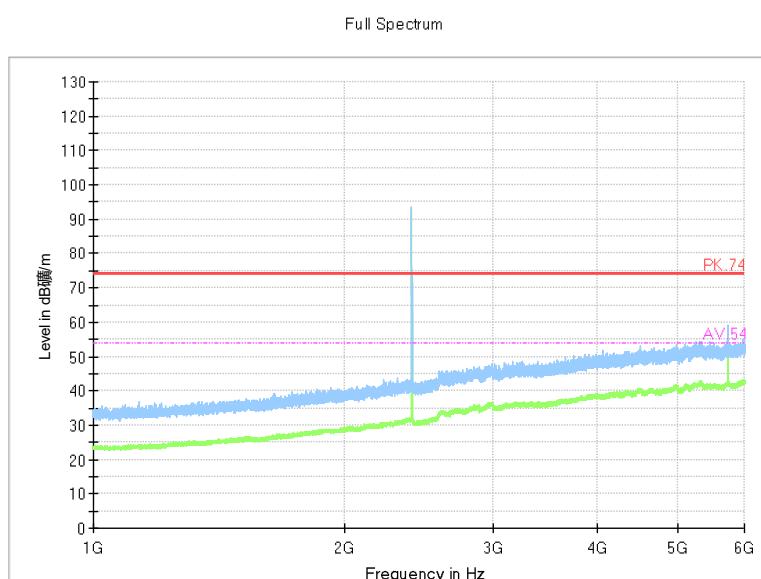



Frequency Range: 1GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

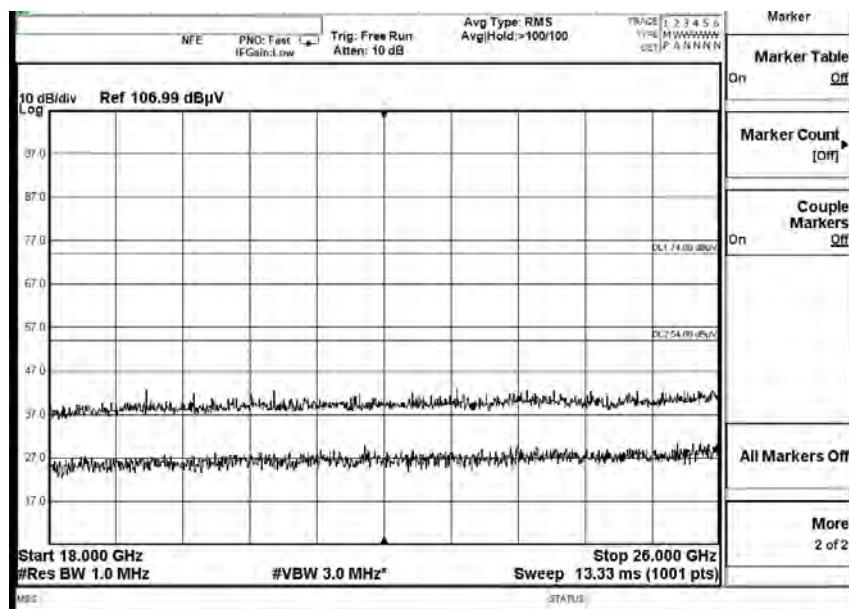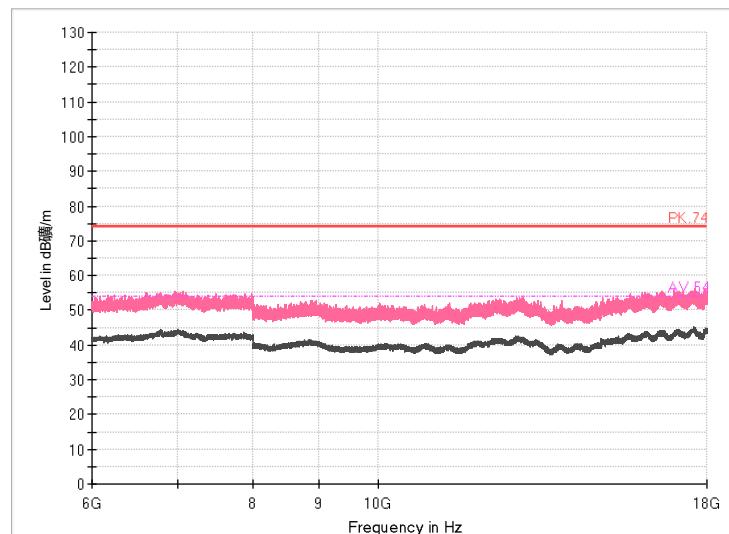




Channel No.:19

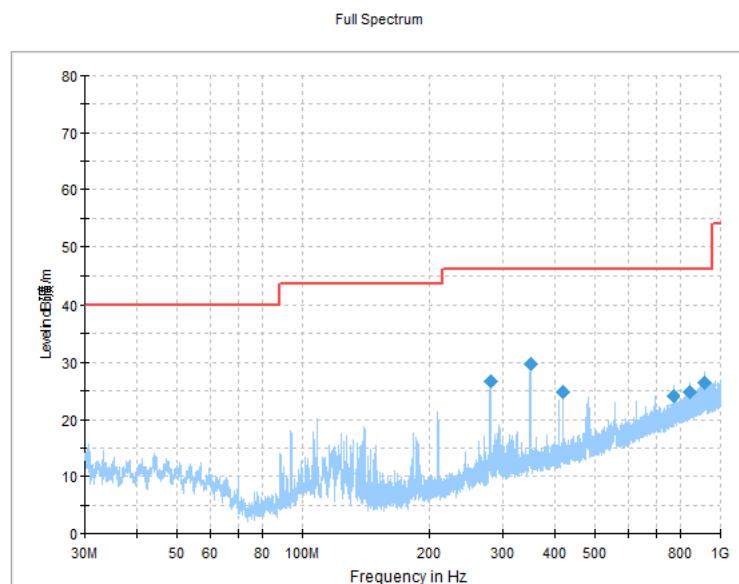

Frequency Range: 30MHz-1GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

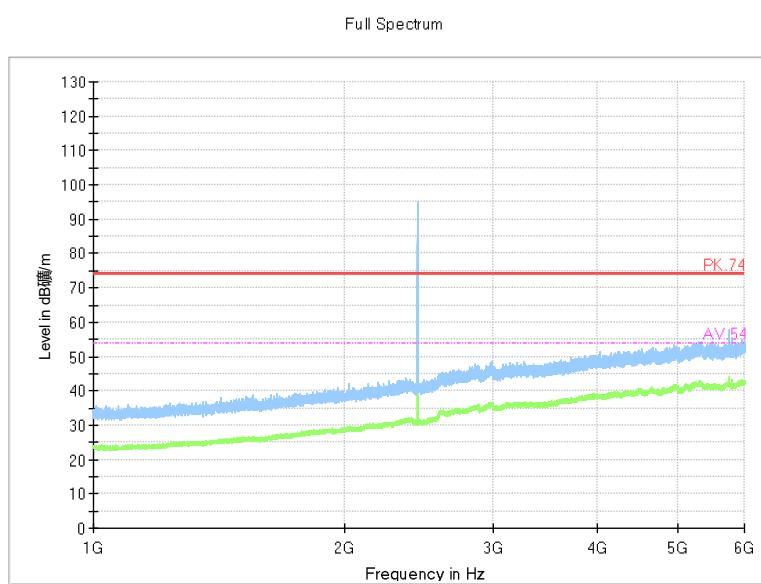


Frequency Range: 1GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

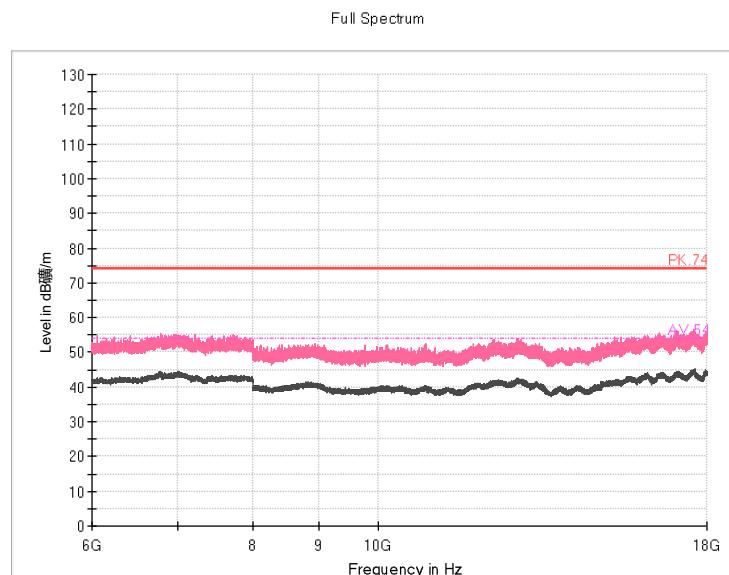

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 1Mbps)

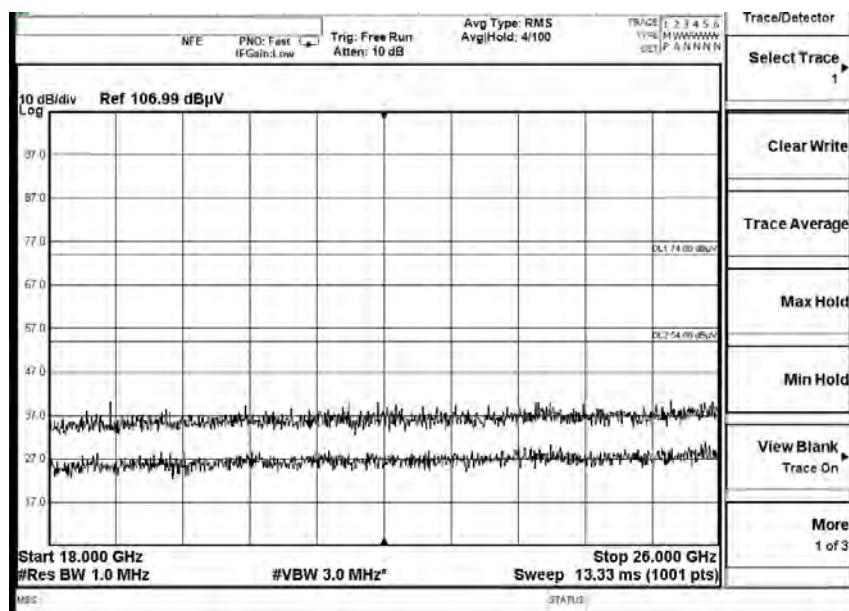


Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE 1Mbps)




Channel No.:39

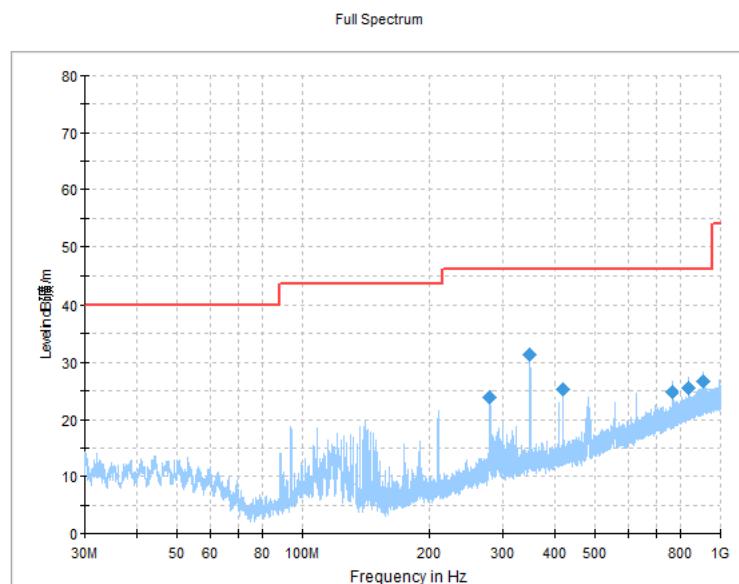


Frequency Range: 30MHz-1GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

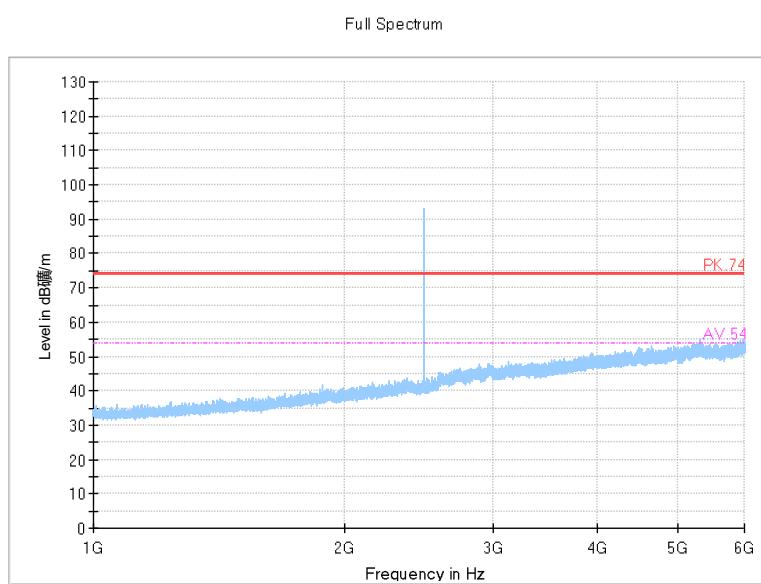

Frequency Range: 1GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

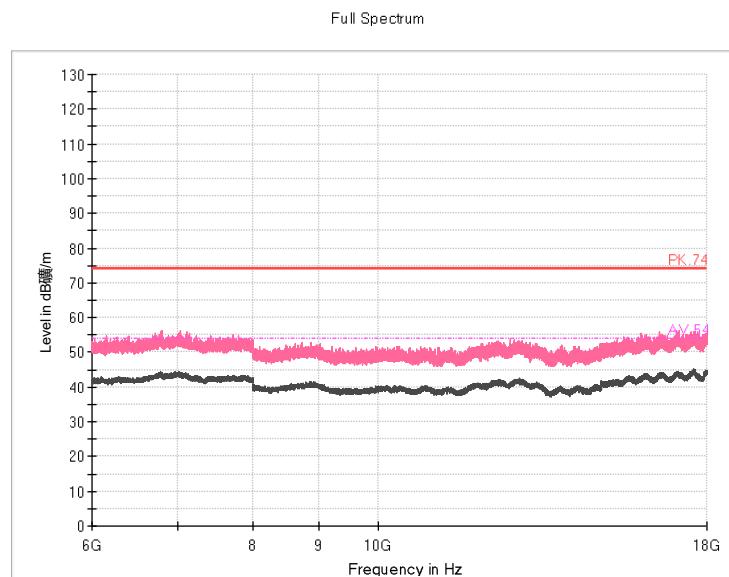

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

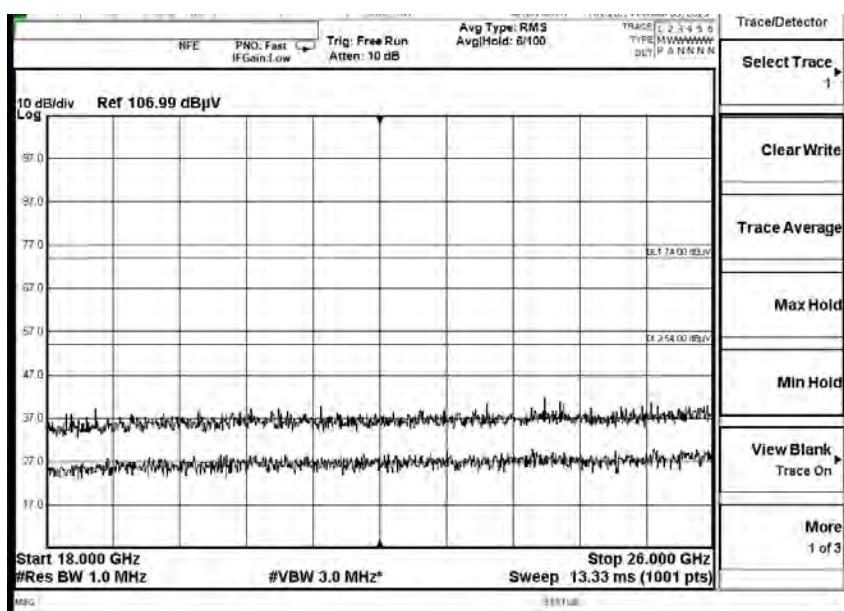


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Channel No.:0

Full Spectrum

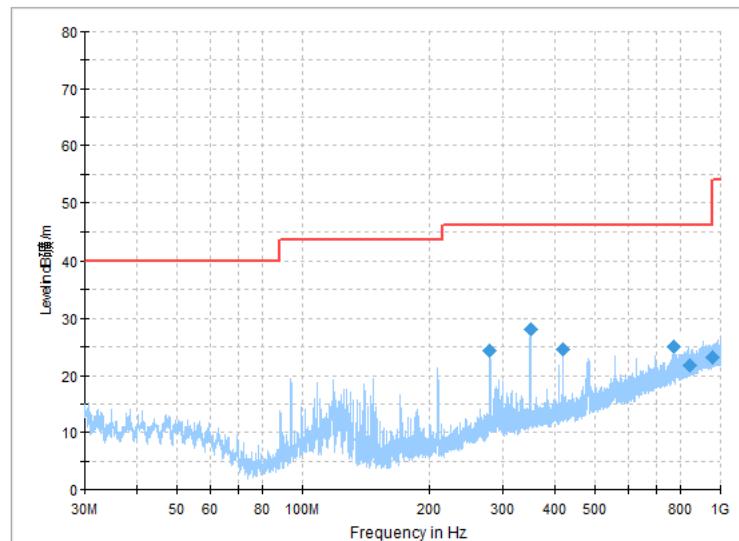


Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

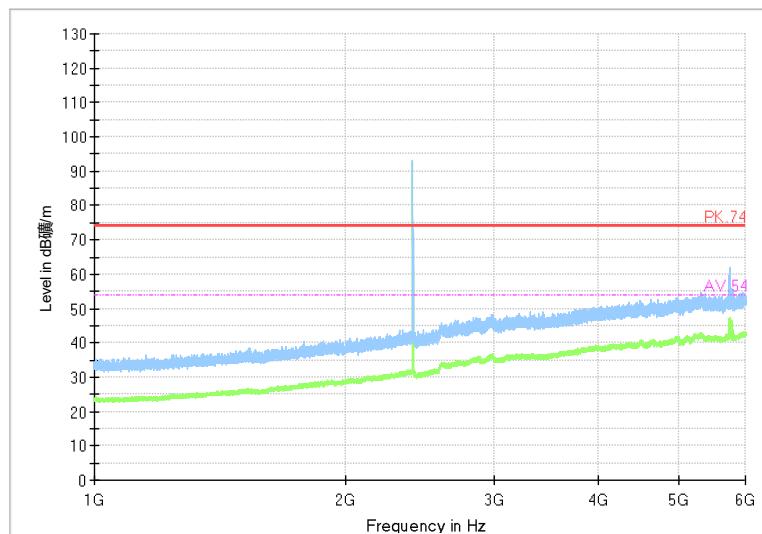

Frequency Range: 1GHz-6GHz


Detector: Av mode and PK mode

Modulation type: GFSK (LE2Mbps)



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

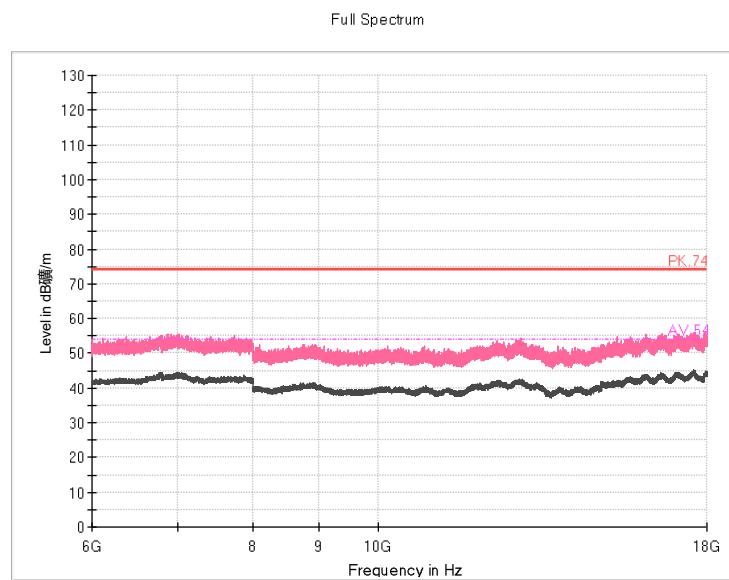

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE2Mbps)

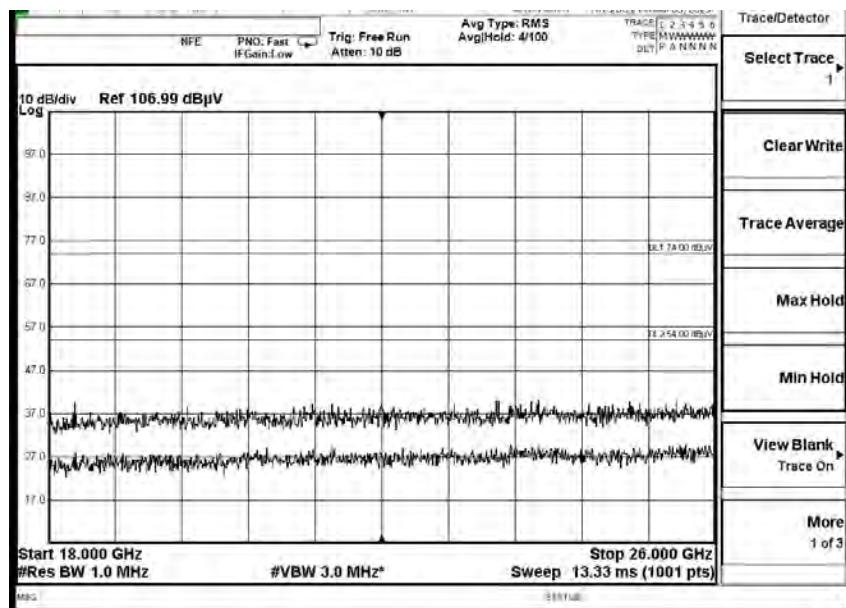


Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (LE2Mbps)



Channel No.:19

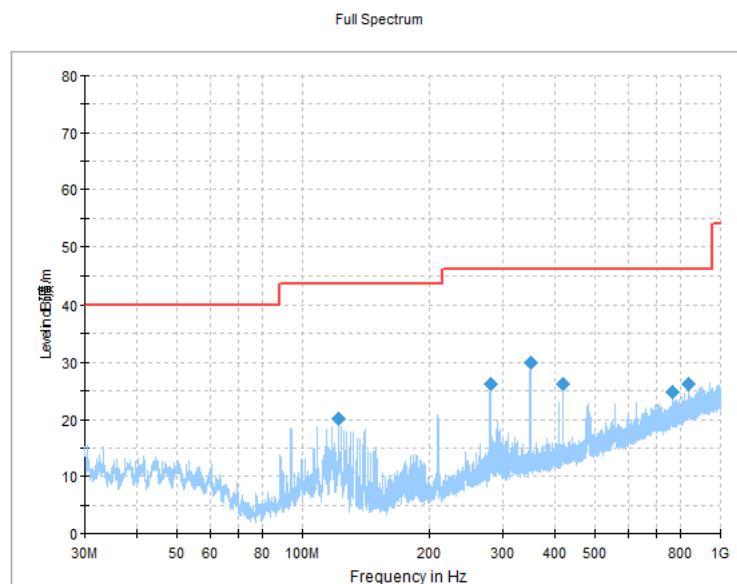

Frequency Range: 30MHz-1GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

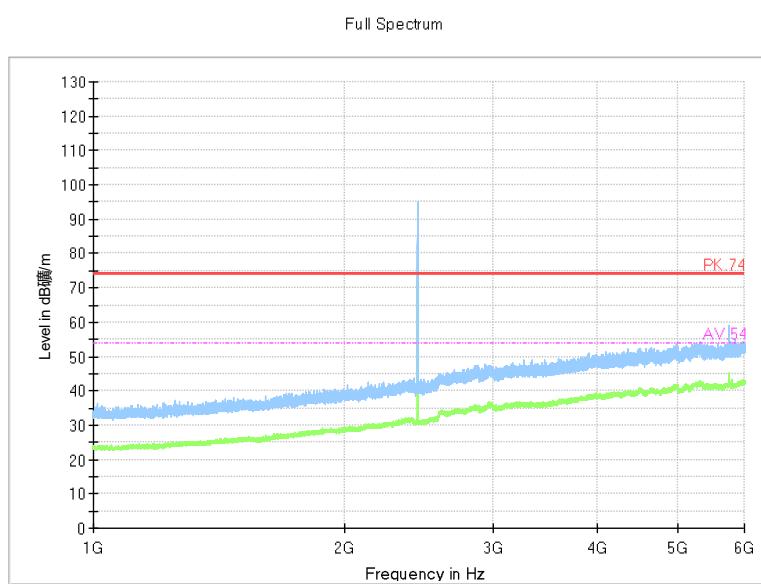


Frequency Range: 1GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02


Full Spectrum

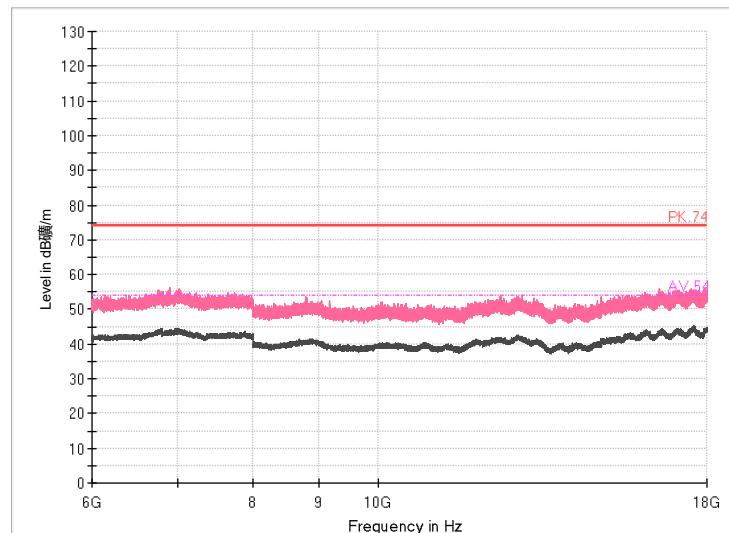

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)

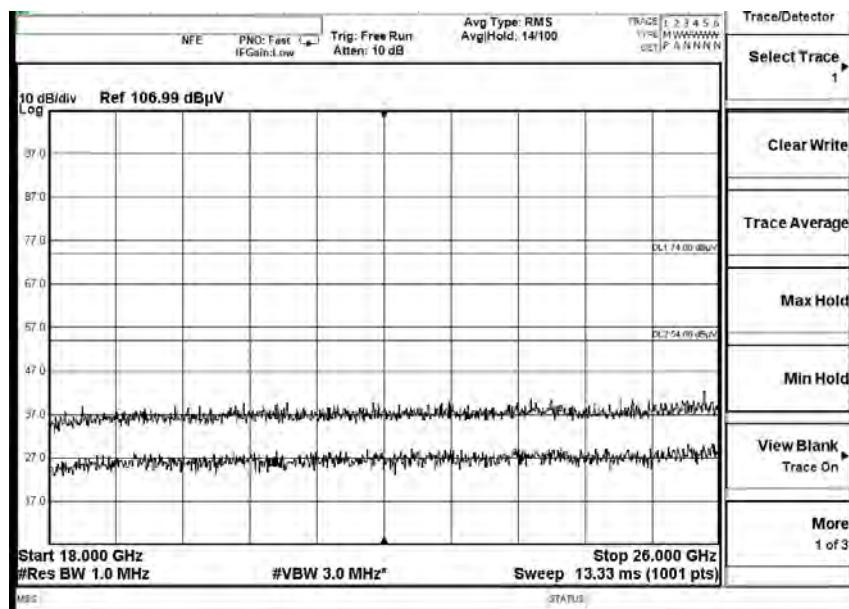




**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Channel No.:39

Full Spectrum

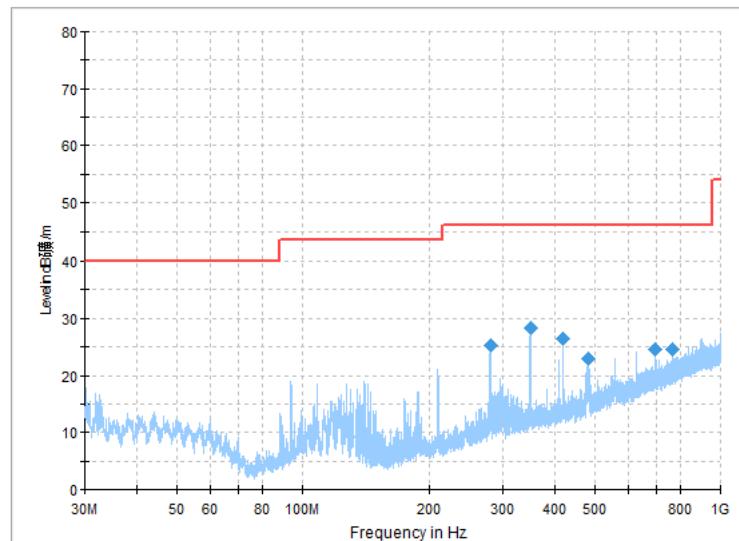


Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (LE 2Mbps)

Full Spectrum

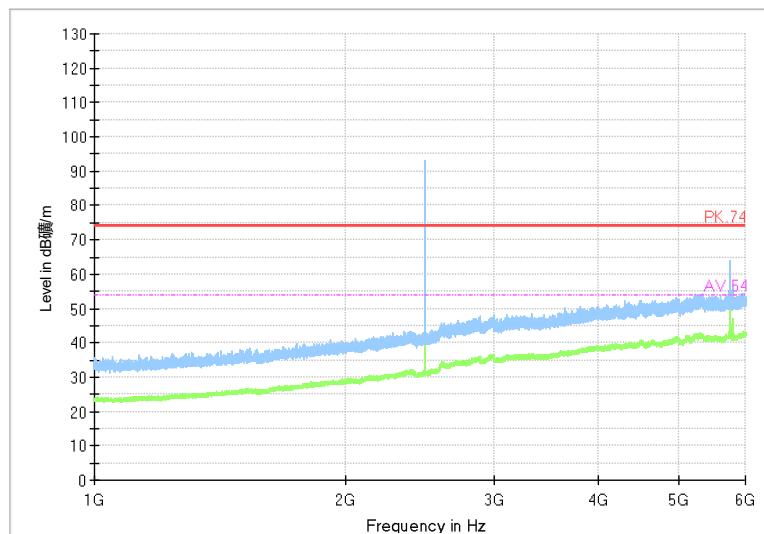





BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

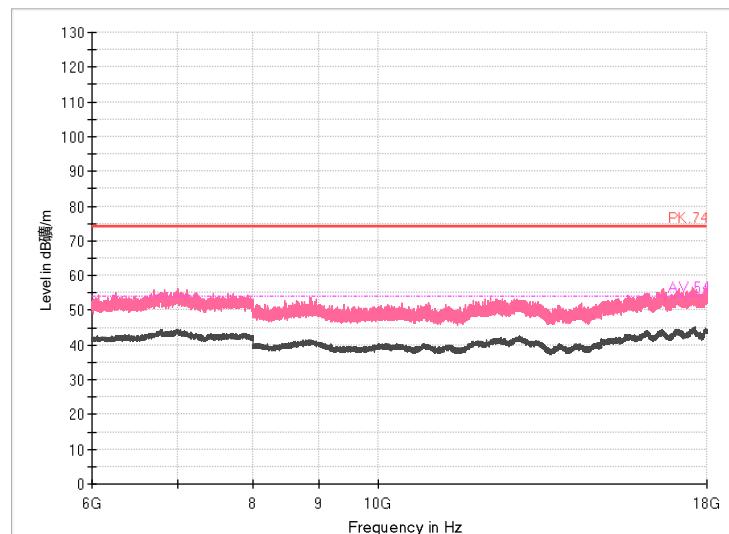


Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

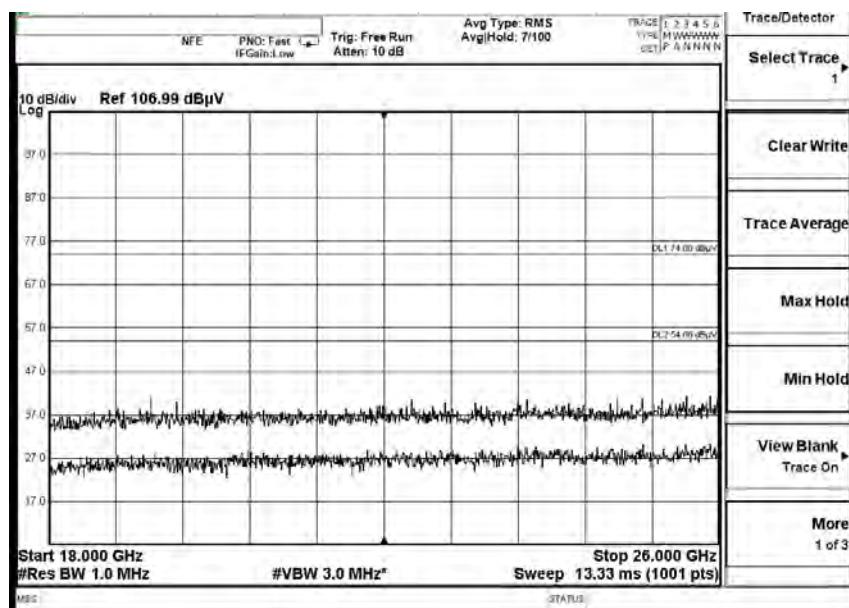

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)




Channel No.:0

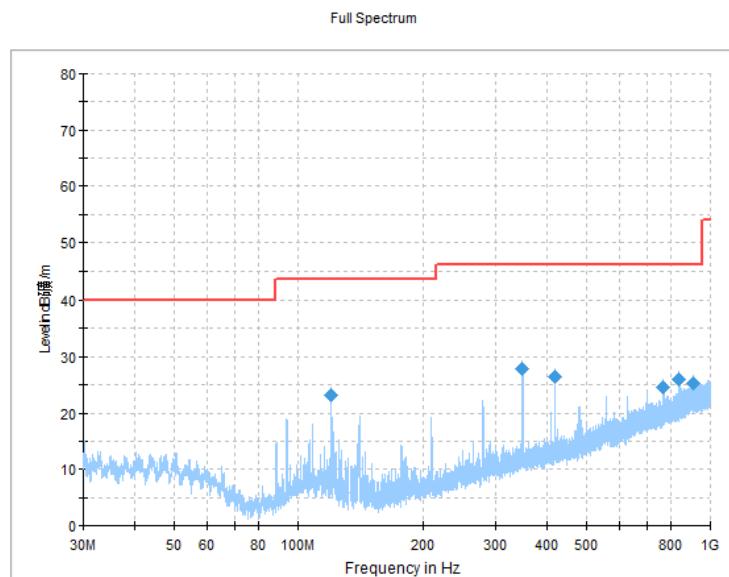

Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(125kHz S=8))

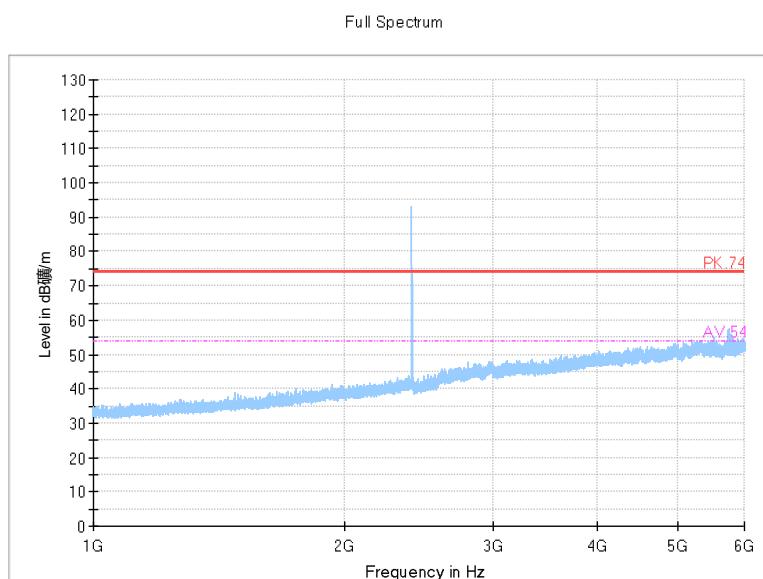

Frequency Range: 1GHz-6GHz

Detector: Av mode and PK mode



Modulation type: GFSK (BLE Coded(125kHz S=8))



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

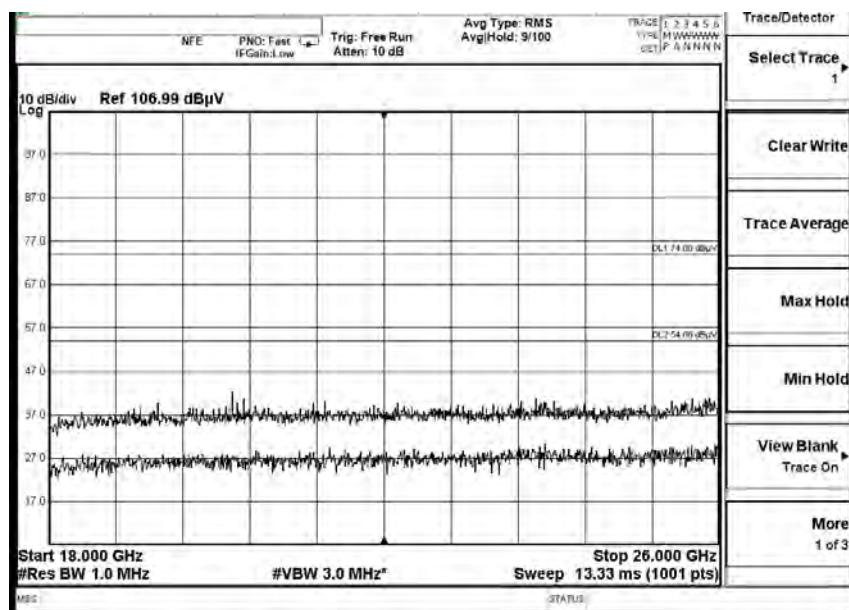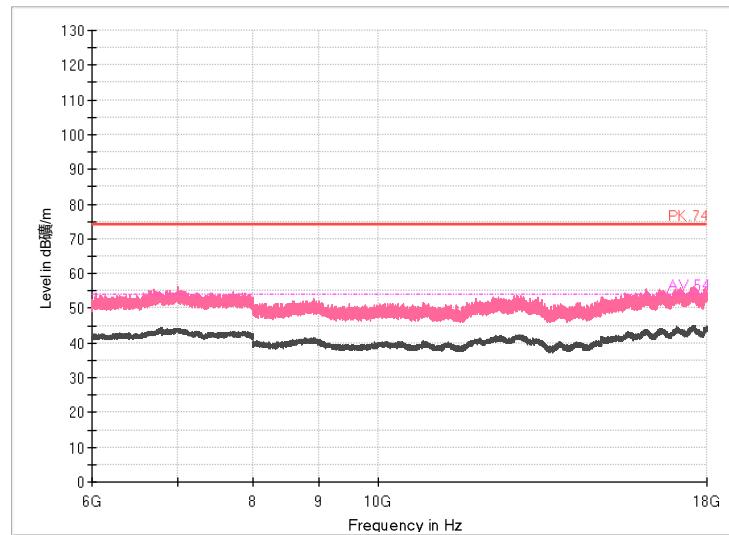




Channel No.:19

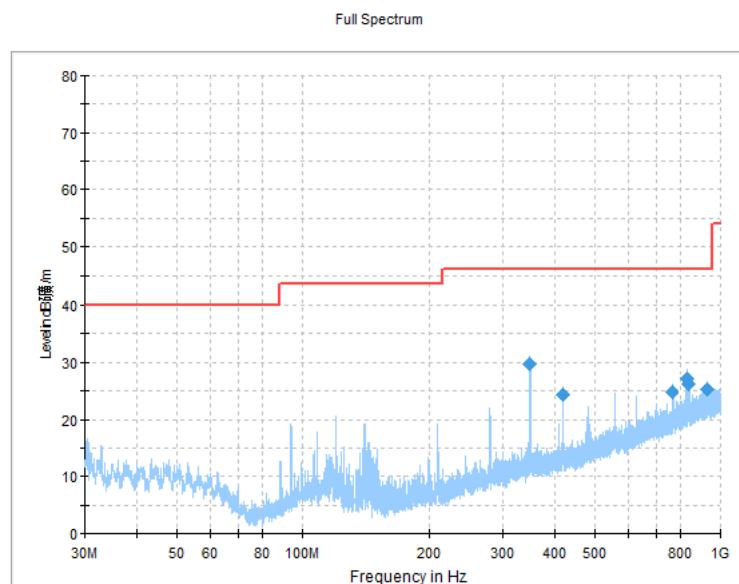

Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(125kHz S=8))

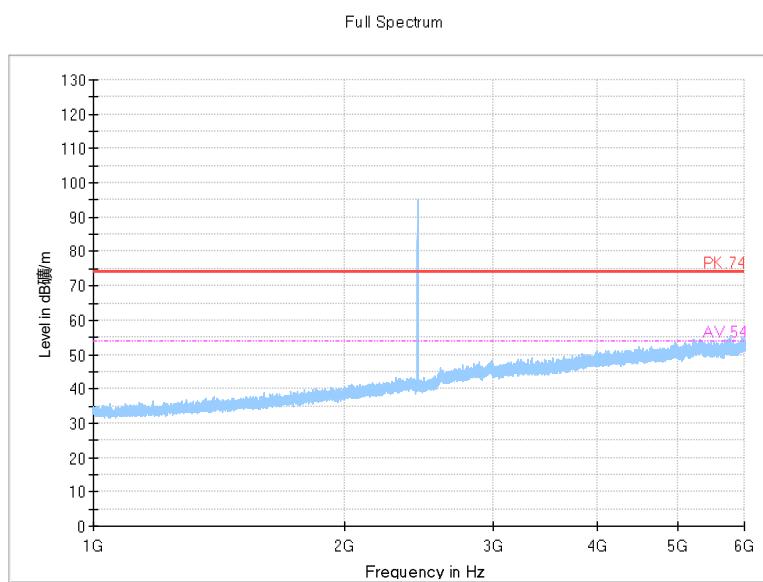

Frequency Range: 1GHz-6GHz

Detector: Av mode and PK mode


Modulation type: GFSK (BLE Coded(125kHz S=8))



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02


Full Spectrum

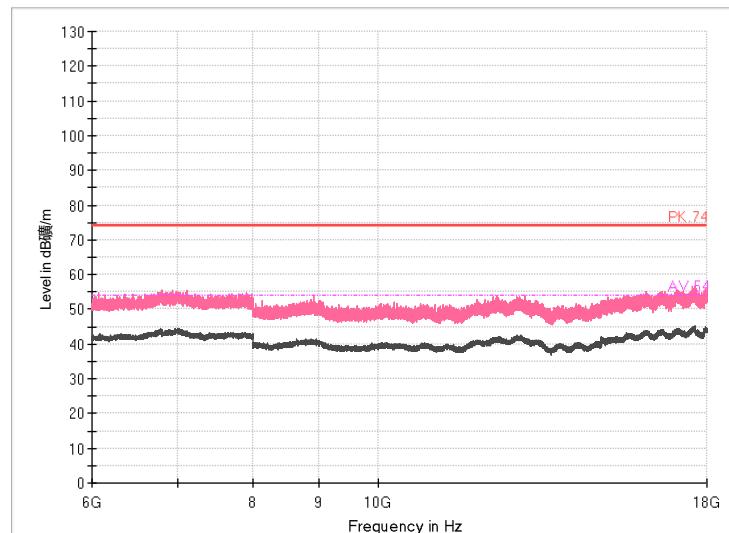

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(125kHz S=8))

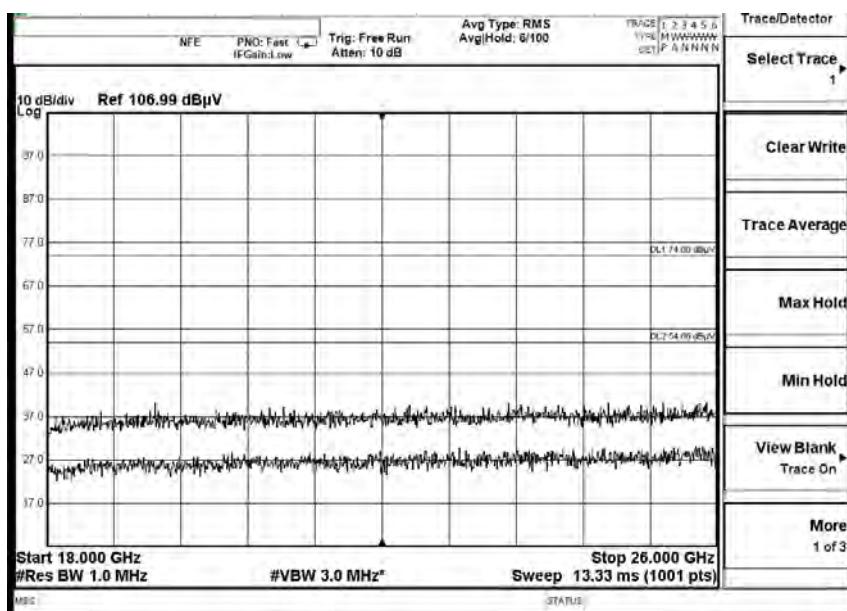

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (BLE Coded(125kHz S=8))




**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Channel No.:39

Full Spectrum

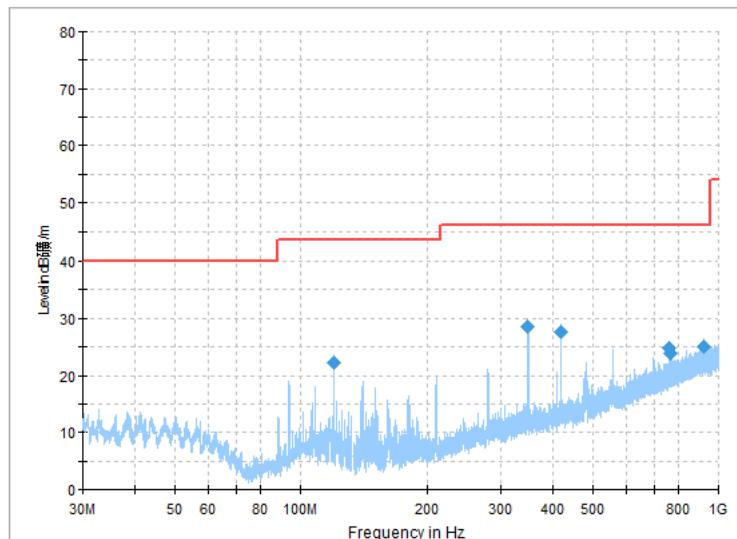

Full Spectrum


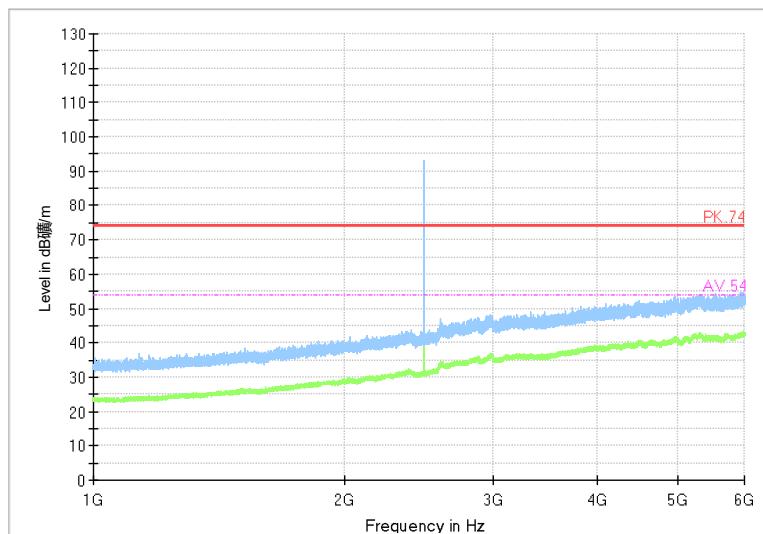




BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

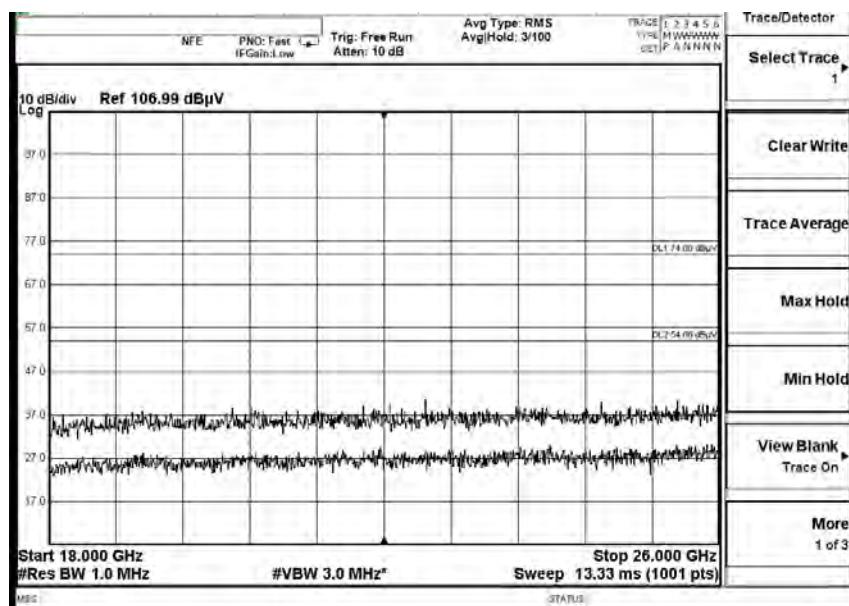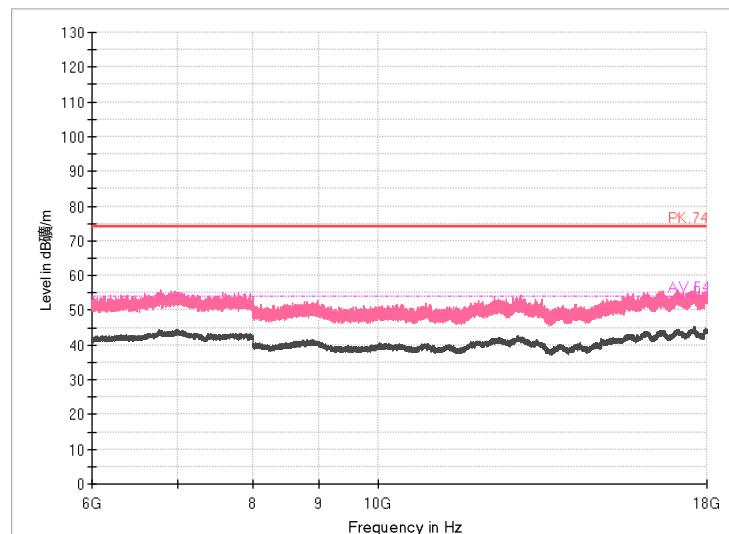




Channel No.:0

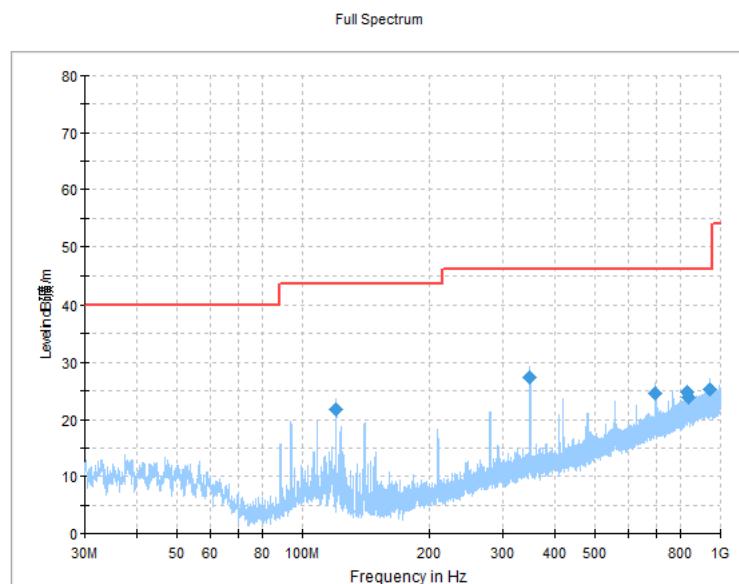

Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))

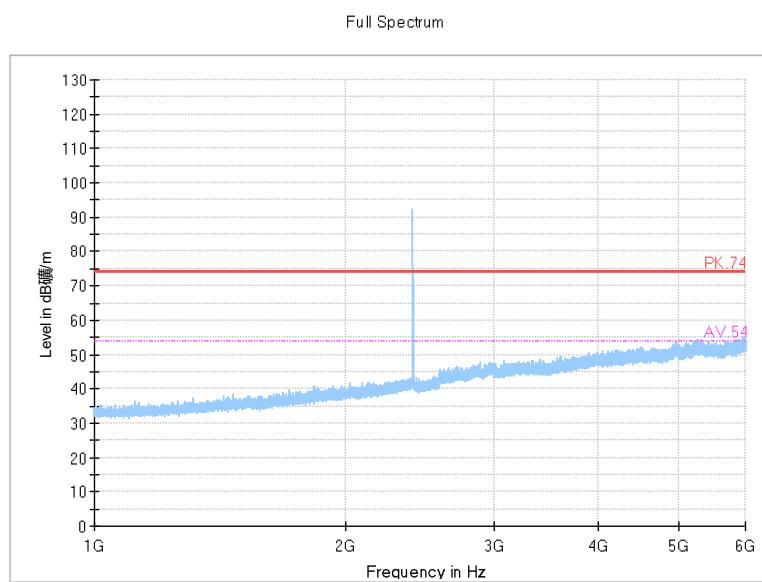

Frequency Range: 1GHz-6GHz


Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

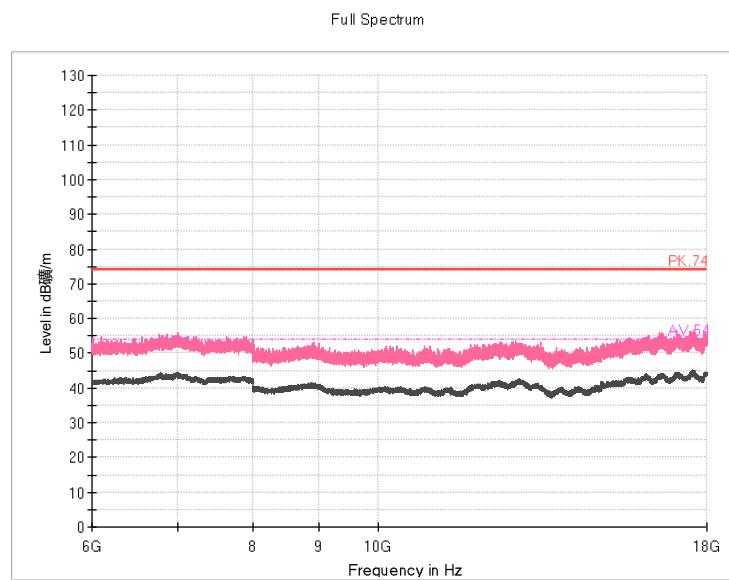

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))

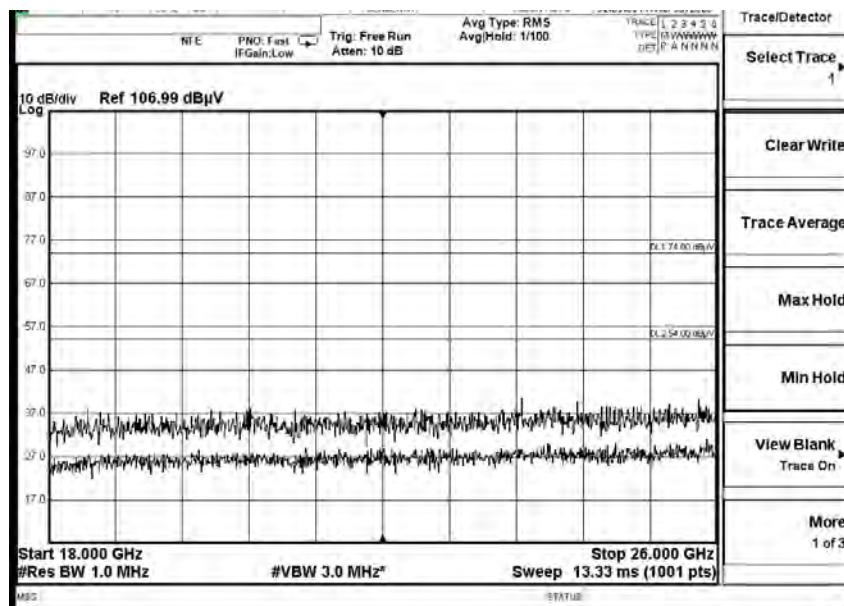


Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))




Channel No.:19

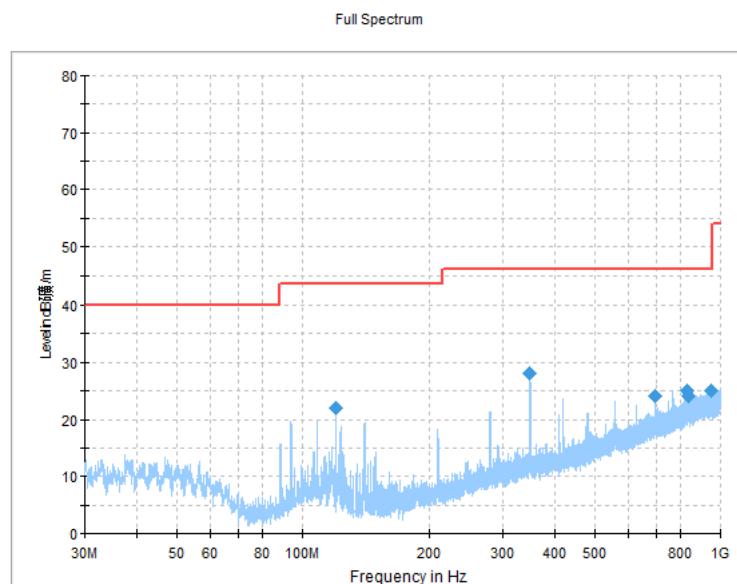

Frequency Range: 30MHz-1GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))

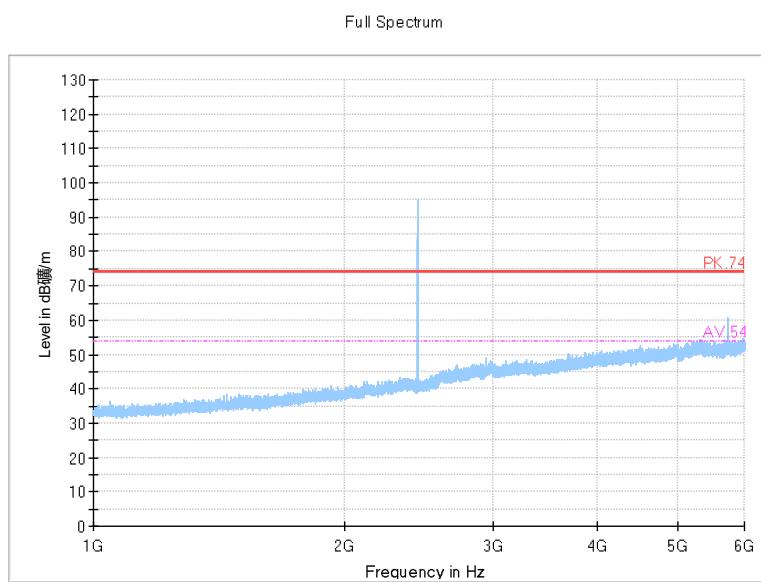

Frequency Range: 1GHz-6GHz


Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

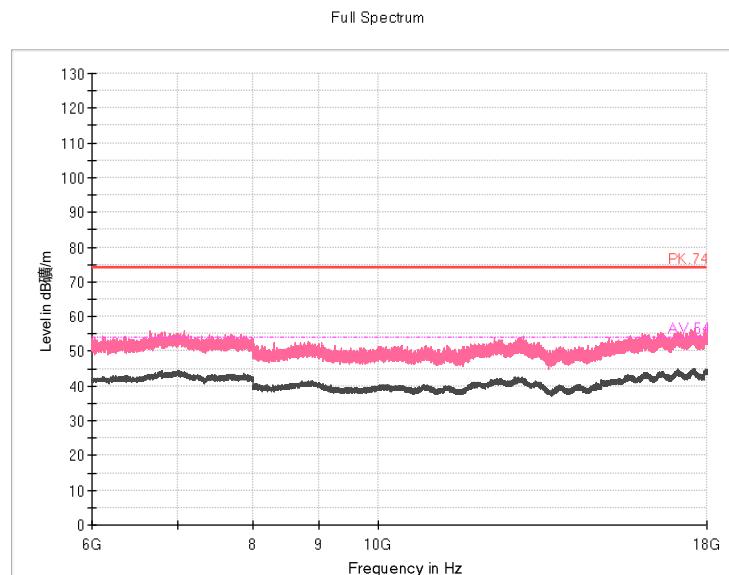

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))

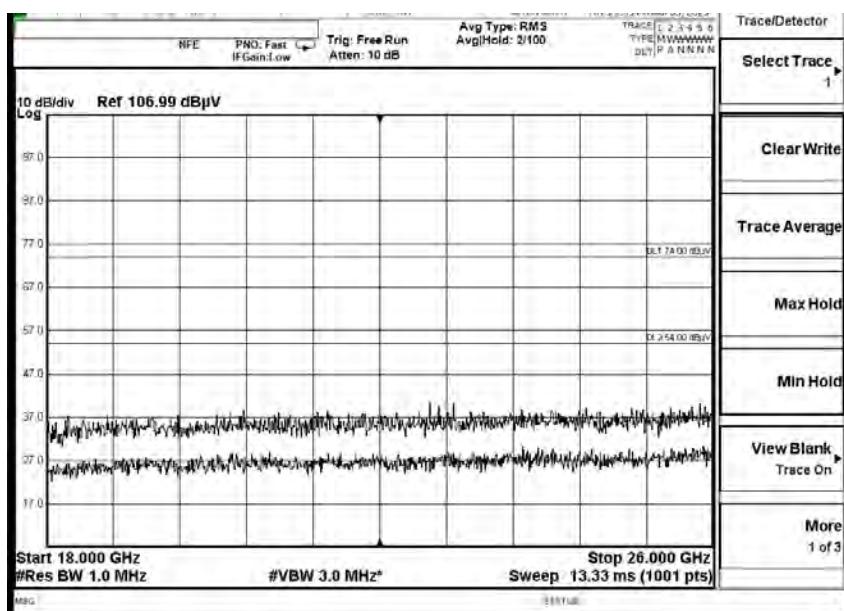

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (BLE Coded(500kHz S=2))




**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Channel No.:39

Full Spectrum

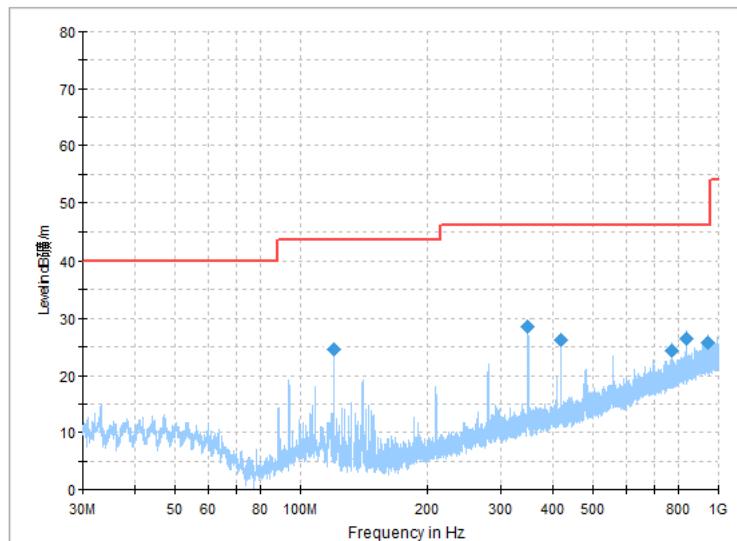


Full Spectrum

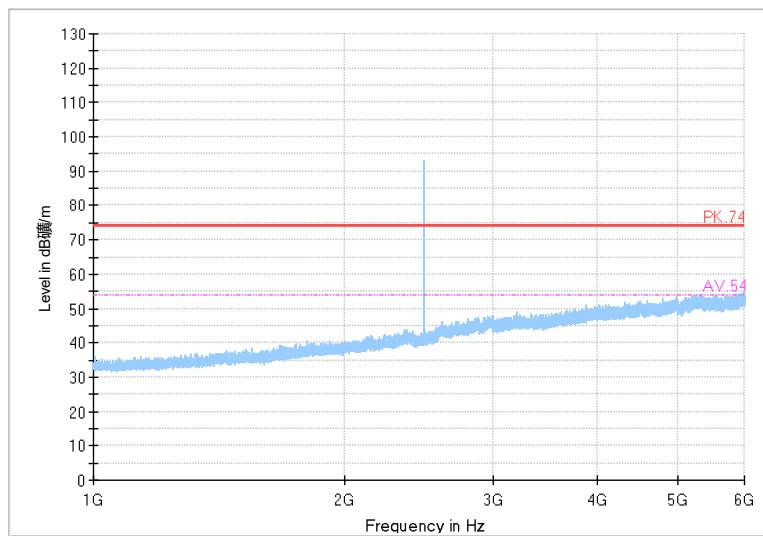



BUREAU
VERITAS


Test Report No.: PSU-NQN2502260117RF02

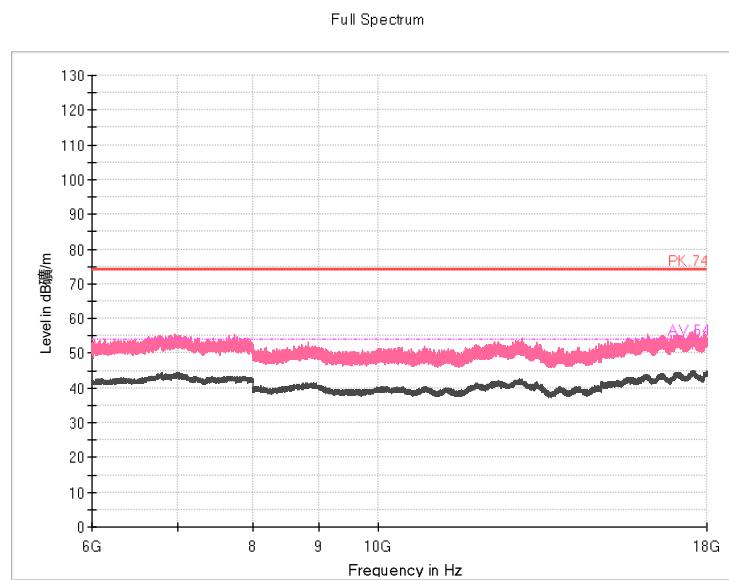

Frequency Range: 6GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK (BLE Coded(500kHz S=2))

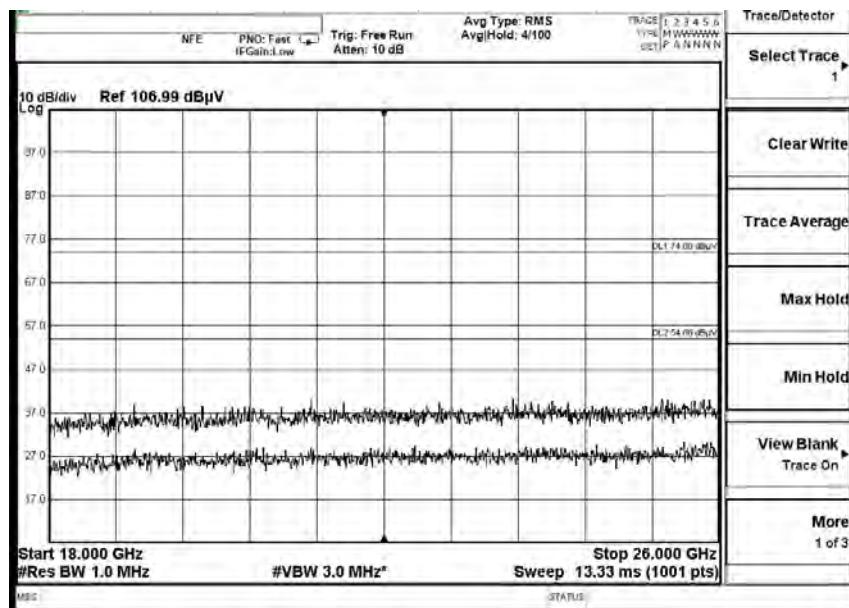

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK (BLE Coded(500kHz S=2))



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Radiated Emission Band Edge for WIFI

Full Spectrum

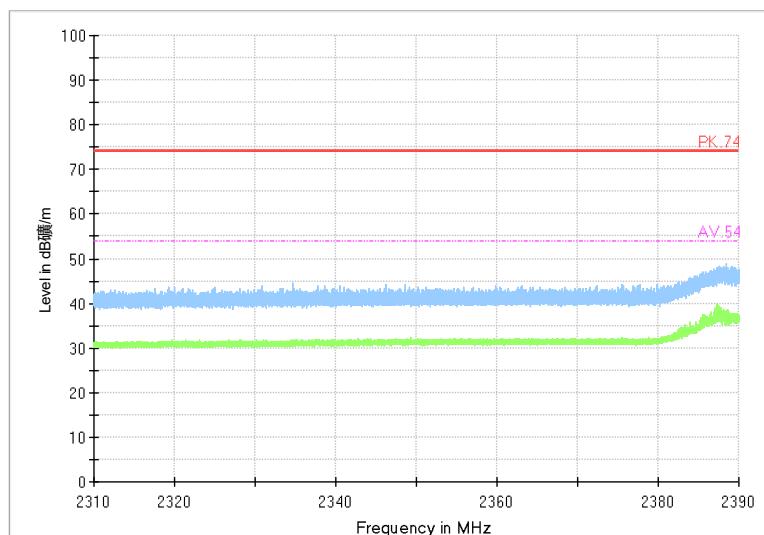


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11b

Polarization: V

Full Spectrum

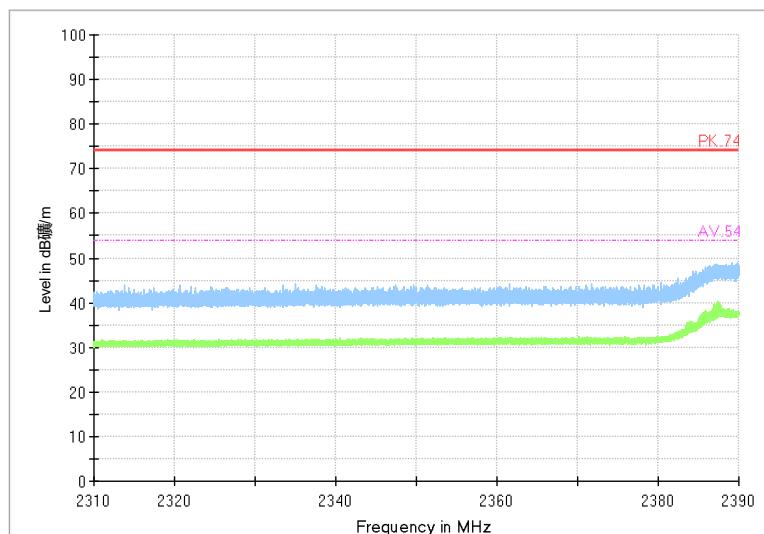

Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11b


Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

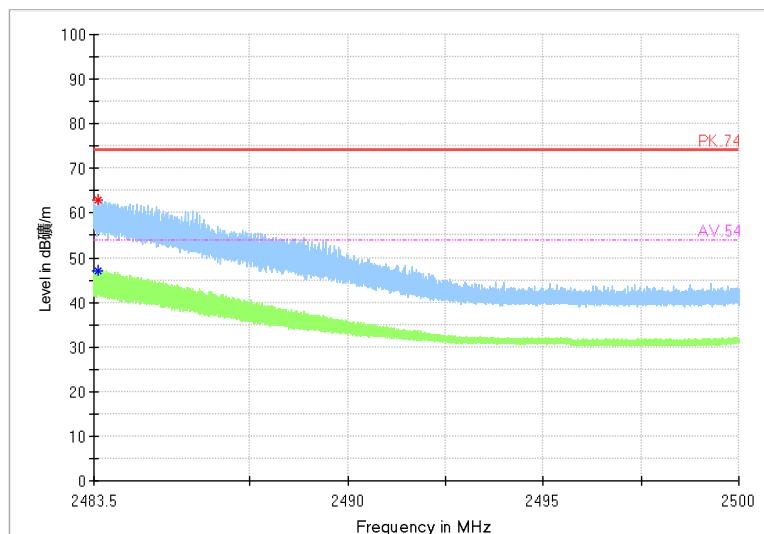


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11b

Polarization: V

Full Spectrum

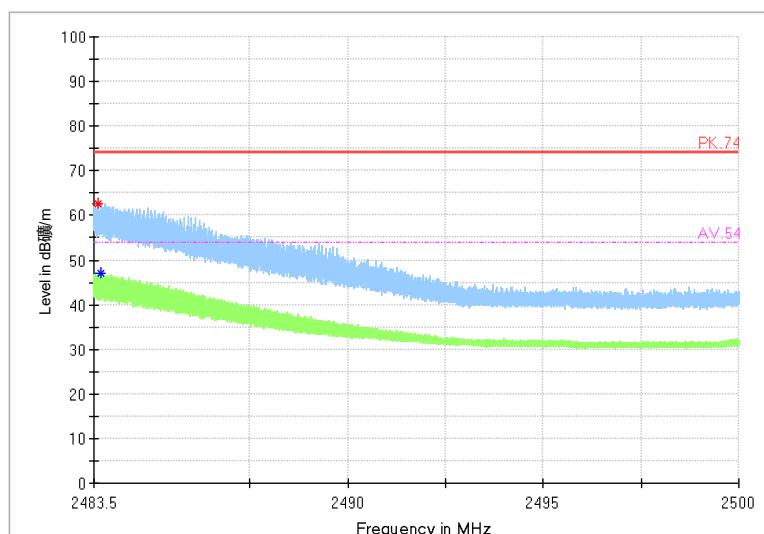

Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11b


Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

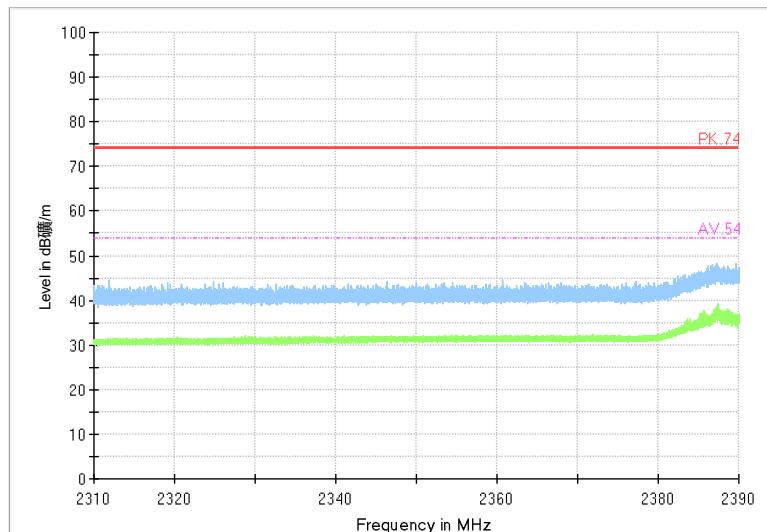


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11g

Polarization: V

Full Spectrum

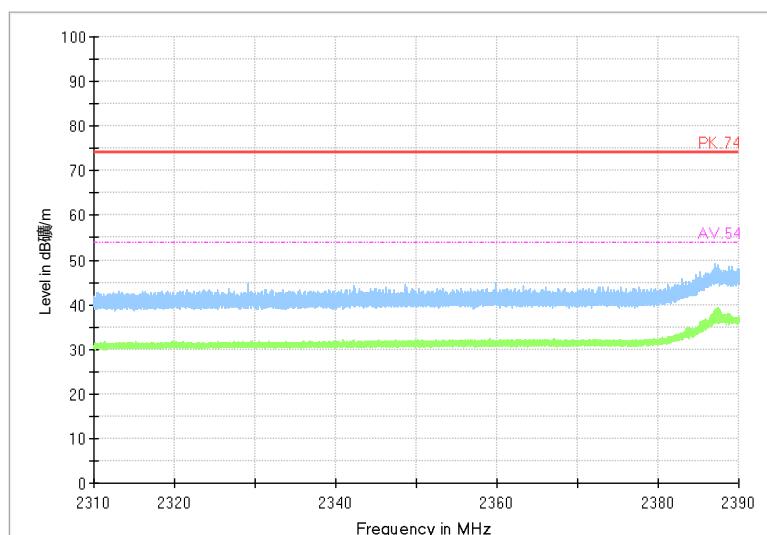

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11g

Polarization: H



**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

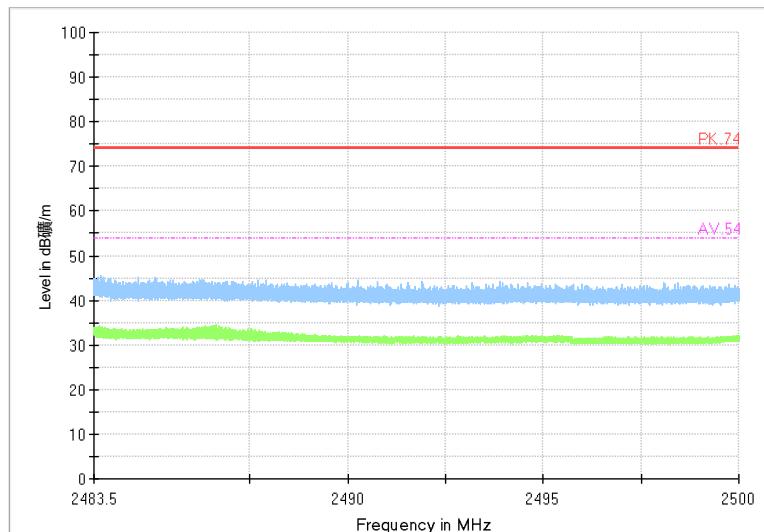


Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11g

Polarization: V

Full Spectrum

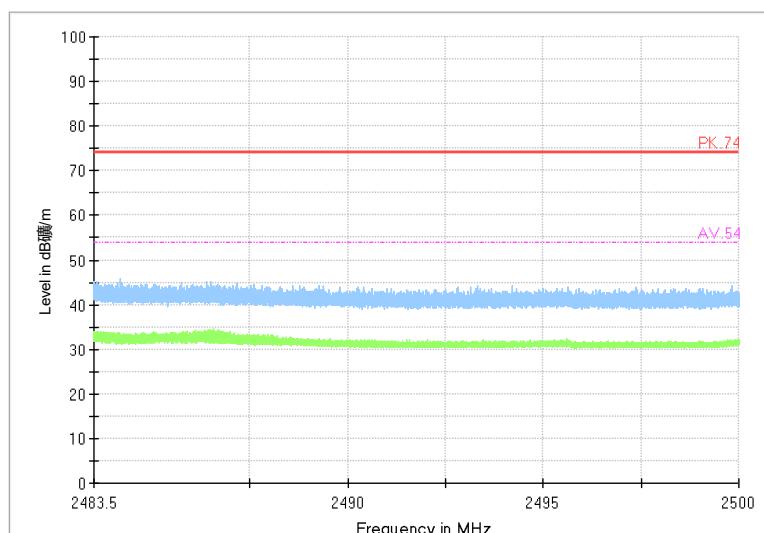

Radiated Emission Band Edge

Channel No.:11

Test Mode: 802.11g


Polarization: H



BUREAU
VERITAS

Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

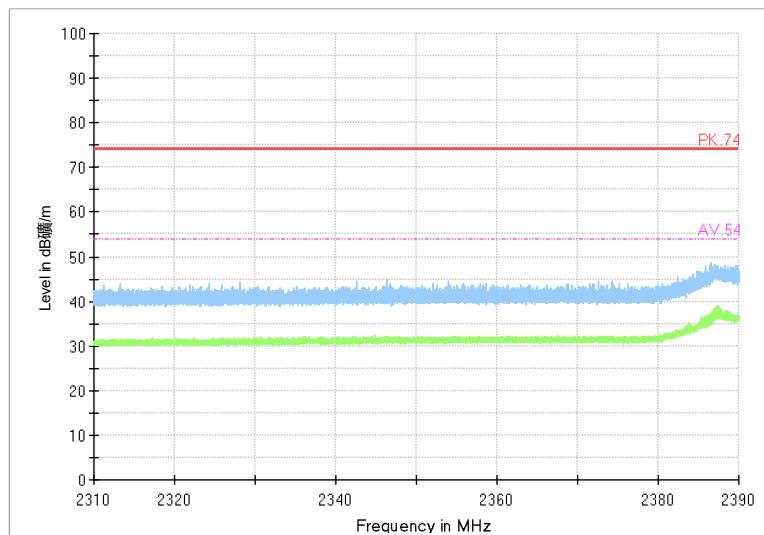


Radiated Emission Band Edge

Channel No.:1

Test Mode: 802.11n

Polarization: V

Full Spectrum

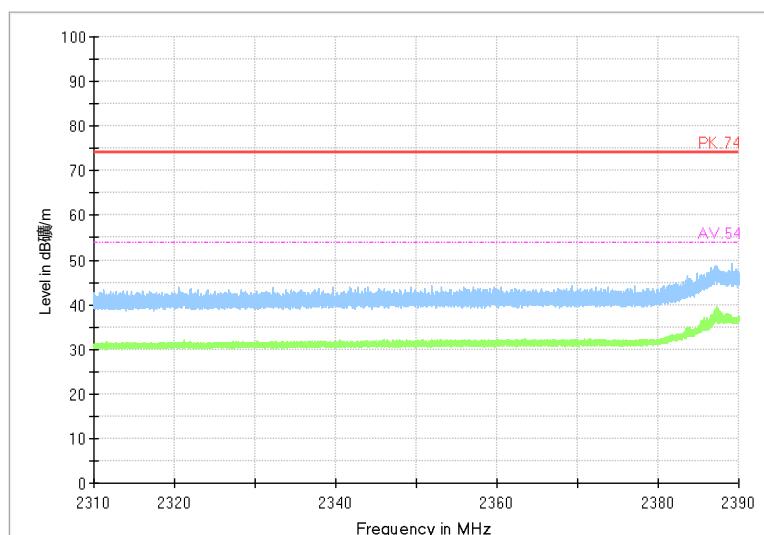

Radiated Emission Band Edge

Channel No.:1


Test Mode: 802.11n

Polarization: H




**BUREAU
VERITAS** Test Report No.: PSU-NQN2502260117RF02

Full Spectrum

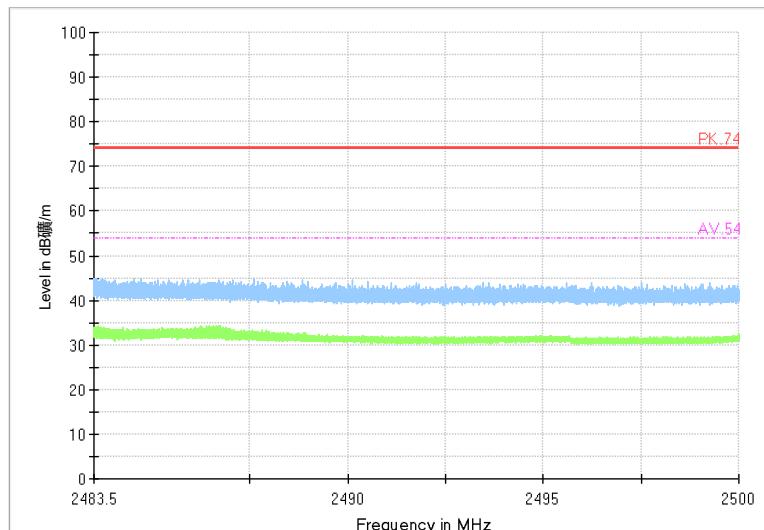

Radiated Emission Band Edge
Channel No.:11
Test Mode: 802.11n
Polarization: V

Full Spectrum

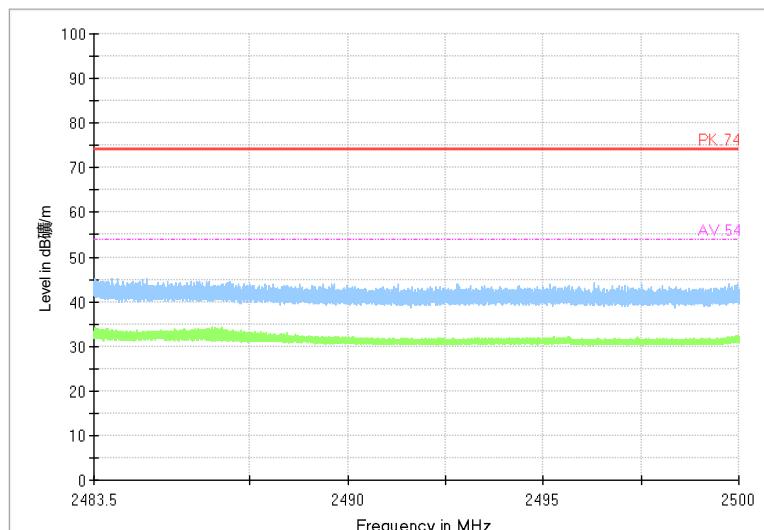

Radiated Emission Band Edge
Channel No.:11
Test Mode: 802.11n
Polarization: H