



FCC TEST REPORT

FCC ID:2AL64-SP8

Report Number..... : ZKT-220812L5694E

Date of Test..... Aug.15, 2022 to Sep.21, 2022

Date of issue..... : Sep.21, 2022

Total number of pages..... 87

Test Result..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen qiuyu Electronic Co.,Ltd

Address : F3, E Building, Hongzhuyongqi Technolgy Park, Lezhujiao village, Xixiang town, Bao'an district, Shenzhen, China

Manufacturer's name : Shenzhen qiuyu Electronic Co.,Ltd

Address : F3, E Building, Hongzhuyongqi Technolgy Park, Lezhujiao village, Xixiang town, Bao'an district, Shenzhen, China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : 8 Inch Hotel Tablet PC

Trademark : N/A

Model/Type reference..... : SP8 QM808

Ratings..... : Input: DC 5V or Battery DC 3.8V



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5.RADIATED BAND EMISSIONMEASUREMENT	32
5.1 TEST REQUIREMENT:	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM TEST STANDARD	32
5.4 TEST SETUP	33
5.5 EUT OPERATING CONDITIONS	33
5.6 TEST RESULT	34
6.POWER SPECTRAL DENSITY TEST	36
6.1 APPLIED PROCEDURES / LIMIT	36
6.2 TEST PROCEDURE	36
6.3 DEVIATION FROM STANDARD	36
6.4 TEST SETUP	36
6.5 EUT OPERATION CONDITIONS	36



6.6 TEST RESULT	37
7. CHANNEL BANDWIDTH	47
7.1 APPLIED PROCEDURES / LIMIT	47
7.2 TEST PROCEDURE	47
7.3 DEVIATION FROM STANDARD	47
7.4 TEST SETUP	47
7.5 EUT OPERATION CONDITIONS	47
7.6 TEST RESULT	48
8.OUTPUT POWER TEST	53
8.1 APPLIED PROCEDURES/LIMIT	53
8.2 TEST PROCEDURE	53
8.3 DEVIATION FROM STANDARD	54
8.4 TEST SETUP	54
8.5 EUT OPERATION CONDITIONS	54
8.6 TEST RESULT	55
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	63
9.1 APPLICABLE STANDARD	63
9.2 TEST PROCEDURE	63
9.3 DEVIATION FROM STANDARD	63
9.4 TEST SETUP	63
9.5 EUT OPERATION CONDITIONS	63
9.6 TEST RESULTS	63
10. ANTENNA REQUIREMENT	86
11. TEST SETUP PHOTO	87
12. EUT CONSTRUCTIONAL DETAILS	87



1. VERSION

ReportNo.	Version	Description	Approved
ZKT-220812L5694E	Rev.01	Initial issue of report	Sep.20, 2022



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	8 Inch Hotel Tablet PC
Model No.:	SP8 QM808
Model Different.:	N/A
Serial No.:	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7 BLE:40
Channel separation:	802.11:5MHz, BLE:2MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM) BLE: GFSK
Antenna Type:	Built-in antenna
Antenna gain:	0.56dBi
Power supply:	Input: DC 5V or Battery DC 3.8V



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode			
Remark: During the test,the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.				
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	TROLiNIK
Power level setup	<13dBm

Test Software	BLE Test Tool
Power level setup	<0dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.



Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	8 Inch Hotel Tablet PC	N/A	SP8 QM808	N/A	EUT
A-1	Switching Adpter	N/A	PS18C050K3000ED	N/A	Auxiliary
A-2	Charging base	N/A	DV6	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9kHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	MWRF Power Meter Test system	MW	MW100-RPCB	\	Sep. 22, 2021	Sep. 21, 2022
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	\	\	\
20	Antenna tower	MF	MF-7802BS	\	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	N/A	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	N/A	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESCI3	101421	Sep. 22, 2021	Sep. 21, 2022
6	Triple-Loop Antenna	LAPLACE	RF300	9194	Sep. 22, 2021	Sep. 21, 2022
7	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022
8	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

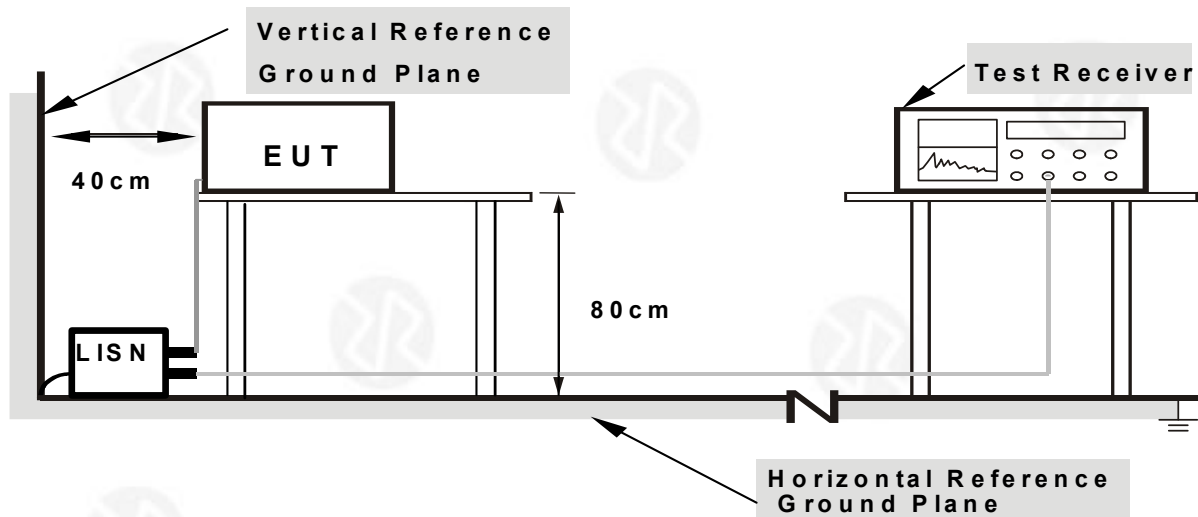

- Note:** 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

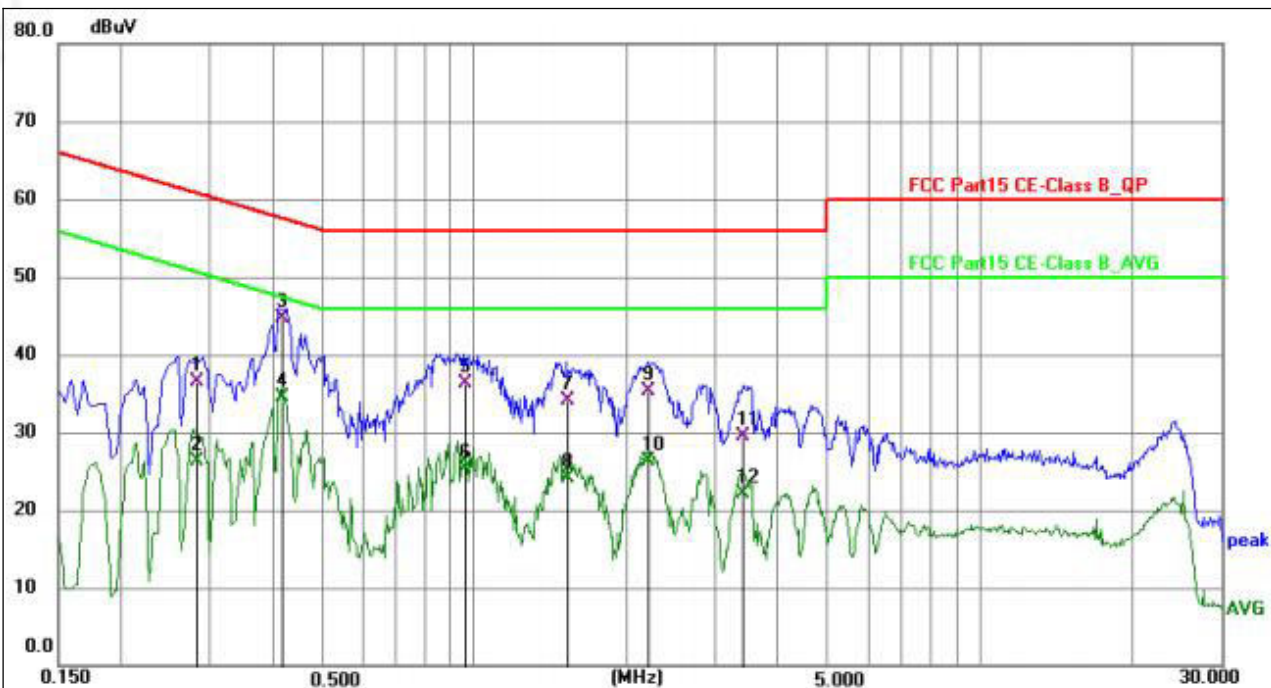


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2830	26.75	9.68	36.43	60.73	-24.30	QP	P	
2	0.2830	16.57	9.68	26.25	50.73	-24.48	AVG	P	
3 *	0.4189	35.05	9.64	44.69	57.47	-12.78	QP	P	
4	0.4189	24.96	9.64	34.60	47.47	-12.87	AVG	P	
5	0.9627	26.83	9.54	36.37	56.00	-19.63	QP	P	
6	0.9627	15.73	9.54	25.27	46.00	-20.73	AVG	P	
7	1.5315	24.51	9.63	34.14	56.00	-21.86	QP	P	
8	1.5315	14.46	9.63	24.09	46.00	-21.91	AVG	P	
9	2.2237	25.57	9.70	35.27	56.00	-20.73	QP	P	
10	2.2237	16.55	9.70	26.25	46.00	-19.75	AVG	P	
11	3.4091	19.84	9.59	29.43	56.00	-26.57	QP	P	
12	3.4091	12.49	9.59	22.08	46.00	-23.92	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

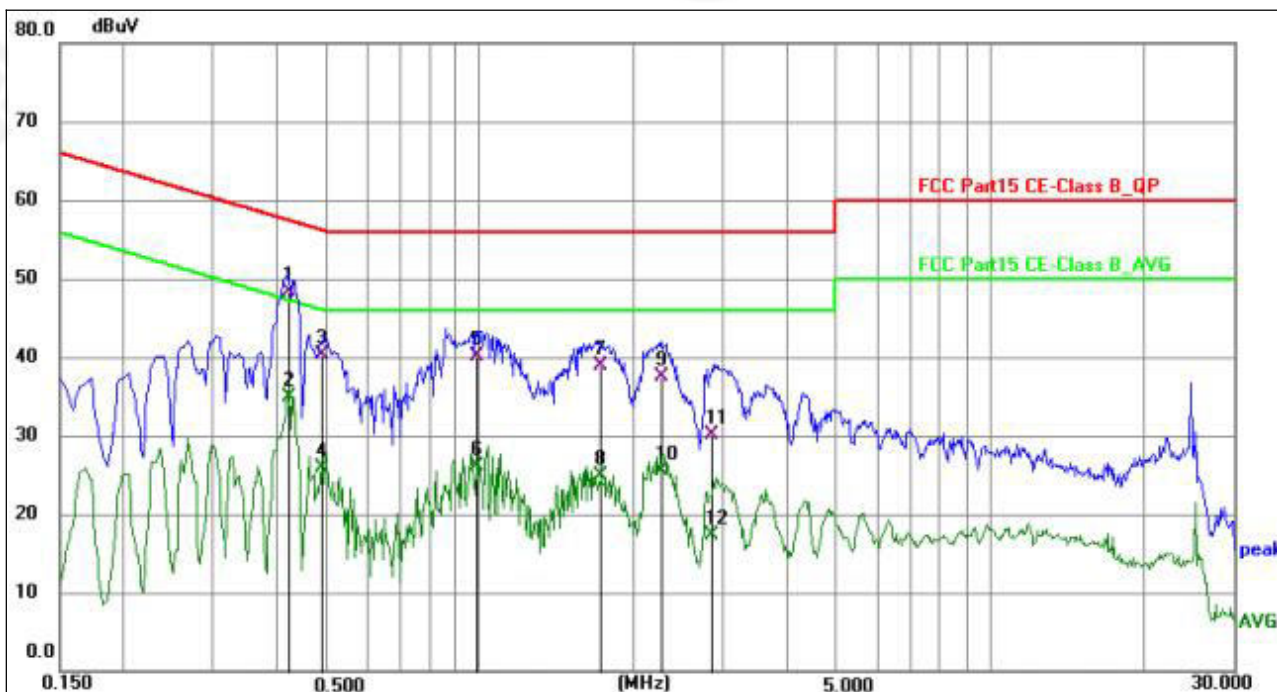

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.4213	38.76	9.64	48.40	57.42	-9.02	QP	P	
2	0.4213	25.22	9.64	34.86	47.42	-12.56	AVG	P	
3	0.4909	30.64	9.61	40.25	56.15	-15.90	QP	P	
4	0.4909	16.23	9.61	25.84	46.15	-20.31	AVG	P	
5	0.9887	30.67	9.53	40.20	56.00	-15.80	QP	P	
6	0.9887	16.62	9.53	26.15	46.00	-19.85	AVG	P	
7	1.7292	29.23	9.67	38.90	56.00	-17.10	QP	P	
8	1.7292	15.29	9.67	24.96	46.00	-21.04	AVG	P	
9	2.2652	27.75	9.69	37.44	56.00	-18.56	QP	P	
10	2.2652	15.73	9.69	25.42	46.00	-20.58	AVG	P	
11	2.8494	20.53	9.64	30.17	56.00	-25.83	QP	P	
12	2.8494	7.59	9.64	17.23	46.00	-28.77	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi-Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

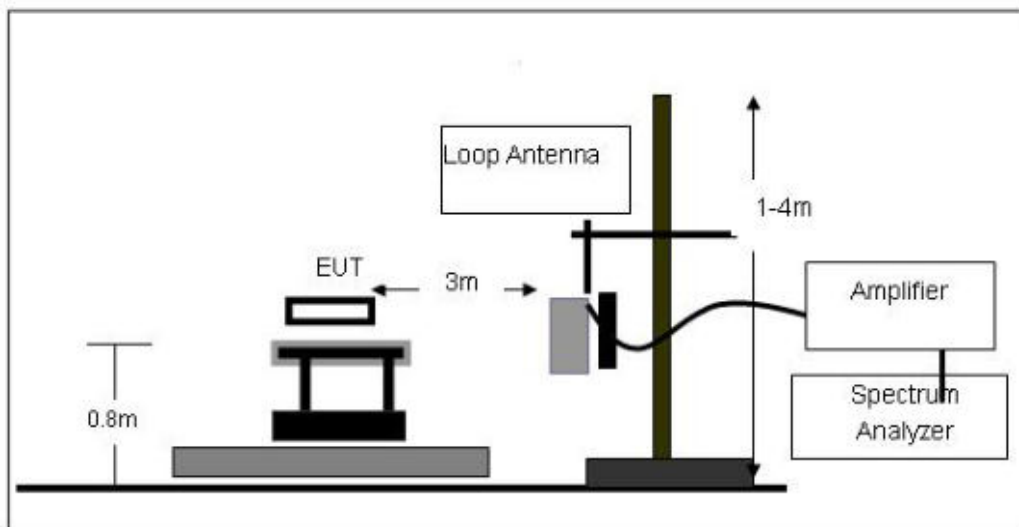




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

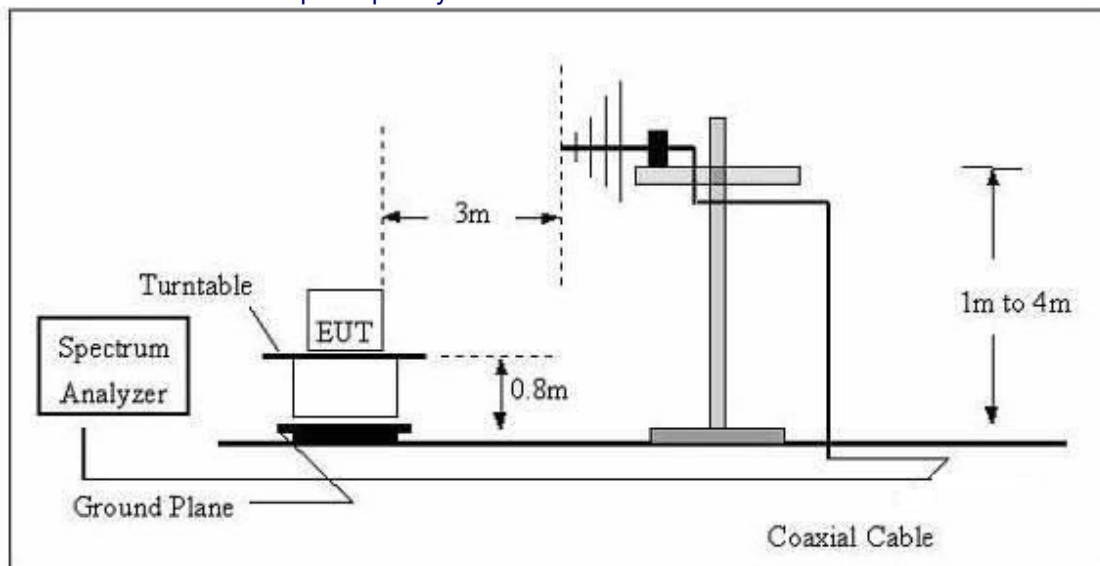

(C) Radiated Emission Test-Up Frequency Above 1GHz

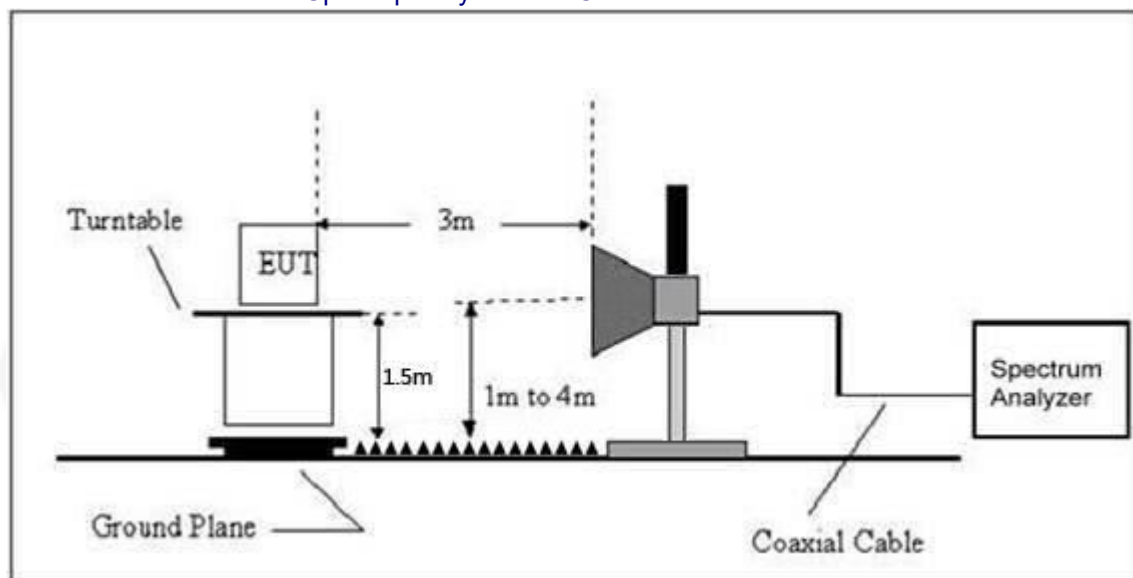

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode	

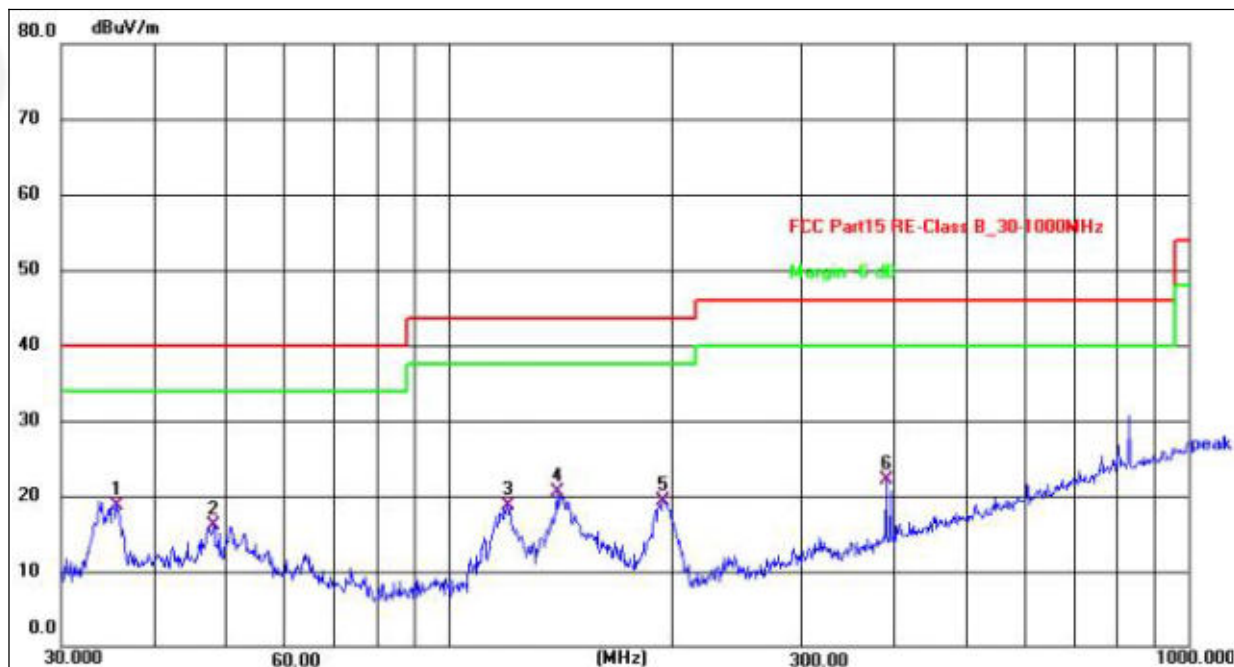

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	35.7490	35.04	-16.33	18.71	40.00	-21.29	QP
2	48.1625	32.52	-16.37	16.15	40.00	-23.85	QP
3	119.8556	36.82	-18.17	18.65	43.50	-24.85	QP
4	140.3420	37.35	-16.78	20.57	43.50	-22.93	QP
5	195.1363	38.22	-18.90	19.32	43.50	-24.18	QP
6	390.7225	35.73	-13.55	22.18	46.00	-23.82	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode	

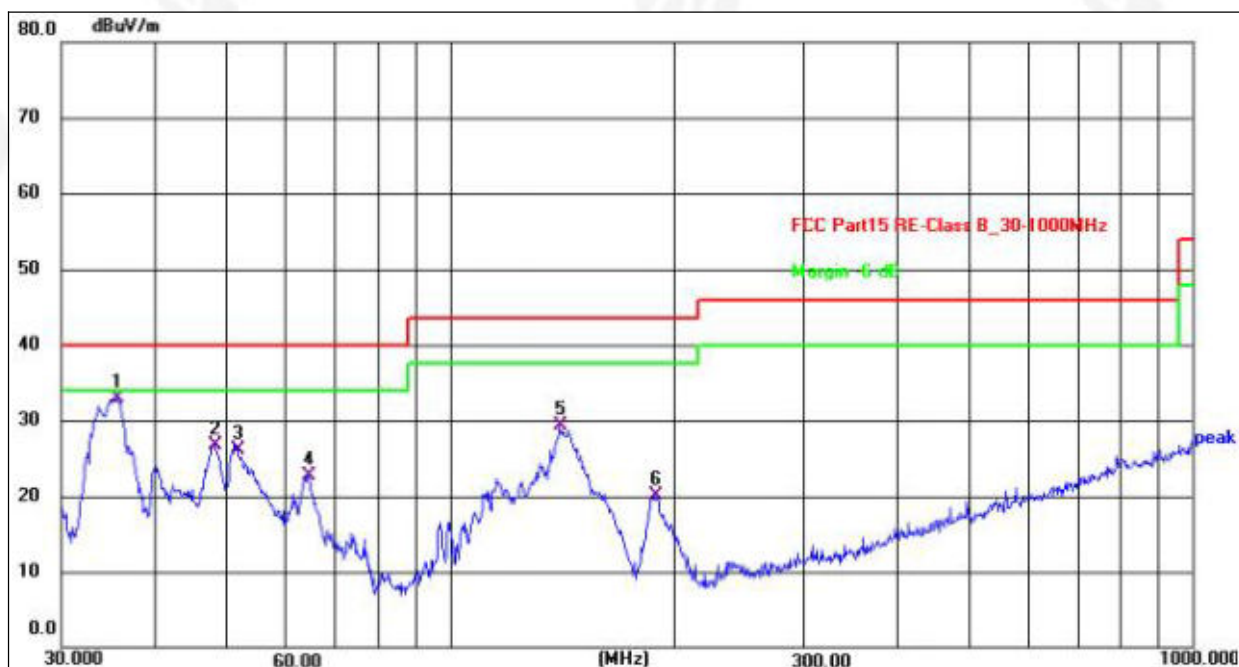

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	35.7490	49.33	-16.33	33.00	40.00	-7.00	QP
2	48.3318	43.02	-16.40	26.62	40.00	-13.38	QP
3	51.8430	42.83	-16.76	26.07	40.00	-13.93	QP
4	64.6594	40.46	-17.69	22.77	40.00	-17.23	QP
5	140.8351	46.05	-16.72	29.33	43.50	-14.17	QP
6	189.0743	38.84	-18.66	20.18	43.50	-23.32	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b andAC 120Vmode



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.10	30.55	5.77	24.66	53.21	74.00	-20.79	PK
V	4824.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
V	7236.00	54.98	30.33	6.32	24.55	55.52	74.00	-18.48	PK
V	7236.00	43.18	30.33	6.32	24.55	43.72	54.00	-10.28	AV
V	9648.00	53.33	30.85	7.45	24.69	54.62	74.00	-19.38	PK
V	9648.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
V	12060.00	50.23	31.02	8.99	25.57	53.77	74.00	-20.23	PK
V	12060.00	43.79	31.02	8.99	25.57	47.33	54.00	-6.67	AV
H	4824.00	50.64	30.55	5.77	24.66	50.52	74.00	-23.48	PK
H	4824.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7236.00	52.05	30.33	6.32	24.55	52.59	74.00	-21.41	PK
H	7236.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
H	9648.00	54.21	30.85	7.45	24.69	55.50	74.00	-18.50	PK
H	9648.00	43.46	30.85	7.45	24.69	44.75	54.00	-9.25	AV
H	12060.00	52.72	31.02	8.99	25.57	56.26	74.00	-17.74	PK
H	12060.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.24	30.55	5.77	24.66	54.12	74.00	-19.88	PK
V	4874.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
V	7311.00	52.53	30.33	6.32	24.55	53.07	74.00	-20.93	PK
V	7311.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
V	9748.00	53.93	30.85	7.45	24.69	55.22	74.00	-18.78	PK
V	9748.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	12185.00	53.50	31.02	8.99	25.57	57.04	74.00	-16.96	PK
V	12185.00	43.79	31.02	8.99	25.57	47.33	54.00	-6.67	AV
H	4874.00	53.97	30.55	5.77	24.66	53.85	74.00	-20.15	PK
H	4874.00	43.97	30.55	5.77	24.66	43.85	54.00	-10.15	AV
H	7311.00	53.70	30.33	6.32	24.55	54.24	74.00	-19.76	PK
H	7311.00	43.87	30.33	6.32	24.55	44.41	54.00	-9.59	AV
H	9748.00	50.51	30.85	7.45	24.69	51.80	74.00	-22.20	PK
H	9748.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
H	12185.00	51.35	31.02	8.99	25.57	54.89	74.00	-19.11	PK
H	12185.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV



Page 20 of 30

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.34	30.55	5.77	24.66	53.22	74.00	-20.78	PK
V	4924.00	43.81	30.55	5.77	24.66	43.69	54.00	-10.31	AV
V	7386.00	54.08	30.33	6.32	24.55	54.62	74.00	-19.38	PK
V	7386.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
V	9848.00	54.39	30.85	7.45	24.69	55.68	74.00	-18.32	PK
V	9848.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	12310.00	50.58	31.02	8.99	25.57	54.12	74.00	-19.88	PK
V	12310.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	4924.00	51.83	30.55	5.77	24.66	51.71	74.00	-22.29	PK
H	4924.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	7386.00	52.39	30.33	6.32	24.55	52.93	74.00	-21.07	PK
H	7386.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
H	9848.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
H	9848.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12310.00	51.74	31.02	8.99	25.57	55.28	74.00	-18.72	PK
H	12310.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.94	30.55	5.77	24.66	53.82	74.00	-20.18	PK
V	4824.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
V	7236.00	52.96	30.33	6.32	24.55	53.50	74.00	-20.50	PK
V	7236.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
V	9648.00	51.34	30.85	7.45	24.69	52.63	74.00	-21.37	PK
V	9648.00	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
V	12060.00	53.40	31.02	8.99	25.57	56.94	74.00	-17.06	PK
V	12060.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	4824.00	53.87	30.55	5.77	24.66	53.75	74.00	-20.25	PK
H	4824.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	7236.00	53.14	30.33	6.32	24.55	53.68	74.00	-20.32	PK
H	7236.00	43.74	30.33	6.32	24.55	44.28	54.00	-9.72	AV
H	9648.00	50.69	30.85	7.45	24.69	51.98	74.00	-22.02	PK
H	9648.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	12060.00	52.27	31.02	8.99	25.57	55.81	74.00	-18.19	PK
H	12060.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.03	30.55	5.77	24.66	53.91	74.00	-20.09	PK
V	4874.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7311.00	54.92	30.33	6.32	24.55	55.46	74.00	-18.54	PK
V	7311.00	43.42	30.33	6.32	24.55	43.96	54.00	-10.04	AV
V	9748.00	54.75	30.85	7.45	24.69	56.04	74.00	-17.96	PK
V	9748.00	43.46	30.85	7.45	24.69	44.75	54.00	-9.25	AV
V	12185.00	52.35	31.02	8.99	25.57	55.89	74.00	-18.11	PK
V	12185.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV
H	4874.00	52.56	30.55	5.77	24.66	52.44	74.00	-21.56	PK
H	4874.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
H	7311.00	52.37	30.33	6.32	24.55	52.91	74.00	-21.09	PK
H	7311.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
H	9748.00	54.22	30.85	7.45	24.69	55.51	74.00	-18.49	PK
H	9748.00	43.94	30.85	7.45	24.69	45.23	54.00	-8.77	AV
H	12185.00	52.36	31.02	8.99	25.57	55.90	74.00	-18.10	PK
H	12185.00	43.13	31.02	8.99	25.57	46.67	54.00	-7.33	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.47	30.55	5.77	24.66	52.35	74.00	-21.65	PK
V	4924.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
V	7386.00	54.04	30.33	6.32	24.55	54.58	74.00	-19.42	PK
V	7386.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	9848.00	50.88	30.85	7.45	24.69	52.17	74.00	-21.83	PK
V	9848.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
V	12310.00	54.07	31.02	8.99	25.57	57.61	74.00	-16.39	PK
V	12310.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV
H	4924.00	54.61	30.55	5.77	24.66	54.49	74.00	-19.51	PK
H	4924.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
H	7386.00	52.64	30.33	6.32	24.55	53.18	74.00	-20.82	PK
H	7386.00	43.01	30.33	6.32	24.55	43.55	54.00	-10.45	AV
H	9848.00	52.41	30.85	7.45	24.69	53.70	74.00	-20.30	PK
H	9848.00	43.90	30.85	7.45	24.69	45.19	54.00	-8.81	AV
H	12310.00	53.85	31.02	8.99	25.57	57.39	74.00	-16.61	PK
H	12310.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.91	30.55	5.77	24.66	53.68	74.00	-20.32	PK
V	4824.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
V	7236.00	53.79	30.33	6.32	24.55	54.33	74.00	-19.67	PK
V	7236.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
V	9648.00	51.68	30.85	7.45	24.69	52.97	74.00	-21.03	PK
V	9648.00	43.23	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12060.00	54.70	31.02	8.99	25.57	58.24	74.00	-15.76	PK
V	12060.00	43.78	31.02	8.99	25.57	47.32	54.00	-6.68	AV
H	4824.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	PK
H	4824.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	7236.00	50.13	30.33	6.32	24.55	50.67	74.00	-23.33	PK
H	7236.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9648.00	54.04	30.85	7.45	24.69	55.33	74.00	-18.67	PK
H	9648.00	43.70	30.85	7.45	24.69	44.99	54.00	-9.01	AV
H	12060.00	53.54	31.02	8.99	25.57	57.08	74.00	-16.92	PK
H	12060.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	53.40	30.55	5.77	24.66	53.28	74.00	-20.72	PK
V	4874.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
V	7311.00	51.56	30.33	6.32	24.55	52.10	74.00	-21.90	PK
V	7311.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
V	9748.00	54.28	30.85	7.45	24.69	55.57	74.00	-18.43	PK
V	9748.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
V	12185.00	53.18	31.02	8.99	25.57	56.72	74.00	-17.28	PK
V	12185.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV
H	4874.00	52.91	30.55	5.77	24.66	52.79	74.00	-21.21	PK
H	4874.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
H	7311.00	53.12	30.33	6.32	24.55	53.66	74.00	-20.34	PK
H	7311.00	43.54	30.33	6.32	24.55	44.08	54.00	-9.92	AV
H	9748.00	54.07	30.85	7.45	24.69	55.36	74.00	-18.64	PK
H	9748.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
H	12185.00	52.88	31.02	8.99	25.57	56.42	74.00	-17.58	PK
H	12185.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV



Page 27 of 30

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.99	30.55	5.77	24.66	53.87	74.00	-20.13	PK
V	4924.00	43.17	30.55	5.77	24.66	43.05	54.00	-10.95	AV
V	7386.00	51.64	30.33	6.32	24.55	52.18	74.00	-21.82	PK
V	7386.00	43.88	30.33	6.32	24.55	44.42	54.00	-9.58	AV
V	9848.00	50.72	30.85	7.45	24.69	52.01	74.00	-21.99	PK
V	9848.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
V	12310.00	53.84	31.02	8.99	25.57	57.38	74.00	-16.62	PK
V	12310.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV
H	4924.00	51.93	30.55	5.77	24.66	51.81	74.00	-22.19	PK
H	4924.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
H	7386.00	54.67	30.33	6.32	24.55	55.21	74.00	-18.79	PK
H	7386.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9848.00	54.94	30.85	7.45	24.69	56.23	74.00	-17.77	PK
H	9848.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	12310.00	51.01	31.02	8.99	25.57	54.55	74.00	-19.45	PK
H	12310.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844.00	54.64	30.55	5.77	24.66	52.64	74.00	-21.36	PK
V	4844.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7266.00	50.45	30.33	6.32	24.55	50.99	74.00	-23.01	PK
V	7266.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
V	9688.00	50.92	30.85	7.45	24.69	52.21	74.00	-21.79	PK
V	9688.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12110.00	54.11	31.02	8.99	25.57	57.65	74.00	-16.35	PK
V	12110.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV
H	4844.00	54.81	30.55	5.77	24.66	54.69	74.00	-19.31	PK
H	4844.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
H	7266.00	53.82	30.33	6.32	24.55	54.36	74.00	-19.64	PK
H	7266.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	9688.00	52.41	30.85	7.45	24.69	53.70	74.00	-20.30	PK
H	9688.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
H	12110.00	54.65	31.02	8.99	25.57	58.19	74.00	-15.81	PK
H	12110.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.93	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	4874.00	43.50	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	7311.00	51.85	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7311.00	43.86	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9748.00	50.09	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	9748.00	43.81	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12185.00	51.93	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	12185.00	43.05	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	4874.00	51.79	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	4874.00	43.69	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	7311.00	50.15	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7311.00	43.27	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	9748.00	51.82	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	9748.00	43.17	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	12185.00	50.19	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	12185.00	43.95	31.02	8.99	25.57	45.75	54.00	-8.25	AV



Page 20 of 30

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	53.20	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	4904.00	43.55	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	7356.00	51.66	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7356.00	43.19	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9808.00	53.62	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	9808.00	43.07	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12260.00	52.65	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	12260.00	43.38	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	4904.00	54.88	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	4904.00	43.99	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	7356.00	53.87	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7356.00	43.41	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	9808.00	54.66	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	9808.00	43.28	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	12260.00	51.98	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	12260.00	43.34	31.02	8.99	25.57	45.75	54.00	-8.25	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.74	30.55	5.77	24.66	52.94	74.00	-21.06	Pk
V	4804.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7206.00	53.95	30.33	6.32	24.55	54.49	74.00	-19.51	Pk
V	7206.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
V	9608.00	54.04	30.85	7.45	24.69	55.33	74.00	-18.67	Pk
V	9608.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
V	12010.00	50.58	31.02	8.99	25.57	54.12	74.00	-19.88	Pk
V	12010.00	43.23	31.02	8.99	25.57	46.77	54.00	-7.23	AV
H	4804.00	50.69	30.55	5.77	24.66	50.57	74.00	-23.43	Pk
H	4804.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
H	7206.00	50.20	30.33	6.32	24.55	50.74	74.00	-23.26	Pk
H	7206.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	9608.00	53.55	30.85	7.45	24.69	54.84	74.00	-19.16	Pk
H	9608.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
H	12010.00	53.58	31.02	8.99	25.57	57.12	74.00	-16.88	Pk
H	12010.00	43.26	31.02	8.99	25.57	46.80	54.00	-7.20	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	51.96	30.55	5.77	24.66	51.84	74.00	-22.16	Pk
V	4880.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7320.00	54.61	30.33	6.32	24.55	55.15	74.00	-18.85	Pk
V	7320.00	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV
V	9760.00	54.65	30.85	7.45	24.69	55.94	74.00	-18.06	Pk
V	9760.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
V	12200.00	54.54	31.02	8.99	25.57	58.08	74.00	-15.92	Pk
V	12200.00	43.12	31.02	8.99	25.57	46.66	54.00	-7.34	AV
H	4880.00	54.40	30.55	5.77	24.66	54.28	74.00	-19.72	Pk
H	4880.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
H	7320.00	54.39	30.33	6.32	24.55	54.93	74.00	-19.07	Pk
H	7320.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
H	9760.00	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	Pk
H	9760.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	12200.00	51.76	31.02	8.99	25.57	55.30	74.00	-18.70	Pk
H	12200.00	43.21	31.02	8.99	25.57	46.75	54.00	-7.25	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.44	30.55	5.77	24.66	54.32	74.00	-19.68	Pk
V	4960.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
V	7440.00	52.02	30.33	6.32	24.55	52.56	74.00	-21.44	Pk
V	7440.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9920.00	52.86	30.85	7.45	24.69	54.15	74.00	-19.85	Pk
V	9920.00	43.49	30.85	7.45	24.69	44.78	54.00	-9.22	AV
V	12400.00	51.55	31.02	8.99	25.57	55.09	74.00	-18.91	Pk
V	12400.00	43.23	31.02	8.99	25.57	46.77	54.00	-7.23	AV
H	4960.00	54.68	30.55	5.77	24.66	54.56	74.00	-19.44	Pk
H	4960.00	43.11	30.55	5.77	24.66	42.99	54.00	-11.01	AV
H	7440.00	53.89	30.33	6.32	24.55	54.43	74.00	-19.57	Pk
H	7440.00	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
H	9920.00	54.59	30.85	7.45	24.69	55.88	74.00	-18.12	Pk
H	9920.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
H	12400.00	52.73	31.02	8.99	25.57	56.27	74.00	-17.73	Pk
H	12400.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

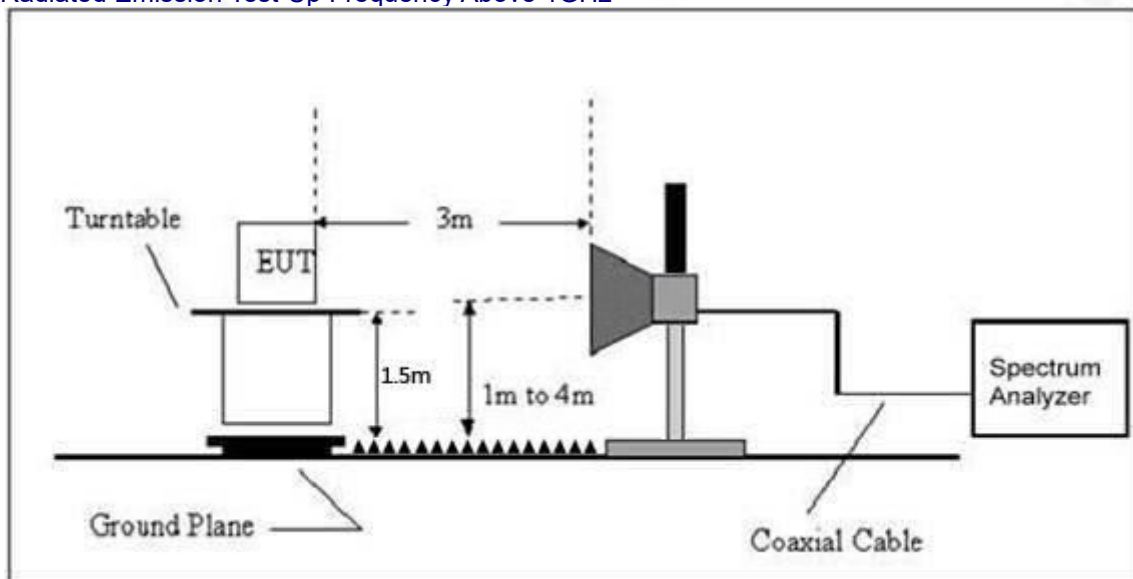

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	LowChannel 2412MHz									
	H	2390.00	54.54	30.22	4.85	23.98	54.22	74.00	PK	PASS
	H	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	AV	PASS
	H	2400.00	53.55	30.22	4.85	23.98	52.16	74.00	PK	PASS
	H	2400.00	44.20	30.22	4.85	23.98	42.81	54.00	AV	PASS
	V	2390.00	53.39	30.22	4.85	23.98	52.00	74.00	PK	PASS
	V	2390.00	44.61	30.22	4.85	23.98	43.22	54.00	AV	PASS
	V	2400.00	54.41	30.22	4.85	23.98	53.02	74.00	PK	PASS
	V	2400.00	44.22	30.22	4.85	23.98	42.83	54.00	AV	PASS
	HighChannel 2462MHz									
	H	2483.50	54.09	30.22	4.85	23.98	52.70	74.00	PK	PASS
	H	2483.50	44.16	30.22	4.85	23.98	42.77	54.00	AV	PASS
	H	2500.00	53.42	30.22	4.85	23.98	52.03	74.00	PK	PASS
	H	2500.00	44.85	30.22	4.85	23.98	43.46	54.00	AV	PASS
	V	2483.50	54.14	30.22	4.85	23.98	52.75	74.00	PK	PASS
	V	2483.50	45.00	30.22	4.85	23.98	43.61	54.00	AV	PASS
	V	2500.00	53.81	30.22	4.85	23.98	52.42	74.00	PK	PASS
	V	2500.00	44.74	30.22	4.85	23.98	43.35	54.00	AV	PASS
802.11g	LowChannel 2412MHz									
	H	2390.00	53.62	30.22	4.85	23.98	52.23	74.00	PK	PASS
	H	2390.00	44.92	30.22	4.85	23.98	43.53	54.00	AV	PASS
	H	2400.00	53.53	30.22	4.85	23.98	52.14	74.00	PK	PASS
	H	2400.00	44.74	30.22	4.85	23.98	43.35	54.00	AV	PASS
	V	2390.00	53.69	30.22	4.85	23.98	52.30	74.00	PK	PASS
	V	2390.00	44.42	30.22	4.85	23.98	43.03	54.00	AV	PASS
	V	2400.00	53.45	30.22	4.85	23.98	52.06	74.00	PK	PASS
	V	2400.00	44.96	30.22	4.85	23.98	43.57	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.12	30.22	4.85	23.98	51.73	74.00	PK	PASS
	H	2483.50	44.25	30.22	4.85	23.98	42.86	54.00	AV	PASS
	H	2500.00	54.40	30.22	4.85	23.98	53.01	74.00	PK	PASS
	H	2500.00	44.12	30.22	4.85	23.98	42.73	54.00	AV	PASS
	V	2483.50	54.66	30.22	4.85	23.98	53.27	74.00	PK	PASS
	V	2483.50	44.52	30.22	4.85	23.98	43.13	54.00	AV	PASS
	V	2500.00	53.32	30.22	4.85	23.98	51.93	74.00	PK	PASS
	V	2500.00	44.23	30.22	4.85	23.98	42.84	54.00	AV	PASS
802.11n20	LowChannel 2412MHz									
	H	2390.00	53.09	30.22	4.85	23.98	51.70	74.00	PK	PASS
	H	2390.00	44.47	30.22	4.85	23.98	43.08	54.00	AV	PASS
	H	2400.00	54.90	30.22	4.85	23.98	53.51	74.00	PK	PASS
	H	2400.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS
	V	2390.00	54.22	30.22	4.85	23.98	52.83	74.00	PK	PASS
	V	2390.00	44.08	30.22	4.85	23.98	42.69	54.00	AV	PASS
	V	2400.00	53.17	30.22	4.85	23.98	51.78	74.00	PK	PASS
	V	2400.00	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.29	30.22	4.85	23.98	51.90	74.00	Pk	PASS
	H	2483.50	44.75	30.22	4.85	23.98	43.36	54.00	AV	PASS
	H	2500.00	53.93	30.22	4.85	23.98	52.54	74.00	Pk	PASS
	H	2500.00	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
	V	2483.50	53.67	30.22	4.85	23.98	52.28	74.00	Pk	PASS
	V	2483.50	44.63	30.22	4.85	23.98	43.24	54.00	AV	PASS
	V	2500.00	53.31	30.22	4.85	23.98	51.92	74.00	Pk	PASS



802.11n40	V	2500.00	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	LowChannel 2422MHz									
	H	2390.00	54.87	30.22	4.85	23.98	52.15	74.00	PK	PASS
	H	2390.00	44.36	30.22	4.85	23.98	42.97	54.00	AV	PASS
	H	2400.00	53.06	30.22	4.85	23.98	51.67	74.00	PK	PASS
	H	2400.00	44.24	30.22	4.85	23.98	42.85	54.00	AV	PASS
	V	2390.00	53.19	30.22	4.85	23.98	51.80	74.00	PK	PASS
	V	2390.00	44.87	30.22	4.85	23.98	43.48	54.00	AV	PASS
	V	2400.00	54.02	30.22	4.85	23.98	52.63	74.00	PK	PASS
	V	2400.00	44.85	30.22	4.85	23.98	43.46	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	54.22	30.22	4.85	23.98	52.83	74.00	PK	PASS
	H	2483.50	44.60	30.22	4.85	23.98	43.21	54.00	AV	PASS
	H	2500.00	54.41	30.22	4.85	23.98	53.02	74.00	PK	PASS
	H	2500.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS
	V	2483.50	54.71	30.22	4.85	23.98	53.32	74.00	PK	PASS
	V	2483.50	44.22	30.22	4.85	23.98	42.83	54.00	AV	PASS
	V	2500.00	53.42	30.22	4.85	23.98	52.03	74.00	PK	PASS
	V	2500.00	44.02	30.22	4.85	23.98	42.63	54.00	AV	PASS
GFSK	Low Channel: 2402MHz									
	H	2390.00	54.33	30.22	4.85	23.98	52.67	74.00	PK	PASS
	H	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	AV	PASS
	H	2400.00	54.69	30.22	4.85	23.98	53.30	74.00	PK	PASS
	H	2400.00	44.77	30.22	4.85	23.98	43.38	54.00	AV	PASS
	V	2390.00	54.48	30.22	4.85	23.98	53.09	74.00	PK	PASS
	V	2390.00	44.33	30.22	4.85	23.98	42.94	54.00	AV	PASS
	V	2400.00	54.52	30.22	4.85	23.98	53.13	74.00	PK	PASS
	V	2400.00	44.81	30.22	4.85	23.98	43.42	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.34	30.22	4.85	23.98	51.95	74.00	PK	PASS
	H	2483.50	44.62	30.22	4.85	23.98	43.23	54.00	AV	PASS
	H	2500.00	54.69	30.22	4.85	23.98	53.30	74.00	PK	PASS
	H	2500.00	44.68	30.22	4.85	23.98	43.29	54.00	AV	PASS
	V	2483.50	54.47	30.22	4.85	23.98	53.08	74.00	PK	PASS
	V	2483.50	44.56	30.22	4.85	23.98	43.17	54.00	AV	PASS
	V	2500.00	53.00	30.22	4.85	23.98	51.61	74.00	PK	PASS
	V	2500.00	44.73	30.22	4.85	23.98	43.34	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

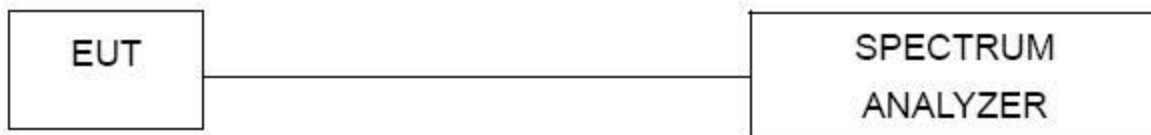

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX b Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-4.47	8	PASS
2437 MHz	-4.9	8	PASS
2462 MHz	-3.89	8	PASS



PSD NVNT b 2412MHz Ant1

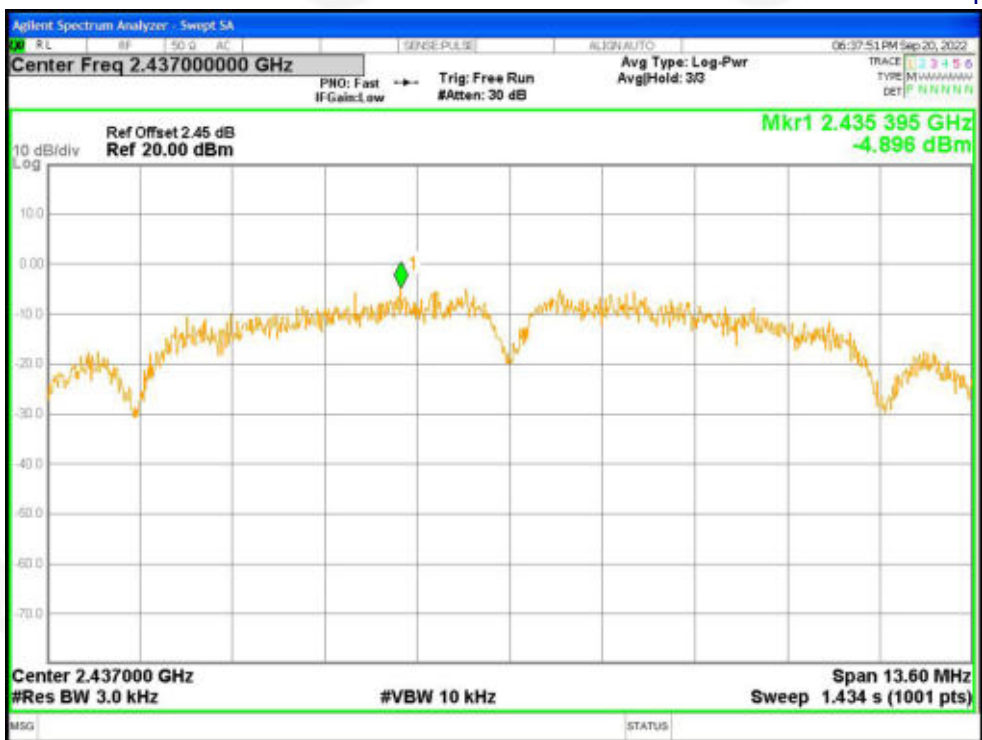

PSD NVNT b 2437MHz Ant1

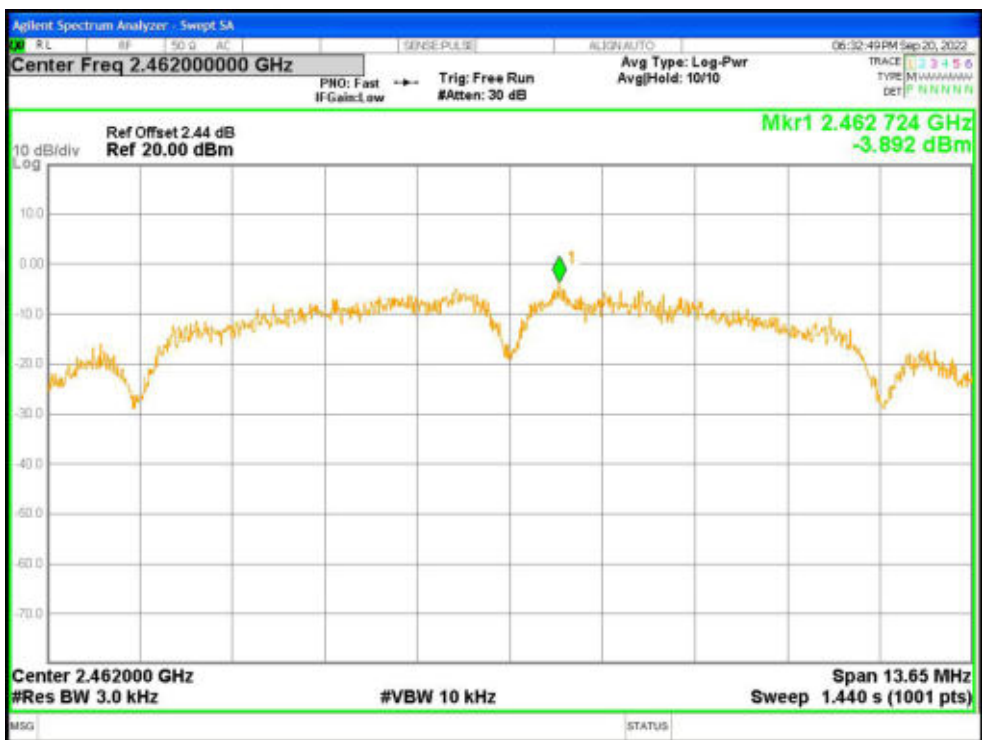


PSD NVNT b 2462MHz Ant1




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-8.31	8	PASS
2437 MHz	-8.58	8	PASS
2462 MHz	-10.14	8	PASS

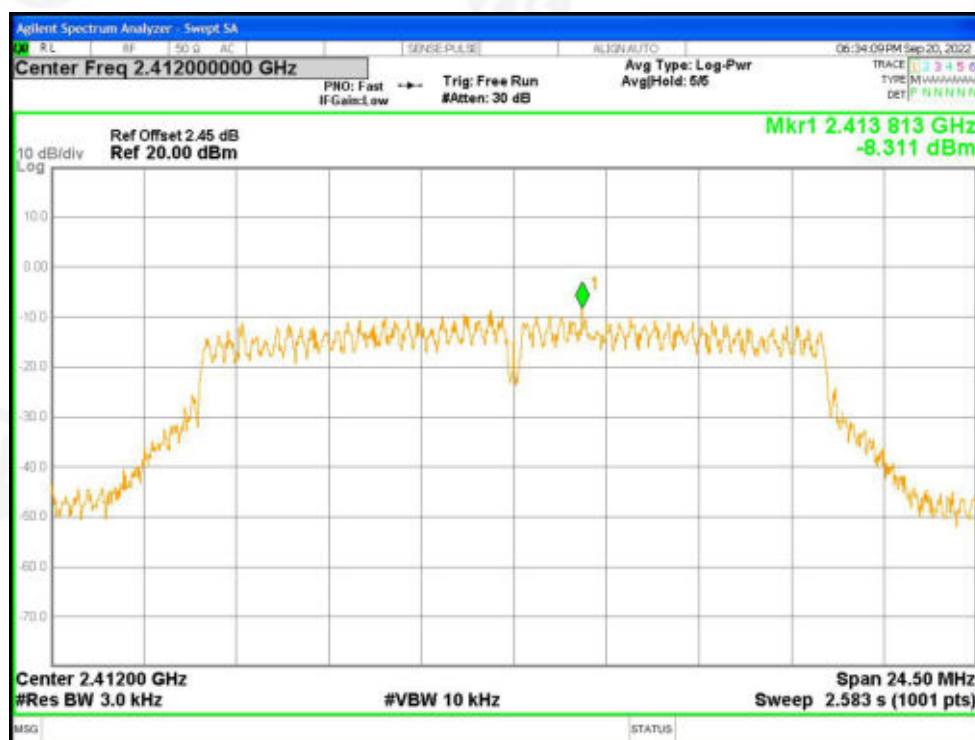

PSD NVNT g 2412MHz Ant1

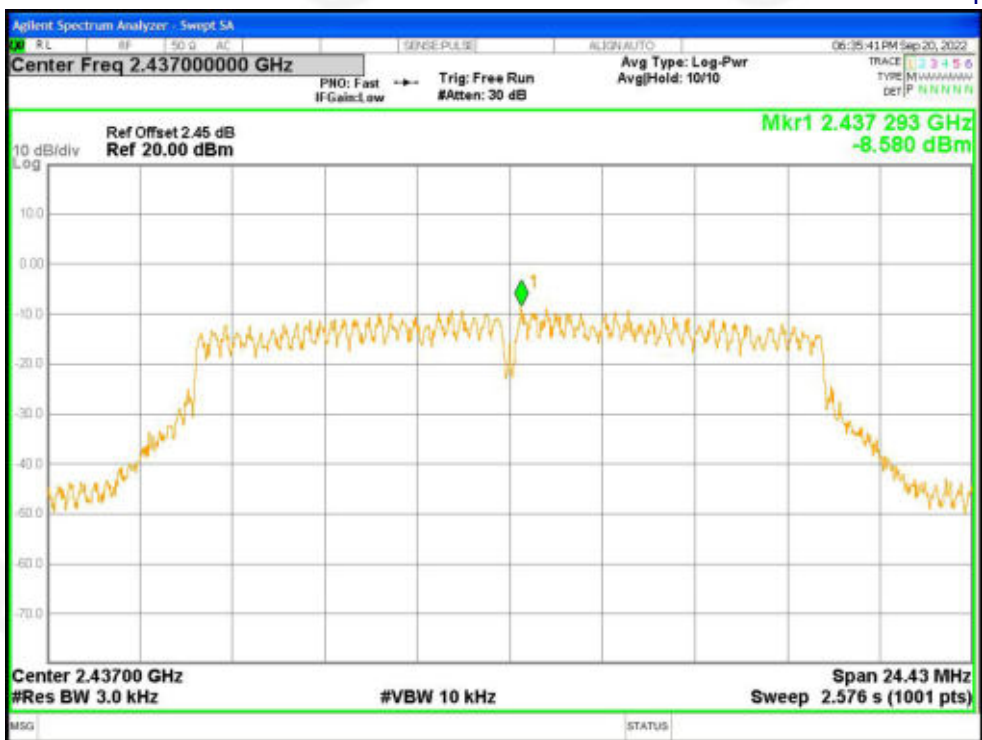

PSD NVNT g 2437MHz Ant1

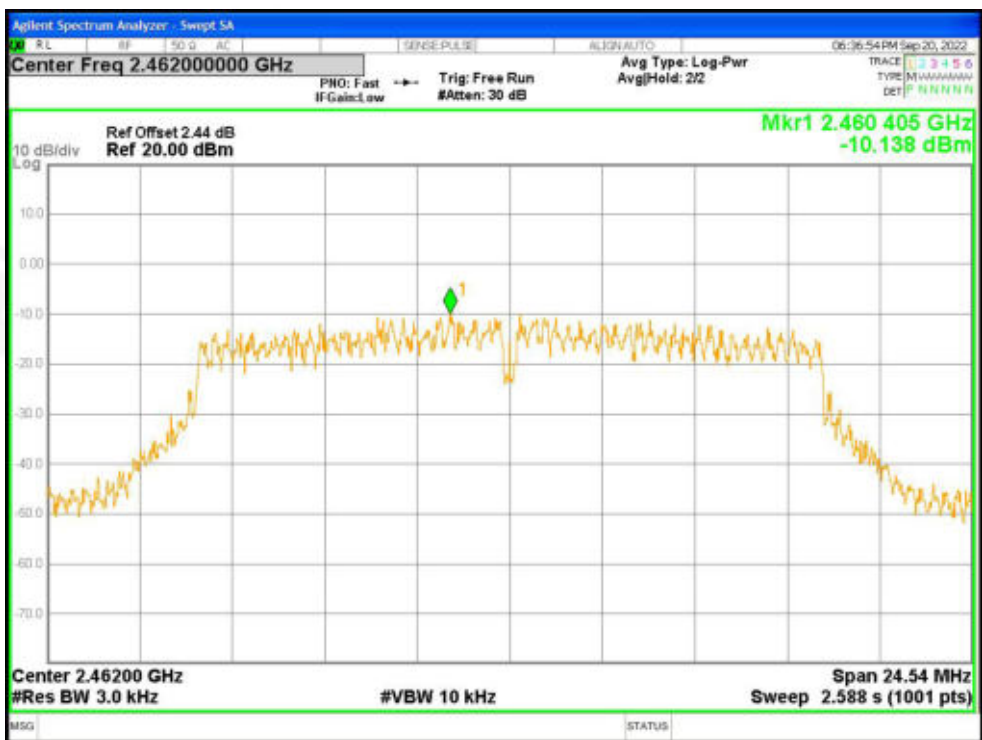



PSD NVNT g 2462MHz Ant1




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-9.01	8	PASS
2437 MHz	-9.8	8	PASS
2462 MHz	-9.3	8	PASS

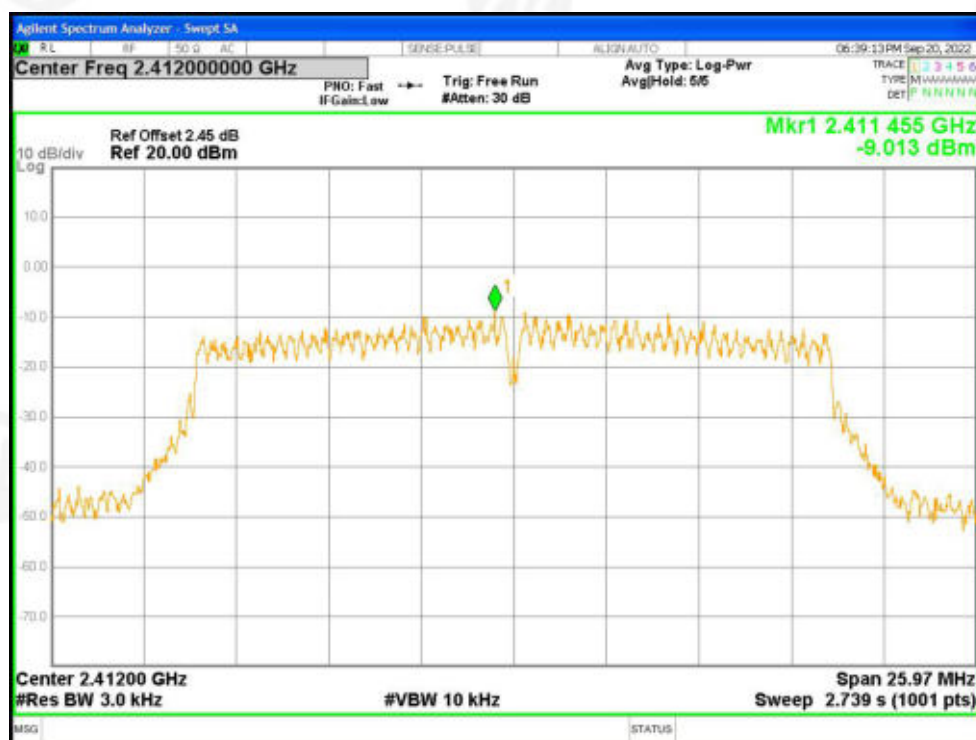

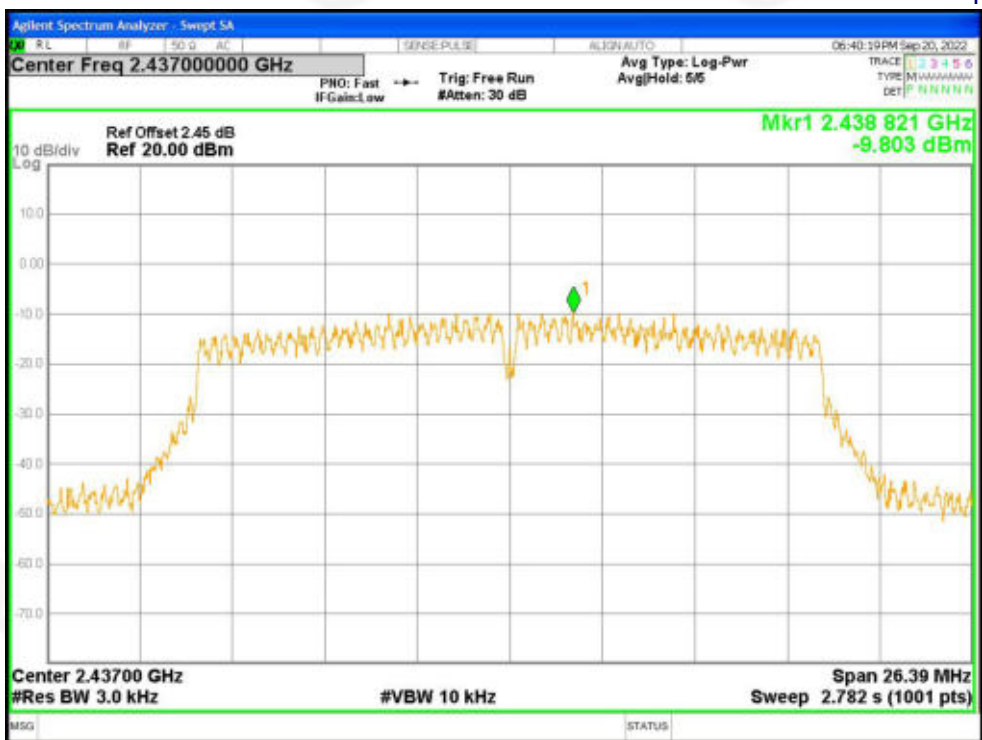

PSD NVNT n20 2437MHz Ant1

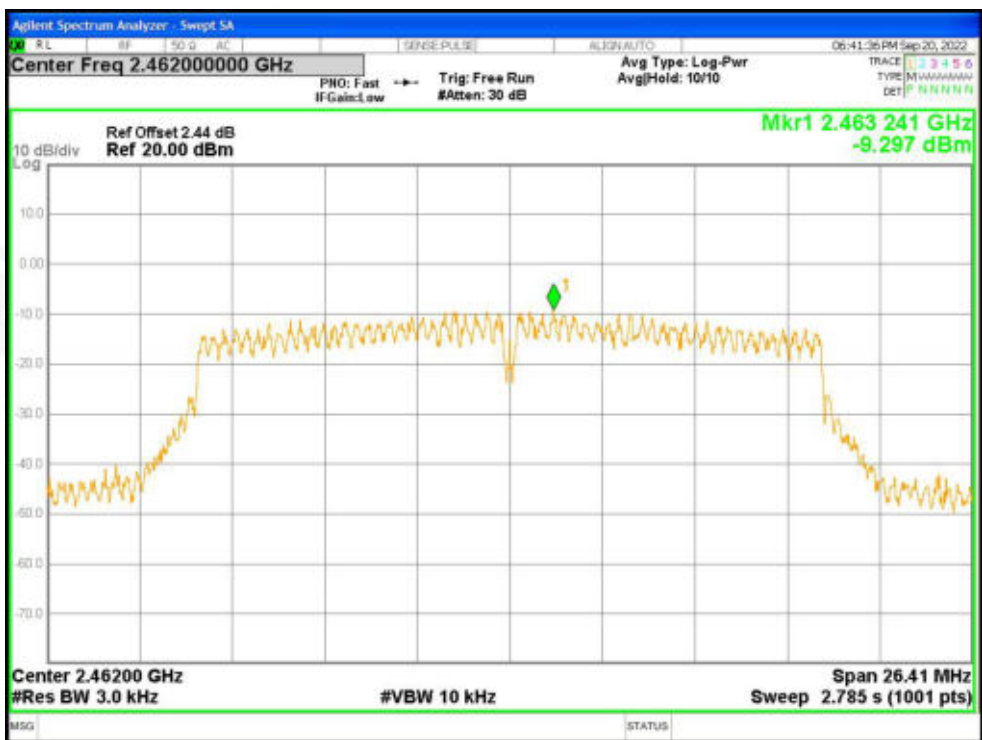



PSD NVNT n20 2462MHz Ant1




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-12.45	8	PASS
2437 MHz	-13.01	8	PASS
2452 MHz	-13.12	8	PASS

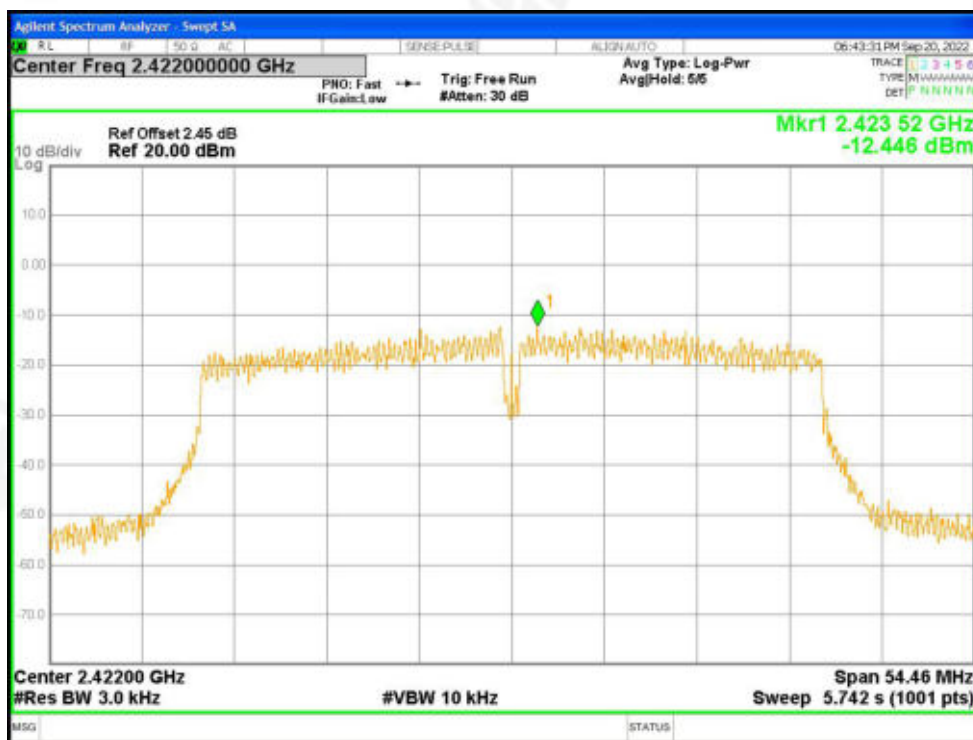

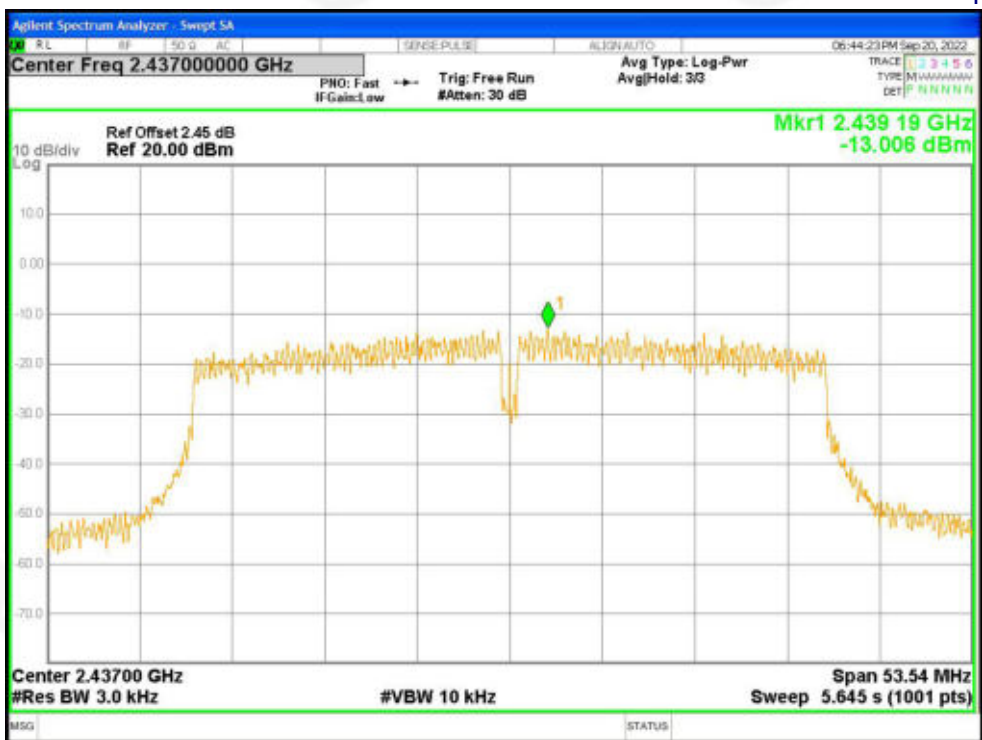

PSD NVNT n40 2437MHz Ant1

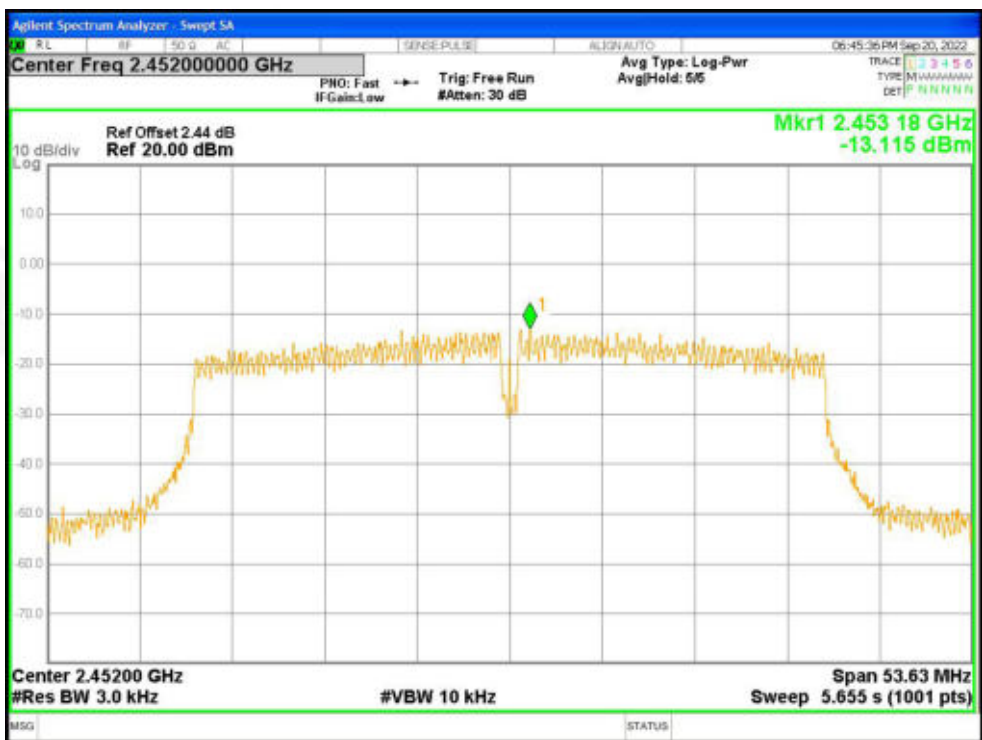


PSD NVNT n40 2452MHz Ant1




Temperature :	26℃	Relative Humidity :	54%
Test Mode :	GFSK	Test Voltage :	DC 3.8V

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-18.63	8	PASS
2440 MHz	-18.69	8	PASS
2480 MHz	-18.99	8	PASS

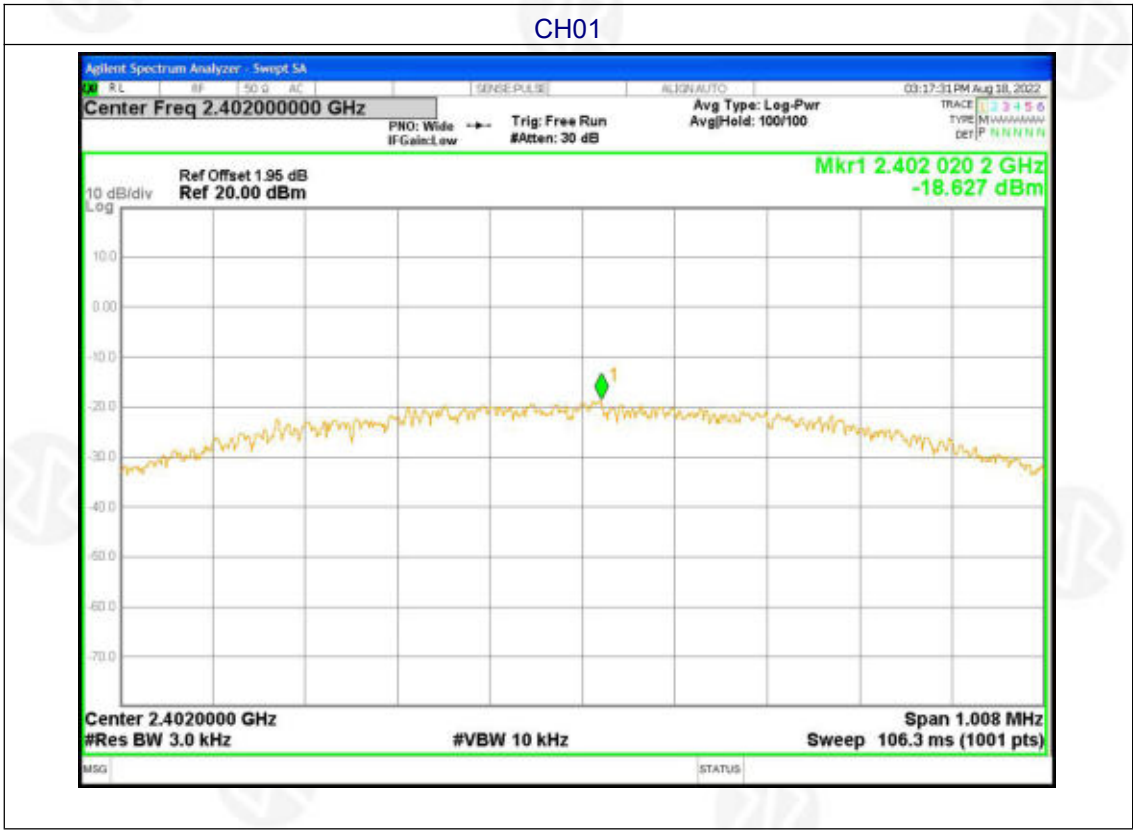




CH20

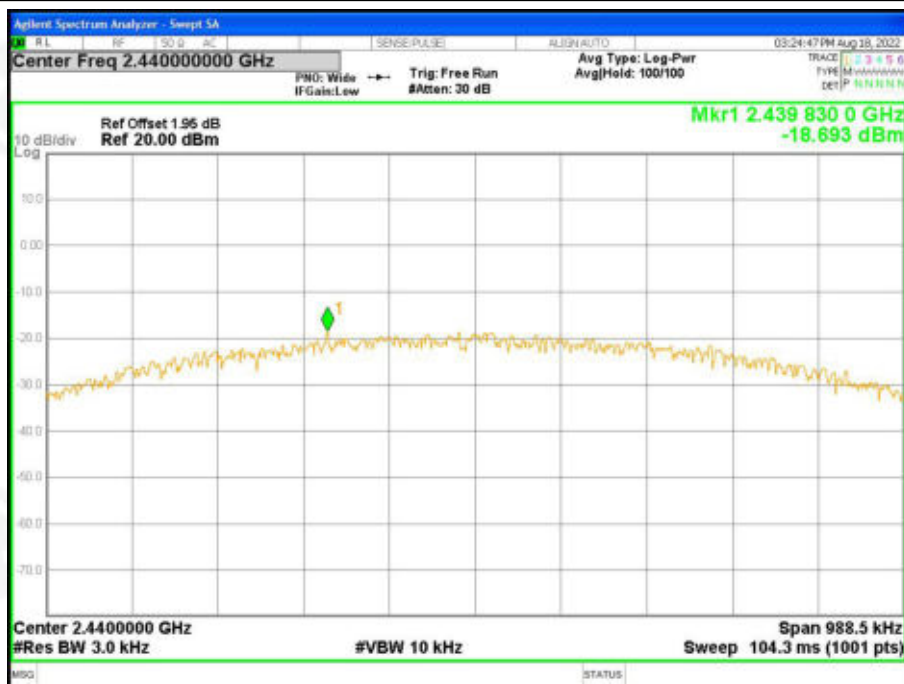

CH40

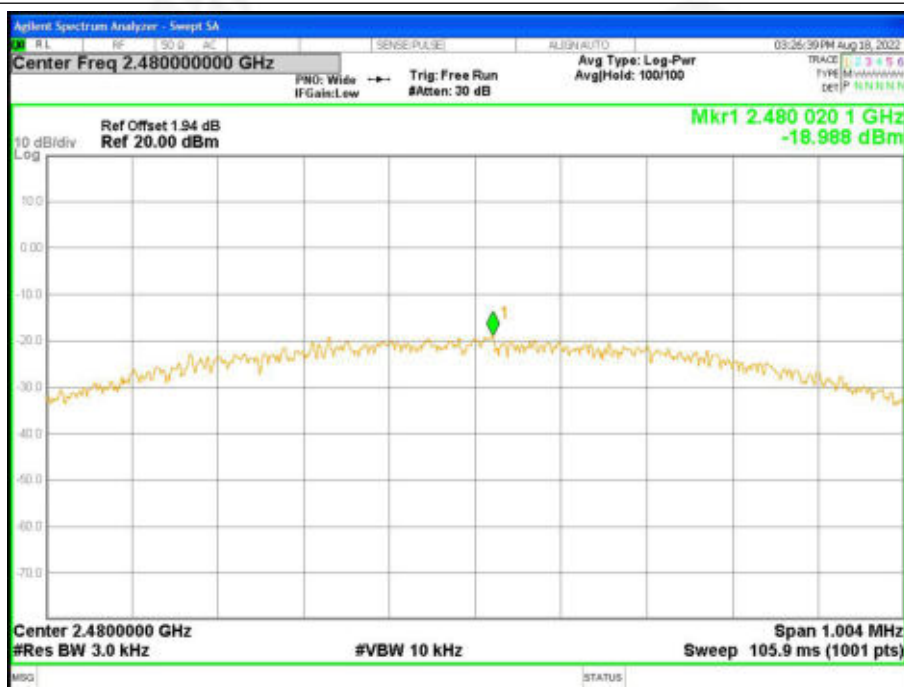



7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V
Test Mode :	TX		

Test CH	-6dB Occupy Bandwidth (MHz)					Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(KHz)	
Lowest	8.049	16.32	17.64	35.98	>500	Pass
Middle	8.06	16.43	17.59	36.29		
Highest	8.052	16.36	17.57	36.29		



Test plot as follows:


802.11b

802.11g

Lowest channel



Middle channel

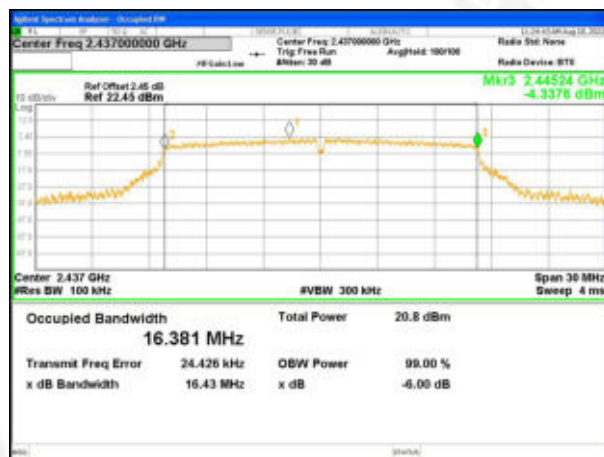

Highest channel





802.11n20

802.11n40

Lowest channel



Middle channel




Highest channel






Temperature :	26℃	Relative Humidity :	54%
Test Mode :	GFSK	Test Voltage :	DC 3.8V

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.672	>500	Pass
Middle	0.659		
Highest	0.669		

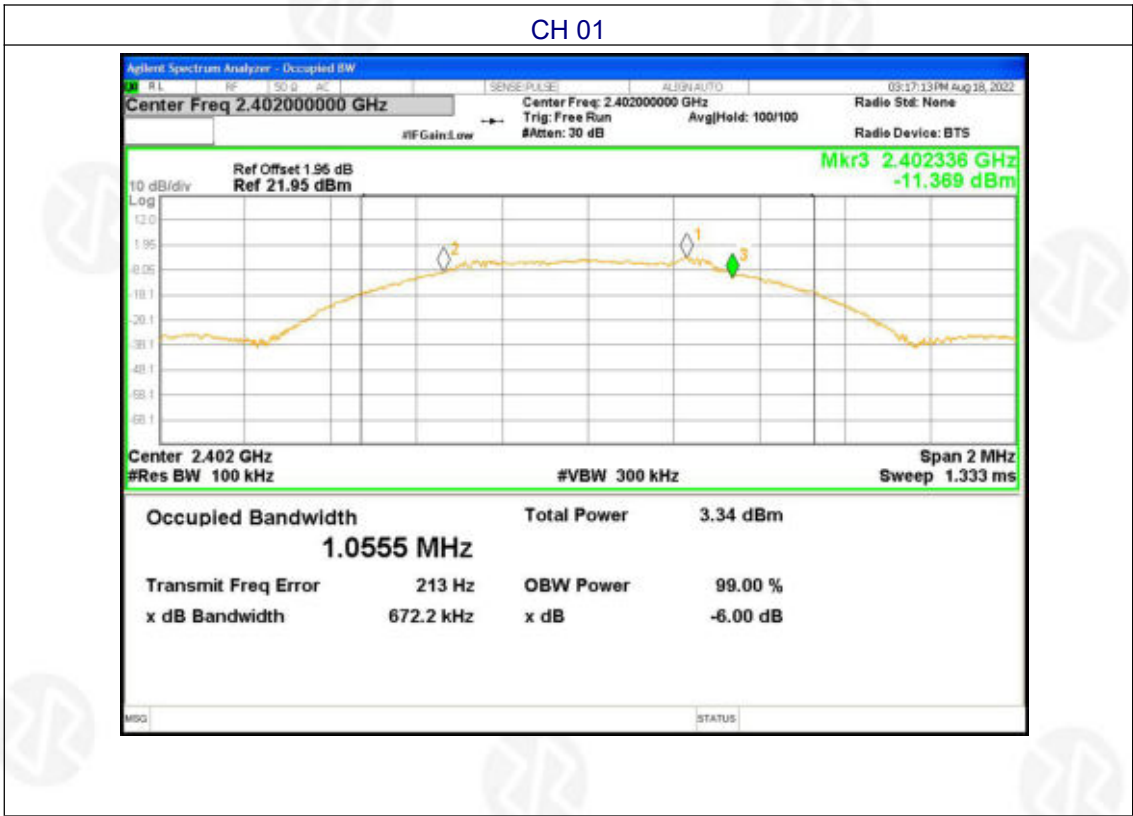




CH20

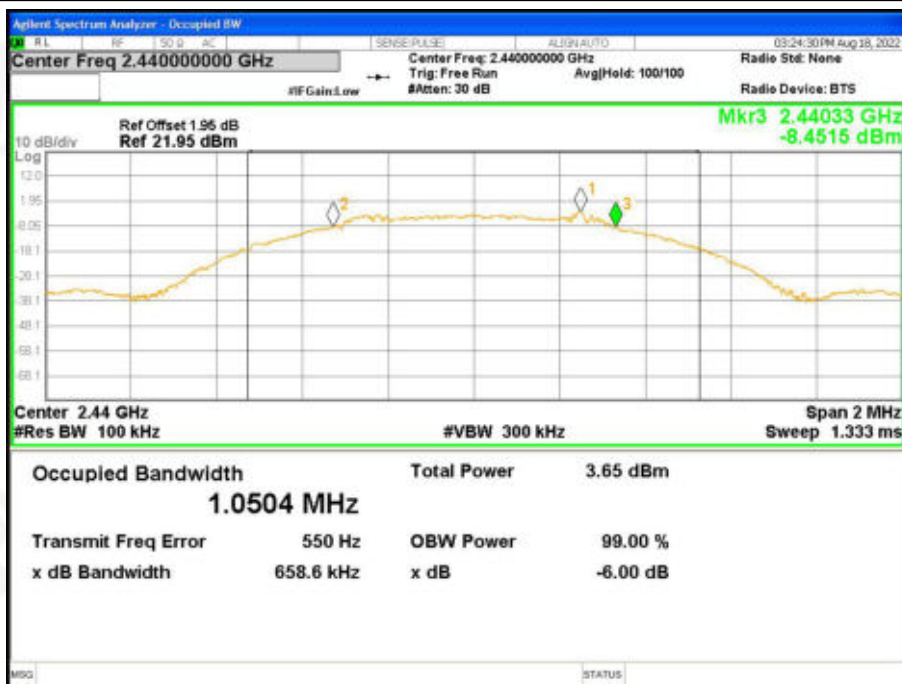

CH40

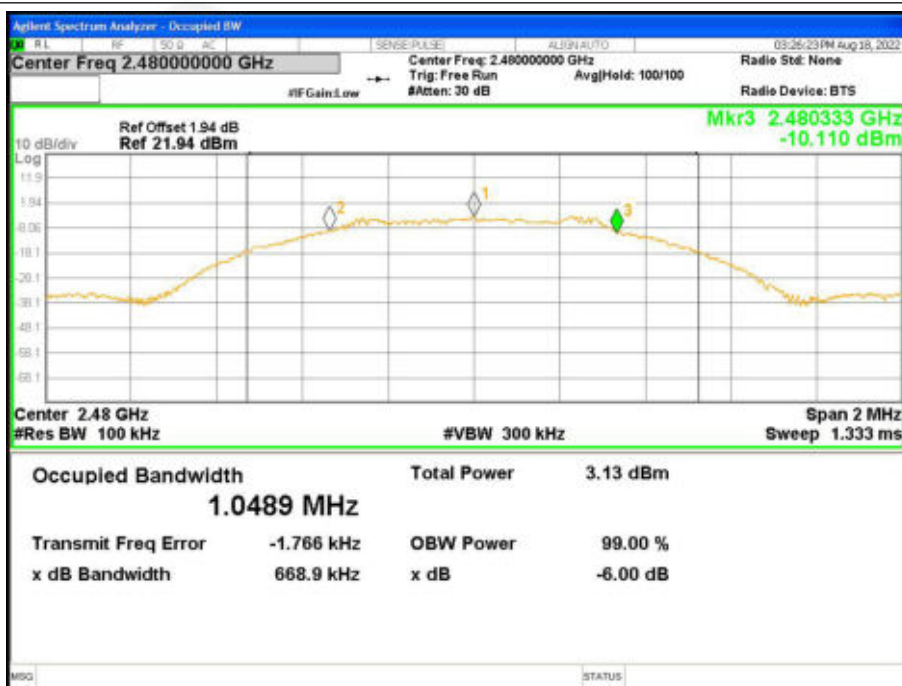



8.OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a.(BLE) 1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to > 1.5 times the DTS bandwidth.
3. Set the RBW to: $1\text{MHz} \leq \text{RBW} \leq 2\text{MHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak(BLE)
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- a.(WIFI) This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.
- a)Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b)Set the VBW $\geq 3 \times \text{RBW}$
- c)Set the span $\geq 1.5 \times \text{OBW}$.
- d)Detector = RMS.
- e)Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument' s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..



8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.6 TEST RESULT


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.8V

Test CH	Average Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	18.11	15.88	15.55	14.9	30.00	Pass
Middle	18.12	15.61	15.47	14.69		
Highest	18.04	15.34	15.17	14.68		


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
	GFSK		
Lowest	-2.42	30.00	Pass
Middle	-2.18		
Highest	-2.77		

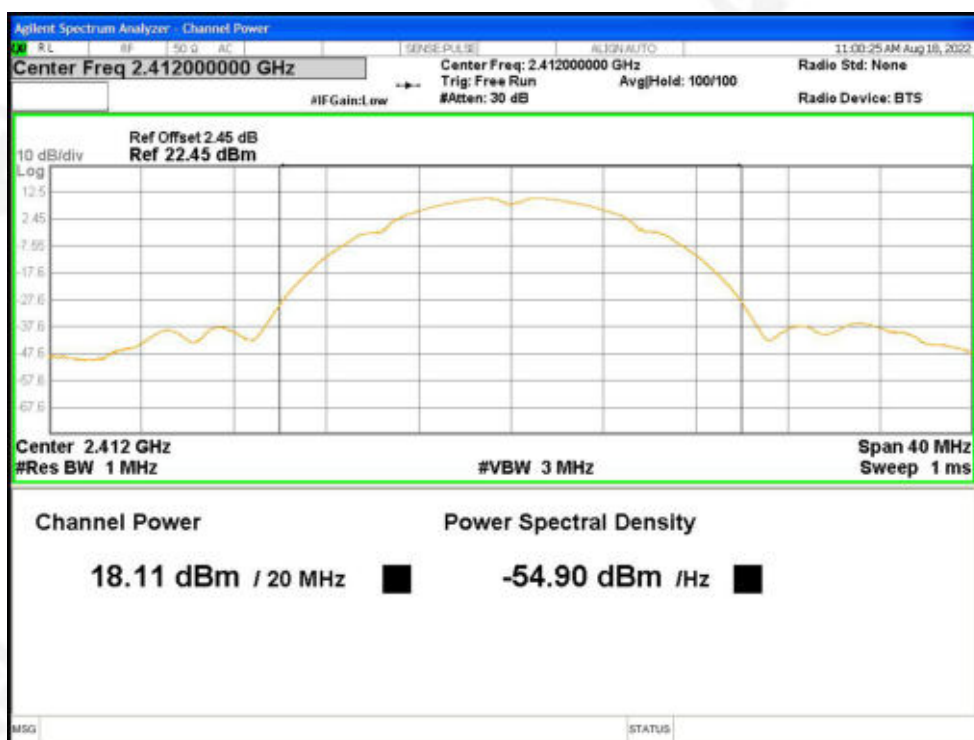


Average Power NVNT b 2412MHz Ant1

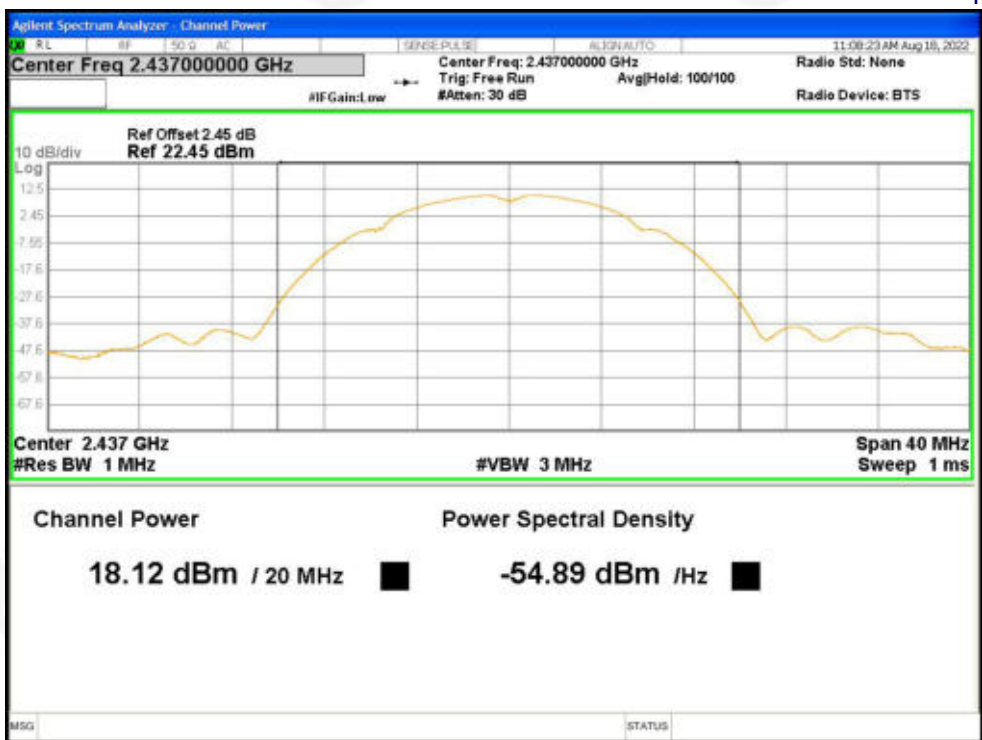


Average Power NVNT b 2437MHz Ant1

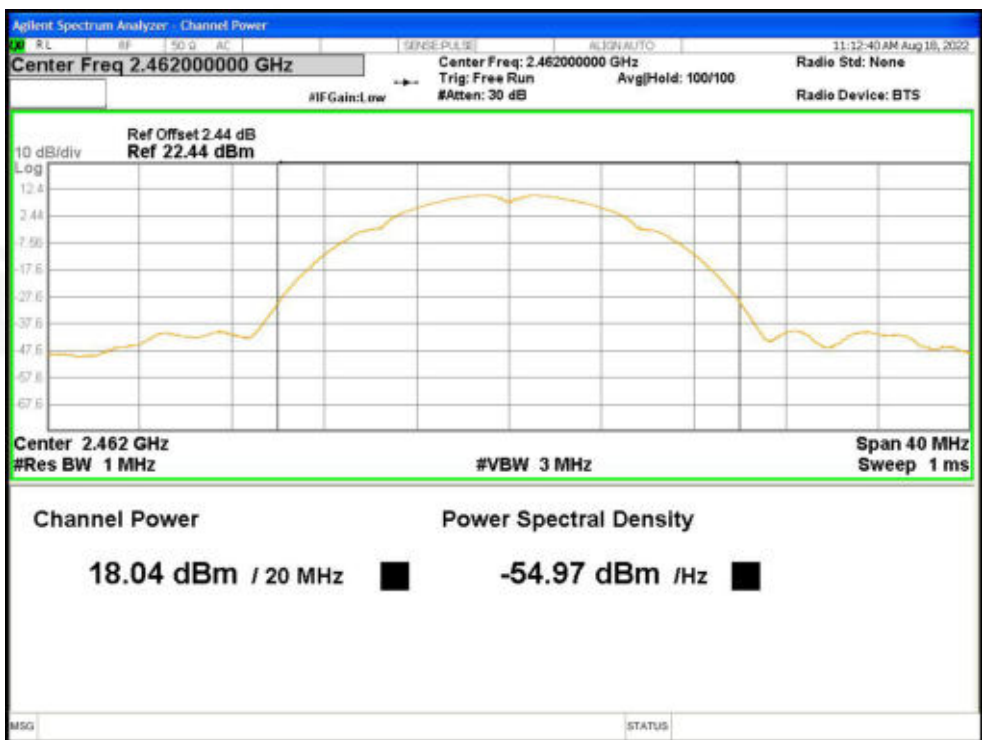


Average Power NVNT b 2462MHz Ant1

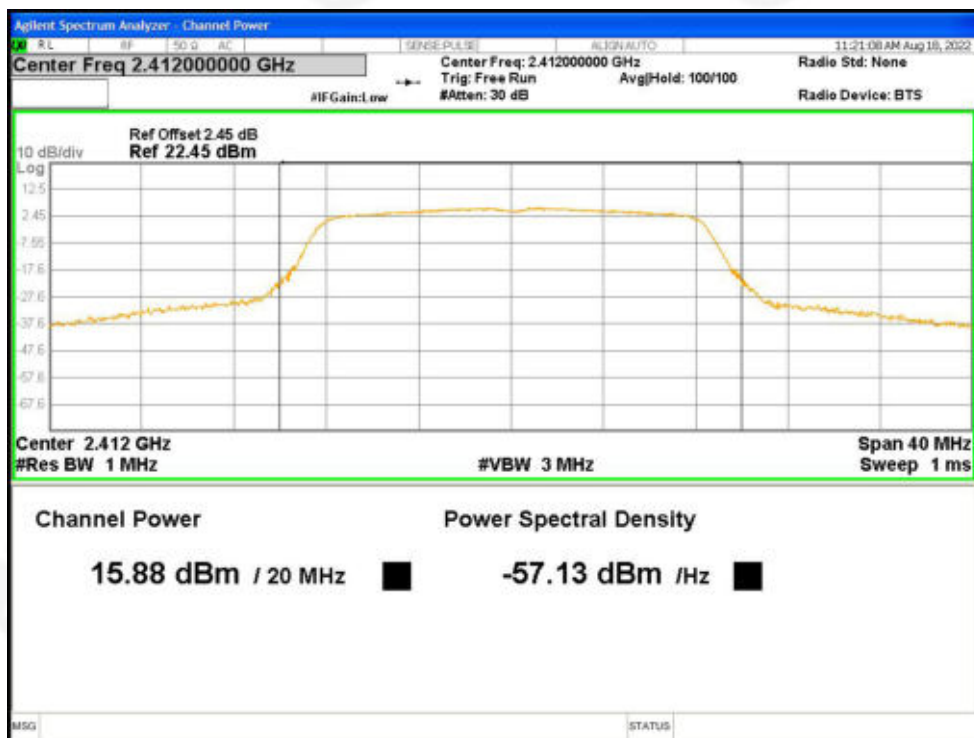


Average Power NVNT g 2412MHz Ant1

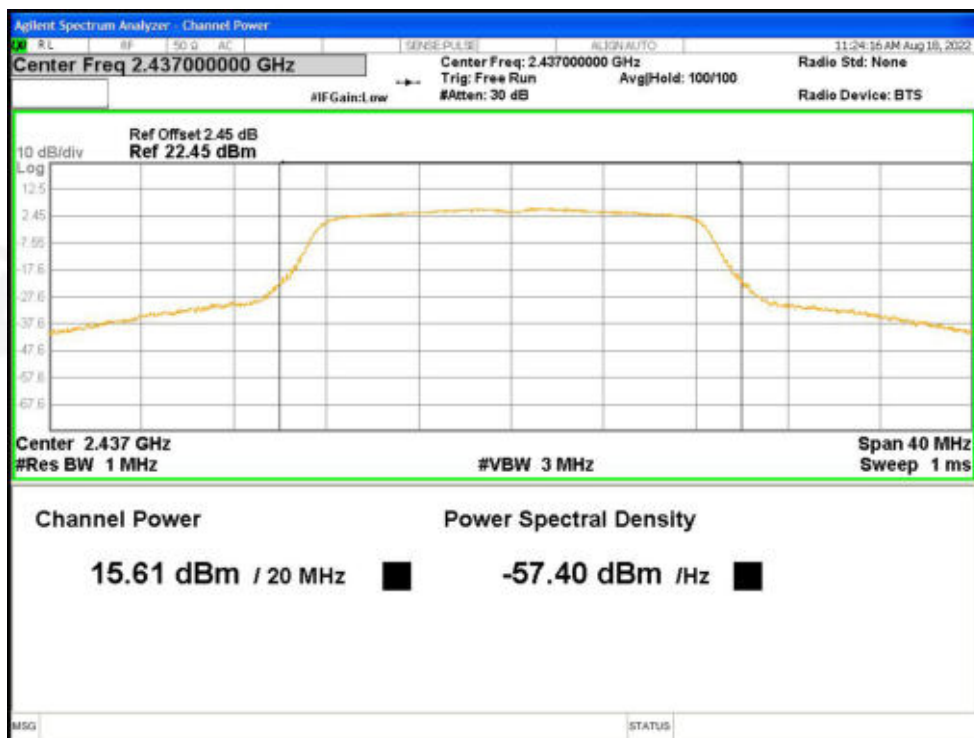


Average Power NVNT g 2437MHz Ant1

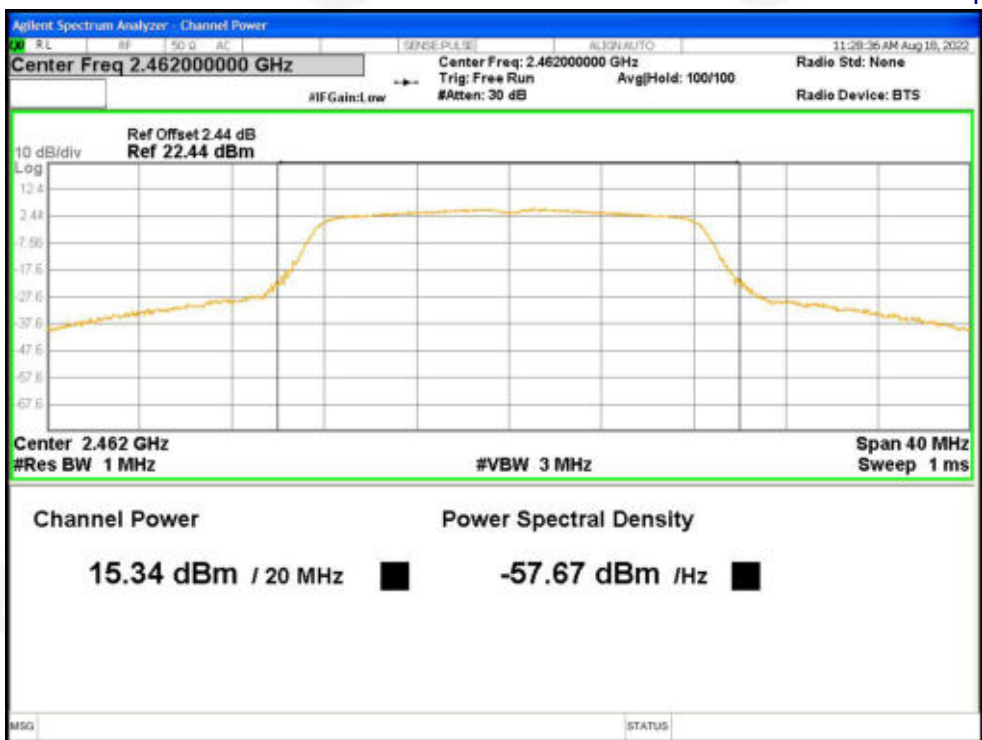


Average Power NVNT g 2462MHz Ant1

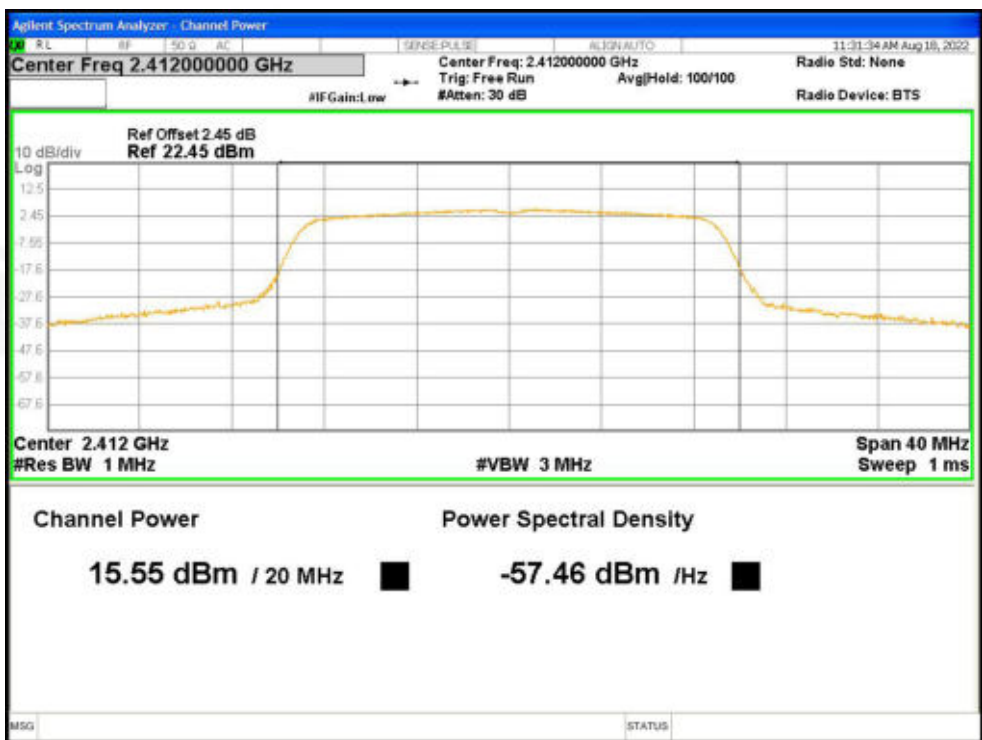


Average Power NVNT n20 2412MHz Ant1

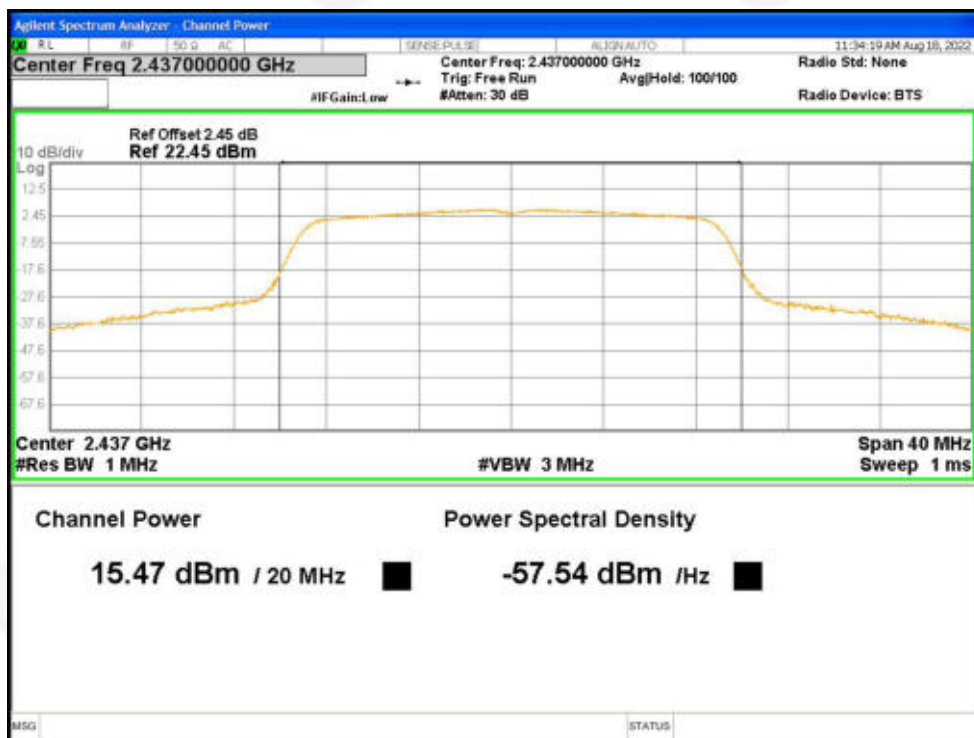


Average Power NVNT n20 2437MHz Ant1

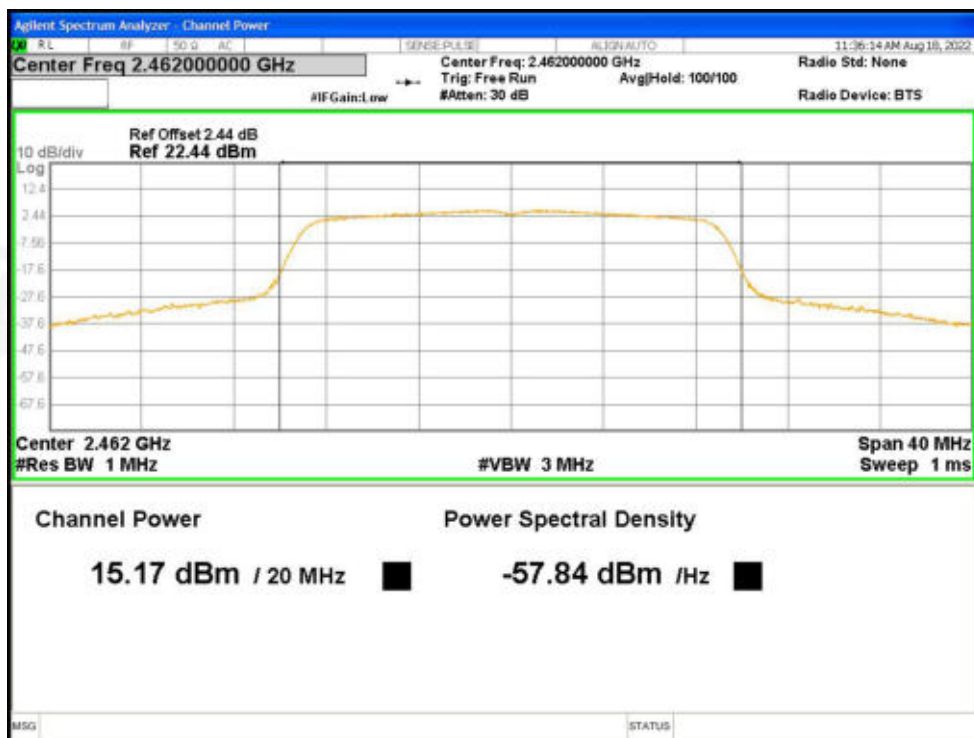


Average Power NVNT n20 2462MHz Ant1

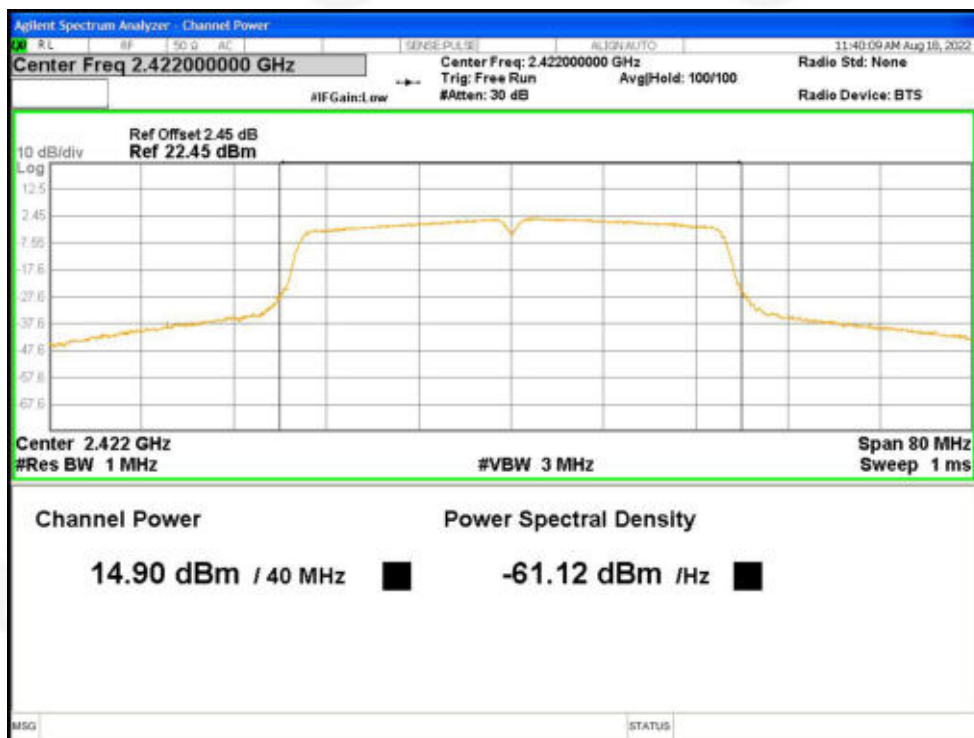


Average Power NVNT n40 2422MHz Ant1

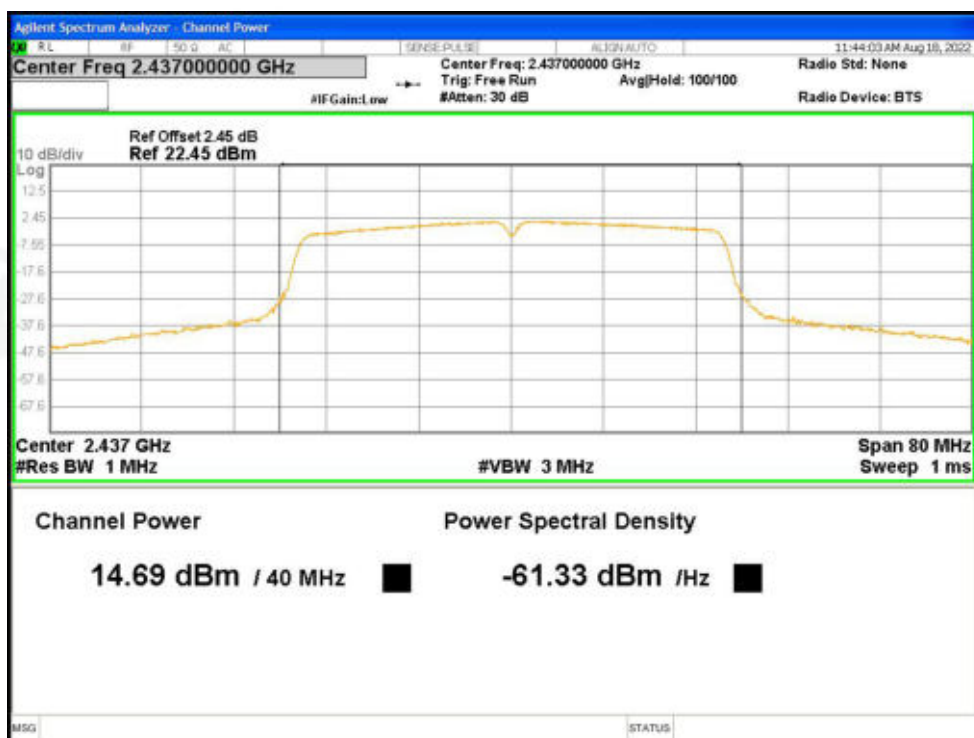

Average Power NVNT n40 2437MHz Ant1

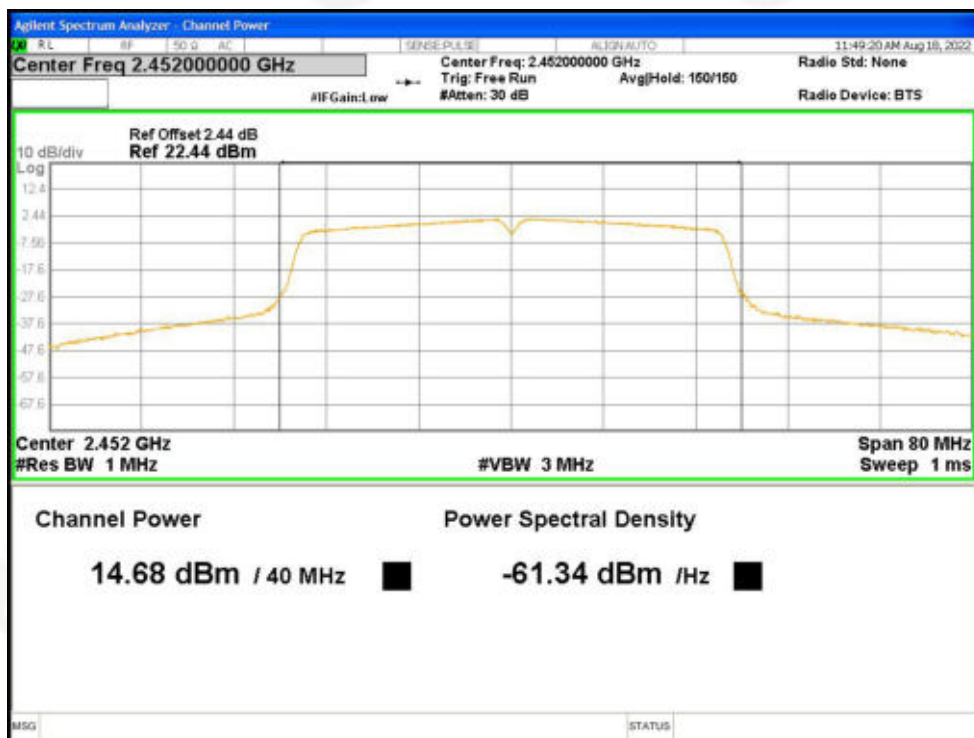


Average Power NVNT n40 2452MHz Ant1

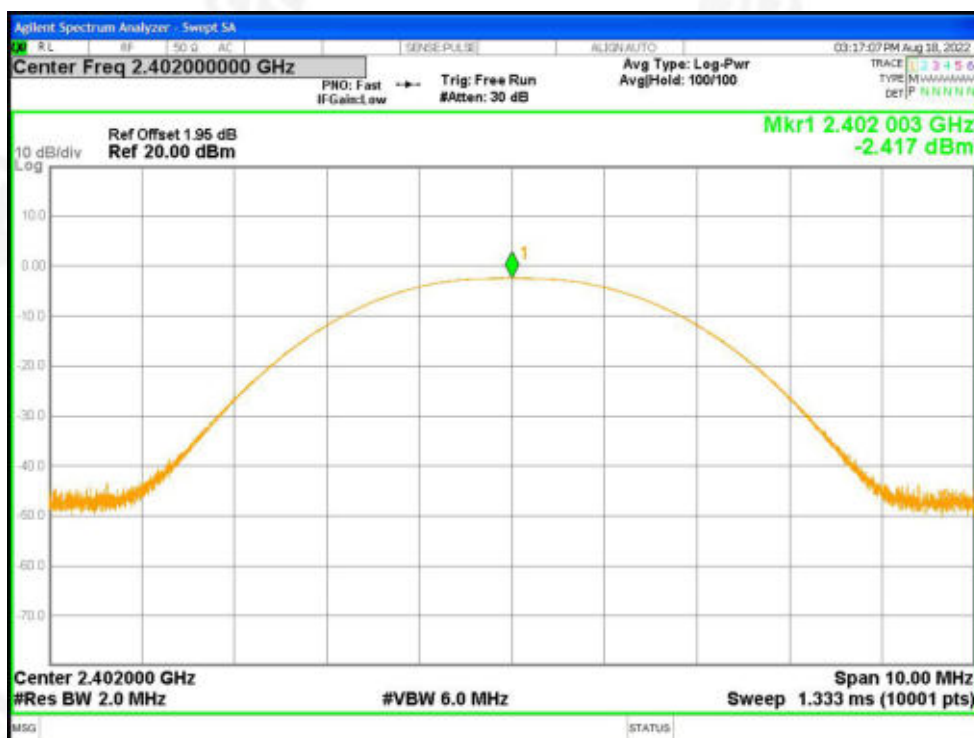

Peak Power NVNT BLE 1M 2402MHz Ant1



Peak Power NVNT BLE 1M 2440MHz Ant1

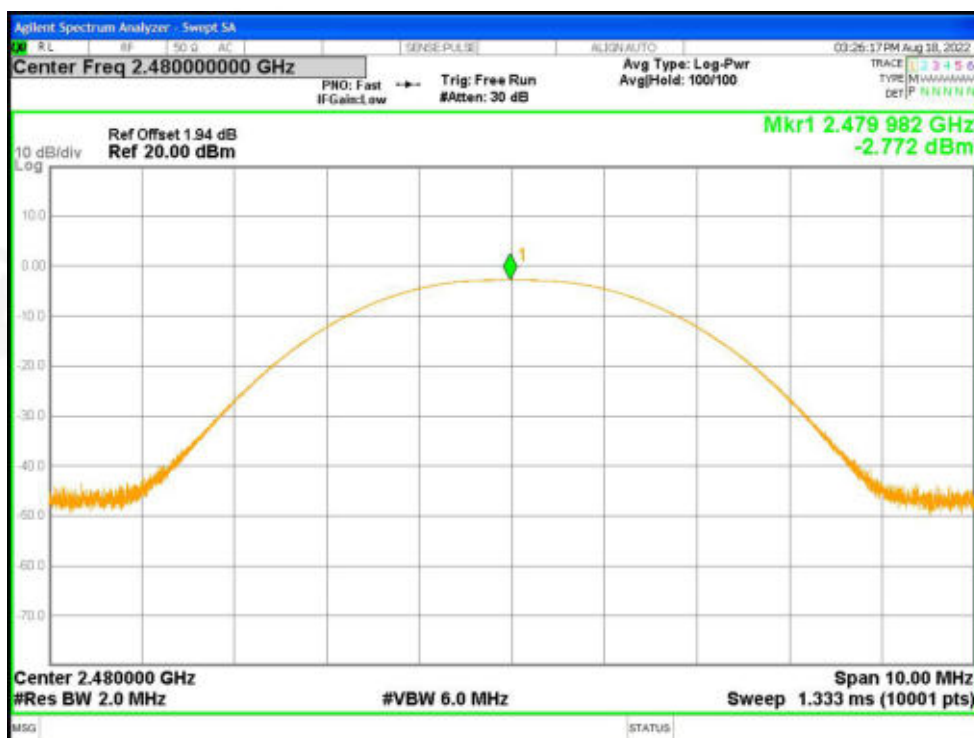

Peak Power NVNT BLE 1M 2480MHz Ant1



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS




Test plot as follows:




Band Edge NVNT b 2412MHz Ant1 Ref

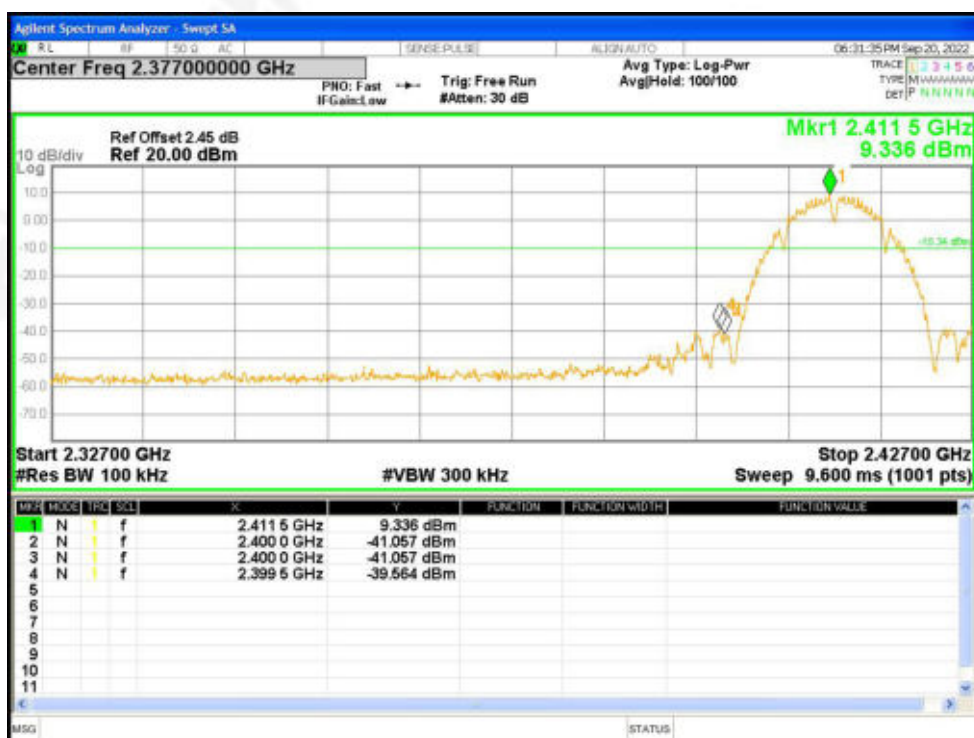


Band Edge NVNT b 2412MHz Ant1 Emission

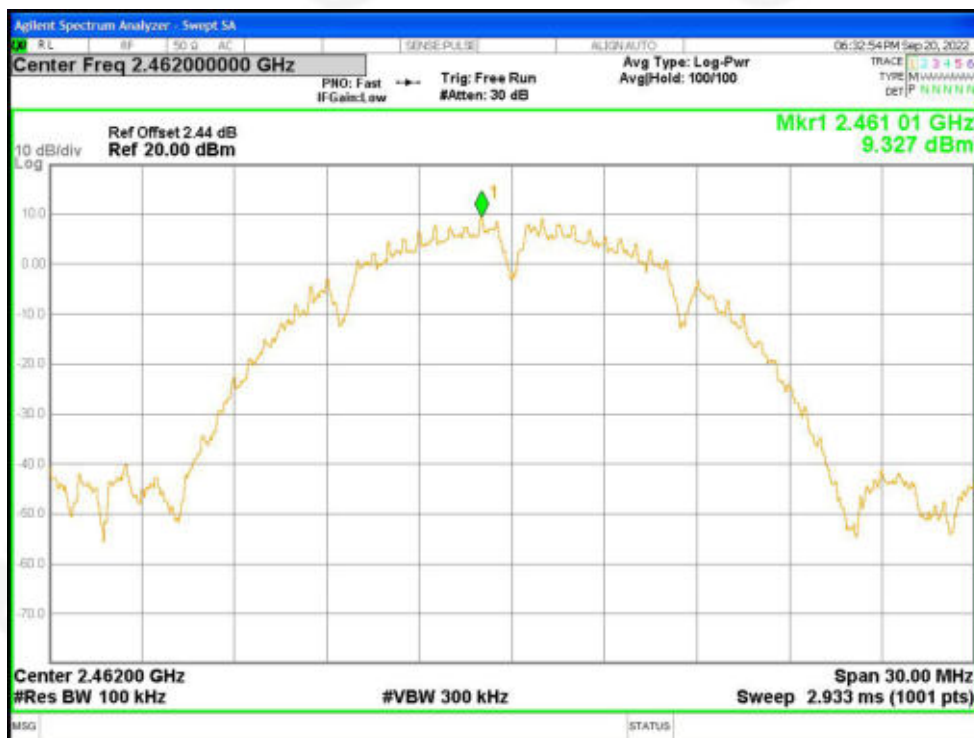

Band Edge NVNT b 2462MHz Ant1 Ref

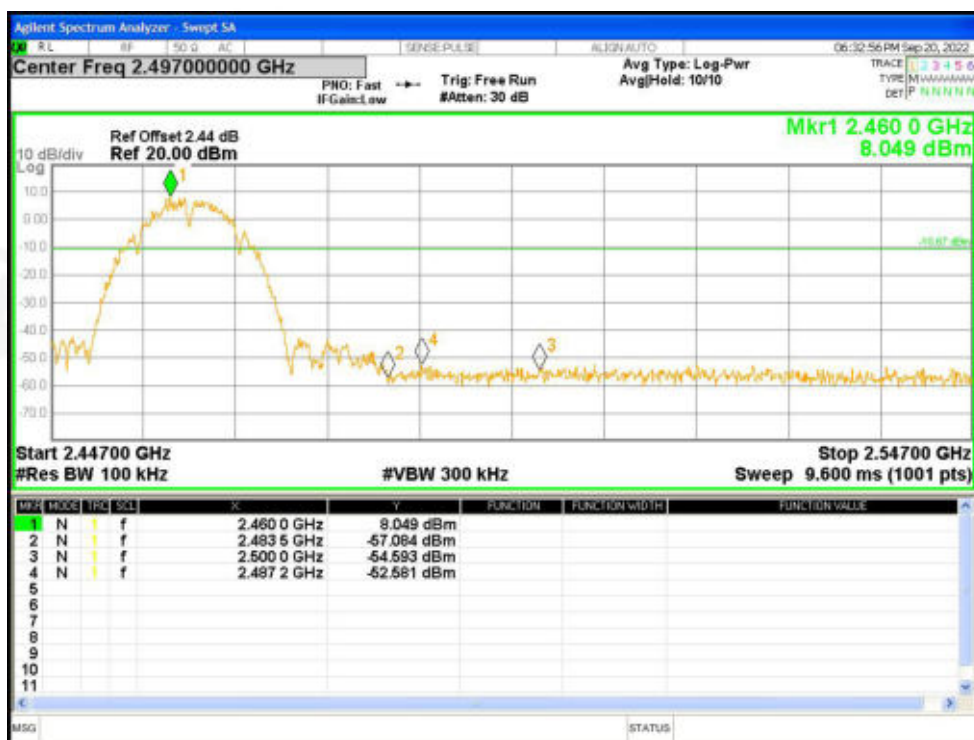


Band Edge NVNT b 2462MHz Ant1 Emission

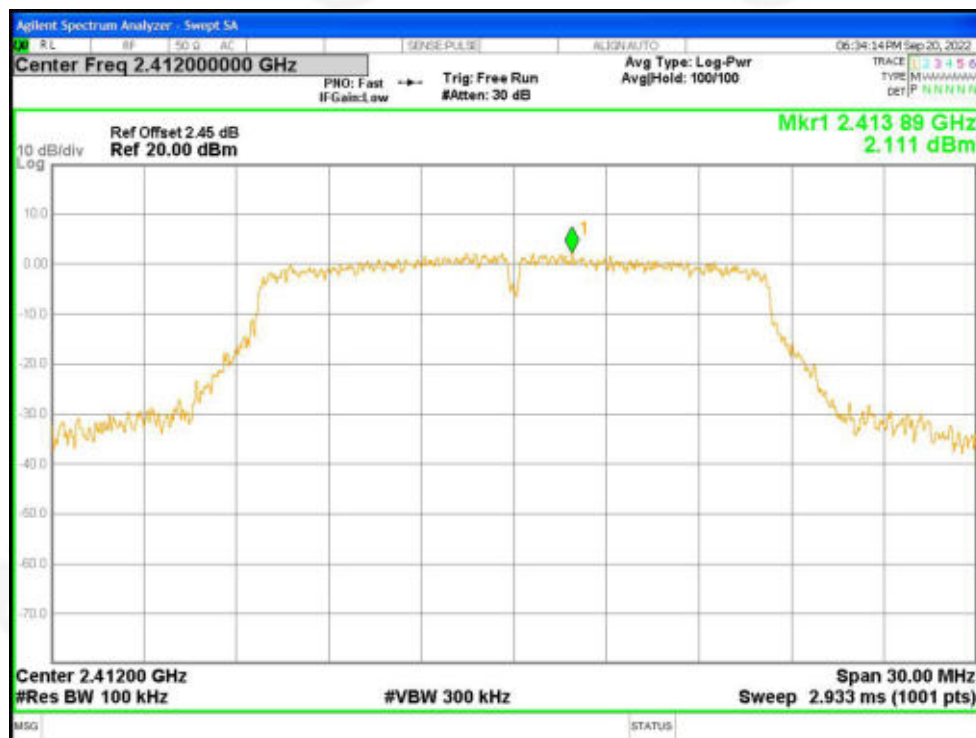


Band Edge NVNT g 2412MHz Ant1 Ref




Band Edge NVNT g 2412MHz Ant1 Emission

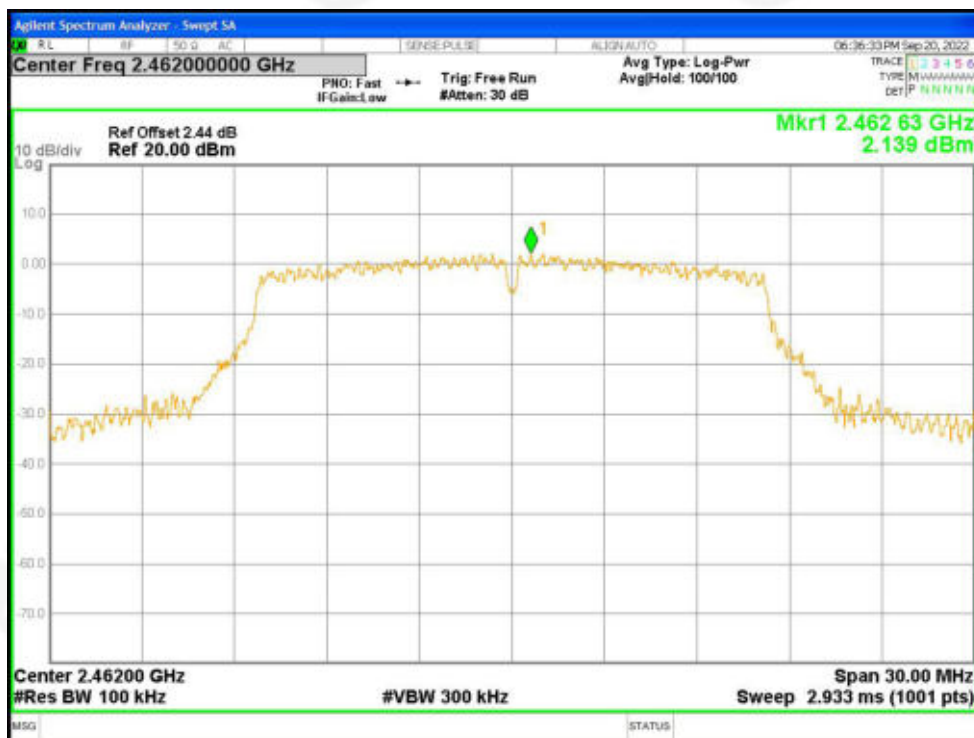


Band Edge NVNT g 2462MHz Ant1 Ref

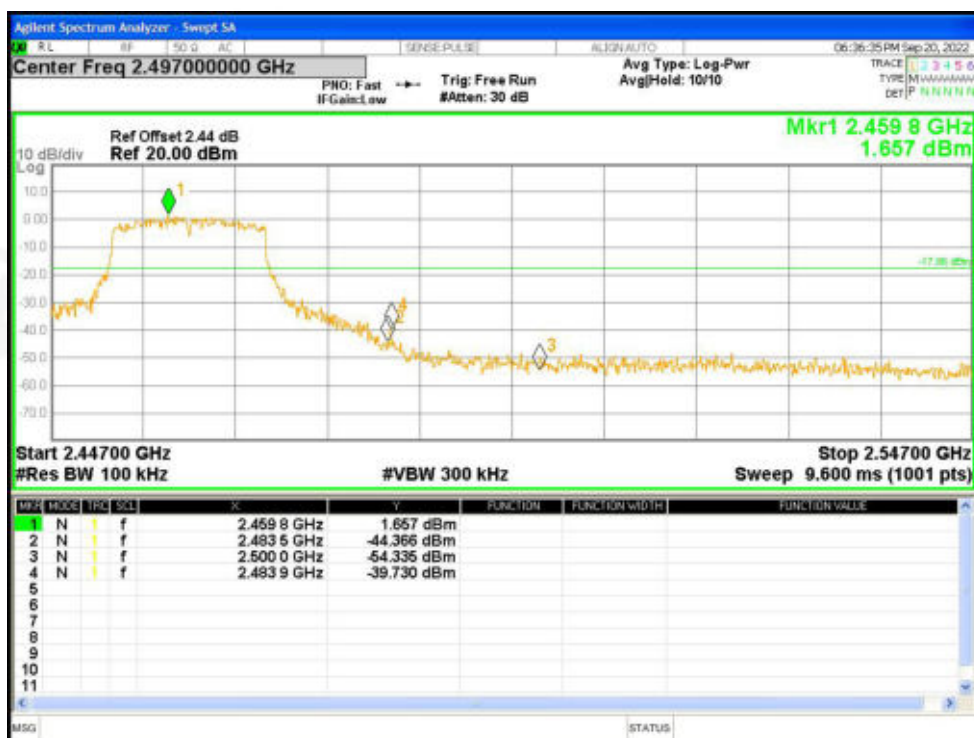


Band Edge NVNT g 2462MHz Ant1 Emission

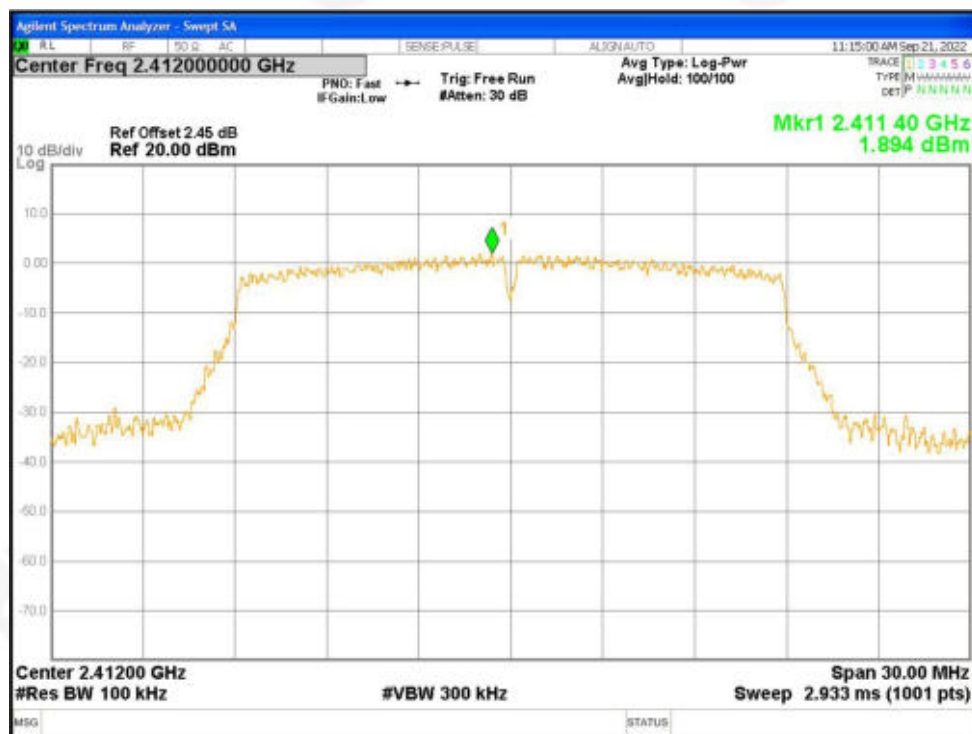


Band Edge NVNT n20 2412MHz Ant1 Ref

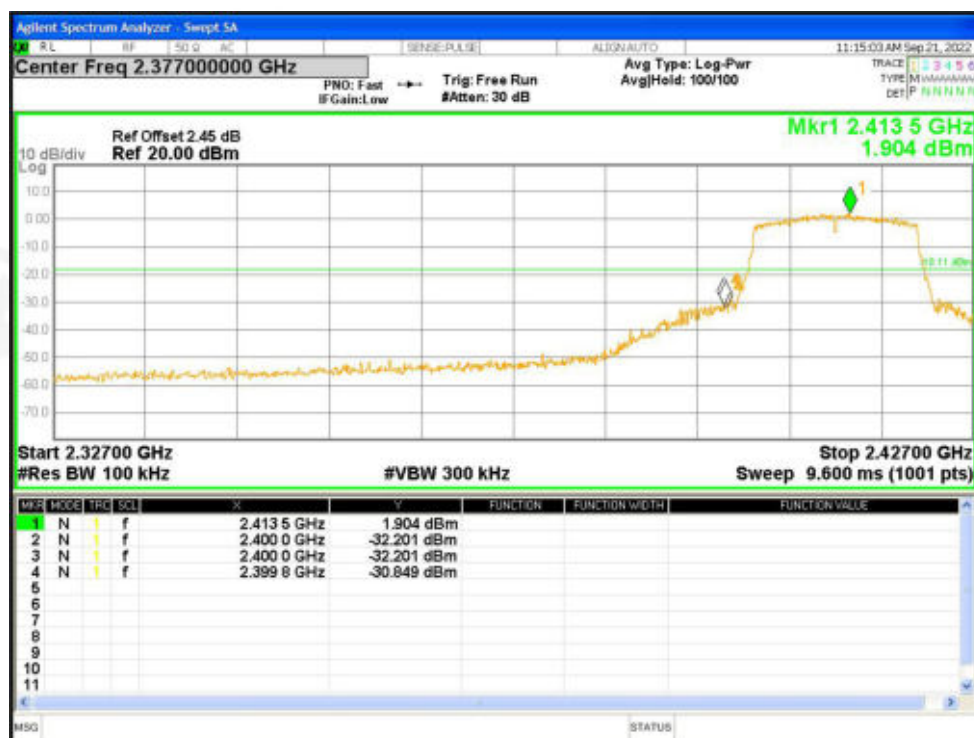


Band Edge NVNT n20 2412MHz Ant1 Emission

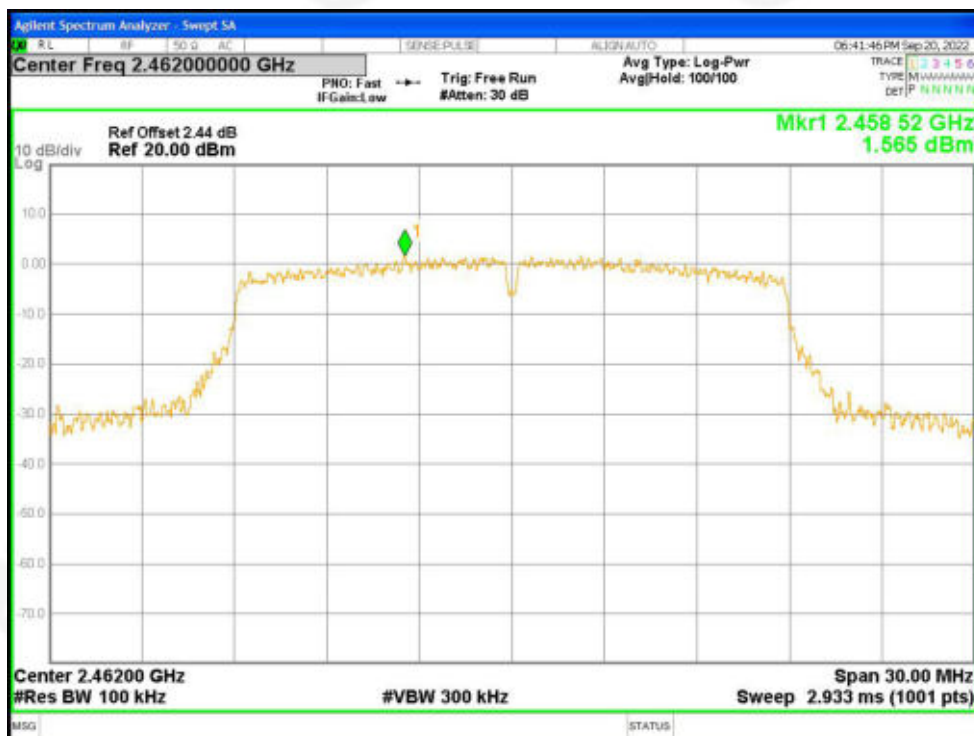


Band Edge NVNT n20 2462MHz Ant1 Ref

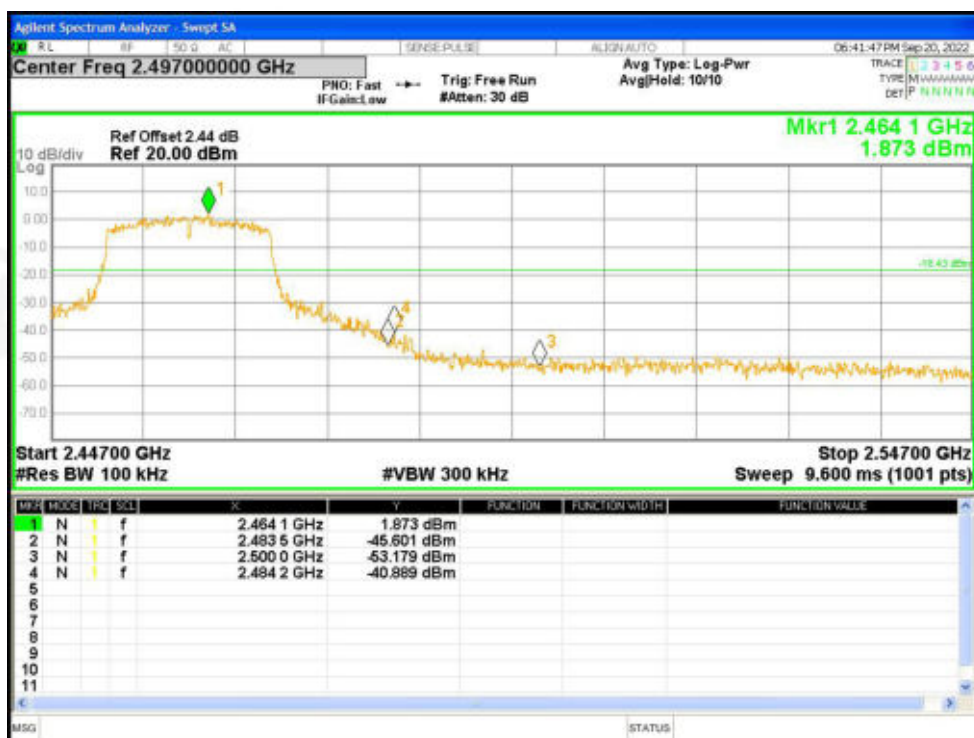


Band Edge NVNT n20 2462MHz Ant1 Emission

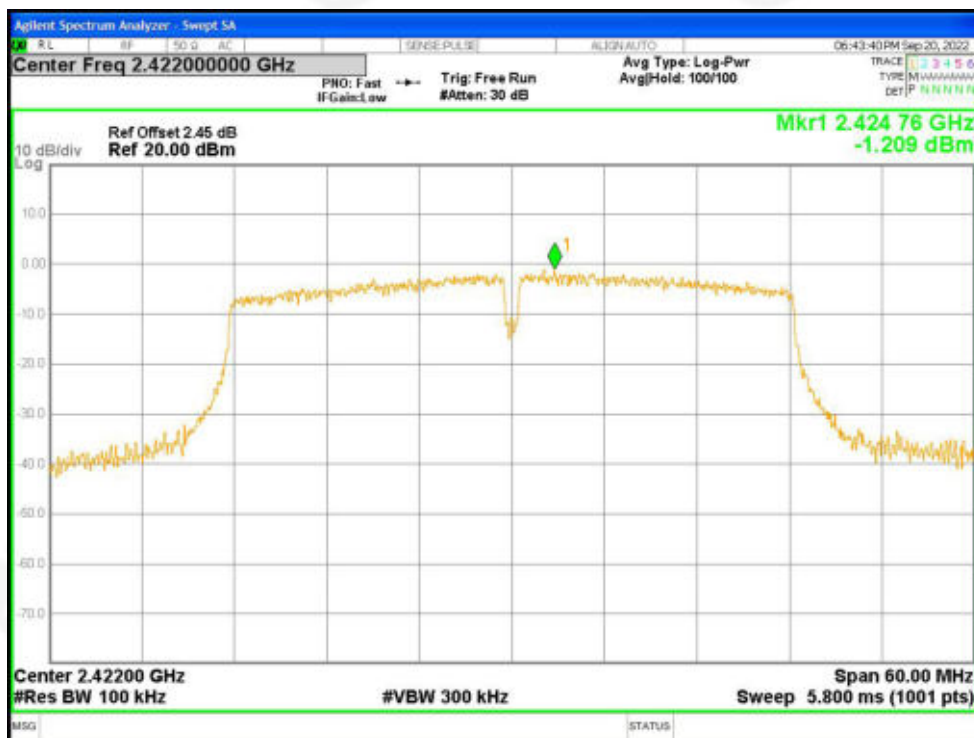

Band Edge NVNT n40 2422MHz Ant1 Ref

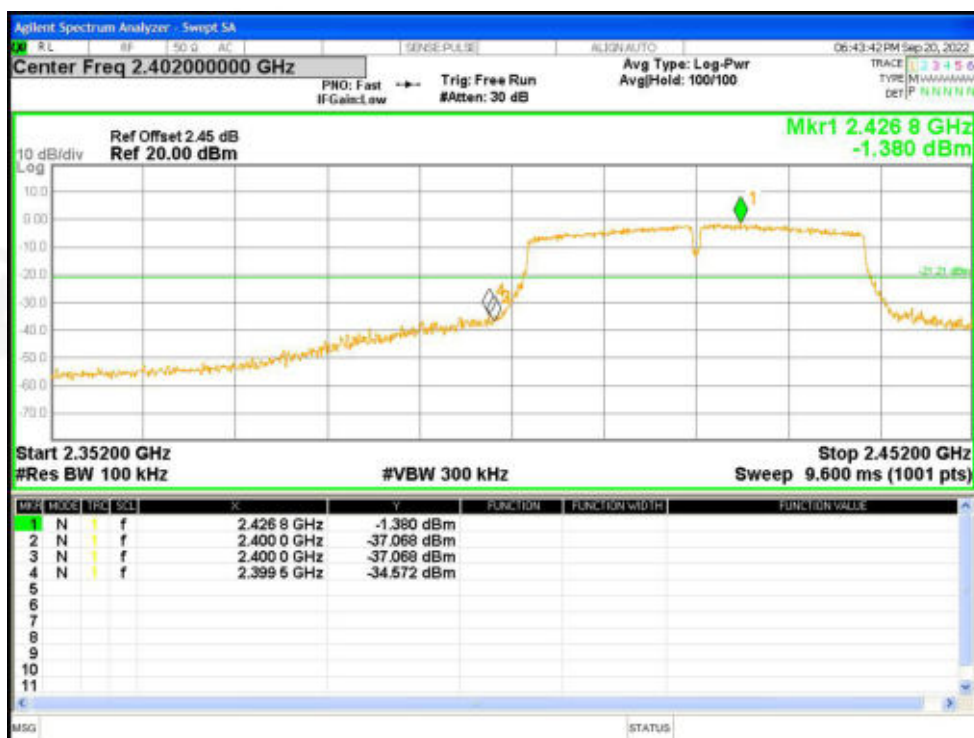


Band Edge NVNT n40 2422MHz Ant1 Emission

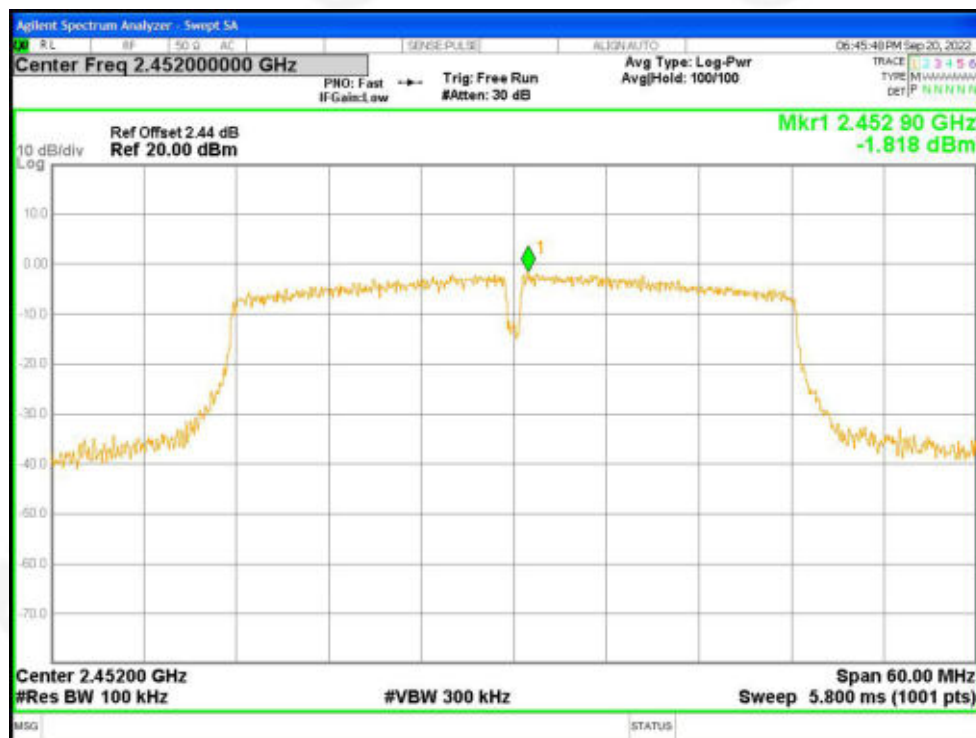


Band Edge NVNT n40 2452MHz Ant1 Ref



Band Edge NVNT n40 2452MHz Ant1 Emission

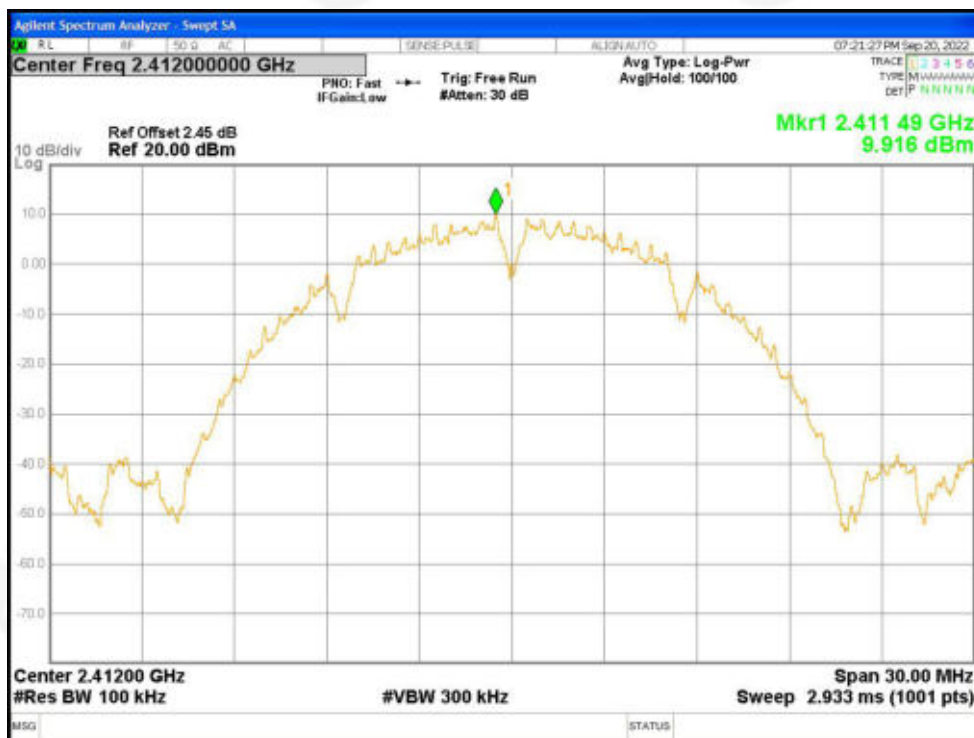


Tx. Spurious NVNT b 2412MHz Ant1 Ref

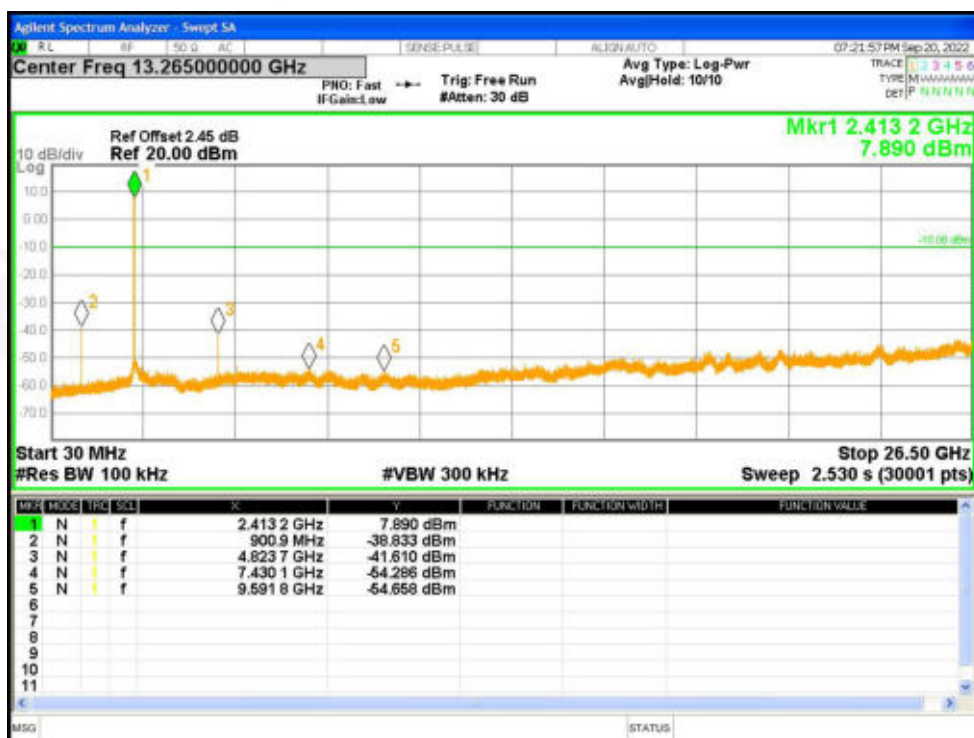


Tx. Spurious NVNT b 2412MHz Ant1 Emission




Tx. Spurious NVNT b 2437MHz Ant1 Ref

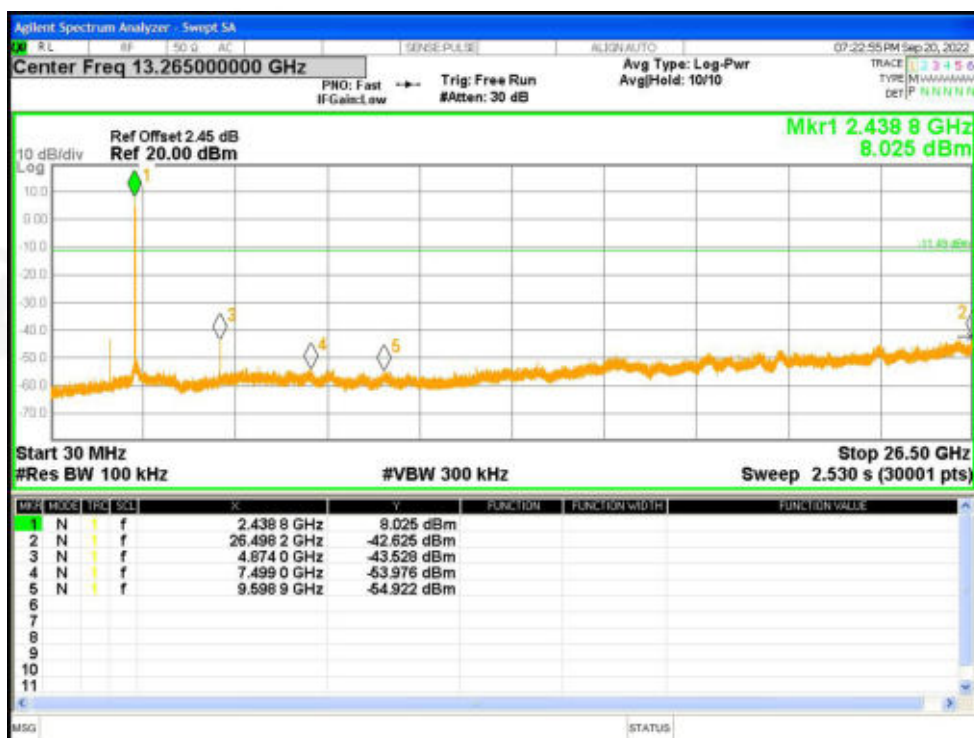


Tx. Spurious NVNT b 2437MHz Ant1 Emission

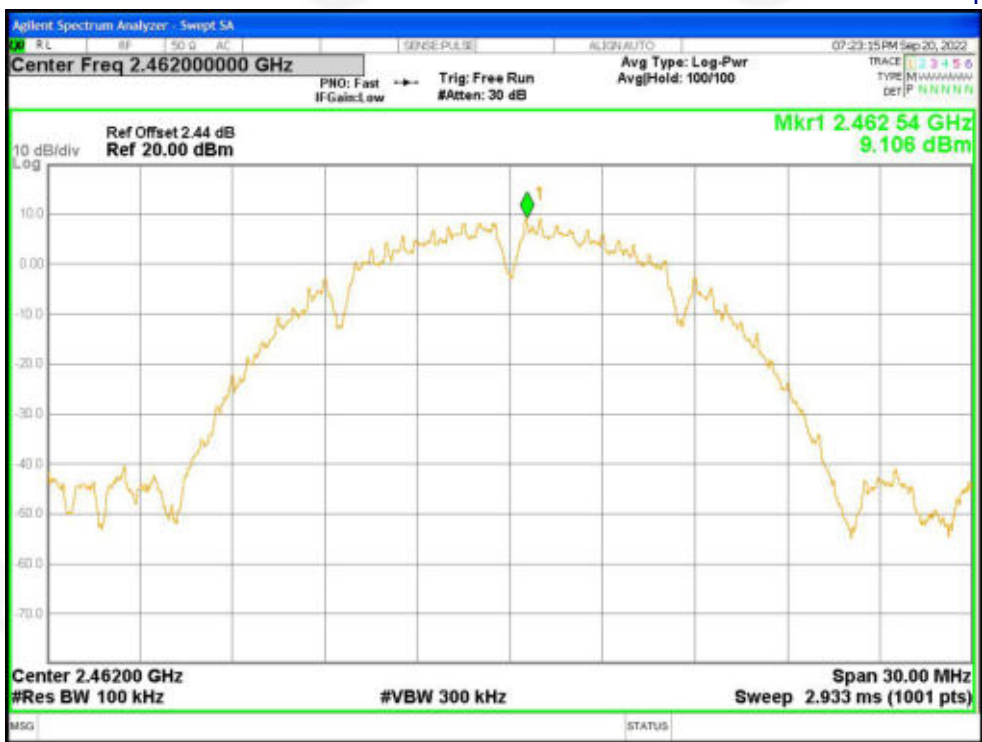


Tx. Spurious NVNT b 2462MHz Ant1 Ref

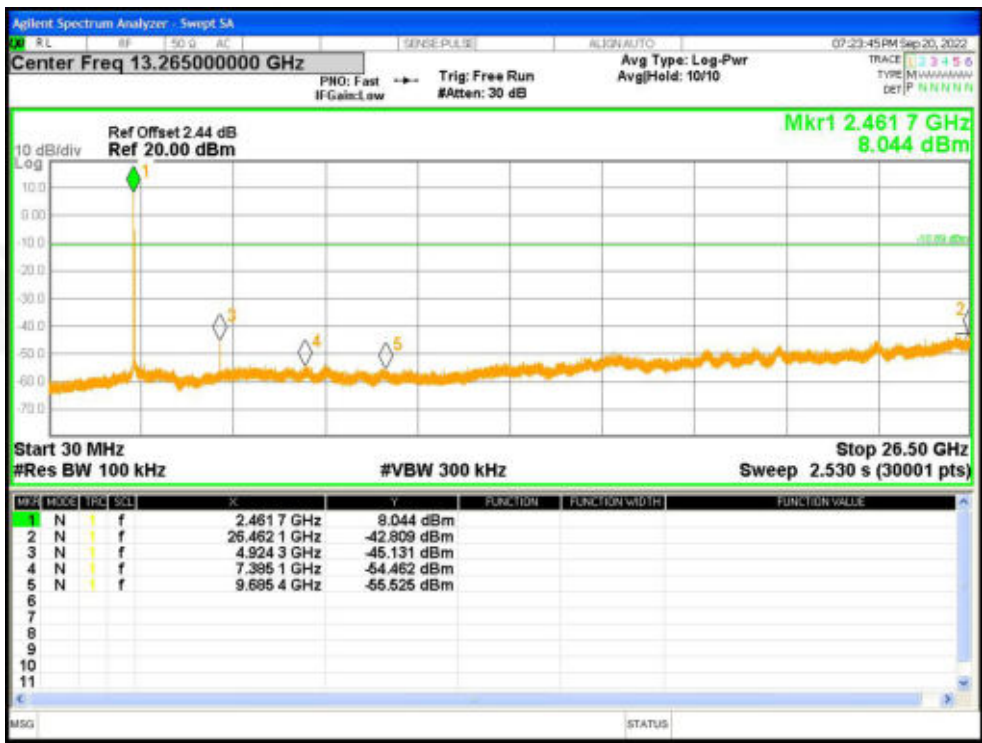


Tx. Spurious NVNT b 2462MHz Ant1 Emission

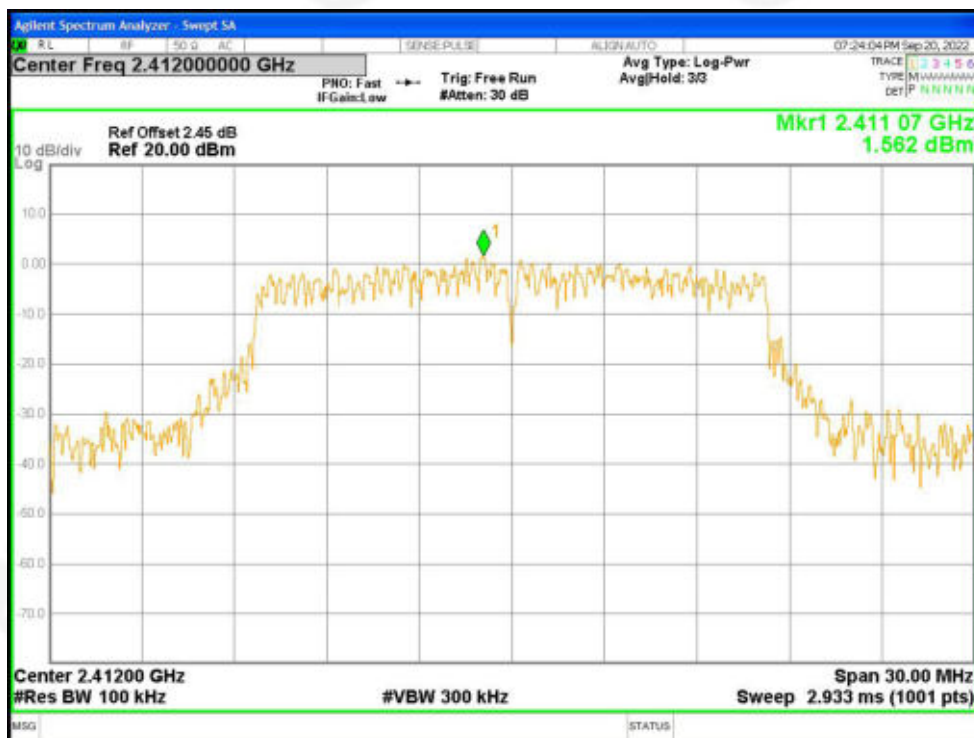


Tx. Spurious NVNT g 2412MHz Ant1 Ref

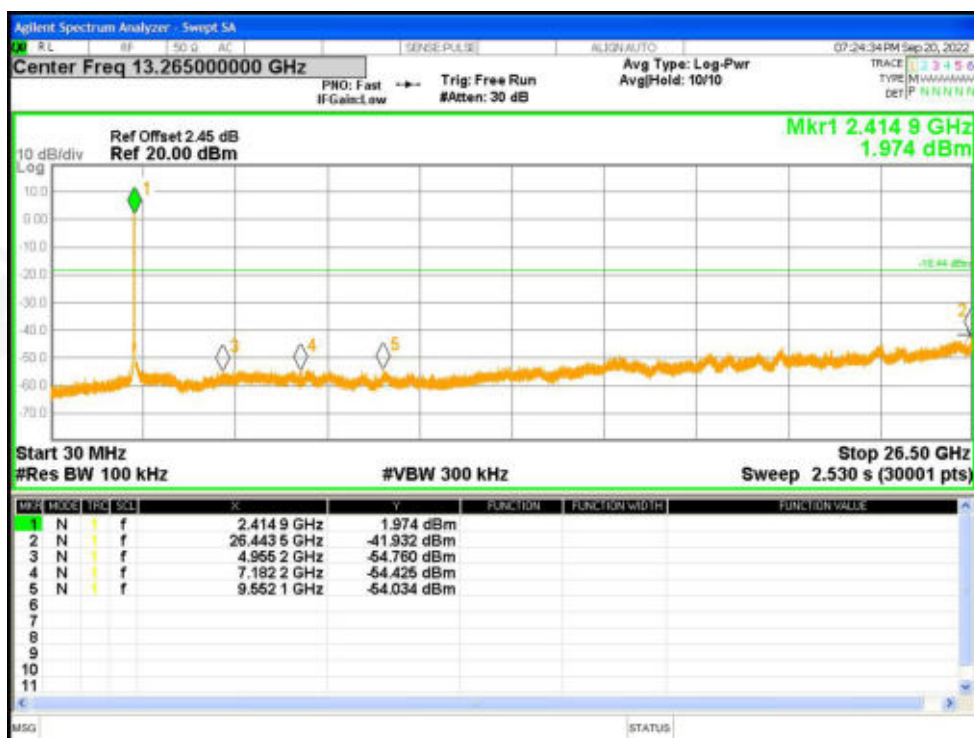


Tx. Spurious NVNT g 2412MHz Ant1 Emission

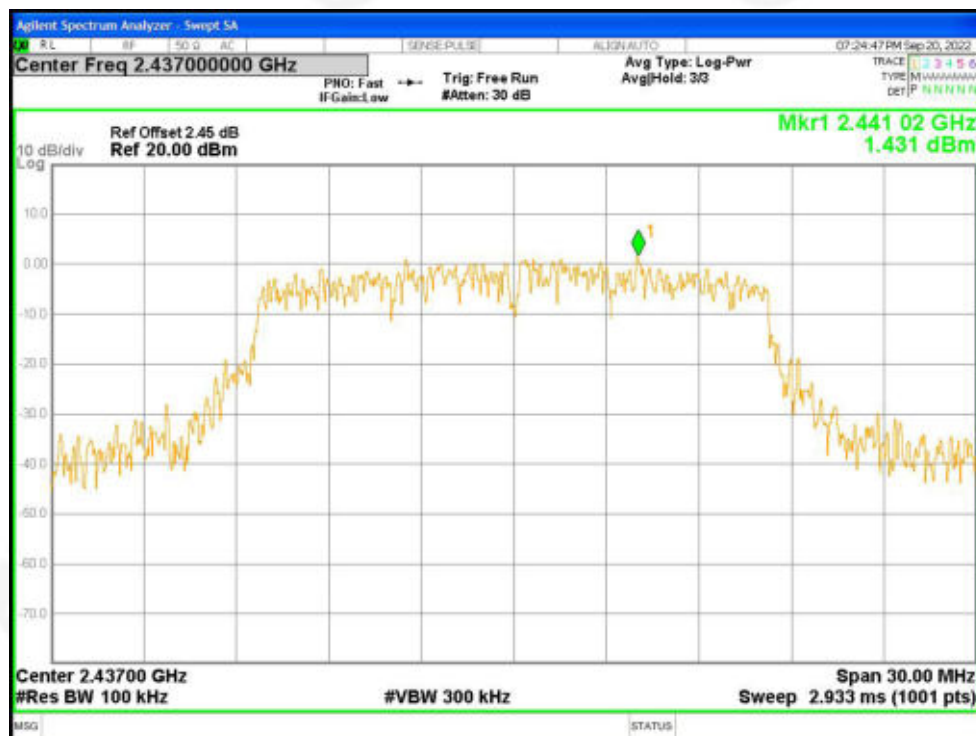


Tx. Spurious NVNT g 2437MHz Ant1 Ref

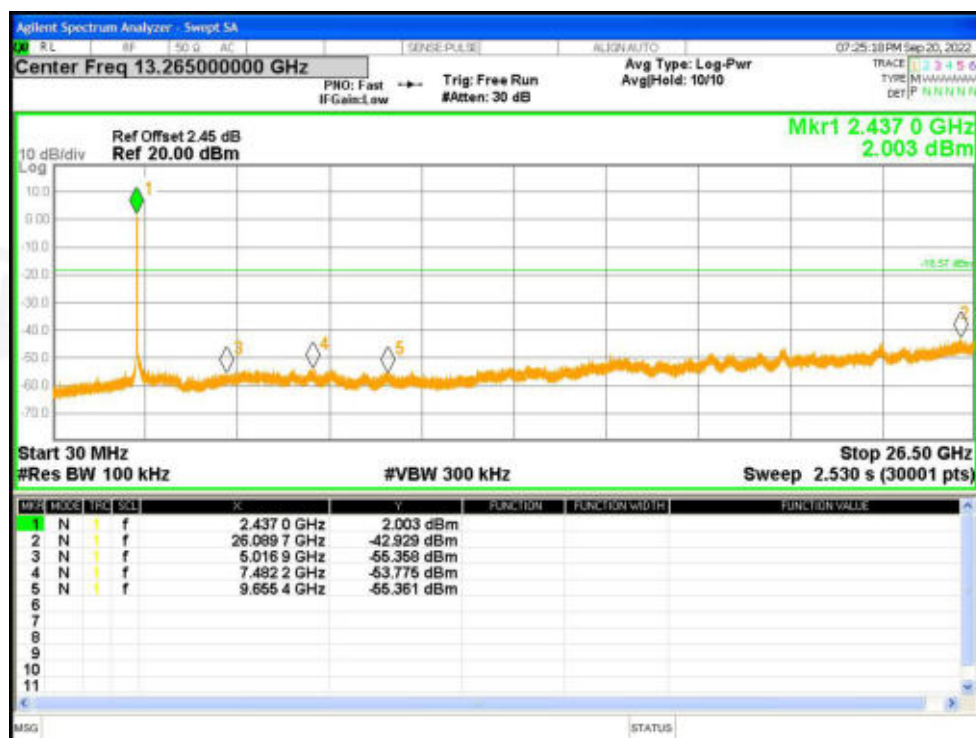


Tx. Spurious NVNT g 2437MHz Ant1 Emission

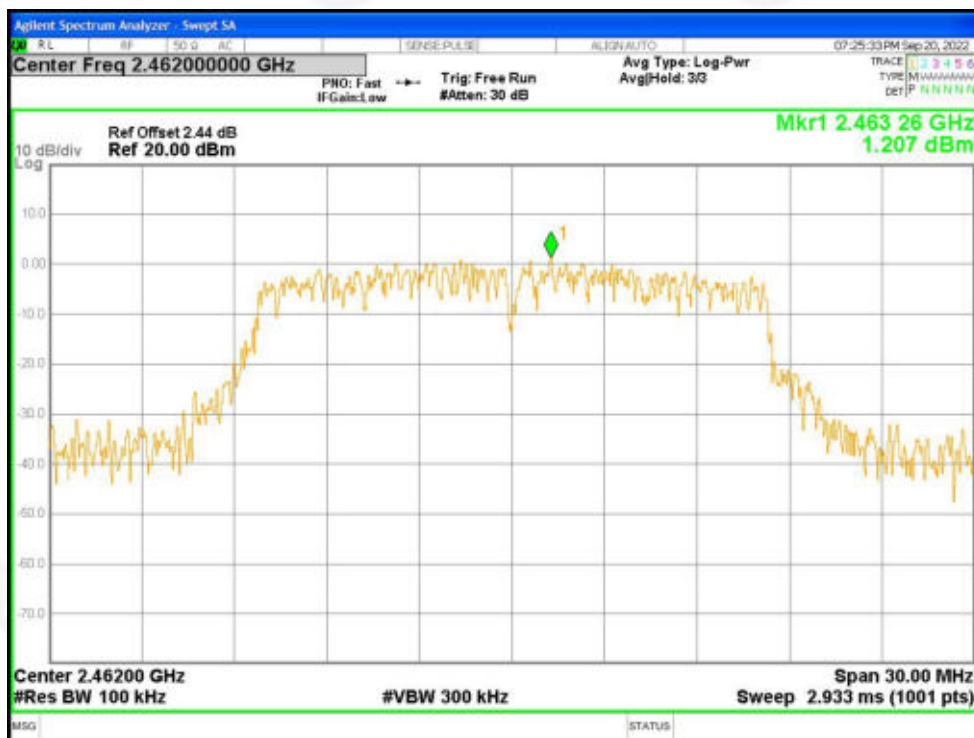


Tx. Spurious NVNT g 2462MHz Ant1 Ref

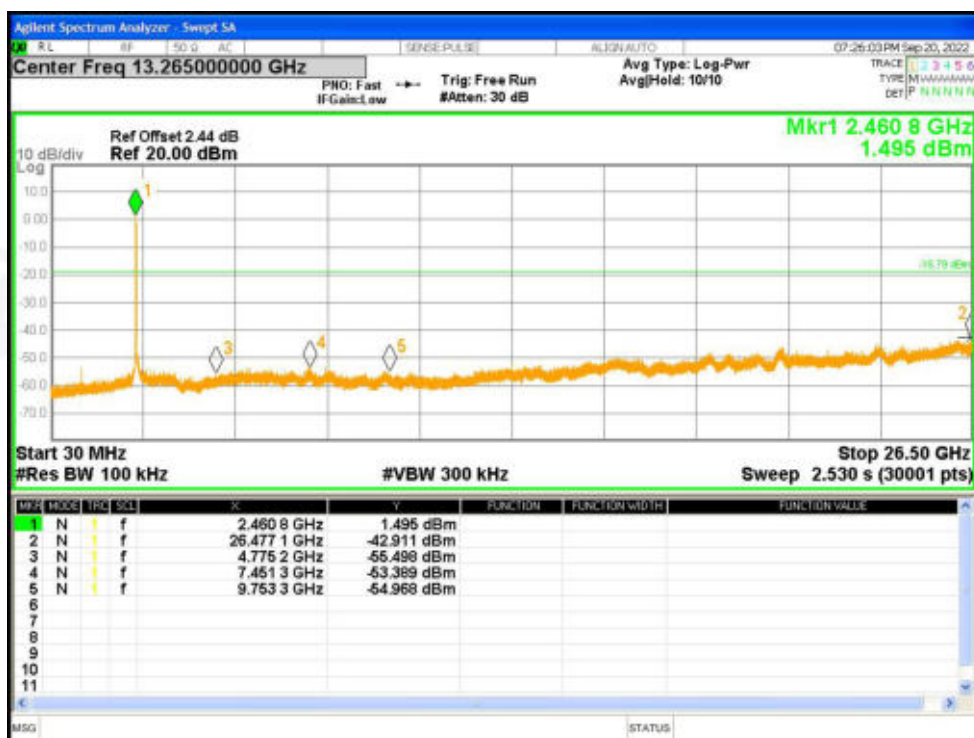


Tx. Spurious NVNT g 2462MHz Ant1 Emission

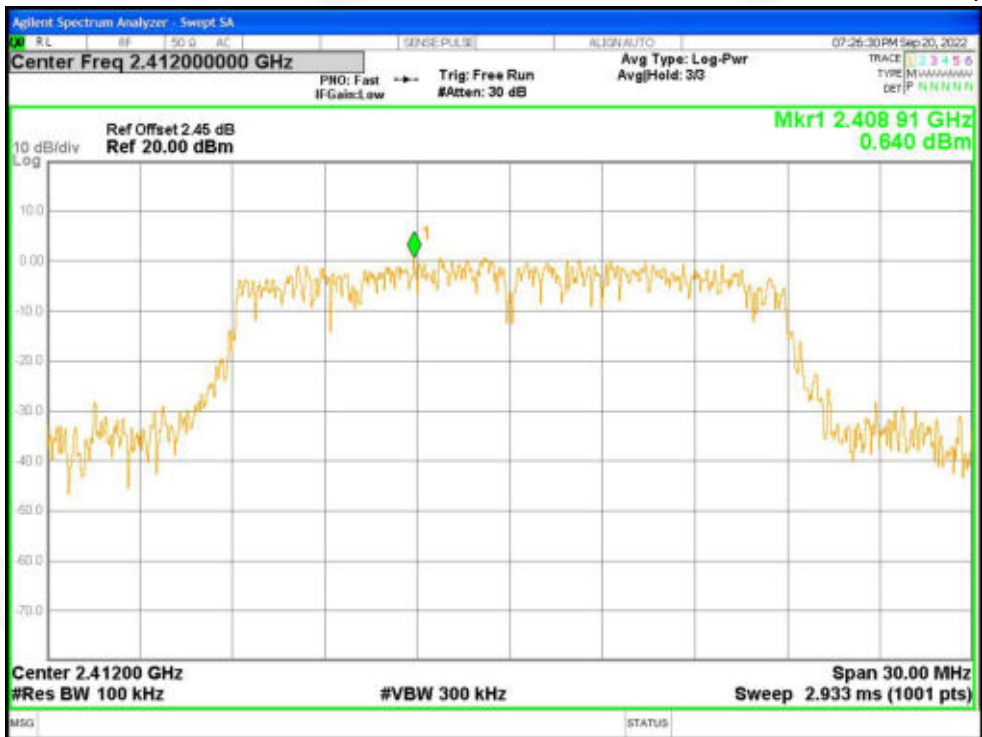


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

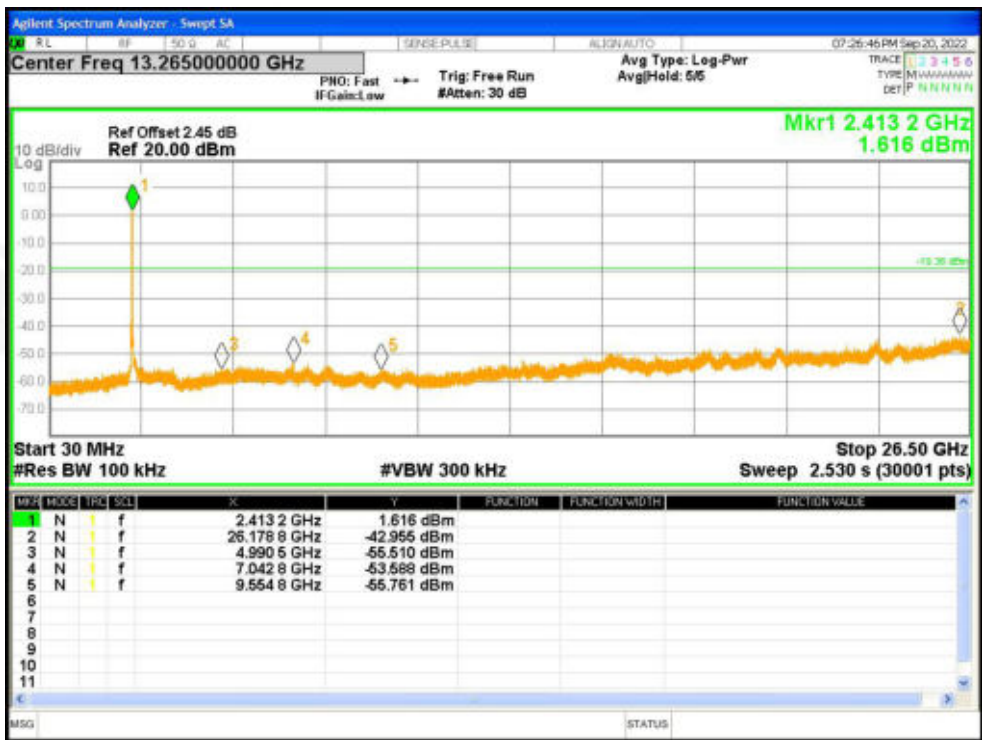


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

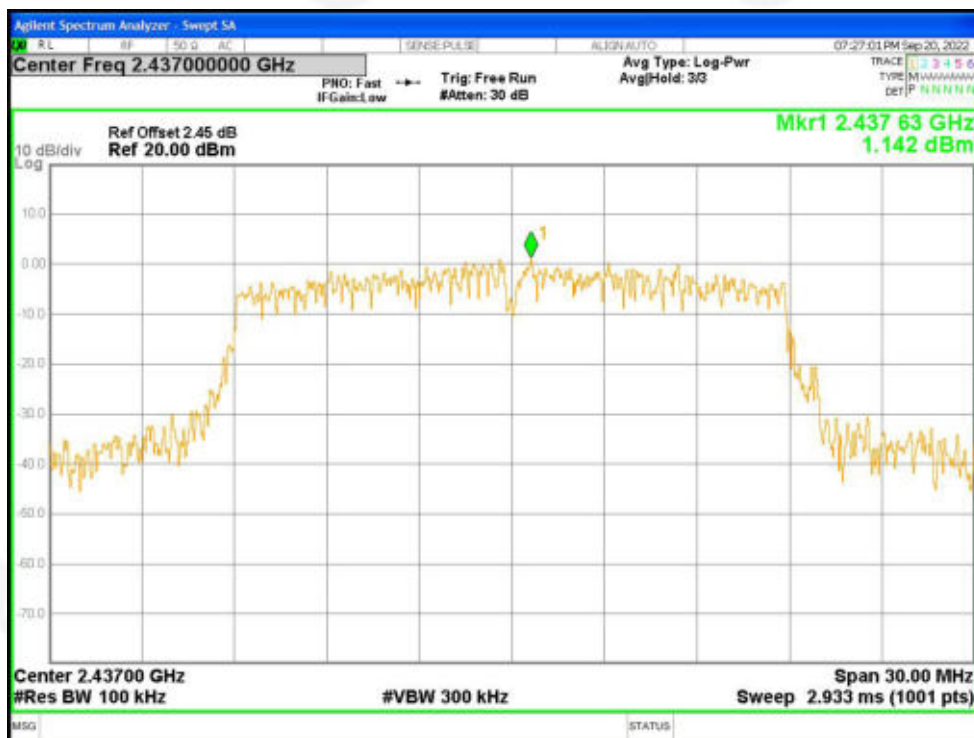


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

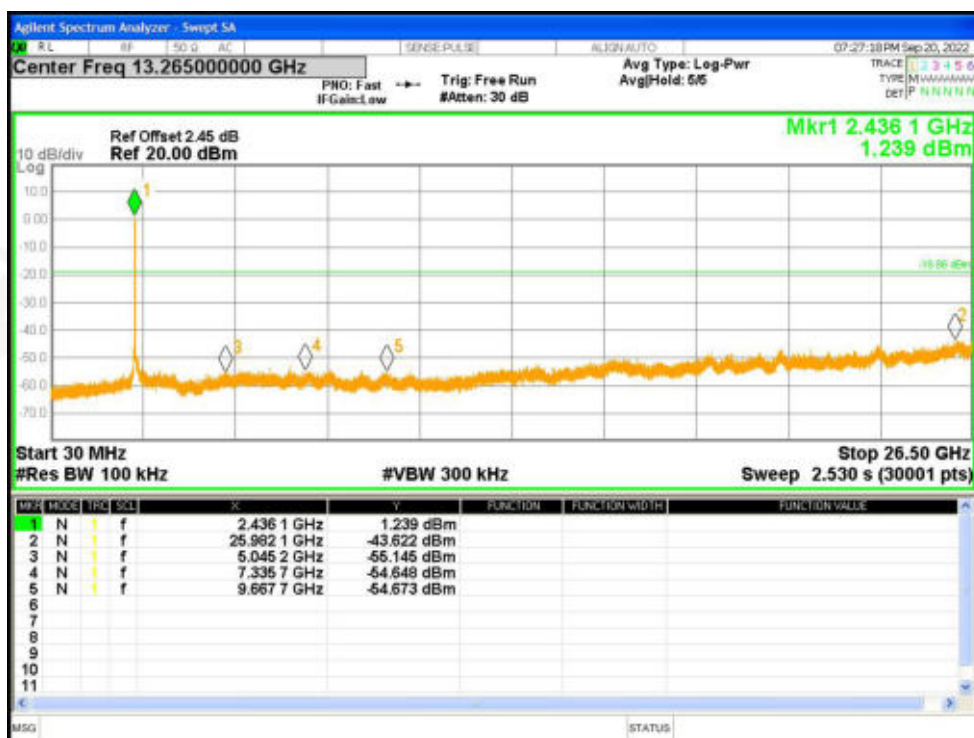


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

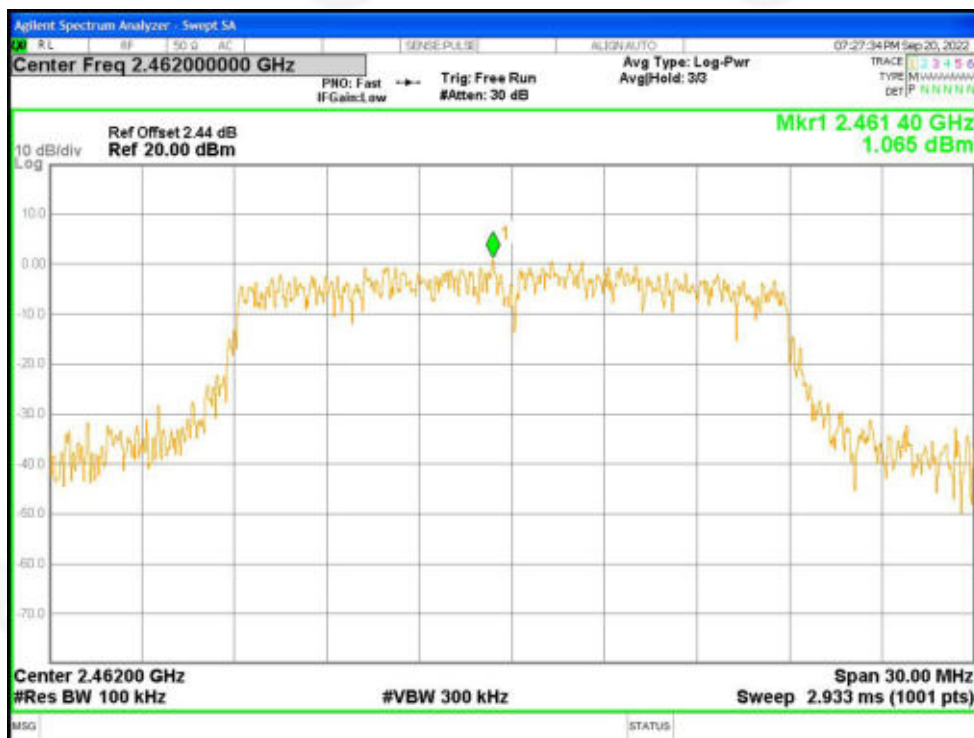


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

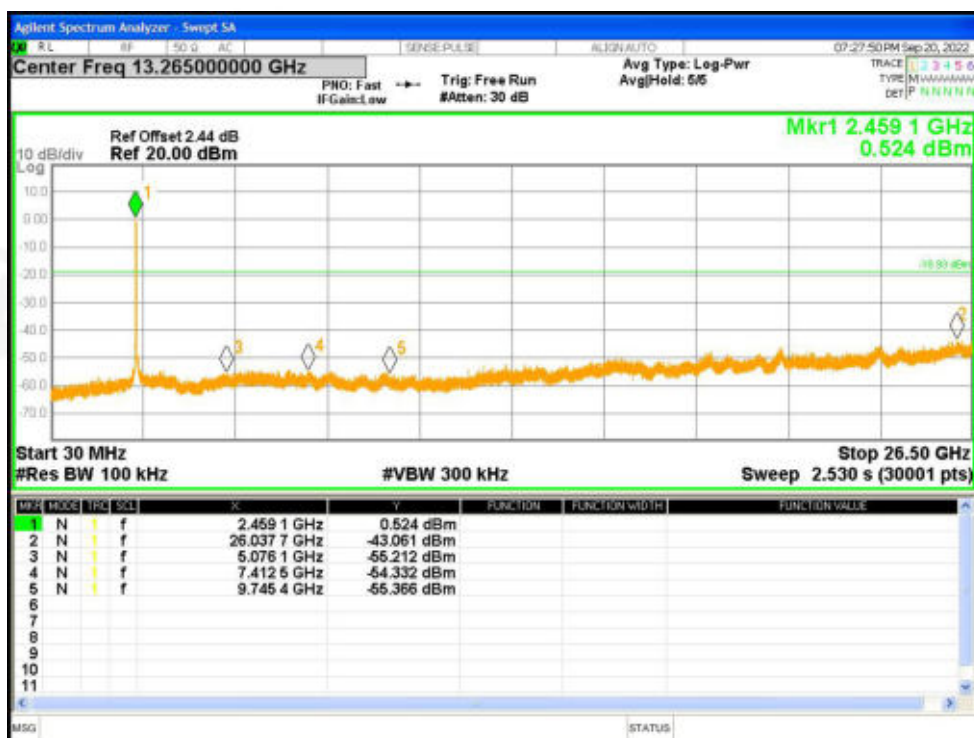


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

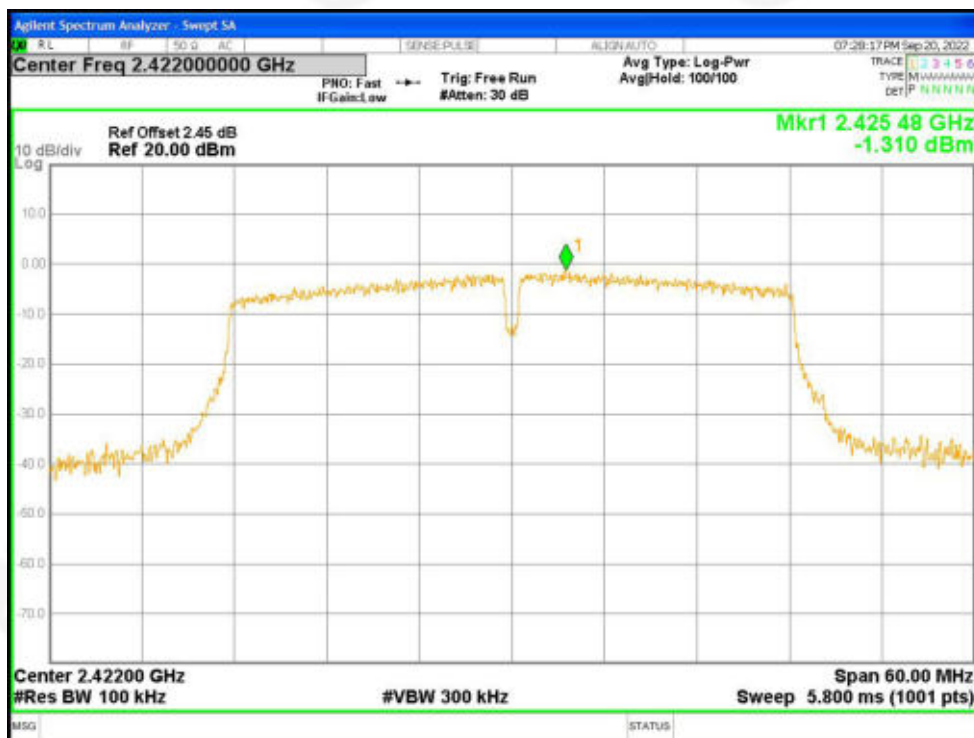


Tx. Spurious NVNT n40 2422MHz Ant1 Ref

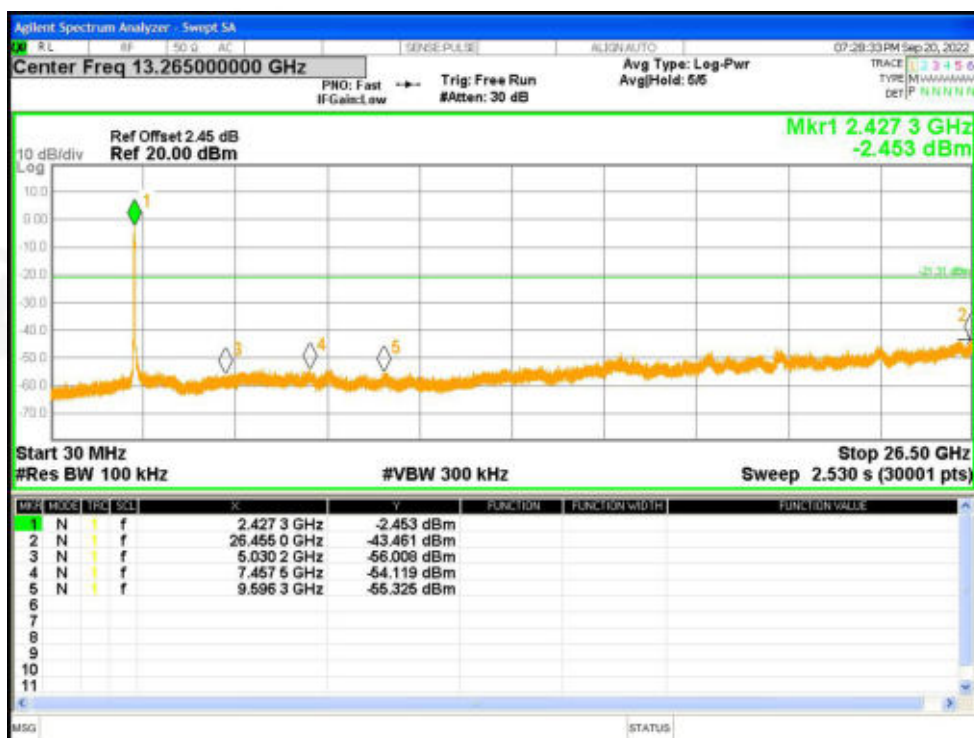


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

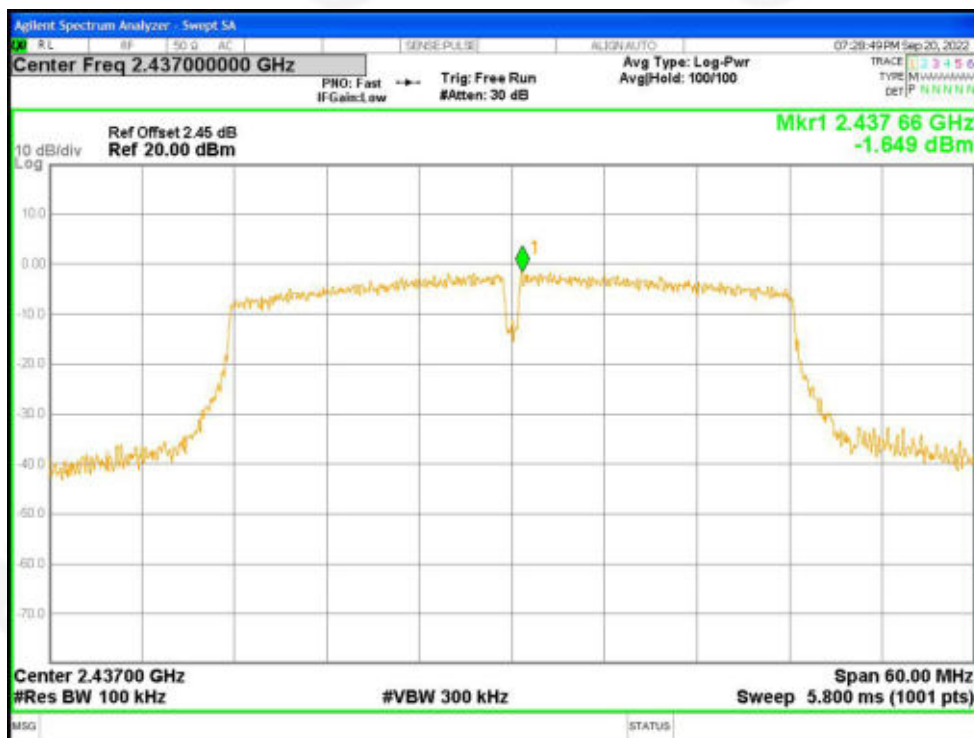


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

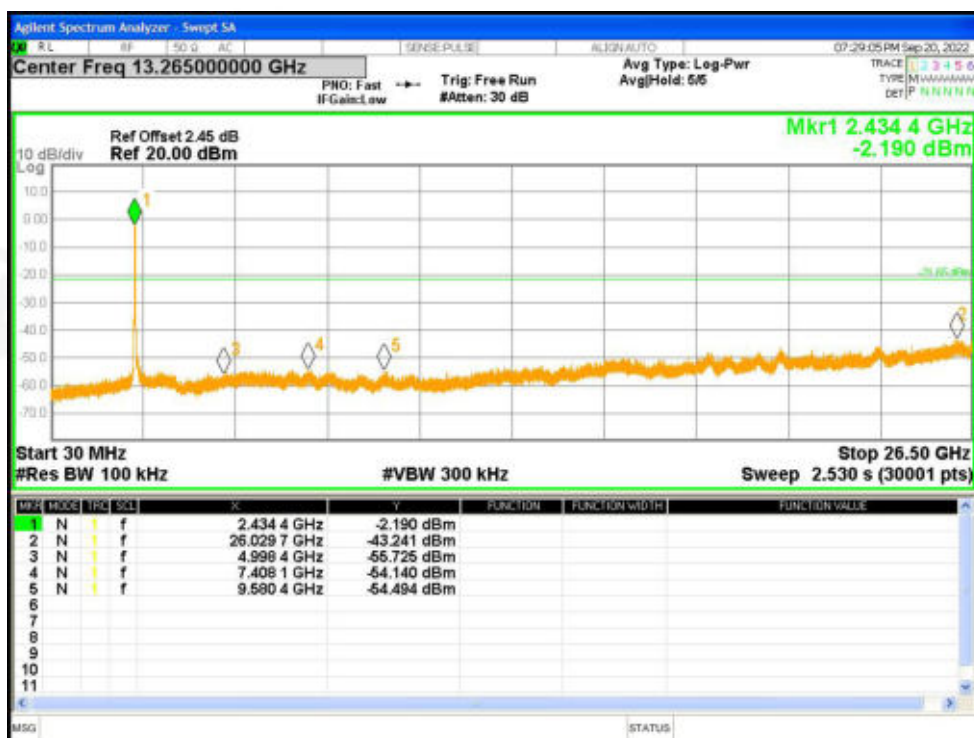

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

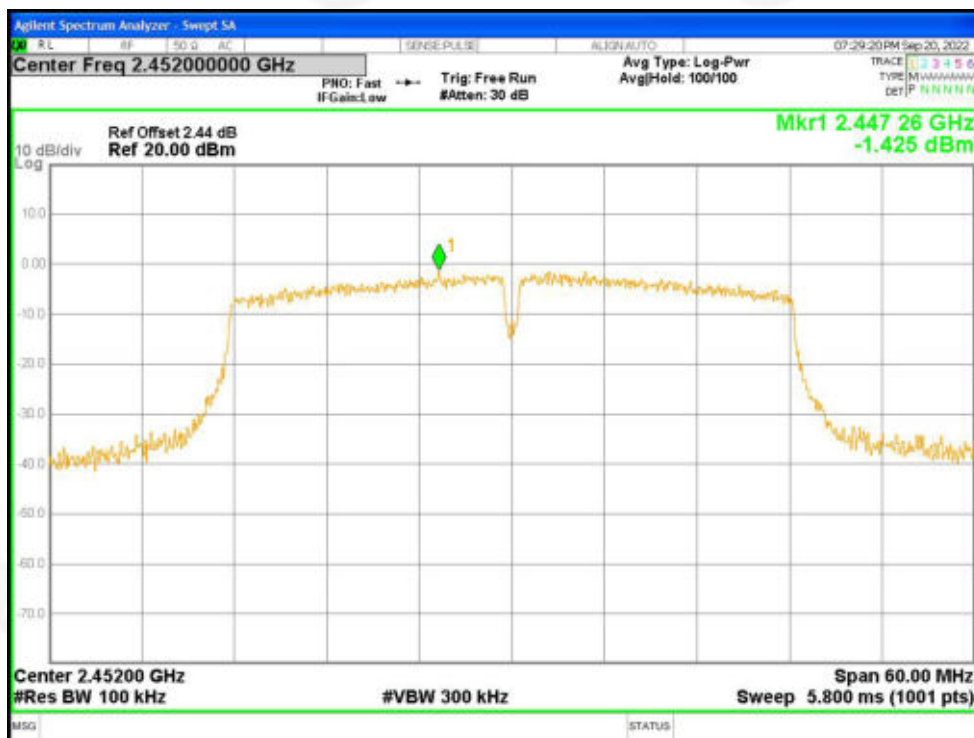


Tx. Spurious NVNT n40 2452MHz Ant1 Ref

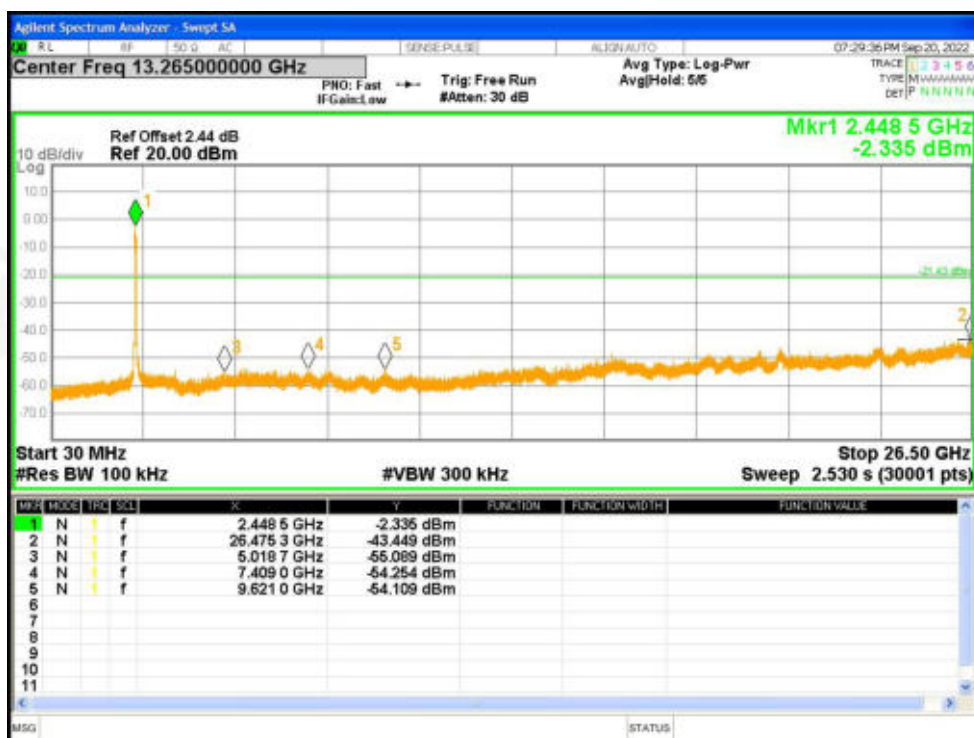


Tx. Spurious NVNT n40 2452MHz Ant1 Emission



GFSK: Band Edge, Left Side

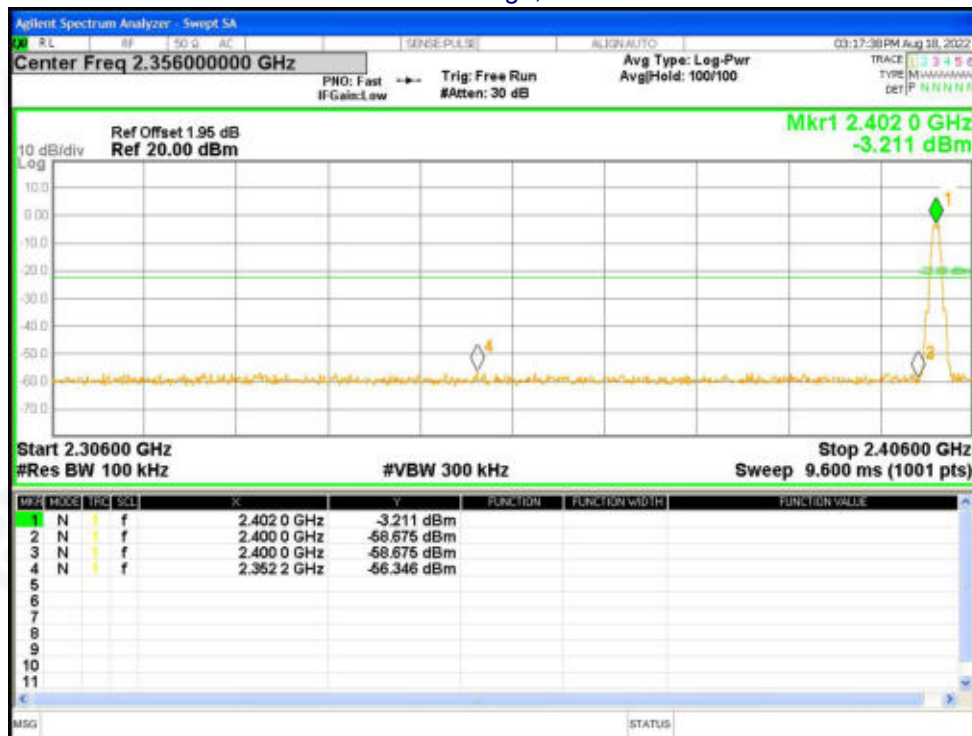

GFSK: Band Edge, Right Side

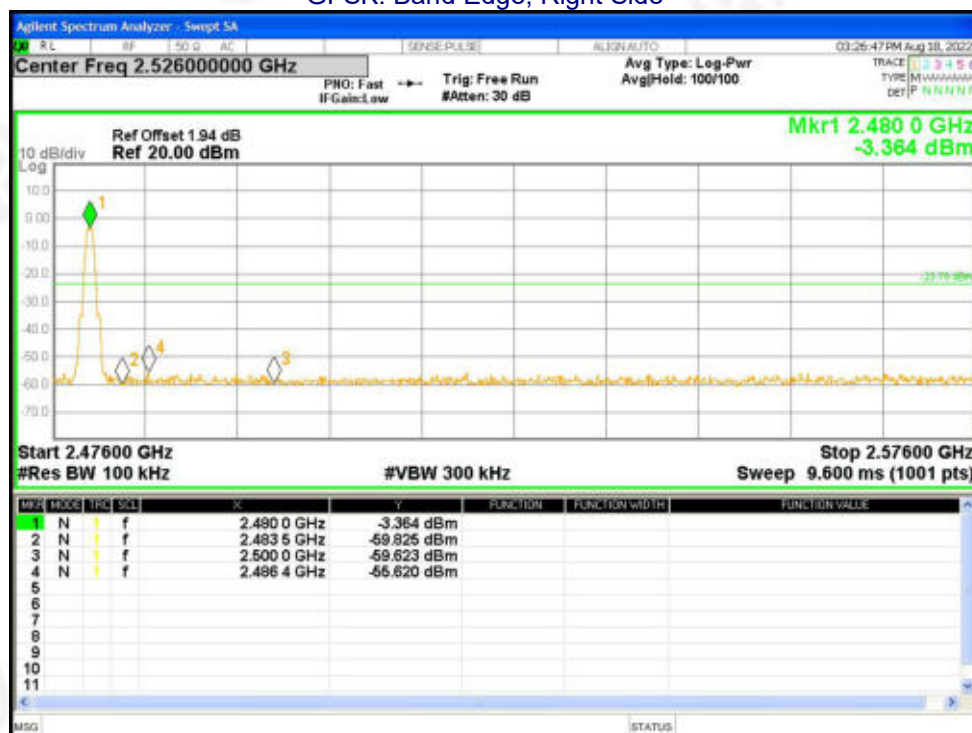



Left Screenshot: Wideband Sweep

- Center Freq: 2.402000000 GHz
- Span: 1.500 MHz
- Ref Offset: 1.96 dB
- Ref: 11.95 dBm
- Marker: Mkt 2.402 238 GHz, -2.909 dBm

Right Screenshot: Zoomed View

- Center Freq: 2.402000000 GHz
- Span: 360 kHz
- Ref Offset: 1.96 dB
- Ref: 11.95 dBm
- Marker: Mkt 2.401 7 GHz, -4.933 dBm

Peak	Freq (GHz)	Amplitude (dBm)
1	2.4017	-4.933
2	2.4018	-43.524
3	2.4019	-44.093
4	2.4019	-45.636
5	2.4020	-45.519

The left screenshot shows a Spectrum Analyzer plot with the following parameters:

- Center Freq: 2.440000000 GHz
- Ref Offset: 1.96 dB
- Ref: 11.95 dBm
- Max1: 2.440 001 GHz
- Max2: -2.853 dBm
- Span: 1.500 MHz
- Res BW: 100 kHz
- Sweep: 1.000 ms (1901 pts)

The right screenshot shows a Spectrum Analyzer plot with the following parameters:

- Center Freq: 13.285000000 GHz
- Ref Offset: 1.96 dB
- Ref: 11.95 dBm
- Max1: 2.440 0 GHz
- Max2: -2.740 dBm
- Span: 1.500 MHz
- Res BW: 100 kHz
- Sweep: 1.000 ms (1901 pts)

Line	Marker	Freq (GHz)	Level (dBm)
1	N	2.440 0 GHz	-2.740 dBm
2	N	26.483 2 GHz	-63.520 dBm
3	N	4.395 2 GHz	-65.004 dBm
4	N	7.435 1 GHz	-64.951 dBm
5	N	9.681 9 GHz	-64.952 dBm

[illegible]



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Built-in antenna, the best case gain of the antenna is 0.56dBi, reference to the appendix II for details	



11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****