

EMC TEST REPORT



Report No.: Q190508S006-FCC-E

Supersede Report No: N/A

Applicant	VIITA Watches GmbH	
Product Name	smart watch	
Model No.	TC01	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B, ANSI C63.4: 2014	
Test Date	May 14 to May 26, 2019	
Issue Date	May 28, 2019	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
Evans He	David Huang	
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS	12
ANNEX A. TEST INSTRUMENT.....	17
ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT.....	18
ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	22
ANNEX D. DECLARATION OF SIMILARITY.....	23

1. Report Revision History

Report No.	Report Version	Description	Issue Date
Q190508S006-FCC-E	NONE	Original	May 28, 2019

2. Customer information

Applicant Name	VIITA Watches GmbH
Applicant Add	Johann-Roithner-Strasse 131 4050 Traun Austria
Manufacturer	VIITA Watches GmbH
Manufacturer Add	Johann-Roithner-Strasse 131 4050 Traun Austria

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software of Radiated Emission	EZ-EMC(ver.Icp-03A1)
Test Software of Conducted Emission	EZ-EMC(ver.Icp-03A1)

4. Equipment under Test (EUT) Information

Description of EUT: smart watch

Main Model: TC01

Serial Model: N/A

Antenna Gain: 0dBi

Antenna Type: PCB Antenna

Equipment Category : JAB

Type of Modulation: GFSK

RF Operating Frequency (ies): 2402-2480 MHz

Number of Channels: 40CH

Battery:

Input Power: Model:433736
Spec: DC 3.8V,530mAh,2.014Wh

Port: Please refer to the user's manual

Trade Name : **ViTA**

FCC ID: 2ALOFTC01

Date EUT received: May 13, 2019

Test Date(s): May 14 to May 26, 2019

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±2.70dB
Radiated Emission(30MHz~1GHz)	±3.74dB
Radiated Emission(1GHz~6GHz)	±4.66dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	24 °C
Relative Humidity	57%
Atmospheric Pressure	1016mbar
Test date :	May 23, 2019
Tested By :	Evans He


Requirement(s):

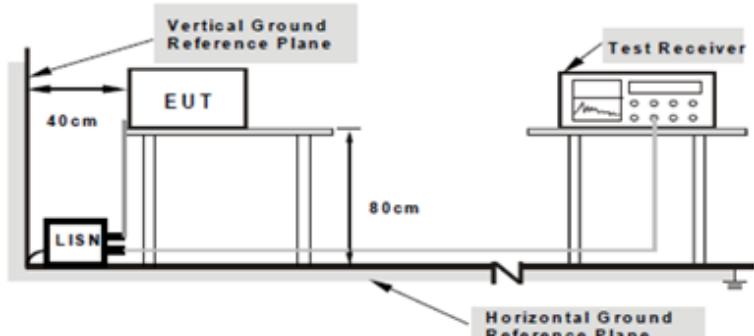Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>The diagram illustrates the test setup. A 'Vertical Ground Reference Plane' is shown as a vertical line. A 'Horizontal Ground Reference Plane' is shown as a horizontal line. An 'EUT' (Equipment Under Test) is placed on a table. A 'LISN' (Line Impedance Stabilization Network) is connected between the EUT and the power source. A 'Test Receiver' is connected to the LISN. The distance between the LISN and the EUT is 40 cm. The distance between the LISN and the test receiver is 80 cm. The LISN is also connected to the horizontal ground reference plane.</p> <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains. 																

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail <input type="checkbox"/> N/A

Test Data Yes N/A


Test Plot Yes (See below) N/A

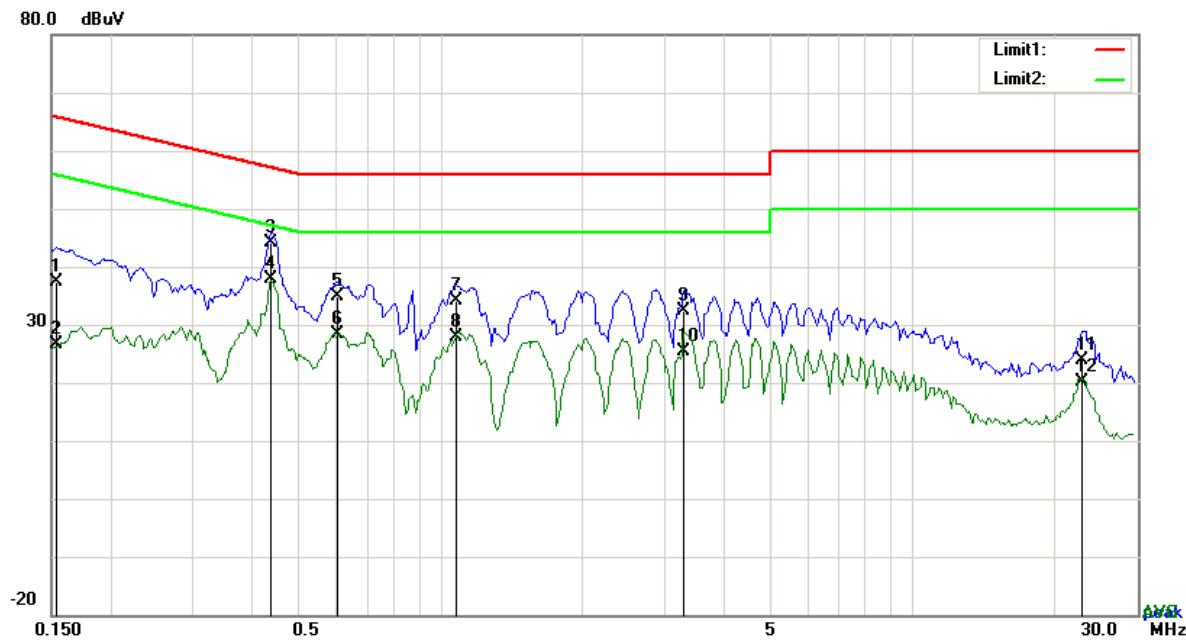

Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1539	27.24	QP	10.03	37.27	65.79	-28.52
2	L1	0.1539	16.62	AVG	10.03	26.65	55.79	-29.14
3	L1	0.4386	34.04	QP	10.03	44.07	57.09	-13.02
4	L1	0.4386	27.84	AVG	10.03	37.87	47.09	-9.22
5	L1	0.6063	24.88	QP	10.03	34.91	56.00	-21.09
6	L1	0.6063	18.34	AVG	10.03	28.37	46.00	-17.63
7	L1	1.0782	24.00	QP	10.03	34.03	56.00	-21.97
8	L1	1.0782	17.73	AVG	10.03	27.76	46.00	-18.24
9	L1	3.2847	22.33	QP	10.06	32.39	56.00	-23.61
10	L1	3.2847	15.37	AVG	10.06	25.43	46.00	-20.57
11	L1	22.8588	13.60	QP	10.35	23.95	60.00	-36.05
12	L1	22.8588	9.80	AVG	10.35	20.15	50.00	-29.85

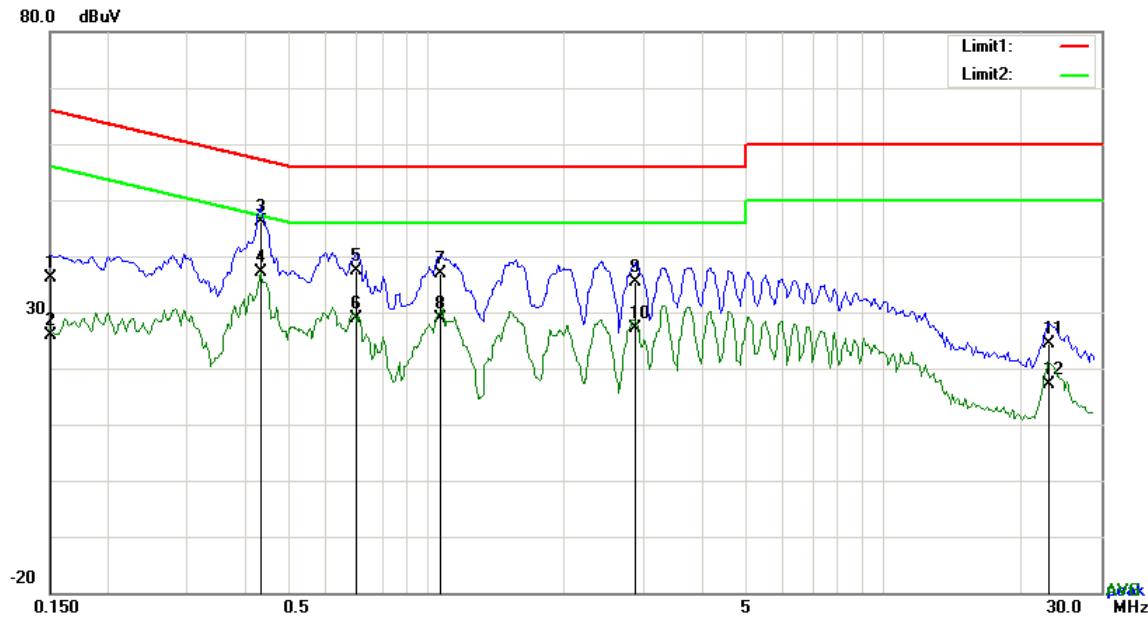

Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1500	26.13	QP	10.02	36.15	66.00	-29.85
2	N	0.1500	15.92	AVG	10.02	25.94	56.00	-30.06
3	N	0.4347	36.02	QP	10.02	46.04	57.16	-11.12
4	N	0.4347	27.05	AVG	10.02	37.07	47.16	-10.09
5	N	0.7038	27.38	QP	10.02	37.40	56.00	-18.60
6	N	0.7038	18.90	AVG	10.02	28.92	46.00	-17.08
7	N	1.0743	26.74	QP	10.03	36.77	56.00	-19.23
8	N	1.0743	18.73	AVG	10.03	28.76	46.00	-17.24
9	N	2.8800	25.39	QP	10.05	35.44	56.00	-20.56
10	N	2.8800	17.16	AVG	10.05	27.21	46.00	-18.79
11	N	23.1201	13.99	QP	10.31	24.30	60.00	-35.70
12	N	23.1201	6.85	AVG	10.31	17.16	50.00	-32.84

6.2 Radiated Emissions

Temperature	24 °C
Relative Humidity	57%
Atmospheric Pressure	1016mbar
Test date :	May 23, 2019
Tested By :	Evans He

Requirement(s):

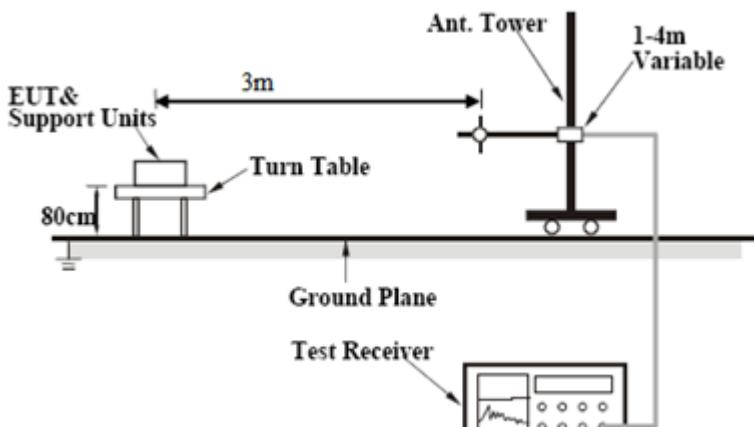Spec	Item	Requirement	Applicable										
47CFR§15.109(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (µV/m)												
30 – 88	100												
88 – 216	150												
216 - 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is mounted on the turn table. A vertical 'Ant. Tower' is connected to the turn table. The distance between the EUT and the Ant. Tower is 3m. The height of the EUT is 80cm. The height of the Ant. Tower is adjustable, indicated as '1-4m Variable'. A 'Test Receiver' is connected to the Ant. Tower.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level) 											


	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) <input type="checkbox"/> 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : Normal Working Mode

Below 1GHz

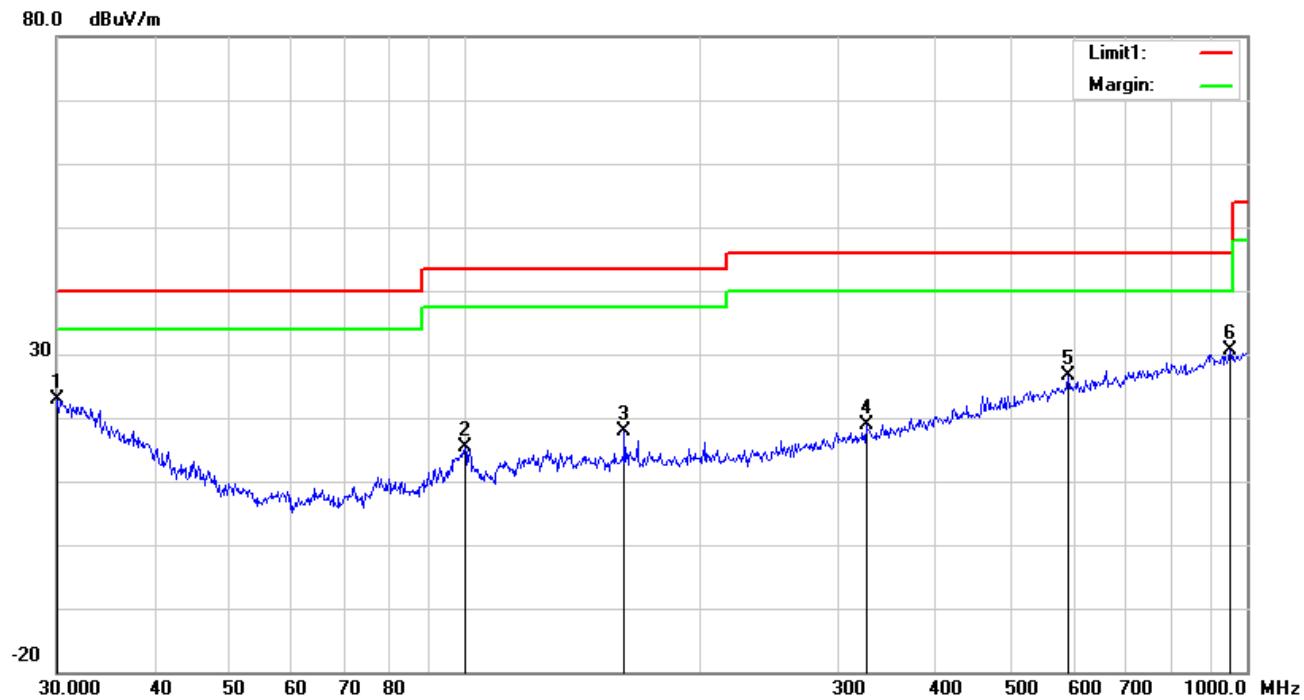


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	30.0000	24.84	20.10	22.28	0.13	22.79	40.00	-17.21	100	83
2	H	99.8777	28.12	8.69	22.32	0.82	15.31	43.50	-28.19	100	64
3	H	159.7844	27.92	11.02	22.27	1.32	17.99	43.50	-25.51	100	291
4	H	325.5958	25.01	14.21	22.22	1.79	18.79	46.00	-27.21	100	83
5	H	590.9737	25.74	20.23	21.60	2.30	26.67	46.00	-19.33	100	269
6	H	952.0937	25.02	23.70	20.78	2.70	30.64	46.00	-15.36	100	215

Below 1GHz

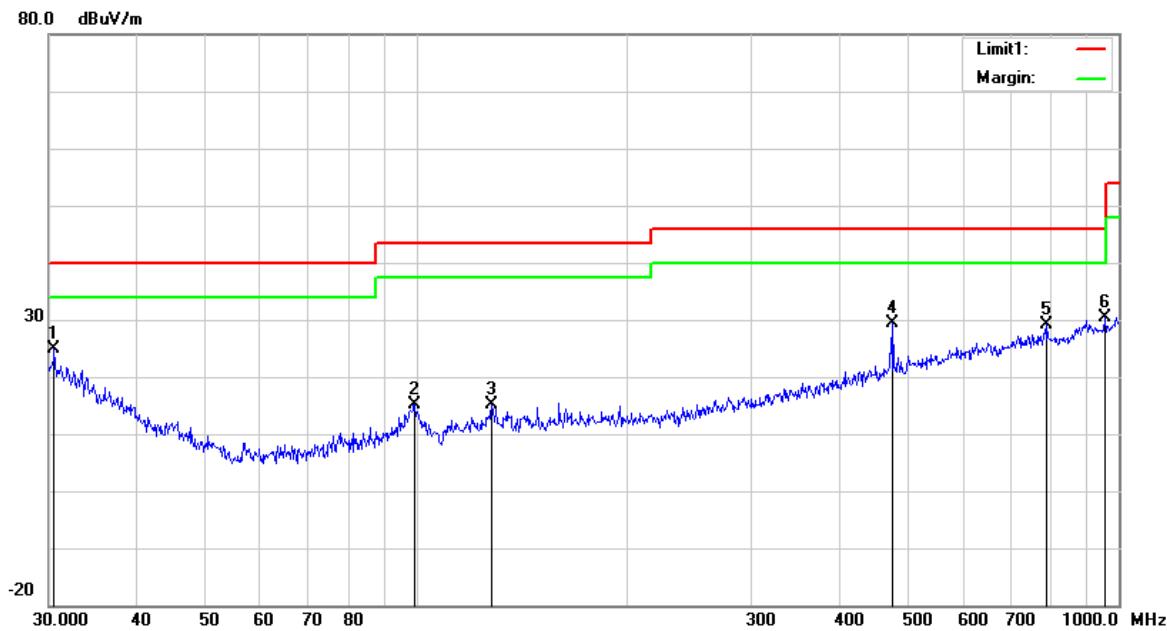

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	30.5306	27.17	19.76	22.28	0.13	24.78	40.00	-15.22	100	343
2	V	99.5281	28.03	8.65	22.32	0.82	15.18	43.50	-28.32	100	211
3	V	128.1130	24.82	11.60	22.38	1.06	15.10	43.50	-28.40	100	75
4	V	477.1694	30.73	18.43	21.86	2.08	29.38	46.00	-16.62	100	238
5	V	790.6188	25.53	22.11	21.17	2.54	29.01	46.00	-16.99	100	132
6	V	955.4381	24.69	23.70	20.77	2.71	30.33	46.00	-15.67	100	27

Above 1GHz

Frequency (MHz)	Read_level (dB μ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/AV)
1124.3	68.21	62	100	V	-19.38	48.83	74	-25.17	PK
1225.46	62.28	218	100	V	-15.96	46.32	74	-27.68	PK
1655.43	62.04	195	100	V	-14.18	47.86	74	-26.14	PK
1692.4	63.36	235	100	H	-18.52	44.84	74	-29.16	PK
1997.3	61.91	168	100	H	-13.68	48.23	74	-25.77	PK
2113.4	63.21	305	100	H	-16.75	46.46	74	-27.54	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5*2480MHz=12,400MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due
AC Line Conducted Emissions				
EMI test receiver	ESCS30	8471241027	01/04/2019	01/03/2020
Artificial Mains Network	8127	8127713	01/04/2019	01/03/2020
ISN	ISN T800	34373	01/04/2019	01/03/2020
Radiated Emissions				
EMI test receiver	ESL6	1300.5001K06-100262-eQ	01/04/2019	01/03/2020
Active Antenna	AL-130	121031	02/07/2019	02/06/2020
3m Semi-anechoic Chamber	9m*6m*6m	N/A	10/18/2018	10/17/2019
Signal Amplifier	8447E	443008	01/24/2019	01/23/2020
MXA signal analyzer	N9020A	MY49100060	01/04/2019	01/03/2020
Horn Antenna	HAH-118	71259	01/25/2019	01/24/2020
Horn Antenna	HAH-118	71283	02/01/2019	01/31/2020
AMPLIFIER	EM01G26G	60613	01/24/2019	01/23/2020
AMPLIFIER	Emc012645	980077	01/04/2019	01/03/2020
Bilog Antenna (30MHz~6GHz)	JB6	A110712	02/07/2019	02/06/2020


Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

Annex B.i. TEST SET UP BLOCK


Block Configuration Diagram for Conducted Emissions

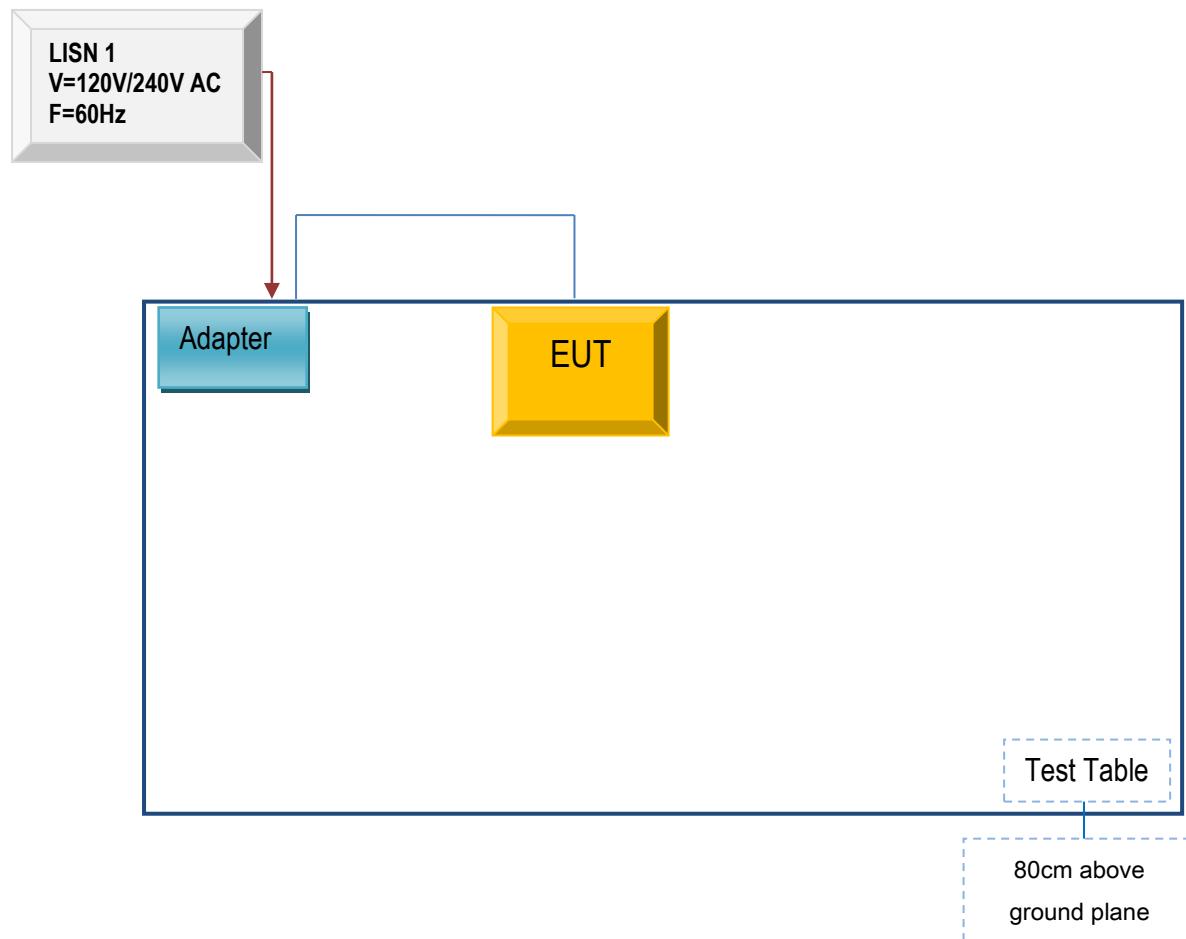

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

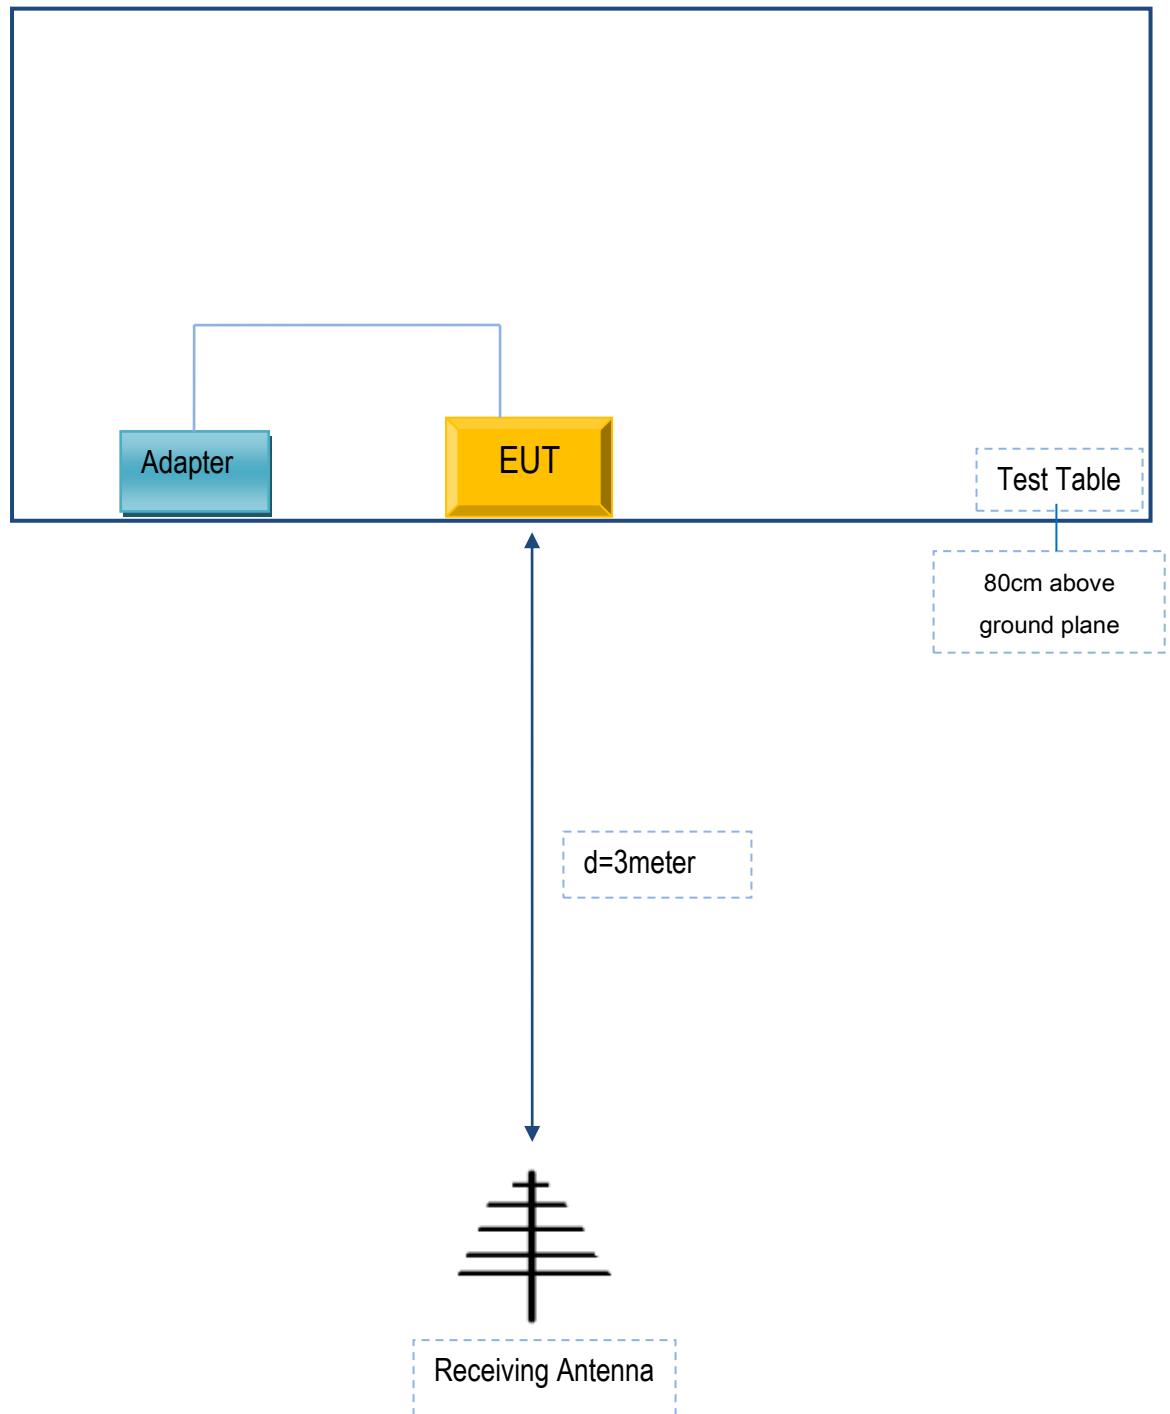

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

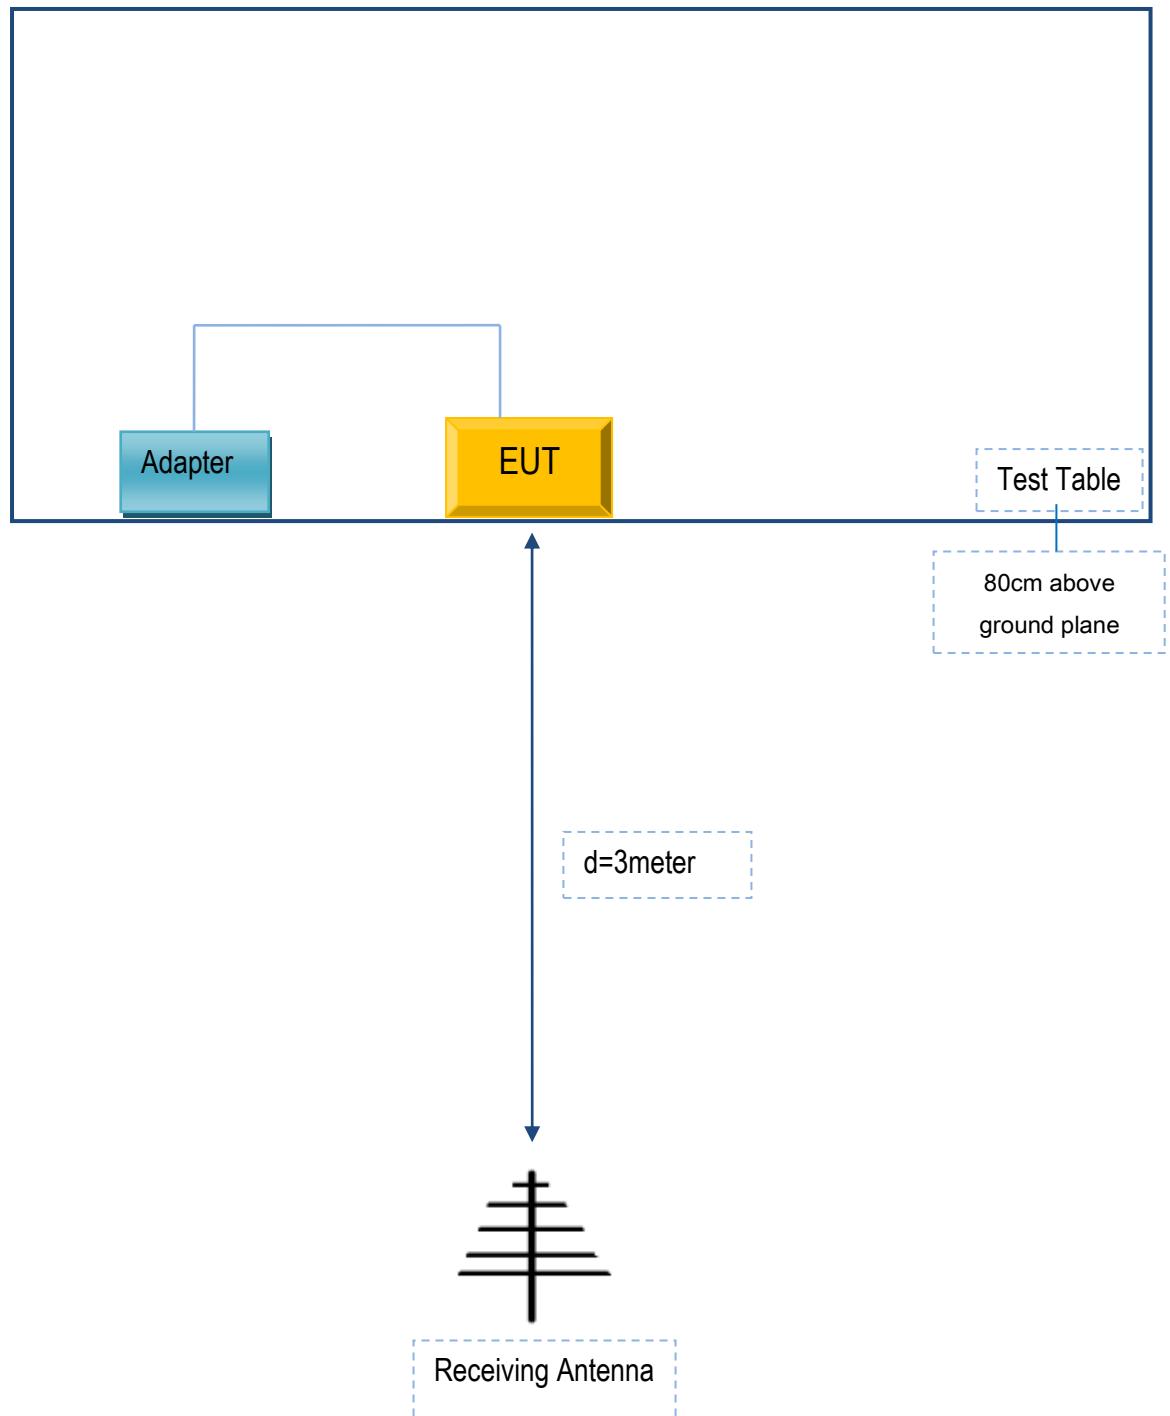

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
-	-	-	-

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
-	-	-	-	-

Annex C. User Manual / Block Diagram / Schematics / Partlist

N/A

Annex D. DECLARATION OF SIMILARITY

N/A