

TEST REPORT



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (1) / (55) Pages

1. Applicant

- Name : YUJIN ROBOT CO., LTD
- Address : 33, Harmony-ro 187beon-gil, Yeonsu-gu, Incheon, Republic of Korea
- Date of Receipt : 2022-05-19

2. Manufacturer

- Name : Toplinkst Technology CO.,LTD
- Address : 7th Floor, Building 4, Haoshida Industrial Park, Wuhe Road, Bantian Street, Longgang Dist., Shenzhen, Guangdong, China

3. Factory

- Name : Toplinkst Technology CO.,LTD
- Address : 7th Floor, Building 4, Haoshida Industrial Park, Wuhe Road, Bantian Street, Longgang Dist., Shenzhen, Guangdong, China

4. Use of Report : For FCC Certification

5. Test Sample / Model : USB WiFi Dongle / TOP-4512AC

6. Date of Test : 2022-06-20 to 2022-07-08

7. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247,
ANSI C63.10-2013, RSS-Gen, RSS-247

8. Testing Environment : Temp.: (23 ± 3) °C, Humidity: (48 ± 5) % R.H.

9. Test Results : Compliance

10. Location of Test : Permanent Testing Lab On Site Testing

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by Bong-seok Kim: (Signature) 	Technical Manager Young-taek Lee: (Signature) 
----------	---	--

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2022-07-15

CTK Co., Ltd.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (2) / (55)Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2022-07-15	Issued (CTK-2022-01927)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (3) / (55)Pages

CONTENTS

1. General Product Description	4
1.1 Applicant Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2.0 Facility and Accreditations	5
2.1 Test Facility	5
2.2 Laboratory Accreditations and Listings.....	5
2.3 Calibration Details of Equipment Used for Measurement.....	5
3.0 Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	7
3.3 Maximum Measurement Uncertainty	7
4.0 Technical Characteristic Test.....	8
4.1 6dB Bandwidth & 99% Bandwidth.....	8
4.2 Maximum peak Conducted Output Power	14
4.3 Power Spectral Density	17
4.4 Band Edge & Conducted Spurious emission	20
4.5 Radiated Emissions.....	27
4.6 AC Power Line Conducted Emissions.....	52
APPENDIX A – Test Equipment Used For Tests	55

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (4) / (55)Pages

1. General Product Description

1.1 Applicant Information

Company	YUJIN ROBOT CO., LTD
Contact Point	33, Harmony-ro 187beon-gil, Yeonsu-gu, Incheon, Republic of Korea
Contact Person	Name : TaeWan Kim E-mail : twkim@yujinrobot.com Tel : +82-32-550-2367

1.2 Product Information

FCC ID	2AME4-TOP-4512AC
Product Description	USB WiFi Dongle
Model name	TOP-4512AC
Variant Model name	-
Operating Frequency	2 412 MHz - 2 462 MHz (Bandwidth 20 MHz) 2 422 MHz - 2 452 MHz (Bandwidth 40 MHz)
RF Output Power	802.11b : 14.92 dBm (31.046 mW) 802.11g : 16.87 dBm (48.641 mW) 802.11n-HT20 : 18.10 dBm (64.565 mW) 802.11n-HT40 : 17.58 dBm (57.280 mW)
Antenna Specification	Antenna type : Chip Antenna Peak Gain : 1.0 dBi
Number of channels	Bandwidth 20 MHz (11), Bandwidth 40 MHz (9)
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Power Source	DC 5.0V
Data Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: MCS0-7, up to 72.2 Mbps
RF Power setting in Test SW	Initial value

1.3 Peripheral Devices

-For Conducted Measurement and Radiated Measurement

Device	Manufacturer	Model No.	Serial No.
Notebook	HP Inc.	Elitebook 8470p	-
AC Adapter	HP Inc.	PA-1650-02HC	PPP009L



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (5) / (55)Pages

2.0 Facility and Accreditations

2.1 Test Facility

The measurement facility is located at Unhak2 Test Site, 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (6) / (55)Pages

3.0 Test Specifications

3.1 Standards

Section in FCC	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(e)	Transmitter power spectral density	C	
15.247(b)	Maximum peak conducted output power	C	
15.247(d)	Unwanted emission	C	
-	99 % Bandwidth	C	
15.209	Transmitter emission	C	Radiated
15.207(a)	AC Conducted Emission	C	Line Conducted

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013

Note 4: The tests were performed according to the method of measurements prescribed in KDB No.558074.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (7) / (55)Pages

3.2 Mode of operation during the test

The UUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. The results are only attached worst cases.

Test mode & Worst case

Mode	Worst case(Data rate)
802.11b	11 Mbps
802.11g	6 Mbps
802.11n-HT20	MCS 0
802.11n-HT40	MCS 0

Test Frequency & Bandwidth

Bandwidth	Lowest channel	Middle channel	Highest channel
20 MHz	2 412 MHz	2 437 MHz	2 462 MHz
40 MHz	2 422 MHz	2 437 MHz	2 452 MHz

Duty cycle

Mode	Duty cycle (%)
802.11b	89.0
802.11g	57.0
802.11n-HT20	55.0
802.11n-HT40	63.0

3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter. Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB (C.L. : Approx. 95%, $k=2$)
Power Spectral Density	± 1.5 dB (C.L. : Approx. 95%, $k=2$)
Occupied Bandwidth	± 0.1 MHz (C.L. : Approx. 95%, $k=2$)
Unwanted Emission(conducted)	± 3.0 dB (C.L. : Approx. 95%, $k=2$)
Radiated Emissions ($f \leq 1$ GHz)	± 5.0 dB (C.L. : Approx. 95%, $k=2$)
Radiated Emissions ($f > 1$ GHz)	± 5.0 dB (C.L. : Approx. 95%, $k=2$)



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (8) / (55)Pages

4.0 Technical Characteristic Test

4.1 6dB Bandwidth & 99% Bandwidth

Test Procedures (ANSI C63.10-2013 6.9.2)

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures (ANSI C63.10-2013 6.9.3)

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz (6dB Bandwidth)
- b) RBW = 1% to 5% of the OBW
(99 % Bandwidth)
- c) VBW \geq 3 x RBW
- d) Detector = peak
- e) Trace mode = Max hold
- f) Sweep = auto couple
- g) Allow trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Limit : 6dB Bandwidth

6 dB Bandwidth > 500kHz

Limit : 99 % Bandwidth

N/A



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (9) / (55)Pages

Test Data:


Mode	Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
802.11b	Low	2 412	10.10	15.10	Complies
	Middle	2 437	10.30	15.10	
	High	2 462	10.30	15.10	
802.11g	Low	2 412	16.70	16.90	Complies
	Middle	2 437	16.60	16.90	
	High	2 462	16.70	16.90	
802.11n -HT20	Low	2 412	17.60	18.00	Complies
	Middle	2 437	17.60	18.10	
	High	2 462	17.60	18.00	
802.11n -HT40	Low	2 422	36.00	36.40	Complies
	Middle	2 437	36.20	36.40	
	High	2 452	35.80	36.40	

See next pages for actual measured spectrum plots.

Test Mode : 802.11b


6 dB Bandwidth[MHz]

Low channel

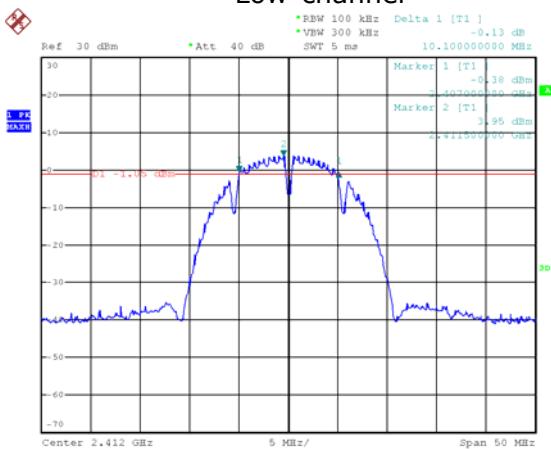

99% Bandwidth[MHz]


Low channel

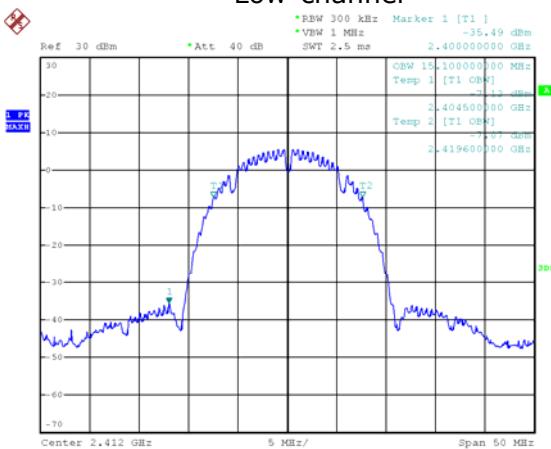


Date: 23.JUN.2022 17:17:13

Date: 23.JUN.2022 17:17:28

Middle channel

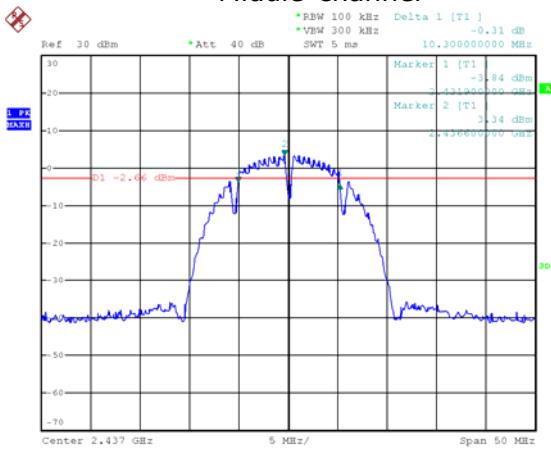


Middle channel

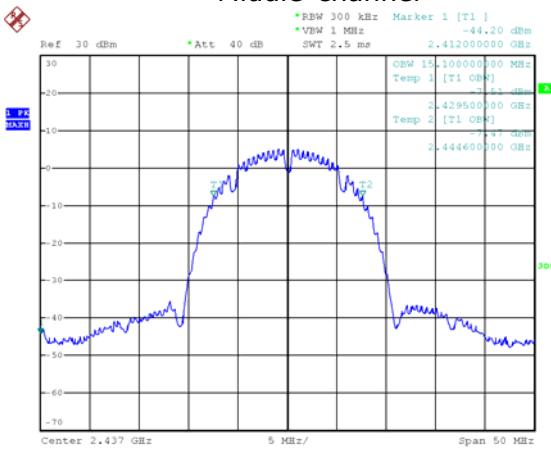


Date: 23.JUN.2022 17:21:05

Date: 23.JUN.2022 17:21:20

High channel

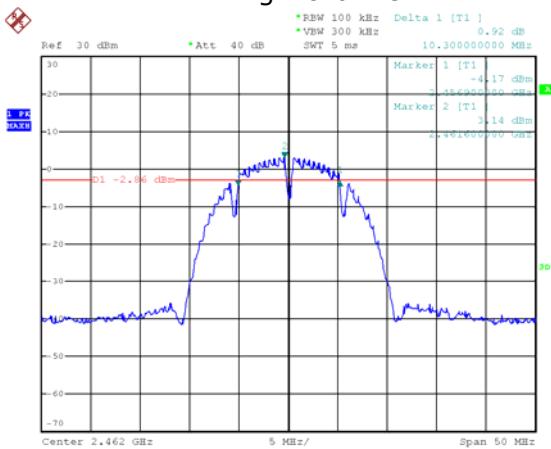

High channel

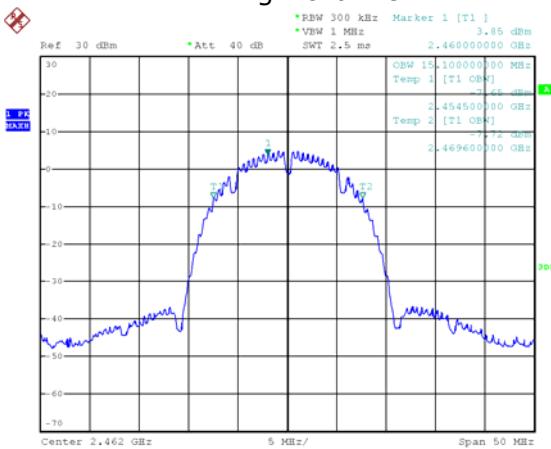


Date: 23.JUN.2022 17:23:56

Date: 23.JUN.2022 17:24:12

Test Mode : 802.11g

6 dB Bandwidth[MHz]

Low channel

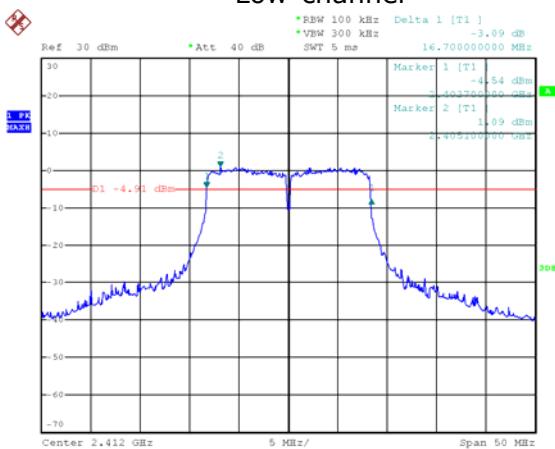


99% Bandwidth[MHz]

Low channel




Date: 23.JUN.2022 17:29:49

Middle channel

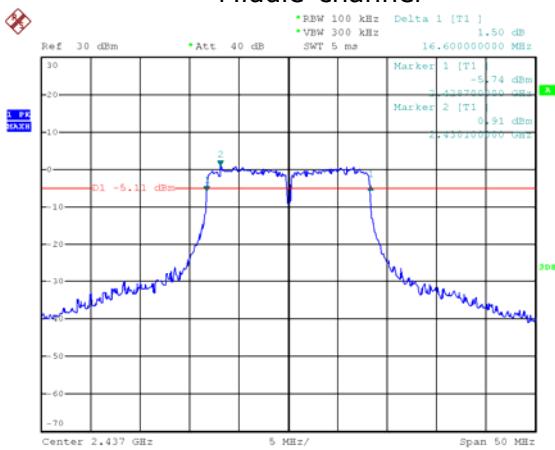


Middle channel

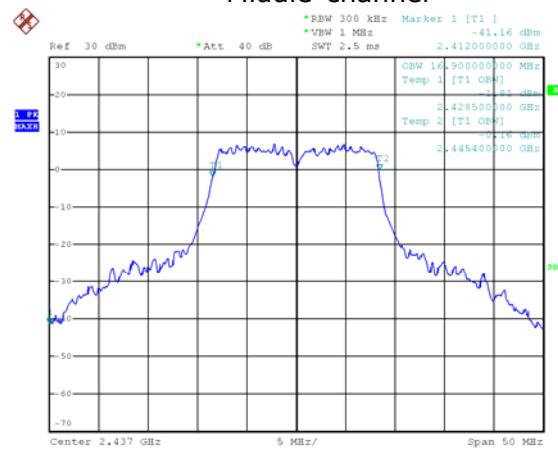


Date: 23.JUN.2022 17:33:08

High channel

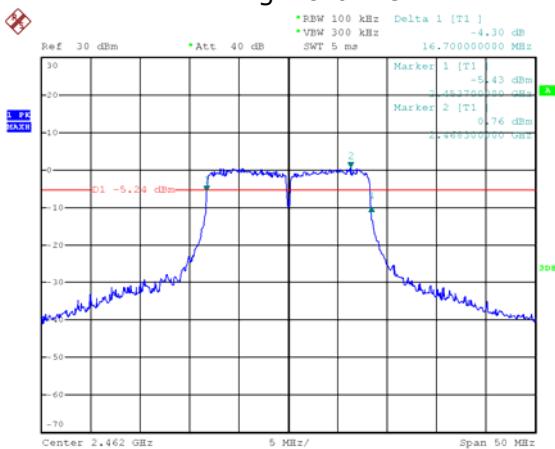

High channel

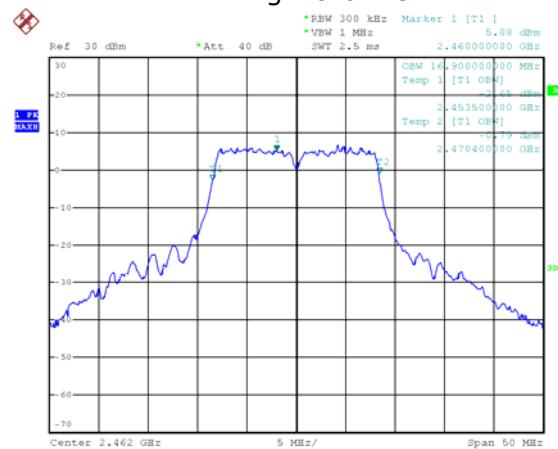

Date: 23.JUN.2022 17:36:26

Date: 23.JUN.2022 17:36:41



CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (12) / (55)Pages

Test Mode : 802.11n-HT20

6 dB Bandwidth[MHz]


Low channel

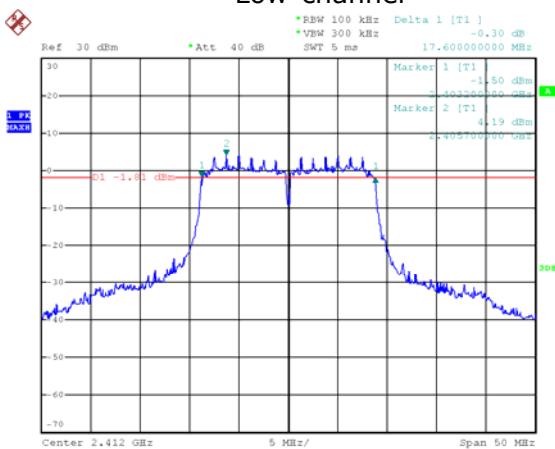

Date: 23.JUN.2022 17:41:54


99% Bandwidth[MHz]

Low channel

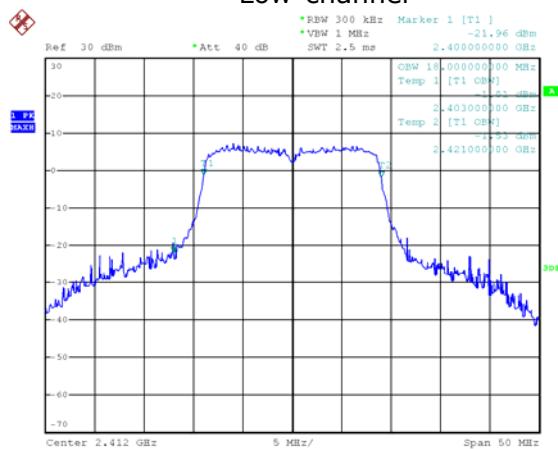


Date: 23.JUN.2022 17:42:09

Middle channel

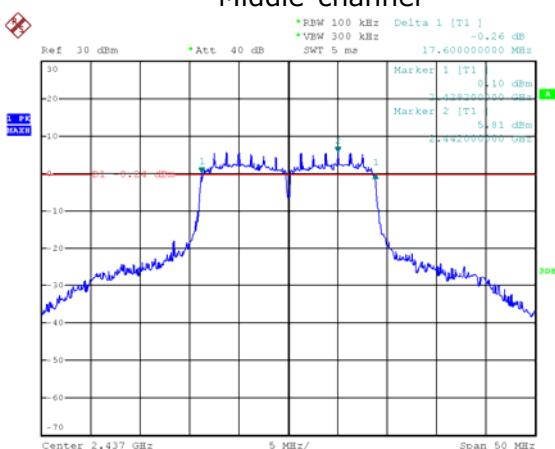


Date: 23.JUN.2022 17:45:13

Middle channel

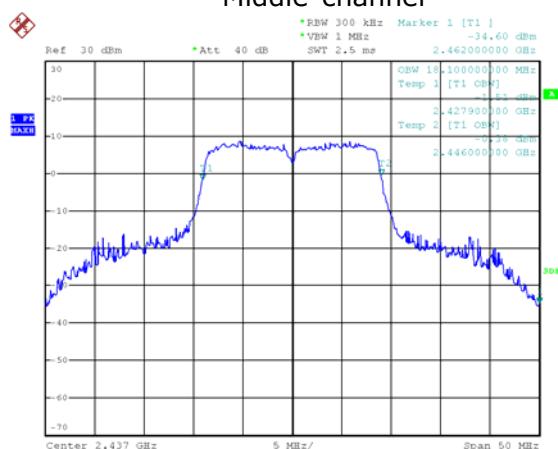


Date: 23.JUN.2022 17:45:28

High channel

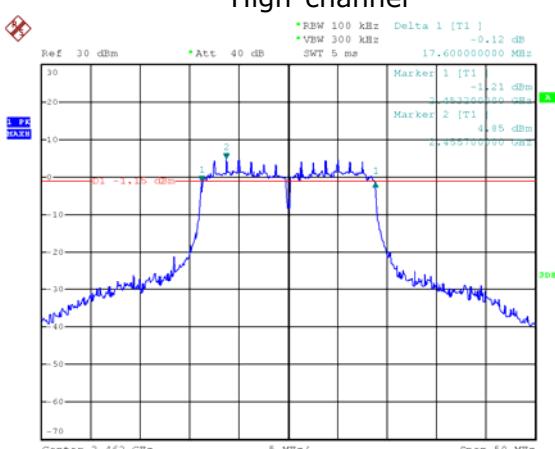

Date: 23.JUN.2022 17:48:16

High channel

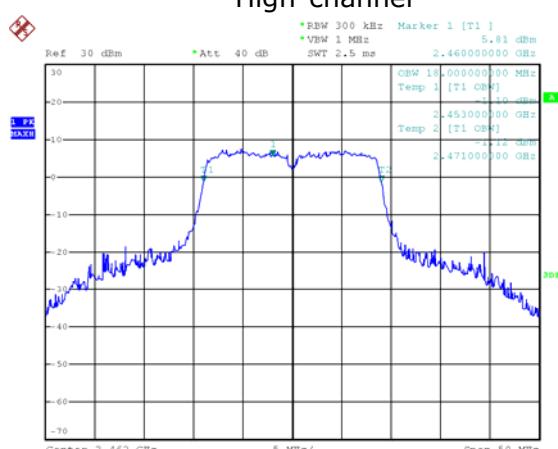


Date: 23.JUN.2022 17:48:31

Test Mode : 802.11n-HT40


6 dB Bandwidth[MHz]

Low channel

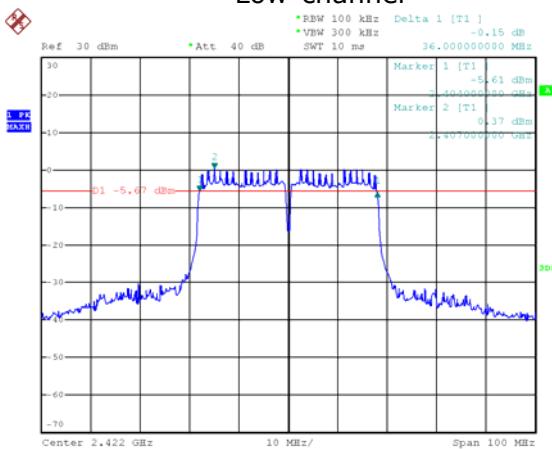

99% Bandwidth[MHz]


Low channel

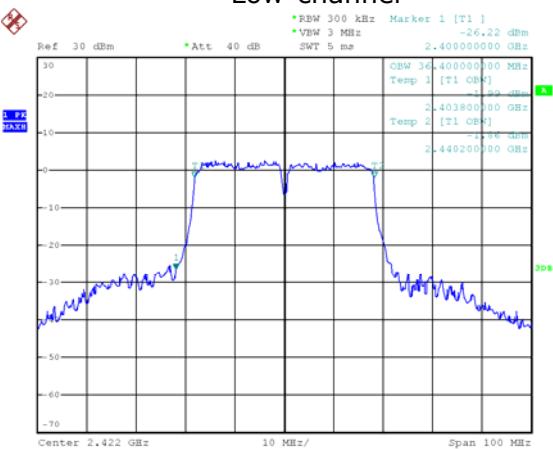


Date: 23.JUN.2022 11:37:06

Date: 23.JUN.2022 11:37:21

Middle channel

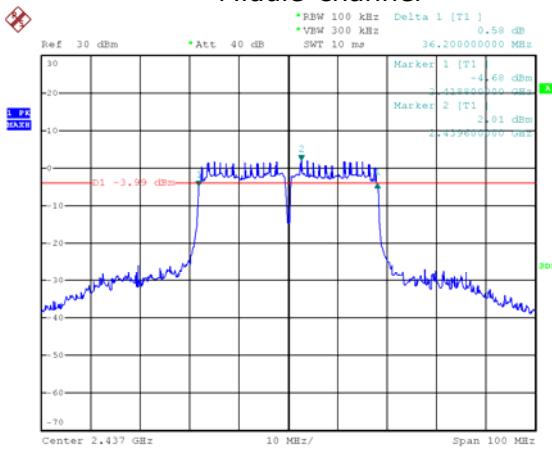


Middle channel

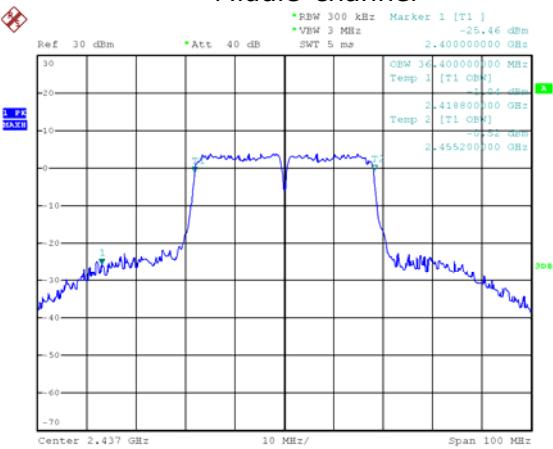


Date: 23.JUN.2022 11:41:57

Date: 23.JUN.2022 11:42:13

High channel

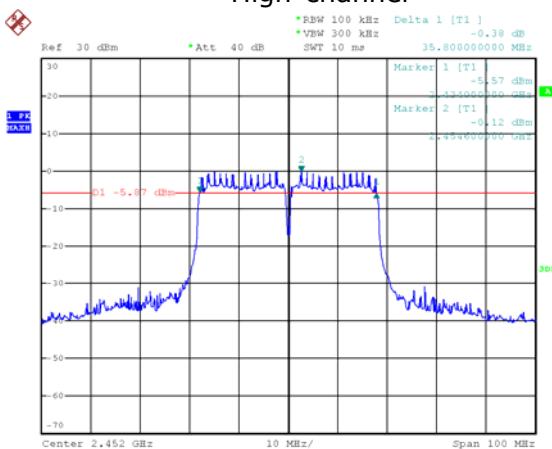

High channel

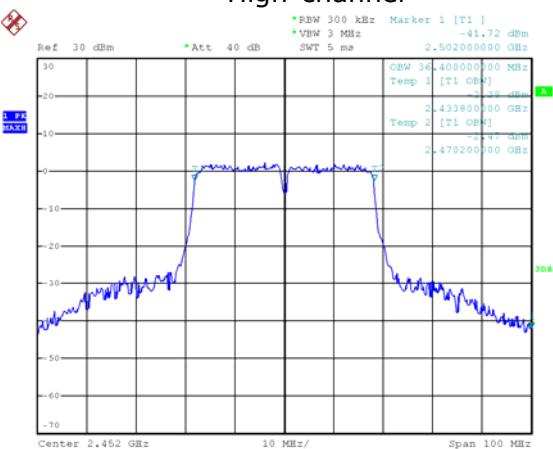


Date: 23.JUN.2022 11:46:38

Date: 23.JUN.2022 11:46:54

4.2 Maximum peak Conducted Output Power

Test Procedures(ANSI C63.10-2013 11.9.2.2.2)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) span $\geq 1.5 \times \text{OBW}$
- b) RBW = 1% to 5% of the OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times \text{RBW}$
- d) Sweep point $\geq (2 \times \text{SPAN} / \text{RBW})$
- e) Detector = RMS
- f) Sweep time = auto
- g) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges.

Limit

Maximum Output Power < 1 W (30 dBm)

Test Data

Mode	Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
802.11b	Low	2 412	14.92	30	Complies
	Middle	2 437	14.46		
	High	2 462	14.22		
802.11g	Low	2 412	16.87		
	Middle	2 437	16.69		
	High	2 462	16.55		
802.11n -HT20	Low	2 412	17.25	30	Complies
	Middle	2 437	18.10		
	High	2 462	17.79		
802.11n -HT40	Low	2 422	16.00	30	Complies
	Middle	2 437	17.58		
	High	2 452	15.54		

See next pages for actual measured spectrum plots.

Output Power


Test Mode : 802.11b

Low channel




Test Mode : 802.11g

Low channel

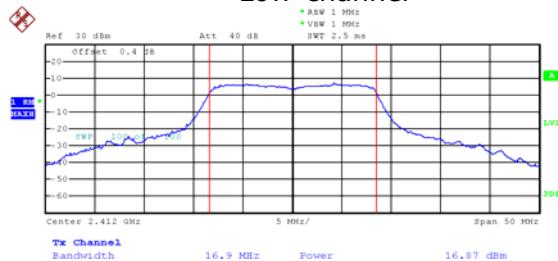

Date: 23.JUN.2022 17:17:45

Middle channel

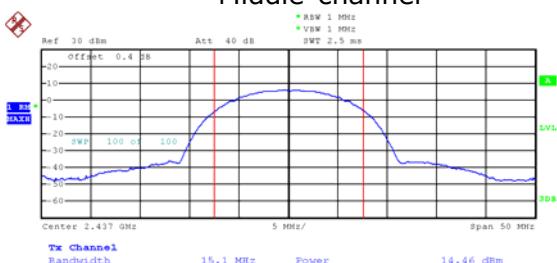

Middle channel




Date: 23.JUN.2022 17:21:38

High channel



High channel

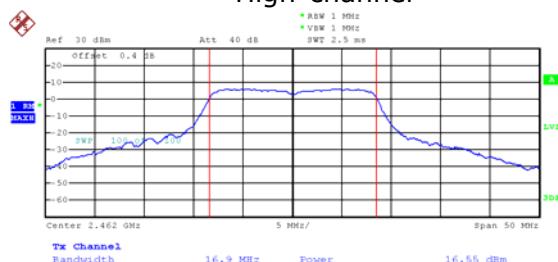


Date: 23.JUN.2022 17:24:29

Date: 23.JUN.2022 17:36:59


Test Mode : 802.11n-HT20

Low channel

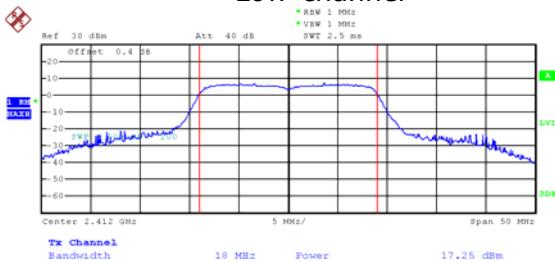

Test Mode : 802.11n-HT40


Low channel

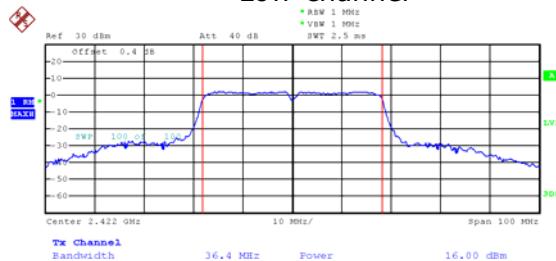


Date: 23.JUN.2022 17:42:27

Date: 23.JUN.2022 11:37:39

Middle channel

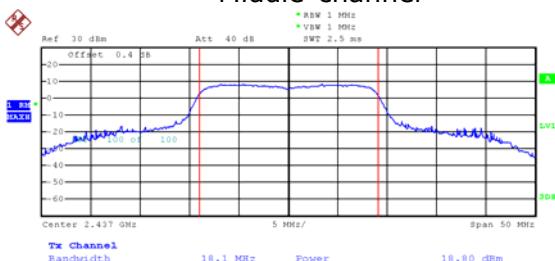


Middle channel

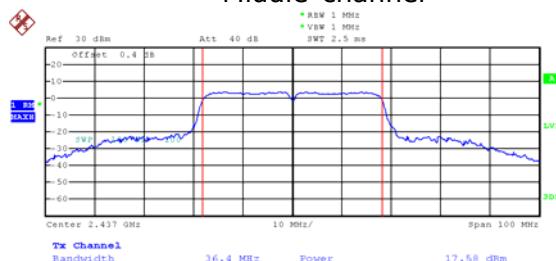

Date: 23.JUN.2022 17:45:46

Date: 23.JUN.2022 11:42:30

High channel

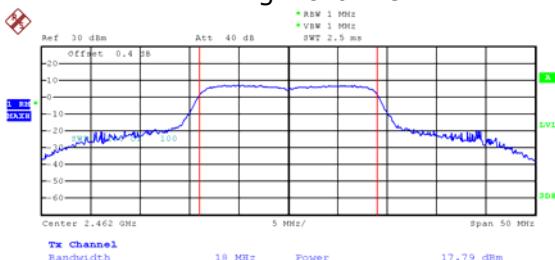

High channel



Date: 23.JUN.2022 17:48:49

Date: 23.JUN.2022 11:47:11



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (17) / (55)Pages

4.3 Power Spectral Density

Test Procedures(ANSI C63.10-2013 11.10.2)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$	b) $\text{VBW} \geq 3 \times \text{RBW}$
c) span $\geq 1.5 \times \text{DTS bandwidth}$	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode= max hold
g) Allow trace to fully stabilize	
h) Use the peak marker function to determine the maximum amplitude level within the RBW.	

Limit :

Power Spectral Density < 8 dBm @ 3 kHz BW

Test Data



Mode	Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
802.11b	Low	2 412	-15.13	8	Complies
	Middle	2 437	-16.23		
	High	2 462	-16.46		
802.11g	Low	2 412	-12.81	8	Complies
	Middle	2 437	-13.40		
	High	2 462	-13.78		
802.11n -HT20	Low	2 412	-10.34	8	Complies
	Middle	2 437	-9.37		
	High	2 462	-9.65		
802.11n -HT40	Low	2 422	-13.16	8	Complies
	Middle	2 437	-11.77		
	High	2 452	-13.30		

See next pages for actual measured spectrum plots.

Power Spectral Density

Test Mode : 802.11b



Low channel

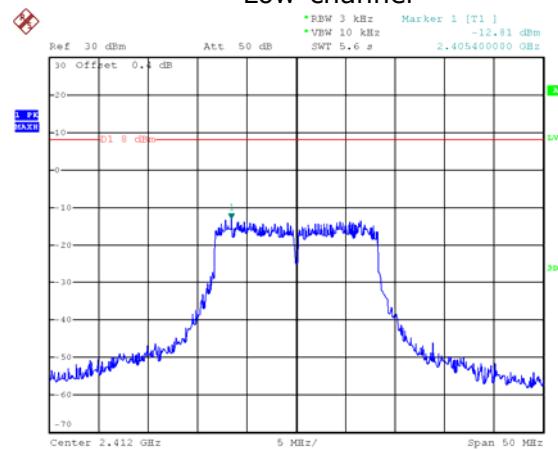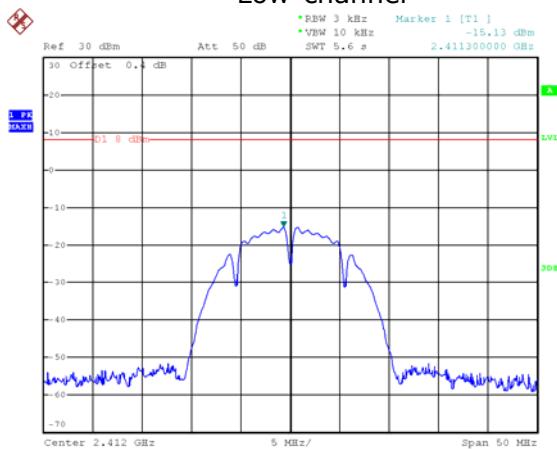

Date: 23.JUN.2022 17:14:54

Date: 23.JUN.2022 17:28:09



Middle channel

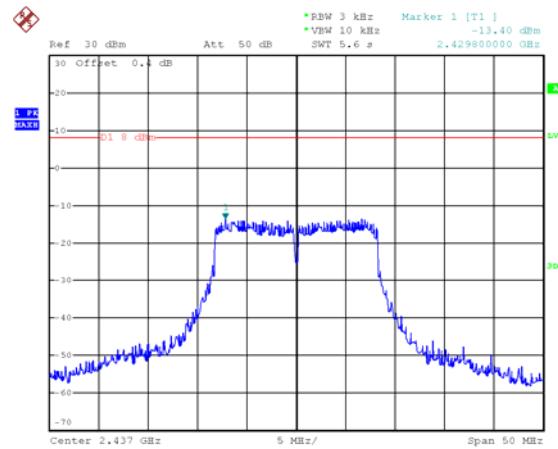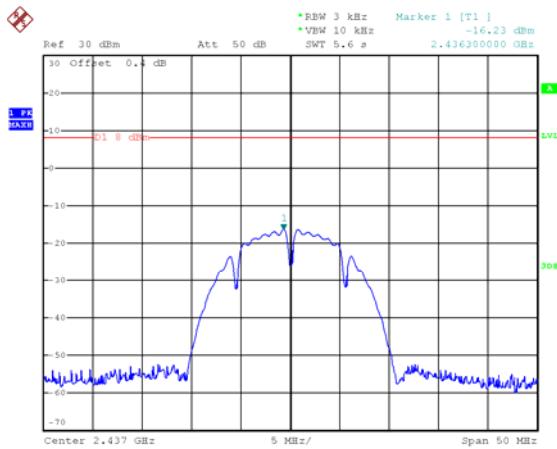

Date: 23.JUN.2022 17:20:12

Date: 23.JUN.2022 17:32:05

High channel

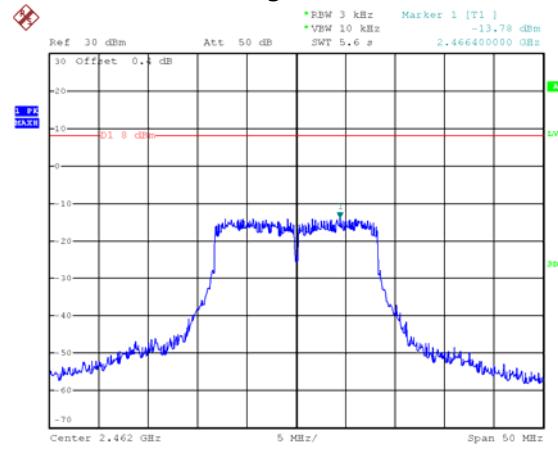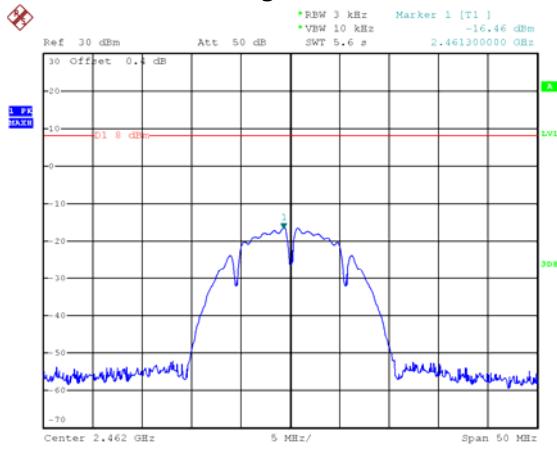


Date: 23.JUN.2022 17:23:01

Date: 23.JUN.2022 17:35:00


Test Mode : 802.11n-HT20

Low channel

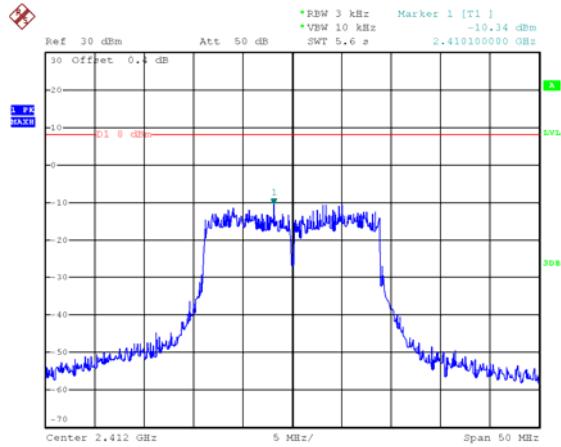


Date: 23.JUN.2022 17:40:07

Middle channel

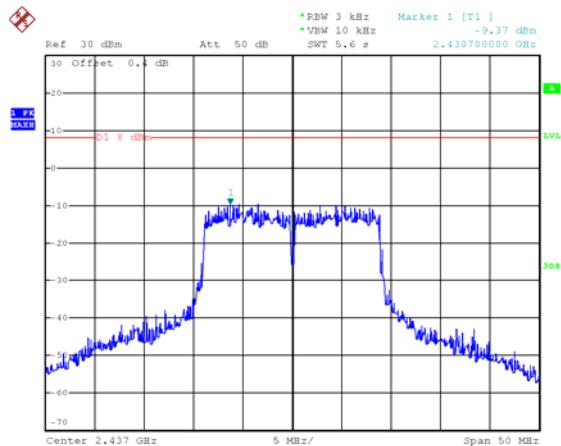

Date: 23.JUN.2022 17:44:00


High channel

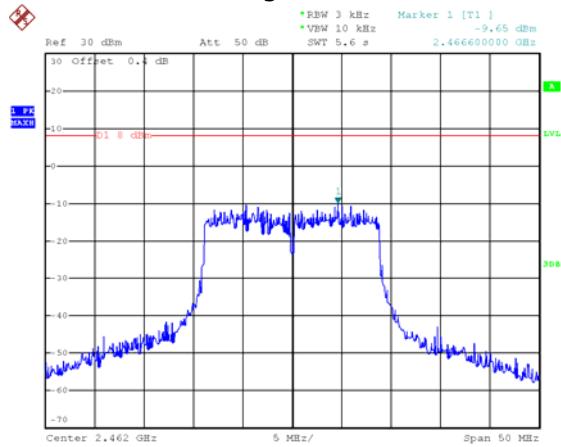

Date: 23.JUN.2022 17:47:09


Test Mode : 802.11 n-HT40

Low channel

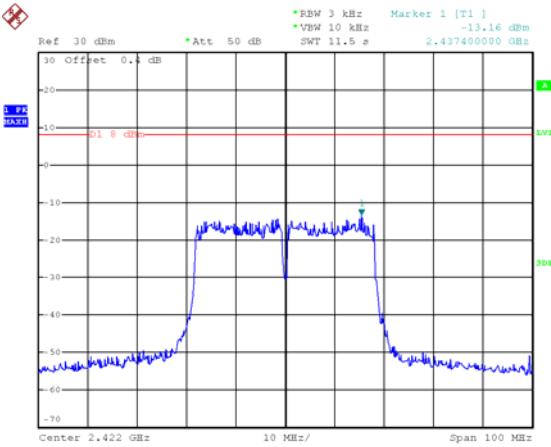


Date: 23.JUN.2022 17:07:52

Middle channel

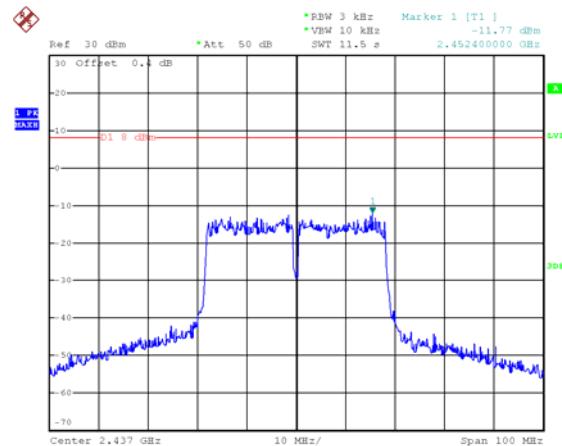

Date: 23.JUN.2022 17:08:48

High channel

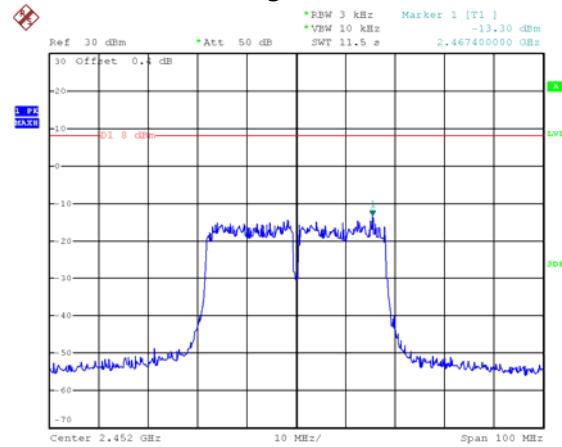

Date: 23.JUN.2022 17:11:48



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (20) / (55)Pages

4.4 Band Edge & Conducted Spurious emission

Test Procedures(ANSI C63.10-2013 11.11.3)

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW = 100 kHz	b) VBW \geq 3 x RBW
c) Detector = peak	d) Sweep time = auto couple
e) Trace mode= max hold	
f) Allow trace to fully stabilize	
g) Use the peak marker function to determine the maximum amplitude level.	

Limit :



Emission level < 30 dBc

Test Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 30dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



**Band-edge
Test Mode : 802.11b**

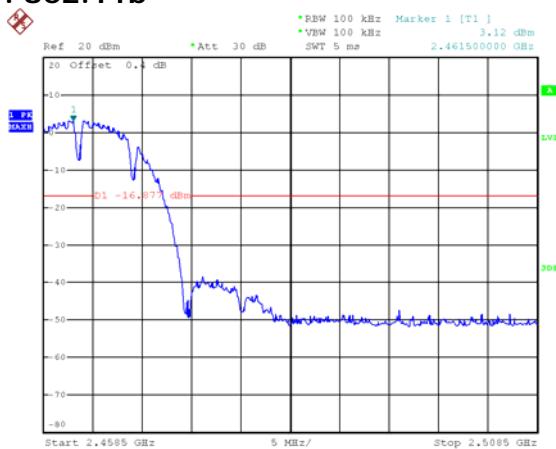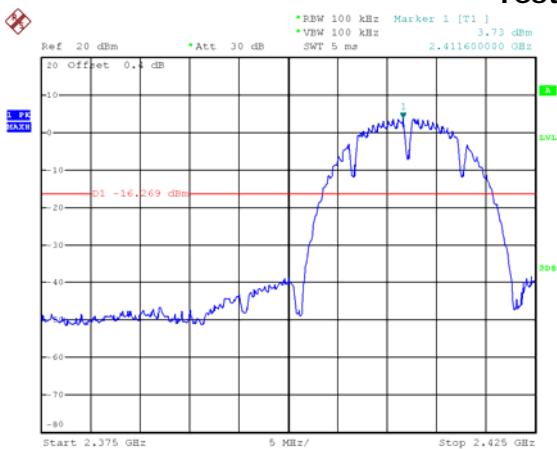

Date: 23.JUN.2022 17:18:31

Date: 23.JUN.2022 17:25:15



Test Mode : 802.11g

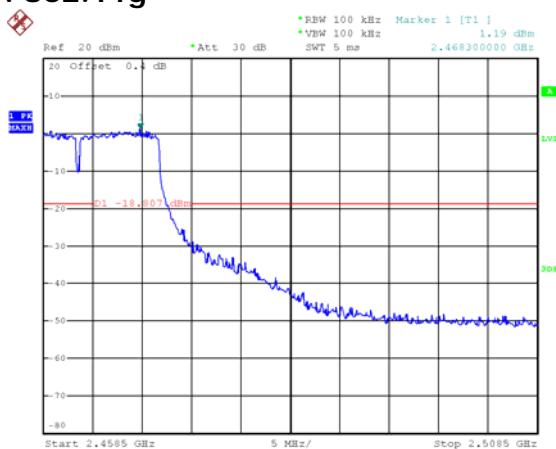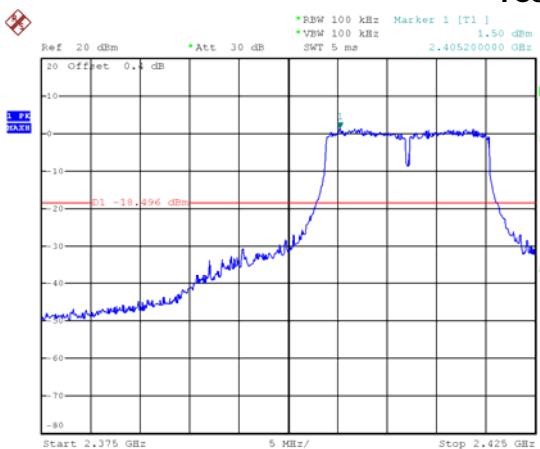

Date: 23.JUN.2022 17:31:16

Date: 23.JUN.2022 17:37:45

Test Mode : 802.11n-HT20

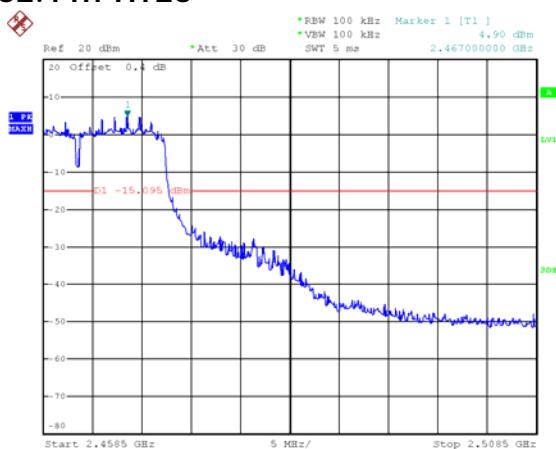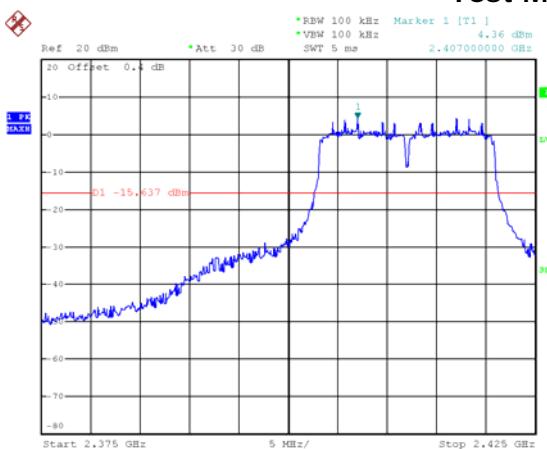

Date: 23.JUN.2022 17:43:13

Date: 23.JUN.2022 17:49:35





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (22) / (55)Pages



Test Mode : 802.11n-HT40

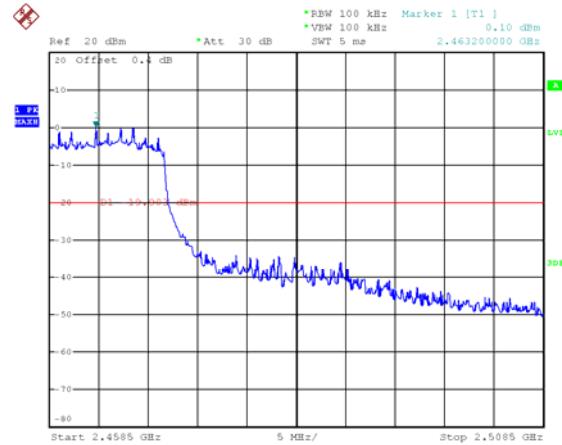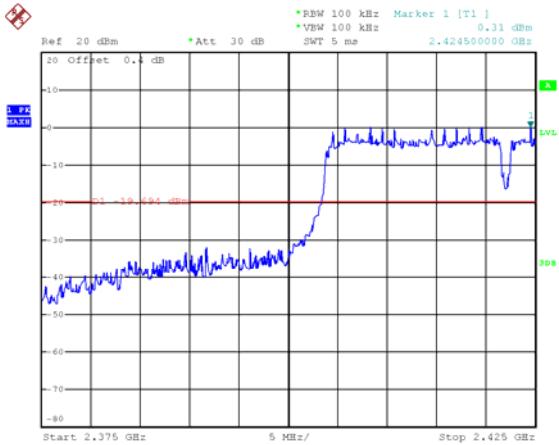

Date: 23.JUN.2022 11:38:25

Date: 23.JUN.2022 11:47:57



**Spurious
Test Mode : 802.11b
Low channel**

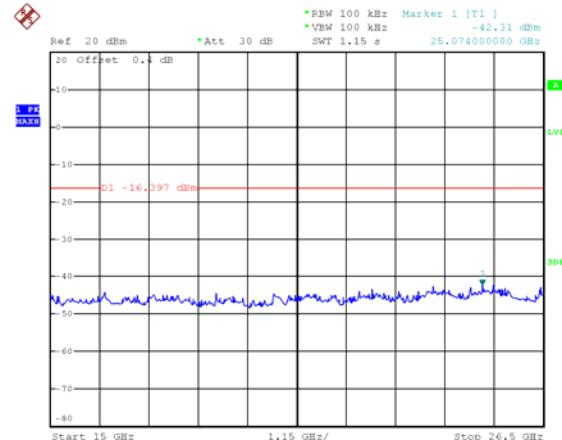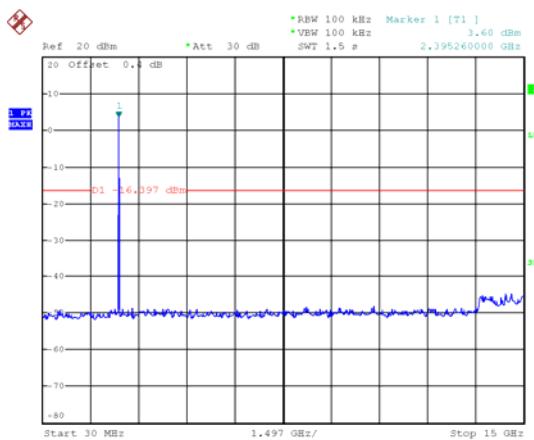

Date: 23.JUN.2022 17:18:01

Date: 23.JUN.2022 17:18:15



Middle channel

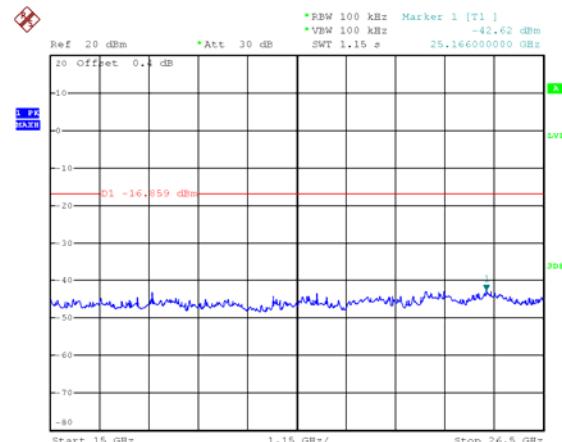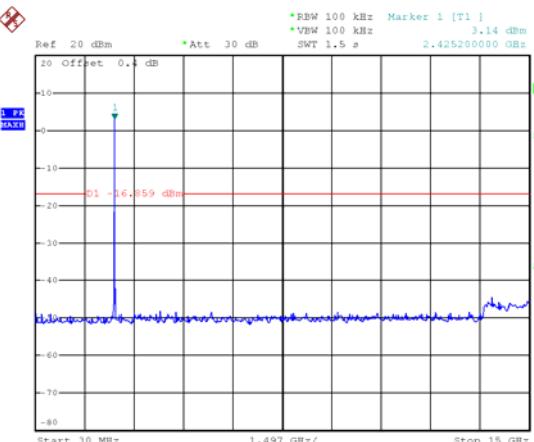

Date: 23.JUN.2022 17:21:53

Date: 23.JUN.2022 17:22:07

High channel

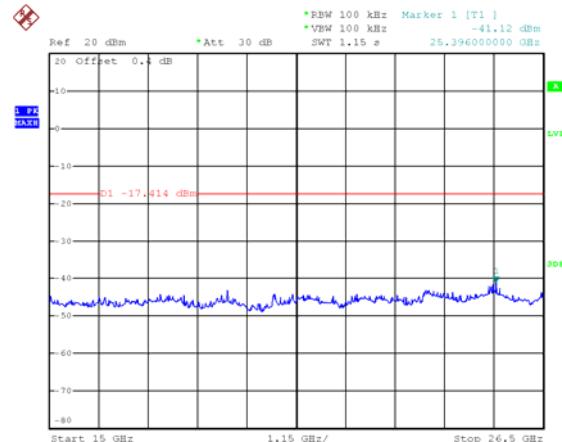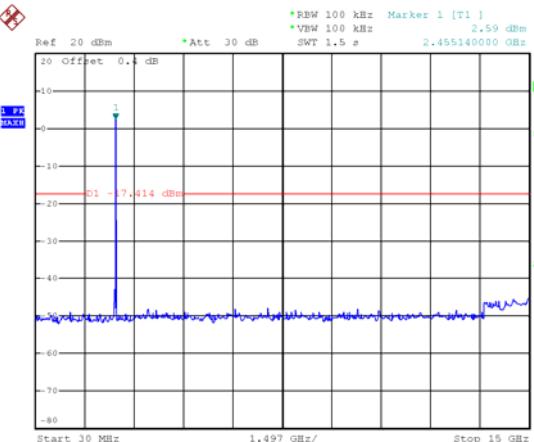

Date: 23.JUN.2022 17:24:45

Date: 23.JUN.2022 17:24:59





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (24) / (55)Pages



Test Mode : 802.11g
Low channel

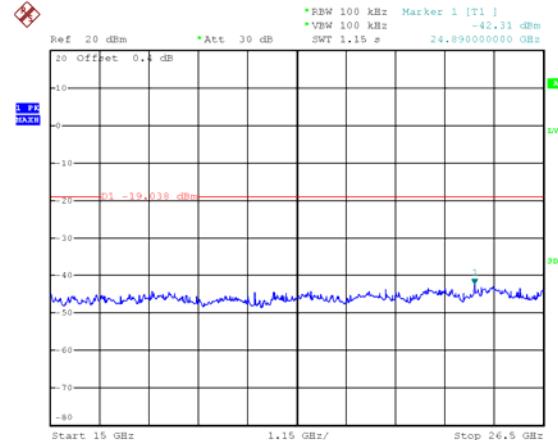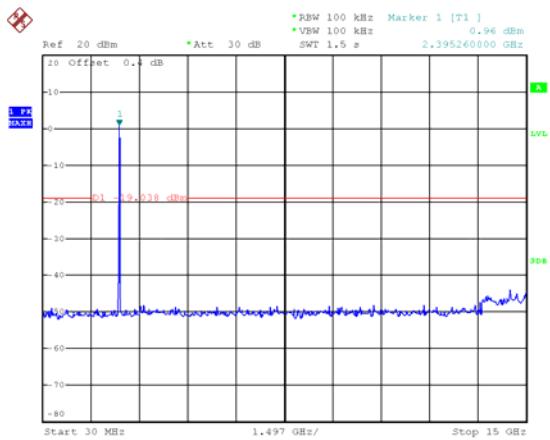

Date: 23.JUN.2022 17:30:36

Date: 23.JUN.2022 17:30:52



Middle channel

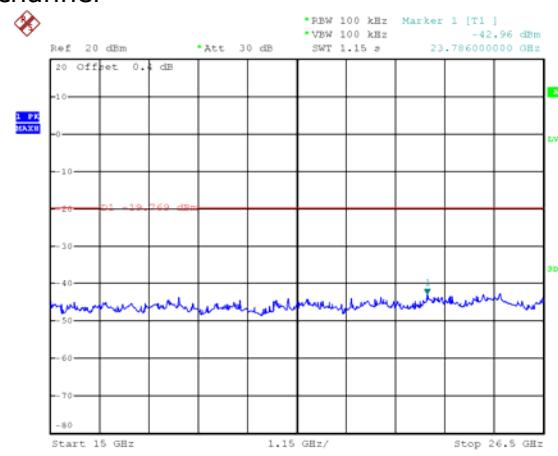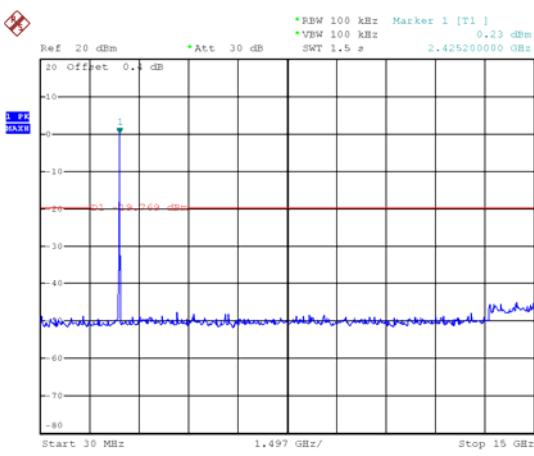

Date: 23.JUN.2022 17:33:57

Date: 23.JUN.2022 17:34:11

High channel

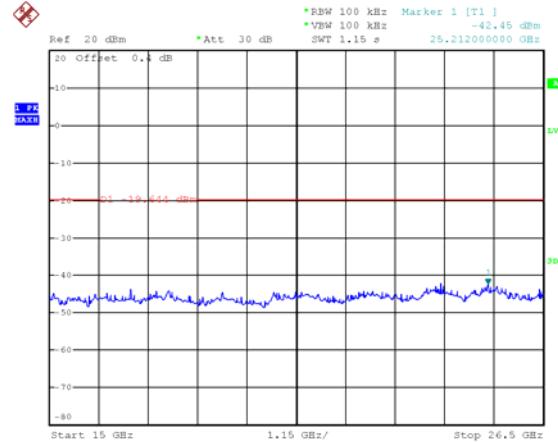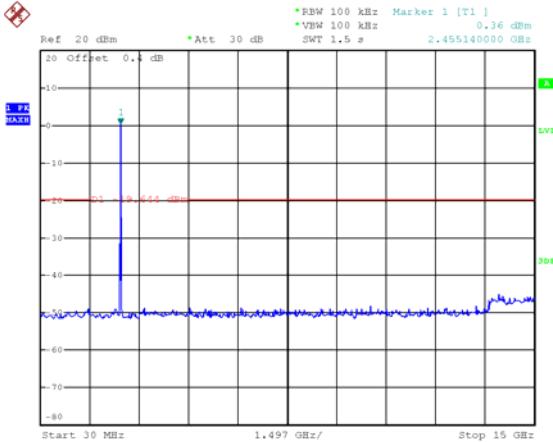

Date: 23.JUN.2022 17:37:15

Date: 23.JUN.2022 17:37:28





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (25) / (55)Pages

Test Mode : 802.11n-HT20



Low channel

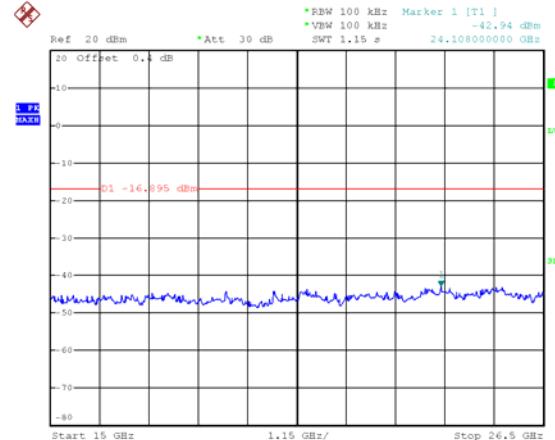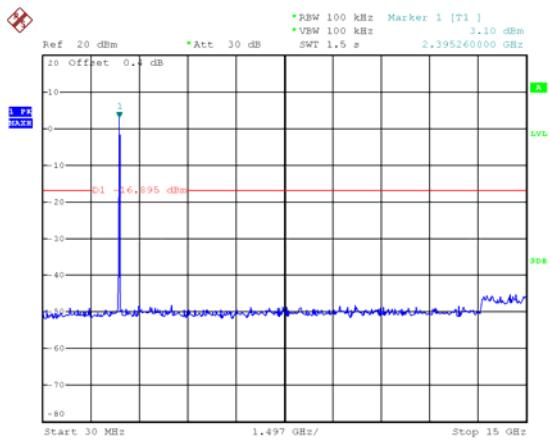

Date: 23.JUN.2022 17:42:43

Date: 23.JUN.2022 17:42:57



Middle channel

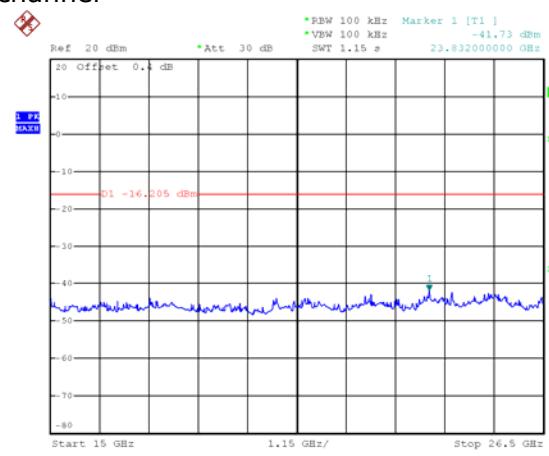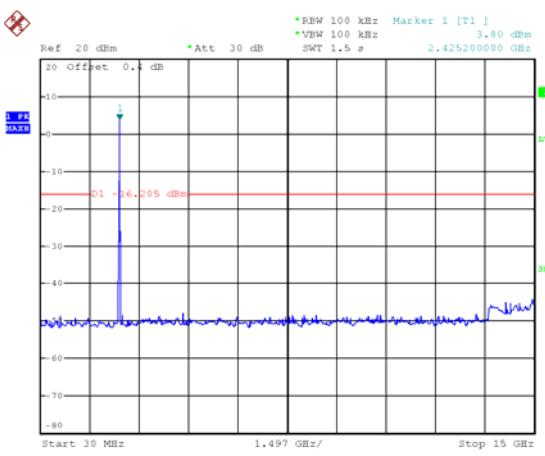

Date: 23.JUN.2022 17:46:01

Date: 23.JUN.2022 17:46:15

High channel

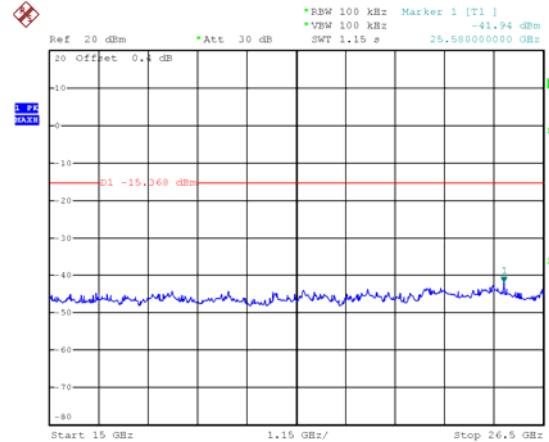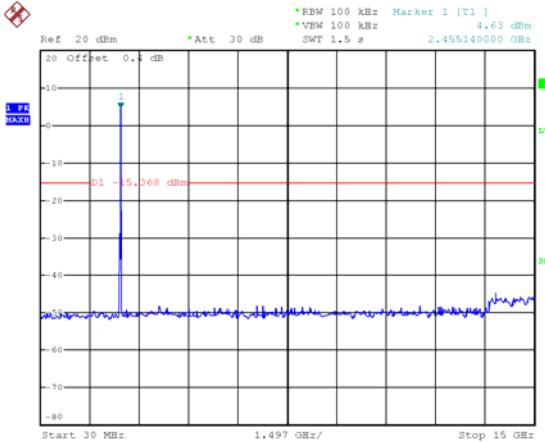

Date: 23.JUN.2022 17:49:05

Date: 23.JUN.2022 17:49:19





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2022-01927
Page (26) / (55)Pages

Test Mode : 802.11n-HT40



Low channel

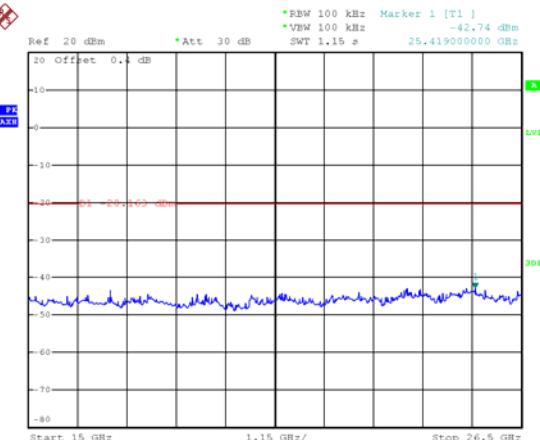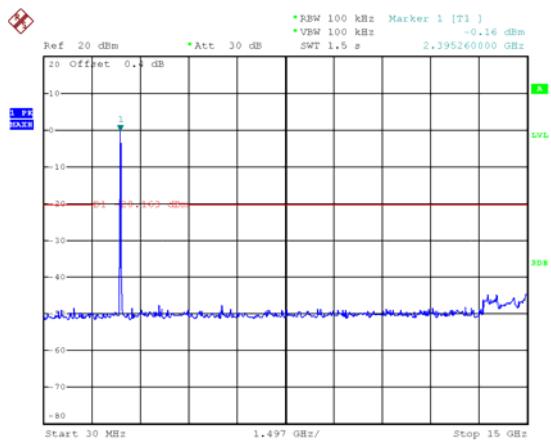

Middle channel

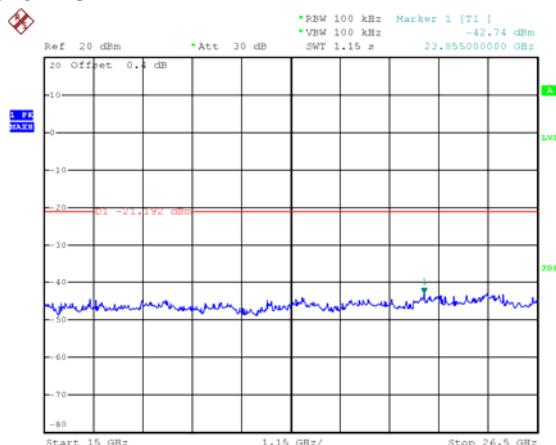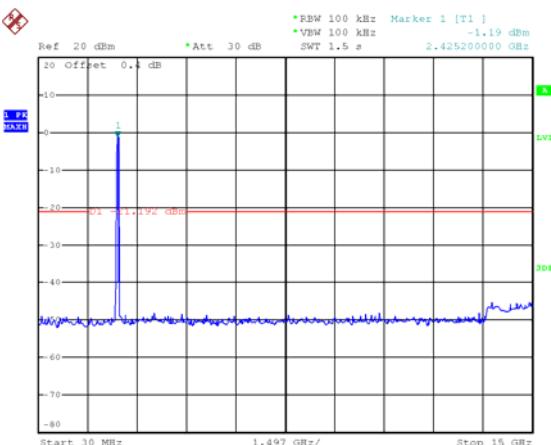

High channel

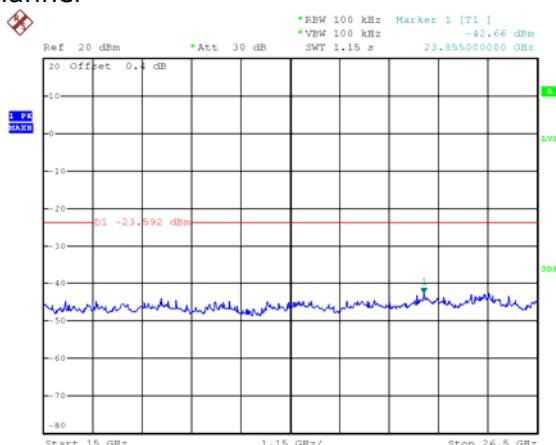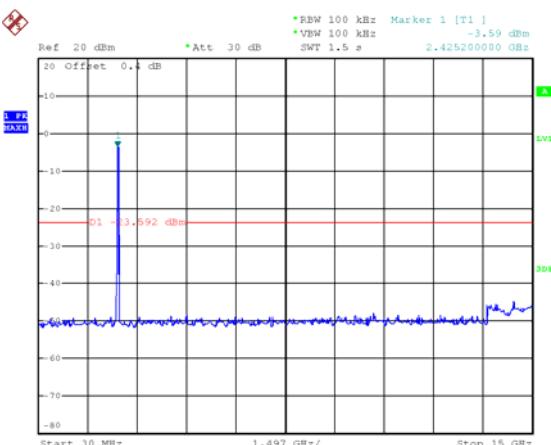



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (27) / (55)Pages

4.5 Radiated Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
- 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Instrument Settings

Frequency Range = 9 kHz ~ 26.5 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (28) / (55)Pages

Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands*

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

*Certain frequency bands listed in Table 6 and in band above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in the 200- and 300-series of RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (29) / (55)Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m	Field Strength dBuV/m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	49.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

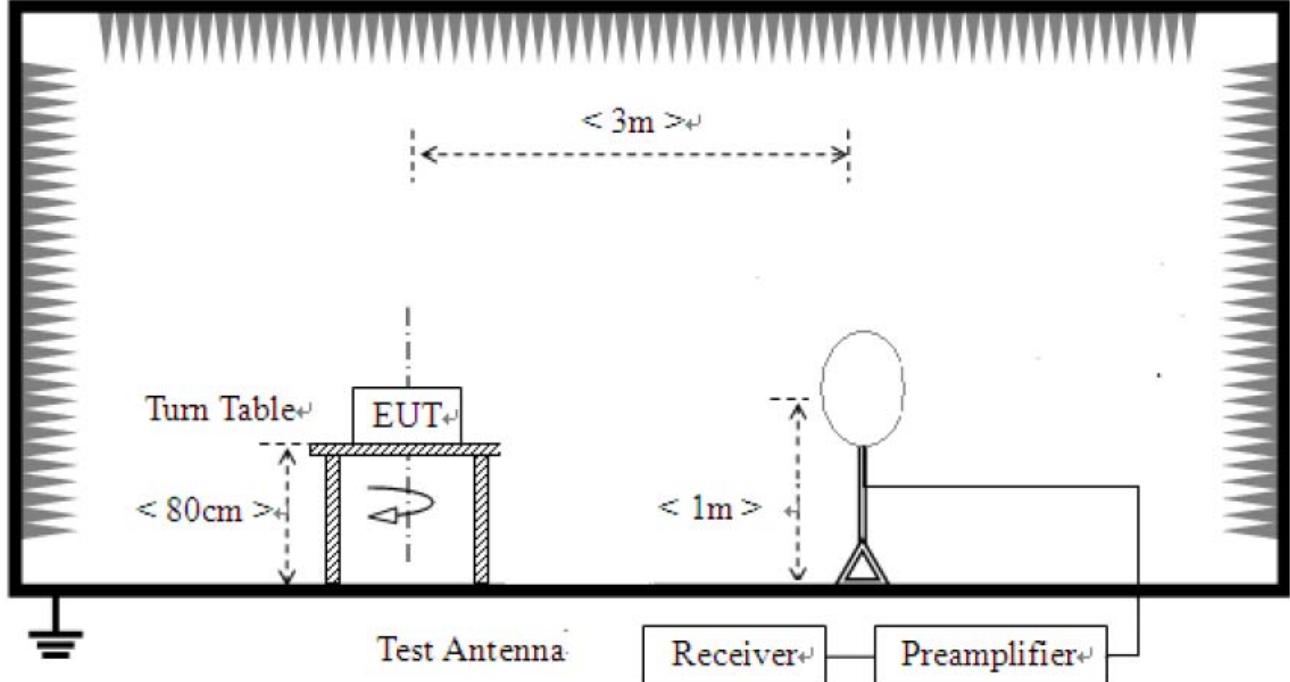

2) For field strength of emissions from 30 MHz to 1 GHz

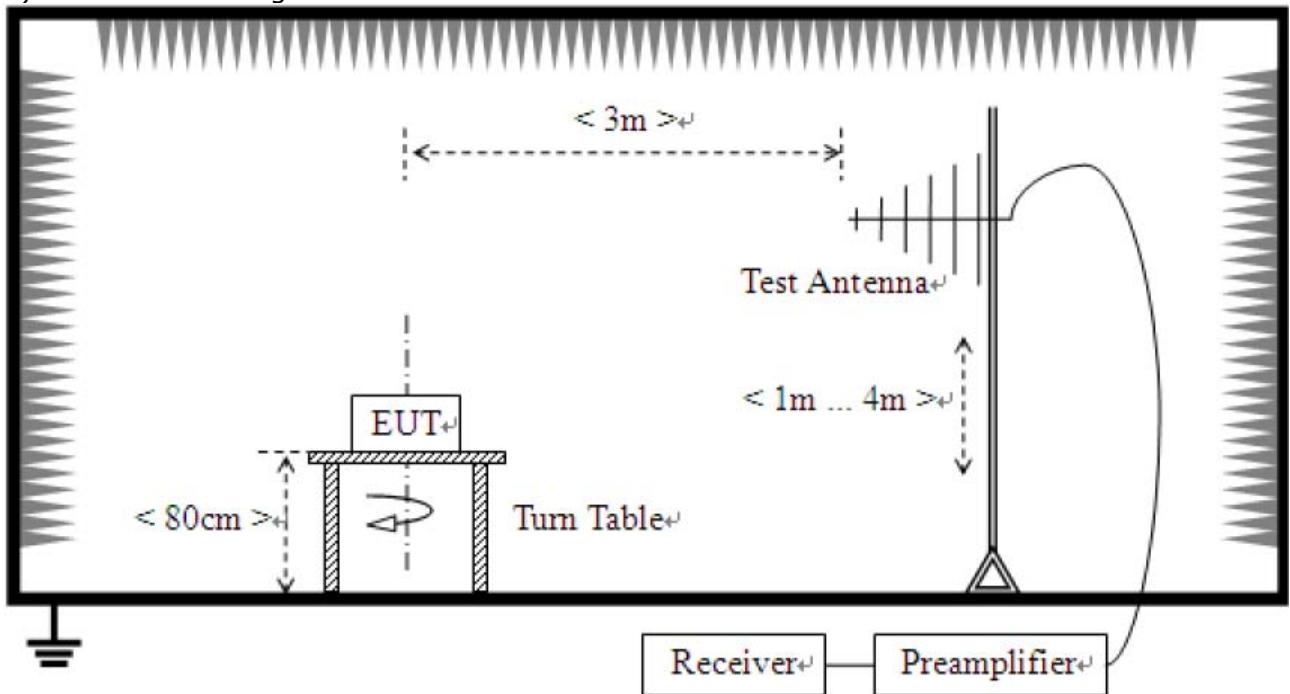

3) For field strength of emissions above 1 GHz

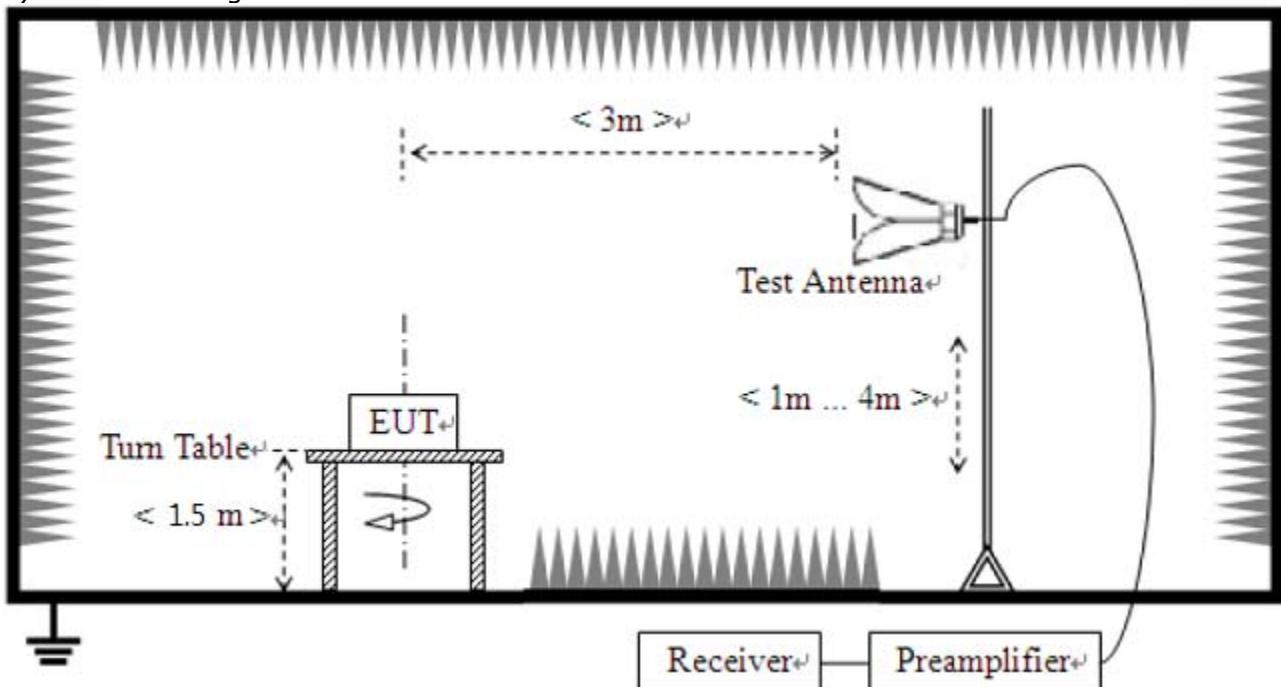

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2022-01927
Page (32) / (55)Pages

Test results

1) Restricted Frequency Bands

1. 2 310 MHz to 2 390 MHz


Test mode : 802.11b, Low channel

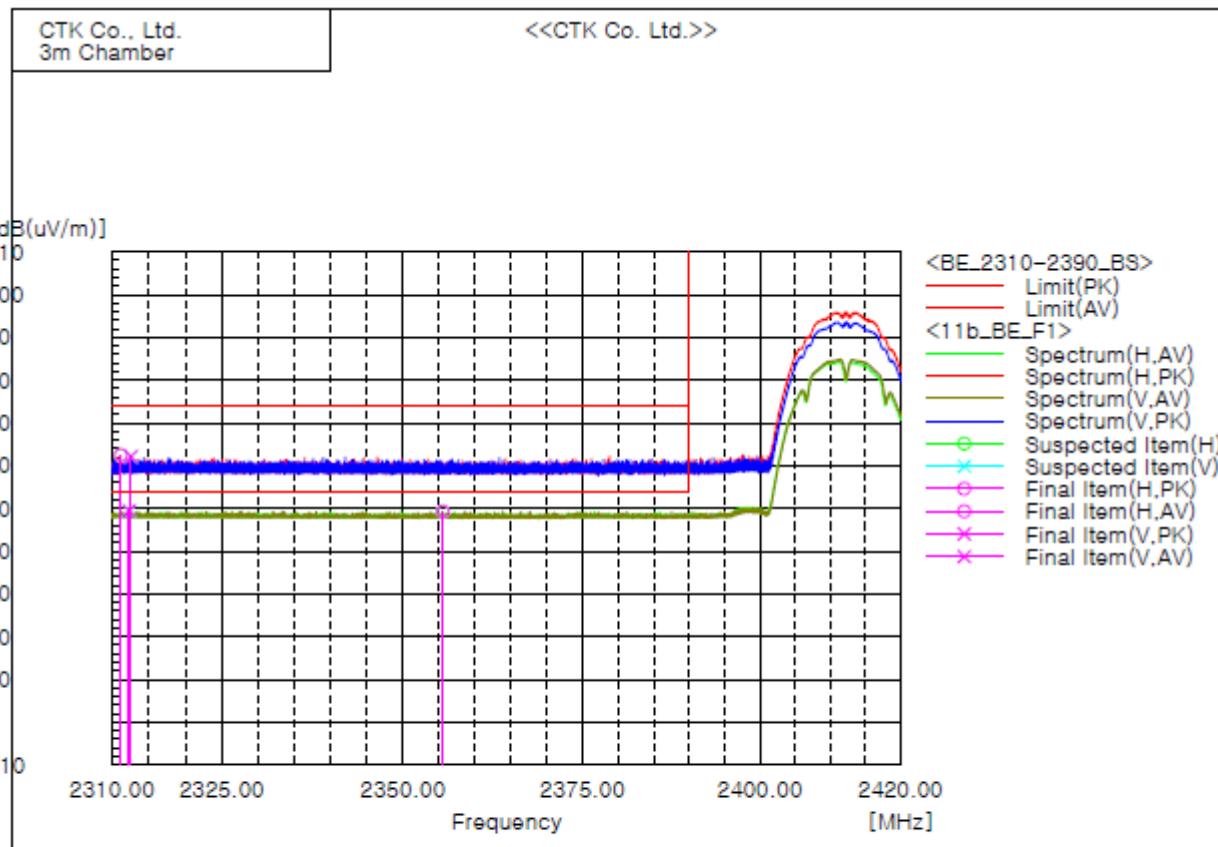

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Low channel

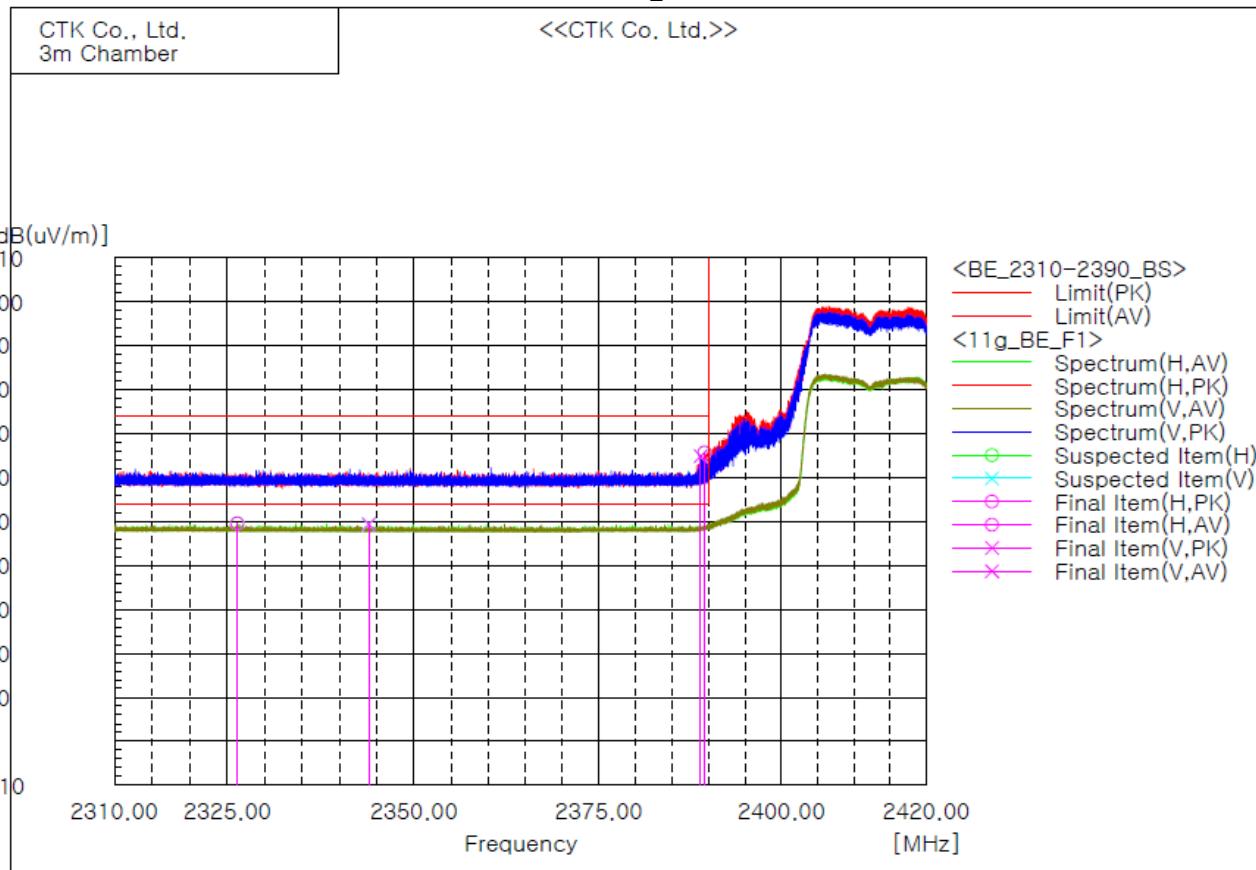


Final Result

No.	Frequency	(P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle
	[MHz]		[dB(uV)]	[dB(uV)]		[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB(uV/m)]			[cm]	[deg]
1	2389.432	H	71.6	55.6	-5.9	65.7	65.7	74.0	54.0	8.3	—	203.0	179.5
2	2326.312	H	—	—	-6.0	—	49.6	74.0	54.0	—	4.4	102.0	359.5
3	2388.900	V	70.8	55.4	-5.9	64.9	—	74.0	54.0	—	9.1	103.8	142.2
4	2343.877	V	—	—	-6.0	—	49.4	74.0	54.0	—	4.6	395.8	359.1

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n-HT20, Low channel

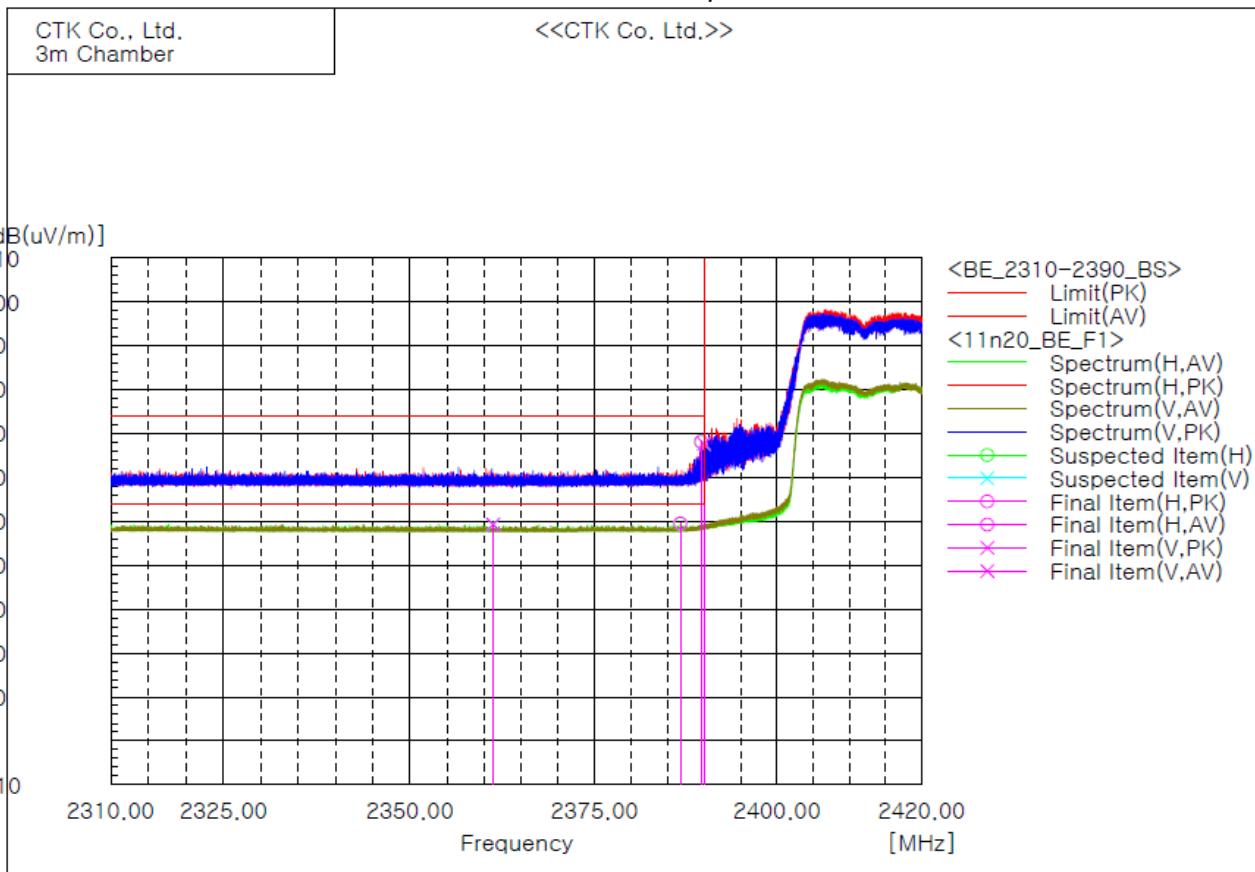


Final Result

No.	Frequency [MHz]	(P) PK [dB(uV)]	Reading AV [dB(uV)]	o.f. [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2389.555	H 74.1	55.4	-5.9	68.2	49.5	74.0	54.0	5.8	4.5	203.7	179.0
2	2386.713	H	55.4	-5.9	—	—	74.0	54.0	—	6.3	96.5	359.1
3	2389.912	V 73.6	55.3	-5.9	67.7	49.3	74.0	54.0	—	4.7	103.7	139.7
4	2361.231	V	55.3	-6.0	—	—	74.0	54.0	—	—	396.4	359.6

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

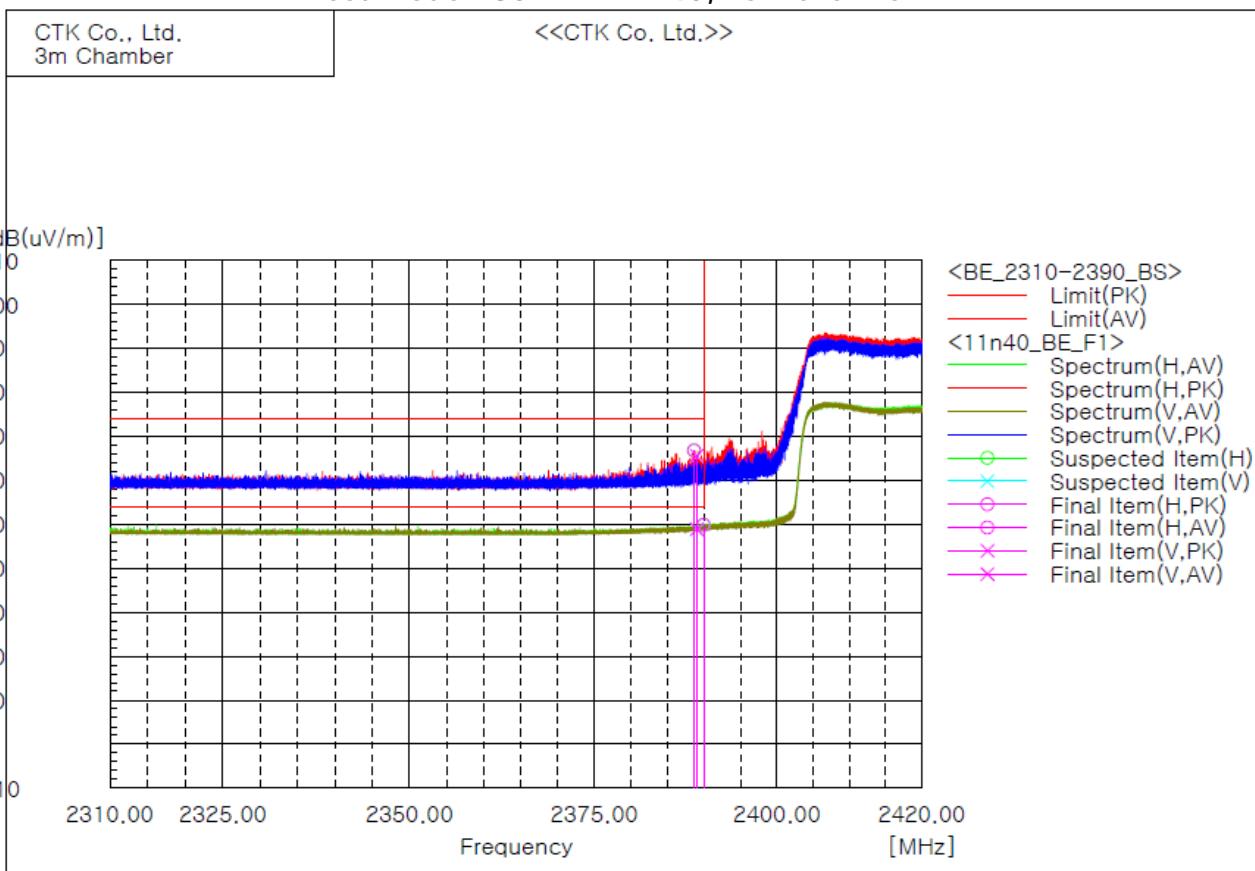Test mode : 802.11n-HT40, Low channel

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2388.618	H	72.7	—	—	66.8	—	74.0	54.0	7.2	—	204.2	184.8
2	2389.925	H	—	55.8	—	—	49.9	74.0	54.0	—	4.1	96.3	194.6
3	2388.997	V	71.5	—	—	65.6	—	74.0	54.0	8.4	—	99.9	165.6
4	2388.997	V	—	54.8	—	—	48.9	74.0	54.0	—	5.1	99.9	140.5

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (36) / (55)Pages


2. 2 483.5 MHz – 2 500 MHz

Test mode : 802.11b, High Channel

The requirements are:

Complies

Test Data

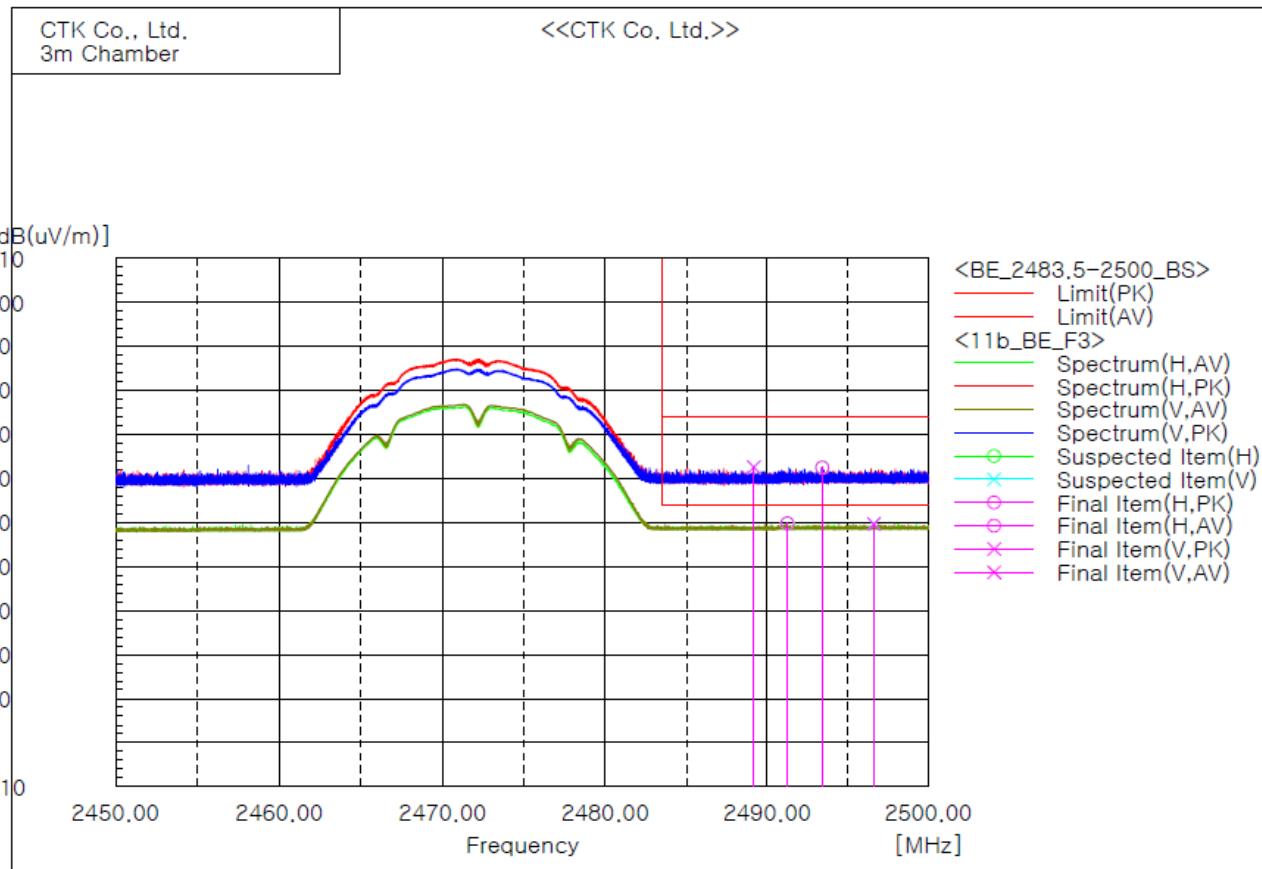

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f.	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2493.416	H	67.7	55.0	-5.2	62.5	49.8	74.0	54.0	11.5	4.2	102.3	175.3
2	2491.250	H	—	—	-5.2	—	74.0	54.0	—	—	102.3	0.0	
3	2489.166	V	67.9	54.9	-5.3	62.6	49.7	74.0	54.0	11.4	4.3	396.2	156.0
4	2496.600	V	—	—	-5.2	—	74.0	54.0	—	—	396.2	0.6	

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (37) / (55)Pages

Test mode : 802.11g, High Channel

The requirements are:

Complies

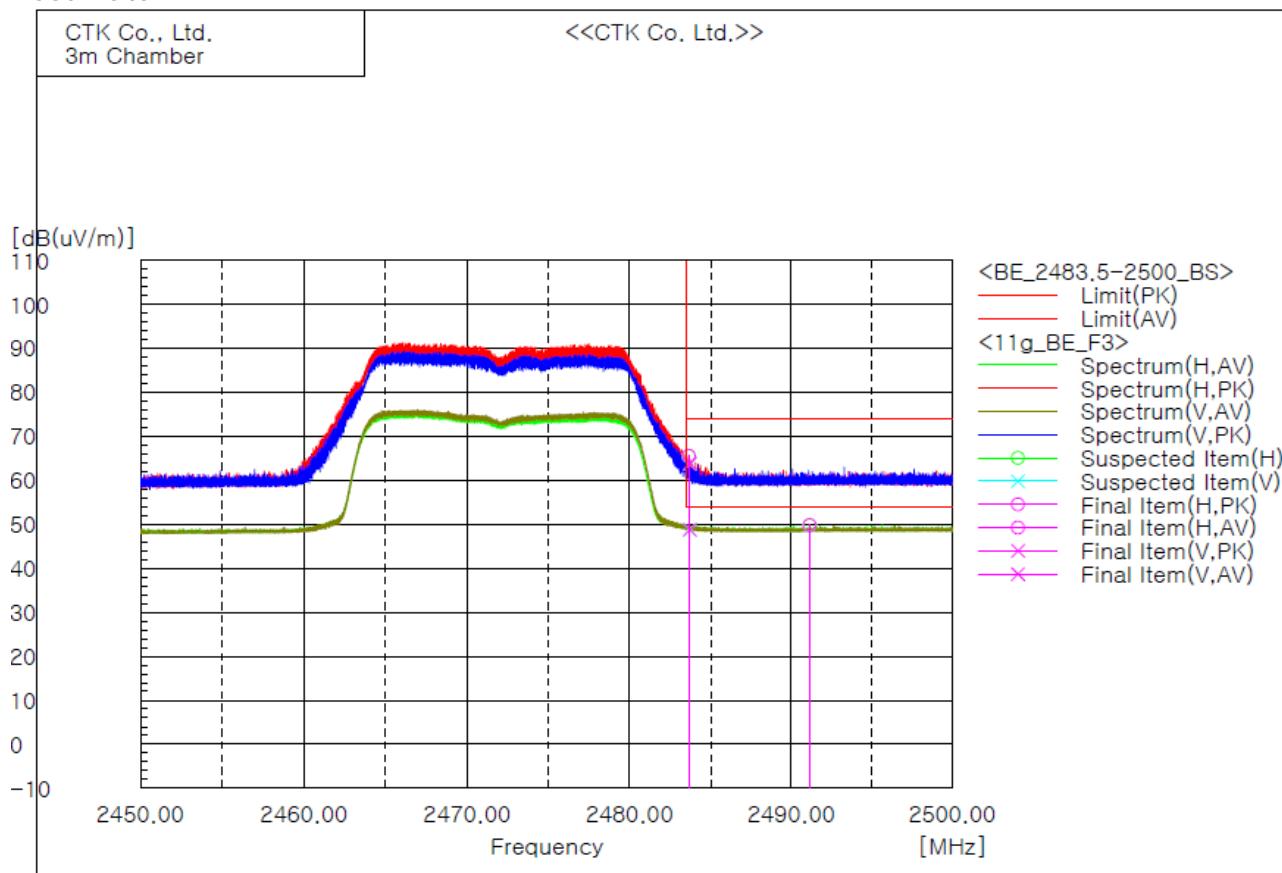Test Data**Remarks**

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (38) / (55)Pages

Test mode : 802.11n-HT20, High channel

The requirements are:

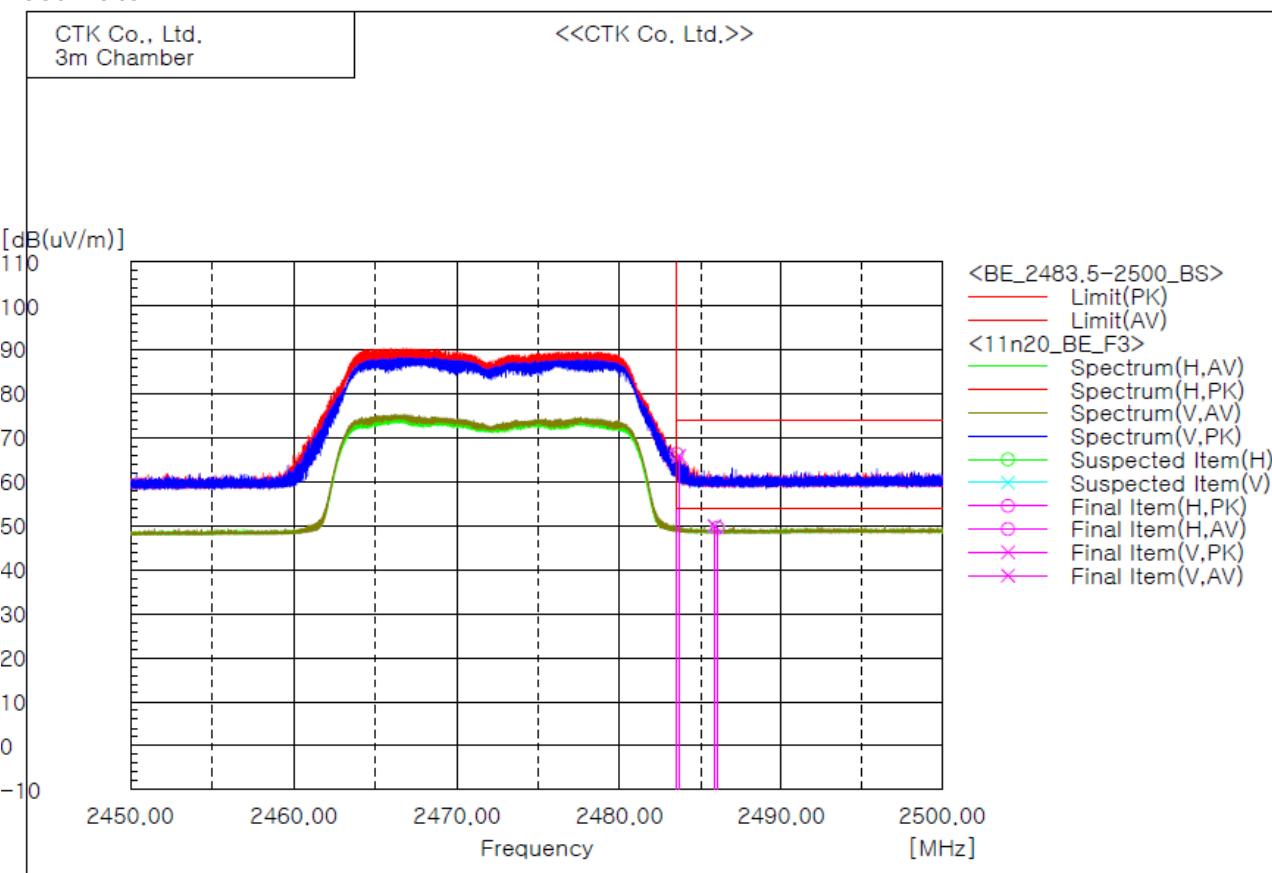 Complies**Test Data****Remarks**

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (39) / (55)Pages

Test mode : 802.11n-HT40, High channel

The requirements are:

Complies

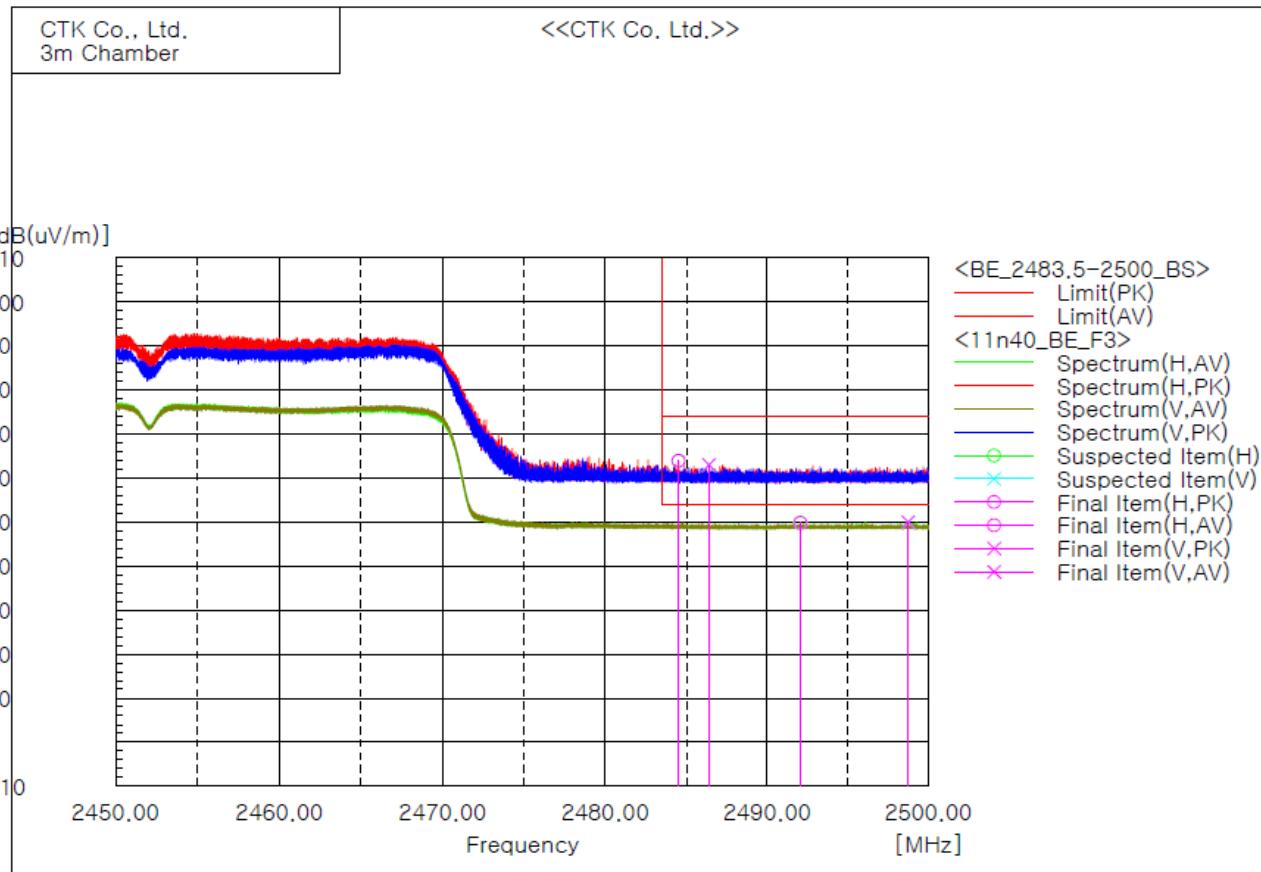Test Data**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2484.521	H	69.2	55.0	-5.3	63.9	49.8	74.0	54.0	10.1	4.2	202.1	192.8
2	2492.054	H	—	—	-5.2	—	—	74.0	54.0	—	—	105.3	0.5
3	2486.394	V	68.3	55.2	-5.3	63.0	50.0	74.0	54.0	11.0	4.0	104.6	185.3
4	2498.734	V	—	—	-5.2	—	—	74.0	54.0	—	—	397.1	359.5

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (40) / (55)Pages

2) Spurious


1. 9 kHz to 30 MHz

Test mode : 802.11b, Middle channel(Worst case)

The requirements are:

Complies

Test Data

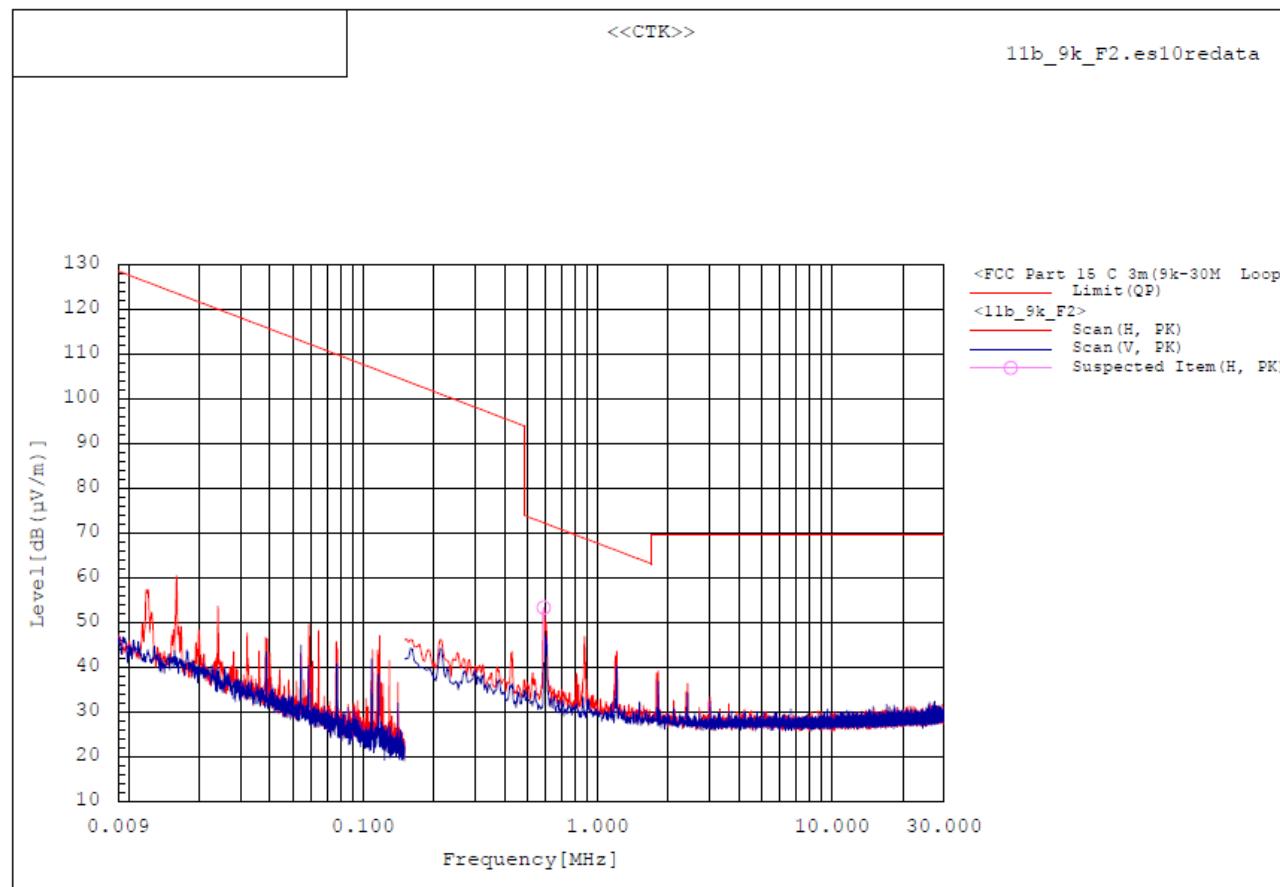

Spectrum Selection

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB (μV)]	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[cm]	[deg]	
1	0.589	H	28.2	25.1	53.3	72.2	18.9	100.0	0.0	

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11g, High channel(Worst case)

The requirements are:

Complies

Test Data

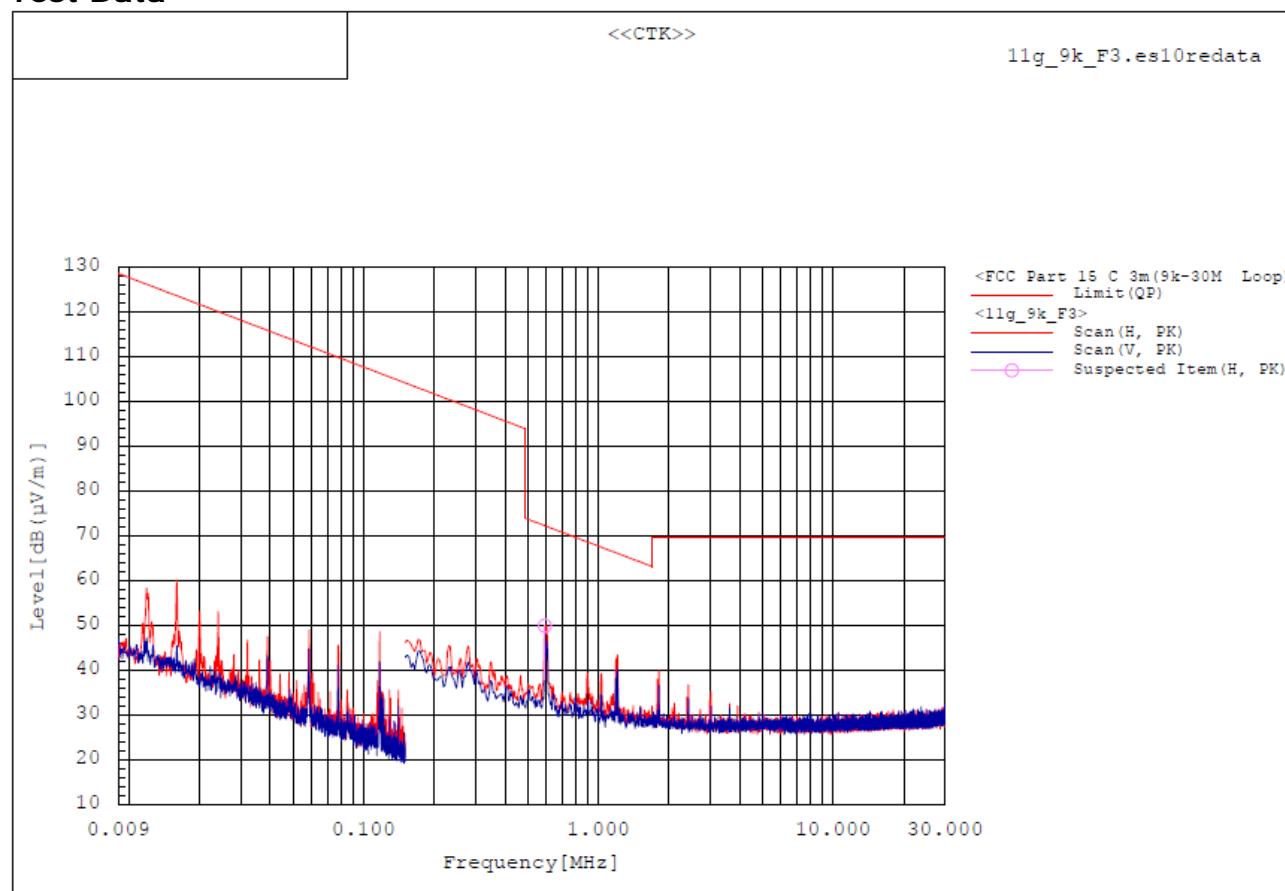

Spectrum Selection

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB(μ V)]	[dB(1/m)]	[dB (μ V/m)]	[dB (μ V/m)]	[dB]	[cm]	[deg]	
1	0.592	H	24.8	25.1	49.9	72.2	22.3	100.0	0.0	

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n-HT20, High channel(Worst case)

The requirements are:

Complies

Test Data

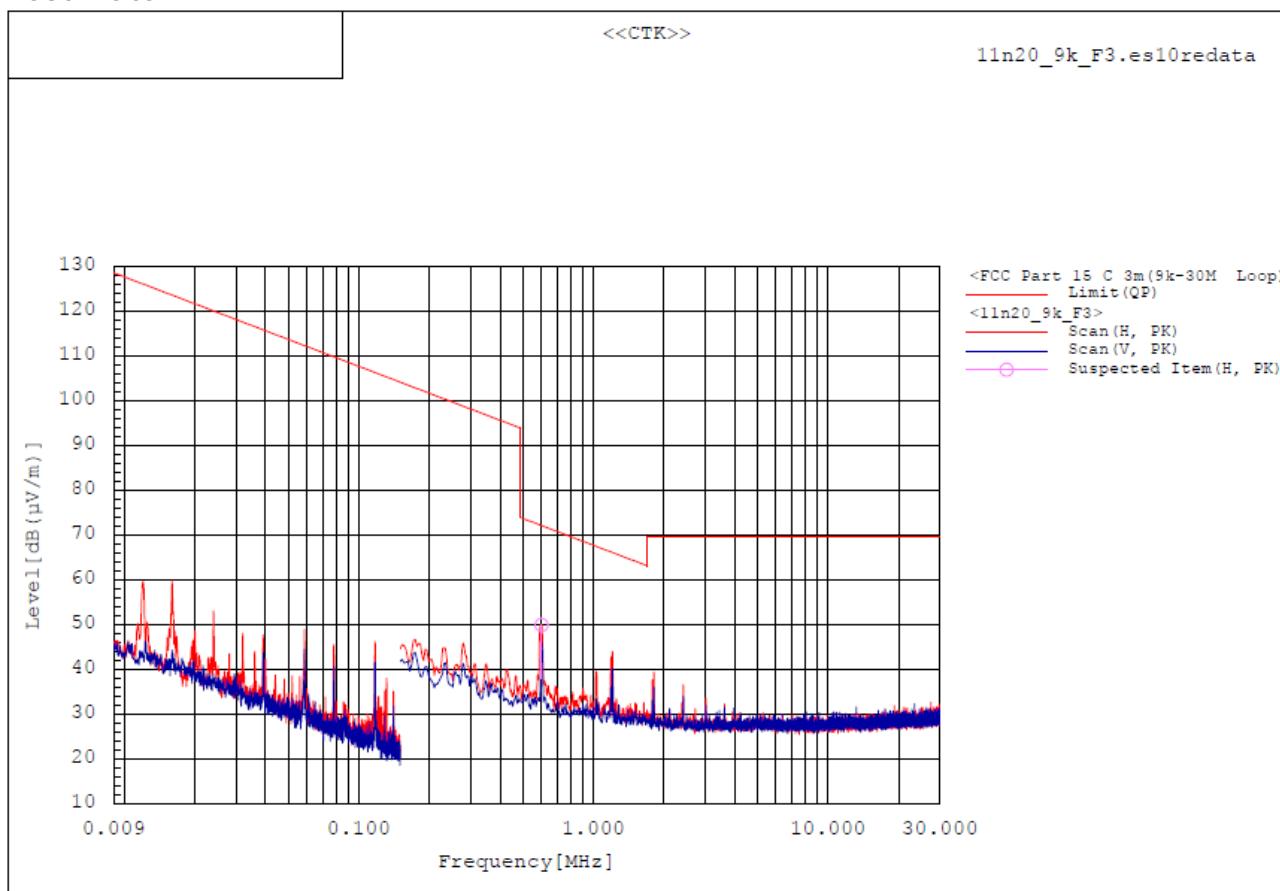

Spectrum Selection										
No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB (μ V)]	[dB (1/m)]	[dB (μ V/m)]	[dB (μ V/m)]	[dB]	[cm]	[deg]	
1	0.601	H	24.8	25.1	49.9	72.0	22.1	100.0	79.3	

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n-HT40, Low channel(Worst case)

The requirements are:

Complies

Test Data

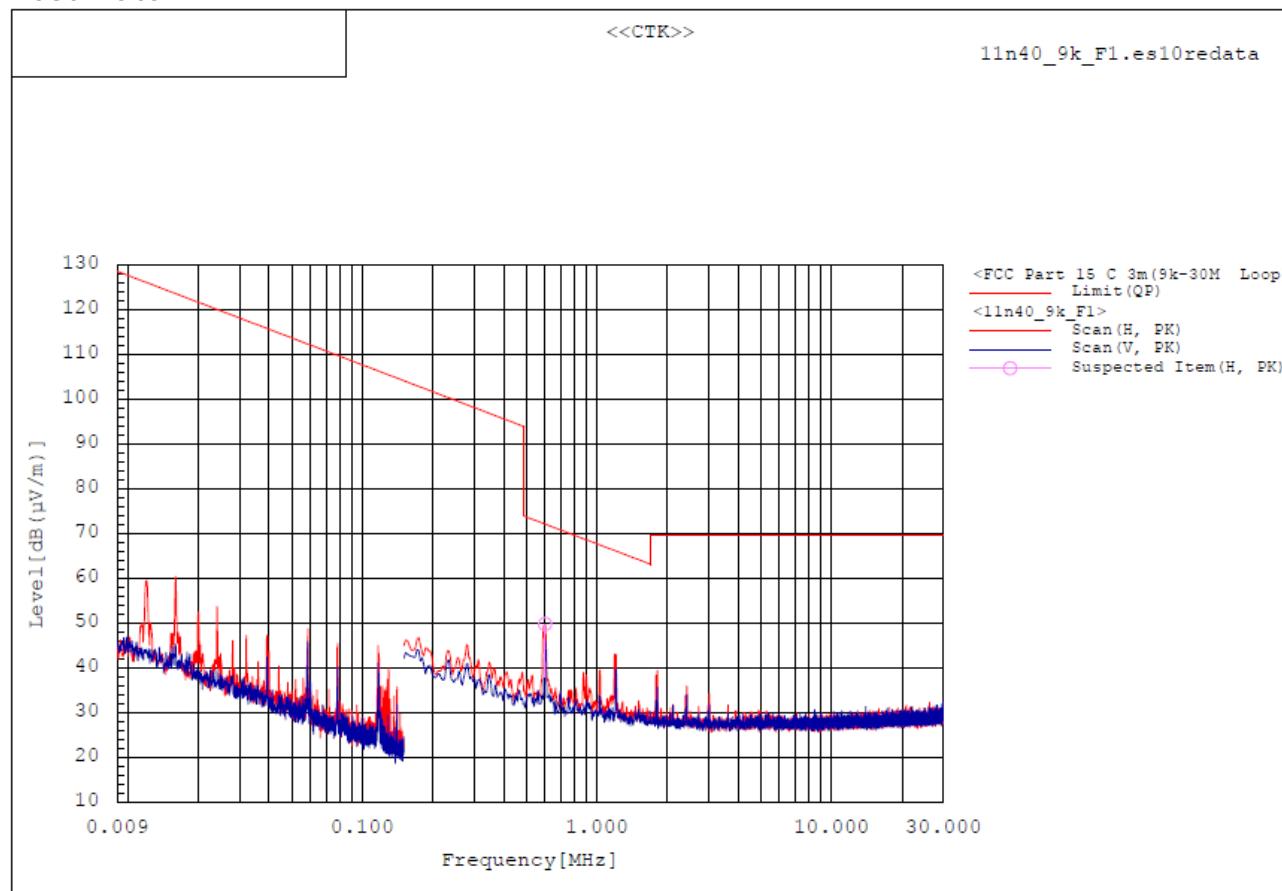

Remark :

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.


2. 30 MHz to 1 GHz

Test mode : 802.11b, Middle channel(Worst case)

The requirements are:

Complies

Test Data

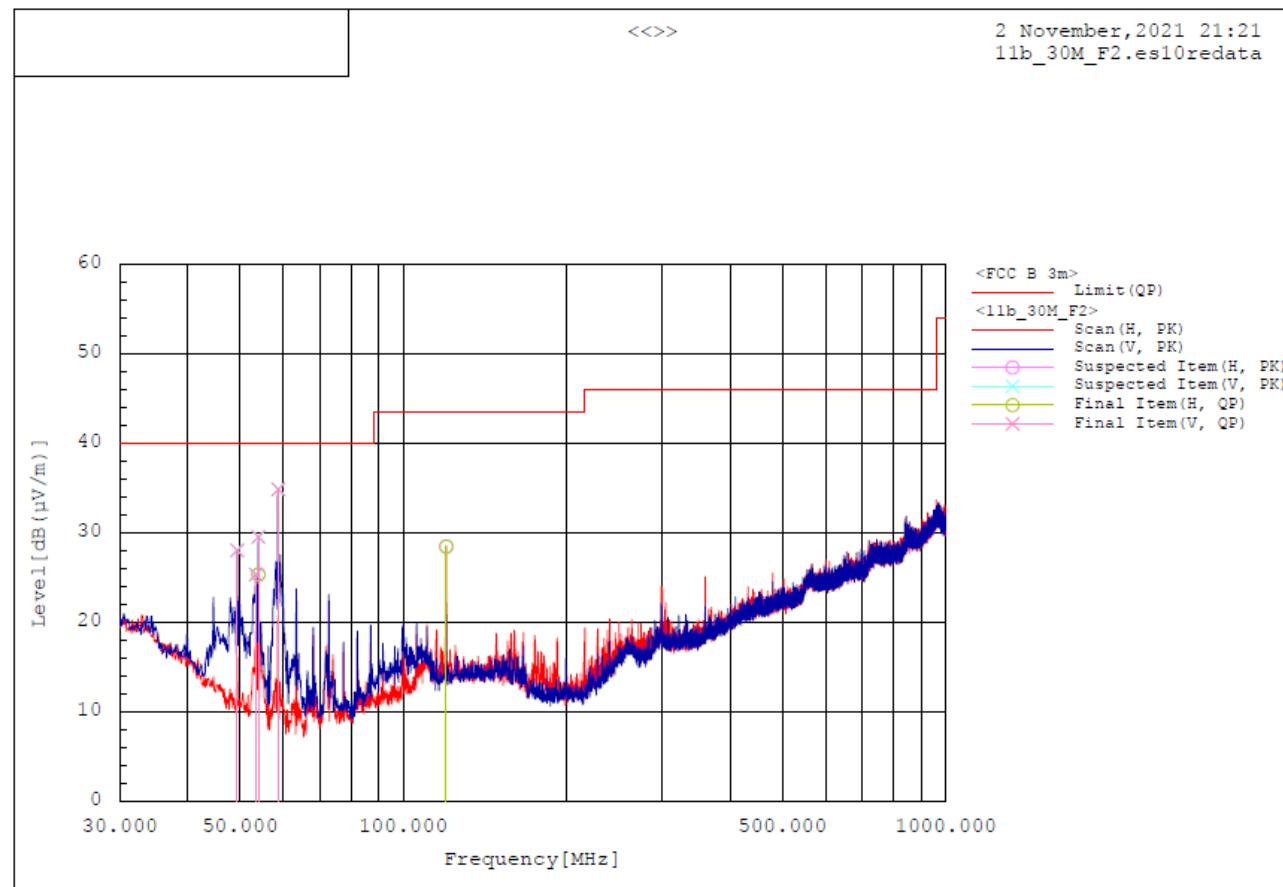

Final Result

No.	Frequency	Pol	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height [cm]	Angle [deg]	Remark
	[MHz]		[dB (μ V)]		[dB (1/m)]	[dB (μ V/m)]	[dB (μ V/m)]			
1	49.400	V	44.3		-16.3	28.0	40.0	12.0	400.0	322.8
2	53.474	V	43.3		-18.0	25.3	40.0	14.7	100.0	1.5
3	54.056	V	47.7		-18.2	29.5	40.0	10.5	100.0	252.0
4	54.056	H	43.5		-18.2	25.3	40.0	14.7	300.1	4.1
5	58.809	V	53.5		-18.7	34.8	40.0	5.2	300.0	266.7
6	120.016	H	40.6		-12.2	28.4	43.5	15.1	400.0	359.1

Result : There are more than 20 dB of margin compared to the limit.

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11g, High channel(Worst case)

The requirements are:

Complies

Test Data

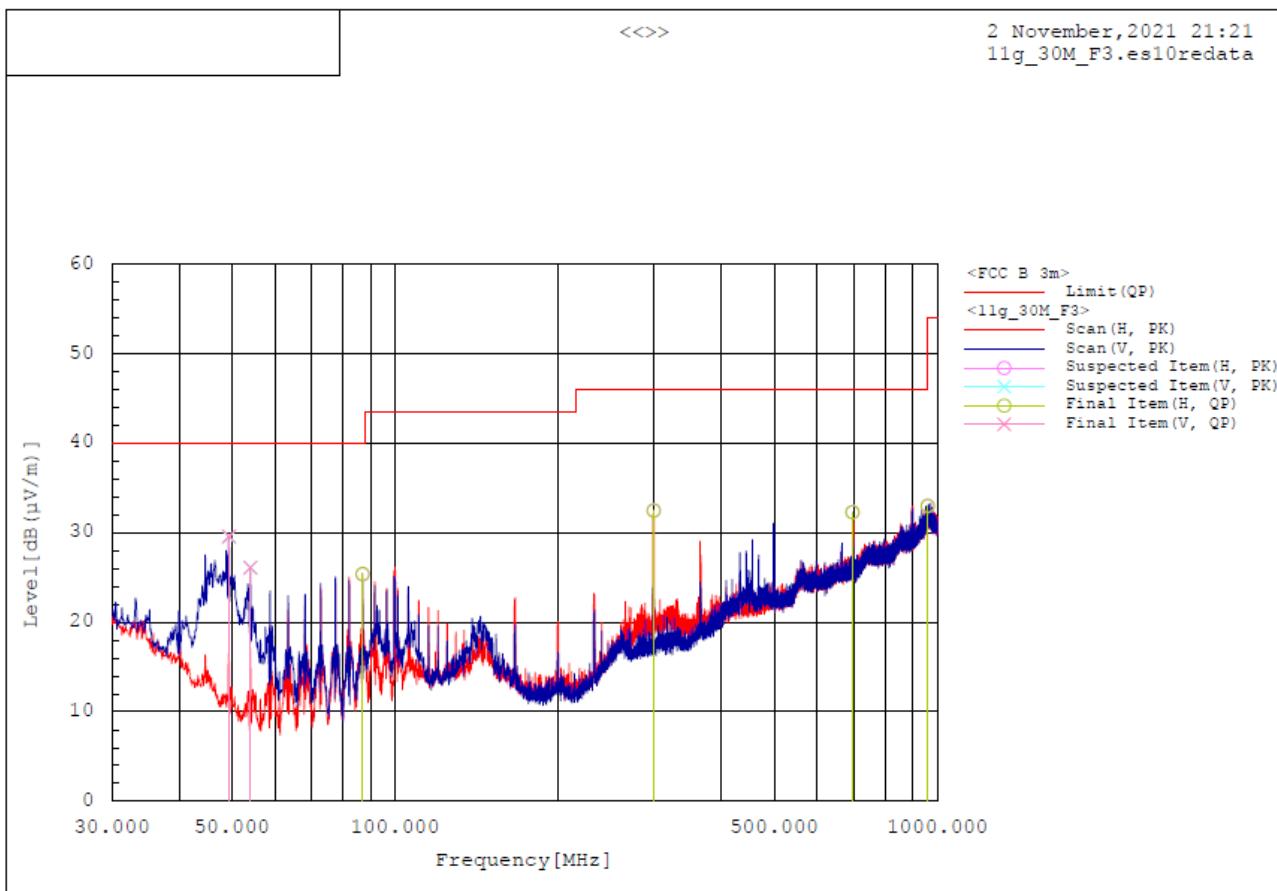

Final Result

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB(μ V)]	[dB(1/m)]	[dB (μ V/m)]	[dB (μ V/m)]	[dB]	[cm]	[deg]	
1	49.400	V	45.9	-16.3	29.6	40.0	10.4	99.9	216.2	
2	54.056	V	44.3	-18.2	26.1	40.0	13.9	99.9	257.2	
3	87.036	H	41.0	-15.6	25.4	40.0	14.6	200.0	306.3	
4	299.854	H	40.9	-8.4	32.5	46.0	13.5	100.0	0.0	
5	697.069	H	30.6	1.7	32.3	46.0	13.7	100.0	0.0	
6	958.969	H	23.8	9.2	33.0	46.0	13.0	100.0	133.7	

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n-HT20, High channel(Worst case)

The requirements are:

Complies

Test Data

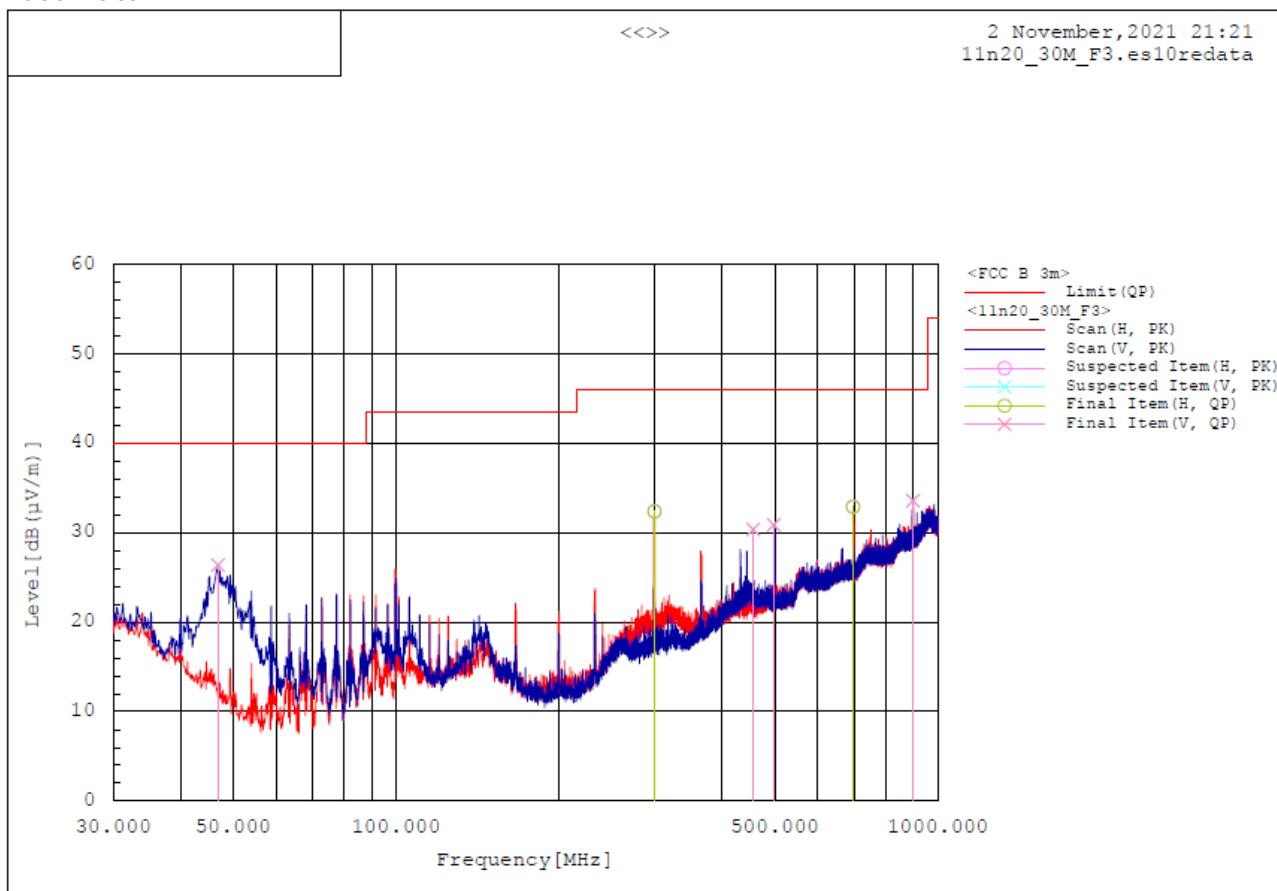

Final Result

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP	[dB(μ V)]	[dB(1/m)]	[dB(μ V/m)]	[dB(μ V/m)]	[dB]	[cm]	[deg]
1	46.878	V	41.4	-15.0	26.4	40.0	13.6	99.9	0.0	
2	299.854	H	40.8	-8.4	32.4	46.0	13.6	100.0	359.9	
3	456.024	V	33.8	-3.4	30.4	46.0	15.6	99.9	176.0	
4	497.928	V	33.4	-2.5	30.9	46.0	15.1	99.9	196.8	
5	697.069	H	31.2	1.7	32.9	46.0	13.1	100.0	115.8	
6	899.799	V	27.2	6.4	33.6	46.0	12.4	99.9	357.4	

Remark :


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n-HT40, Low channel(Worst case)

The requirements are:

Complies

Test Data

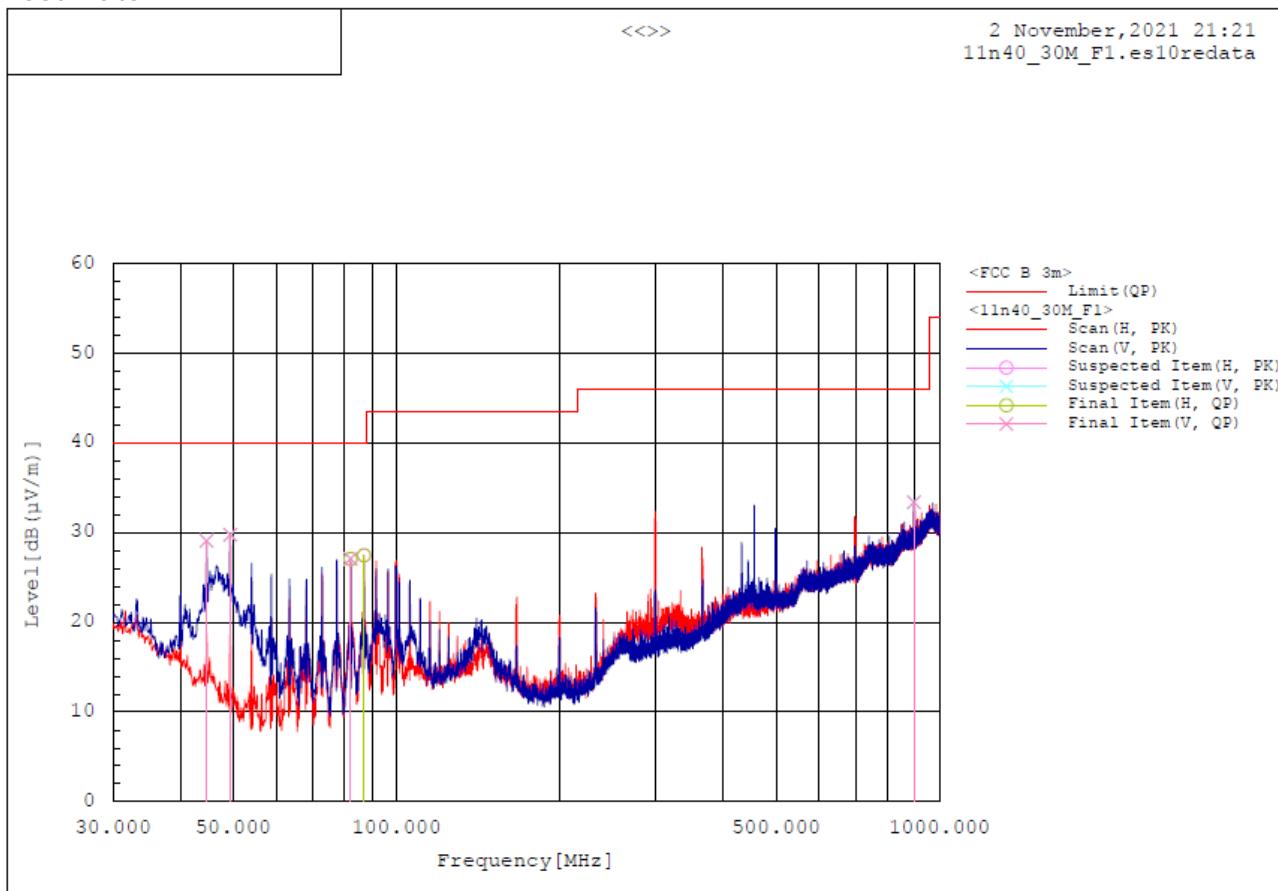

Final Result

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB (μ V)]	[dB (μ V)]	[dB (μ V/m)]	[dB (μ V/m)]	[dB]	[cm]	[deg]	
1	44.647	V	42.8	-13.7	29.1	40.0	10.9	100.0	85.5	
2	49.400	V	46.1	-16.3	29.8	40.0	10.2	100.0	208.9	
3	82.283	V	43.6	-16.5	27.1	40.0	12.9	100.0	266.5	
4	82.283	H	43.6	-16.5	27.1	40.0	12.9	300.0	286.0	
5	87.036	H	43.1	-18.6	27.5	40.0	12.5	300.0	261.4	
6	896.307	V	27.2	6.2	33.4	46.0	12.6	100.0	0.4	

Remark :

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X, Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (48) / (55)Pages


3. 1 GHz to 26.5 GHz

Test mode : 802.11b, Low Channel(Worst case)

The requirements are:

Complies

Test Data

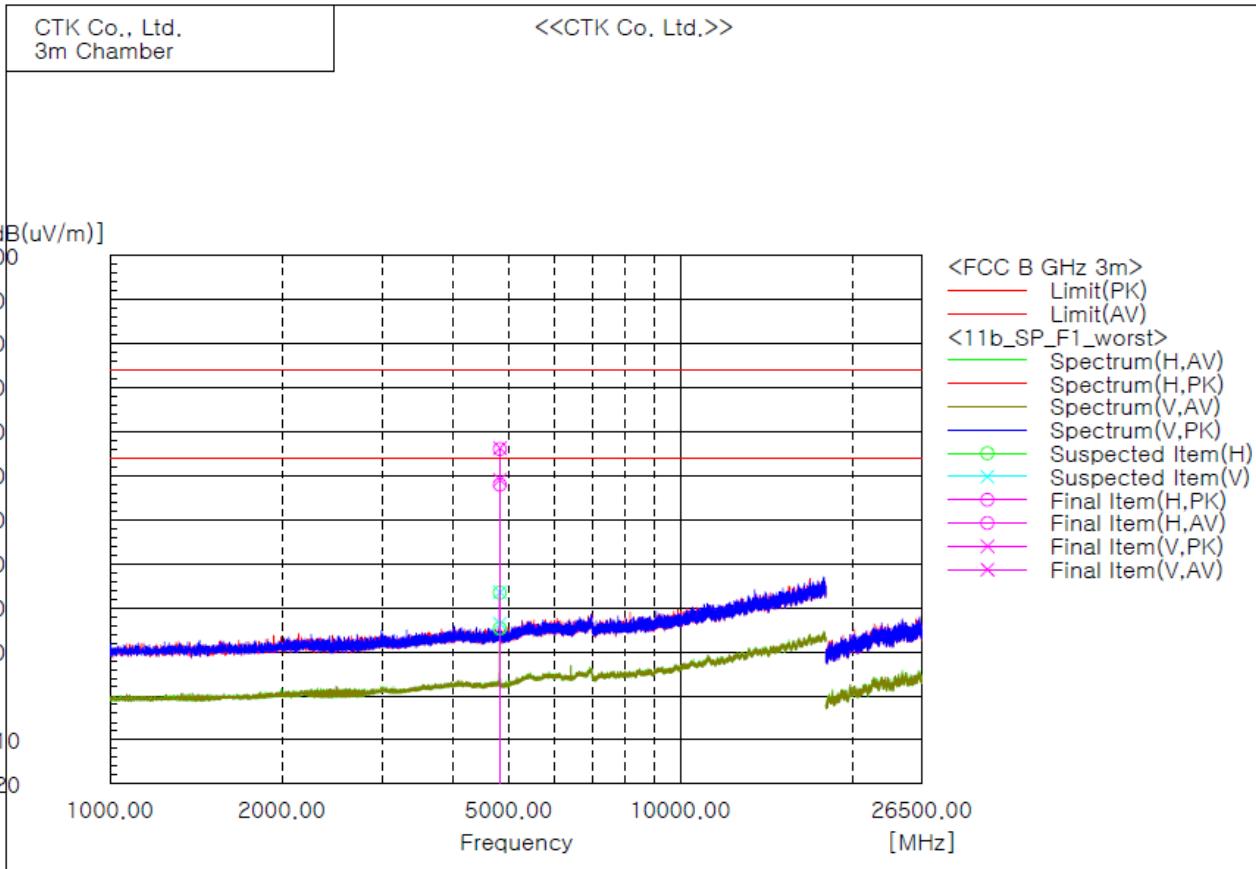

Final Result

No.	Frequency (P) [MHz]	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]	
1	4824.473	V	54.3	47.1	2.0	56.3	49.1	74.0	54.0	17.7	4.9	395.2	10.2
2	4824.473	V	54.3	47.1	2.0	56.3	49.1	74.0	54.0	17.7	4.9	395.2	10.2
3	4824.473	H	54.1	46.0	2.0	56.1	48.0	74.0	54.0	17.7	6.0	102.7	147.5
4	4823.792	H	54.1	46.0	2.0	56.1	48.0	74.0	54.0	17.7	6.0	202.2	44.1

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (49) / (55)Pages

Test mode : 802.11g, Middle channel(Worst case)

The requirements are:

Complies

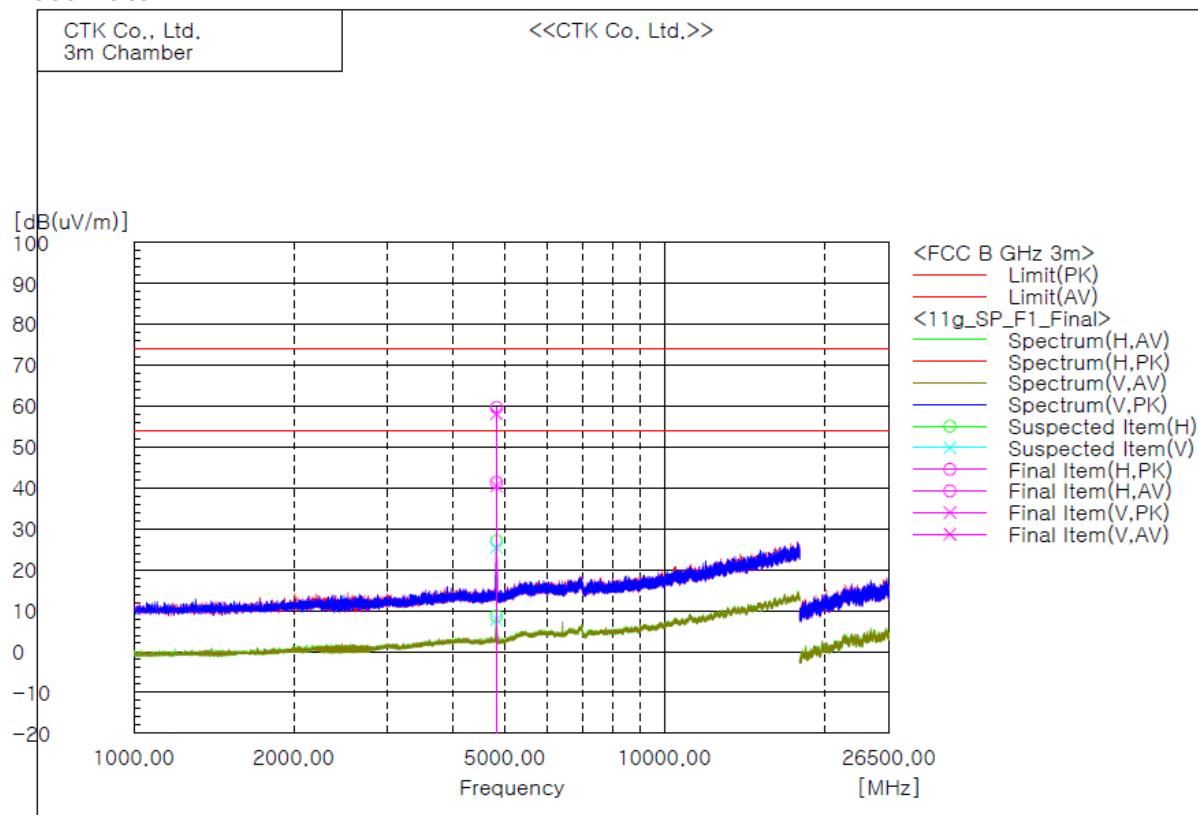Test Data**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	o.f	Result PK [dB(1/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	4824.473	H	56.2	39.4	2.0	58.2	41.4	74.0	54.0	15.8	12.6	203.0	33.9
2	4820.393	V	56.2	38.5	2.0	58.2	40.5	74.0	54.0	13.5	97.0	196.8	180.2
3	4824.473	V	57.7	38.5	2.0	59.7	40.5	74.0	54.0	14.3	13.5	196.8	37.5
4	4826.513	H	57.7	38.5	2.0	59.7	41.4	74.0	54.0	14.3	103.7	103.7	131.8

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (50) / (55)Pages

Test mode : 802.11n-HT20, Middle channel(Worst case)

The requirements are:

Complies

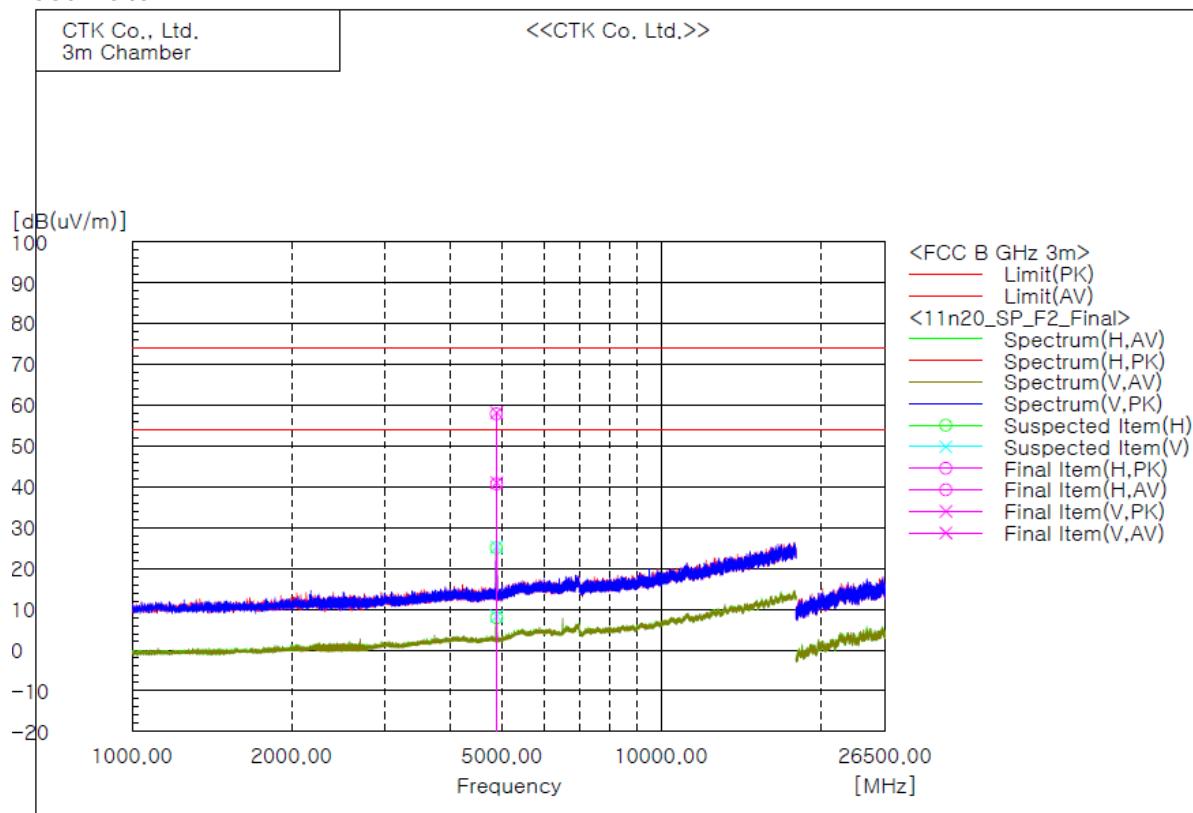Test Data**Remarks**


1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n-HT40, Middle channel(Worst case)

The requirements are:

Complies

Test Data

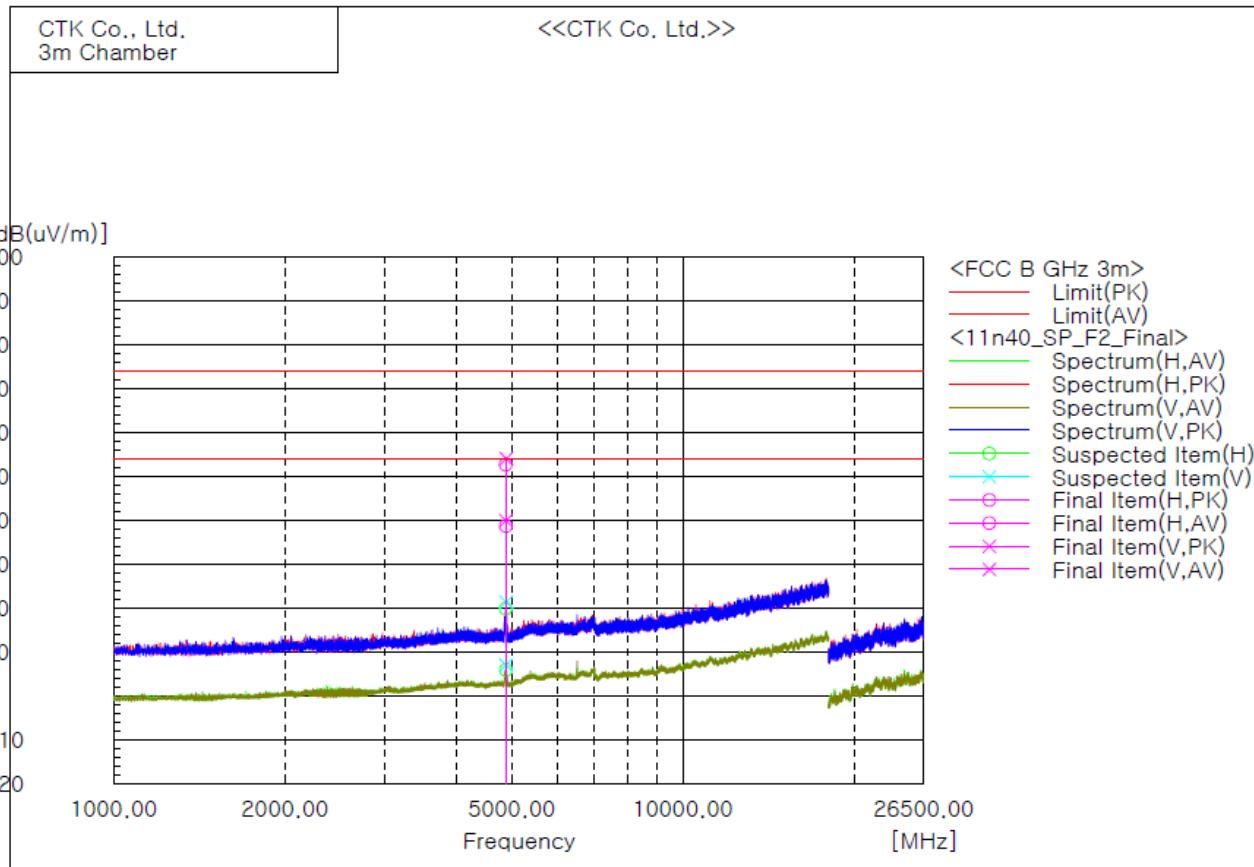

Final Result

No.	Frequency [MHz]	(P) V	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(1/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	4883.635	V	51.9	37.7	2.1	54.0	39.8	74.0	54.0	—	14.2	393.8	359.4
2	4889.755	V	—	—	2.1	—	—	74.0	54.0	—	20.0	102.9	155.1
3	4884.315	H	—	36.5	2.1	54.0	38.6	74.0	54.0	—	15.4	202.0	35.7

Remarks

1. The Unwanted emission was measured in the following position:
EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-01927
Page (52) / (55)Pages

4.6 AC Power Line Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.


** A linear average detector is required.

Test Results :

The requirements are:


Complies

Test mode : 802.11n20(Worst case)
[L1]

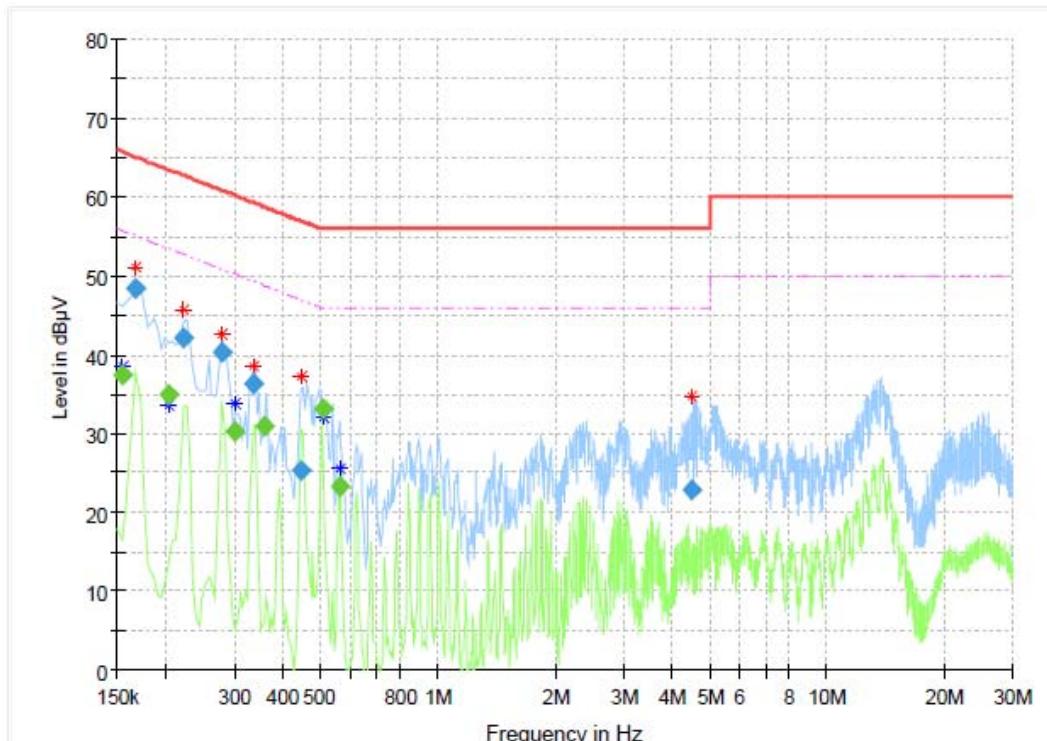

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	---	37.49	55.75	18.26	1000.0	9.000	N	ON	10.0
0.168000	48.45	---	65.06	16.61	1000.0	9.000	N	ON	10.2
0.204000	---	35.04	53.45	18.41	1000.0	9.000	N	ON	10.0
0.222000	42.04	---	62.74	20.70	1000.0	9.000	N	ON	9.9
0.280500	40.34	---	60.80	20.46	1000.0	9.000	N	ON	9.9
0.303000	---	30.33	50.16	19.83	1000.0	9.000	N	ON	9.9
0.334500	36.31	---	59.34	23.03	1000.0	9.000	N	ON	10.0
0.357000	---	30.96	48.80	17.84	1000.0	9.000	N	ON	10.1
0.447000	25.37	---	56.93	31.56	1000.0	9.000	N	ON	10.1
0.510000	---	33.25	46.00	12.75	1000.0	9.000	N	ON	10.1
0.559500	---	23.38	46.00	22.62	1000.0	9.000	N	ON	10.1
4.519500	22.78	---	56.00	33.22	1000.0	9.000	N	ON	10.1

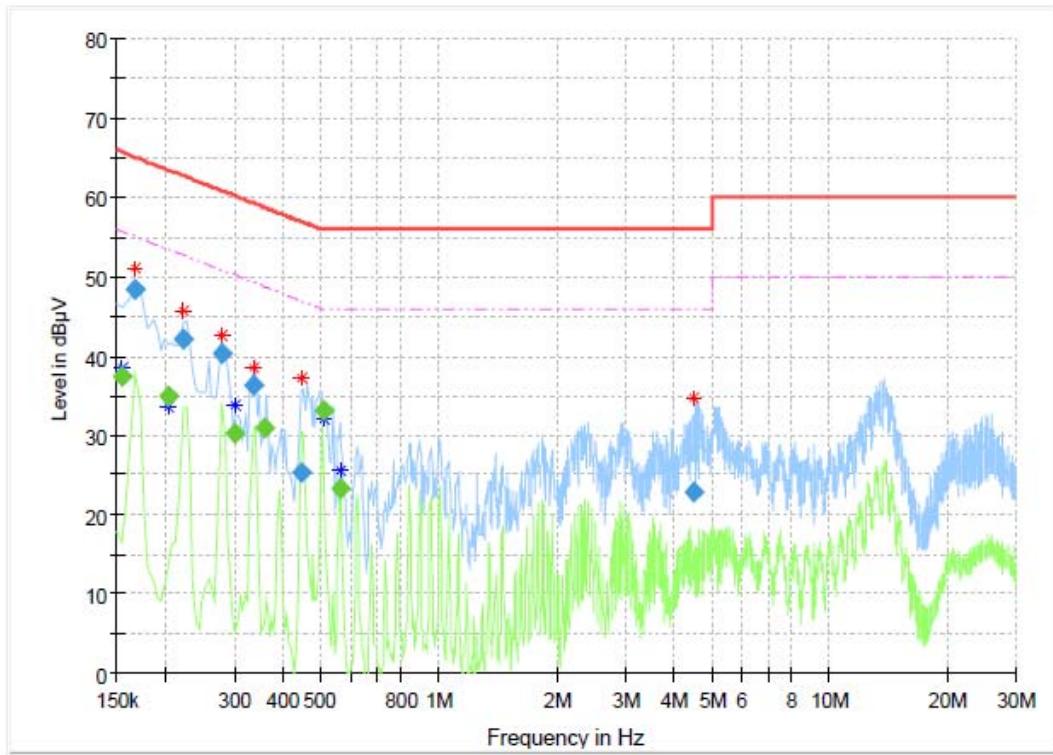[NEUTRAL]

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	---	37.49	55.75	18.26	1000.0	9.000	N	ON	10.0
0.168000	48.45	---	65.06	16.61	1000.0	9.000	N	ON	10.2
0.204000	---	35.04	53.45	18.41	1000.0	9.000	N	ON	10.0
0.222000	42.04	---	62.74	20.70	1000.0	9.000	N	ON	9.9
0.280500	40.34	---	60.80	20.46	1000.0	9.000	N	ON	9.9
0.303000	---	30.33	50.16	19.83	1000.0	9.000	N	ON	9.9
0.334500	36.31	---	59.34	23.03	1000.0	9.000	N	ON	10.0
0.357000	---	30.96	48.80	17.84	1000.0	9.000	N	ON	10.1
0.447000	25.37	---	56.93	31.56	1000.0	9.000	N	ON	10.1
0.510000	---	33.25	46.00	12.75	1000.0	9.000	N	ON	10.1
0.559500	---	23.38	46.00	22.62	1000.0	9.000	N	ON	10.1
4.519500	22.78	---	56.00	33.22	1000.0	9.000	N	ON	10.1

 <p>CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 <small>The Prime Leader of Global Regulatory Certification</small> </p>	<p>Report No.: CTK-2022-01927 Page (55) / (55)Pages</p>	
---	---	--

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2021-10-12	2022-10-12
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2022-03-25	2023-03-25
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2022-05-04	2023-05-04
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
5	Bilog Antenna	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
6	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2021-08-25	2022-08-25
7	ATTENUATOR	PASTERNACK	PE7AP006-06	L20210504000 023	2021-08-25	2022-08-25
8	Preamplifier	Agilent	8449B	3008A00620	2022-05-10	2023-05-10
9	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2022-04-14	2023-04-14
10	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2021-11-16	2022-11-16
11	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2021-11-15	2022-11-15
12	Band Reject Filter	Micro Tronics	BRM50702	G444	2021-10-08	2022-10-08
13	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2022-01-12	2023-01-12
14	DC Power Supply	HP	E3632A	MY40008023	2022-04-18	2023-04-18

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable(conducted)	Junkosha Inc.	MWX221	2008S240	2022-06-02
2	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2022-04-12
3	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2022-04-12
4	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2022-04-14
5	RF Cable (1GHz-18GHz Radiated)	Rosenberger	NONE	1520.9927.00	2022-04-14
6	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	9S18	TPC2204060007	2022-04-14
7	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2372/2	2022-04-14
8	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2022-04-14
9	RF Cable (18GHz-26.5GHz Radiated)	Sensorview Co., LTD	9S40	TP210713-001	2022-04-14

-END-