

TEST REPORT

Applicant:	HYPER TOY COMPANY
Address:	177 Malaga Park Drive, Malaga, NJ 08328

Manufacturer or Supplier	HEXXA (HK) CO. LTD.
Address	Unit 1210-11, 12/F, Tower A, New Mandarin Plaza, 14 Science Museum Road, Tsim Sha Tsui East, KLN, H.K.
Product:	PAVATI RC BOAT
Brand Name:	N/A
Model:	087052013
Additional Model & Model Difference	087052010,087052011,HYP-RC-118-3133,HYP-RC-118-3111,HYP-RC-118-3122; see items 3.1
Date of tests:	Jun. 04, 2018 ~ Jun. 12, 2018

the tests have been carried out according to the requirements of the following standard:

☒ FCC Part 15, Subpart C, Section 15.249

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Breeze Jiang Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	 Date: Jun. 15, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES.....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4 DESCRIPTION OF SUPPORT UNITS.....	7
4. TEST TYPES AND RESULTS.....	8
4.1 RADIATED EMISSION MEASUREMENT	8
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	8
4.1.2 TEST INSTRUMENTS.....	9
4.1.3 TEST PROCEDURES	10
4.1.4 DEVIATION FROM TEST STANDARD	10
4.1.5 TEST SETUP.....	11
4.1.6 EUT OPERATING CONDITIONS	12
4.1.7 TEST RESULTS	13
4.2 20dB BANDWIDTH MEASUREMENT	20
4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT	20
4.2.2 TEST INSTRUMENTS	20
4.2.3 TEST PROCEDURE	21
4.2.4 DEVIATION FROM TEST STANDARD.....	21
4.2.5 TEST SETUP	21
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS.....	22
5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....	24
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	25



Test Report No.: RF180604N035-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180604N035-2	Original release	Jun. 15, 2018

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	N/A	Powered from battery
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.93dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PAVATI RC BOAT
MODEL NO.	087052013
ADDITIONAL MODELS	087052010,087052011,HYP-RC-118-3133,HYP-RC-118-3111, HYP-RC-118-3122
FCC ID	2AMOVRC1183111-R
NOMINAL VOLTAGE	DC 3.2V from Li-ion battery
MODULATION TECHNOLOGY	GFSK
OPERATING FREQUENCY	2410-2475MHz
ANTENNA TYPE	Wire Antenna, with 0dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 180604N035) for detailed product photo.
4. Additional models 087052010,087052011,HYP-RC-118-3133,HYP-RC-118-3111,HYP-RC-118-3122 are identical with the test model 087052013 except the model number for marketing purpose
5. When the EUT charging that wireless function can't working, the charging mode was tested in the FCC Part 15B(sDOC) report.(report No.: FS180604N035)

3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following mode.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	√	√	-	√	DC 3.2V from Fully Battery

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
BW: 20db bandwidth

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

Following channel(s) was (were) selected for the test as listed below.

TESTED CHANNEL	TESTED FREQUENCY
Low	2410 MHz
Middle	2443 MHz
High	2475 MHz

Channel List

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2410MHz	23	2432MHz	45	2454MHz
2	2411MHz	24	2433MHz	46	2455MHz
3	2412MHz	25	2434MHz	47	2456MHz
4	2413MHz	26	2435MHz	48	2457MHz
5	2414MHz	27	2436MHz	49	2458MHz
6	2415MHz	28	2437MHz	50	2459MHz
7	2416MHz	29	2438MHz	51	2460MHz
8	2417MHz	30	2439MHz	52	2461MHz
9	2418MHz	31	2440MHz	53	2462MHz
10	2419MHz	32	2441MHz	54	2463MHz
11	2420MHz	33	2442MHz	55	2464MHz
12	2421MHz	34	2443MHz	56	2465MHz
13	2422MHz	35	2444MHz	57	2466MHz
14	2423MHz	36	2445MHz	58	2467MHz
15	2424MHz	37	2446MHz	59	2468MHz
16	2425MHz	38	2447MHz	60	2469MHz
17	2426MHz	39	2448MHz	61	2470MHz
18	2427MHz	40	2449MHz	62	2471MHz
19	2428MHz	41	2450MHz	63	2472MHz
20	2429MHz	42	2451MHz	64	2473MHz
21	2430MHz	43	2452MHz	65	2474MHz
22	2431MHz	44	2453MHz	66	2475MHz

Note: The more detailed channel, please refer to the product specifications

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 55%RH	DC 3.2V from Fully Battery	Hardy
BW	25deg. C, 55%RH	DC 3.2V from Fully Battery	Hardy
PLC	-	-	-

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.249

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 21,18	Mar. 20,19
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 31,18	May 30,19
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 18,18	Apr. 18,19
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Jul. 28, 17	Jul. 27, 18
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jun. 02,18	Jun. 01,19
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	May 05,18	May 04,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,18	Feb. 09,19
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 18,18	Apr. 18,19
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 08,17	Nov. 07,18
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP


Below 30MHz test setup

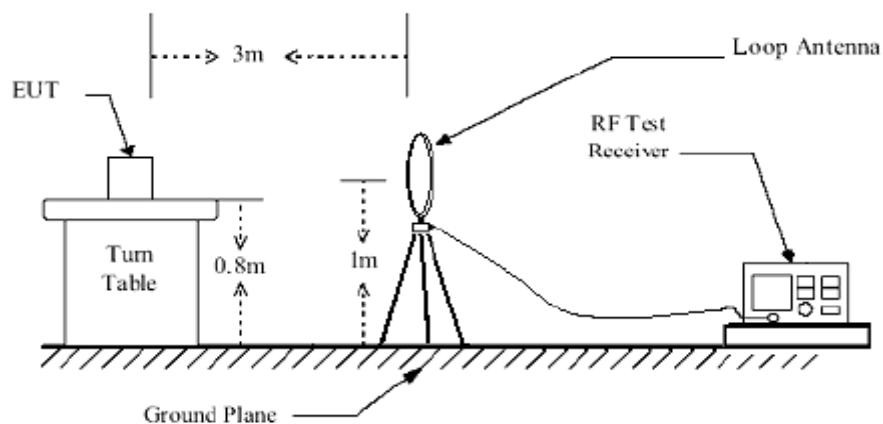

Below 1GHz test setup

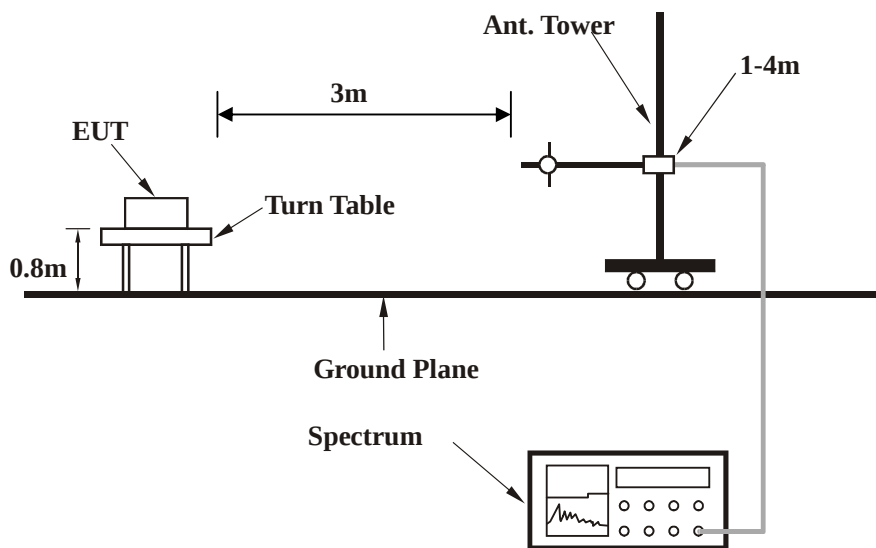

Above 1GHz test setup

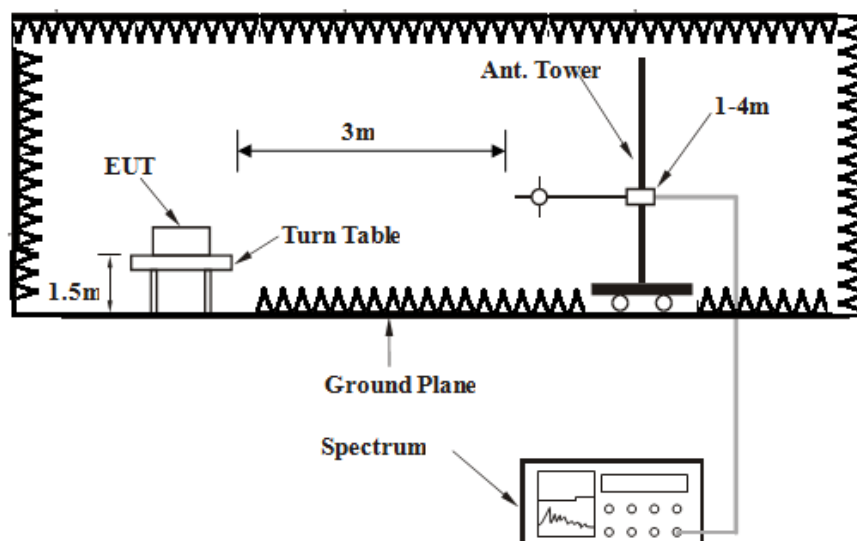

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.1.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.10	20.62 QP	40.00	-19.38	1.00 H	152	41.11	-20.49
2	469.92	22.58 QP	46.00	-23.42	1.00 H	141	29.99	-7.41
3	563.19	24.84 QP	46.00	-21.16	1.00 H	36	28.67	-3.83
4	658.01	26.20 QP	46.00	-19.80	1.00 H	258	29.37	-3.17
5	738.85	26.98 QP	46.00	-19.02	1.00 H	74	28.04	-1.06
6	914.50	32.63 QP	46.00	-13.37	1.00 H	27	32.84	-0.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

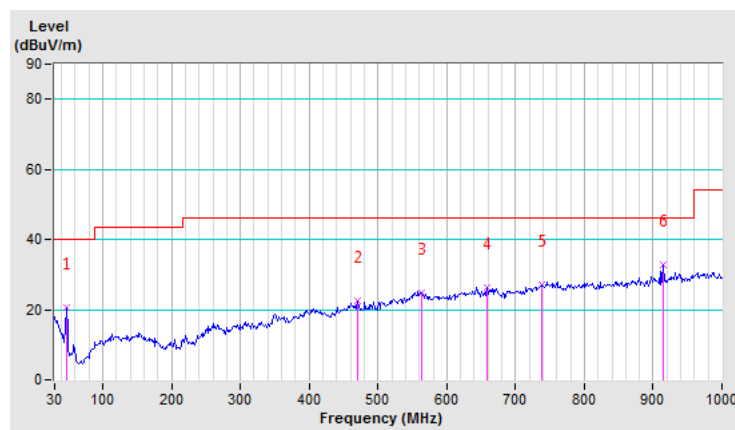


CHANNEL	TX Middle Channel	DETECTOR	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz	FUNCTION	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.10	16.57 QP	40.00	-23.43	1.00 V	235	37.06	-20.49
2	155.91	11.27 QP	43.50	-32.23	1.00 V	324	27.79	-16.52
3	256.96	14.38 QP	46.00	-31.62	1.00 V	58	27.99	-13.61
4	410.85	18.63 QP	46.00	-27.37	1.00 V	153	26.94	-8.31
5	575.62	21.24 QP	46.00	-24.76	1.00 V	239	25.74	-4.50
6	656.46	25.03 QP	46.00	-20.97	1.00 V	33	28.19	-3.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

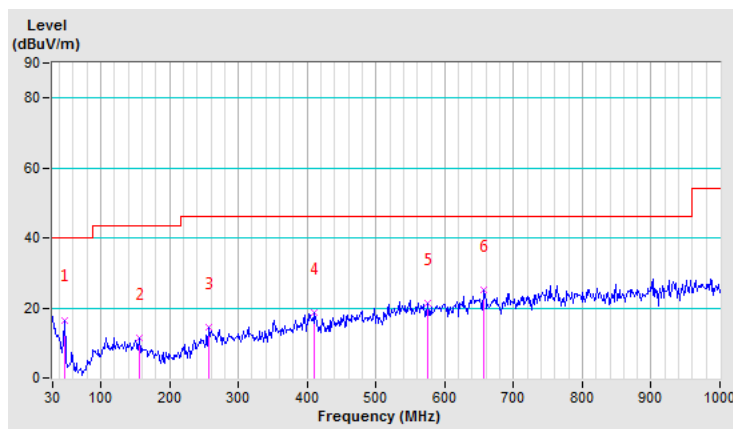

ABOVE 1GHz WORST-CASE DATA:

CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	63.34 PK	74.00	-10.66	1.36 H	247	60.46	2.88
2	2400.00	31.02 AV	54.00	-22.98	1.36 H	247	28.14	2.88
3	*2410.00	99.22 PK	114.00	-14.78	1.30 H	269	96.30	2.92
4	*2410.00	66.90 AV	94.00	-27.10	1.30 H	269	63.98	2.92
5	4820.00	56.02 PK	74.00	-17.98	1.30 H	269	49.68	6.34
6	4820.00	23.70 AV	54.00	-30.30	1.30 H	269	17.36	6.34
7	7230.00	55.85 PK	74.00	-18.15	1.30 H	360	46.56	9.29
8	7230.00	23.53 AV	54.00	-30.47	1.30 H	360	14.24	9.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2367.21	61.87 PK	74.00	-12.13	1.23 V	249	59.10	2.77
2	2367.21	29.55 AV	54.00	-24.45	1.23 V	249	26.78	2.77
3	2400.00	62.60 PK	74.00	-11.40	1.36 V	247	59.72	2.88
4	2400.00	30.28 AV	54.00	-23.72	1.36 V	247	27.40	2.88
5	*2410.00	99.20 PK	114.00	-14.80	1.02 V	157	96.28	2.92
6	*2410.00	66.88 AV	94.00	-27.12	1.02 V	157	63.96	2.92
7	4820.00	52.03 PK	74.00	-21.97	1.25 V	102	45.69	6.34
8	4820.00	19.71 AV	54.00	-34.29	1.25 V	102	13.37	6.34
9	7230.00	56.58 PK	74.00	-17.42	1.03 V	263	47.29	9.29
10	7230.00	24.26 AV	54.00	-29.74	1.03 V	263	14.97	9.29

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Band edge Plot

2400MHz Horizontal

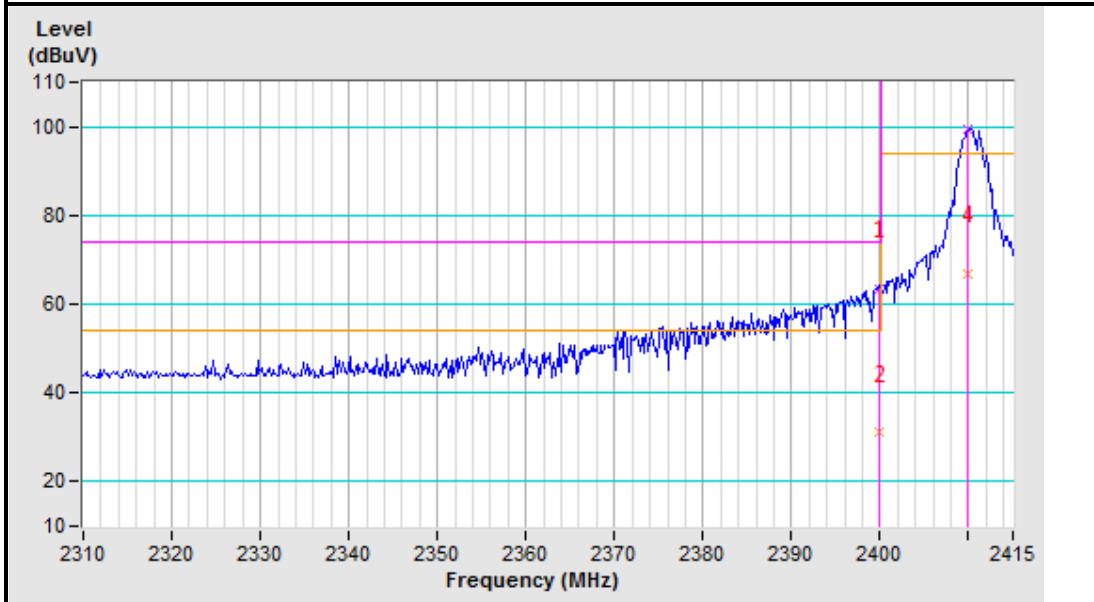

2400MHz Vertical

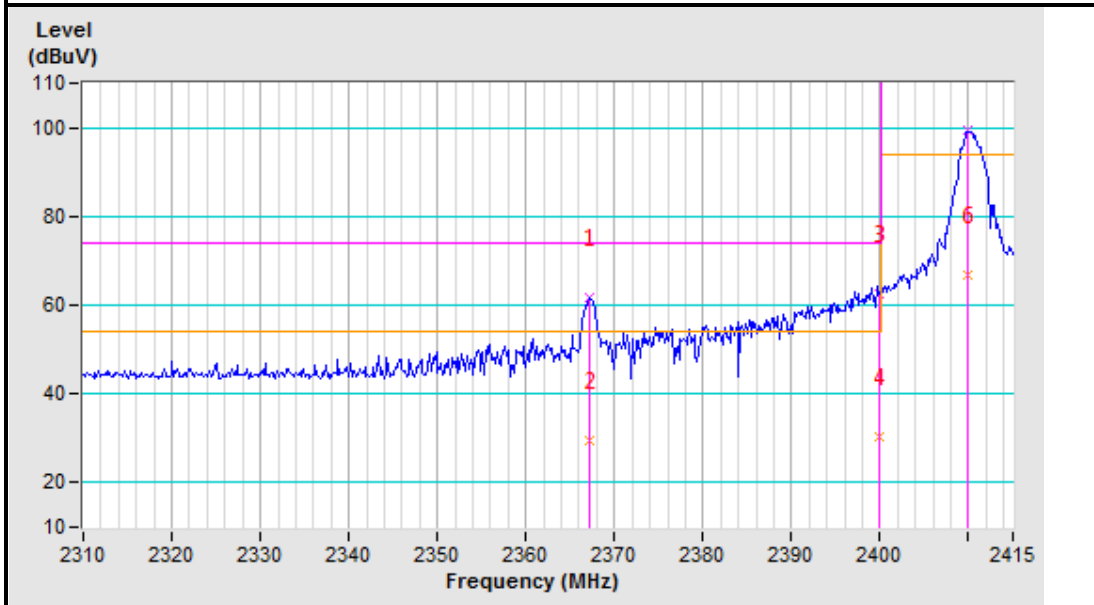

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2443.00	98.95 PK	114.00	-15.05	1.30 H	26	95.92	3.03
2	*2443.00	66.63 AV	94.00	-27.37	1.30 H	26	63.60	3.03
3	4886.00	53.58 PK	74.00	-20.42	1.36 H	247	47.20	6.38
4	4886.00	21.26 AV	54.00	-32.74	1.36 H	247	14.88	6.38
5	7329.00	52.03 PK	74.00	-21.97	1.30 H	232	42.78	9.25
6	7329.00	19.71 AV	54.00	-34.29	1.30 H	232	10.46	9.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2443.00	98.52 PK	114.00	-15.48	1.30 V	269	95.49	3.03
2	*2443.00	66.20 AV	94.00	-27.80	1.30 V	269	63.17	3.03
3	4886.00	55.57 PK	74.00	-18.43	1.02 V	147	49.19	6.38
4	4886.00	22.25 AV	54.00	-31.75	1.02 V	147	15.87	6.38
5	7329.00	52.62 PK	74.00	-21.38	1.36 V	249	43.37	9.25
6	7329.00	20.30 AV	54.00	-33.70	1.36 V	249	11.05	9.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.


CHANNEL	TX High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	96.78 PK	114.00	-17.22	1.36 H	258	93.65	3.13
2	*2475.00	64.46 AV	94.00	-29.54	1.36 H	258	61.33	3.13
3	2483.50	63.09 PK	74.00	-10.91	1.25 H	169	59.93	3.16
4	2483.50	30.77 AV	54.00	-23.23	1.25 H	169	27.61	3.16
5	4950.00	52.28 PK	74.00	-21.72	1.36 H	269	45.85	6.43
6	4950.00	19.96 AV	54.00	-34.04	1.36 H	269	13.53	6.43
7	7425.00	52.69 PK	74.00	-21.31	1.69 H	248	43.49	9.20
8	7425.00	20.37 AV	54.00	-33.63	1.69 H	248	11.17	9.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	96.71 PK	114.00	-17.29	1.25 V	106	93.58	3.13
2	*2475.00	64.39 AV	94.00	-29.61	1.25 V	106	61.26	3.13
3	2483.50	64.18 PK	74.00	-9.82	1.00 V	250	61.02	3.16
4	2483.50	31.86 AV	54.00	-22.14	1.00 V	250	28.70	3.16
5	4950.00	51.27 PK	74.00	-22.73	1.30 V	222	44.84	6.43
6	4950.00	18.95 AV	54.00	-35.05	1.30 V	222	12.52	6.43
7	7425.00	53.28 PK	74.00	-20.72	1.69 V	55	44.08	9.20
8	7425.00	20.96 AV	54.00	-33.04	1.69 V	55	11.76	9.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Band edge Plot

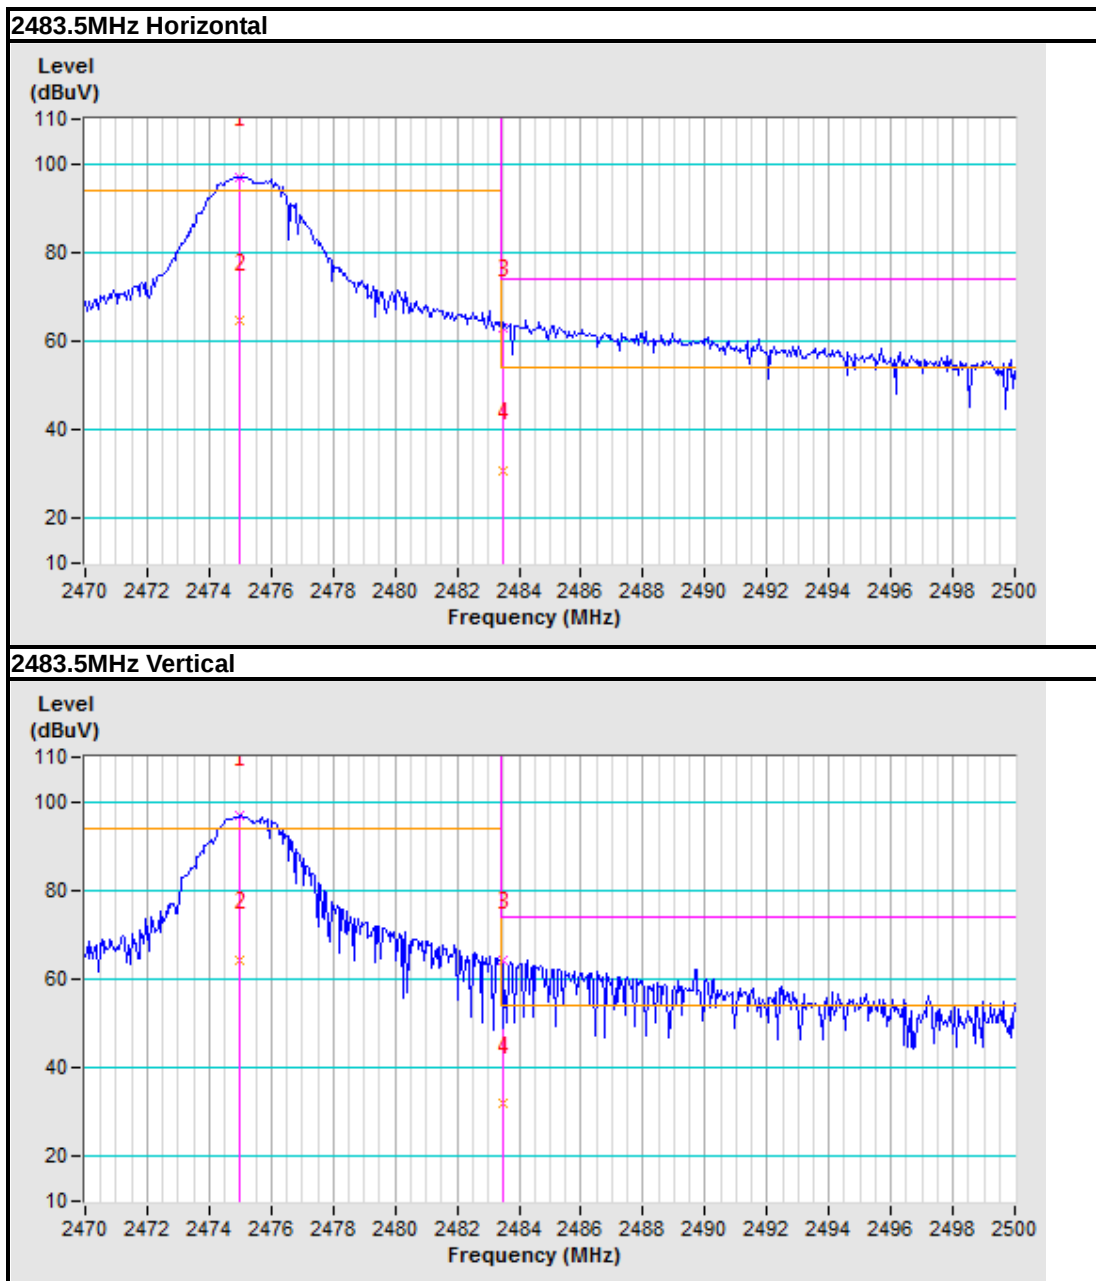

4.2 20dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 19,18	May 18,19
Power Sensor	Keysight	U2021XA	MY55060018	May 19,18	May 18,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 17	Oct.20, 18
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,17	Sep. 04,18
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,17	Nov. 07,18
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 17	Aug.31, 18
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP




4.2.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.2.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2410	1.3821
Middle	2443	1.5847
High	2475	3.7300


Test Data: Low channel

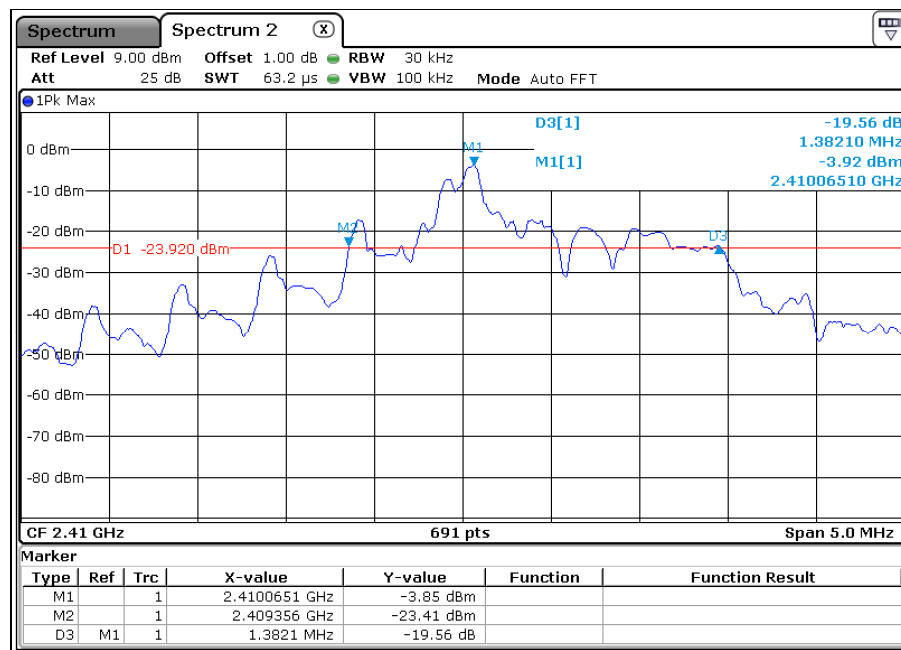

Test Data: Middle channel

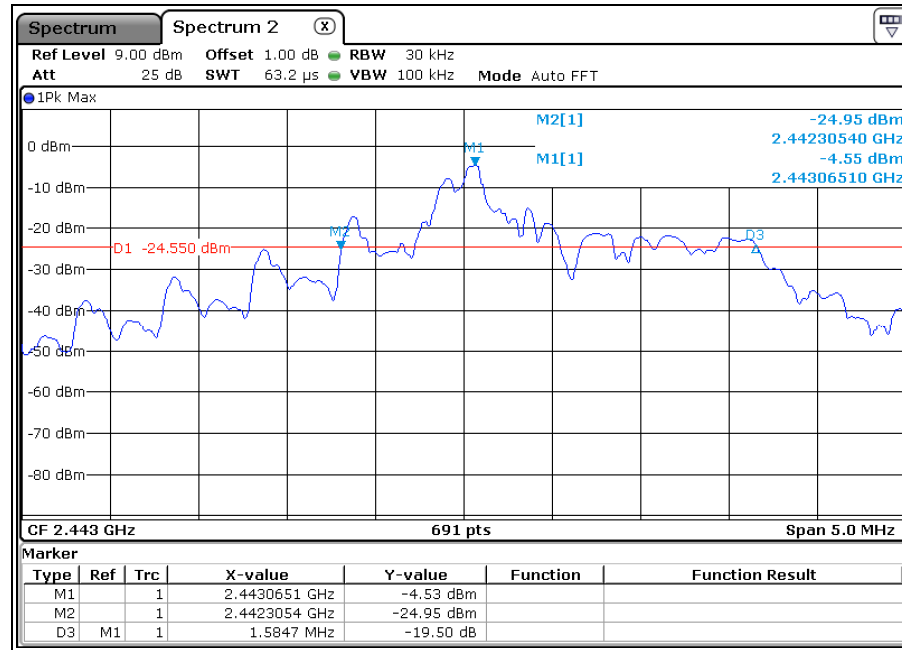

Test Data: High channel

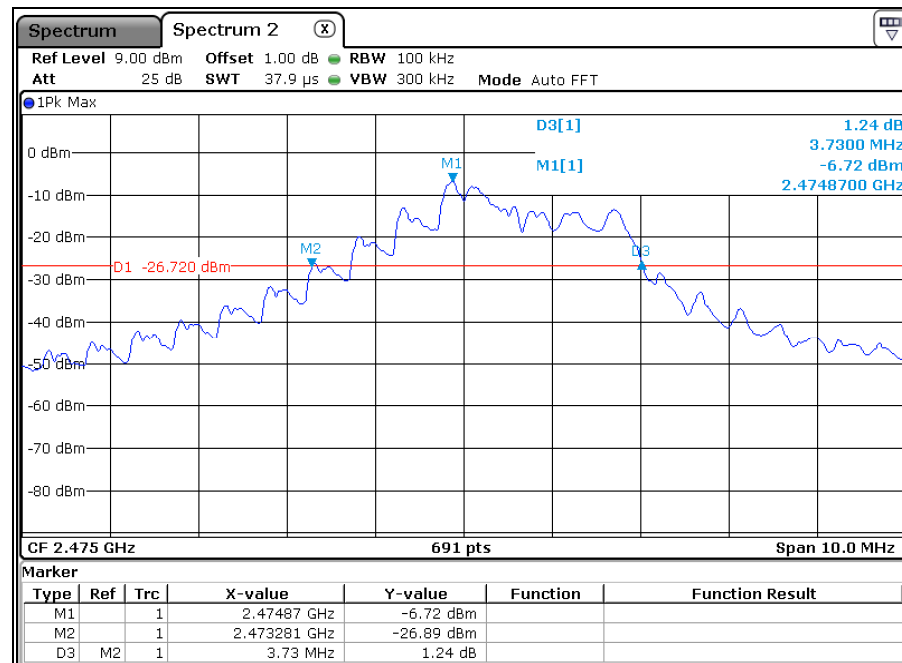



Test Report No.: RF180604N035-2

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---