

FCC&ISED Radio Test Report

FCC ID: 2AO2D-MJJGYY02FM

IC: 23681-MJJGYY02FM

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1803C261
Equipment : Mi Ultra-Short Range Laser Projector
Test Model for : MJJGYY02FM
FCC&IC
Series Model for FCC : MJJGYYXXFM (X=0-9, A-Z, - or blank, indicates for different market purposes)
Applicant : Fengmi(Beijing)Technology Co.,Ltd
Address : 301, 3F, Building 3 No. 10, Shunyi District Renhe Town Barracks South Street, Beijing, China

Date of Receipt : Mar. 26, 2018
Date of Test : Mar. 28, 2018 ~ May 10, 2018
Issued Date : Jun. 28, 2018
Tested by : BTL Inc.

Testing Engineer : Paul Li
(Paul Li)

Technical Manager : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : David Mao
(David Mao)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

 NVLAP[®]
TESTING
NVLAP LAB CODE 200788-0

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000MHZ)	19
5 . NUMBER OF HOPPING CHANNEL	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20
6 . AVERAGE TIME OF OCCUPANCY	21

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT TEST CONDITIONS	23
7.1.5 TEST RESULTS	23
8 . BANDWIDTH TEST	24
8.1 APPLIED PROCEDURES	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . PEAK OUTPUT POWER TEST	25
9.1 APPLIED PROCEDURES / LIMIT	25
9.1.1 TEST PROCEDURE	25
9.1.2 DEVIATION FROM STANDARD	25
9.1.3 TEST SETUP	25
9.1.4 EUT OPERATION CONDITIONS	25
9.1.5 EUT TEST CONDITIONS	25
9.1.6 TEST RESULTS	25
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	26
10.1 APPLIED PROCEDURES / LIMIT	26
10.1.1 TEST PROCEDURE	26
10.1.2 DEVIATION FROM STANDARD	26
10.1.3 TEST SETUP	26
10.1.4 EUT OPERATION CONDITIONS	26
10.1.5 EUT TEST CONDITIONS	26
10.1.6 TEST RESULTS	26
11 . MEASUREMENT INSTRUMENTS LIST	27
12 . EUT TEST PHOTO	29

Table of Contents	Page
APPENDIX A - CONDUCTED EMISSION	33
APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)	36
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	48
APPENDIX E - NUMBER OF HOPPING CHANNEL	77
APPENDIX F - AVERAGE TIME OF OCCUPANCY	79
APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT	92
APPENDIX H - BANDWIDTH	97
APPENDIX I - PEAK OUTPUT POWER	102
APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION	107

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-2-1803C261	Original Issue.	May 22, 2018
MDG1805049	Update the applicant name.	May 29, 2018
RVC-1806016	Added the Co-Location test data.	Jun. 28, 2018

1. CERTIFICATION

Equipment : Mi Ultra-Short Range Laser Projector

Brand Name : MI

Test Model : MJJGYY02FM

for FCC&IC

Series Model : MJJGYYXXFM (X=0-9, A-Z, - or blank, indicates for different market purposes)

for FCC

Applicant : Fengmi(Beijing)Technology Co.,Ltd

Date of Test : Mar. 28, 2018 ~ May 10, 2018

Test Sample : Engineering Sample No.: D180302577 for Conducted, D180302578 for
Radiated

Standard(s) : FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013

RSS-247 Issue 2, Feb. 2017

RSS-GEN Issue 4, Nov. 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-2-1803C261) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247) RSS-247 Issue 2, Feb. 2017, RSS-GEN Issue 4, Nov. 2014				
Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS-GEN 8.8	Conducted Emission	PASS	
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	RSS-247 5.1 (b)	Hopping Channel Separation	PASS	
15.247(a)(1)	RSS-247 5.1 (a)	Bandwidth	PASS	
15.247 (b)(1)	RSS-247 5.4 (b)	Peak Output Power	PASS	
15.247(d) 15.209	RSS-247 5.5	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (d)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (d)	Dwell Time	PASS	
15.205	RSS-GEN 8.10	Restricted Bands	PASS	
15.203	-	Antenna Requirement	PASS	

Note:

(1)" N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2\times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67dB
Hopping Channel Separation	53.46MHz
Peak Output Power	0.95dB
Number of Hopping Frequency	53.46MHz
Temperature	0.08 °C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mi Ultra-Short Range Laser Projector	
Brand Name	MI	
Test Model for FCC&IC	MJJGYY02FM	
Series Model for FCC	MJJGYYXXFM (X=0-9, A-Z, - or blank, indicates for different market purposes)	
Model Difference	Only differ in market purposes.	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps) $\pi/4$ -DQPSK(2Mbps) 8-DPSK(3Mbps)
	Bit Rate of Transmitter	
	Output Power Max.	7.27 dBm(1Mbps) 7.39 dBm(3Mbps)
Power Source	AC Mains	
Power Rating	100-240V~ 50/60Hz	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	1.5

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode Note (1)

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	1	2	2
Parameters(3Mbps)	1	1	2

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

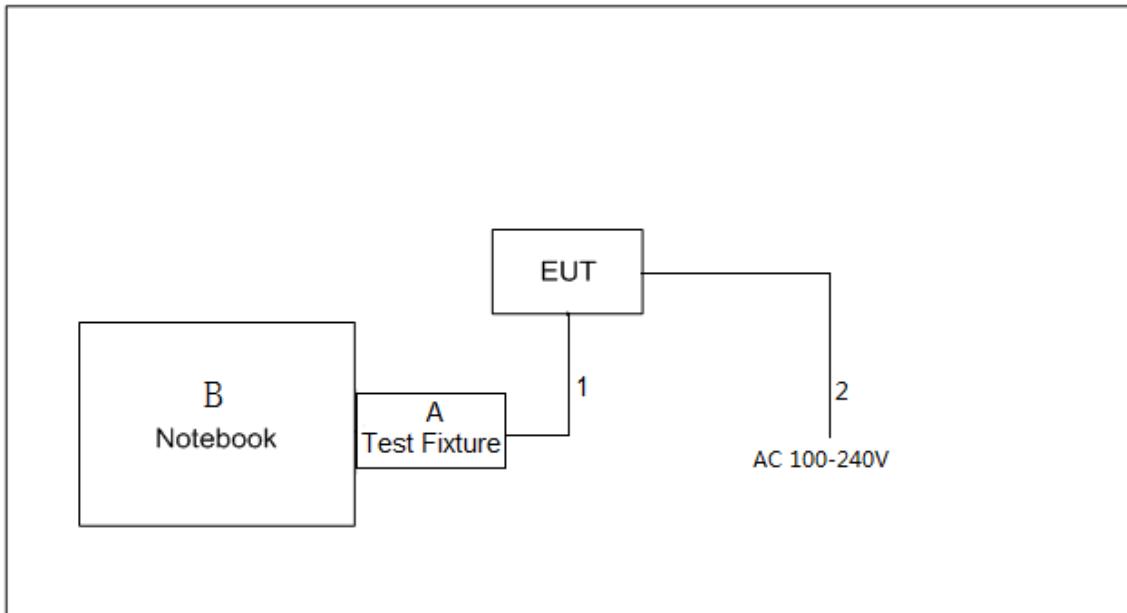

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Test Fixture	N/A	N/A	N/A	N/A
B	Notebook	Dell	DCSM	DOC	G7K832X

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.0m	Data Cable
2	NO	NO	1.5m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:

$$\text{Measurement Value} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Factor} = \text{Insertion Loss} + \text{Cable Loss} + \text{Attenuator Factor(if use)}$$

$$\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}$$

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

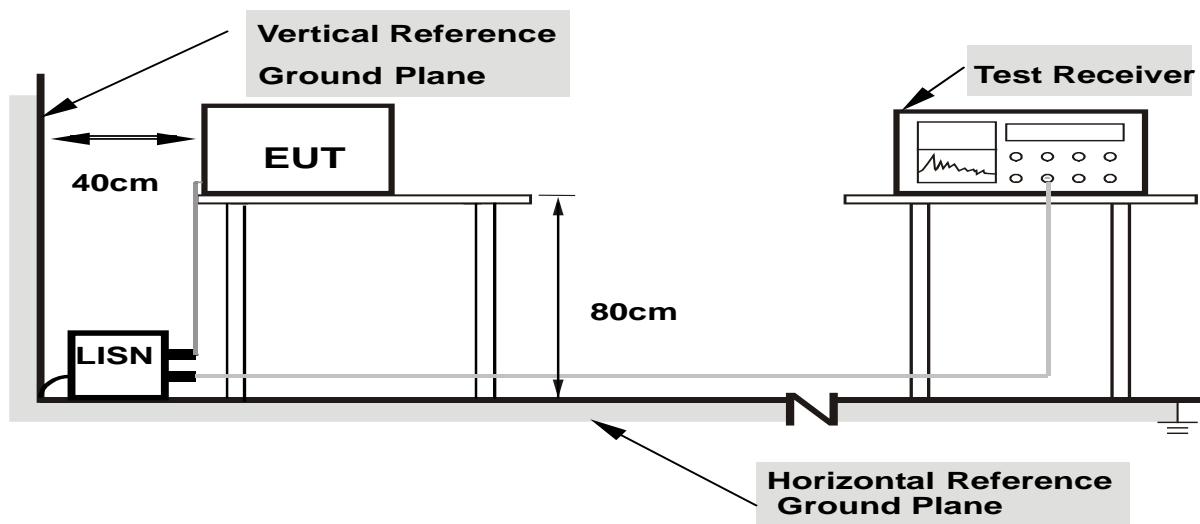

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
 - (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a) & RSS-247 5.5, then the 15.209(a) & RSS-Gen limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C/RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

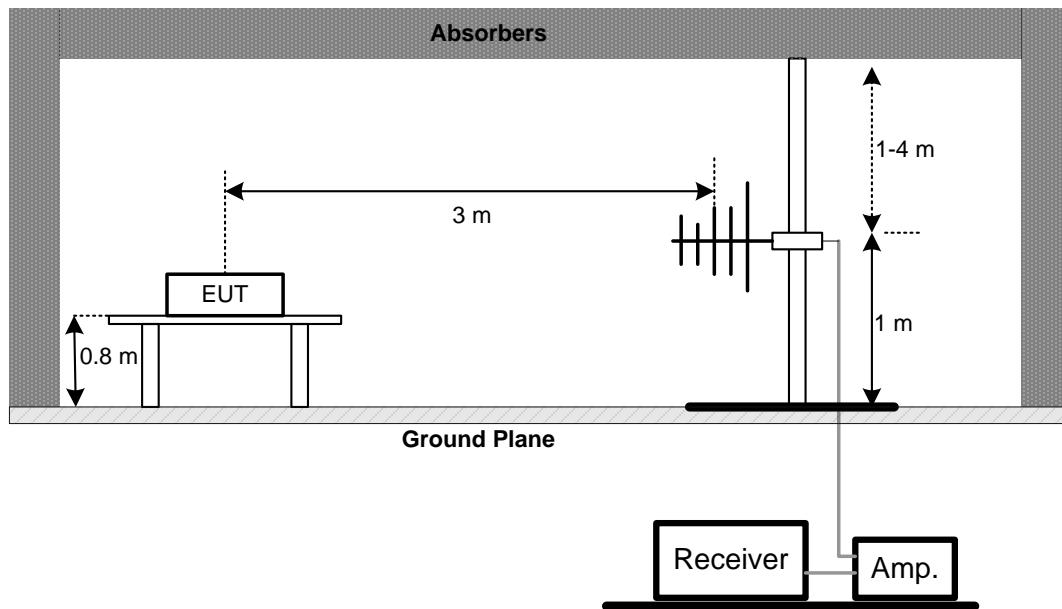

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

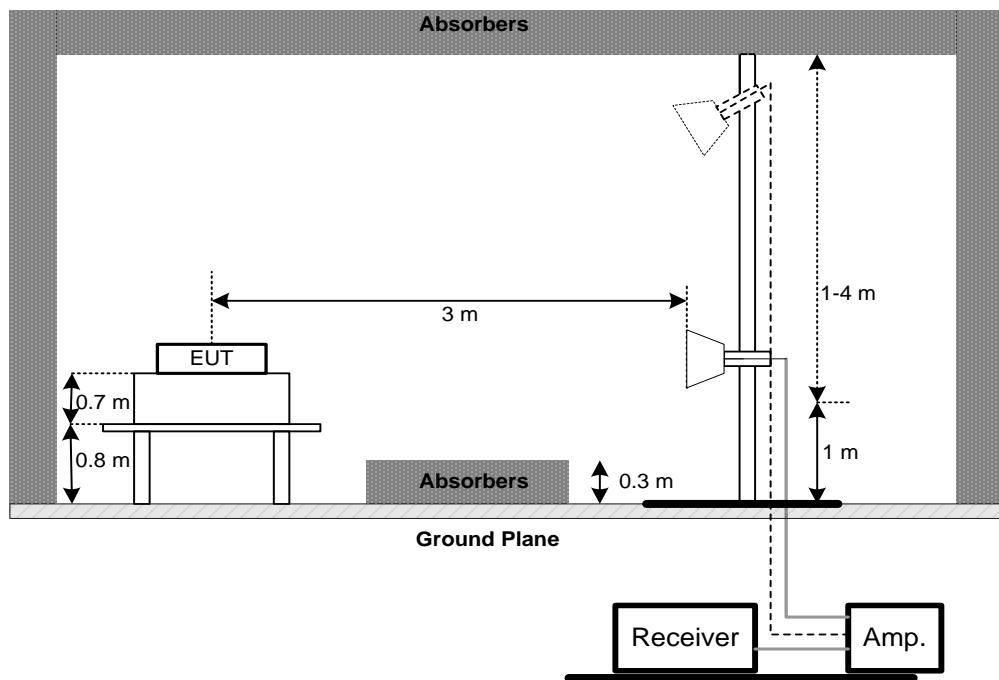

(C) For Radiated Emissions Below 30MHz

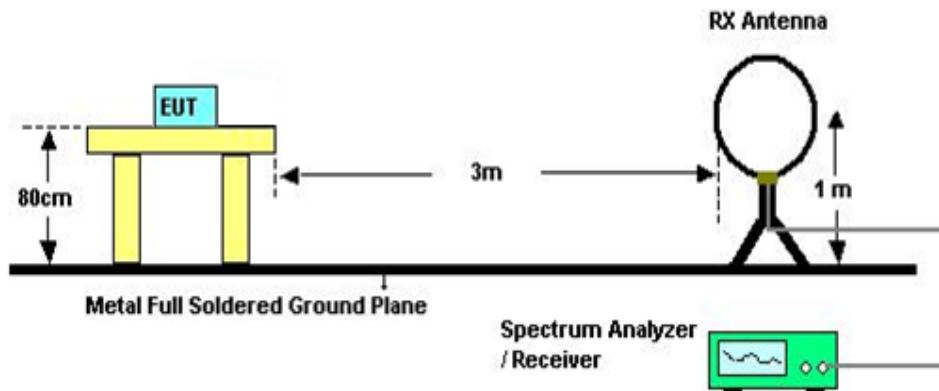

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (d)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (d)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
Video (or Average) Bandwidth (VBW) \geq RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

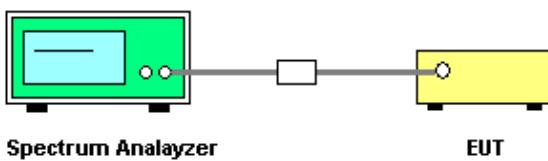

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Appendix G

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2) RSS-GEN 6.6 RSS-247 5.1 (a)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1) RSS-247 5.4 (b)	Peak Output Power	0.125Watt or 21dBm	2400-2483.5	PASS

9.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP



9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Appendix I

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as shown in the block diagram below,
 - b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
 - c. Offset=antenna gain+cable loss

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP



10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

10.1.6 TEST RESULTS

Please refer to the Appendix J.

11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Oct. 19, 2018

Radiated Emission Measurement - Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Antenna	EM	EM-6876-1	230	Feb. 07, 2019

Radiated Emission Measurement - Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2018
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 30, 2018
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Channel

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Average Time of Occupancy

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Hopping Channel Separation Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Peak Output Power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Antenna Conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

12. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

9KHz to 30MHz





Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz

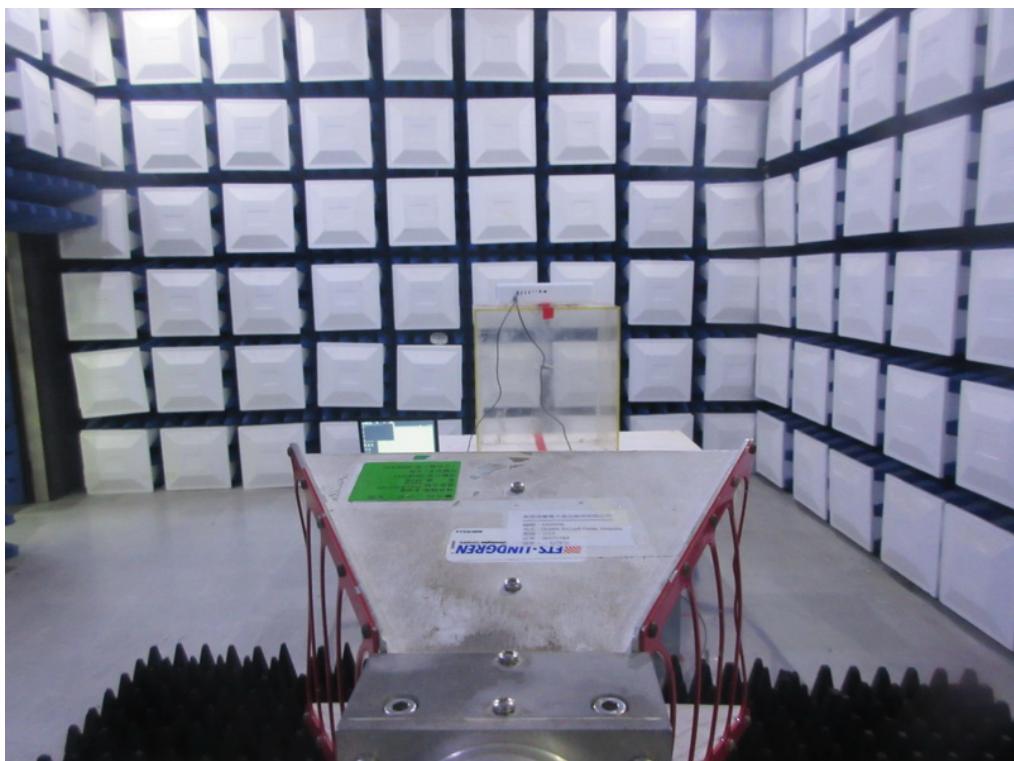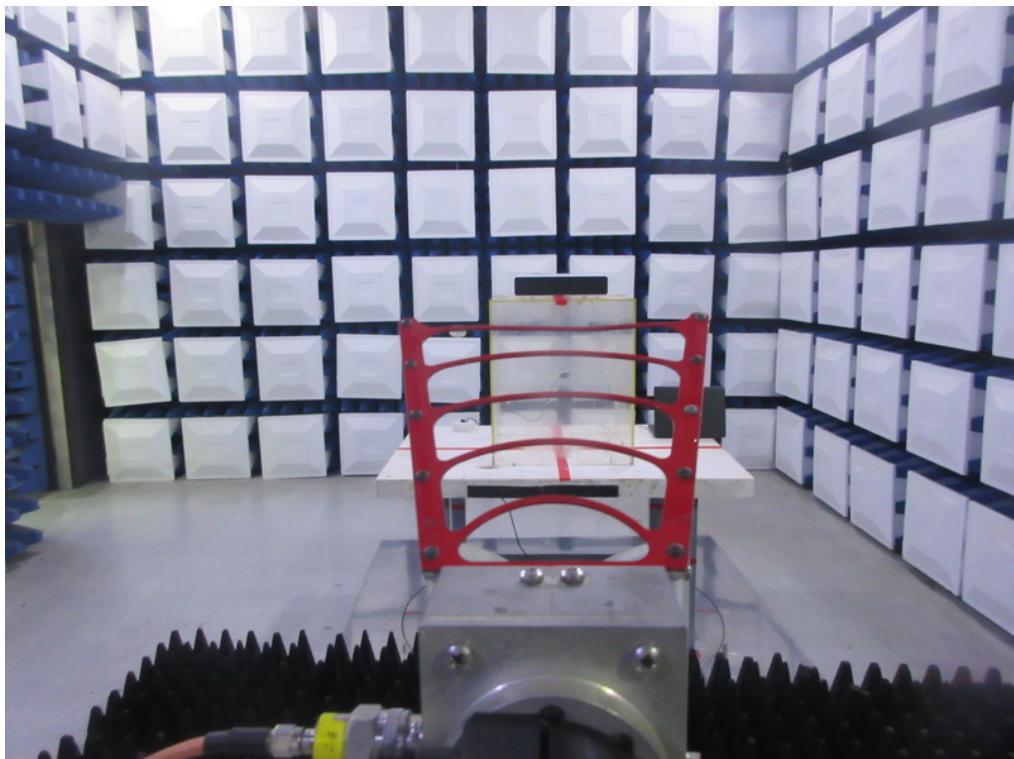

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

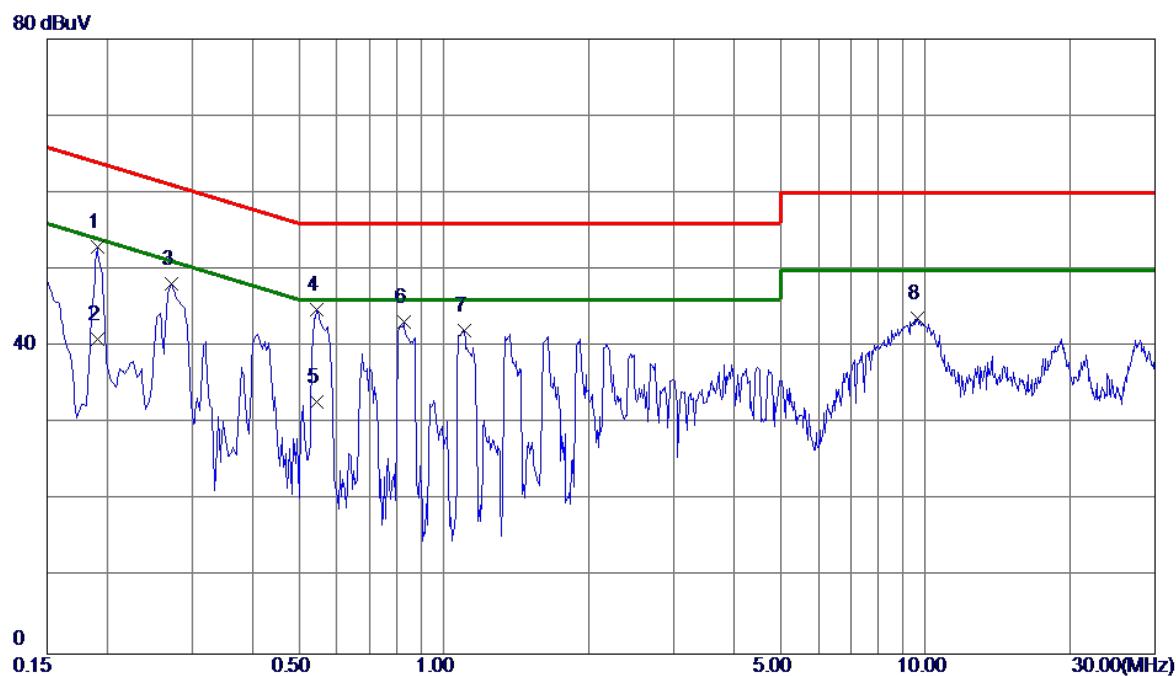

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
								Comment
1 *	0.1905	43.19	9.76	52.95	64.01	-11.06	Peak	
2	0.1905	31.21	9.76	40.97	54.01	-13.04	AVG	
3	0.2714	38.35	9.74	48.09	61.07	-12.98	Peak	
4	0.5460	34.99	9.74	44.73	56.00	-11.27	Peak	
5	0.5460	23.10	9.74	32.84	46.00	-13.16	AVG	
6	0.8250	33.29	9.84	43.13	56.00	-12.87	Peak	
7	1.1040	32.29	9.86	42.15	56.00	-13.85	Peak	
8	9.6180	33.42	10.30	43.72	60.00	-16.28	Peak	

Test Mode: TX Mode

Neutral

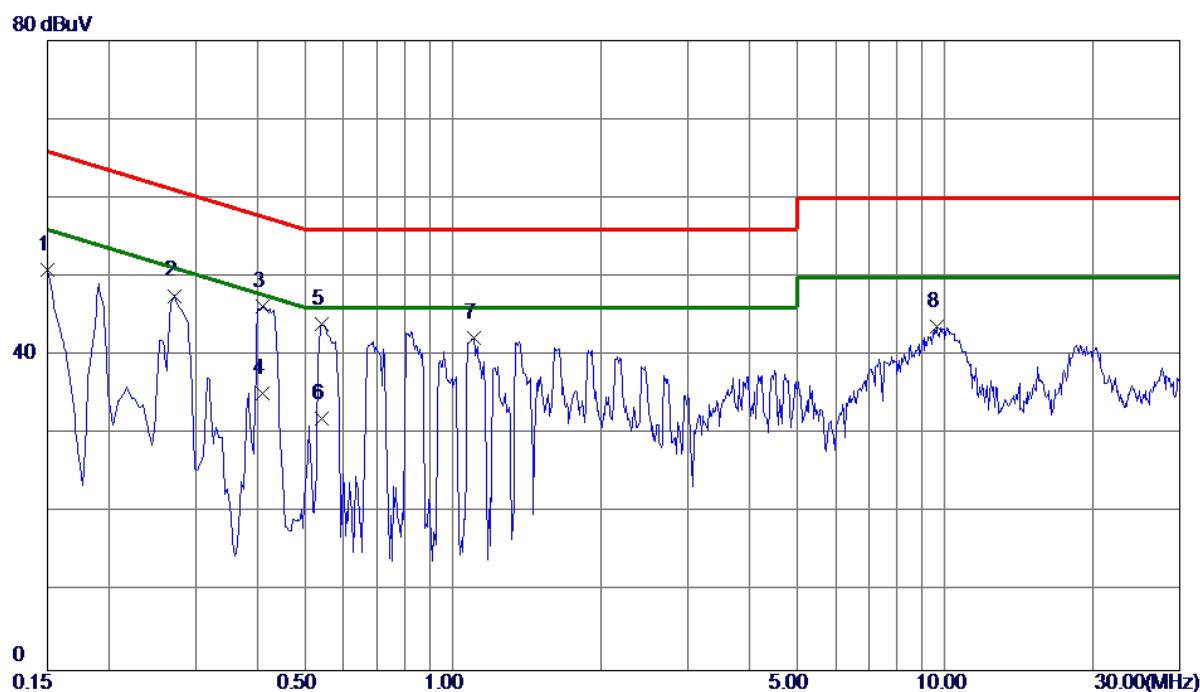


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin		Detector	Comment
						Margin	Margin		
1	0.1500	41.28	9.67	50.95	66.00	-15.05	Peak		
2	0.2714	37.94	9.66	47.60	61.07	-13.47	Peak		
3 *	0.4110	36.59	9.63	46.22	57.63	-11.41	Peak		
4	0.4110	25.50	9.63	35.13	47.63	-12.50	AVG		
5	0.5413	34.43	9.64	44.07	56.00	-11.93	Peak		
6	0.5413	22.30	9.64	31.94	46.00	-14.06	AVG		
7	1.1040	32.56	9.75	42.31	56.00	-13.69	Peak		
8	9.6090	33.37	10.25	43.62	60.00	-16.38	Peak		

APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode: TX Mode


Ant 0°

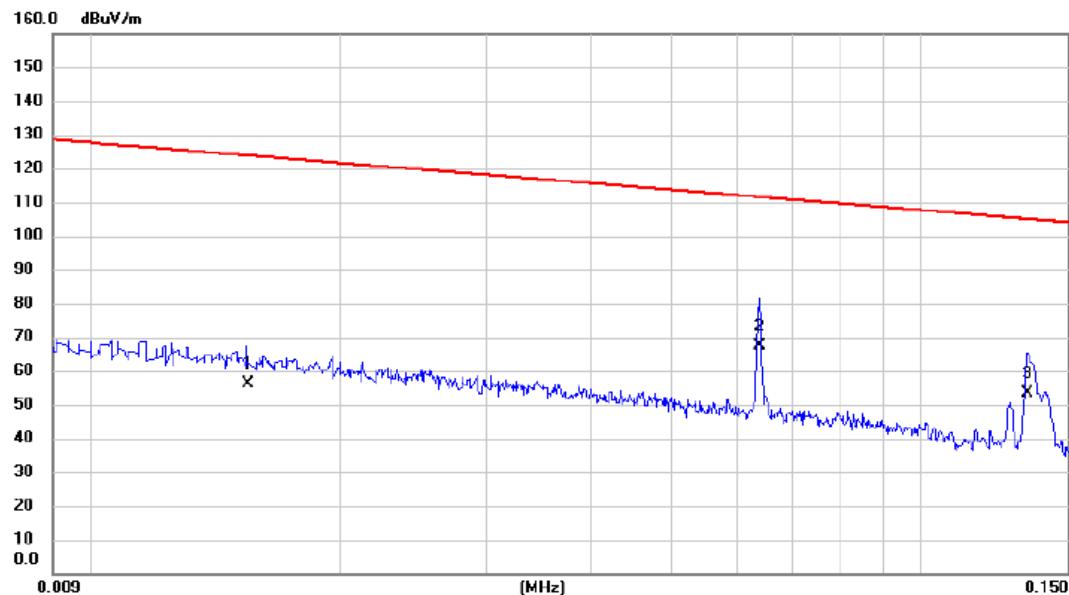

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		0.015	36.20	20.20	56.40	123.80	-67.40	AVG
2 *		0.064	48.90	18.45	67.35	111.48	-44.13	AVG
3		0.134	36.20	17.16	53.36	105.04	-51.68	AVG

Test Mode: TX Mode


Ant 0°

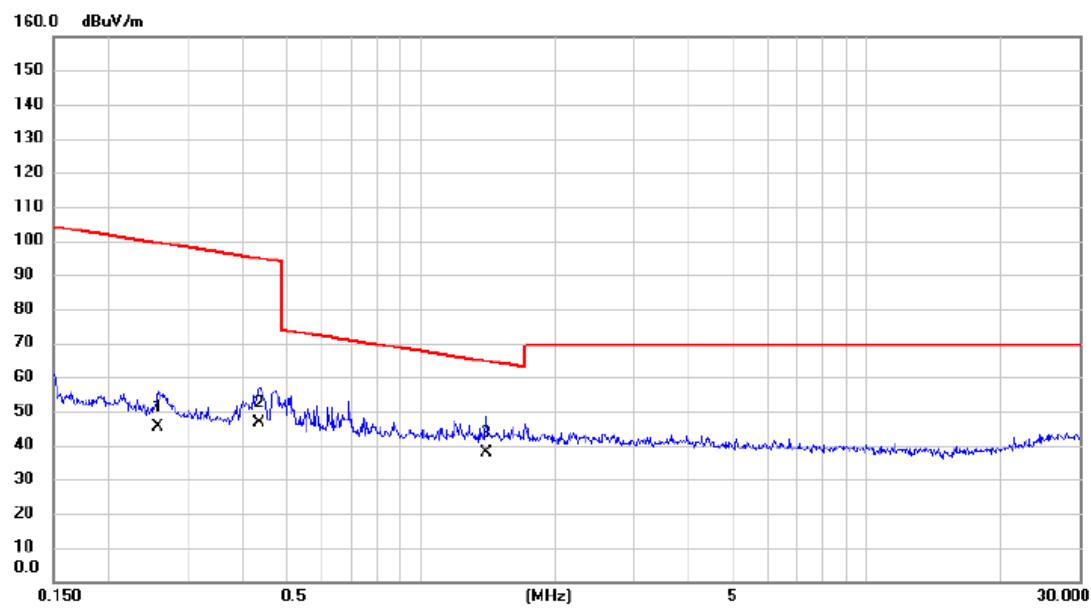

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment		Margin	Detector	Comment
					MHz	dBuV	dB	dBuV/m	dBuV/m
1		0.258	28.70	16.65	45.35	99.39	-54.04	AVG	
2		0.435	30.10	16.52	46.62	94.83	-48.21	AVG	
3 *		1.403	22.20	15.74	37.94	64.66	-26.72	QP	

Test Mode: TX Mode


Ant 90°

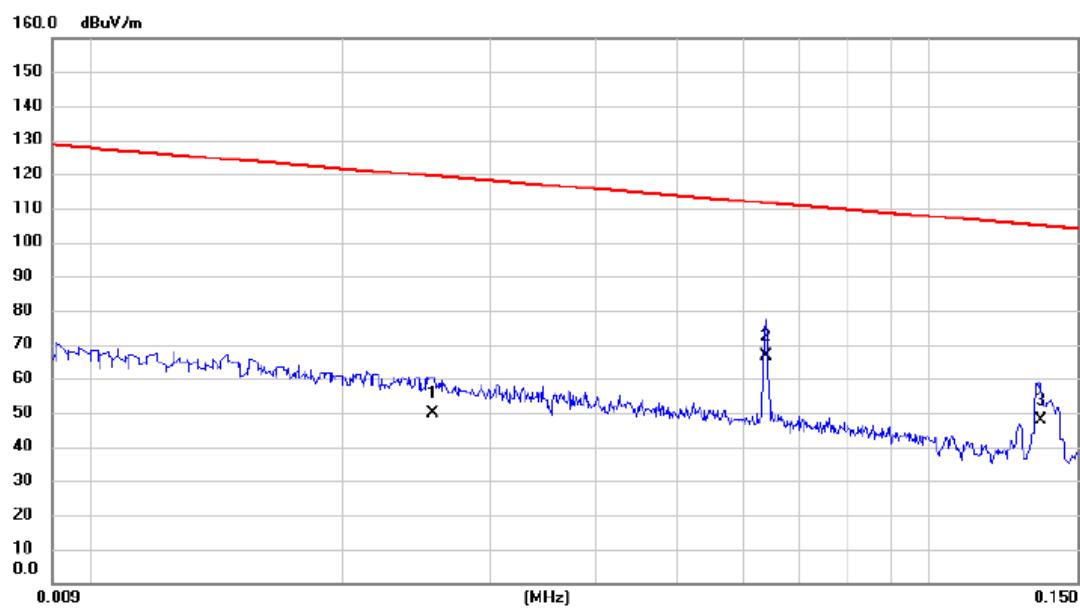

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		0.026	30.20	19.45	49.65	119.44	-69.79	AVG	
2	*	0.064	48.10	18.45	66.55	111.48	-44.93	AVG	
3		0.136	30.60	17.14	47.74	104.96	-57.22	AVG	

Test Mode: TX Mode

Ant 90°

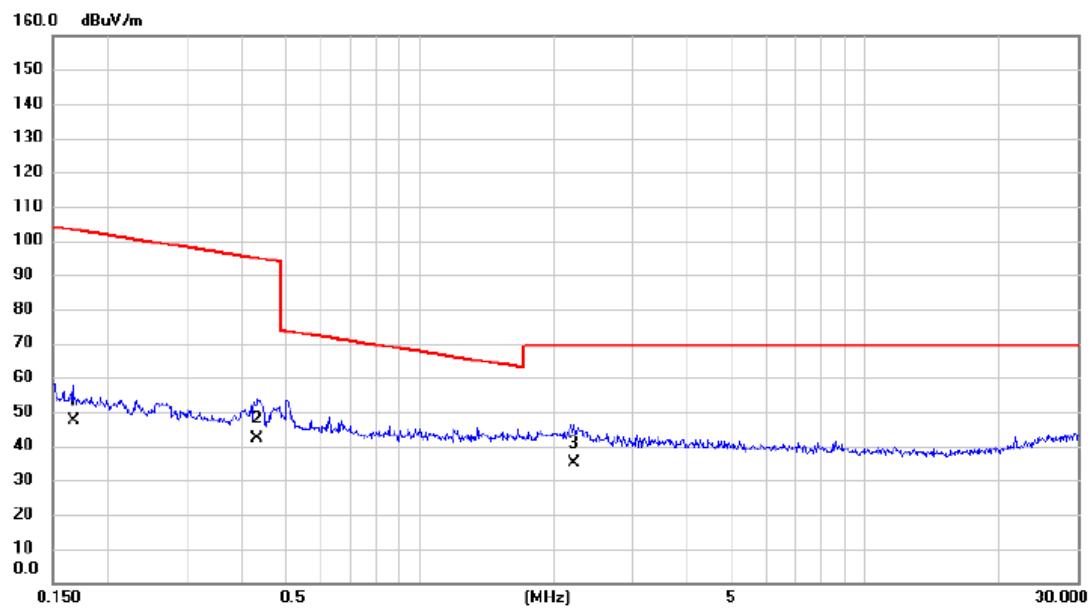


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		0.168	30.60	16.90	47.50	103.12	-55.62	AVG
2		0.433	25.80	16.52	42.32	94.88	-52.56	AVG
3 *		2.225	19.40	15.44	34.84	69.54	-34.70	QP

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX 2402MHz_CH00_1Mbps


Vertical

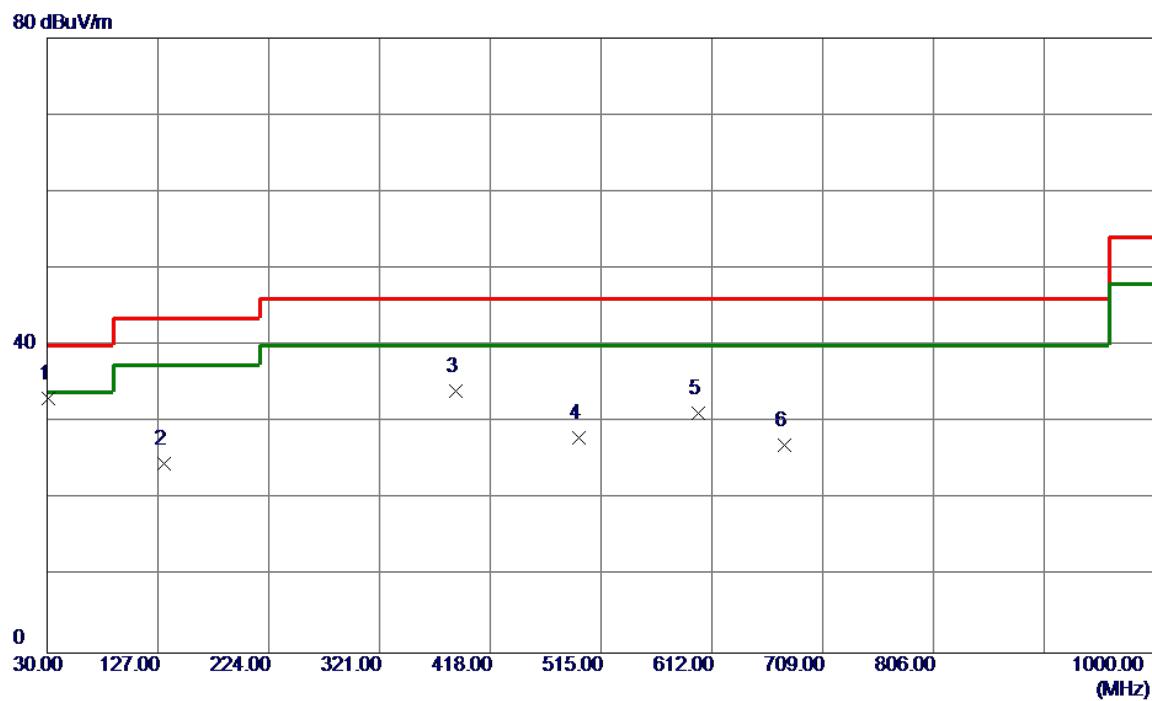

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	30.9700	48.48	-15.36	33.12	40.00	-6.88	QP	
2	132.8200	38.33	-13.68	24.65	43.50	-18.85	Peak	
3	387.9300	44.54	-10.51	34.03	46.00	-11.97	Peak	
4	495.6000	37.06	-9.13	27.93	46.00	-18.07	Peak	
5	600.3600	38.17	-6.98	31.19	46.00	-14.81	Peak	
6	676.0200	31.57	-4.57	27.00	46.00	-19.00	Peak	

Test Mode: TX 2402MHz _CH00_1Mbps


Horizontal

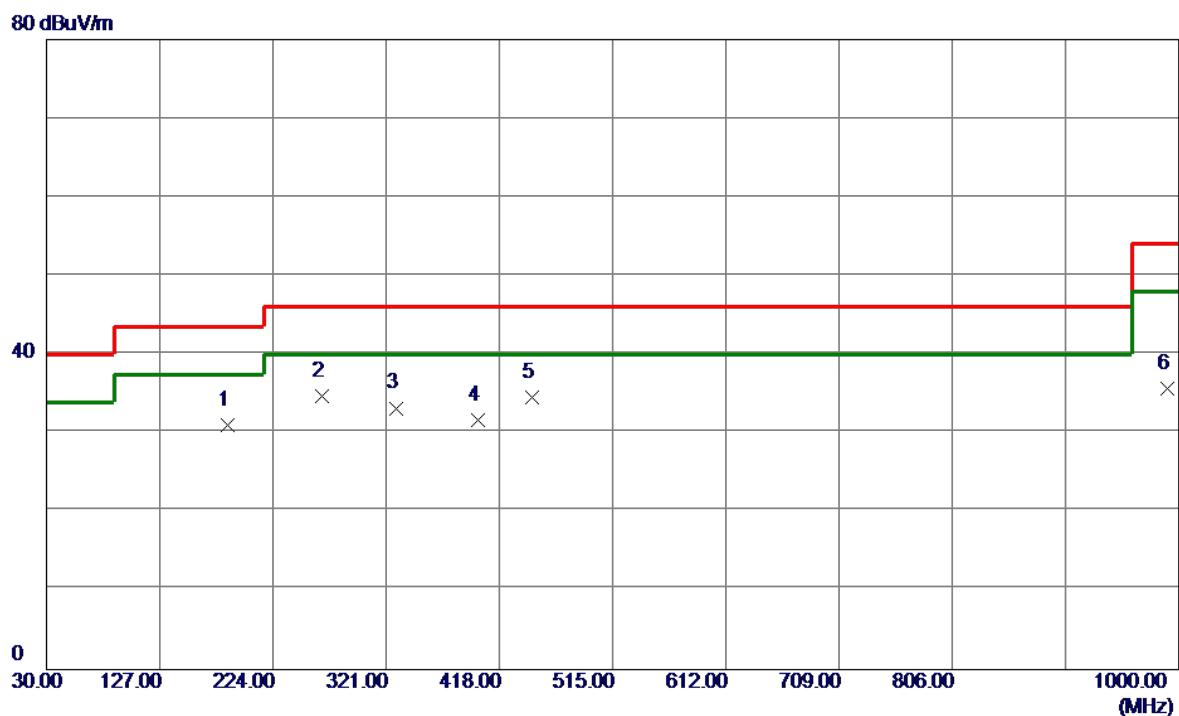

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin			Detector	Comment
						MHz	dBuV/m	dB		
1	185.2000	45.41	-14.31	31.10	43.50	-12.40		Peak		
2 *	265.7100	48.39	-13.69	34.70	46.00	-11.30		Peak		
3	329.7300	44.73	-11.53	33.20	46.00	-12.80		Peak		
4	399.5700	41.86	-10.11	31.75	46.00	-14.25		Peak		
5	446.1300	42.89	-8.26	34.63	46.00	-11.37		Peak		
6	990.3000	35.73	-0.01	35.72	54.00	-18.28		Peak		

Test Mode:	TX 2441MHz_CH39_1Mbps
------------	-----------------------


Vertical

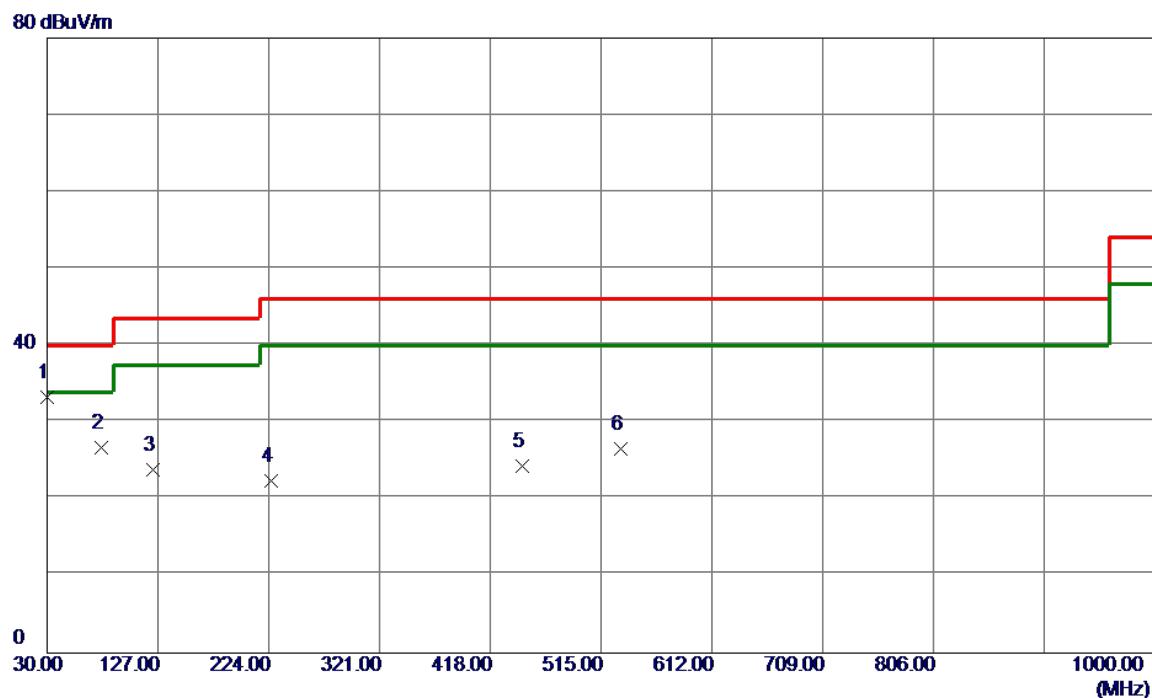

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1 *	30.0000	48.56	-15.32	33.24	40.00	-6.76	QP		
2	77.5300	45.83	-19.05	26.78	40.00	-13.22	Peak		
3	123.1200	38.81	-14.93	23.88	43.50	-19.62	Peak		
4	225.9400	38.00	-15.65	22.35	46.00	-23.65	Peak		
5	446.1300	32.64	-8.26	24.38	46.00	-21.62	Peak		
6	532.4600	33.74	-7.23	26.51	46.00	-19.49	Peak		

Test Mode: TX 2441MHz_CH39_1Mbps


Horizontal

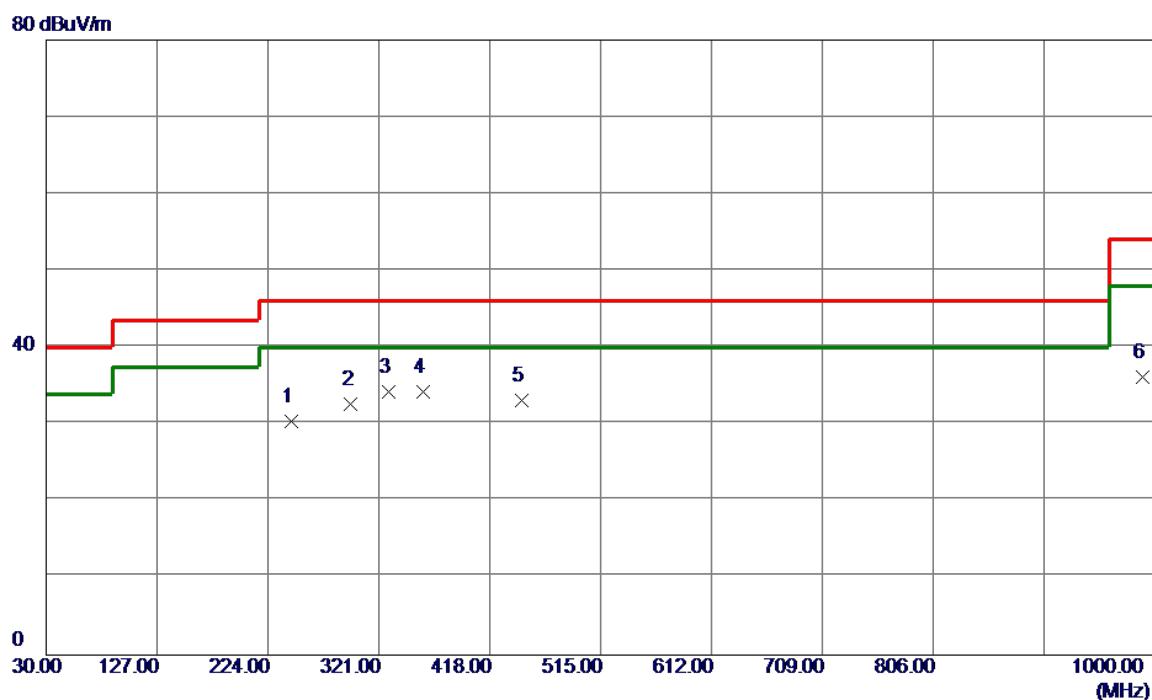

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment	
								Comment	
1	244.3700	45.72	-15.25	30.47	46.00	-15.53	Peak		
2	296.7500	43.96	-11.31	32.65	46.00	-13.35	Peak		
3 *	329.7300	45.83	-11.53	34.30	46.00	-11.70	Peak		
4	359.8000	45.68	-11.48	34.20	46.00	-11.80	Peak		
5	446.1300	41.42	-8.26	33.16	46.00	-12.84	Peak		
6	989.3300	36.15	0.02	36.17	54.00	-17.83	Peak		

Test Mode: TX 2480MHz _CH78_1Mbps


Vertical

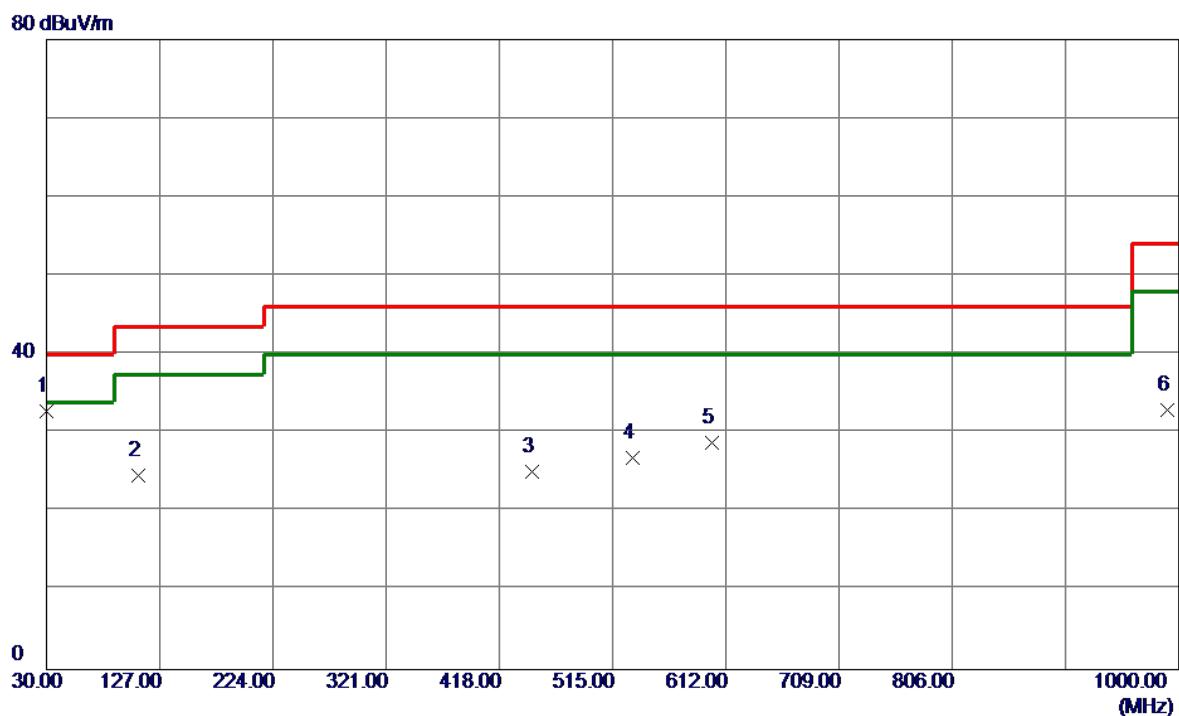

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin			Comment		
						MHz	dBuV/m	dB	dBuV/m	dB	Detector
1 *	30.0000	48.15	-15.32	32.83	40.00	-7.17	QP				
2	108.5700	41.90	-17.19	24.71	43.50	-18.79	Peak				
3	446.1300	33.31	-8.26	25.05	46.00	-20.95	Peak				
4	532.4600	34.12	-7.23	26.89	46.00	-19.11	Peak				
5	600.3600	35.80	-6.98	28.82	46.00	-17.18	Peak				
6	990.3000	32.91	-0.01	32.90	54.00	-21.10	Peak				

Test Mode: TX 2480MHz_CH78_1Mbps

Horizontal

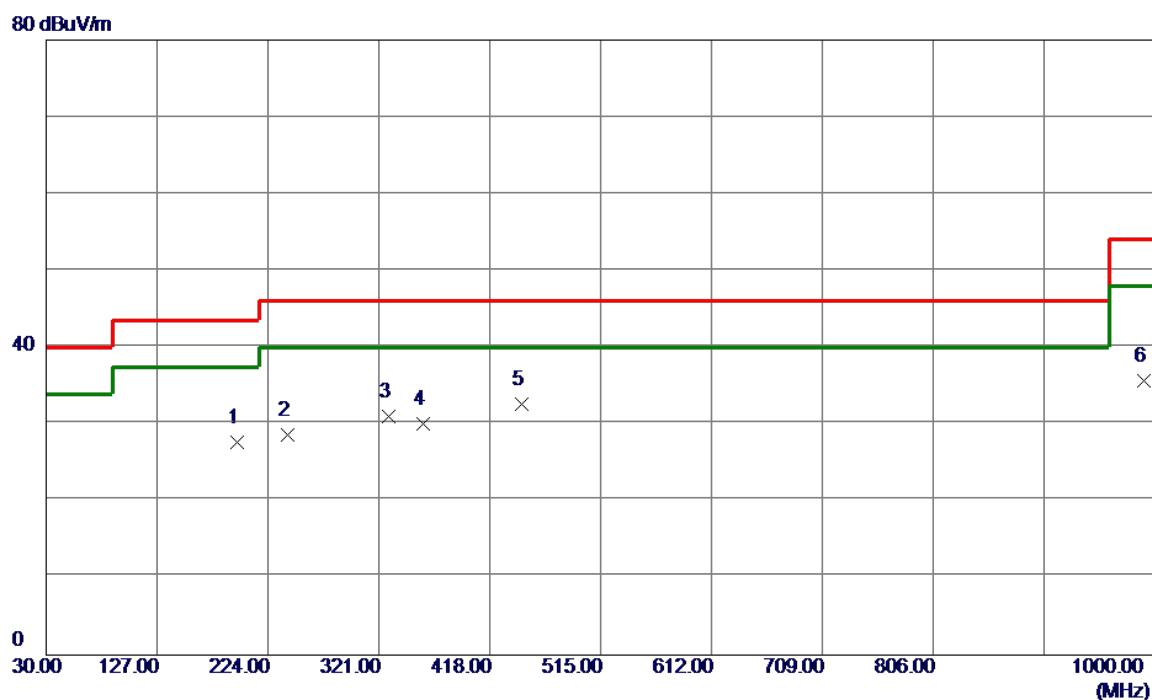


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment	
								Comment	
1	196.8400	43.27	-15.66	27.61	43.50	-15.89	Peak		
2	241.4600	43.97	-15.36	28.61	46.00	-17.39	Peak		
3	329.7300	42.56	-11.53	31.03	46.00	-14.97	Peak		
4	359.8000	41.53	-11.48	30.05	46.00	-15.95	Peak		
5 *	446.1300	40.85	-8.26	32.59	46.00	-13.41	Peak		
6	990.3000	35.75	-0.01	35.74	54.00	-18.26	Peak		

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)


Test Mode : TX 2402MHz _CH00_1Mbps

Vertical

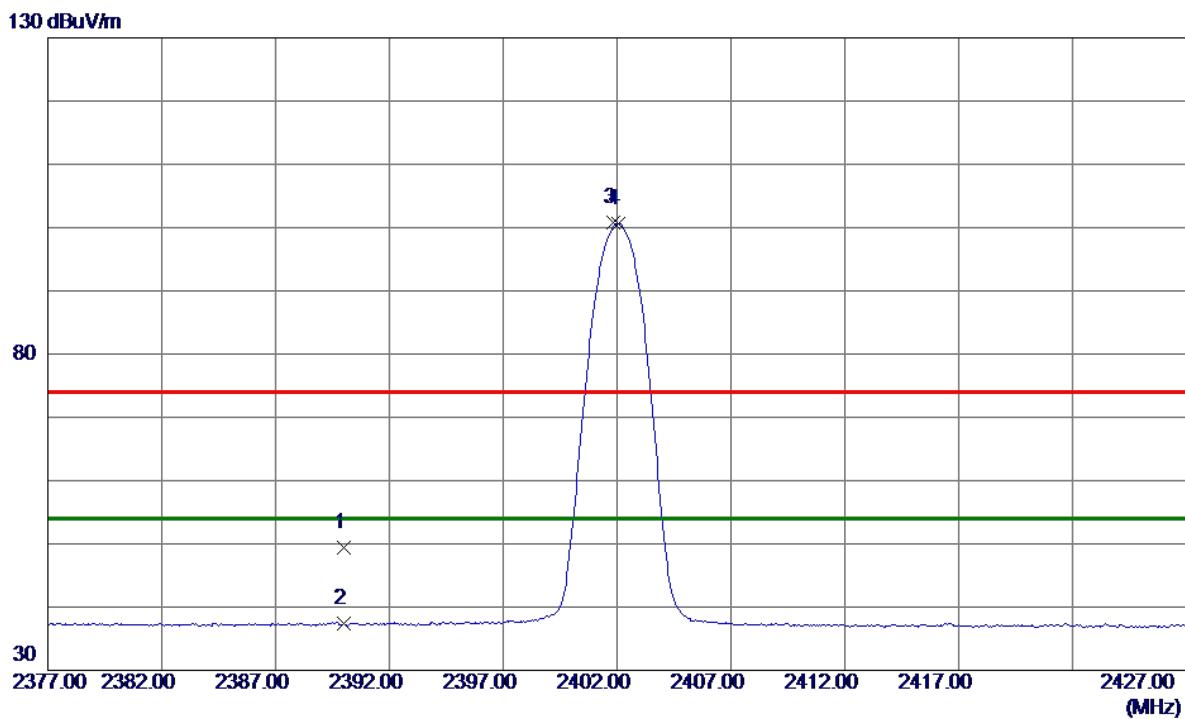

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	2390.0000	40.33	9.00	49.33	74.00	-24.67	Peak
2	2390.0000	28.35	9.00	37.35	54.00	-16.65	AVG
3	2401.8500	91.83	9.00	100.83	74.00	26.83	Peak
4 *	2402.0500	91.61	9.00	100.61	54.00	46.61	AVG


Test Mode :	TX 2402MHz _CH00_1Mbps
-------------	------------------------

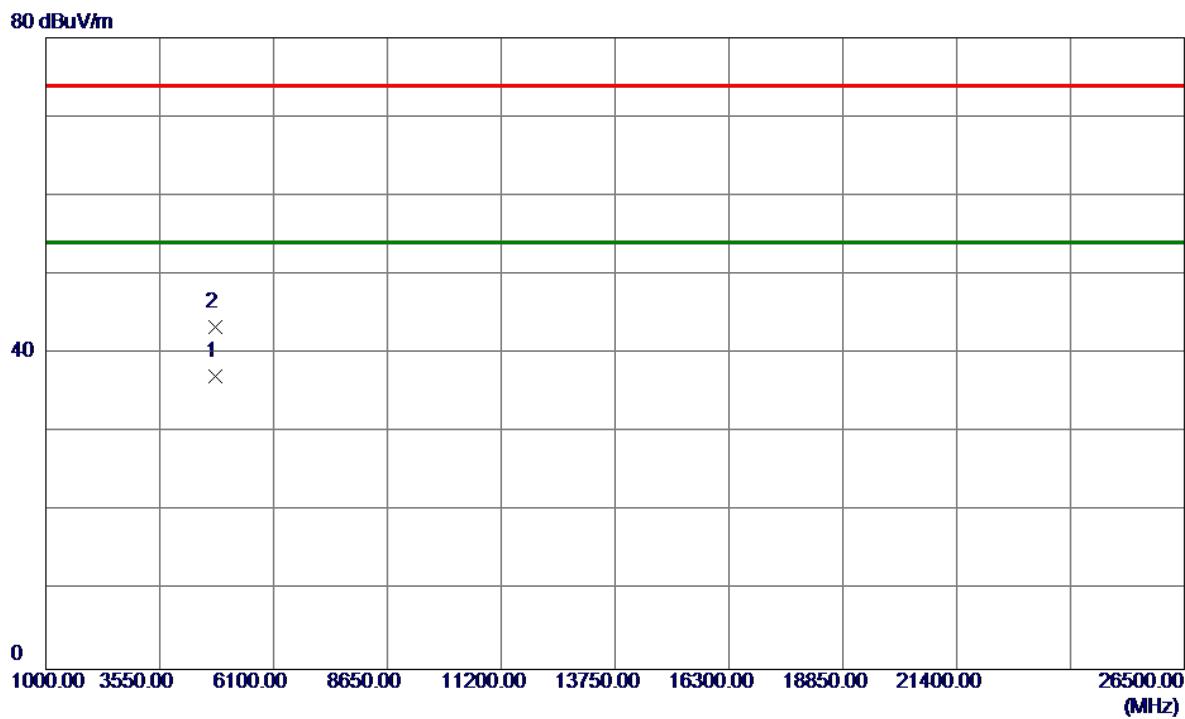Vertical

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4803.9600	31.42	5.73	37.15	54.00	-16.85	AVG	
2	4804.0600	37.70	5.73	43.43	74.00	-30.57	Peak	

Test Mode : TX 2402MHz _CH00_1Mbps


Horizontal

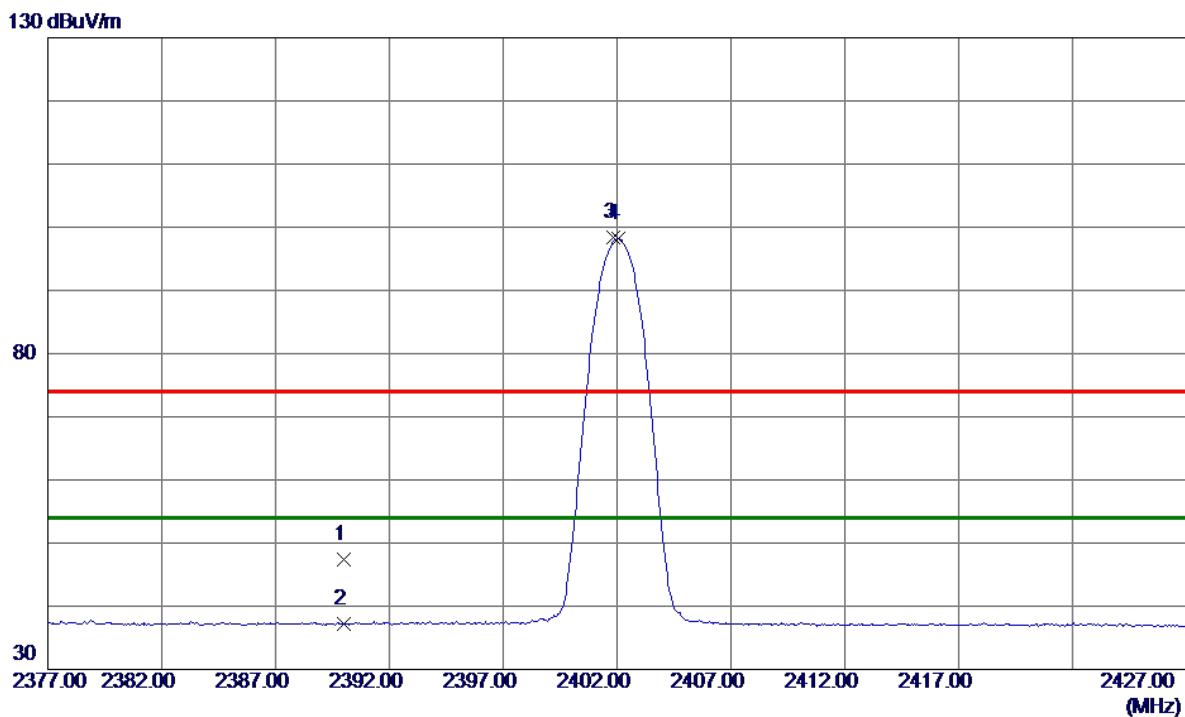

No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin		Detector	Comment
						MHz	dBuV/m	dB	dBuV/m
1	2390.0000	38.31	9.00	47.31	74.00	-26.69	Peak		
2	2390.0000	28.20	9.00	37.20	54.00	-16.80	AVG		
3	2401.8500	89.36	9.00	98.36	74.00	24.36	Peak		No Limit
4 *	2402.0500	89.13	9.00	98.13	54.00	44.13	AVG		No Limit

Test Mode : TX 2402MHz _CH00_1Mbps

Horizontal

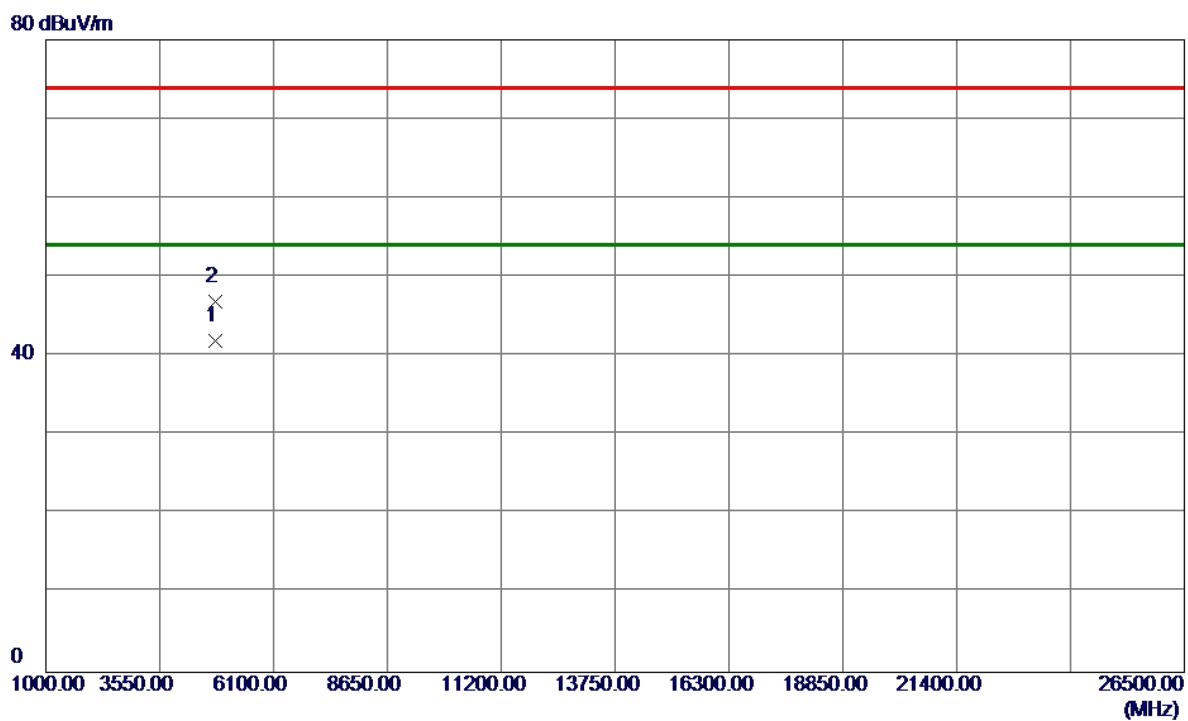


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4804.0000	36.13	5.73	41.86	54.00	-12.14	AVG	
2	4804.0400	41.09	5.73	46.82	74.00	-27.18	Peak	

Test Mode : TX 2441MHz _CH39_1Mbps


Vertical

130 dBuV/m

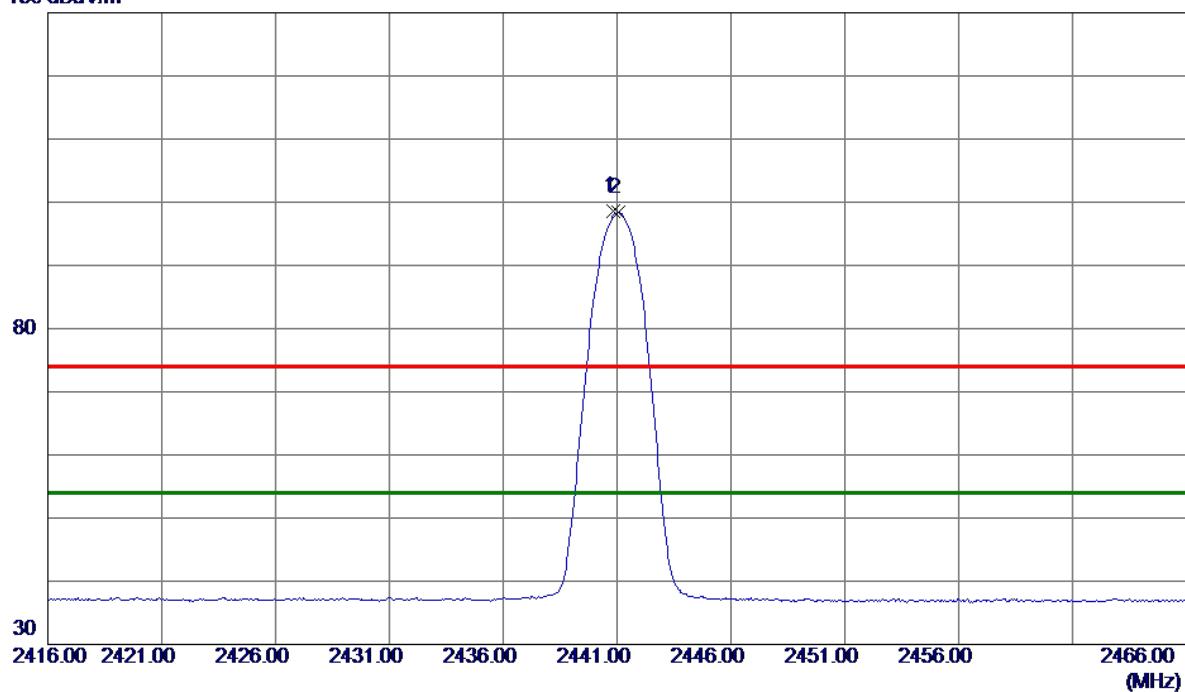

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dB	Detector	Comment
1	2440.8500	89.60	8.98	98.58	74.00	24.58	Peak No Limit
2 *	2441.0500	89.35	8.98	98.33	54.00	44.33	AVG No Limit

Test Mode :	TX 2441MHz _CH39_1Mbps
-------------	------------------------

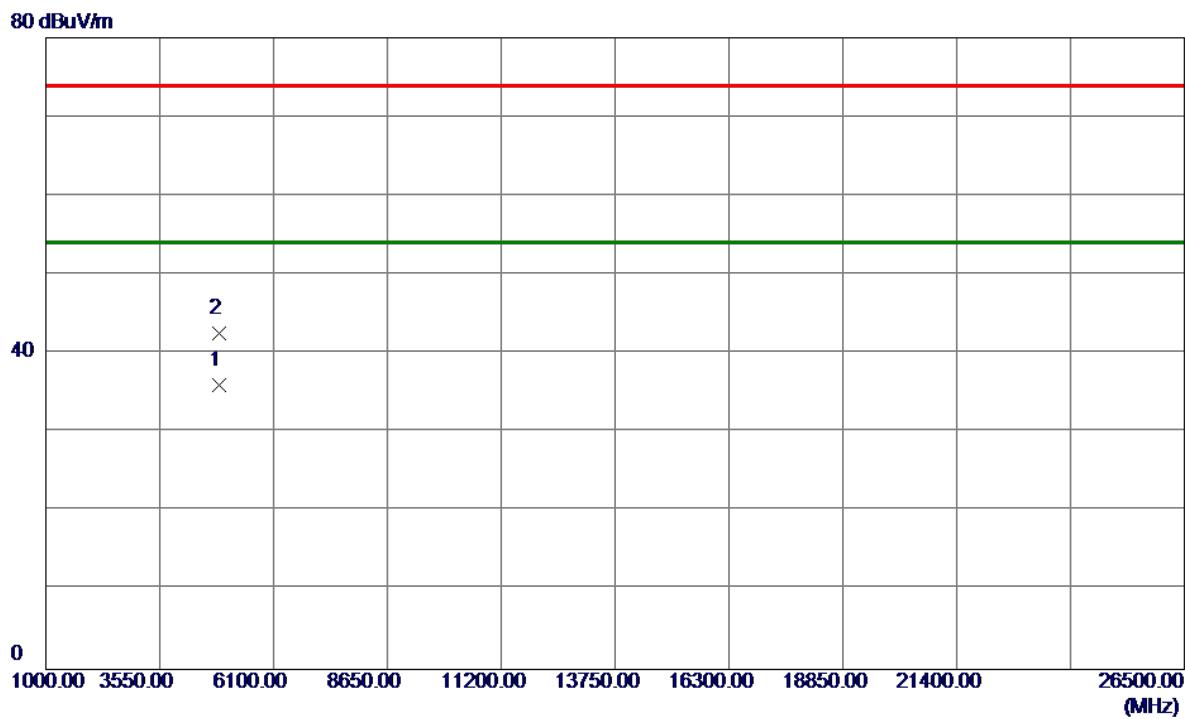
Vertical

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4882.0200	30.08	5.92	36.00	54.00	-18.00	AVG	
2	4882.2400	36.69	5.93	42.62	74.00	-31.38	Peak	

Test Mode : TX 2441MHz _CH39_1Mbps

Horizontal


130 dBuV/m

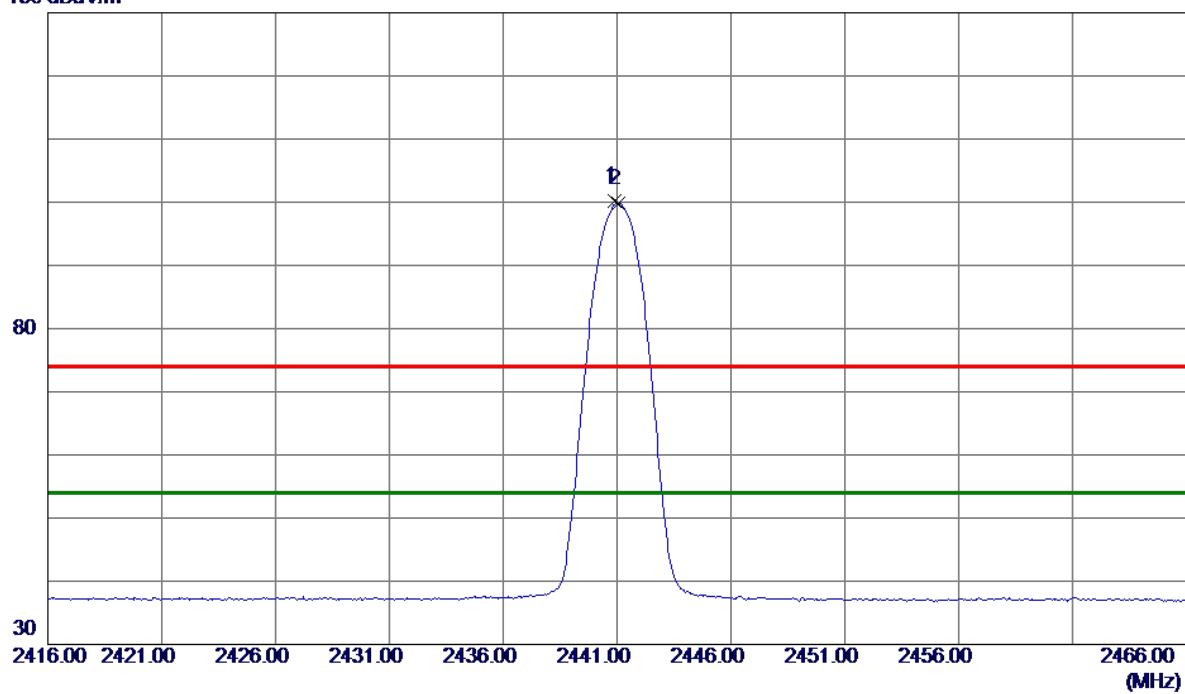

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2440.9000	91.14	8.98	100.12	74.00	26.12	Peak	No Limit
2 *	2441.0500	90.91	8.98	99.89	54.00	45.89	AVG	No Limit

Test Mode : TX 2441MHz _CH39_1Mbps

Horizontal

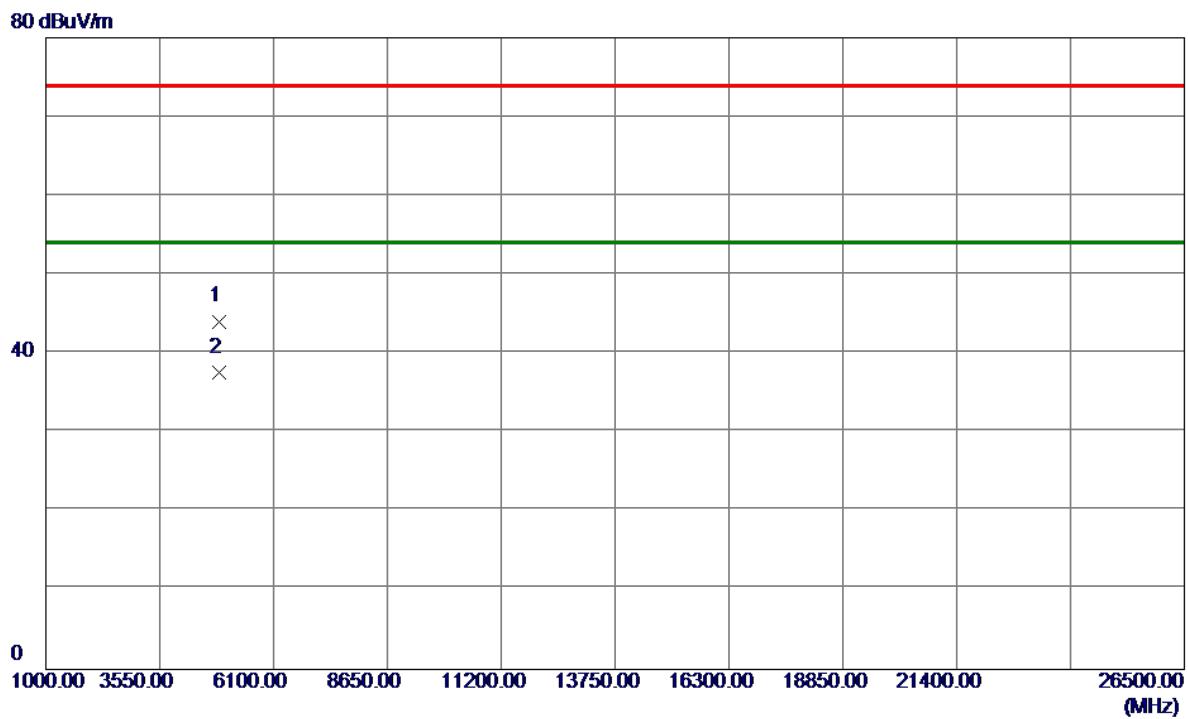


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	4881.9800	38.16	5.92	44.08	74.00	-29.92	Peak
2 *	4882.0200	31.61	5.92	37.53	54.00	-16.47	AVG

Test Mode : TX 2480MHz _CH78_1Mbps


Vertical

130 dBuV/m

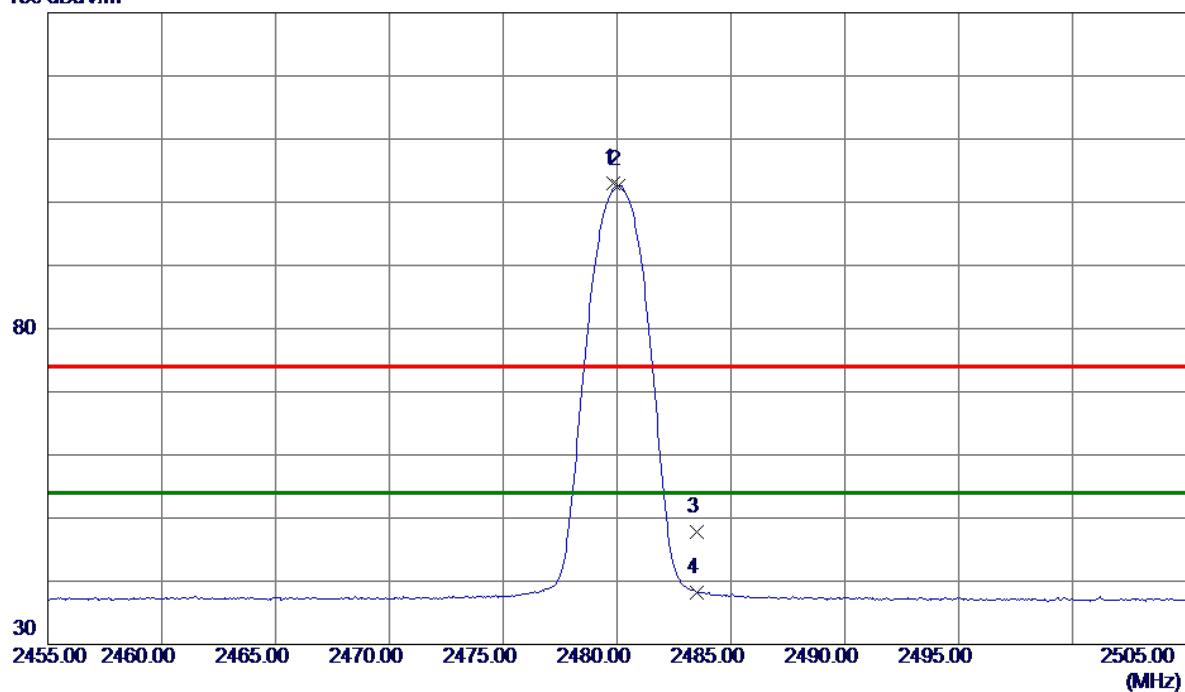

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2479.8500	94.01	8.97	102.98	74.00	28.98	Peak	No Limit
2 *	2480.0500	93.73	8.97	102.70	54.00	48.70	AVG	No Limit
3	2483.5000	38.87	8.97	47.84	74.00	-26.16	Peak	
4	2483.5000	29.28	8.97	38.25	54.00	-15.75	AVG	

Test Mode :	TX 2480MHz _CH78_1Mbps
-------------	------------------------

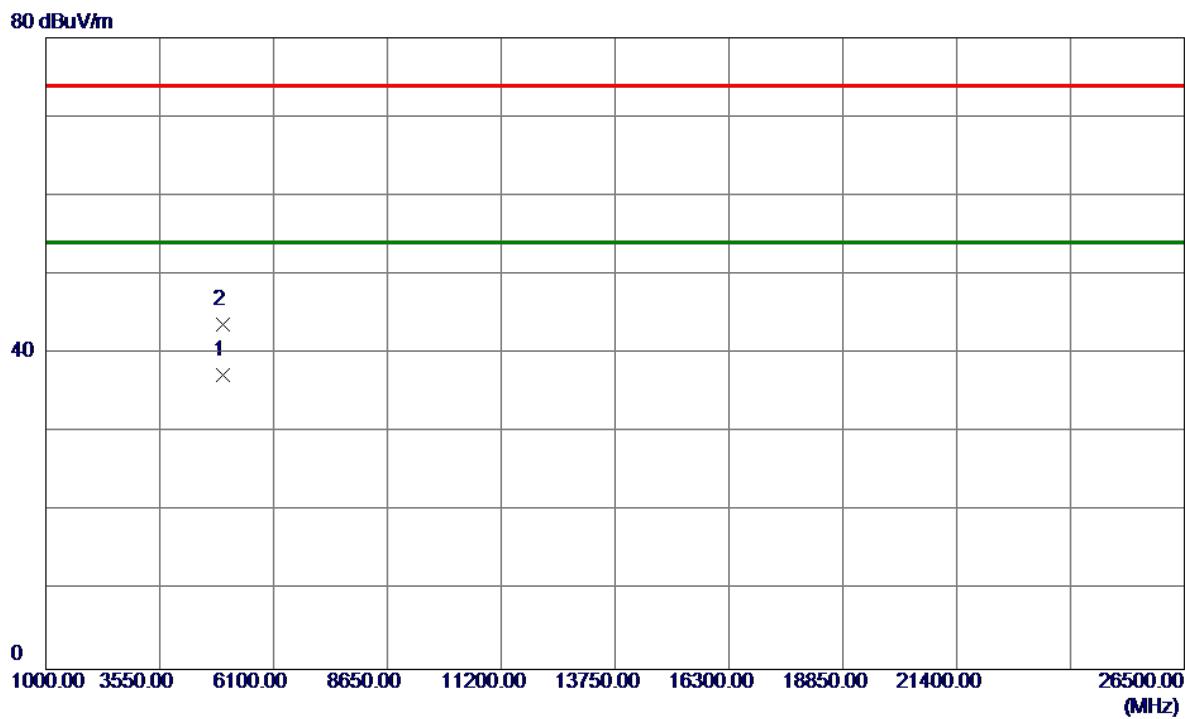
Vertical

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4959.9800	31.18	6.12	37.30	54.00	-16.70	AVG	
2	4960.2400	37.62	6.12	43.74	74.00	-30.26	Peak	

Test Mode : TX 2480MHz _CH78_1Mbps

Horizontal


130 dBuV/m

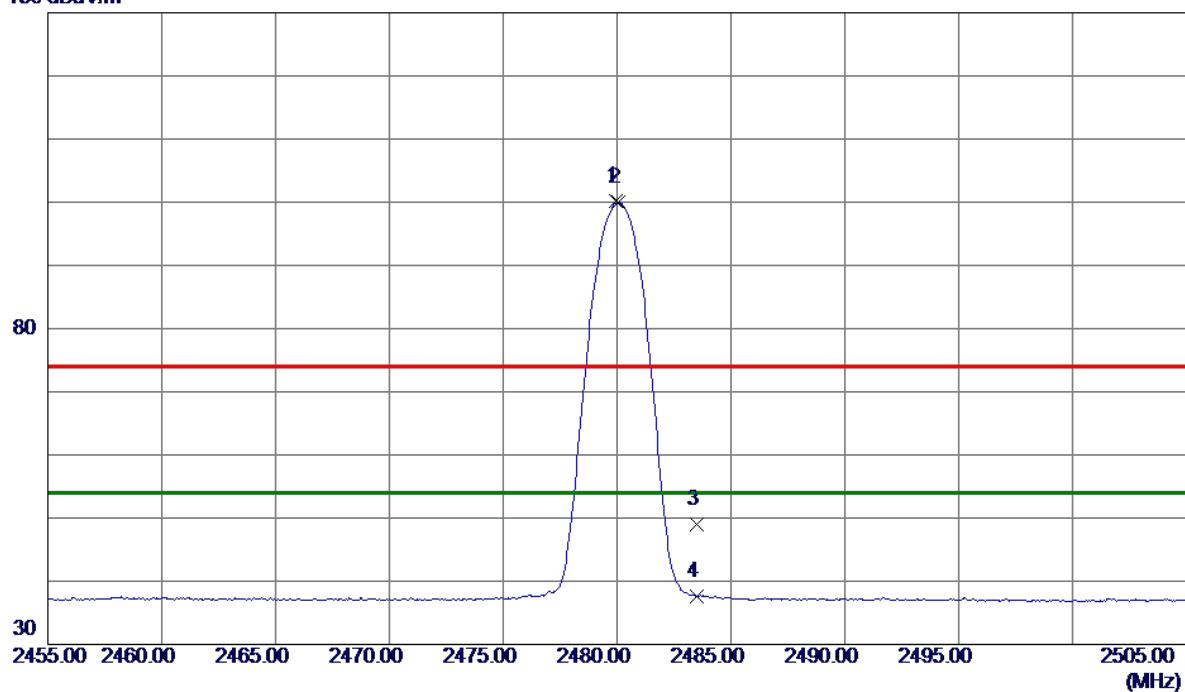

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.9500	91.26	8.97	100.23	74.00	26.23	Peak	No Limit
2 *	2480.0500	90.98	8.97	99.95	54.00	45.95	AVG	No Limit
3	2483.5000	40.07	8.97	49.04	74.00	-24.96	Peak	
4	2483.5000	28.71	8.97	37.68	54.00	-16.32	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps

Horizontal

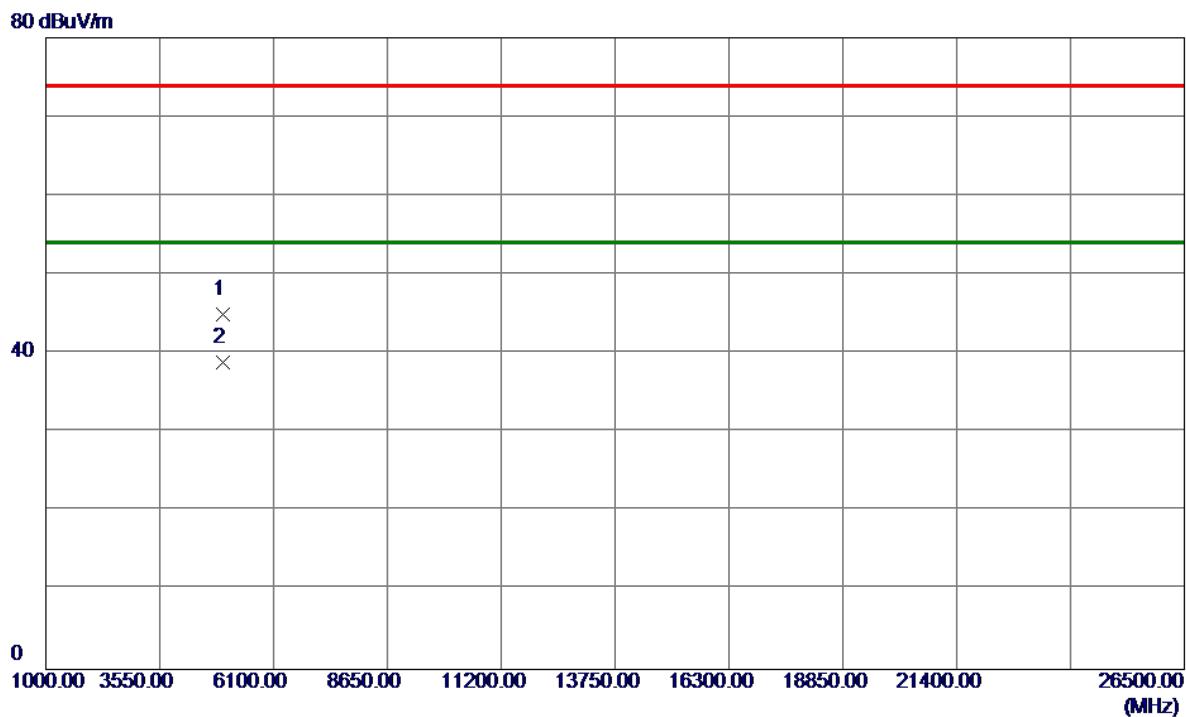


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	4959.7200	38.84	6.12	44.96	74.00	-29.04	Peak	
2 *	4960.0000	32.80	6.12	38.92	54.00	-15.08	AVG	

Test Mode : TX 2402MHz _CH00_3Mbps

Vertical


130 dBuV/m

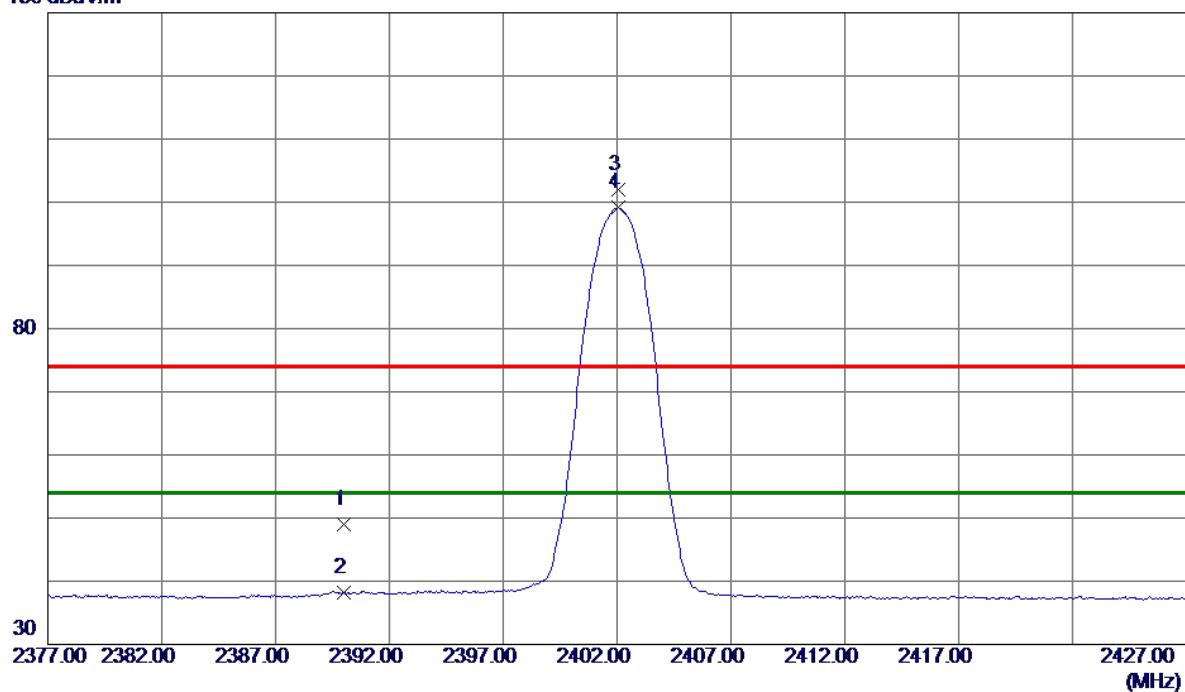

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin Detector	Comment	
							Detector	Comment
1	2390.0000	40.05	9.00	49.05	74.00	-24.95	Peak	
2	2390.0000	29.18	9.00	38.18	54.00	-15.82	AVG	
3	2402.0500	93.02	9.00	102.02	74.00	28.02	Peak	No Limit
4 *	2402.0500	90.11	9.00	99.11	54.00	45.11	AVG	No Limit

Test Mode : TX 2402MHz _CH00_3Mbps


Vertical

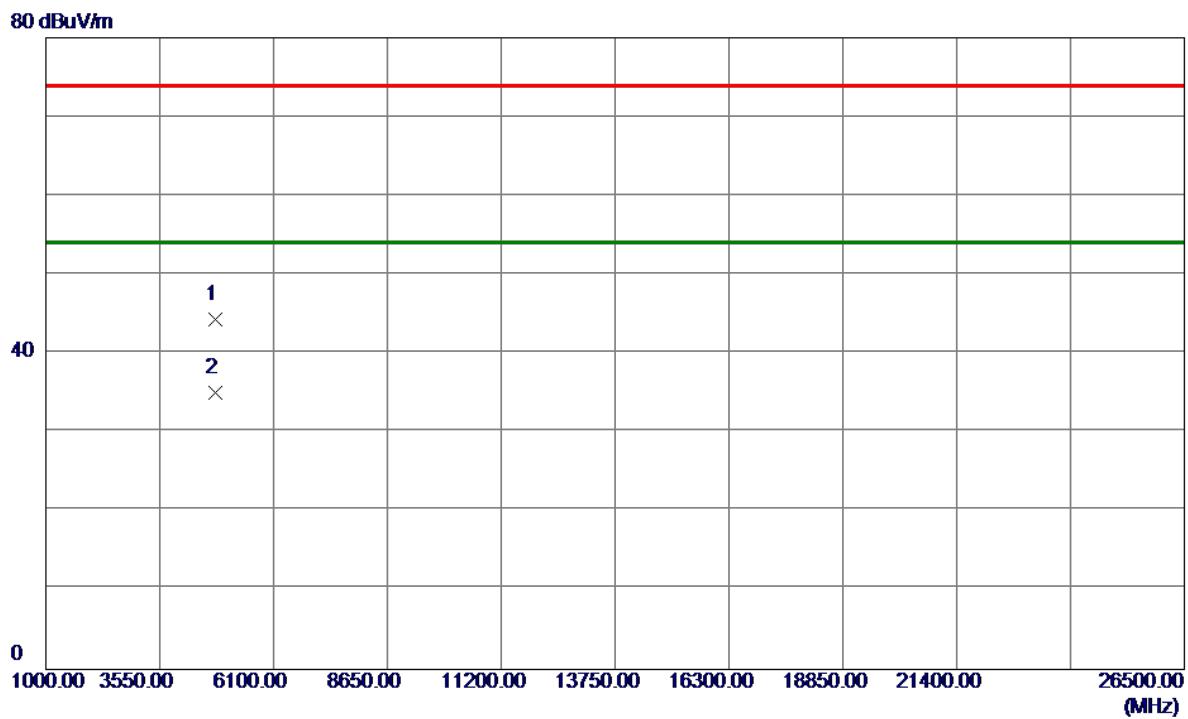

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	4804.0000	38.55	5.73	44.28	74.00	-29.72	Peak
2 *	4804.1000	29.29	5.73	35.02	54.00	-18.98	AVG


Test Mode : TX 2402MHz _CH00_3Mbps

Horizontal

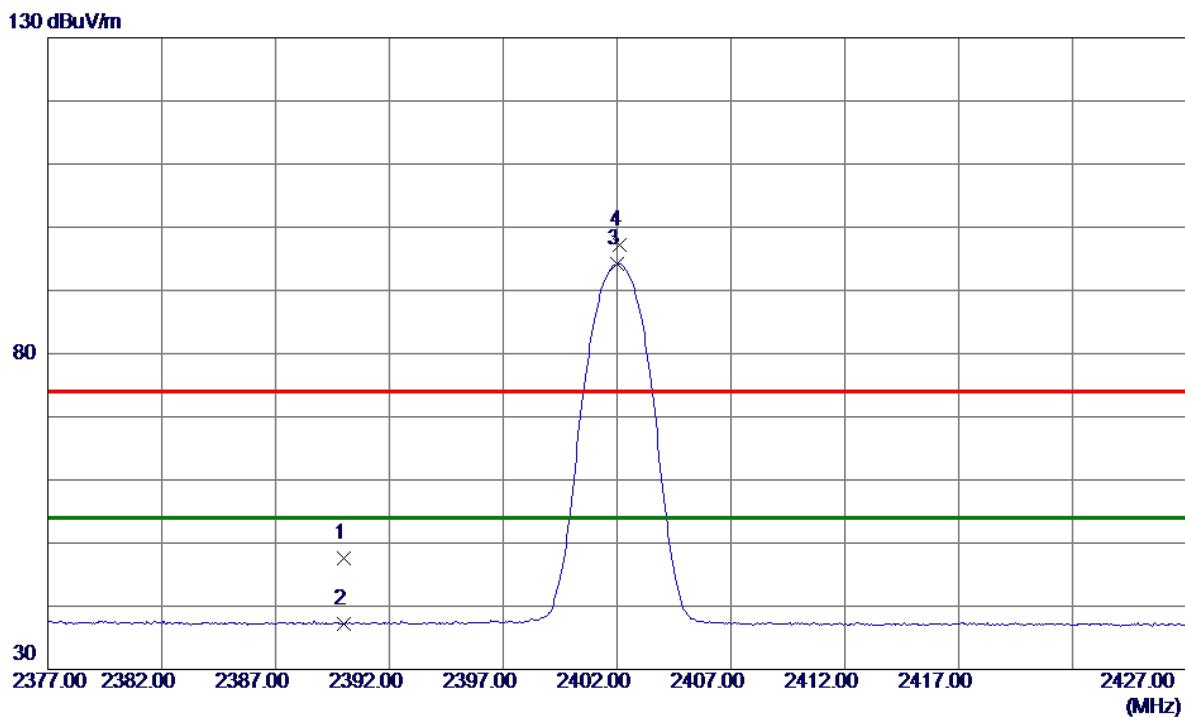

No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin		Detector	Comment
						MHz	dBuV/m	dB	dBuV/m
1	2390.0000	38.63	9.00	47.63	74.00	-26.37		Peak	
2	2390.0000	28.18	9.00	37.18	54.00	-16.82		AVG	
3 *	2402.0000	85.17	9.00	94.17	54.00	40.17		AVG	No Limit
4	2402.1000	88.14	9.00	97.14	74.00	23.14		Peak	No Limit

Test Mode :	TX 2402MHz _CH00_3Mbps
-------------	------------------------

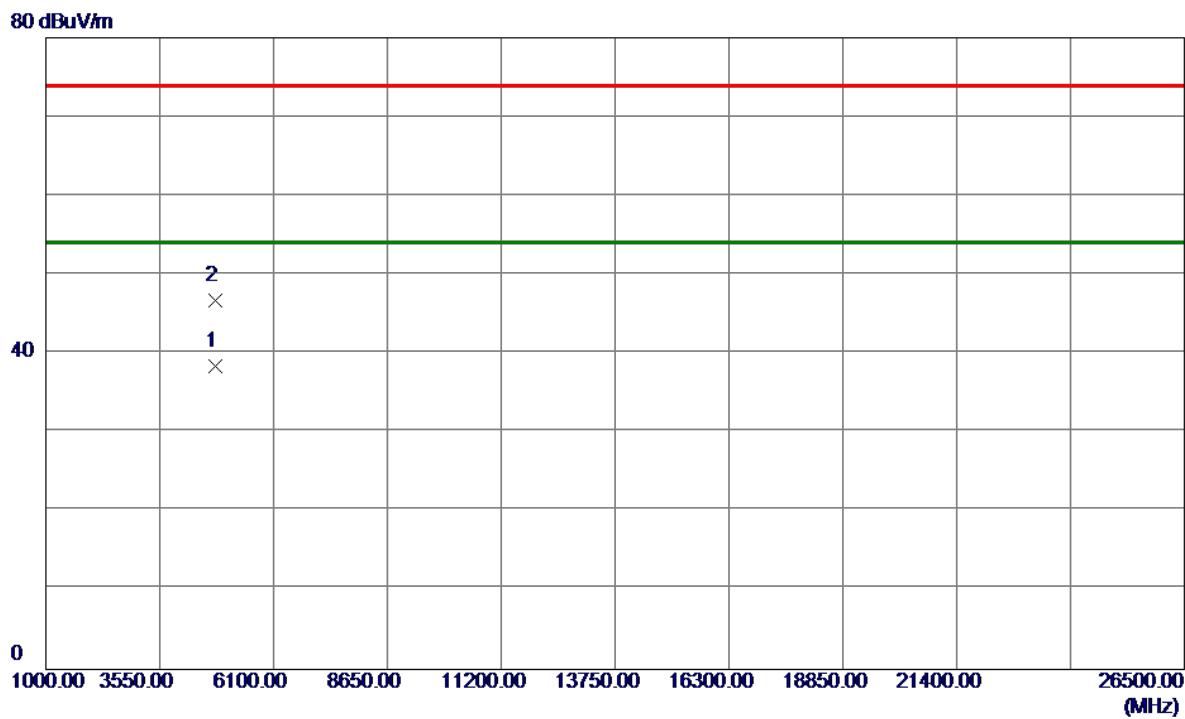
Horizontal

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4803.9200	32.61	5.73	38.34	54.00	-15.66	AVG	
2	4804.4000	40.93	5.73	46.66	74.00	-27.34	Peak	

Test Mode : TX 2441MHz _CH39_3Mbps

Vertical


130 dBuV/m

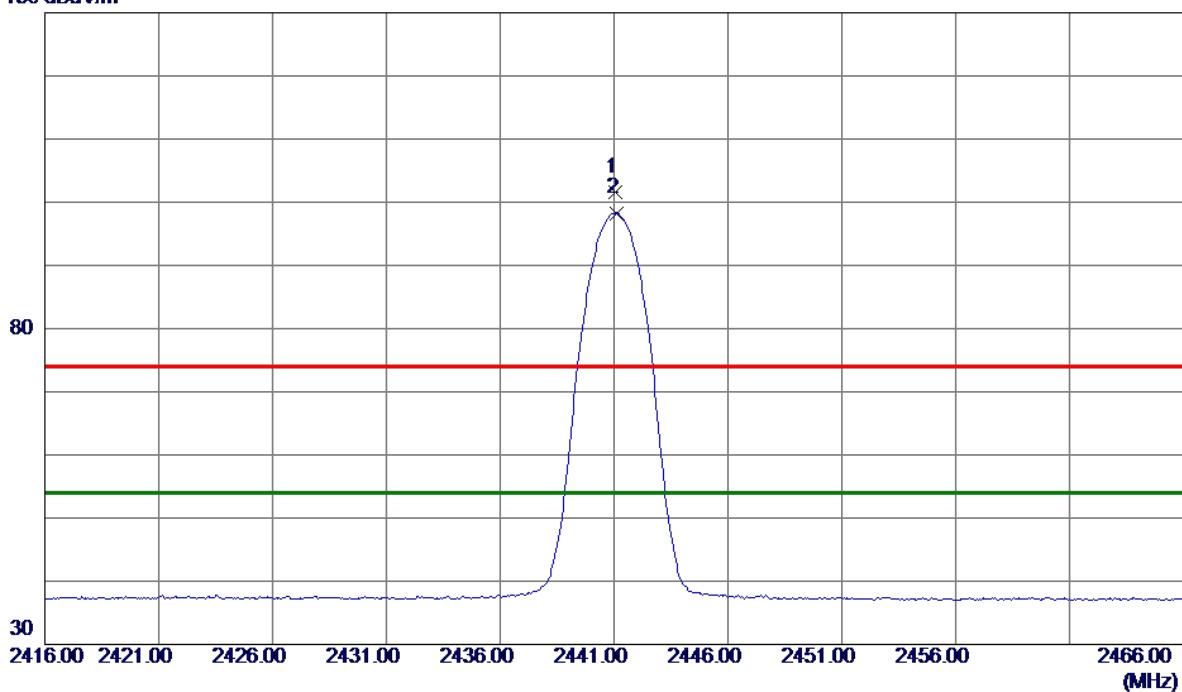

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2441.0500	92.58	8.98	101.56	74.00	27.56	Peak	No Limit
2 *	2441.1000	89.32	8.98	98.30	54.00	44.30	AVG	No Limit

Test Mode : TX 2441MHz _CH39_3Mbps


Vertical

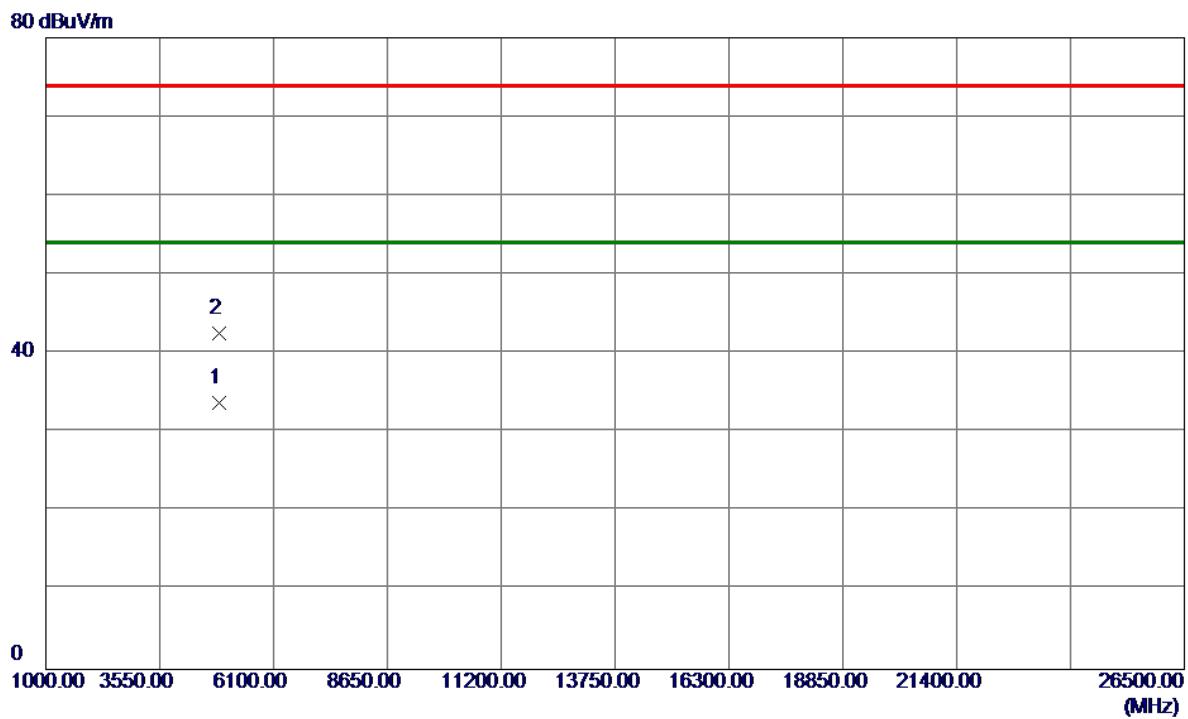

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4881.9600	27.79	5.92	33.71	54.00	-20.29	AVG	
2	4882.6000	36.64	5.93	42.57	74.00	-31.43	Peak	

Test Mode : TX 2441MHz _CH39_3Mbps


Horizontal

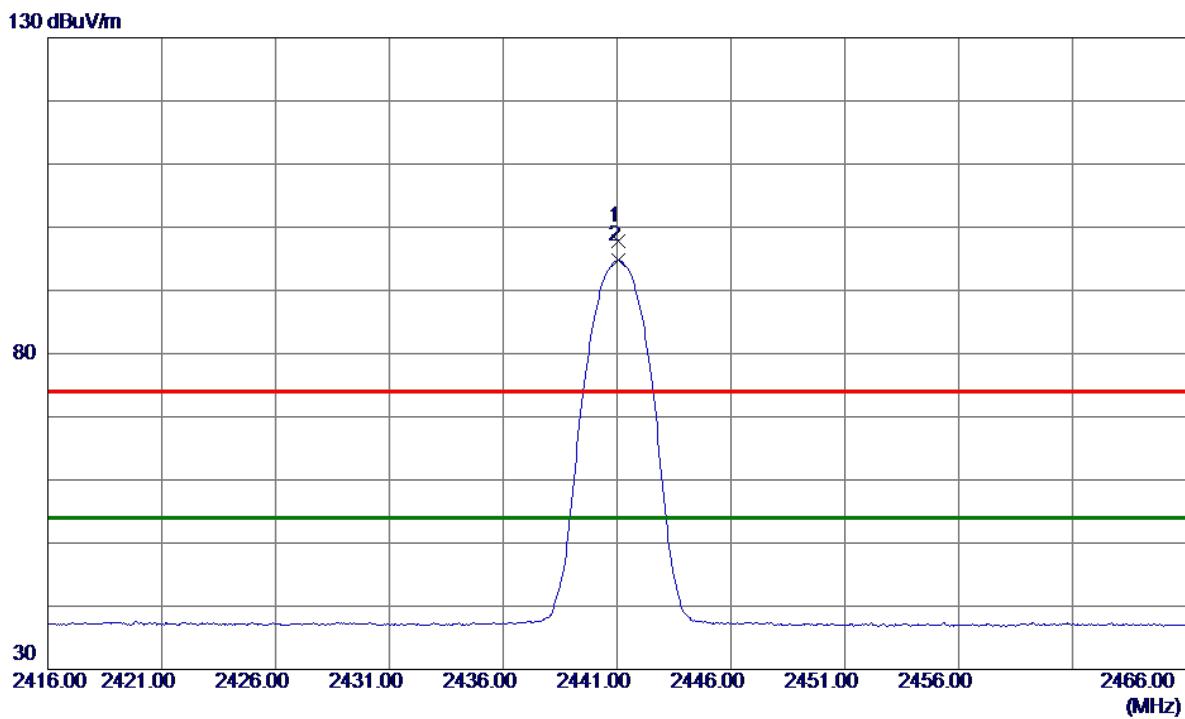

No.	Freq.	Reading Level	Correct Factor	Measurement	Margin			Detector	Comment
					MHz	dBuV/m	dB	dBuV/m	dB
1	2441.0500	88.87	8.98	97.85	74.00	23.85	Peak		No Limit
2 *	2441.0500	85.77	8.98	94.75	54.00	40.75	AVG		No Limit

Test Mode : TX 2441MHz _CH39_3Mbps

Horizontal

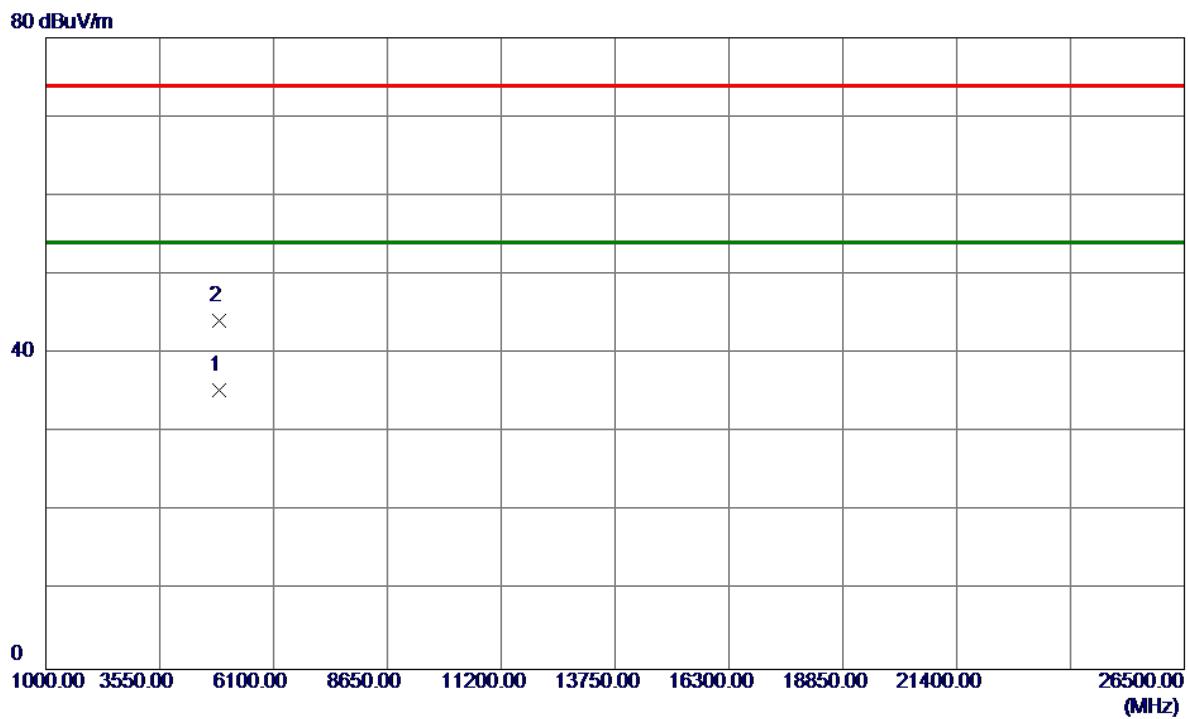


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4882.2400	29.50	5.93	35.43	54.00	-18.57	AVG	
2	4882.6400	38.21	5.93	44.14	74.00	-29.86	Peak	

Test Mode : TX 2480MHz _CH78_3Mbps


Vertical

130 dBuV/m

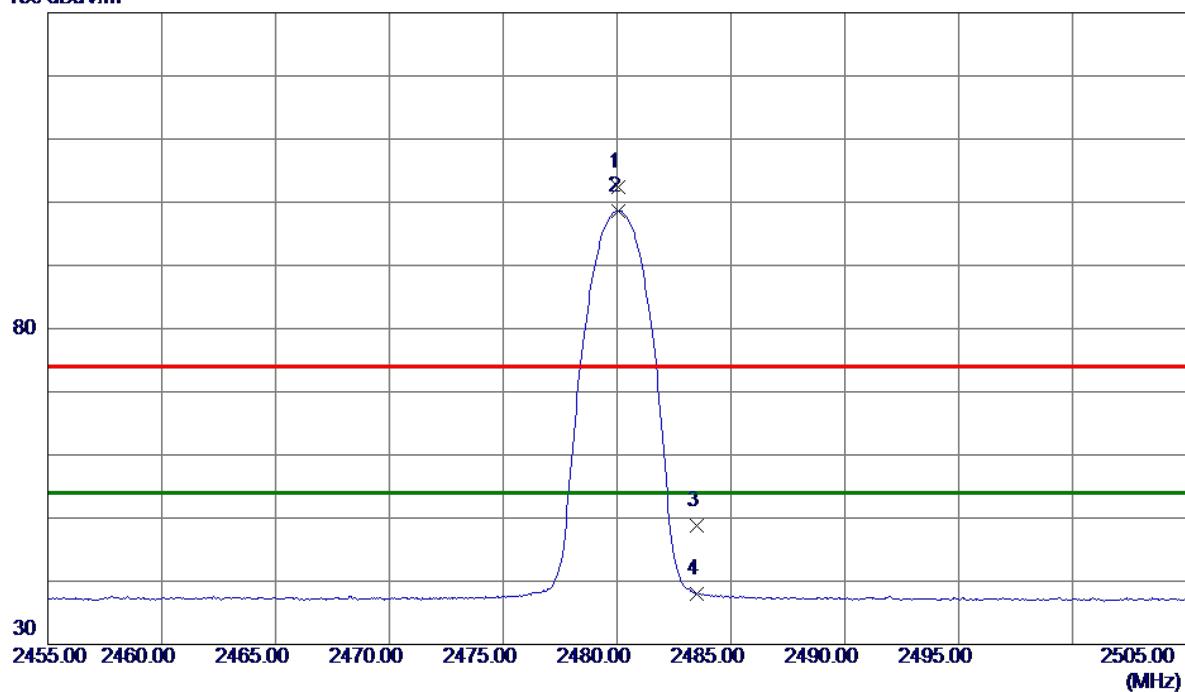

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2480.0500	93.39	8.97	102.36	74.00	28.36	Peak	No Limit
2 *	2480.0500	89.70	8.97	98.67	54.00	44.67	AVG	No Limit
3	2483.5000	39.78	8.97	48.75	74.00	-25.25	Peak	
4	2483.5000	29.10	8.97	38.07	54.00	-15.93	AVG	

Test Mode :	TX 2480MHz _CH78_3Mbps
-------------	------------------------

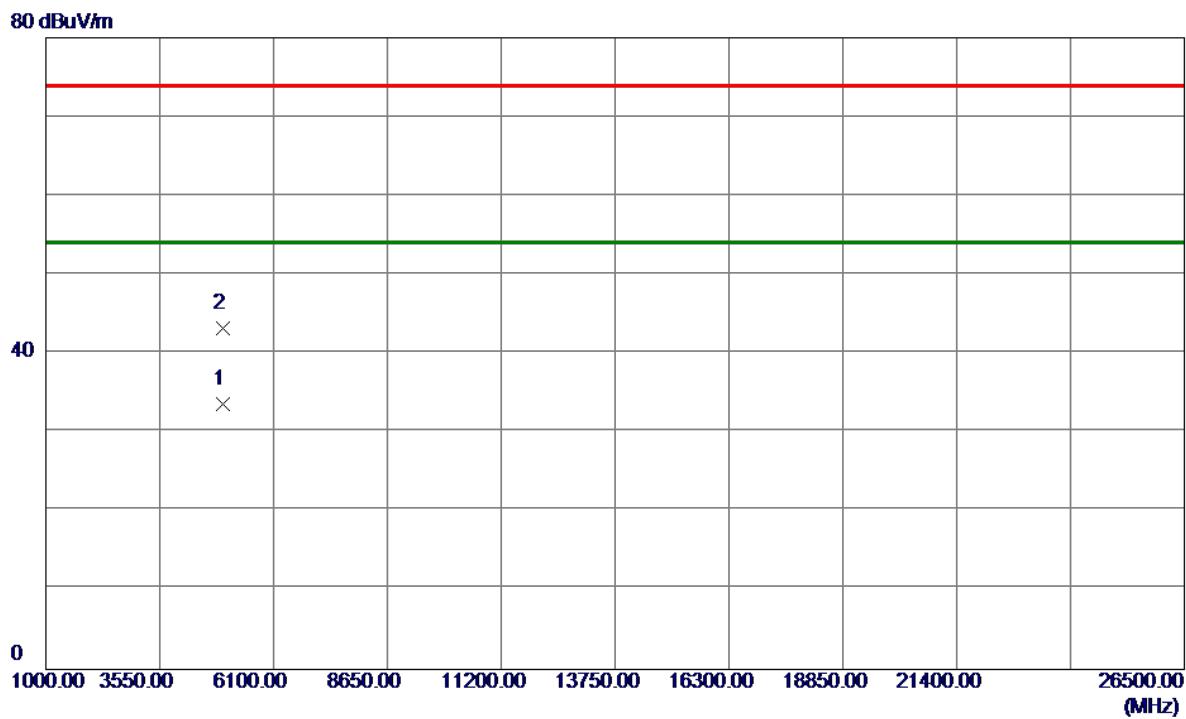
Vertical

No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4960.0400	27.44	6.12	33.56	54.00	-20.44	AVG	
2	4960.4200	37.04	6.12	43.16	74.00	-30.84	Peak	

Test Mode : TX 2480MHz _CH78_3Mbps

Horizontal


130 dBuV/m

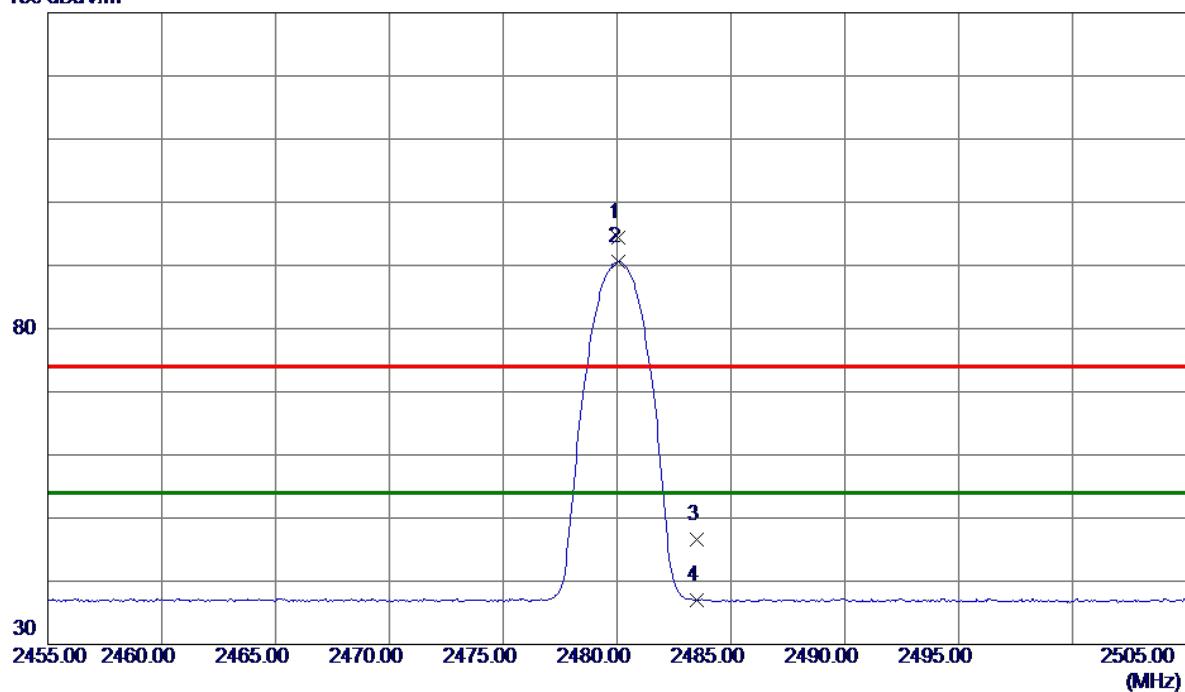

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	2480.0500	85.36	8.97	94.33	74.00	20.33	Peak
2 *	2480.0500	81.62	8.97	90.59	54.00	36.59	AVG
3	2483.5000	37.58	8.97	46.55	74.00	-27.45	Peak
4	2483.5000	28.08	8.97	37.05	54.00	-16.95	AVG

Test Mode : TX 2480MHz _CH78_3Mbps


Horizontal

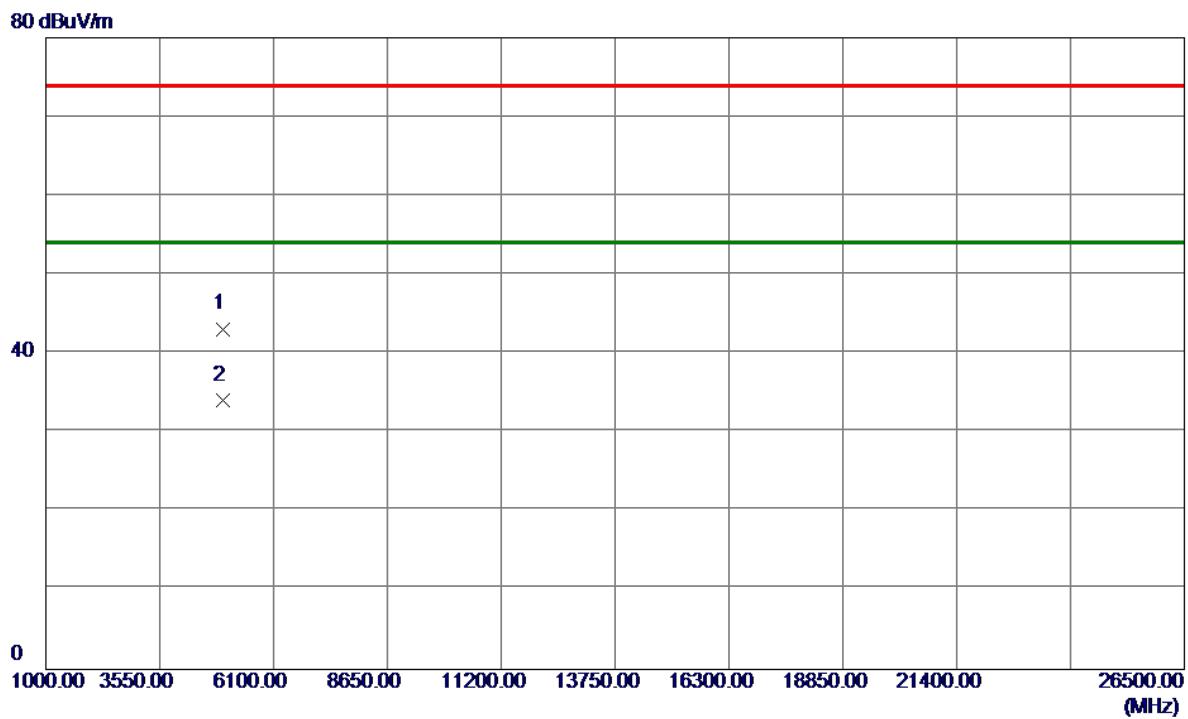

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dB			
1	4960.1000	37.00	6.12	43.12	74.00	-30.88	Peak	
2 *	4960.1400	28.02	6.12	34.14	54.00	-19.86	AVG	

Test Mode : 2.4G+BT Co-Location worst case


Vertical

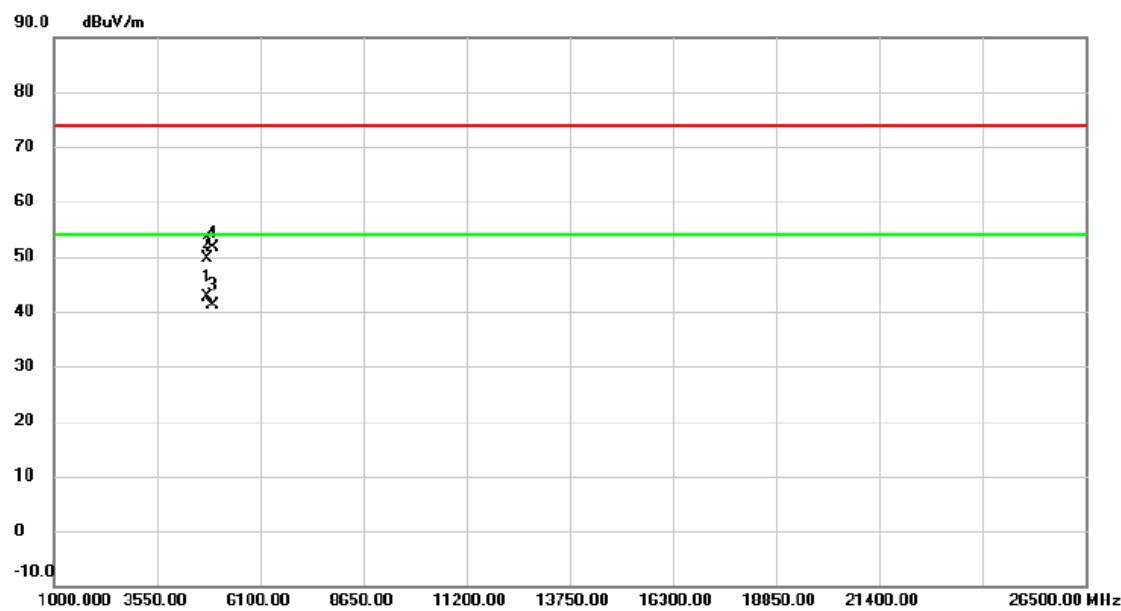

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4803.957	32.61	9.96	42.57	54.00	-11.43	AVG	
2		4804.020	39.64	9.96	49.60	74.00	-24.40	peak	
3		4924.338	30.80	10.28	41.08	54.00	-12.92	AVG	
4		4924.584	41.25	10.28	51.53	74.00	-22.47	peak	

Test Mode : 2.4G+BT Co-Location worst case


Horizontal

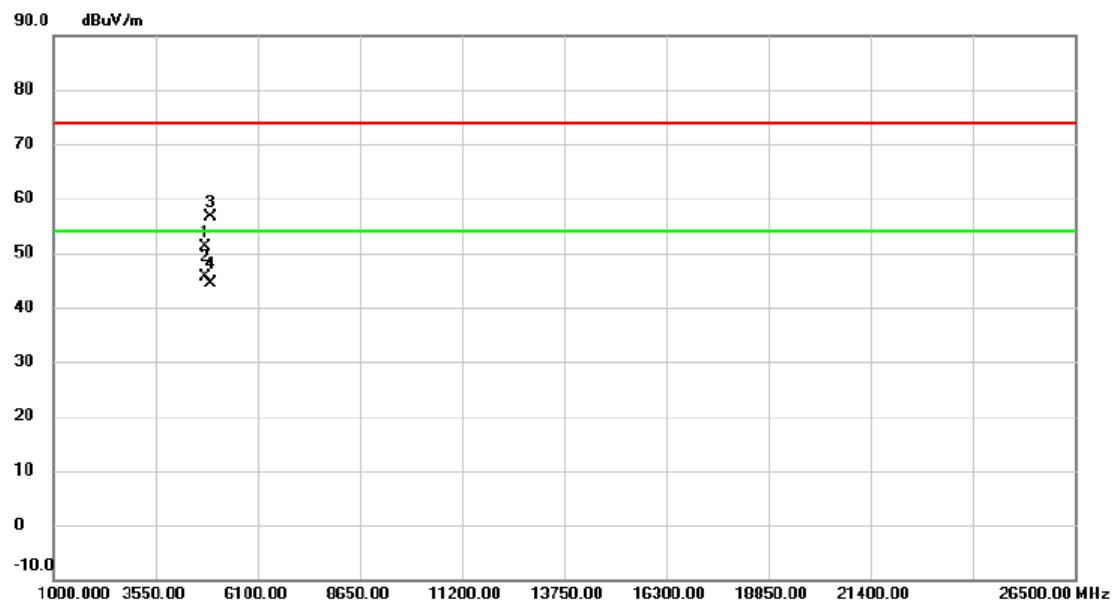

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4803.728	41.27	9.96	51.23	74.00	-22.77	peak
2	*	4804.035	35.78	9.96	45.74	54.00	-8.26	AVG
3		4923.321	46.23	10.28	56.51	74.00	-17.49	peak
4		4923.945	34.15	10.28	44.43	54.00	-9.57	AVG


Test Mode : 5G+BT Co-Location worst case

Vertical

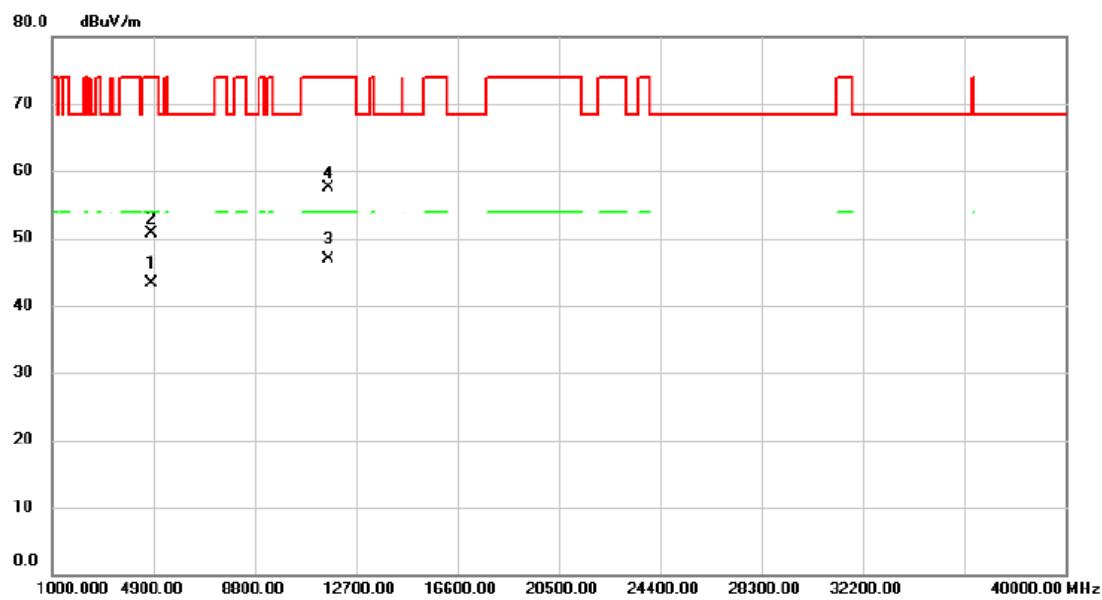

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4803.793	33.25	9.96	43.21	54.00	-10.79	AVG
2		4805.216	40.83	9.96	50.79	74.00	-23.21	peak
3	*	11648.230	25.60	21.27	46.87	54.00	-7.13	AVG
4		11650.820	36.20	21.27	57.47	74.00	-16.53	peak

Test Mode : 5G+BT Co-Location worst case

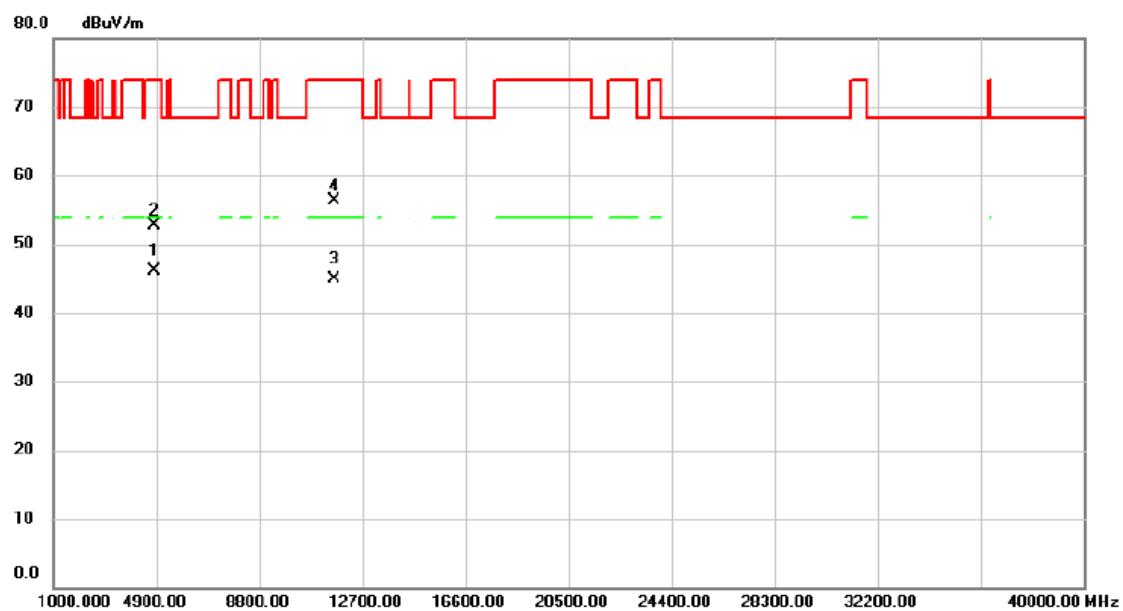Horizontal


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4803.793	36.21	9.96	46.17	54.00	-7.83	AVG	
2		4805.216	42.83	9.96	52.79	74.00	-21.21	peak	
3		11648.210	23.60	21.27	44.87	54.00	-9.13	AVG	
4		11651.830	34.98	21.27	56.25	74.00	-17.75	peak	

APPENDIX E - NUMBER OF HOPPING CHANNEL

Test Mode**Hopping Mode_1Mbps**

Number of Hopping Channel

79

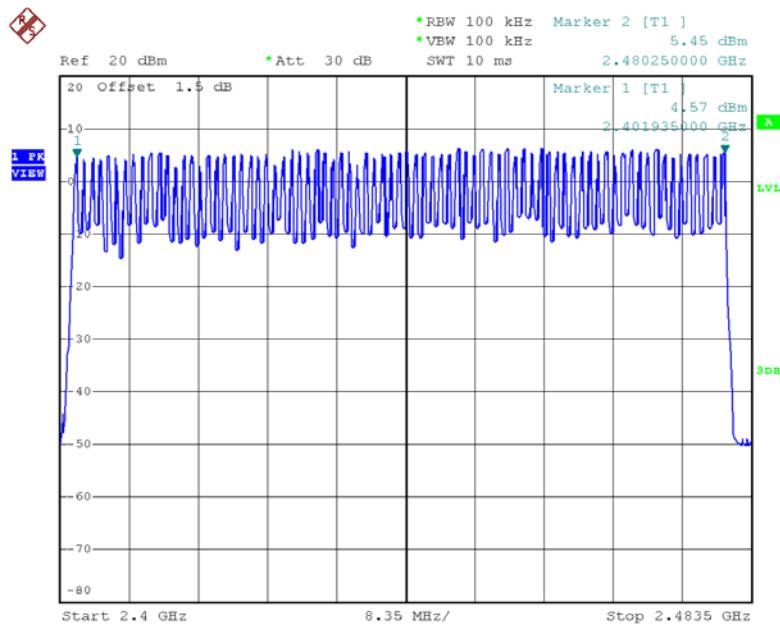


Date: 9.APR.2018 20:48:19

Test Mode**Hopping Mode_3Mbps**

Number of Hopping Channel

79

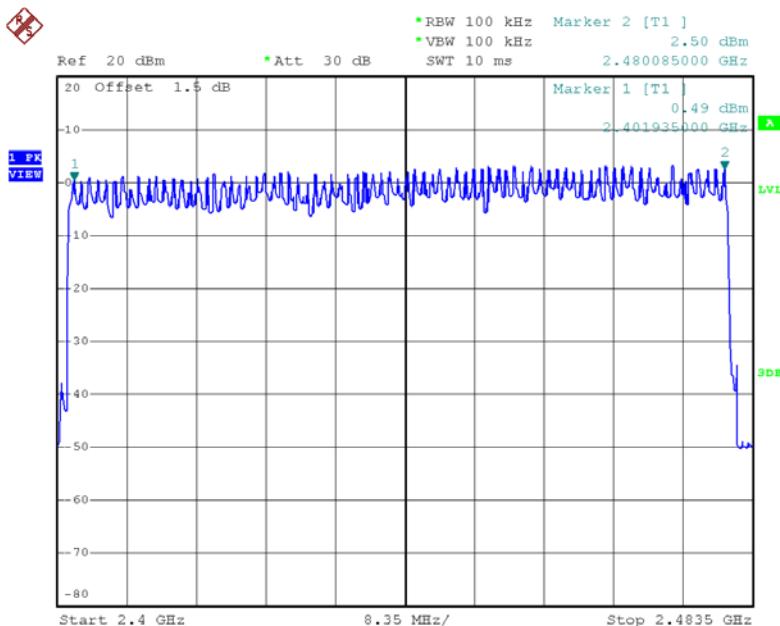


Date: 9.APR.2018 21:05:42

APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode : TX Mode_1Mbps


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH1	2402	0.3850	0.1232	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.3850	0.1232	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH1	2480	0.3850	0.1232	0.4000	Pass

CH00-DH1

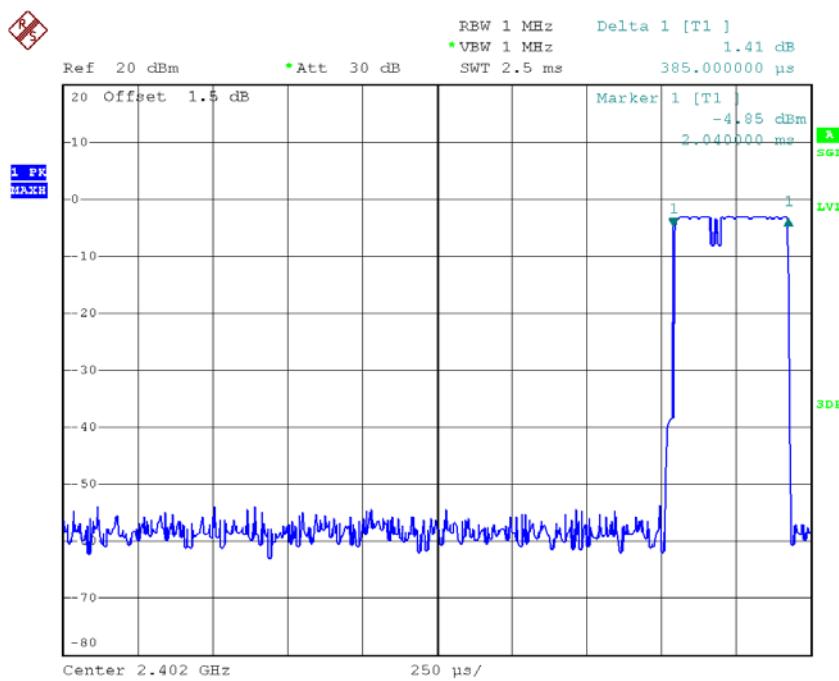


Date: 9.APR.2018 20:42:52

CH00-DH3

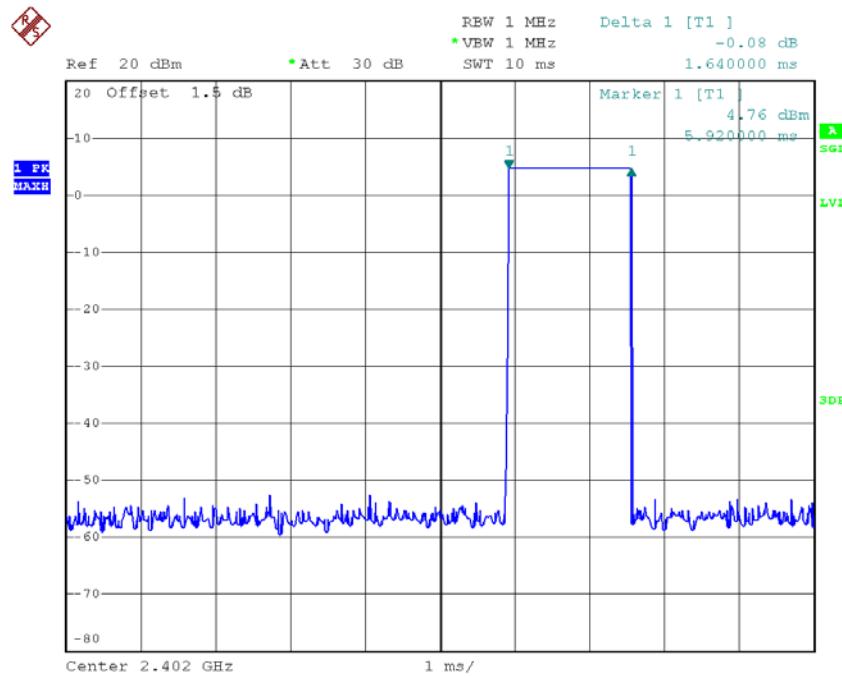


Date: 9.APR.2018 20:53:59

CH00-DH5

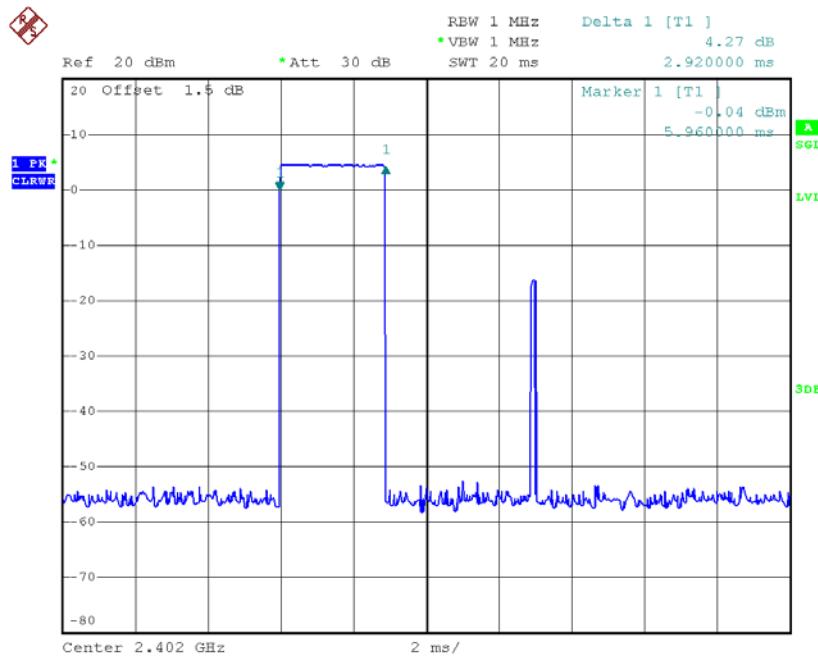


Date: 9.APR.2018 20:55:30

CH39-DH1

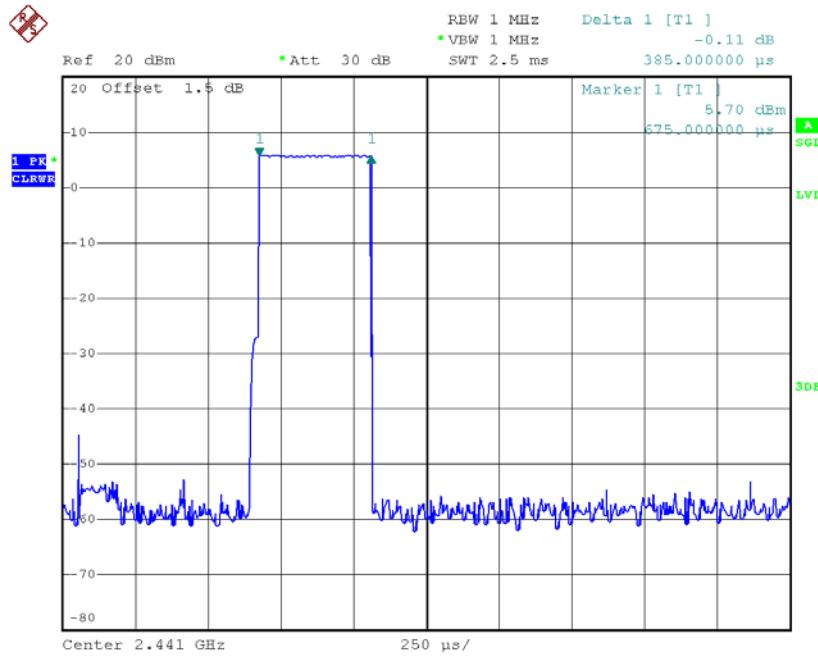


Date: 9.APR.2018 20:42:58

CH39-DH3

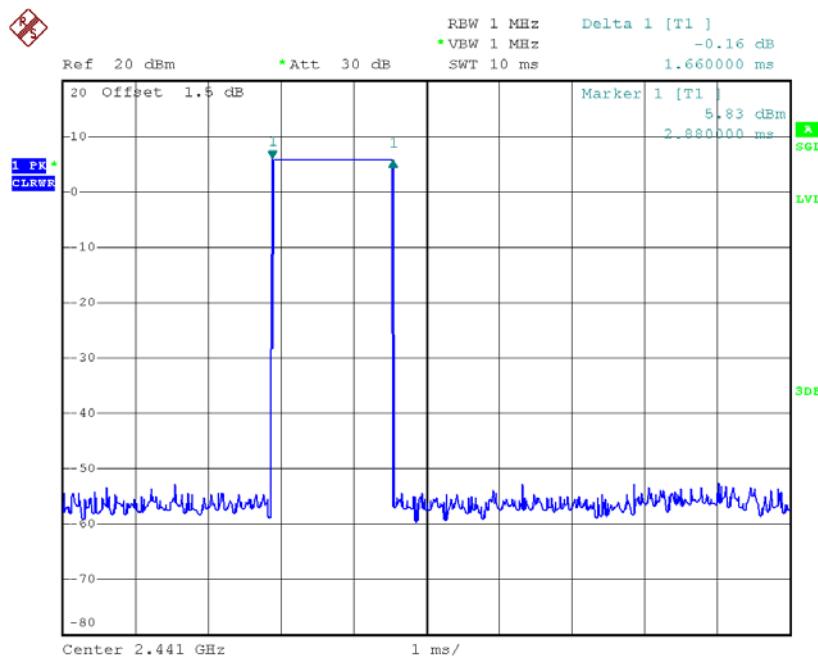


Date: 9.APR.2018 20:54:07

CH39-DH5

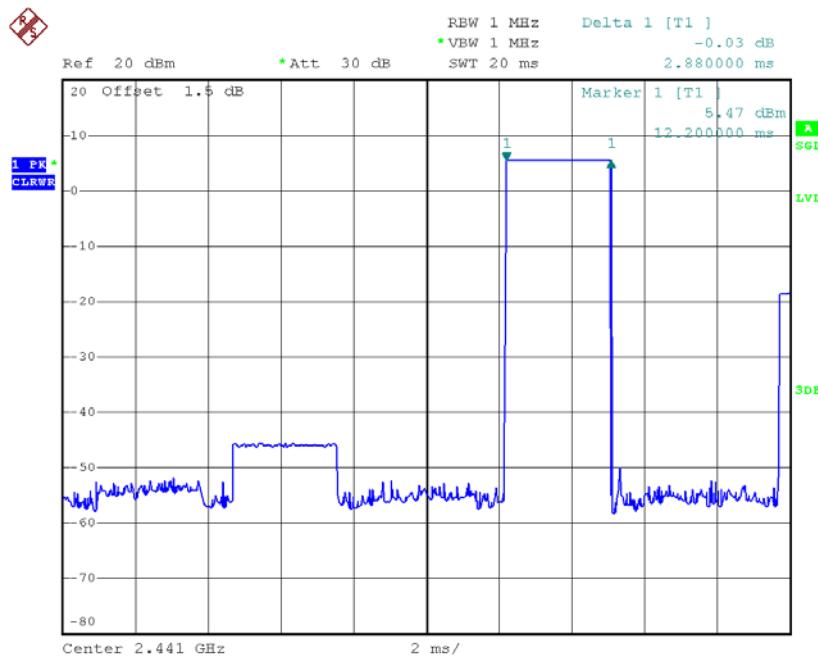


Date: 9.APR.2018 20:55:35

CH78-DH1

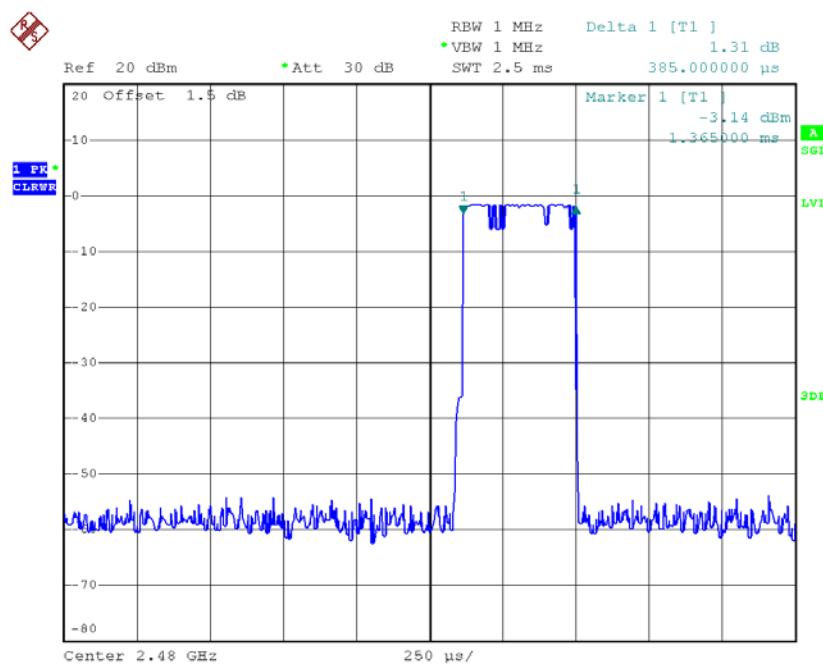


Date: 9.APR.2018 20:43:04

CH78-DH3

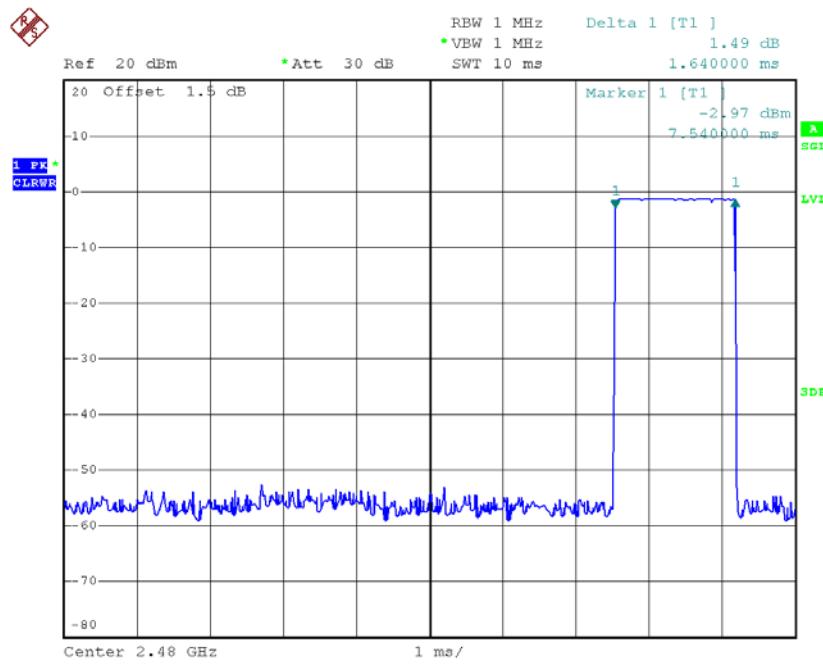

Date: 9.APR.2018 20:54:12

CH78-DH5

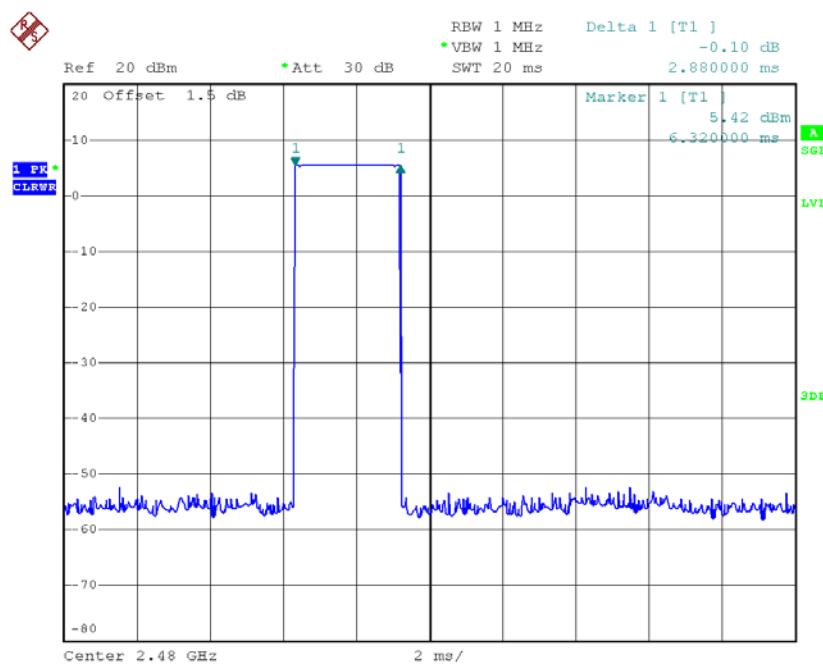


Date: 9.APR.2018 20:55:40

Test Mode : TX Mode_3Mbps


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.8800	0.3072	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH1	2402	0.3900	0.1248	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH1	2441	0.3900	0.1248	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH1	2480	0.3900	0.1248	0.4000	Pass

CH00-DH1

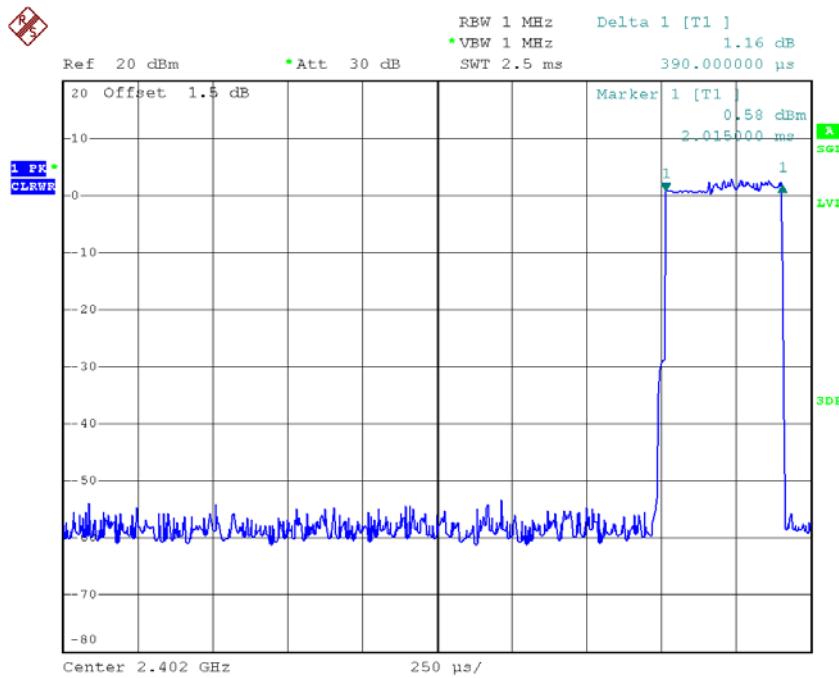


Date: 9.APR.2018 20:58:13

CH00-DH3

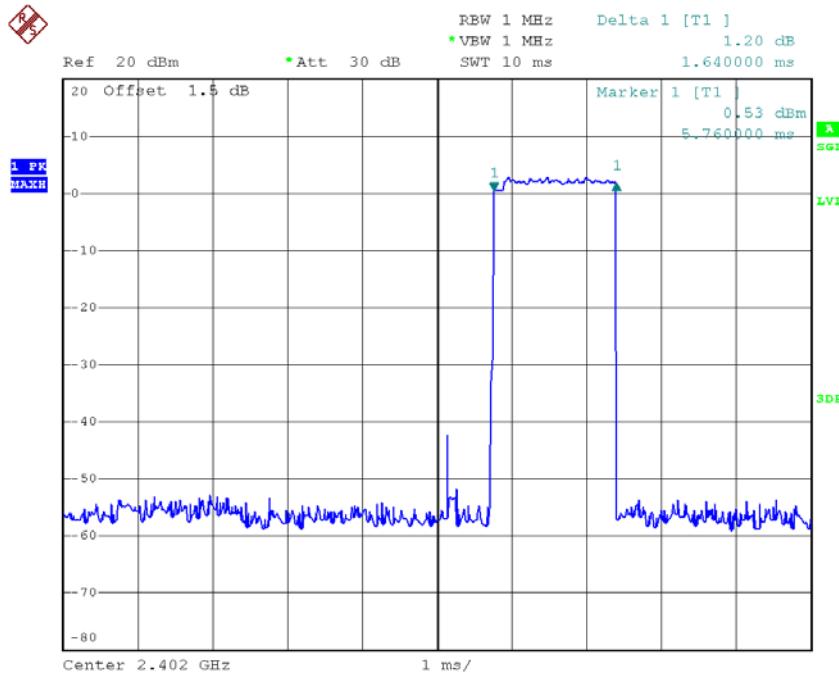


Date: 9.APR.2018 21:07:22

CH00-DH5

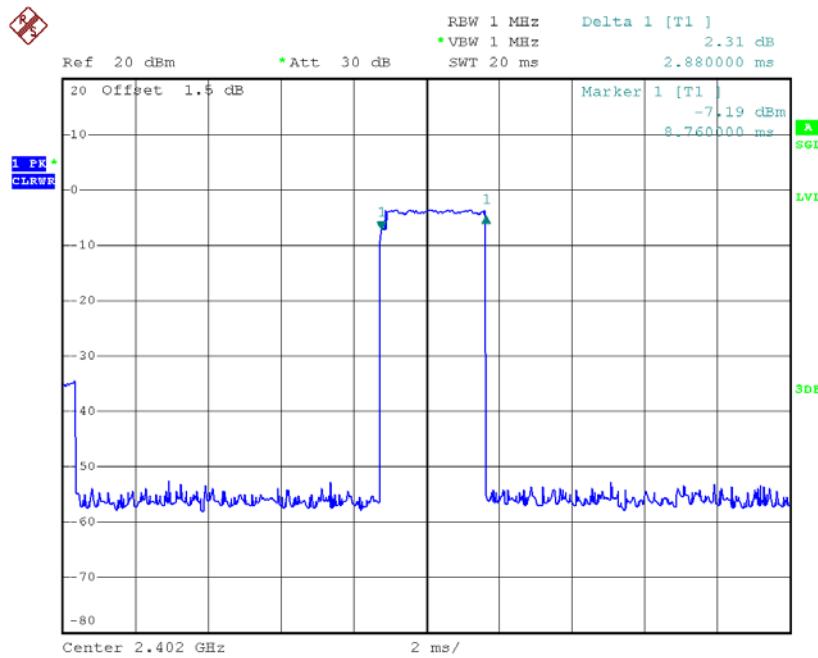


Date: 9.APR.2018 21:08:29

CH39-DH1

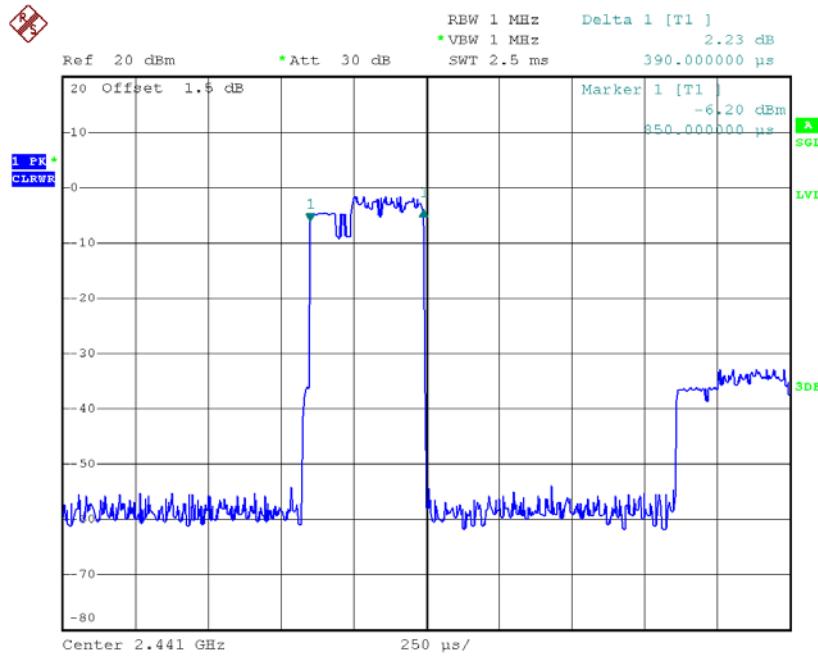


Date: 9.APR.2018 20:58:18

CH39-DH3

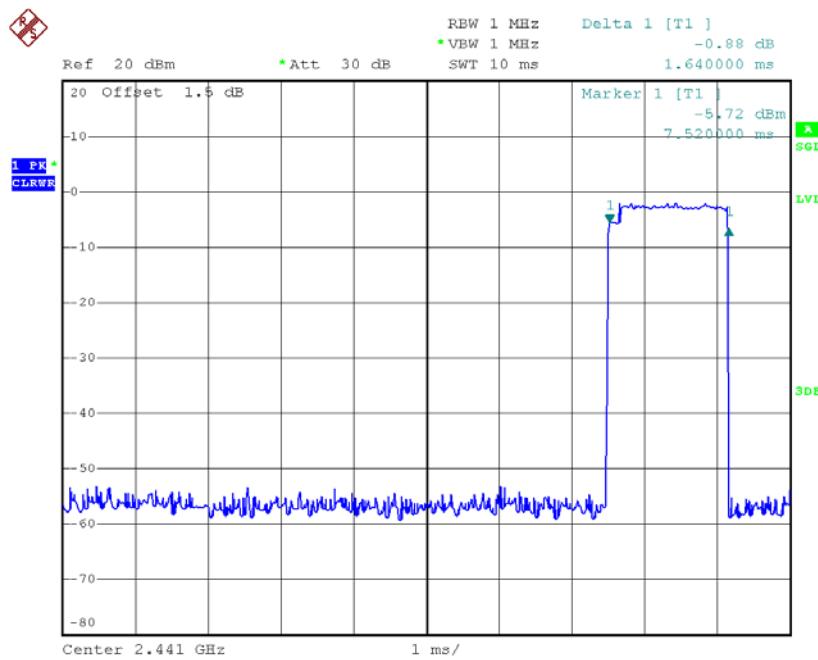


Date: 9.APR.2018 21:07:27

CH39-DH5

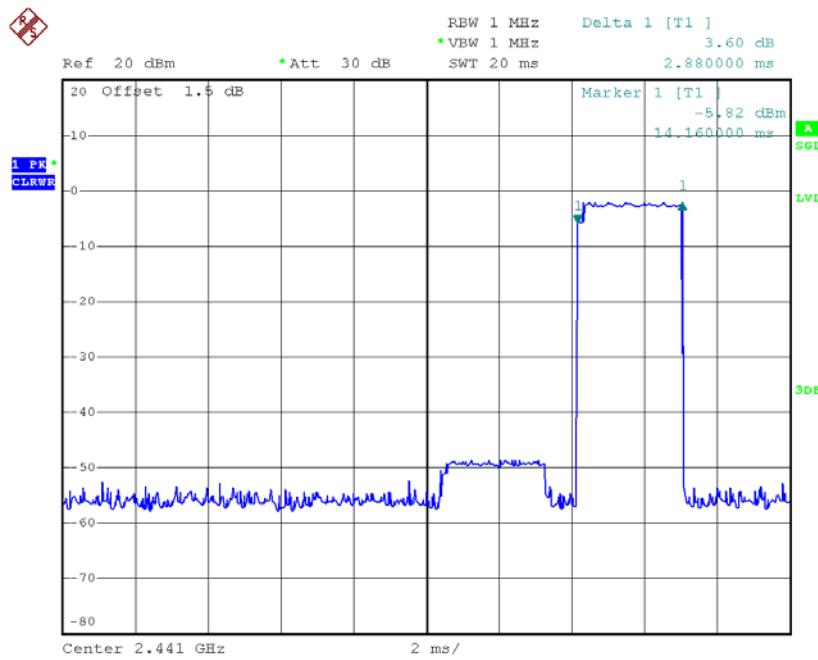


Date: 9.APR.2018 21:08:36

CH78-DH1

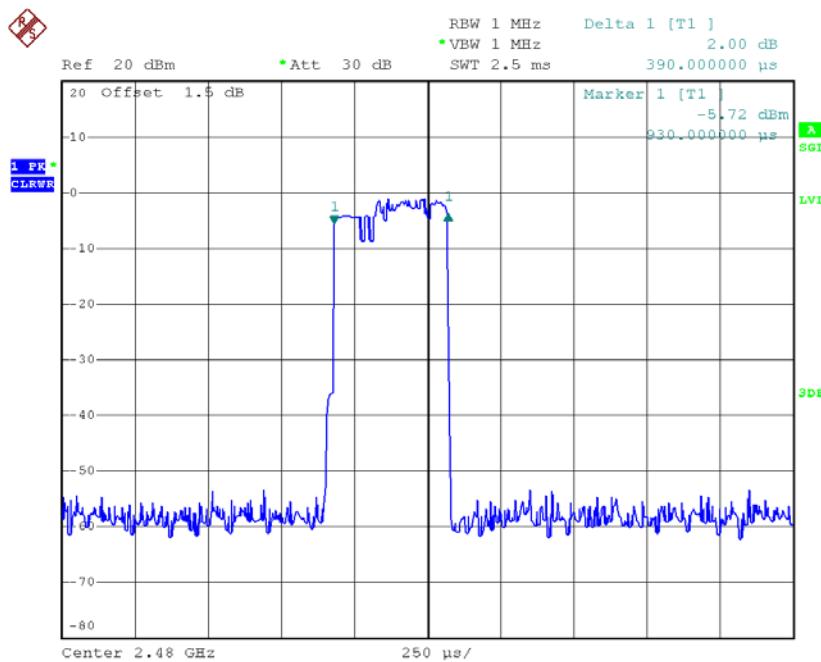


Date: 9.APR.2018 20:58:24

CH78-DH3

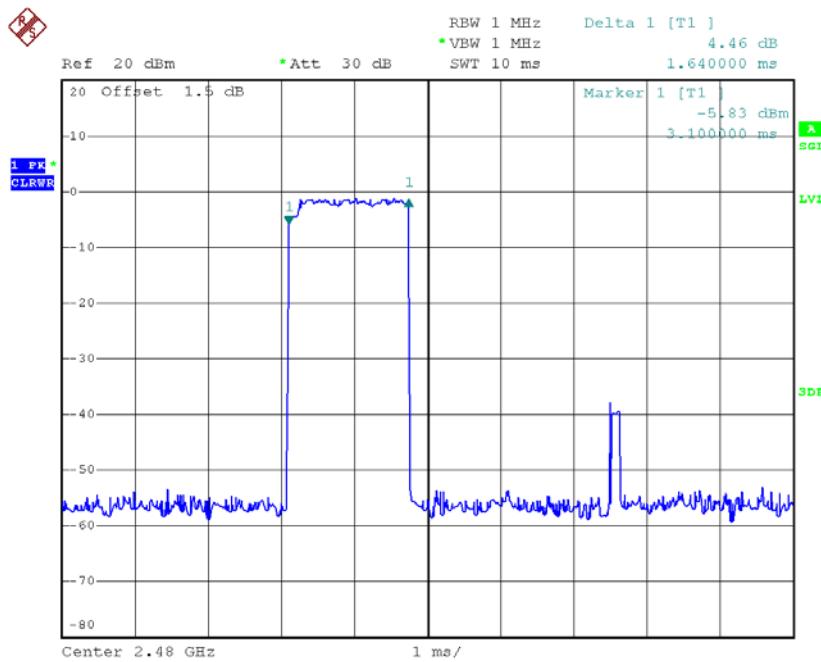

Date: 9.APR.2018 21:07:32

CH78-DH5

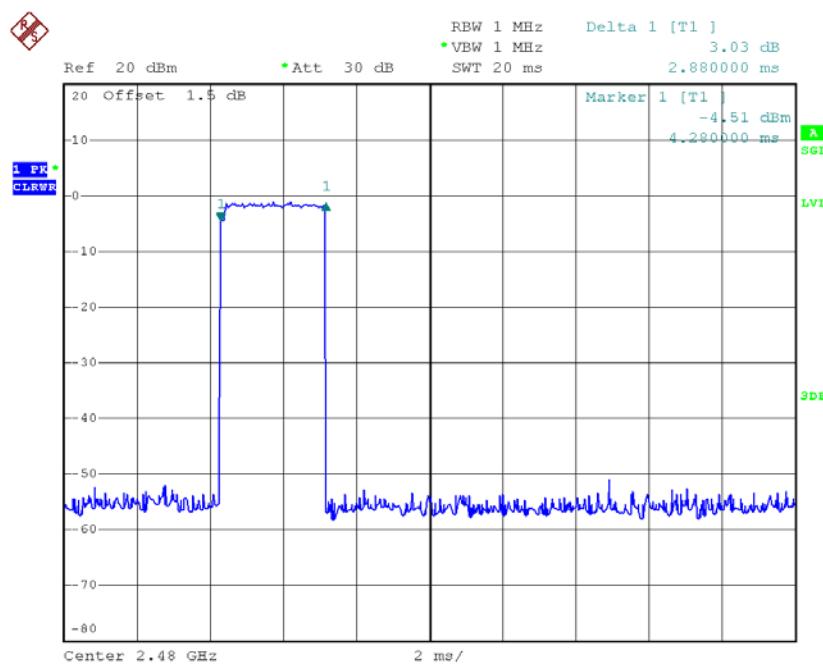


Date: 9.APR.2018 21:08:41

APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT


Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.320	0.657	Pass
2441	1.284	0.660	Pass
2480	0.946	0.663	Pass

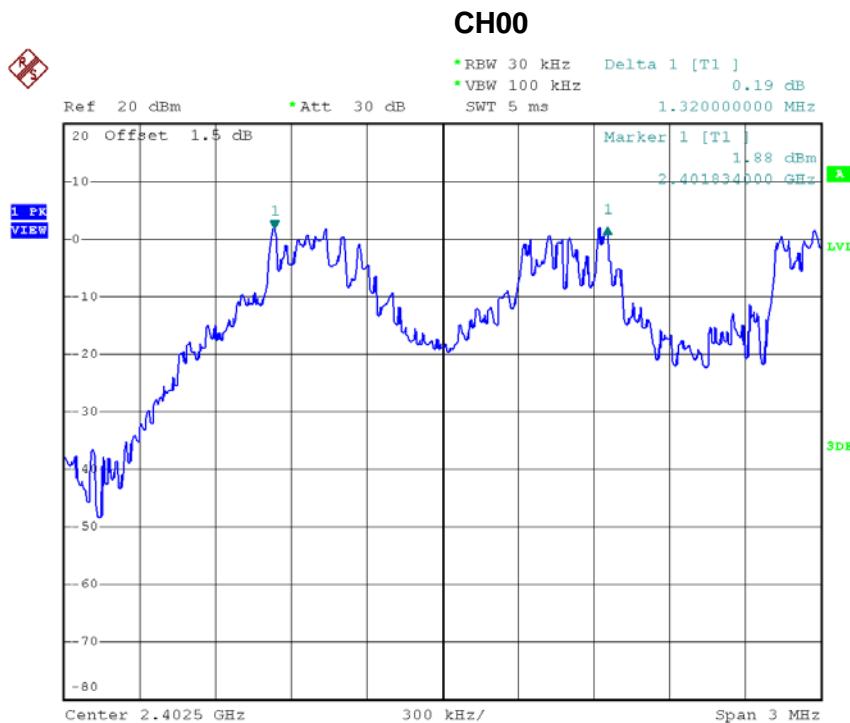


Date: 9.APR.2018 20:44:09

CH39

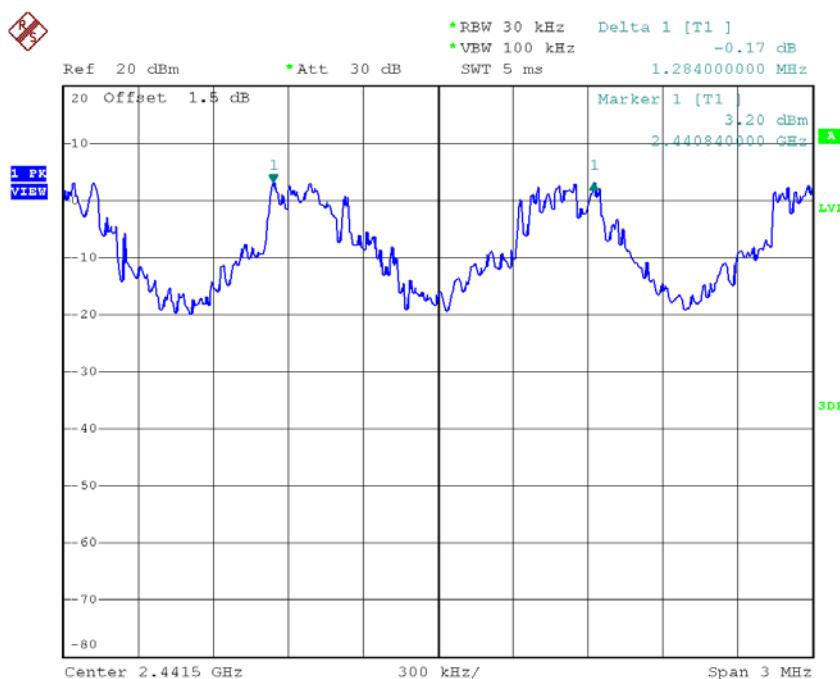

Date: 9.APR.2018 20:45:14


CH78

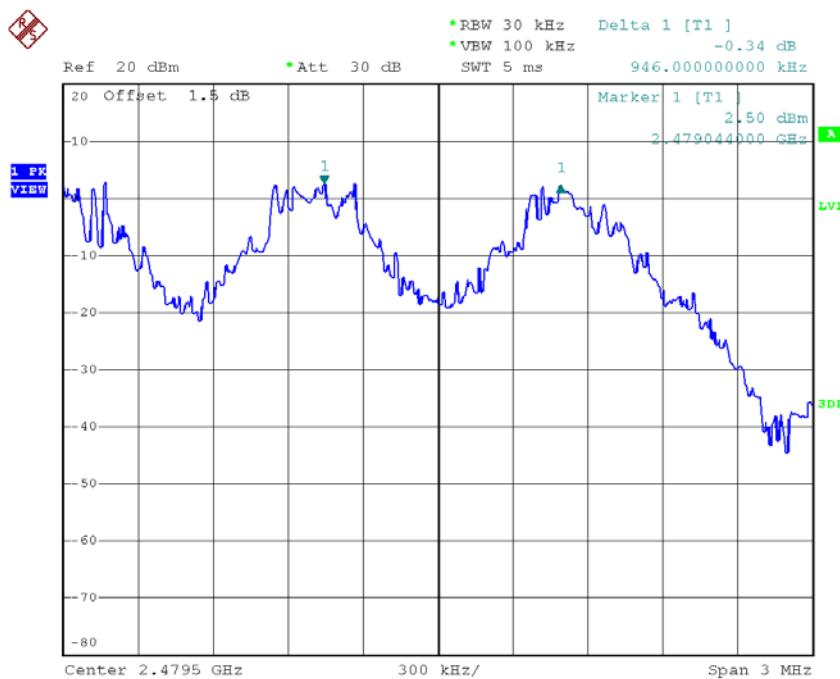

Date: 9.APR.2018 20:46:27


Test Mode : Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.008	0.896	Pass
2441	1.018	0.895	Pass
2480	0.996	0.879	Pass

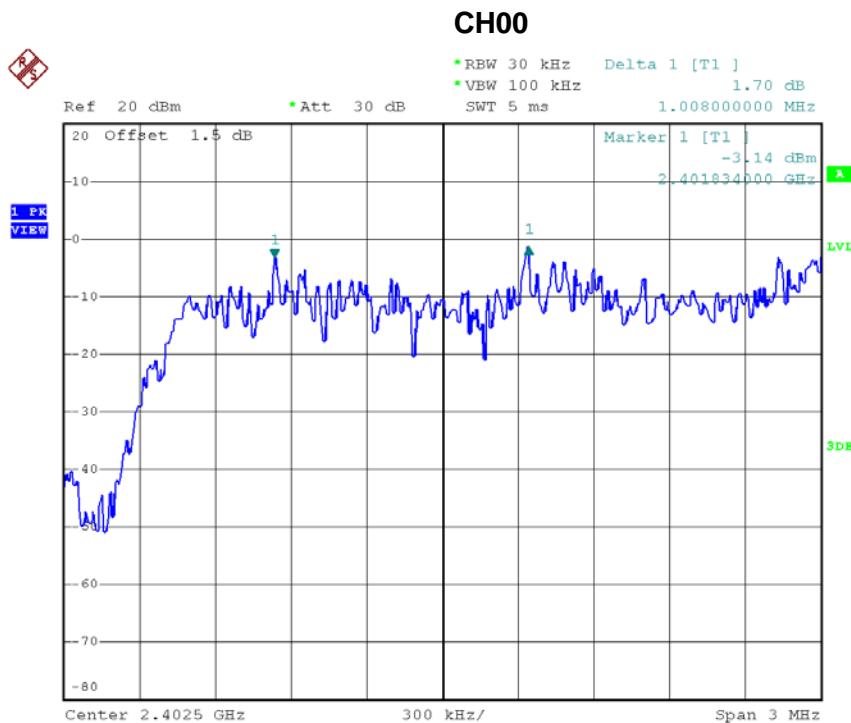


Date: 9.APR.2018 20:59:30

CH39

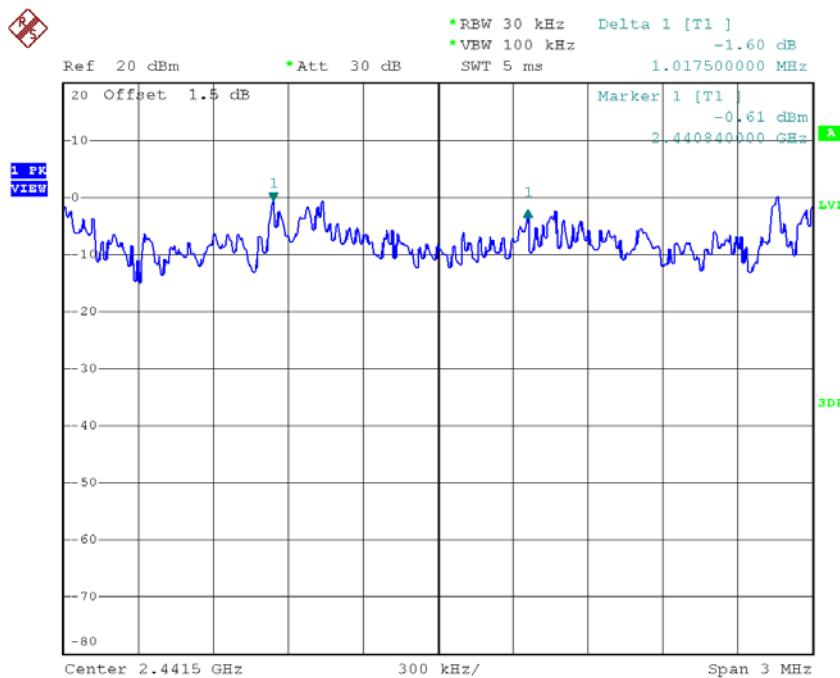

Date: 9.APR.2018 21:00:42

CH78

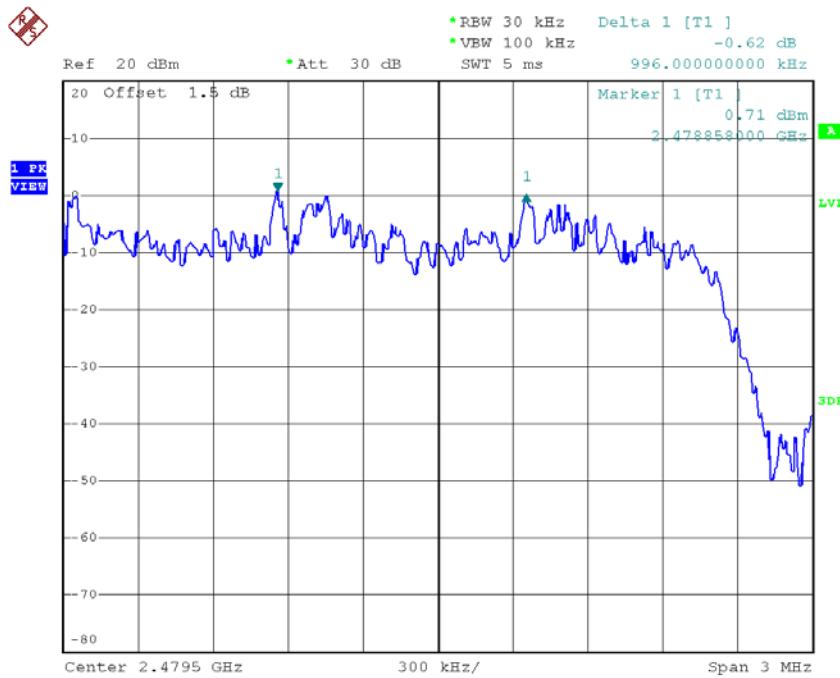


Date: 9.APR.2018 21:03:50

APPENDIX H - BANDWIDTH


Test Mode : TX Mode _1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.986	0.904	Pass
2441	0.990	0.896	Pass
2480	0.994	0.900	Pass

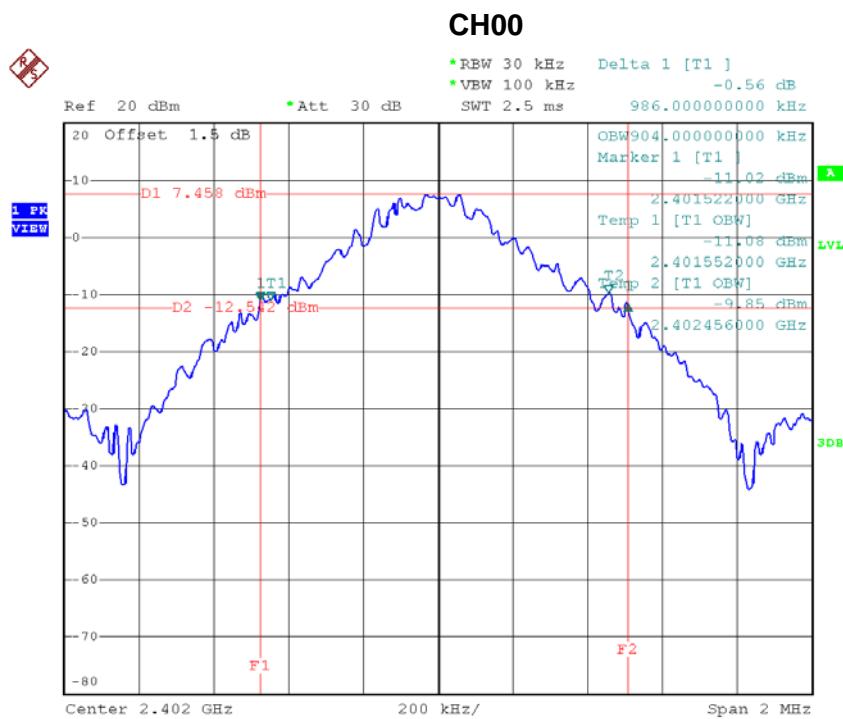


Date: 9.APR.2018 18:09:17

CH39

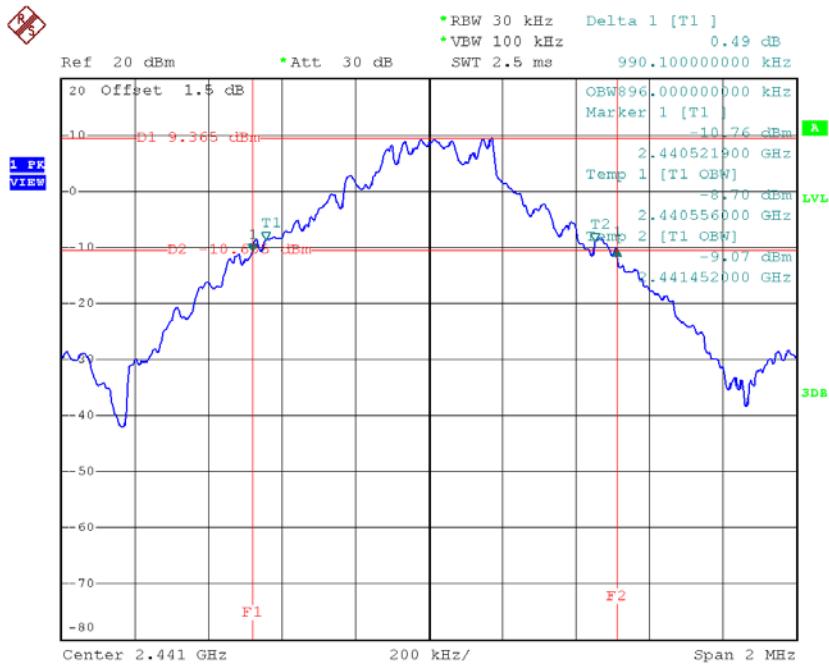

Date: 9.APR.2018 18:14:20


CH78

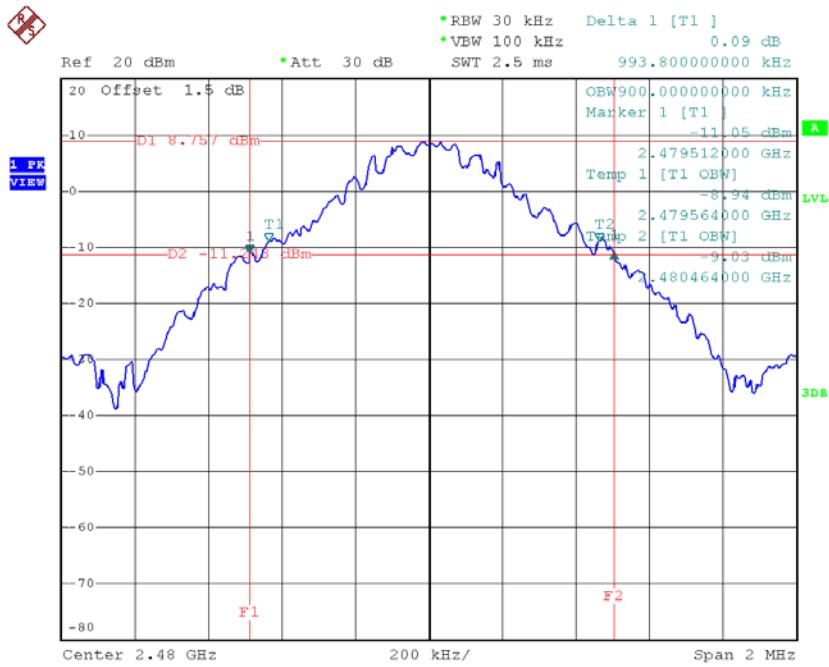

Date: 9.APR.2018 18:15:54


Test Mode : TX Mode _3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.344	1.216	Pass
2441	1.342	1.228	Pass
2480	1.318	1.224	Pass

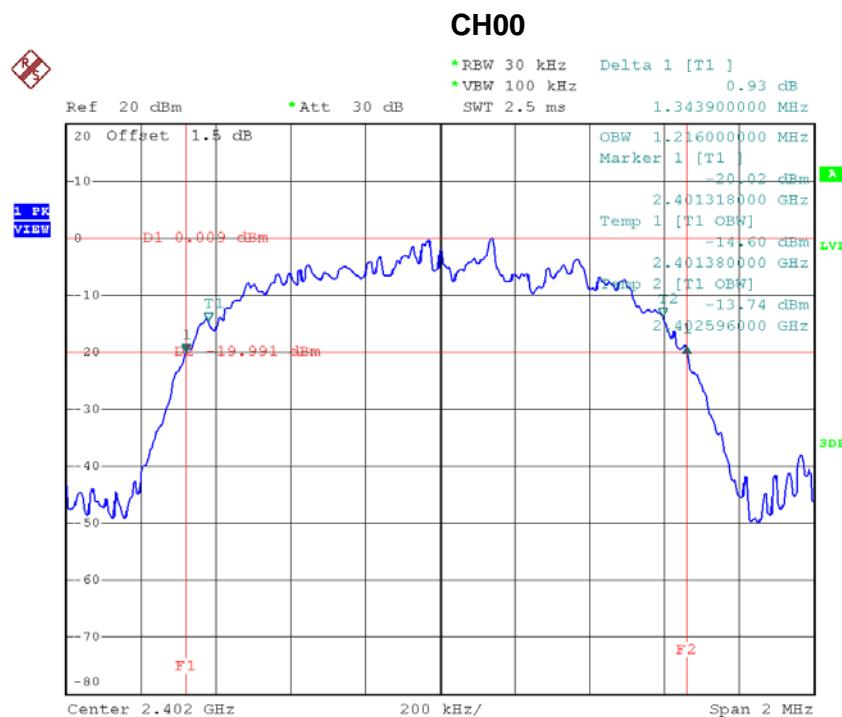


Date: 9.APR.2018 18:27:24

CH39

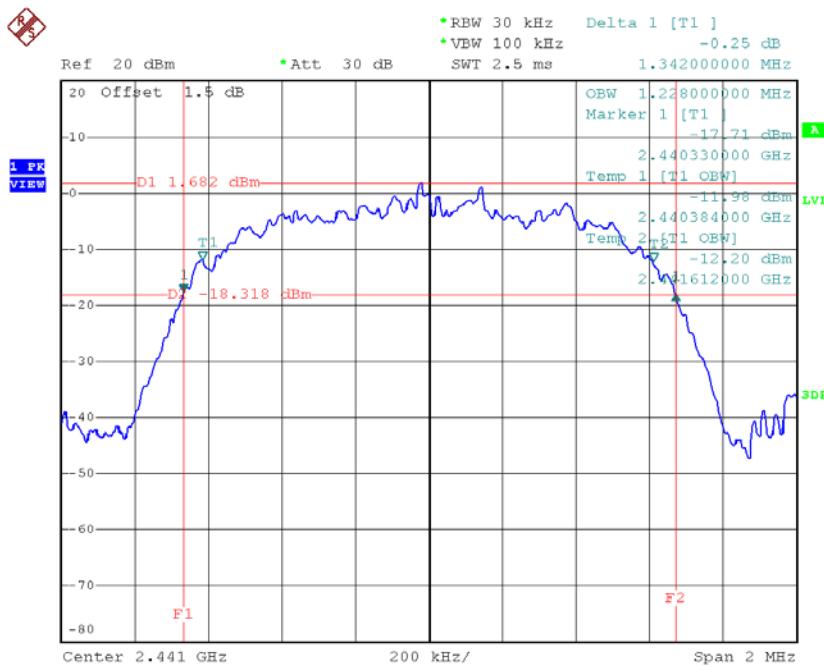

Date: 9.APR.2018 18:31:26

CH78

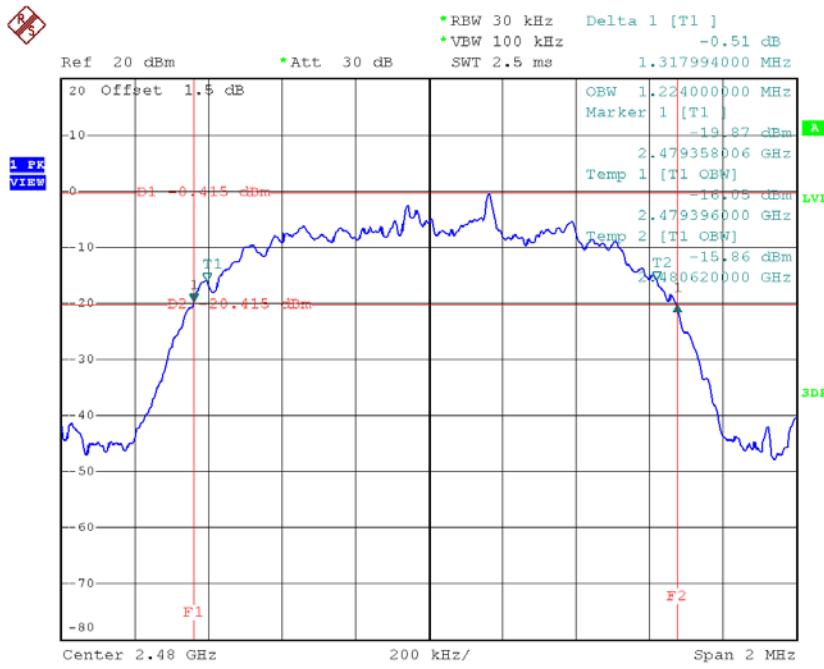


Date: 9.APR.2018 18:40:35

APPENDIX I - PEAK OUTPUT POWER

Test Mode : TX Mode _1Mbps


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.27	0.0053	21.00	0.125	Pass
2441	4.86	0.0031	21.00	0.125	Pass
2480	5.45	0.0035	21.00	0.125	Pass

CH00

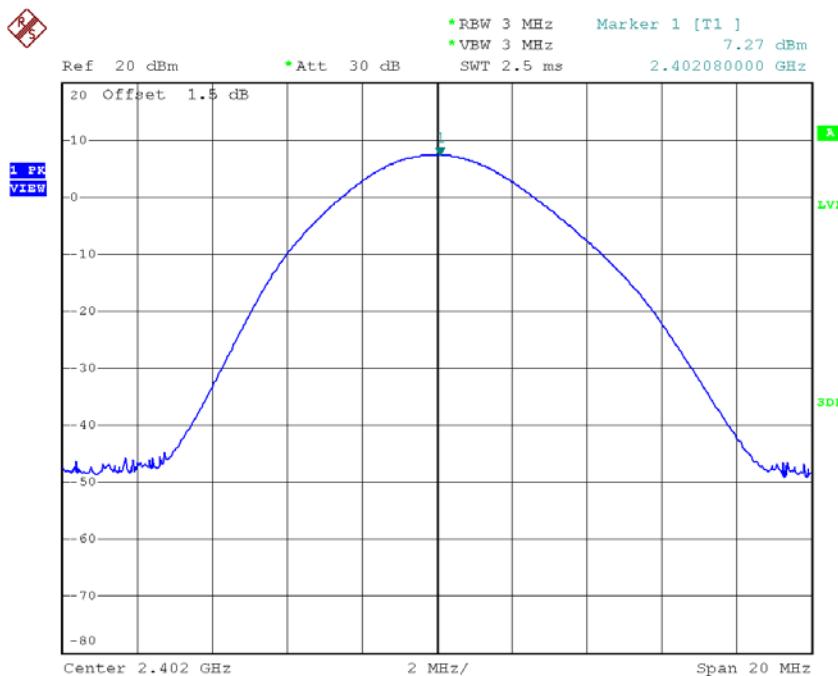


Date: 9.APR.2018 18:25:36

CH39

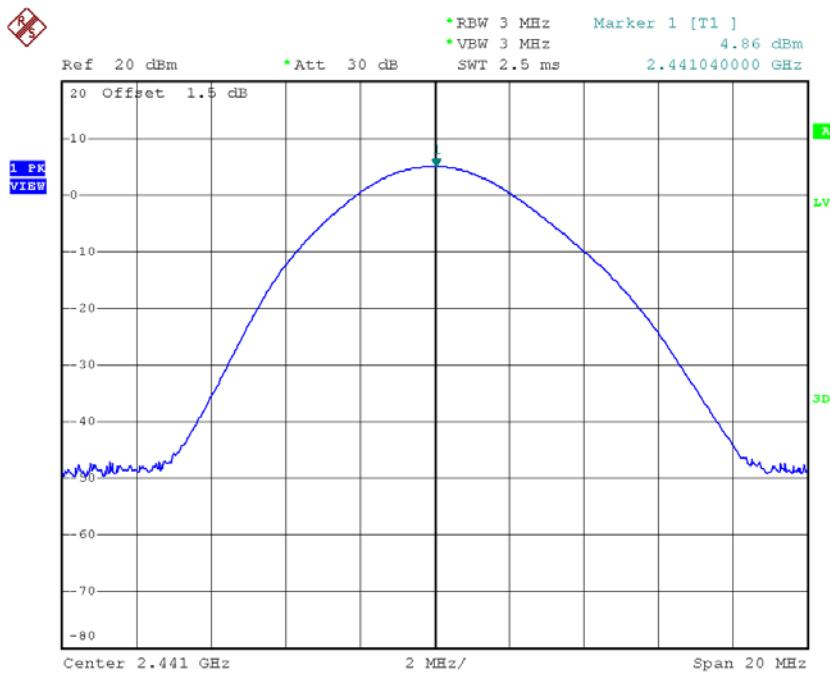

Date: 9.APR.2018 18:20:48

CH78

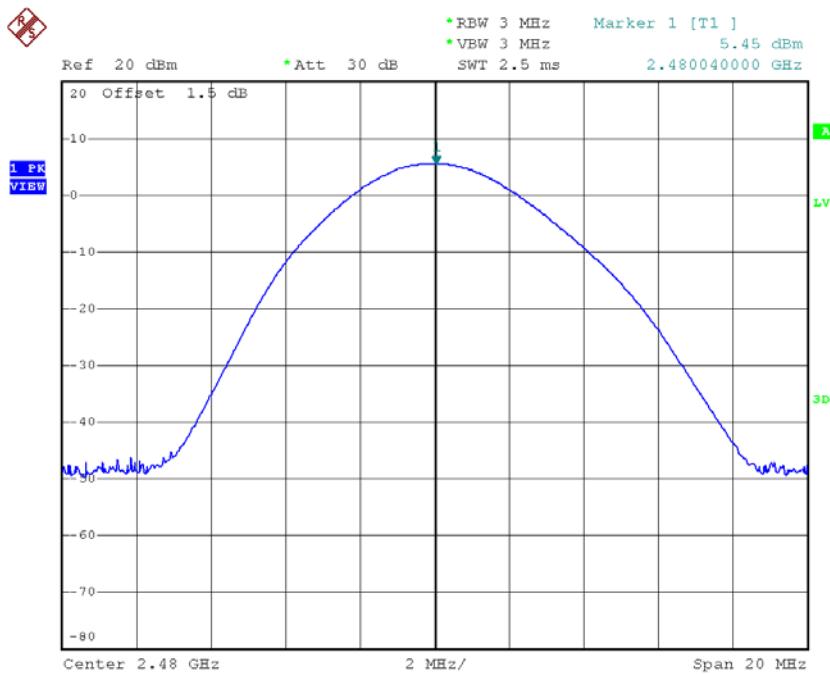


Date: 9.APR.2018 18:21:25

Test Mode : TX Mode _3Mbps


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	5.55	0.0036	21.00	0.125	Pass
2441	7.39	0.0055	21.00	0.125	Pass
2480	3.79	0.0024	21.00	0.125	Pass

CH00

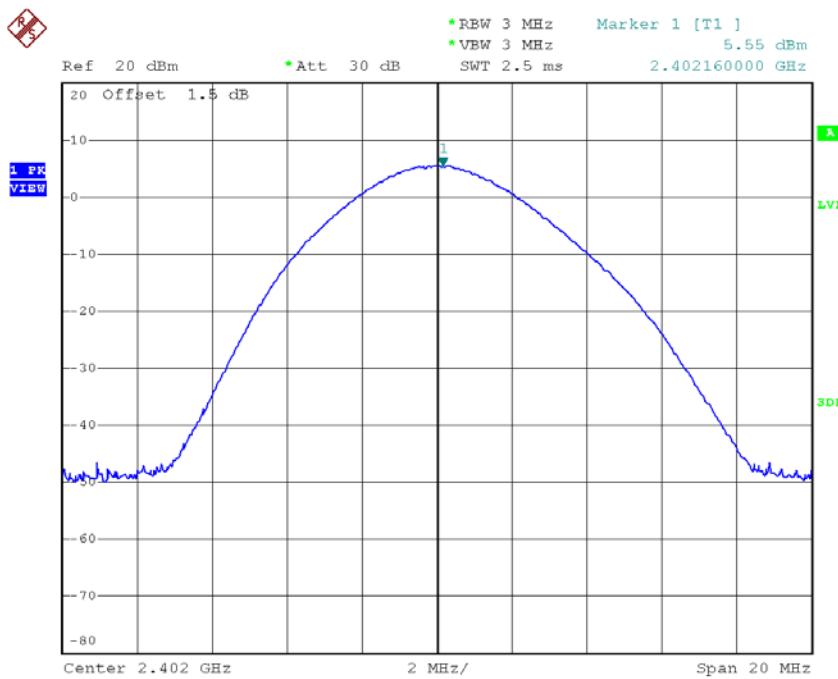


Date: 9.APR.2018 18:26:45

CH39

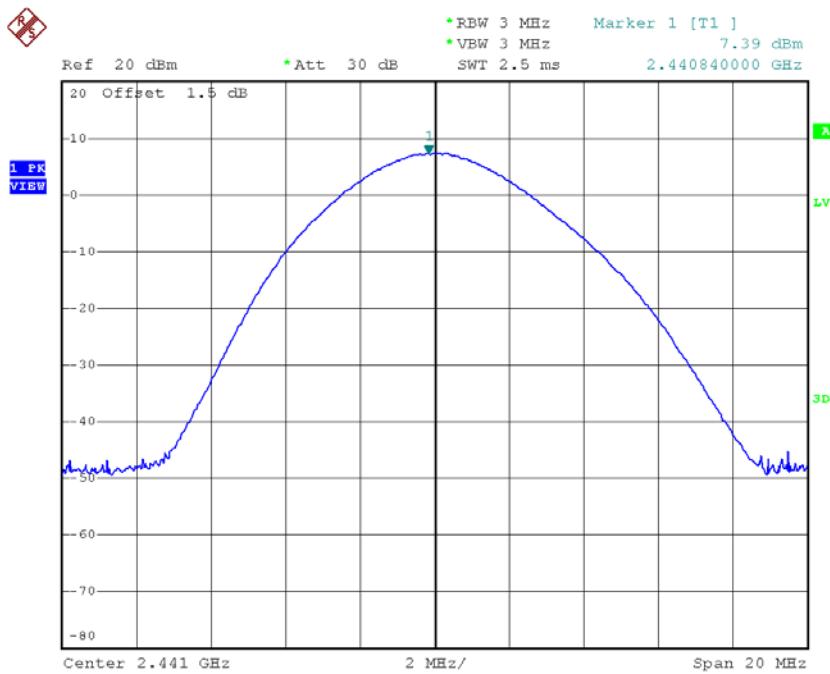

Date: 9.APR.2018 18:30:17


CH78

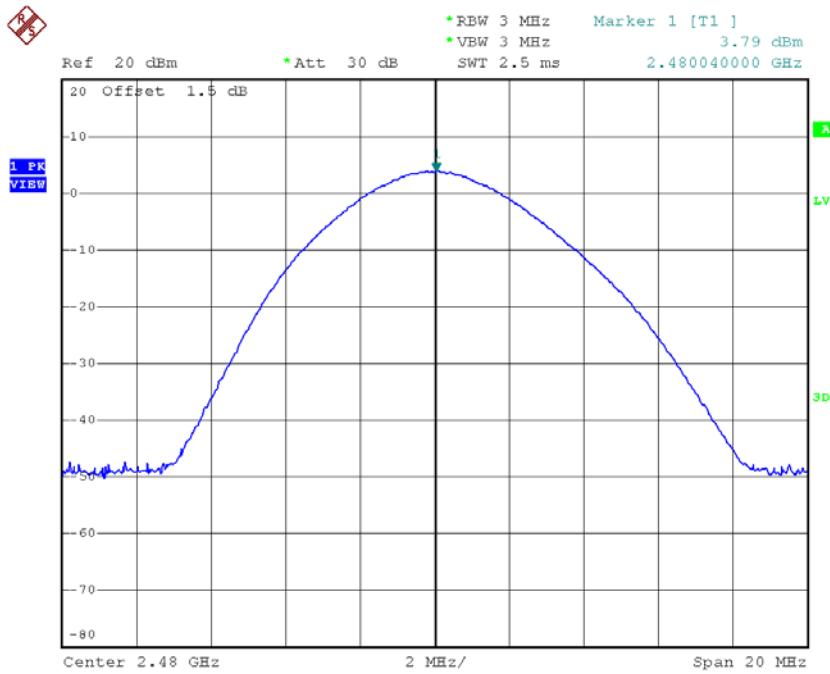

Date: 9.APR.2018 18:39:56


APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION

CH00 (Lower) _1Mbps

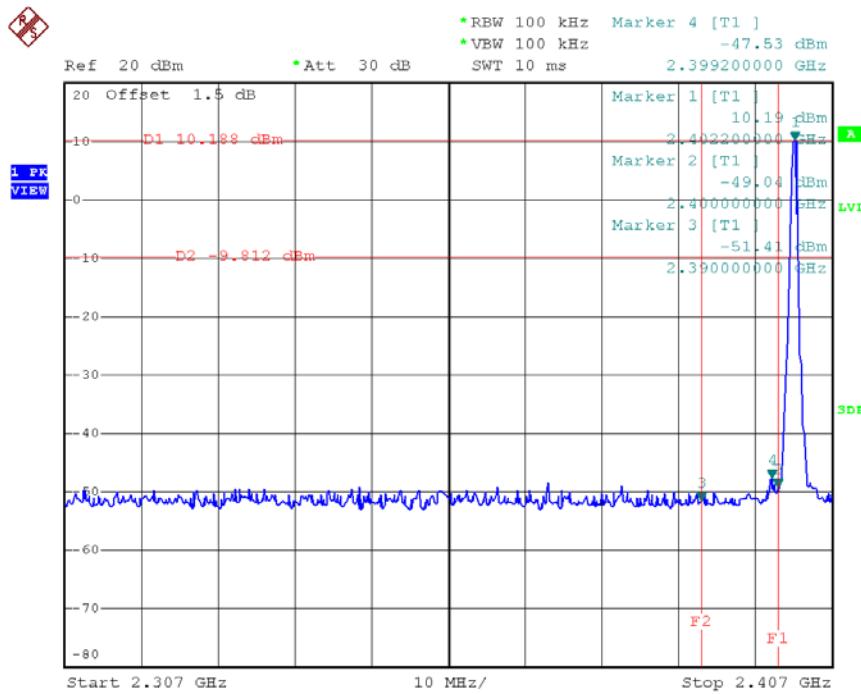


Date: 9.APR.2018 18:08:33

CH78 (Upper) _1Mbps

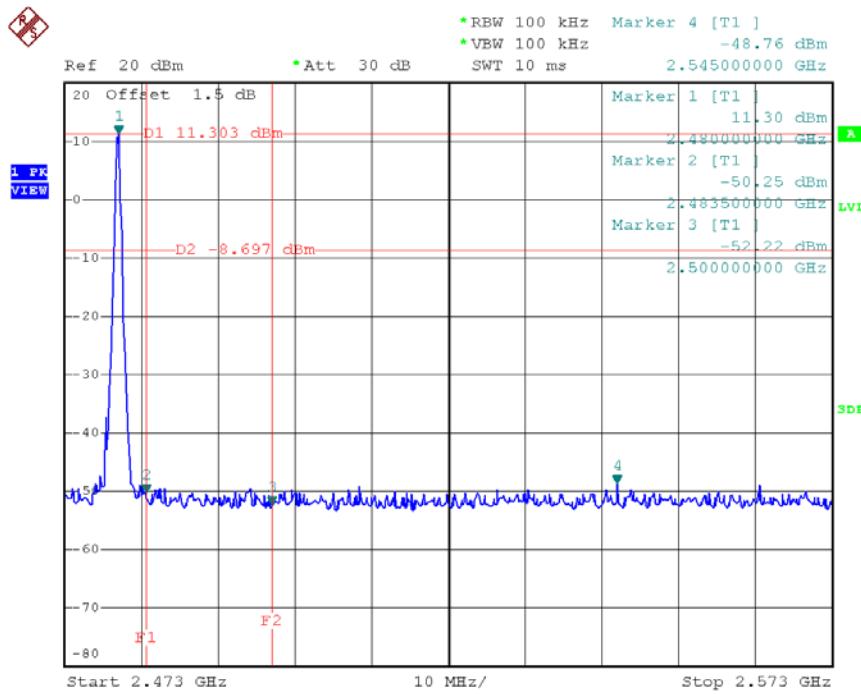


Date: 9.APR.2018 18:15:08

CH00 Hopping on mode (Lower)_1Mbps

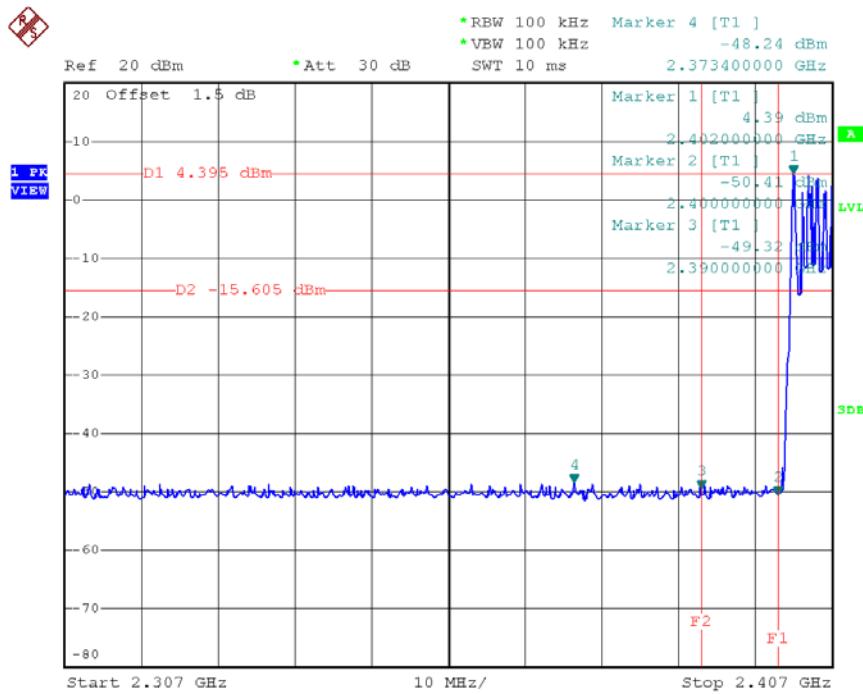


Date: 9.APR.2018 20:52:37

CH78 Hopping on mode (Upper)_1Mbps

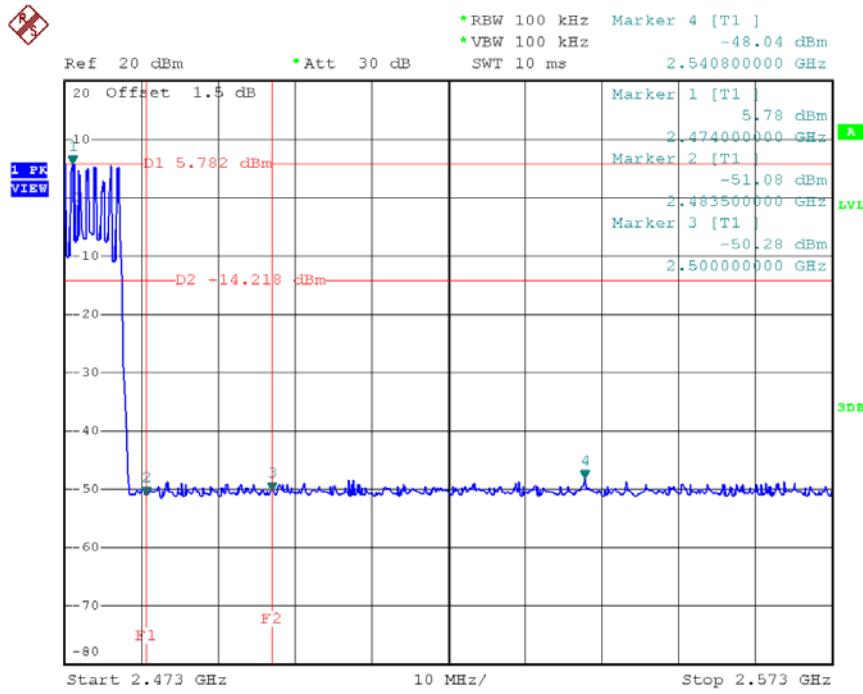


Date: 9.APR.2018 20:53:13


CH00 (10 Harmonic of the frequency) _1Mbps

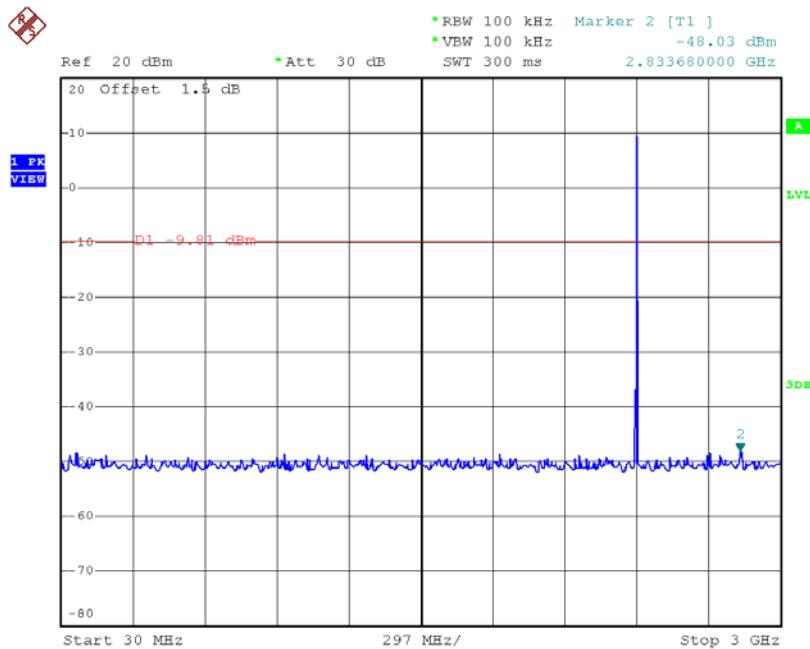

Date: 9.APR.2018 18:09:32

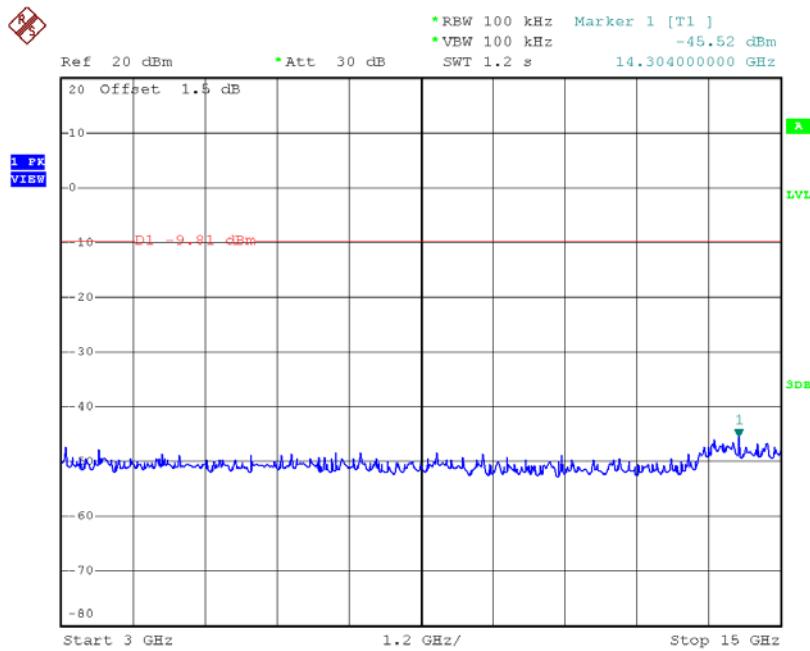


Date: 9.APR.2018 18:09:40

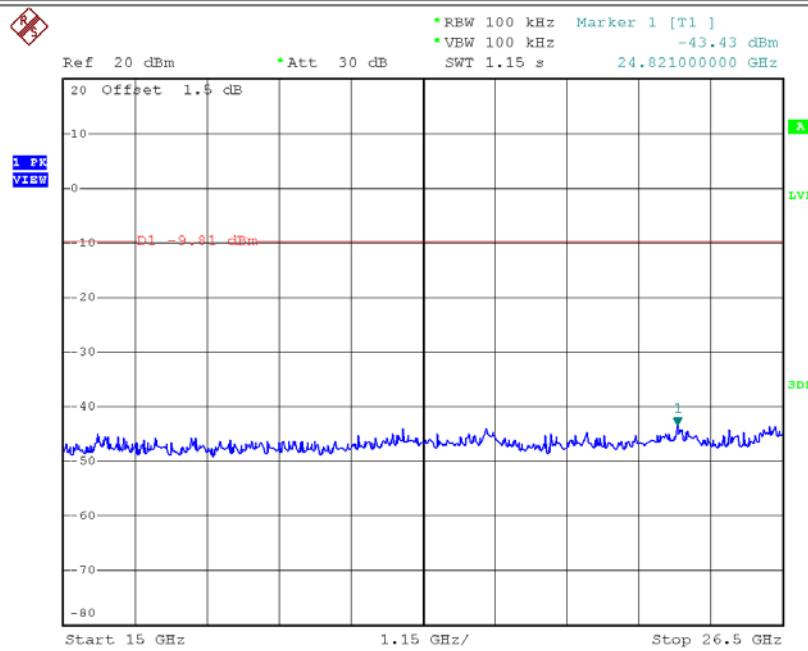


Date: 9.APR.2018 18:09:49


CH39 (10 Harmonic of the frequency) _1Mbps

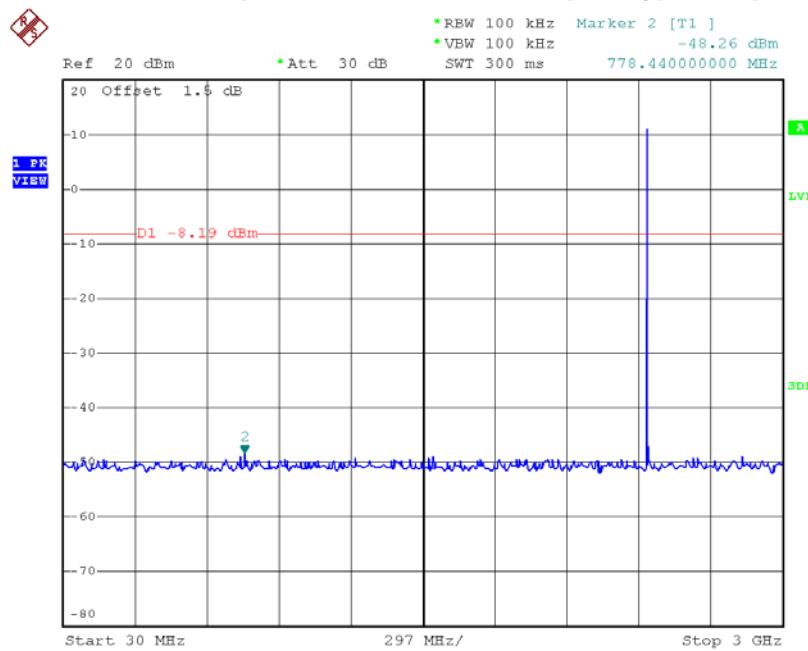

Date: 9.APR.2018 18:13:20

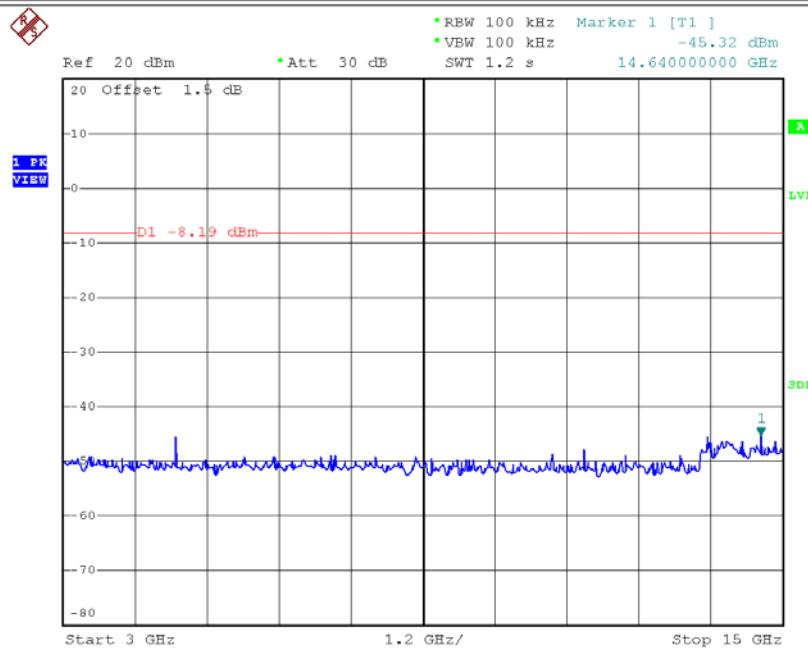


Date: 9.APR.2018 18:13:28

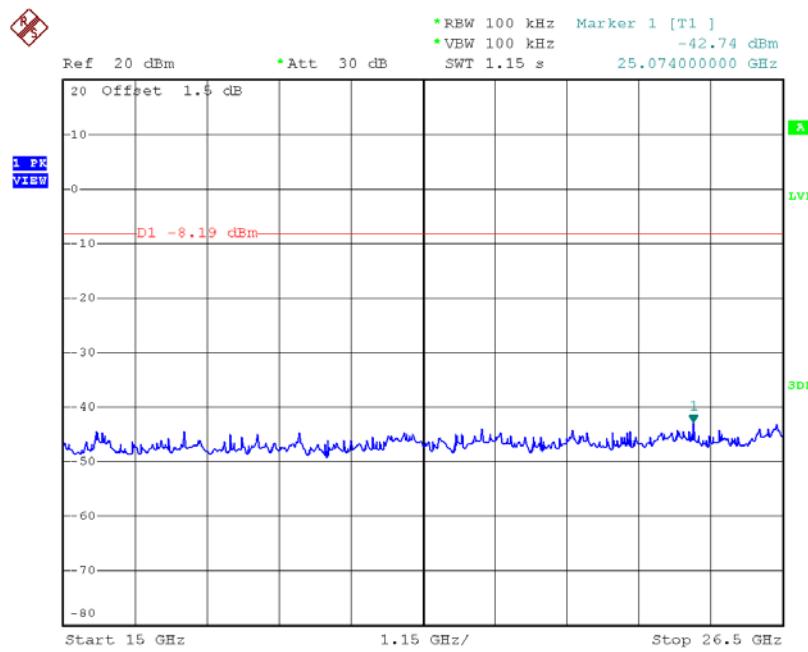


Date: 9.APR.2018 18:13:36


CH78 (10 Harmonic of the frequency) _1Mbps

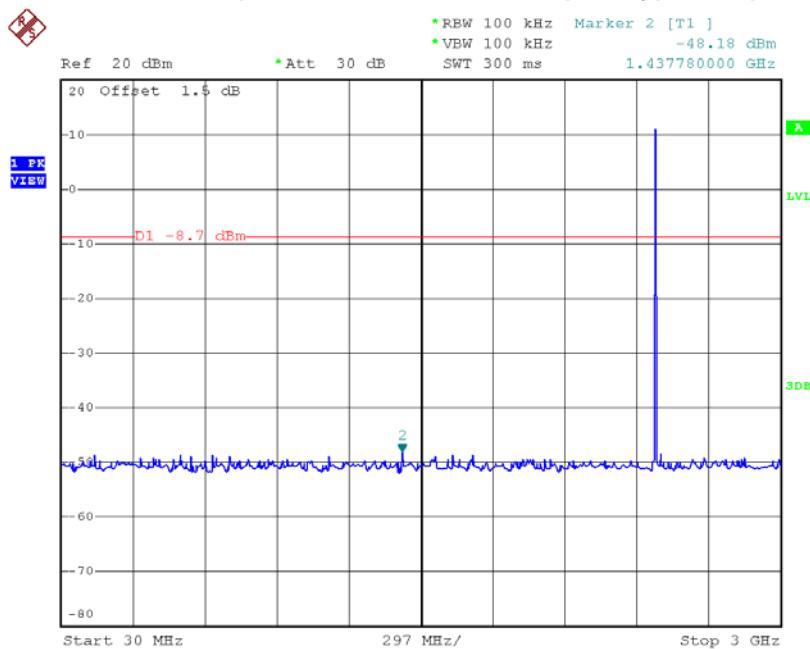


Date: 9.APR.2018 18:16:08

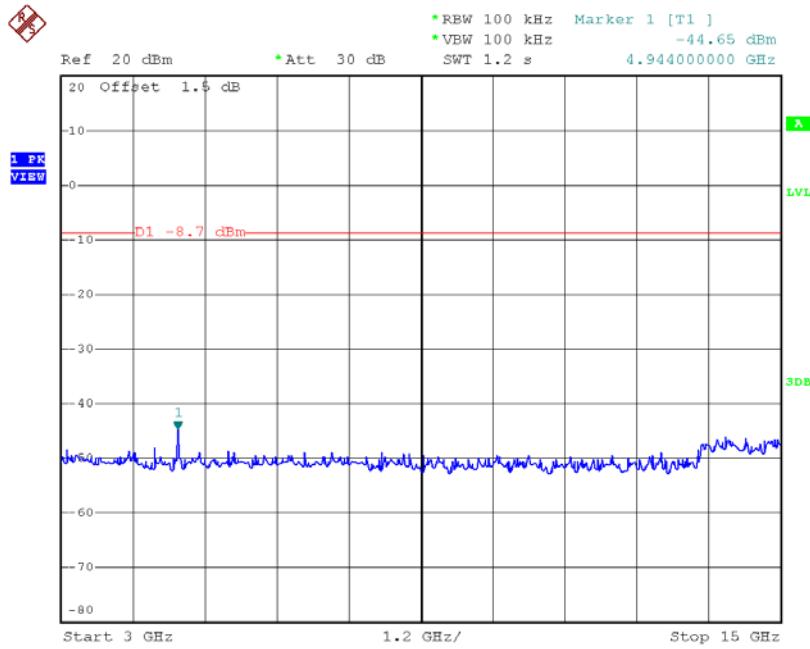

Date: 9.APR.2018 18:16:17

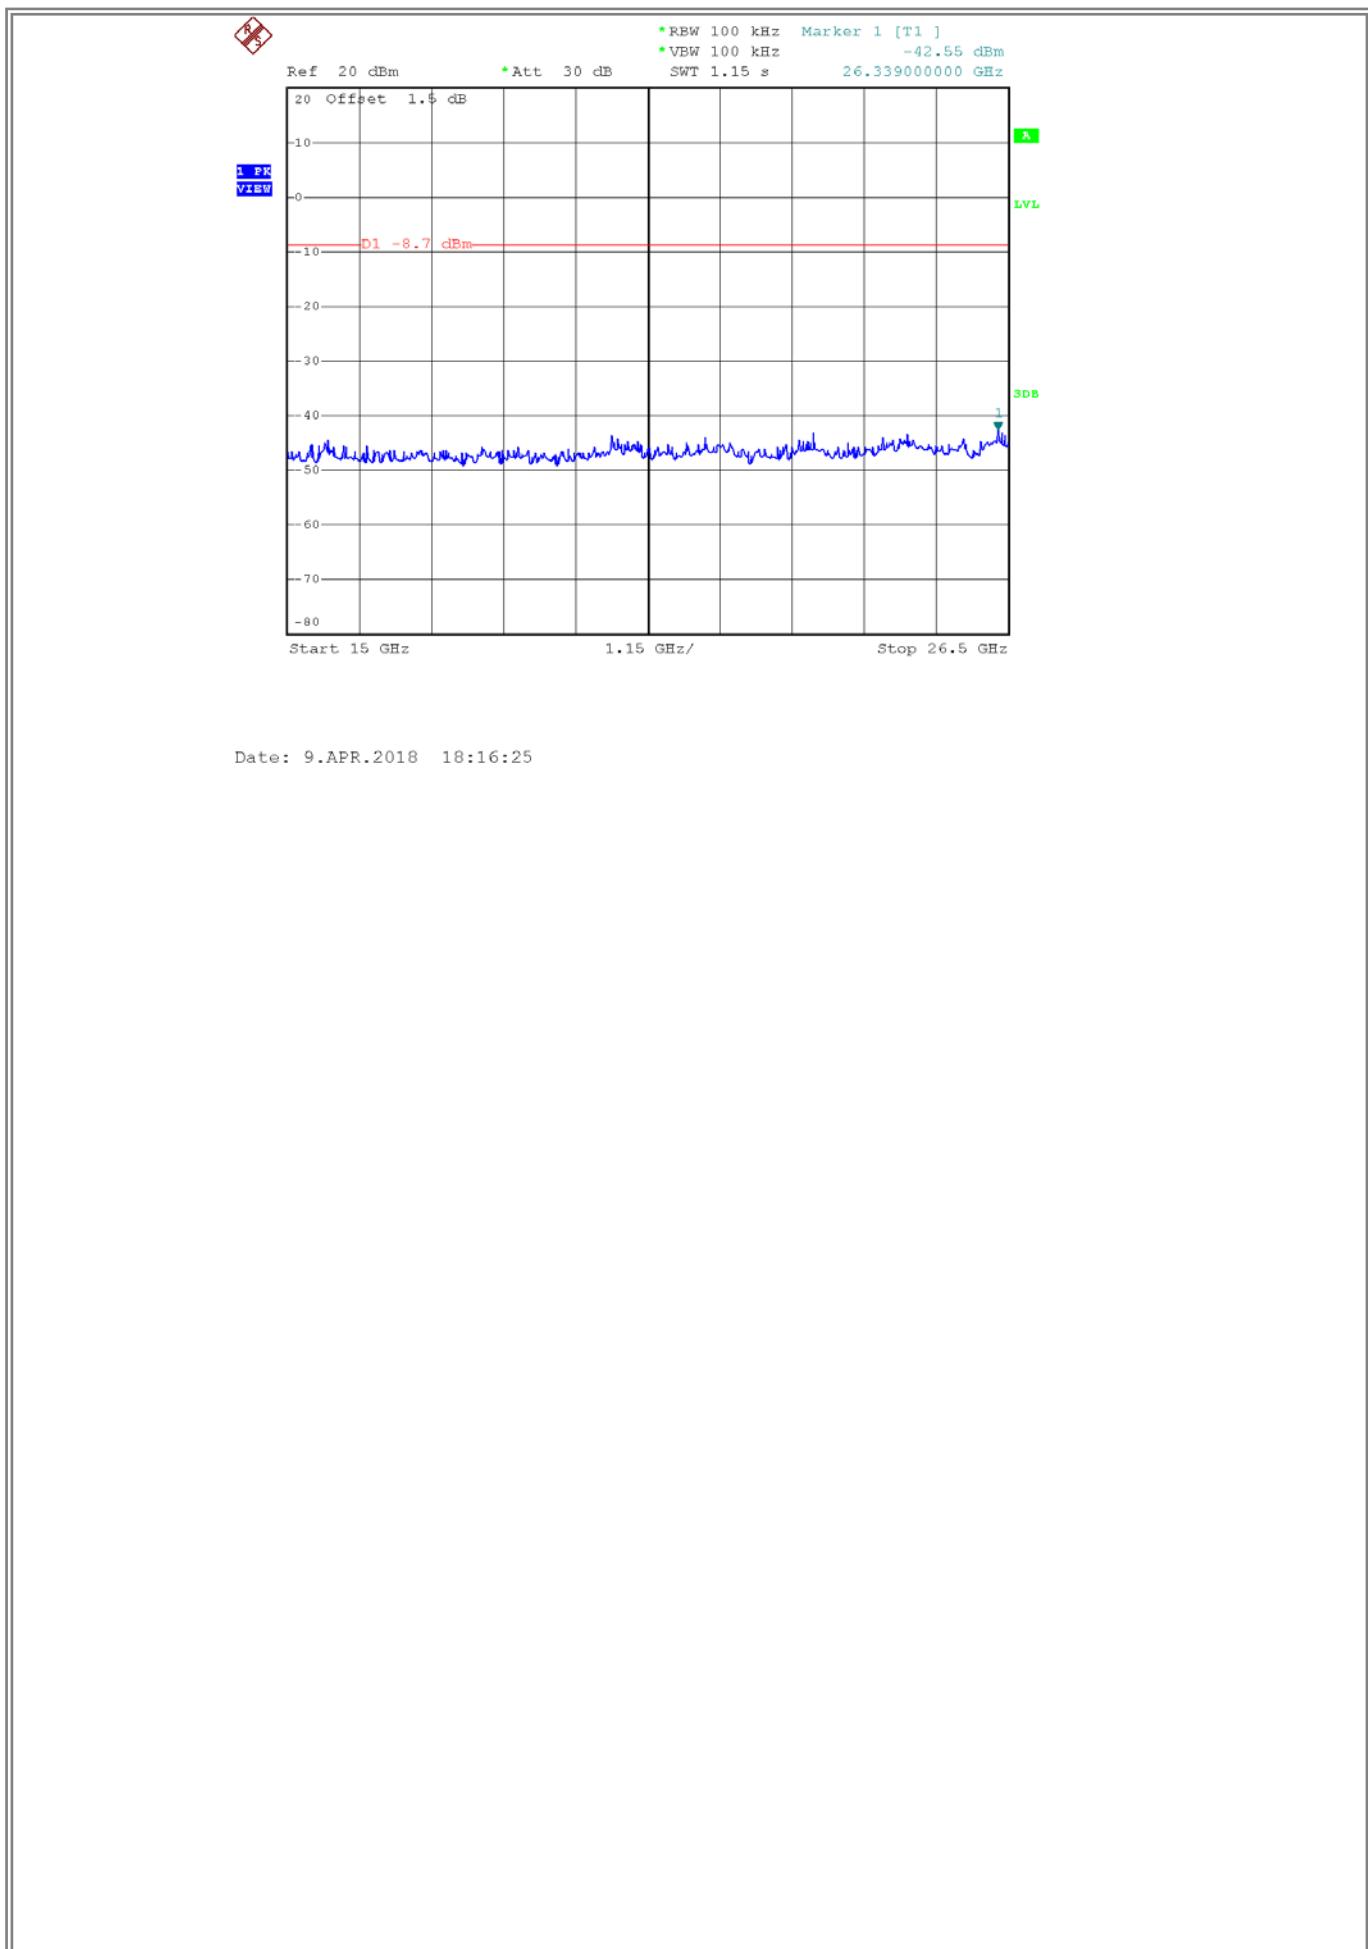


CH00 (Lower) _3Mbps

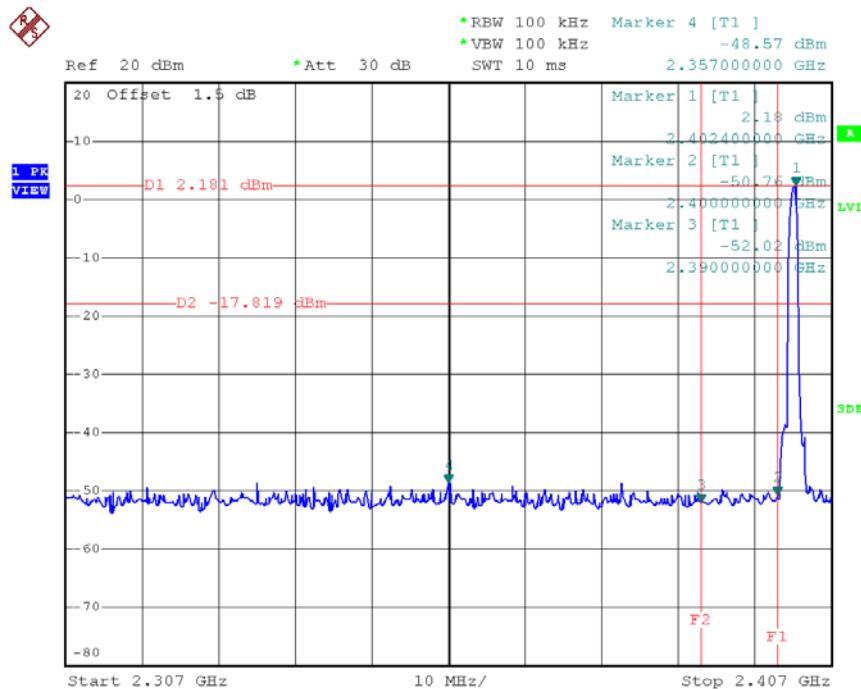


Date: 9.APR.2018 18:26:54

CH78 (Upper) _3Mbps

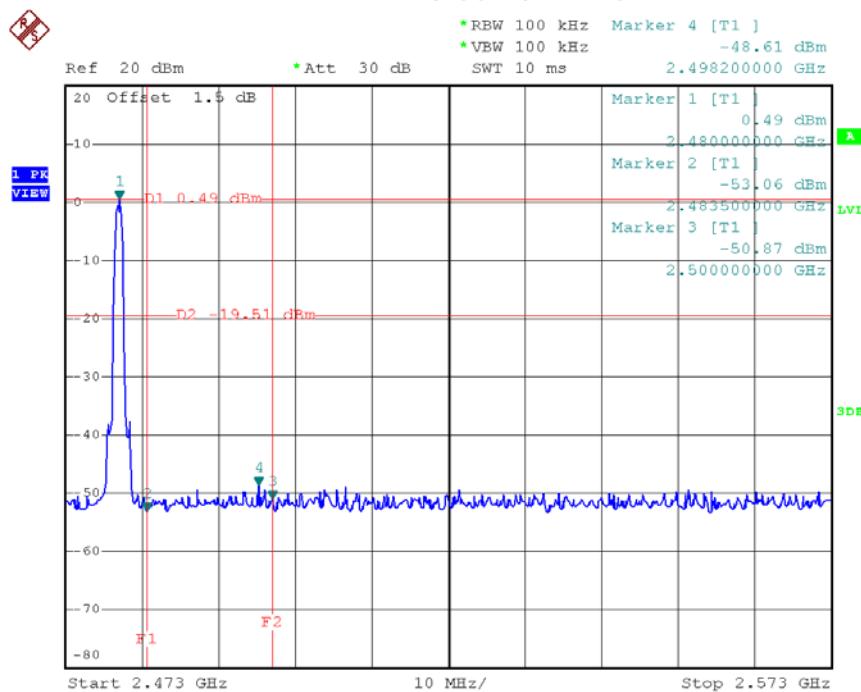


Date: 9.APR.2018 18:40:05

CH00 Hopping on mode (Lower)_3Mbps

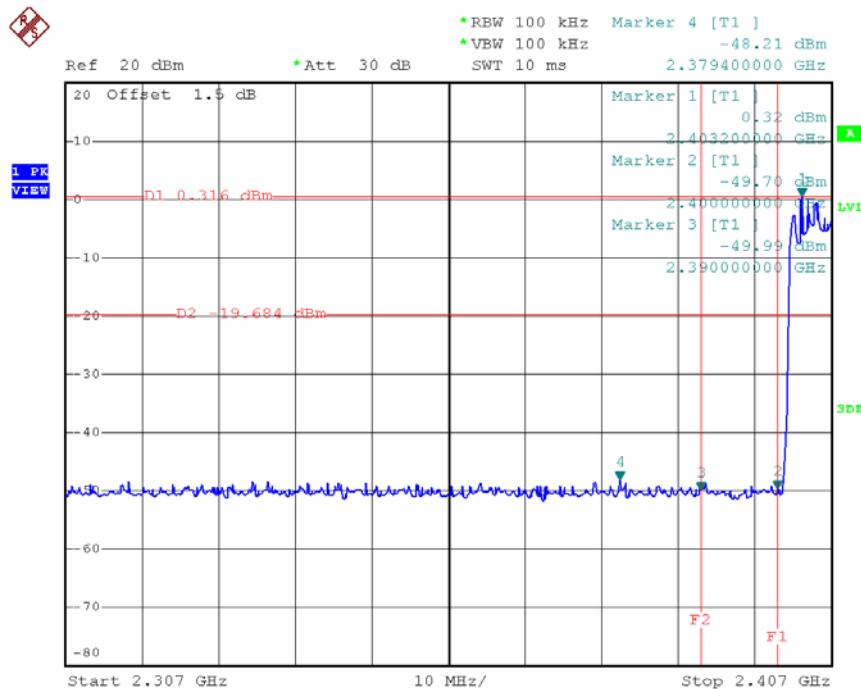


Date: 9.APR.2018 21:06:17

CH78 Hopping on mode (Upper)_3Mbps

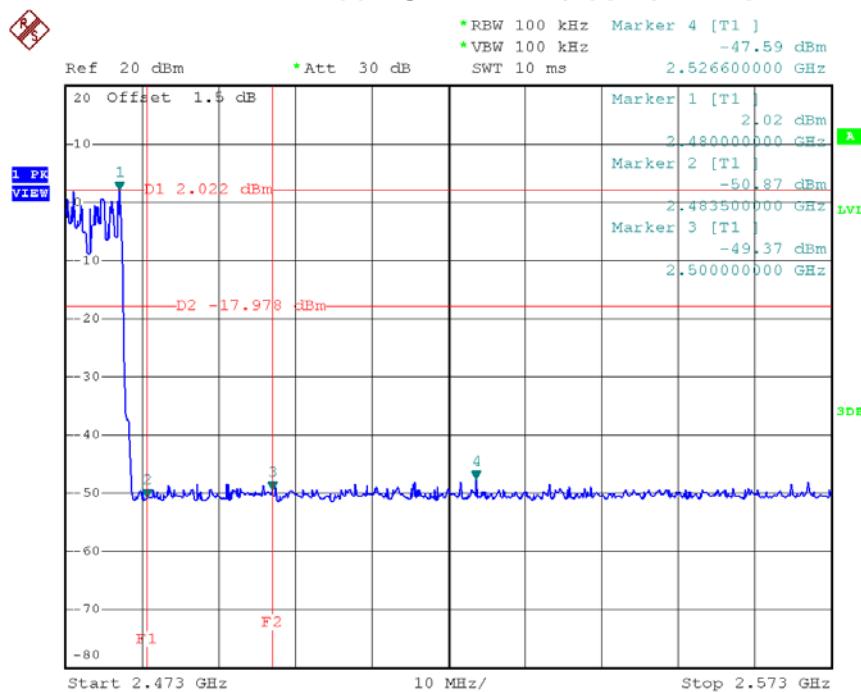


Date: 9.APR.2018 21:06:52


CH00 (10 Harmonic of the frequency) _3Mbps

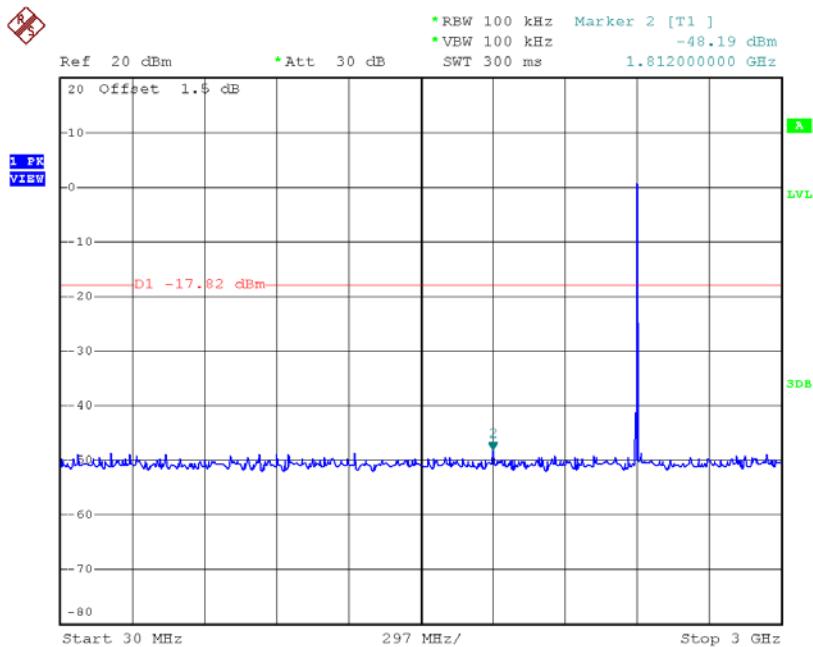

Date: 9.APR.2018 18:27:38

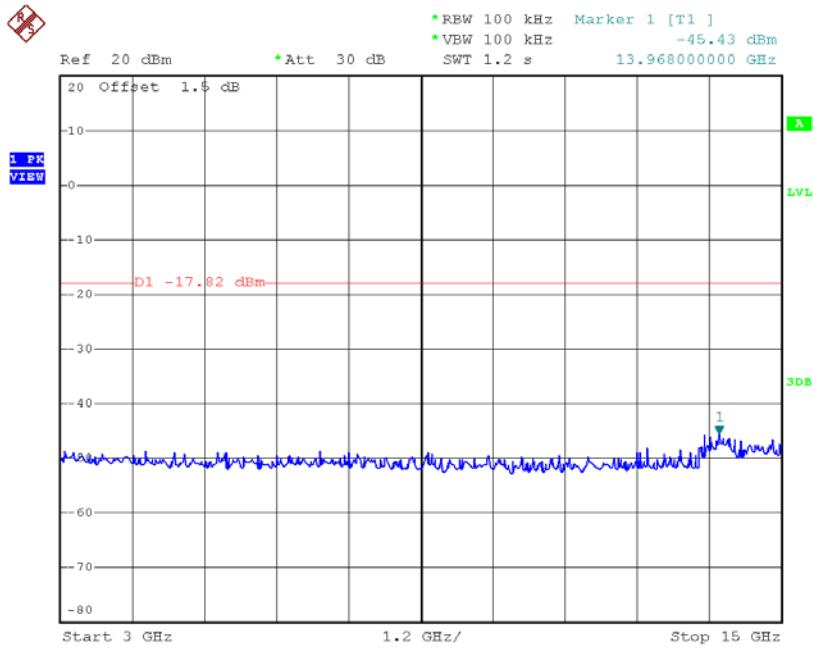


Date: 9.APR.2018 18:27:47

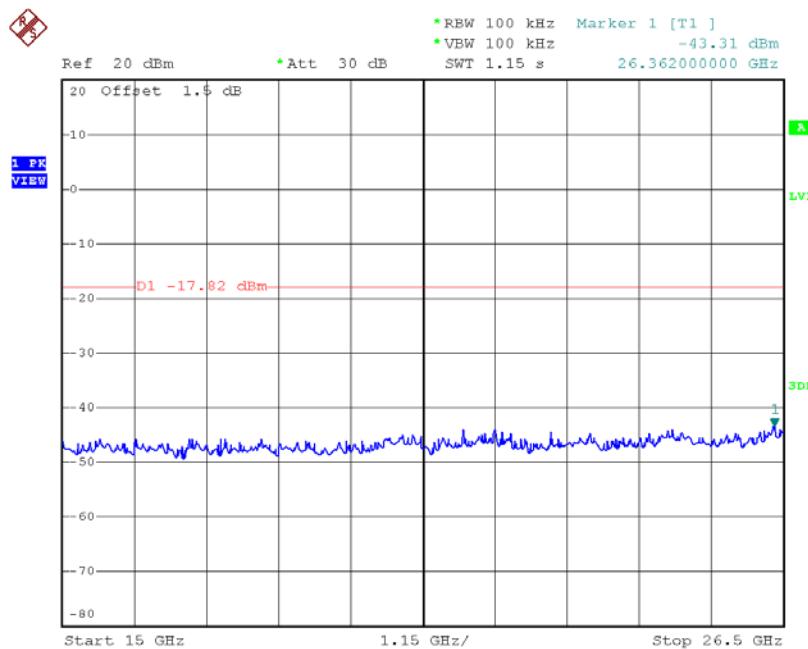


Date: 9.APR.2018 18:27:55


CH39 (10 Harmonic of the frequency) _3Mbps

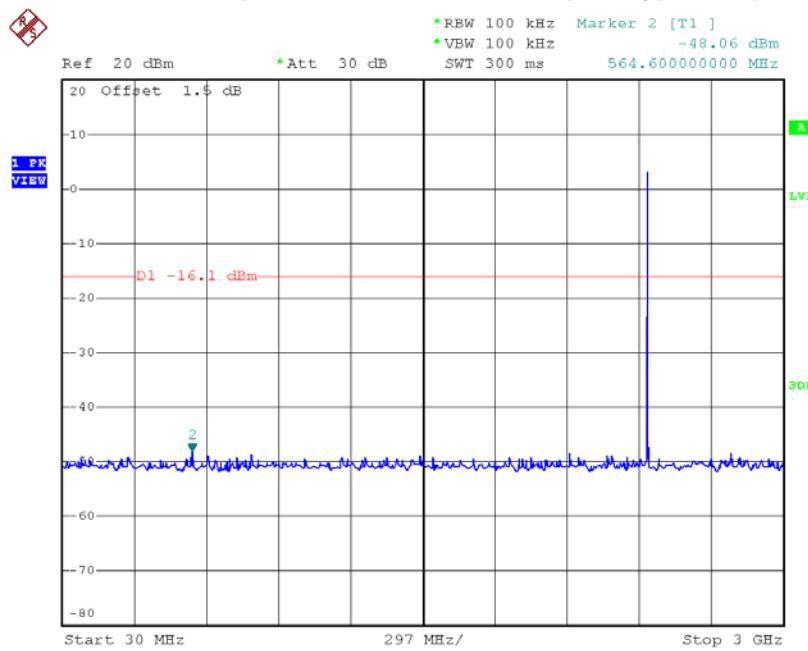

Date: 9.APR.2018 18:30:39

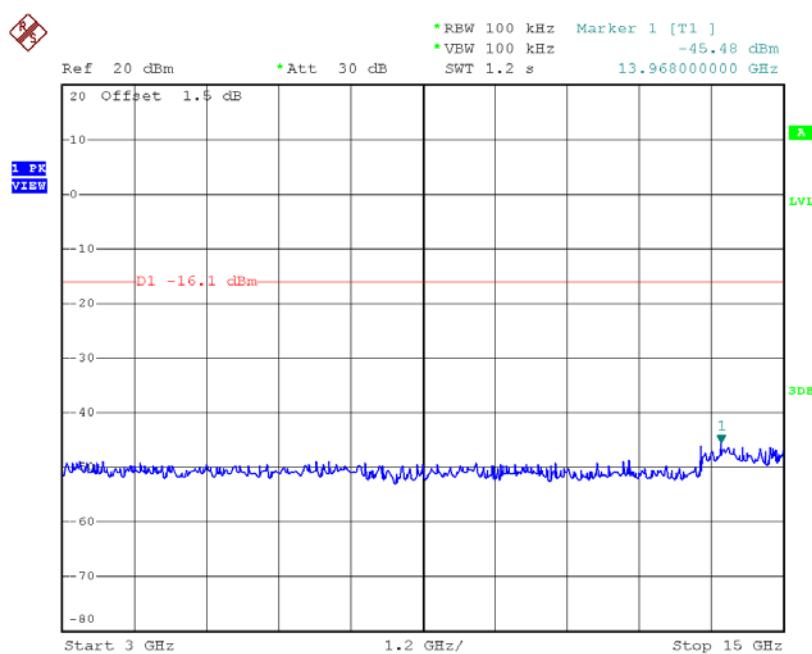


Date: 9.APR.2018 18:30:47

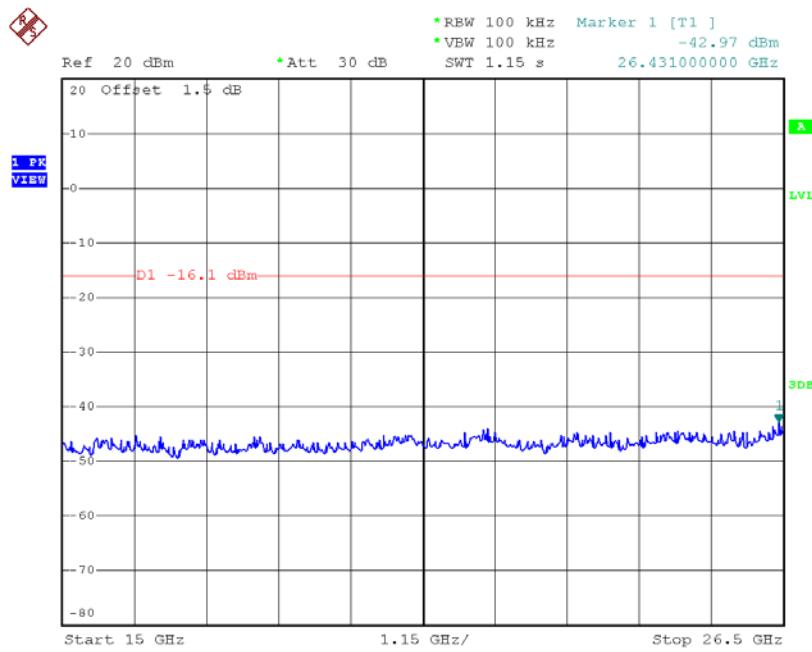


Date: 9.APR.2018 18:30:56


CH78 (10 Harmonic of the frequency) _3Mbps

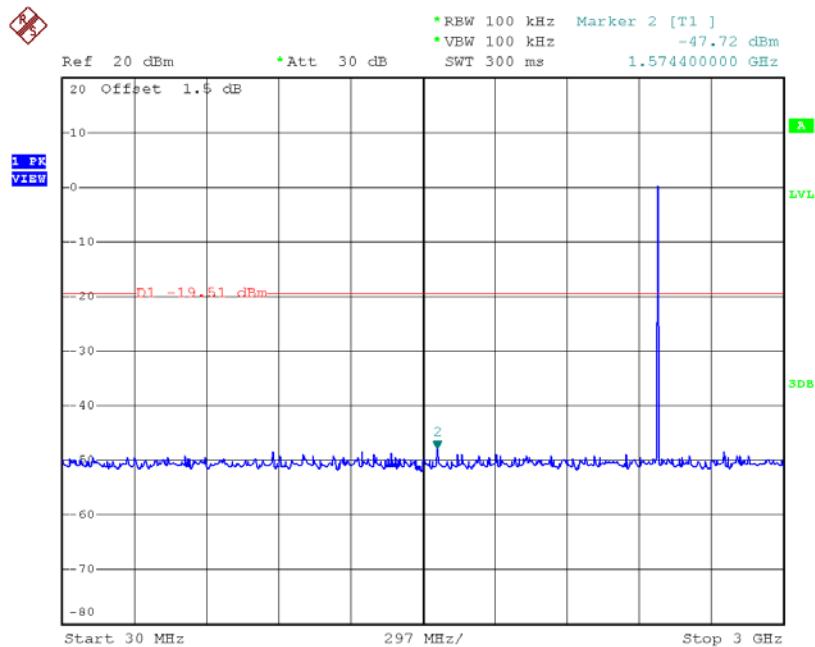

Date: 9.APR.2018 18:40:49

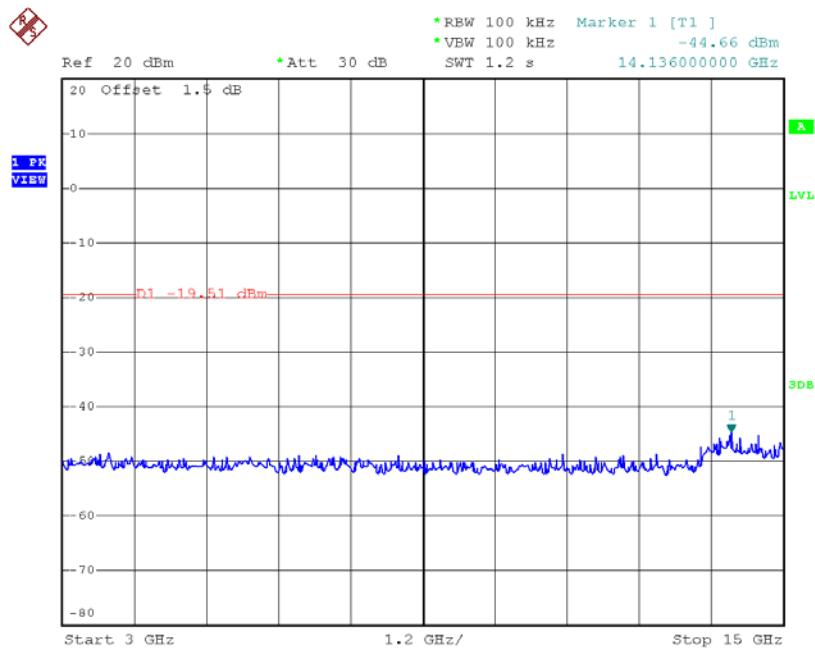

Date: 9.APR.2018 18:40:57

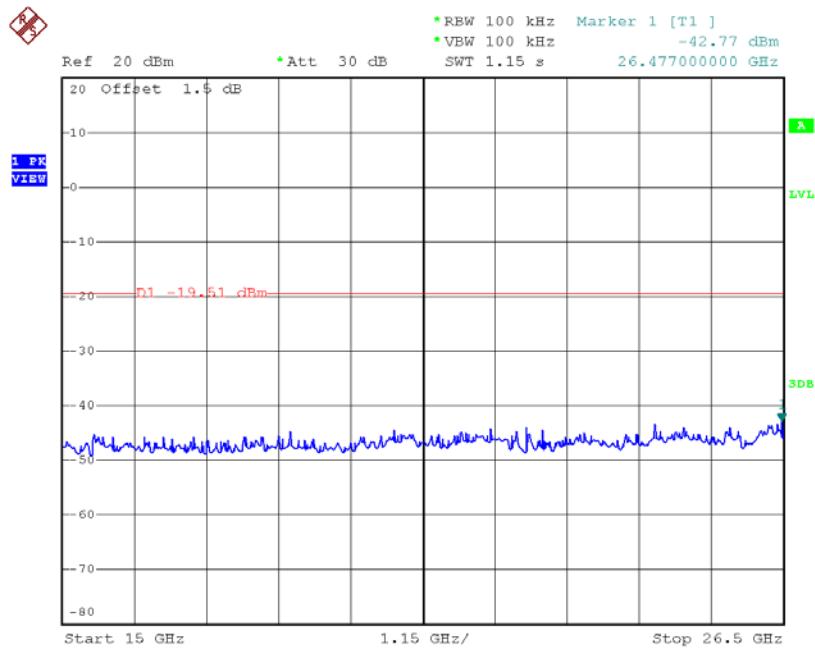

Date: 9.APR.2018 18:41:06