

TEST REPORT FOR RF TESTING

Report No.: SRTC2020-9004(F)-20071002(C)

Product Name: POCKETALK S Plus

Product Model: PTSP

Applicant: SOURCENEXT CORPORATION

Manufacturer: SOURCENEXT CORPORATION

Specification: FCC Part 2, Part 24E, Part 22H, Part 27 (2019)

FCC ID: 2AOJA-PTSP

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30, Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant's details	2
1.4 Manufacturer's details	2
1.5 Test Environment	3
2 DESCRIPTION OF THE EQUIPMENT UNDER TEST	4
2.1 Final Equipment Build Status	4
2.2 Support Equipment	5
2.3 Summary table	6
3 REFERENCE SPECIFICATION	7
4 KEY TO NOTES AND RESULT CODES	7
5 RESULT SUMMARY	8
6 TEST RESULT	9
6.1 RF Power Output	9
6.2 Effective Radiated Power and Effective Isotropic Radiated Power	10
6.3 Occupied Bandwidth	13
6.4 Emission Bandwidth	14
6.5 Peak-Average Ratio	15
6.6 Spurious Emissions at antenna terminal	16
6.7 Band Edges Compliance	17
6.8 Frequency Stability	19
6.9 Radiated Spurious Emissions	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	24

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Registration number:	239125

1.3 Applicant's details

Company:	SOURCENEXT CORPORATION
Address:	Shiodome City Center 33F, 1-5-2 Higashi Shimbashi Minato-ku, Tokyo 105-7133
City:	Tokyo
Country or Region:	Japan
Contacted person:	Yukio Aotani
Tel:	+81-50-5533-9606
Fax:	---
Email:	dev@sourcenext.com

1.4 Manufacturer's details

Company:	SOURCENEXT CORPORATION
Address:	Shiodome City Center 33F, 1-5-2 Higashi Shinbashi Minato-ku, Tokyo 105-7133
City:	Tokyo
Country or Region:	Japan
Contacted person:	Yukio Aotani
Tel:	+81-50-5533-9606
Fax:	---
Email:	dev@sourcenext.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020-07-10
Testing Start Date:	2020-07-10
Testing End Date:	2020-08-27

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30
Maximum Extreme	40	---
Minimum Extreme	0	---

Normal Supply Voltage (V d.c.):	3.8
Maximum Extreme Supply Voltage (V d.c.):	3.5
Minimum Extreme Supply Voltage (V d.c.):	4.35

2 DESCRIPTION OF THE EQUIPMENT UNDER TEST

2.1 Final Equipment Build Status

Frequency Range	LTE Band 2: Tx:1850~1910MHz Rx:1930~1990MHz LTE Band 5: Tx:824~849 MHz Rx:869 ~894MHz LTE Band 7: Tx:2500~2570MHz Rx:2620~2690MHz LTE Band 26: Tx:824~849 MHz Rx:869 ~894MHz
Modulation Type	QPSK/16QAM
Antenna Type	Planner Inverted-F Antenna
Antenna Gain	LTE Band2:2.56dBi LTE Band5:-2.69dBi LTE Band7:1.75dBi LTE Band26:-2.69dBi
Power Supply	Battery/Charger
Hardware Version	PT3L_MB_V1.0
Software Version	1.1.6
IMEI	864727048560562

The EUT has some color variants.

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	Guangdong Pow-Tech New Power Co.,Ltd.
Model Number	PT305070

Equipment	Charger
Manufacturer	UNIFIVE TECHNOLOGY (SHEN ZHEN) CO;LTD.
Model Number	UB305-0510

Equipment	USB Cable
Manufacturer	Shenzhen Kailiya electronics., Ltd
Model Number	Type-C Cable

2.3 Summary table

FCC Rule Part	Frequency Range(MHz)	EIRP/ERP (W)	Frequency Tolerance (ppm)	Emission Designator	Emission Bandwidth (MHz)	Measured 26dBC Bandwidth (MHz)	Communication Type
LTE BAND2							
24E	1850.7-1909.3	0.251	0.076	1M07G7D	1.4M	1.230	QPSK
	1850.7-1909.3	0.200	0.076	1M08D7W	1.4M	1.219	16QAM
	1851.5-1908.5	0.250	0.079	2M69G7D	3M	2.844	QPSK
	1851.5-1908.5	0.199	0.079	2M69D7W	3M	2.847	16QAM
	1852.5-1907.5	0.251	-0.086	4M47G7D	5M	4.784	QPSK
	1852.5-1907.5	0.200	-0.086	4M47D7W	5M	4.765	16QAM
	1855-1905	0.251	-0.083	8M94G7D	10M	9.353	QPSK
	1855-1905	0.197	-0.083	8M93D7W	10M	9.321	16QAM
	1857.5-1902.5	0.251	0.072	13M4G7D	15M	14.02	QPSK
	1857.5-1902.5	0.199	0.072	13M4D7W	15M	14.06	16QAM
	1860-1900	0.252	0.081	17M9G7D	20M	18.78	QPSK
	1860-1900	0.199	0.081	17M9D7W	20M	18.66	16QAM
LTE BAND5							
22H	824.7-848.3	0.131	0.080	1M10G7D	1.4M	2.280	QPSK
	824.7-848.3	0.106	0.080	1M11D7W	1.4M	2.138	16QAM
	825.5-847.5	0.132	0.078	2M71G7D	3M	4.504	QPSK
	825.5-847.5	0.114	0.078	2M71D7W	3M	4.645	16QAM
	826.5-846.5	0.128	-0.083	4M50G7D	5M	8.172	QPSK
	826.5-846.5	0.107	-0.083	4M50D7W	5M	8.561	16QAM
	829-844	0.148	-0.087	9M00G7D	10M	14.990	QPSK
	829-844	0.121	-0.087	8M99D7W	10M	15.300	16QAM
LTE BAND7							
27	2502.5-2567.5	0.121	0.064	4M47G7D	5M	4.765	QPSK
	2502.5-2567.5	0.096	0.064	4M48D7W	5M	4.739	16QAM
	2505-2565	0.121	0.080	8M92G7D	10M	9.327	QPSK
	2505-2565	0.096	0.080	8M92D7W	10M	9.420	16QAM
	2507.5-2562.5	0.123	-0.080	13M4G7D	15M	13.95	QPSK
	2507.5-2562.5	0.096	-0.080	13M4D7W	15M	14.06	16QAM
	2510-2560	0.121	0.085	17M9G7D	20M	18.65	QPSK
	2510-2560	0.097	0.085	17M9D7W	20M	18.92	16QAM
LTE BAND26							
22H	824.7-848.3	0.125	0.085	1M09G7D	1.4M	1.562	QPSK
	824.7-848.3	0.105	0.085	1M08D7W	1.4M	1.679	16QAM
	825.5-847.5	0.122	-0.087	2M69G7D	3M	4.278	QPSK
	825.5-847.5	0.103	-0.087	2M70D7W	3M	4.006	16QAM
	826.5-846.5	0.127	0.082	4M50G7D	5M	7.203	QPSK
	826.5-846.5	0.108	0.082	4M49D7W	5M	7.364	16QAM
	829-844	0.129	-0.085	8M97G7D	10M	13.73	QPSK
	829-844	0.110	-0.085	8M96D7W	10M	13.14	16QAM

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part 2	2019	Frequency allocations and radio treaty matters; general rules and regulations
FCC Part 22	2019	Public mobile services
FCC Part 24	2019	Personal communications services
FCC Part 27	2019	Miscellaneous wireless communications services
ANSI C63.26	2015	American national standard for compliance testing of transmitters used in licensed radio services
KDB 971168 D01	April 9, 2018	Measurement guidance for certification of licensed digital transmitters
TIA-603-E-2016	March 2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards


4 KEY TO NOTES AND RESULT CODES

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
NT	Normal Temperature
NV	Nominal voltage
HV	High voltage
LV	Low voltage

5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5), 24.232(c), 27.50(b)(10), 27.50(c)(10), 27.50(h)(2), 27.50(d)(4), 27.50(a)(3)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Peak-Average Ratio	24.232(d), 27.50(d)(5)	Pass
5	Emission Bandwidth	2.1049	Pass
6	Spurious Emissions at antenna terminals	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
7	Band Edges Compliance	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
8	Frequency Stability	2.1055, 22.355, 24.235, 27.54	Pass
9	Radiated Spurious Emissions	2.1053, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m)	Pass

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Miss.Jin Wanqing 	Issued date: 20200914

6 TEST RESULT


6.1 RF Power Output

Rule Part(s)
FCC: 2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

Limits: No RF Power Output requirements in part 2.1046.

Test result:

The test results are shown in Appendix A.

6.2 Effective Radiated Power and Effective Isotropic Radiated Power


Rule Part(s)

FCC: 22.913(a) (5), 24.232(c), 27.50(b) (10), 27.50(c) (10), 27.50(h) (2), 27.50(d) (4), 27.50(a) (3)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test setup:

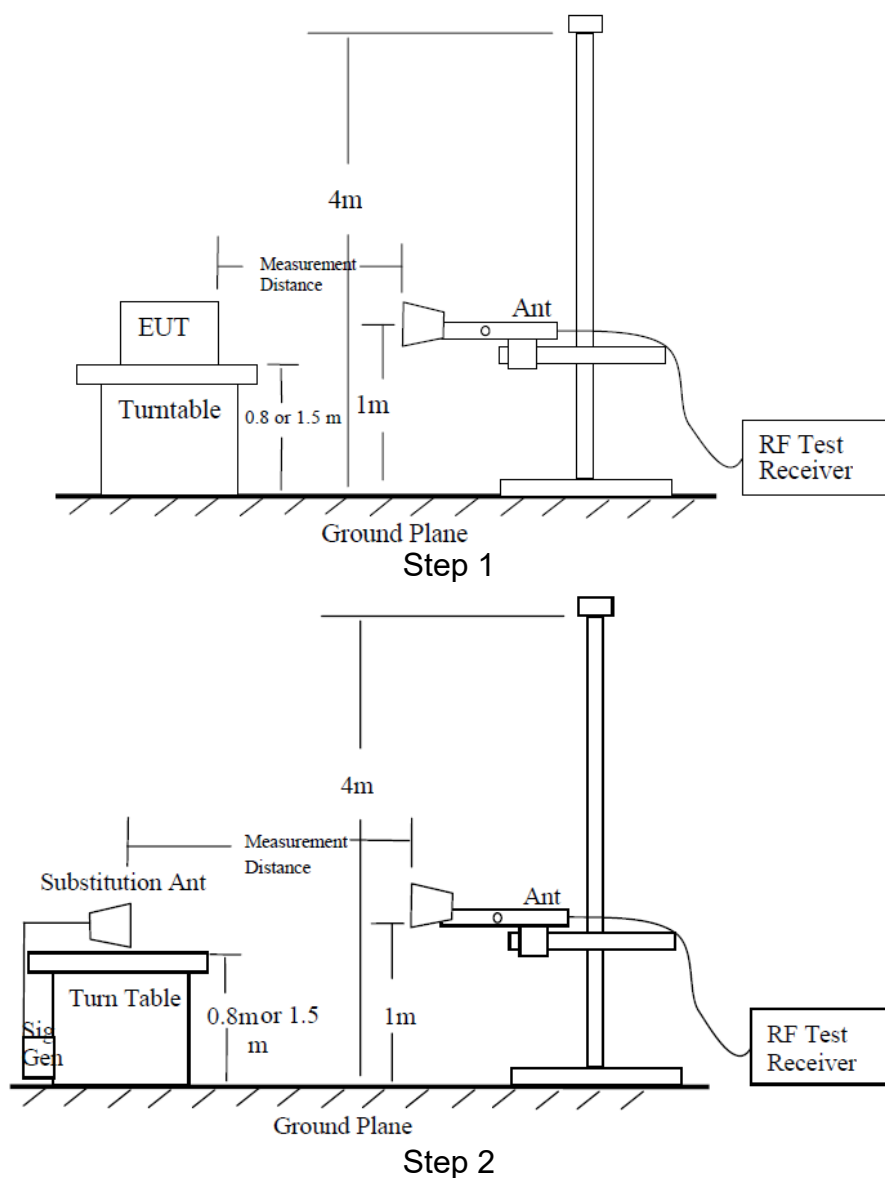

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100KHz($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

Power (EIRP) = Pmea+ Pca+ Ga

ERP/EIRP LIMIT

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$.

22.913(a) (5)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

24.232(c)

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

27.50(b) (10)

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

27.50(c) (10)

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(h) (2)

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

27.50(d) (4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

27.50(a) (3)

Mobile and portable stations (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.

Test result:

The test results are shown in Appendix B.

We tested both horizontal and vertical polarization, but only the largest numerical polarity of the two polarities was recorded in the final report.


6.3 Occupied Bandwidth

Rule Part(s)
FCC: 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

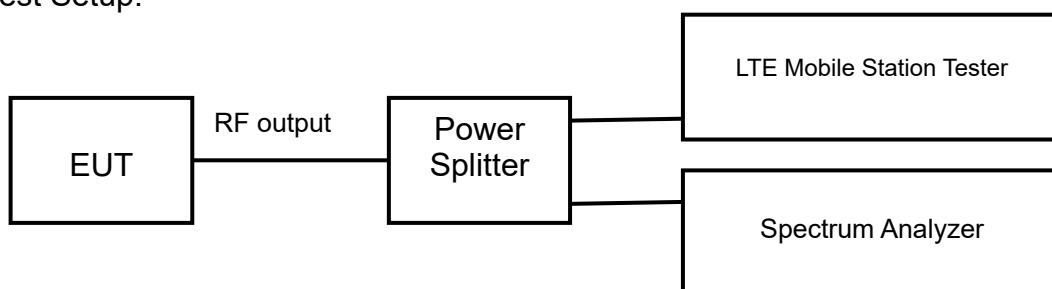

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

The test results are shown in Appendix A.


6.4 Emission Bandwidth

Rule Part(s)
FCC: 2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

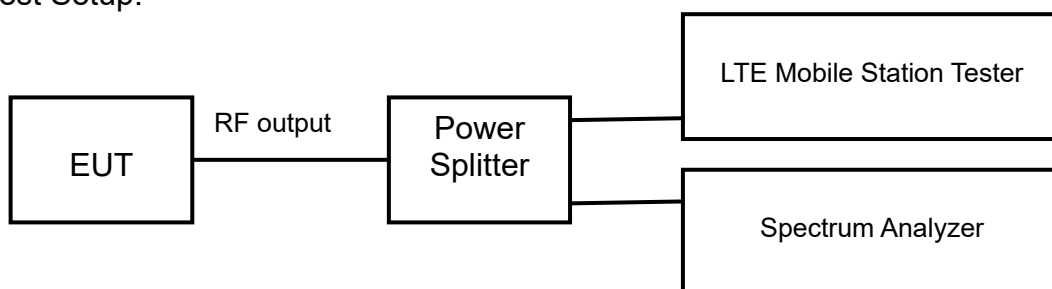

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of 26dB bandwidth observed in Step 7

Limits: No specific emission bandwidth requirements in part 2.1049.

Test result:
The test results are shown in Appendix A.


6.5 Peak-Average Ratio

Rule Part(s)
FCC: 24.232(d), 27.50(d) (5)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

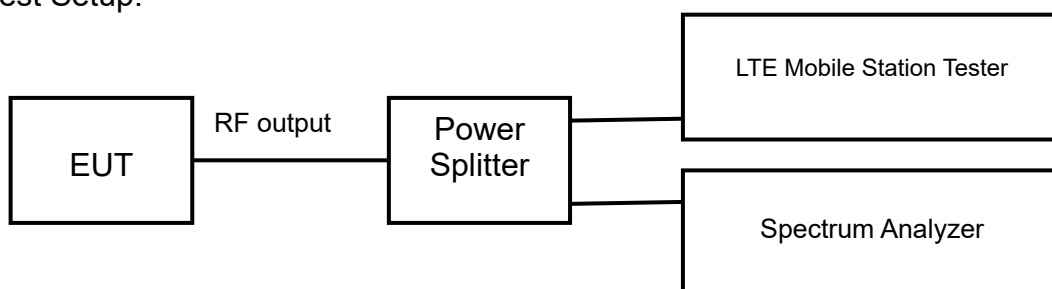

Test procedure:
KDB 971168 D01 v03r01 – Section 5.7.1

Test Setting:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW ≥ OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits

24.232(d), 27.50(d) (5)

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A.

6.6 Spurious Emissions at antenna terminal


Rule Part(s)

FCC: 2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

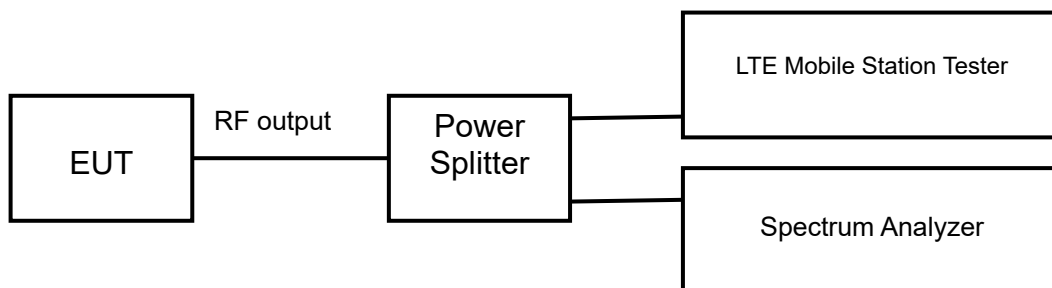

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency
2. Detector = RMS
3. RBW=1MHz
4. VBW=3MHz
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

For Band 30, the minimum permissible attenuation level of any spurious emission <2288MHz and >2365MHz is $70 + \log_{10}(P)$ [Watts].

For Band 7 and 41, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

Test result:

The test results are shown in Appendix A.

6.7 Band Edges Compliance


Rule Part(s)

FCC: 2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

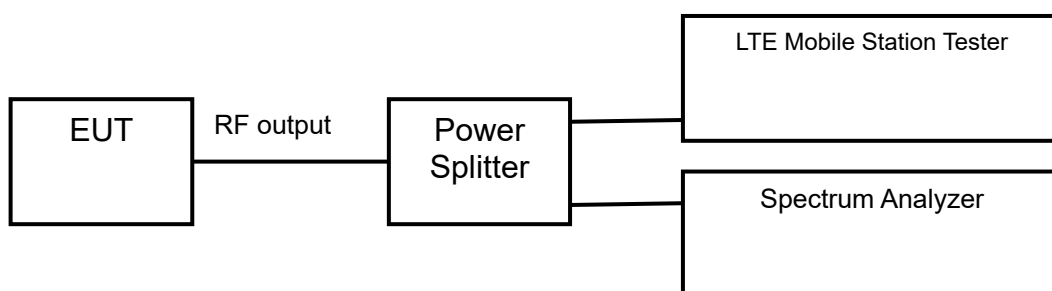

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 30 is $> 43 + 10\log_{10}(P)$ [Watts] at 2300-2305MHz & 2345-2360MHz, $> 55 + 10\log_{10}(P)$ [Watts] at 2320-2324MHz & 2341-2345MHz, $> 61 + 10\log_{10}(P)$ [Watts] at 2324-2328MHz & 2337-2341MHz, $> 67 + 10\log_{10}(P)$ [Watts] at 2288-2292MHz & 2328- 2337MHz, and $> 70 + 10\log_{10}(P)$ [Watts] at frequencies < 2288MHz & >2365MHz.

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the

width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c)(5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c)(4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(a)(5) in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5MHz.

Test result:

The test results are shown in Appendix A.

6.8 Frequency Stability


Rule Part(s)

FCC: 2.1055, 22.355, 24.235, 27.54

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test setup:

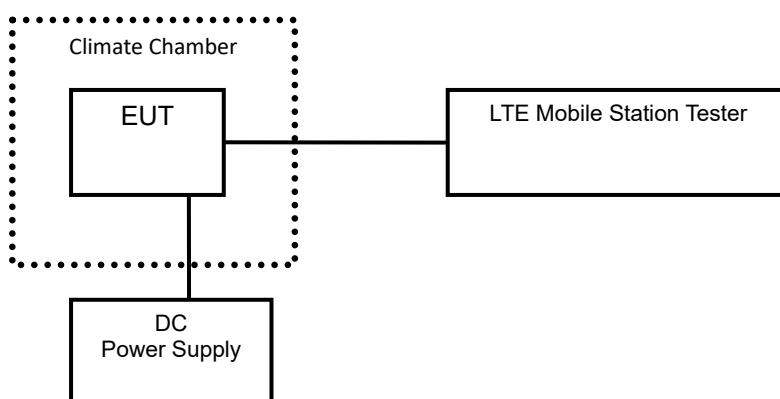

Test Procedure:

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The outside of EUT’s operating and stand-by temperature range are not tested because EUT doesn’t work normally). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test result:

The test results are shown in Appendix A.

6.9 Radiated Spurious Emissions


Rule Part(s)

FCC: 2.1053, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m)

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	30%	101.9kPa

Test Setup:

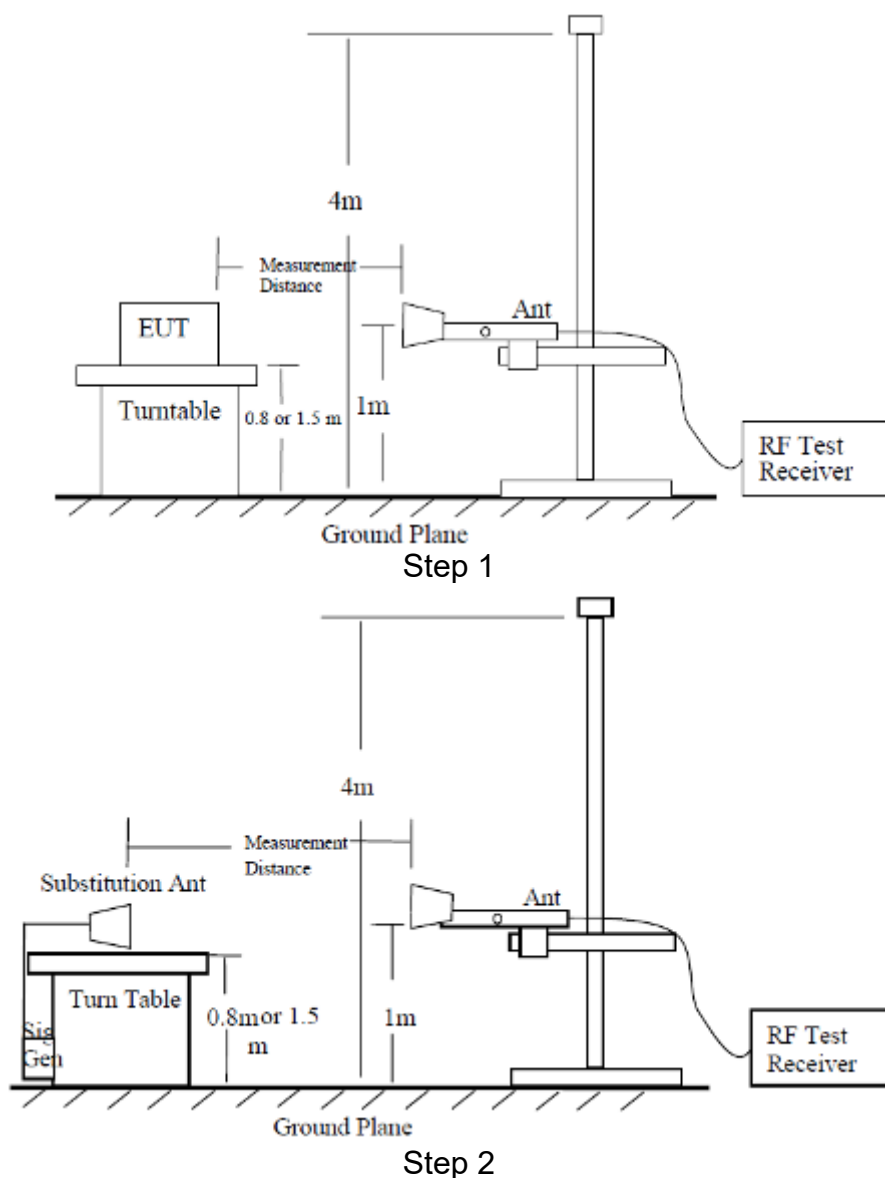

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz ($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Test result:

The test results are shown in Appendix B.

We tested both horizontal and vertical polarization, but only the largest numerical polarity of the two polarities was recorded in the final report.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
RF Power Output	0.6 dB	
Occupied Bandwidth	3 kHz	
Spurious Emissions	30MHz~1GHz	2.83 dB
	1GHz~12.75GHz	2.50 dB
	12.75GHz~25GHz	2.75 dB
Band Edges Compliance	1.2dB	
Frequency Stability	4 Hz	

8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Date	Calibration Due Date
1	MT8820C Mobile Station Tester	Anritsu	6201300660	2020.08.20	2021.08.19
2	FSV40 Spectrum Analyzer	R&S	101065	2020.08.20	2021.08.19
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2020.08.20	2021.08.19
3	6007 Power Divider	Weinschel	6007-GJ-1	2020.08.20	2021.08.19
4	DC Power Supply E3645A	Agilent	MY40000741	2020.03.01	2021.02.28
5	Temperature chamber SH241	ESPEC	92013758	2020.08.20	2021.08.19
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	----	----	----
7	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
8	Turn table Diameter:1m	FRANKONIA	----	----	----
9	Turn table Diameter:5m	FRANKONIA	----	----	----
10	Antenna master FAC(MA4.0)	MATURO	----	----	----
11	Antenna master SAC(MA4.0)	MATURO	----	----	----
12	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
13	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
14	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100513	2020.08.20	2021.08.19
15	HL562 Ultra log antenna	R&S	100016	2020.08.20	2021.08.19
16	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2020.08.20	2021.08.19
17	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
18	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
19	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
20	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Please refer to the attachment.

APPENDIX B – TEST DATA OF RADIATED EMISSION

Please refer to the attachment.