

KC.DA.00200

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

1. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
5G/WIFI6	600~7200


2-2. Impedance

50 ohm nominal

2-3. VSWR

2-3-1.Measurement frequency points and VSWR value

Frequency Band(MHz)	600	960	1710	2690	4200	5510	6500	7150
2-3-3. Typical Value:	4.4	2.4	2.4	1.7	1.2	1.5	1.2	1.2


UNLESS OTHER SPECIFIED TOLERANCES ON : $X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = \pm HOLEDIA = \pm		 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.DA.00200 Antenna Specification		SPEC REV. P0

2-3-2. VSWR

2-3-4 Measuring Method

1. A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm

2-3-5 Picture

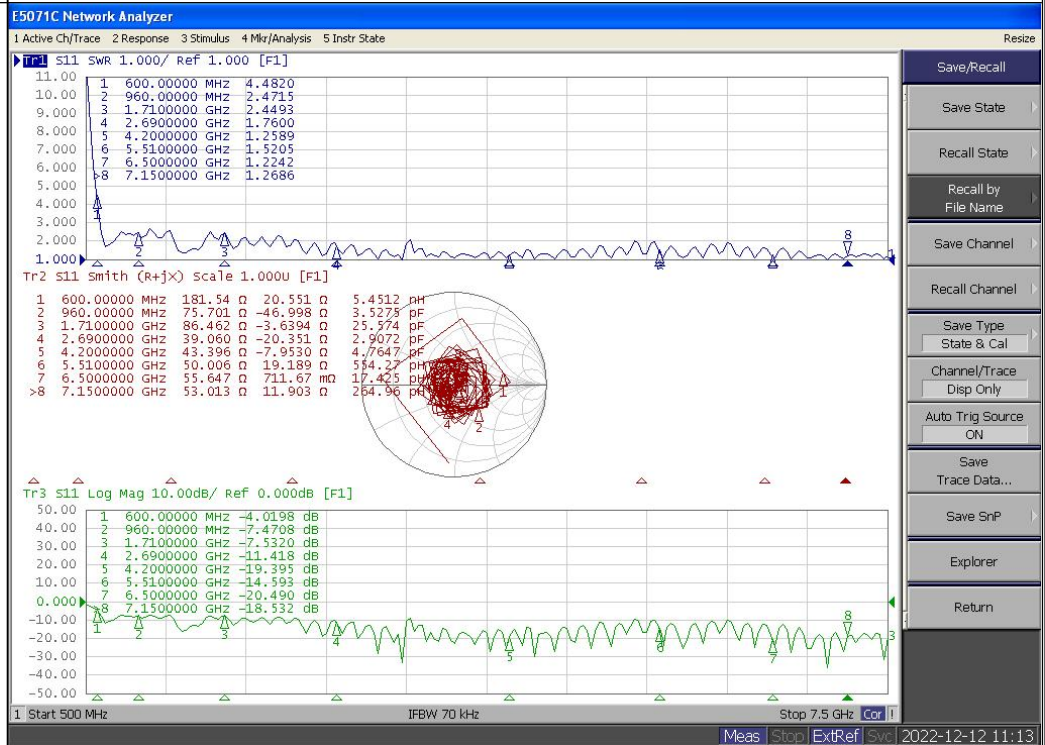


UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU® 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV.
			P0

2-4. Active test


4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

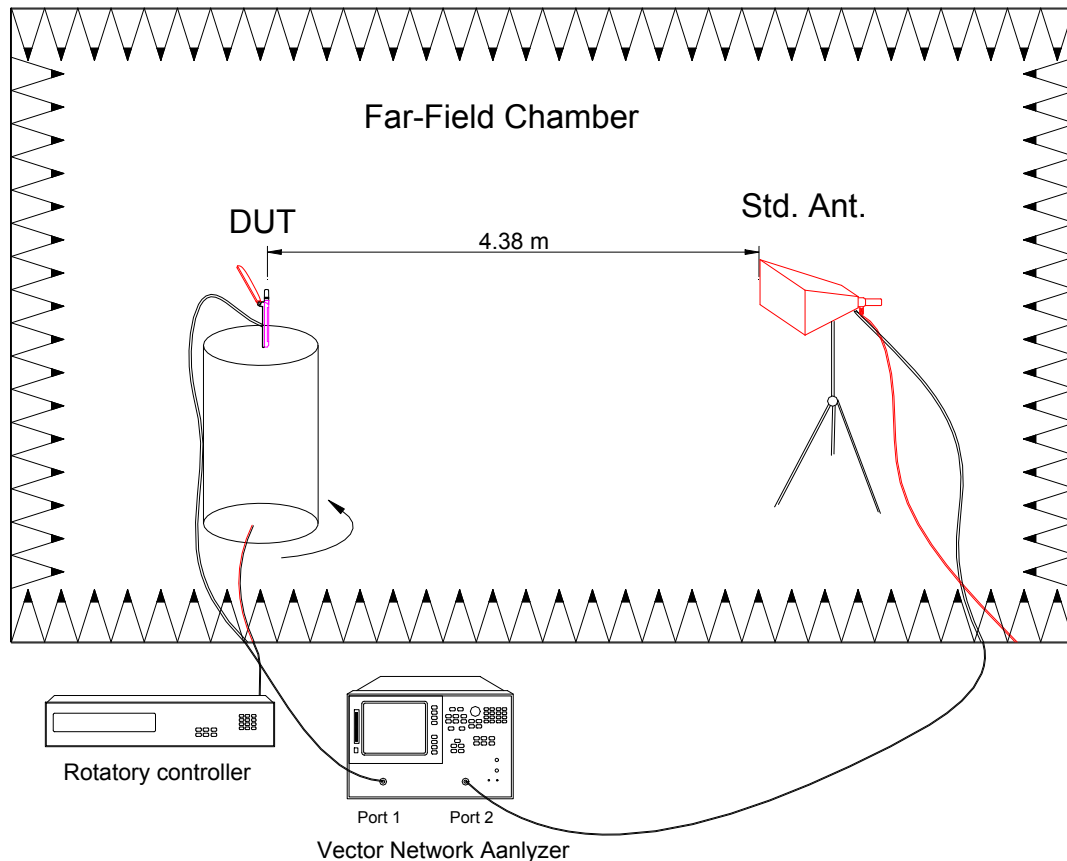


1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)


UNLESS OTHER SPECIFIED TOLERANCES ON :		 TOXU® 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV. P0

2-4-1 GAIN & Efficiency


Frequency/Mhz	MaxGain/dBi	Efficiency / %	Frequency/Mhz	MaxGain/dBi	Efficiency / %
600	-3.28	32.39	1530	2.82	69.82
630	-1.71	39.99	1560	2.8	70.31
660	2.06	51.88	1590	2.85	66.83
690	5.29	79.43	1620	2.63	74.47
720	3.91	74.64	1650	2.6	70.47
750	3.4	72.41	1680	2.27	65.46
780	3.52	71.79	1710	3.05	66.83
810	2.69	72.47	1740	2.57	72.28
840	2.59	71.66	1770	2.9	79.8
870	2.46	70.15	1800	2.97	77.8
900	2.14	60.53	1830	2.3	74.99
930	1.82	54.58	1860	1.63	73.45
960	1.88	60.95	1890	1.09	65.46
990	2.28	67.45	1920	0.75	65.61
1020	2.34	65.01	1950	1.05	67.61
1050	1.74	60.12	1980	2.23	72.78
1080	2.77	62.23	2010	2.54	71.61
1110	3.63	70.79	2040	2.39	67.3
1140	3.65	75.68	2070	1.46	61.24
1170	3.46	75.16	2100	1.3	67.92
1200	3.98	73.11	2130	1.6	67.61
1230	2.66	69.02	2160	2.24	72.28
1260	1.44	64.42	2190	2.81	74.13
1290	2.35	66.37	2220	2.77	69.82
1320	2.58	64.42	2250	2.86	66.68
1350	2.35	58.08	2280	2.65	64.86
1380	3.18	65.31	2310	3.58	71.94
1410	3.09	70.31	2340	3.35	71.45
1440	3.77	77.8	2370	3.63	71.78
1470	3.47	75.34	2400	3.42	70.63
1500	2.82	75.34	2430	3.95	74.13

UNLESS OTHER SPECIFIED TOLERANCES ON :		 TOXU TECHNOLOGY CO., LTD.
X=±	X.X=± X.XX=±	
ANGLES=±	HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.DA.00200 Antenna Specification		SPEC REV. P0



Frequency/Mhz	MaxGain/dBi	Efficiency / %	Frequency/Mhz	MaxGain/dBi	Efficiency / %
2460	2.77	68.87	3600	3	61.8
2490	3.07	70.31	3630	3.53	60.81
2520	2.35	64.42	3660	3.57	63.53
2550	1.38	59.29	3690	2.76	63.68
2580	2	59.98	3720	3.08	66.68
2610	2.38	58.88	3750	3.4	66.22
2640	2.08	53.7	3780	3.26	60.81
2670	1.32	55.98	3810	3.08	61.8
2700	1.43	53.7	3840	3.16	66.07
2730	3.84	58.08	3870	2.22	58.34
2760	4.46	68.39	3900	3.78	75.16
2790	4.52	66.83	3930	3.93	68.08
2820	2.79	48.75	3960	2.96	55.34
2850	2.28	48.87	3990	3.9	55.72
2880	3.04	59.02	4020	4.87	71.78
2910	3.09	66.83	4050	4.33	70.31
2940	2.57	60.95	4080	4.07	59.02
2970	1.96	56.1	4110	3.88	63.24
3000	2.31	60.39	4140	3.82	61.8
3030	3.6	73.45	4170	4.07	66.99
3060	2.44	61.66	4200	3.12	56.36
3090	2.71	61.8	4230	3.35	56.89
3120	2.77	63.53	4260	3.5	60.12
3150	2.4	59.98	4290	2.06	50.47
3180	2.93	63.1	4320	2.52	48.64
3210	2.73	56.36	4350	1.71	41.78
3240	1.88	53.95	4380	0.47	38.83
3270	1.17	44.57	4410	0.44	36.41
3300	0.53	37.29	4440	0.39	38.73
3330	0.71	41.38	4470	1.39	43.05
3360	0.63	37.56	4500	2.05	54.33
3390	1.41	44.16	4530	1.76	50.35
3420	2.35	51.29	4560	2	56.23
3450	1.85	54.58	4590	2.73	66.07
3480	2.09	55.21	4620	1.62	52.97
3510	0.97	44.87	4650	1.87	55.46
3540	1.8	49.89	4680	1.98	58.61
3570	3.06	61.24	4710	2.24	65.01

UNLESS OTHER SPECIFIED TOLERANCES ON :		 TOXU® 同讯技术	TOXU TECHNOLOGY CO., LTD.
$X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = ± HOLEDIA = ±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV. P0

Frequency/Mhz	MaxGain/dBi	Efficiency / %	Frequency/Mhz	MaxGain/dBi	Efficiency / %
4740	1.77	56.75	5970	0.38	39.35
4770	1.87	61.52	6000	0.19	39.1
4800	2.07	59.43	6030	0.15	38.43
4830	1.9	58.08	6060	0.81	40.76
4860	1.34	50.82	6090	0.37	39.12
4890	1.49	51.4	6120	0.14	37.27
4920	2.21	53.33	6150	0.96	45.19
4950	2.57	51.29	6180	0.67	40.36
4980	2.5	50.93	6210	0.85	45.84
5010	1.9	48.75	6240	0.5	44.59
5040	2.38	53.09	6270	0.71	42.95
5070	2.27	53.33	6300	0.83	44.19
5100	2.49	51.52	6330	0.63	46.06
5130	2.7	48.31	6360	0.72	41.93
5160	1.46	43.05	6390	0.82	42.07
5190	1.16	41.59	6420	0.2	39.67
5220	0.44	38.59	6450	0.39	40.55
5250	0.57	39.17	6480	0.47	42.21
5280	0.16	39.58	6510	0.3	43.45
5310	0.88	41.48	6540	0.75	41.46
5340	1.52	43.72	6570	0.34	37.1
5370	2.07	43.75	6600	0.48	44.51
5400	1.72	42.76	6630	0.28	40.93
5430	1.5	41.59	6660	0.37	42.2
5460	1.16	38.99	6690	0.36	41.24
5490	0.88	38.37	6720	0.77	41.62
5520	1.09	41.3	6750	0.37	39.59
5550	1.29	43.05	6780	0.24	39.72
5580	0.46	39.56	6810	0.63	41.48
5610	0.61	38.88	6840	0.74	42.73
5640	0.37	37.67	6870	0.31	39.9
5670	0.43	39.81	6900	0.31	39.17
5700	0.81	39.9	6930	0.16	39.85
5730	1.48	44.36	6960	0.14	38.56
5760	1.45	42.07	6990	0.11	37.73
5790	0.69	38.37	7020	0.84	42.14
5820	0.45	37.15	7050	0.3	39.58
5850	0.32	38.73	7080	1.56	45.08
5880	0.55	37.76	7110	0.65	41.48
5910	0.67	39.06	7140	0.53	38.91
5940	0.35	38.48	7170	1.16	43.37

UNLESS OTHER SPECIFIED TOLERANCES ON :		 TOXU® 同讯技术	TOXU TECHNOLOGY CO., LTD.
$X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = ± HOLEDIA = ±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV. P0

2-4-2: Radiation direction

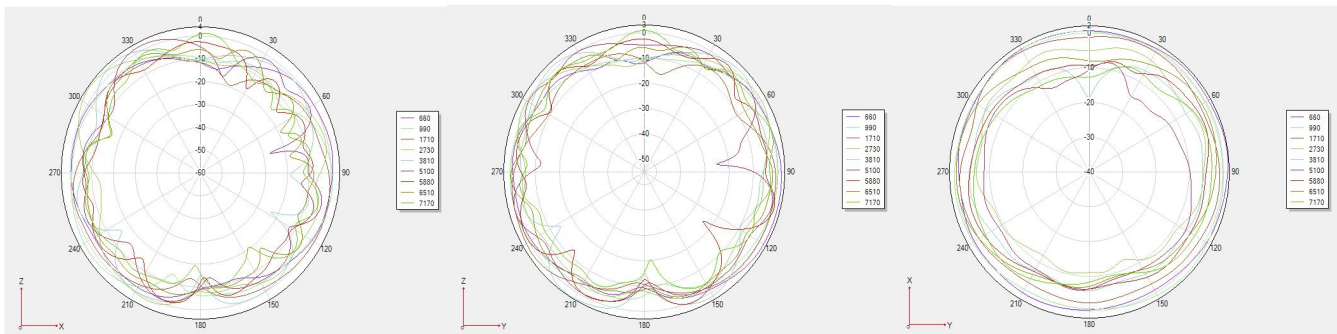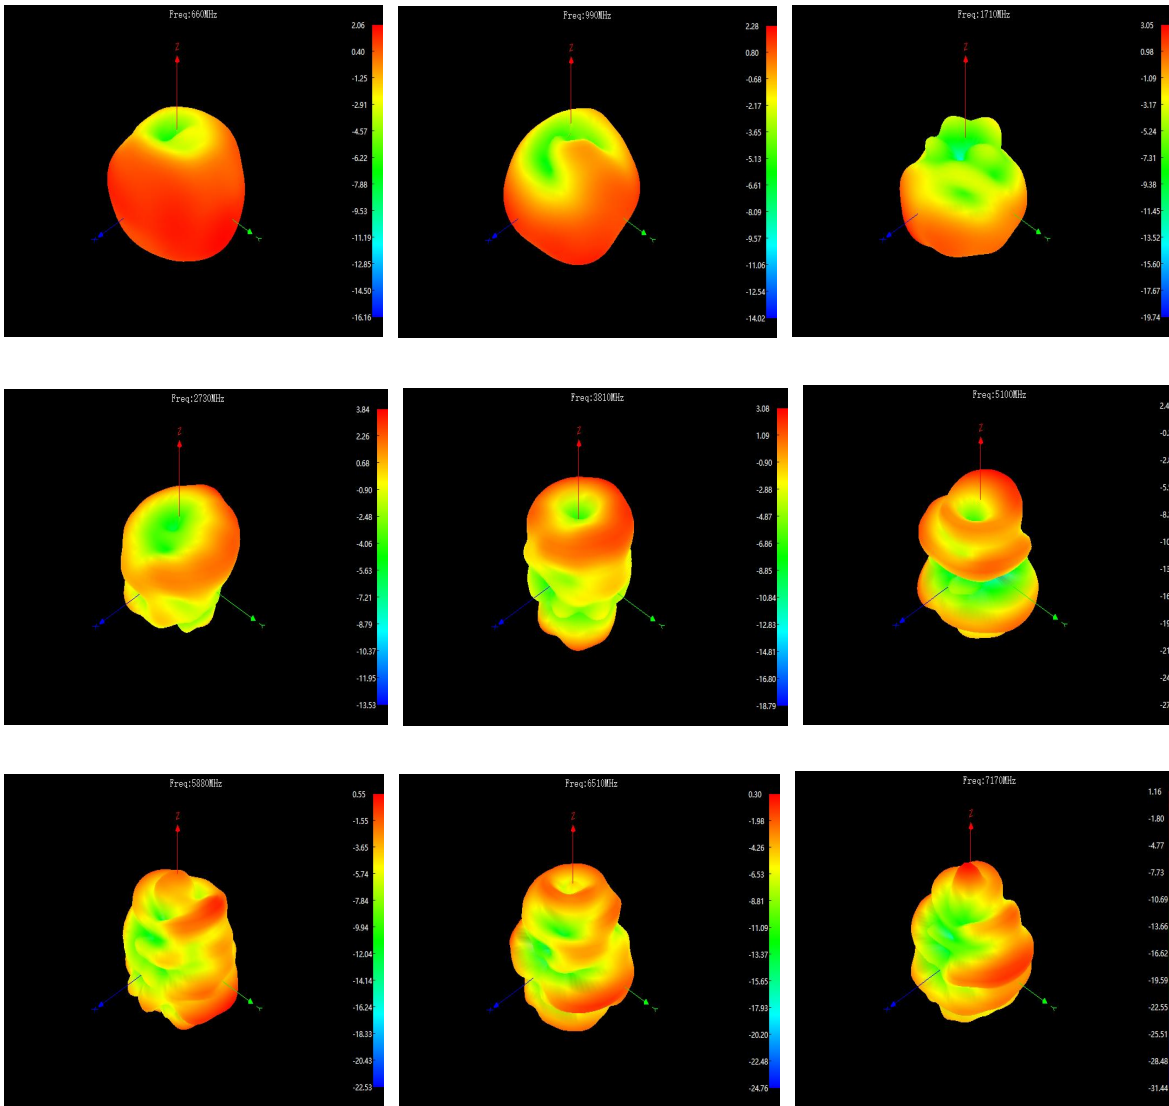


UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU® 同讯技术 TOXU TECHNOLOGY CO., LTD.
$X = \pm$	$X.X = \pm$	
$ANGLES = \pm$	$HOLEDIA = \pm$	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.DA.00200 Antenna Specification		SPEC REV.
		P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

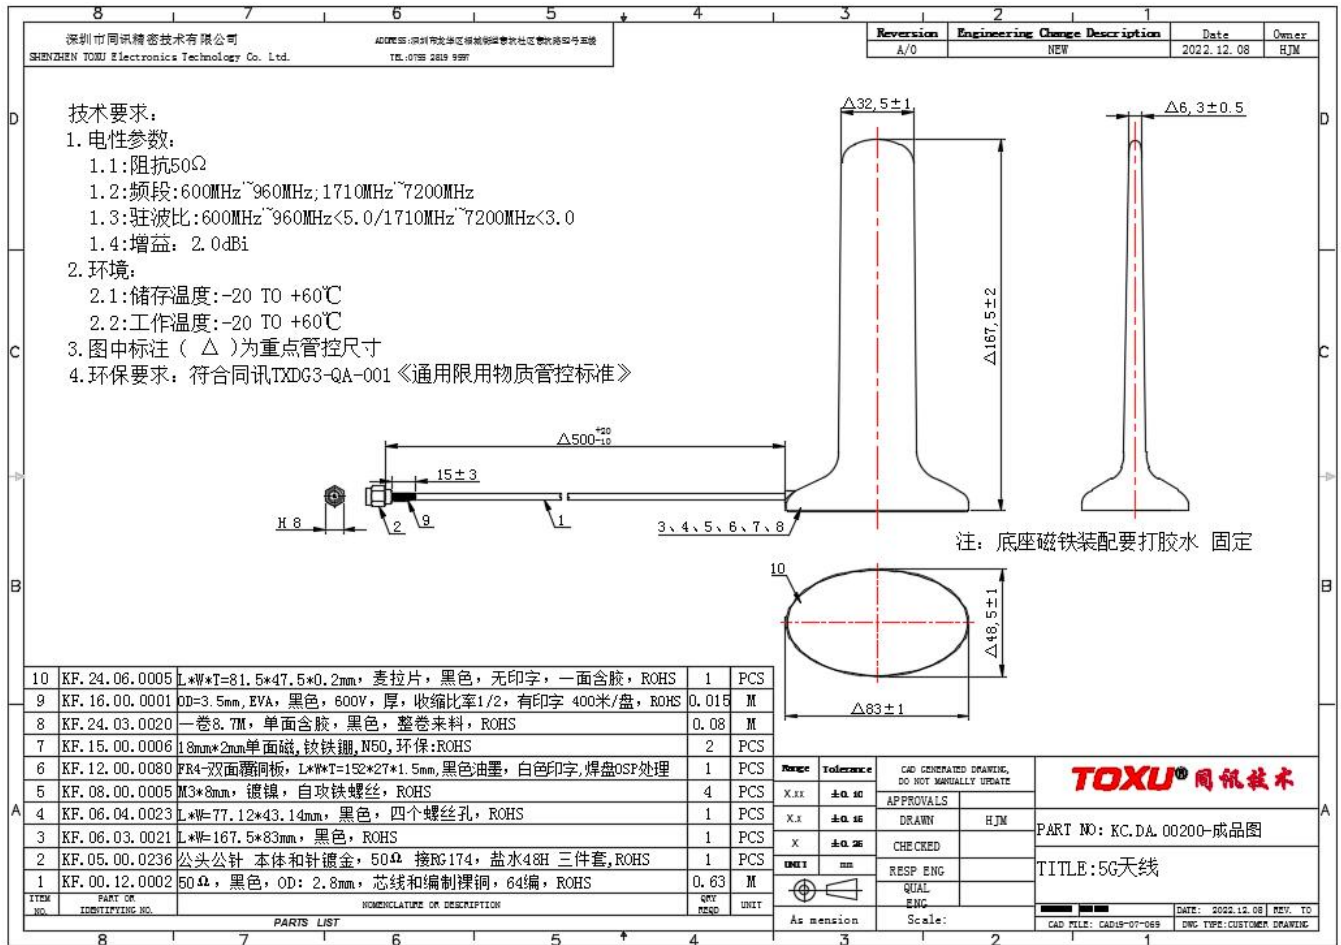

UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU TECHNOLOGY CO., LTD.
X=±	X.X=± X.XX=±	
ANGLES=±	HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.DA.00200 Antenna Specification		SPEC REV.
		P0


3-2. Connector appearance:

SMA-J





5.Product Image:



UNLESS OTHER SPECIFIED TOLERANCES ON : $X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = \pm HOLEDIA = \pm			TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV. P0

5 .Packaging specification:

Product number: xxx			
Product model: xxx			
一、 Label requirements:			
Customer	xxx		
supplier	xxxxxx		
Material coding	xx		
Product model	xx		
Number	XXX PCS	Factory date	X X X
Remarks			
二、 Boxing:			
Job description:			
1. Inner packaging:			
XXpcs A bag			
2. External packaging:			
Xx PCS ;			
3. Matters needing attention:			
a. Whether to add partition and pearl cotton;			
b. Label attachments, such as ROHS, etc.;			



UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU® 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.DA.00200 Antenna Specification			SPEC REV. P0