

On your side



# TEST REPORT

## FCC MPE Test for SRM100A Certification

APPLICANT  
SEONG JI INDUSTRIAL CO.,LTD

REPORT NO.  
HCT-RF-1911-FI013-R1

DATE OF ISSUE  
December 16, 2019


**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

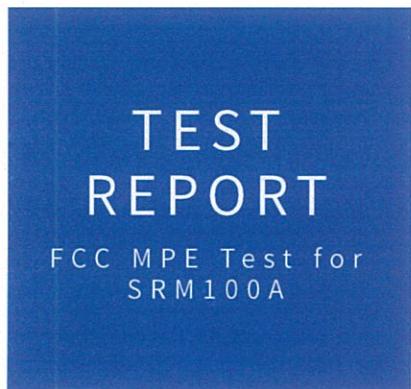

**REPORT NO.**  
HCT-RF-1911-FI013-R1

**DATE OF ISSUE**  
December 16, 2019

**FCC ID**  
2AS8LSRM100A

**Applicant** SEONG JI INDUSTRIAL CO.,LTD  
54-33, DongtanHana 1-gil, Hwaseong-si, Gyeonggi-do, 18423, Korea

---

**Eut Type** Monarch module  
**Model Name** SRM100A

---

**Date of Receipt** September 09, 2019

---

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

**Tested by**  
Se Wook Park

(signature)

**Technical Manager**  
Jong Seok Lee

(signature)

**HCT CO., LTD.**  
Soo Chan Lee  
SooChan Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	November 13, 2019	Initial Release
1	December 16, 2019	Revised the BT_LE Result on page 5

The measurements shown in this report were made in accordance with the procedures specified in § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

## RF Exposure Statement

### 1. Limit

According to § 1.1310, § 2.1091 RF exposure is calculated.

---

#### (B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
0.3 -				
1.34.....	614	1.63	*(100)	30
1.34 - 30.....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 - 300.....	27.5	0.073	0.2	30
300 - 1500.....	.....	.....	f/1500	30
1500 -	.....	.....	1.0	30
100.000.....				

F = frequency in MHz

\* = Plane-wave equivalent power density

### 2. Maximum Permissible Exposure Prediction

Prediction of MPE limit at a given distance

$$S = PG/4\pi R^2$$

S = Power density

P = Power input to antenna

G = Power gain to the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

### 3. RESULTS

#### 3-1. BT LE

Average output Power at antenna input terminal	3.00	dBm
Average output Power at antenna input terminal	2.00	mW
Prediction distance	20.00	cm
Prediction frequency	2402 – 2480	MHz
Antenna Gain(typical)	5.33	dBi
Antenna Gain(numeric)	3.412	-
Power density at prediction frequency( S)	0.00135	mW/cm <sup>2</sup>
MPE limit for uncontrolled exposure at prediction frequency	1.000	mW/cm <sup>2</sup>

#### 2.1091

EIRP	8.33 (dBm)
ERP	6.18 (dBm)
ERP	0.004 (W)
ERP Limit	3.00 (W)
MARGIN	28.59 (dB)

**3-2. Sigfox**

Average output Power at antenna input terminal	25.50	dBm
Average output Power at antenna input terminal	354.81	mW
Prediction distance	20.000	cm
Prediction frequency	902.1375 ~ 923.2625	MHz
Antenna Gain(typical)	1.98	dBi
Antenna Gain(numeric)	1.578	-
Power density at prediction frequency( S)	0.11136	mW/cm <sup>2</sup>
MPE limit for uncontrolled exposure at prediction frequency	0.601	mW/cm <sup>2</sup>

**2.1091**

EIRP	27.48 (dBm)
ERP	25.33 (dBm)
ERP	0.34 (W)
ERP Limit	1.50 (W)
MARGIN	6.43 (dB)