


FCC CO-LOCATION RADIO TEST REPORT

FCC ID : 2ASD2-7483
Equipment : Digital Media Receiver
Model Name : 36EBT3
Applicant : Process Run LLC
2815 Forbs Avenue, Suite 107
Hoffman Estates, IL 60192
United States
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 12, 2019 and testing was started from Jun. 11, 2019 and completed on Jul. 01, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	5
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
3 Test Result	9
3.1 Unwanted Emissions Measurement.....	9
3.2 Antenna Requirements.....	13
4 List of Measuring Equipment.....	14
5 Uncertainty of Evaluation	15
Appendix A. Radiated Spurious Emission	
Appendix B. Radiated Spurious Emission Plots	
Appendix C. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR921234-01F	01	Initial issue of report	Jul. 16, 2019

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.407(b)	Unwanted Emissions	Pass
3.2	15.203 15.407(a)	Antenna Requirement	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	36EBT3
FCC ID	2ASD2-7483
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz 5150 MHz ~ 5250 MHz
Antenna Type / Gain	<2400 MHz ~ 2483.5 MHz> Ant. 1 : Printed Inverted-F Antenna with gain 3.0 dBi <5150 MHz ~ 5250 MHz> Ant. 2 : Printed Inverted-F Antenna with gain 3.5 dBi
Type of Modulation	802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW0007



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

2400-2483.5 MHz Bluetooth-LE 2M GFSK	
Channel	Freq. (MHz)
39	2480

2400-2483.5 MHz 802.11g (HT20)		5150~5250MHz 802.11a (HT20)	
Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2462	36	5180

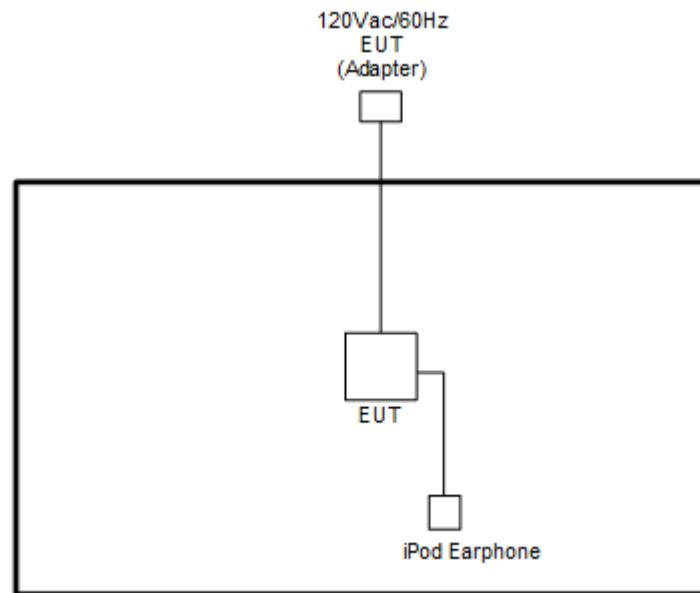
2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

<Co-Location>

Modulation	Data Rate
Bluetooth LE + 802.11g(HT20) for Ant. 2	2Mbps + MCS0
Bluetooth LE + 802.11a(HT20) for Ant. 2	2Mbps + MCS0

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	A1387	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "Compliance tool 1.0.0.50" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

- (1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

- (2) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

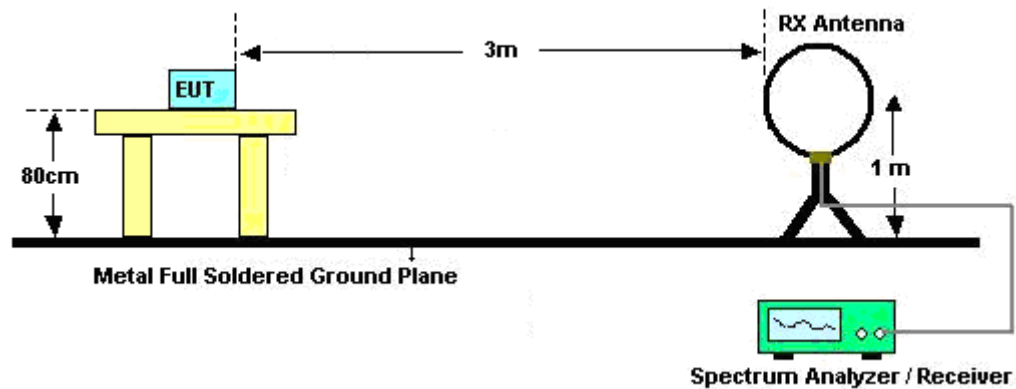
3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.

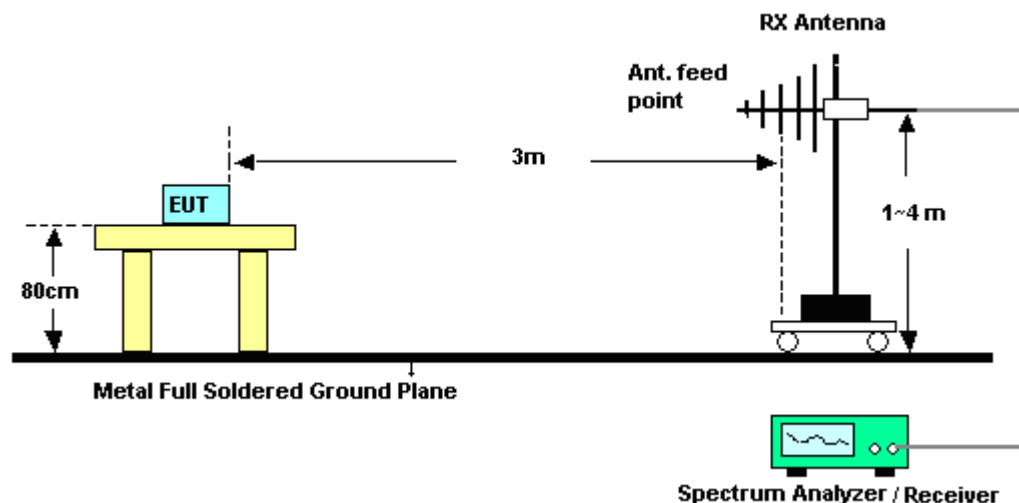
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup

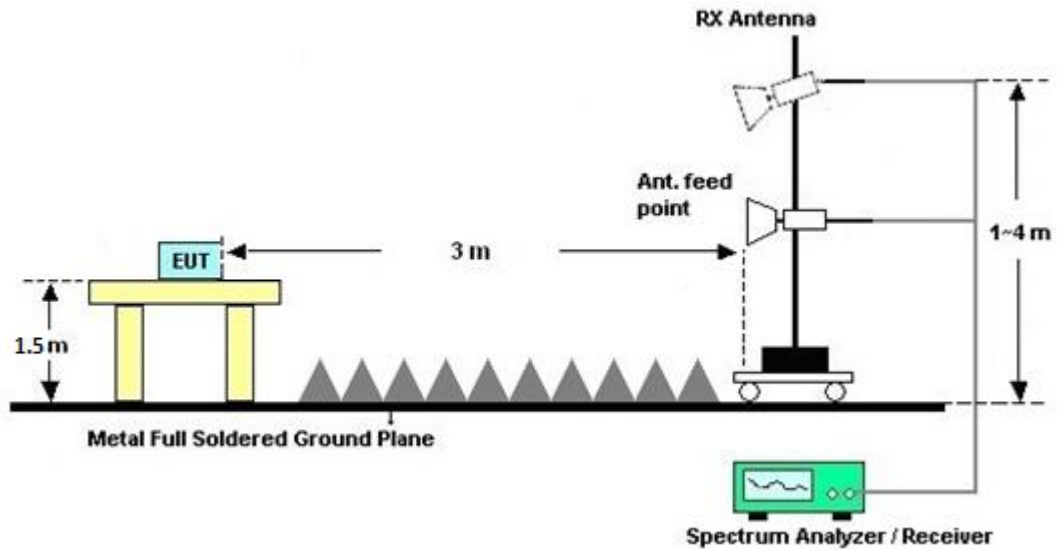
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B.



3.2 Antenna Requirements

3.2.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 11, 2019	Jun. 11, 2019~ Jul. 01,,2019	Jan. 10, 2020	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D& 00802N1D0 1N-06	47020&06	30MHz to 1GHz	Oct. 13, 2018	Jun. 11, 2019~ Jul. 01,,2019	Oct. 12, 2019	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 07, 2018	Jun. 11, 2019~ Jul. 01,,2019	Sep. 06, 2019	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA9170 251	18GHz ~ 40GHz	Nov. 20, 2018	Jun. 11, 2019~ Jul. 01,,2019	Nov. 19, 2019	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Oct. 02, 2018	Jun. 11, 2019~ Jul. 01,,2019	Oct. 01, 2019	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55- 303	17100018 00055007	1GHz~18GHz	Apr. 01, 2019	Jun. 11, 2019~ Jul. 01,,2019	Mar. 31, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 12, 2018	Jun. 11, 2019~ Jul. 01,,2019	Dec.11, 2019	Radiation (03CH16-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 11, 2019~ Jul. 01,,2019	Jul. 15, 2019	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY572901 11	3Hz~26.5GHz	Nov. 29, 2018	Jun. 11, 2019~ Jul. 01,,2019	Nov. 28, 2019	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY542004 86	10Hz~44GHz	Oct. 19, 2018	Jun. 11, 2019~ Jul. 01,,2019	Oct. 18, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	MY1082/2 6EA	30M-18G	Oct. 15, 2018	Jun. 11, 2019~ Jul. 01,,2019	Oct. 14, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15539/ 4	30M-18G	Feb. 26, 2019	Jun. 11, 2019~ Jul. 01,,2019	Feb. 25, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/ 4	30M~18GHz	Apr. 15, 2019	Jun. 11, 2019~ Jul. 01,,2019	Apr. 14, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-00113 6	N/A	N/A	Jun. 11, 2019~ Jul. 01,,2019	N/A	Radiation (03CH16-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
--	-----



Appendix A. Radiated Spurious Emission

Test Engineer :	Jacky Hung, Austin LI and CR Liro	Temperature :	20~25°C
		Relative Humidity :	50~60%

BLE (Band Edge @ 3m)

Ant. Simultaneously	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH11 2462 MHz Ant 2	*	2480	103.52	-	-	87.75	27.65	18.38	30.26	339	160	P	H
	*	2480	101.99	-	-	86.22	27.65	18.38	30.26	339	160	A	H
		2484	61.79	-12.21	74	46	27.66	18.38	30.25	339	160	P	H
		2483.64	49.41	-4.59	54	33.62	27.66	18.38	30.25	339	160	A	H
	*	2480	105.21	-	-	89.44	27.65	18.38	30.26	185	351	P	V
	*	2480	102.6	-	-	86.83	27.65	18.38	30.26	185	351	A	V
		2483.72	59.44	-14.56	74	43.65	27.66	18.38	30.25	185	351	P	V
		2483.52	49.86	-4.14	54	34.07	27.66	18.38	30.25	185	351	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**WIFI 802.11n HT20 (Band Edge @ 3m)**

Ant. Simultaneously	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH11 2462 MHz Ant 2	*	2462	109.96	-	-	94.25	27.6	18.37	30.26	101	301	P	H
	*	2462	102.45	-	-	86.74	27.6	18.37	30.26	101	301	A	H
		2484.04	63.6	-10.4	74	47.81	27.66	18.38	30.25	101	301	P	H
		2483.52	50.52	-3.48	54	34.73	27.66	18.38	30.25	101	301	A	H
	*	2462	109.72	-	-	94.01	27.6	18.37	30.26	283	108	P	V
	*	2462	101.9	-	-	86.19	27.6	18.37	30.26	283	108	A	V
		2483.56	65.5	-8.5	74	49.71	27.66	18.38	30.25	283	108	P	V
		2483.52	49.96	-4.04	54	34.17	27.66	18.38	30.25	283	108	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz (Harmonic @ 3m)**

Ant. Simultaneously	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH11 2462 MHz Ant 2		4924	46.07	-27.93	74	58.59	32.65	14.01	59.18	100	0	P	H
		4960	40.31	-33.69	74	52.72	32.72	14.06	59.19	100	0	P	H
		7386	44.01	-29.99	74	50.65	37.34	15.17	59.15	100	0	P	H
		7440	45.01	-28.99	74	51.42	37.42	15.29	59.12	100	0	P	H
		4924	56.67	-17.33	74	69.19	32.65	14.01	59.18	357	228	P	V
		4924	44.81	-9.19	54	57.33	32.65	14.01	59.18	357	228	A	V
		4960	41.88	-32.12	74	54.29	32.72	14.06	59.19	100	0	P	V
		7386	46.75	-27.25	74	53.39	37.34	15.17	59.15	100	0	P	V
		7440	44.76	-29.24	74	51.17	37.42	15.29	59.12	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz 2400~2483.5MHz (LF)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH11 2462 MHz Ant 2		91.11	21.36	-22.14	43.5	37.88	14.86	1	32.38			P	H
		164.83	27.73	-15.77	43.5	42.53	15.99	1.57	32.36			P	H
		393.75	33.43	-12.57	46	41.19	21.57	3.17	32.5			P	H
		669.23	28.25	-17.75	46	30.34	26.4	4.09	32.58			P	H
		771.08	30.95	-15.05	46	30.7	28.21	4.45	32.41			P	H
		952.47	33.44	-12.56	46	29.3	30.81	4.66	31.33	100	0	P	H
		83.35	26.41	-13.59	40	44.1	13.76	0.94	32.39			P	V
		164.83	23.06	-20.44	43.5	37.86	15.99	1.57	32.36			P	V
		461.65	25.06	-20.94	46	31.08	23.33	3.2	32.55			P	V
		752.65	29.88	-16.12	46	29.63	28.17	4.52	32.44			P	V
		925.31	32.74	-13.26	46	29.86	29.82	4.63	31.57	100	0	P	V
		963.14	34.49	-19.51	54	29.87	30.98	4.87	31.23			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**BLE (Band Edge @ 3m)**

Ant. Simultaneously	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH36 5180 MHz Ant 2	*	2480	106.42	-	-	89.94	27.65	19.09	30.26	379	146	P	H
	*	2480	104.28	-	-	87.8	27.65	19.09	30.26	379	146	A	H
		2483.56	58.3	-15.7	74	41.8	27.66	19.09	30.25	379	146	P	H
		2483.52	48.8	-5.2	54	32.3	27.66	19.09	30.25	379	146	A	H
	*	2480	107.74	-	-	91.26	27.65	19.09	30.26	245	351	P	V
	*	2480	105.79	-	-	89.31	27.65	19.09	30.26	245	351	A	V
		2483.64	58.43	-15.57	74	41.93	27.66	19.09	30.25	245	351	P	V
		2483.52	49.43	-4.57	54	32.93	27.66	19.09	30.25	245	351	A	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**WIFI 802.11n HT20 (Band Edge @ 3m)**

Ant. Simultaneously	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH36 5180 MHz Ant 2	*	5148.72	61.8	-12.2	74	45.46	32.62	13.44	29.72	276	287	P	H
	*	5150	51.8	-2.2	54	35.46	32.62	13.44	29.72	276	287	A	H
		5180	112.55	-	-	96.32	32.58	13.37	29.72	276	287	P	H
		5180	104.25	-	-	88.02	32.58	13.37	29.72	276	287	A	H
	*	5147.16	63.98	-10.02	74	47.63	32.62	13.45	29.72	336	49	P	V
	*	5150	51.37	-2.63	54	35.03	32.62	13.44	29.72	336	49	A	V
		5180	114.04	-	-	97.81	32.58	13.37	29.72	336	49	P	V
		5180	103.87	-	-	87.64	32.58	13.37	29.72	336	49	A	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**2.4GHz 2400~2483.5MHz and Band 1 5150~5250MHz (Harmonic @ 3m)**

	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH36 5180 MHz Ant 2		4960	58.73	-15.27	74	40.42	32.72	13.48	29.71	100	0	P	H
		4960	47.76	-6.24	54	29.45	32.72	13.48	29.71	100	0	A	H
		7440	46.2	-27.8	74	52.12	37.42	14.96	59.12	100	0	P	H
		10360	51.51	-16.69	68.2	54.89	39.9	17.17	60.76	100	0	P	H
		15540	45.69	-28.31	74	47.83	37.9	21.12	61.55	100	0	P	H
		4960	57.58	-16.42	74	39.27	32.72	13.48	29.71	100	0	P	V
		4960	47.53	-6.47	54	29.22	32.72	13.48	29.71	100	0	A	V
		7440	45.64	-28.36	74	51.56	37.42	14.96	59.12	100	0	P	V
		10360	50.23	-17.97	68.2	53.61	39.9	17.17	60.76	100	0	P	V
		15540	45.29	-28.71	74	47.43	37.9	21.12	61.55	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz 2400~2483.5MHz and Band 1 5150~5250MHz (LF)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE(2M) CH39 2480 MHz Ant 1 + 802.11n HT20 CH36 5180 MHz Ant 2		92.08	23.01	-20.49	43.5	39.43	14.95	0.99	32.38			P	H
		161.92	22.87	-20.63	43.5	37.31	16.36	1.46	32.36			P	H
		365.62	32.97	-13.03	46	41.67	20.83	2.9	32.48			P	H
		519.85	29.89	-16.11	46	35.1	23.97	3.35	32.6			P	H
		774.96	30.82	-15.18	46	30.58	28.21	4.29	32.4			P	H
		959.26	33.92	-12.08	46	29.4	30.99	4.62	31.27	100	0	P	H
		79.47	31.45	-8.55	40	49.59	13.31	0.93	32.39	100	0	P	V
		186.17	27.02	-16.48	43.5	42.86	14.84	1.59	32.35			P	V
		402.48	34.23	-11.77	46	41.62	21.89	3.16	32.5			P	V
		535.37	28.63	-17.37	46	33.53	24.21	3.43	32.62			P	V
		757.5	30.33	-15.67	46	30.05	28.21	4.37	32.43			P	V
		995.15	34.18	-19.82	54	29.02	30.6	5.31	30.95			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



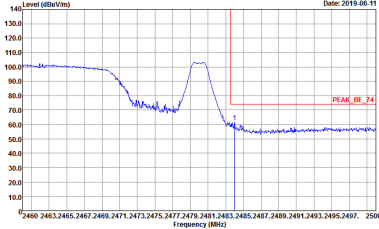
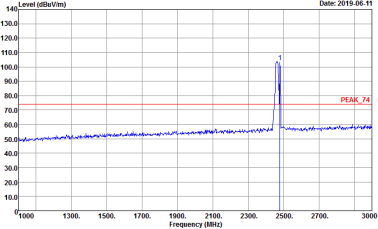
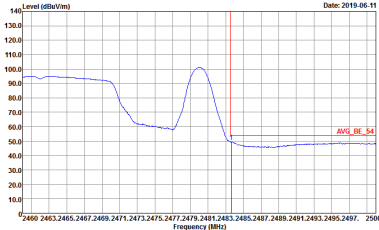
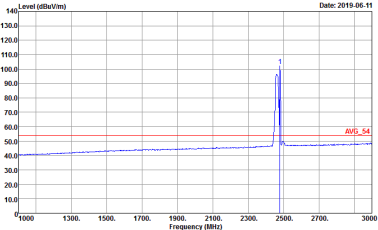
Appendix B. Radiated Spurious Emission

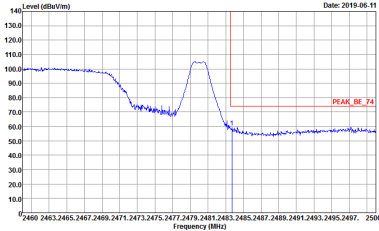
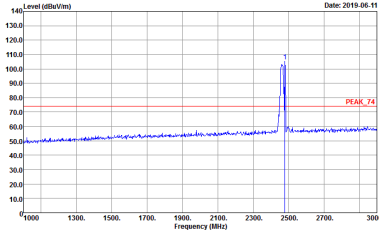
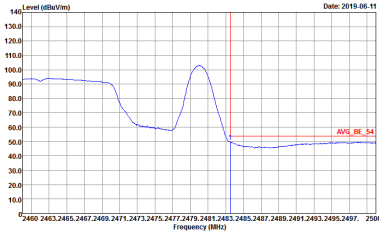
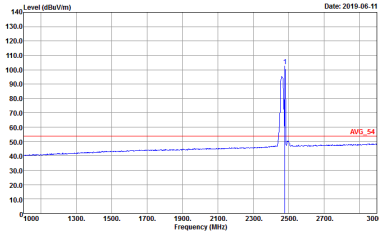
Note symbol

-L	Low channel location
-R	High channel location



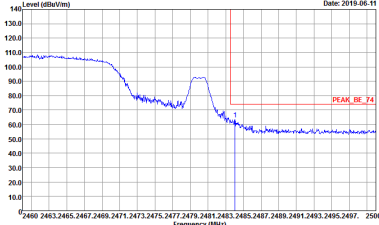
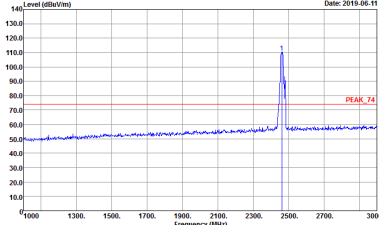
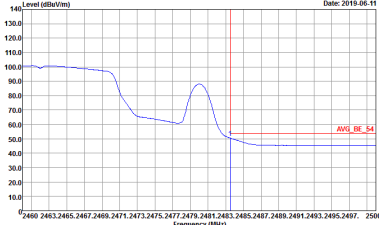
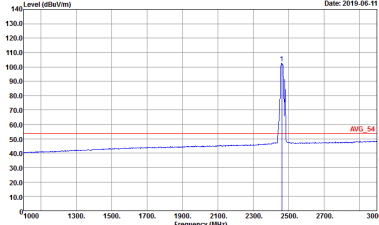
BLE (Band Edge @ 3m)

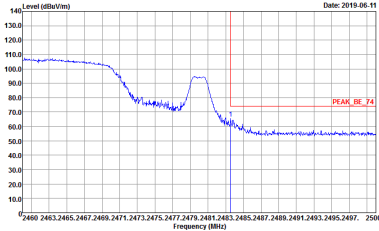
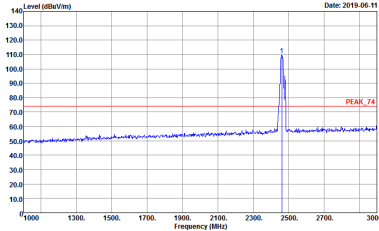
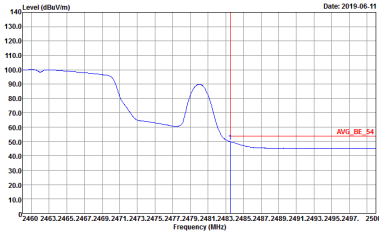
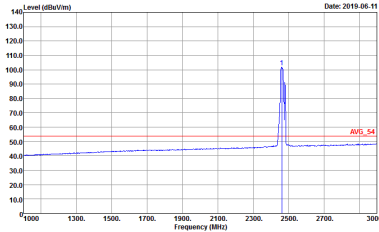
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Horizontal	Fundamental
Peak	<div><p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p></div>	<div><p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p></div>
Avg.	<div><p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p></div>	<div><p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p></div>

ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Vertical	Fundamental
Peak	 <p> Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 IIS(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>	 <p> Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 IIS(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>
	 <p> Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 IIS(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>	 <p> Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 IIS(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>
Avg.		



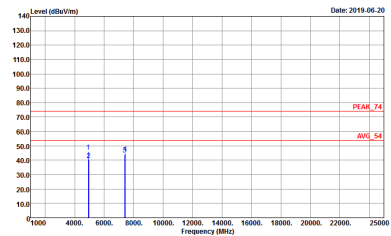
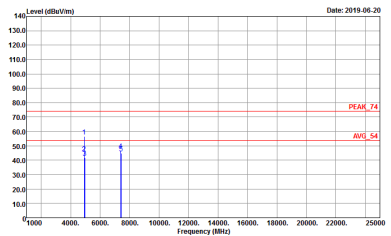
WIFI 802.11n HT20 (Band Edge @ 3m)

ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11g(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>

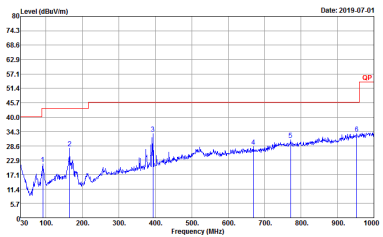
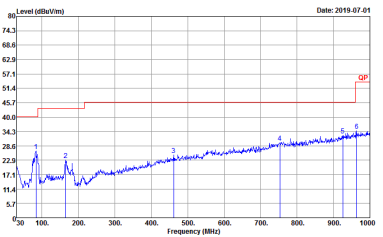
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>
	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>
Avg.		



2.4GHz 2400~2483.5MHz (Harmonic @ 3m)

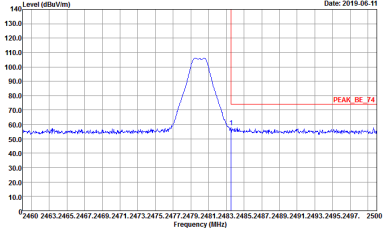
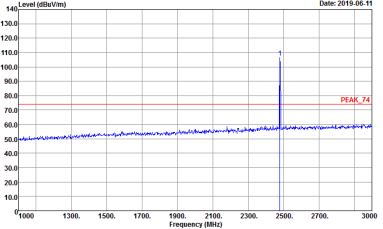
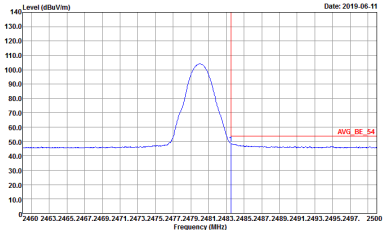
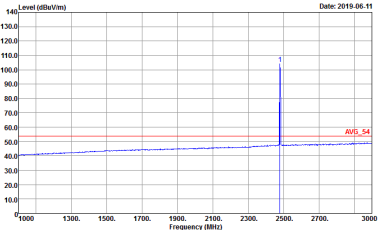
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-1HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>	 <p>Site : 03CH16-1HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilg(n20)_CH11 : 16.5 BLE(2M)_CH39 : 6/0</p>

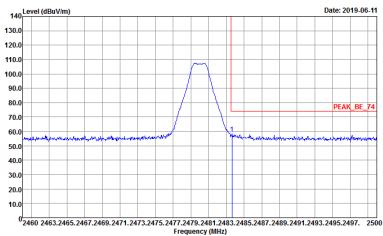
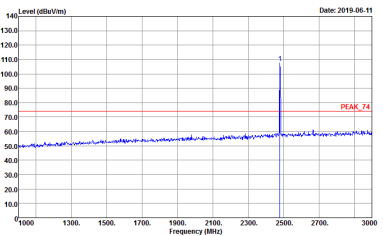
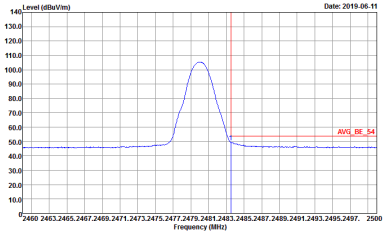
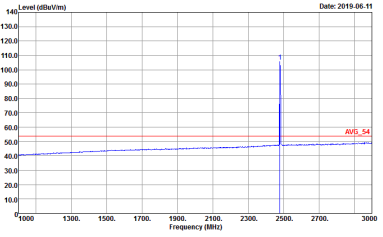
Emission below 1GHz
2.4GHz 2400~2483.5MHz (LF)

ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch11_Ant 2	
Simultaneously	Horizontal	Vertical
QP / Peak	 <p> Site : 03CH16-HY Condition : QP 3m B10G_47020M06 HORIZONTAL Detector : Peak Project : 921234-01 11g(n00)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>	 <p> Site : 03CH16-HY Condition : QP 3m B10G_47020M06 VERTICAL Detector : Peak Project : 921234-01 11g(n00)_CH11 : 16.5 BLE(2M)_CH39 : 6/0 </p>



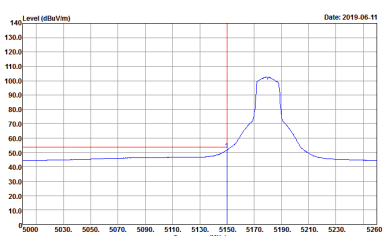
BLE (Band Edge @ 3m)

ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 2479 MHz. The y-axis ranges from 10 to 140 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the peak level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 2479 MHz. The y-axis ranges from 10 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the peak level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 2479 MHz. The y-axis ranges from 10 to 140 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the average level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 2479 MHz. The y-axis ranges from 10 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the average level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0</p>

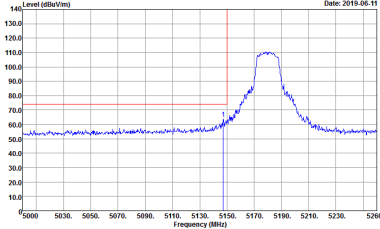
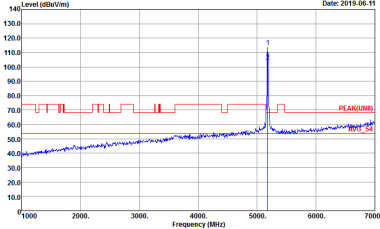
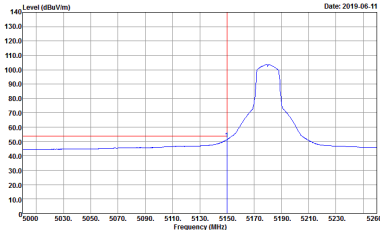
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Vertical	Fundamental
Peak	 <p> Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>	 <p> Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>
Avg.	 <p> Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>	 <p> Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ito(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>



WIFI 802.11n HT20 (Band Edge @ 3m)

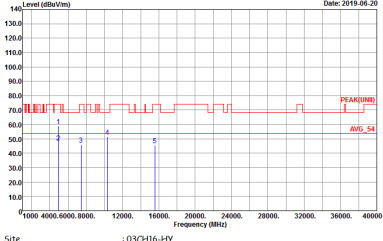
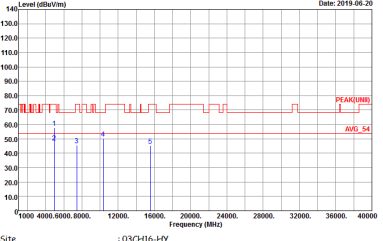
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 5180 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 5000 to 5260 MHz. A red line indicates the peak level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11a(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 5180 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red line indicates the peak level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11a(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 5180 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 5000 to 5260 MHz. A red line indicates the peak level at approximately 105 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 11a(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p>	Left blank



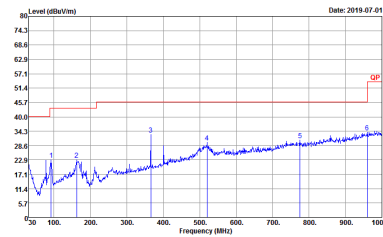
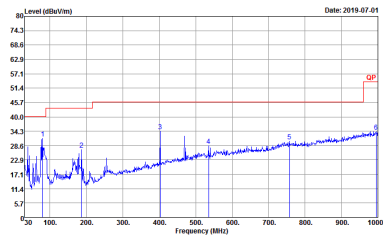
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Vertical	Fundamental
Peak	<div><p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilo(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p></div>	<div><p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilo(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p></div>
Avg.	<div><p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ilo(n20)_Ch36 : 18 BLE(2M)_Ch39 : 7/0</p></div>	Left blank



2.4GHz 2400~2483.5MHz and Band 1 5150~5250MHz (Harmonic @ 3m)

ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 921234-01 Ila(n20)_CH36 : 18 BLE(2M)_CH39 : 770</p>	 <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 921234-01 Ila(n20)_CH36 : 18 BLE(2M)_CH39 : 770</p>

Emission below 1GHz
2.4GHz 2400~2483.5MHz and Band 1 5150~5250MHz (LF)

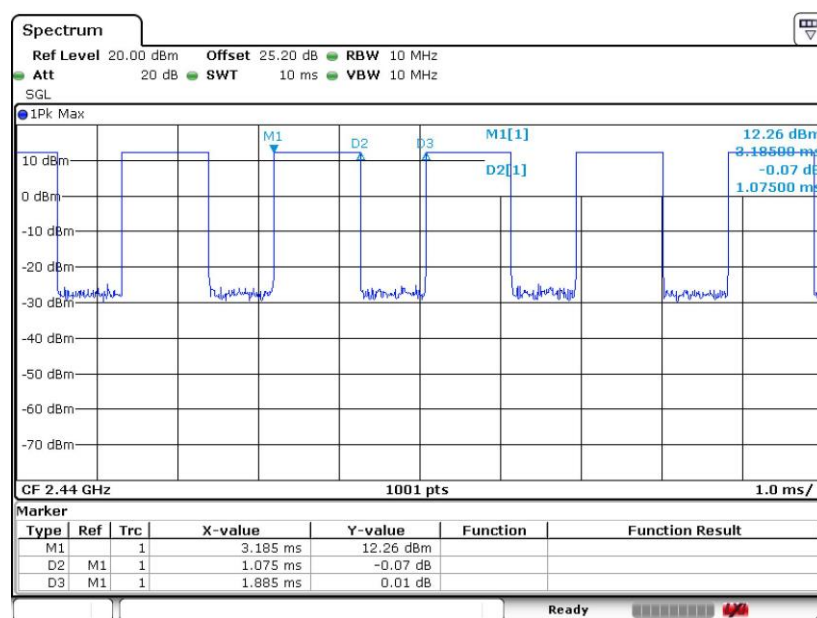
ANT	BLE(2M)_Ch39_Ant 1 + WIFI 802.11n HT20_Ch36_Ant 2	
Simultaneously	Horizontal	Vertical
QP / Peak	 <p> Site : 03CH16-HY Condition : QP 3m BLO6_47020M06 HORIZONTAL Detector : Peak Project : 921234-01 116(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>	 <p> Site : 03CH16-HY Condition : QP 3m BLO6_47020M06 VERTICAL Detector : Peak Project : 921234-01 116(n20)_CH36 : 18 BLE(2M)_CH39 : 7/0 </p>

Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	Bluetooth –LE for 2Mbps	57.03	1075	0.93	1kHz	2.44
2	802.11g	100.00	-	-	10Hz	0.00
2	802.11a	100.00	-	-	10Hz	0.00

<Ant. 1>

Bluetooth - LE

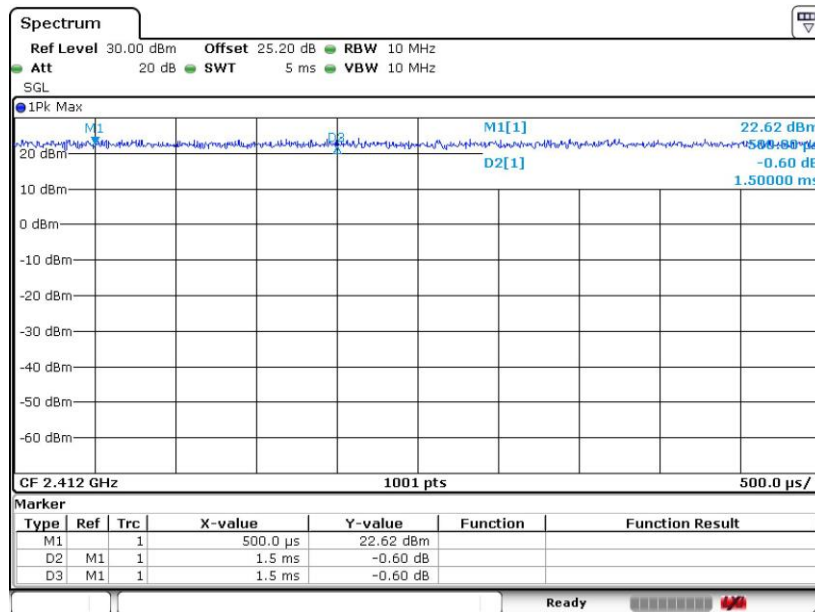


Date: 11.JUN.2019 21:51:17



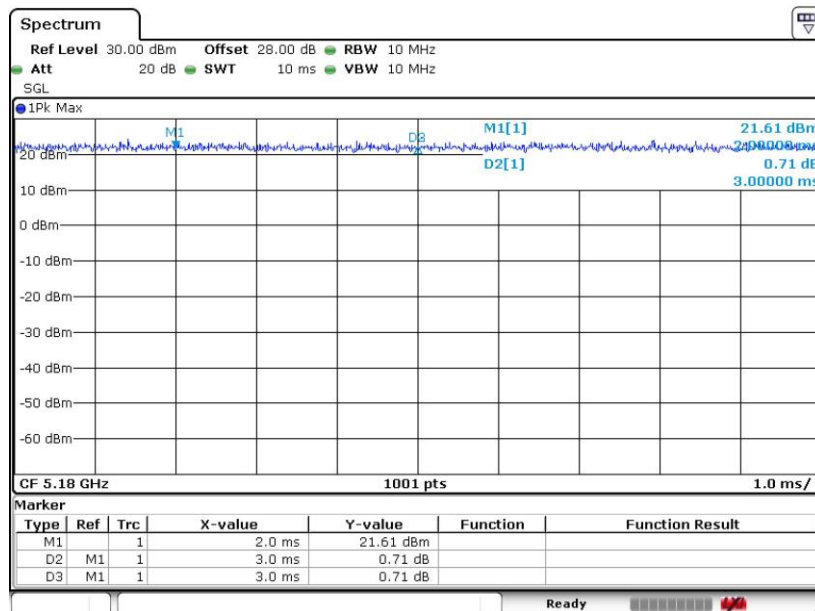
<Ant. 2>

802.11g



Date: 11 JUN 2019 21:41:14

802.11a



Date: 12 JUN 2019 01:00:20

—THE END—