

RF EXPOSURE REPORT FOR CERTIFICATION
On Behalf of

GOGOTORO LLC

Full Circle

Model Number: WIOPB

Additional Model: FCPBBK1, FCPBCO1, FCPBBNA1, FCPBBYE1, FCPBBRE1

FCC ID: 2ASPB-WIOPB

Prepared for:	GOGOTORO LLC
	60 Broadway 10M Brooklyn NY 11249 USA
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808



Report Number:	ESTE-R1912062
Date of Test:	Dec. 05~11, 2019
Date of Report:	Dec. 12, 2019

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. SUMMARY OF TEST	4
1.1. Summary of test result.....	4
1.2. Test Mode.....	4
1.3. Test Equipment List	4
2. MAXIMUM PERMISSIBLE EXPOSURE	5
2.1. Limit	5
2.2. Test Setup	5
2.3. Test Procedure	6
2.4. Equipment Approval Considerations	7
2.5. Test Result.....	8
3. TEST SETUP PHOTO	11



EST Technology Co., Ltd.

Applicant:	GOGOTORO LLC		
Address:	60 Broadway 10M Brooklyn NY 11249 USA		
Manufacturer:	Power7 Technology (Dong Guan) Co., Ltd.		
Address:	No.28 Binjiang Blvd.Shishuikou Village,Qiaotou Town, Dongguan City, GuangDong Province P.R.China		
E.U.T:	Full Circle		
Model Number:	WIOPB		
Additional Model:	FCPBBK1, FCPBCO1, FCPBBNA1, FCPBBYE1, FCPBBRE1 (Except for the silicone color and model name, the rest is identical.)		
Power Supply:	Type-C:PD/QC 18W Usba: 5V2.4A/Type-C&Usba Total: 5V3.4A Max Wireless power transmitter: 10W Max		
Trade Name:	Ampere	Serial No.:	-----
Date of Receipt:	Dec. 05, 2019	Date of Test:	Dec. 05~11, 2019
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v03		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Date: Dec. 12, 2019			
Prepared by:	Reviewed by:	Approved by:	
 Ring / Assistant	 Shawn / Engineer	 Iceman Hu / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. SUMMARY OF TEST

1.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with Empty Load
	Wireless Charging with Half Load
	Wireless Charging with Full Load

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Exposure Level Tester	Narda	ELT-400	EST-E105	Aug. 21,19	1 Year
B-Field Probe	Narda	ELT Probe	EST-E106	Aug. 30,19	1 Year

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note:

1. f = frequency in MHz * = Plane-wave equivalent power density.
2. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

2.2. Test Setup

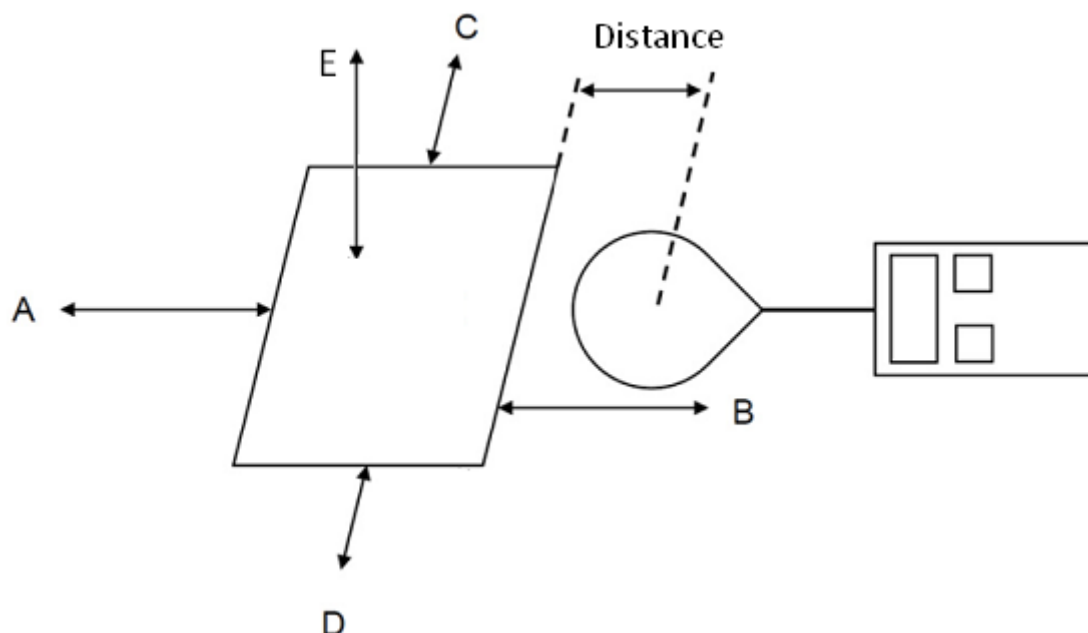

2.3. Test Procedure

- a. The test was performed on turn table in anechoic chamber with a dummy load.
- b. The dummy load must be placed horizontal of the EUT at the top (Parallel to the coil).
- c. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

2.4. Equipment Approval Considerations

According to the item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03:

Inductive wireless power transfer applications that meets KDB 680106 Clause 5(b) 6 conditions are excluded from submitting an RF exposure evaluation.

1	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 110.5-205KHz.
2	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 10W.
3	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
	Yes, the transfer system includes only single primary and secondary coils.
4	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
5	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	NO
6	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

2.5. Test Result

Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110.5 to 205 kHz		
Position A(V/m)	2.201	1.602	1.049
Position B(V/m)	2.325	1.703	1.226
Position C(V/m)	2.221	1.651	1.111
Position D(V/m)	2.409	1.802	1.278
Position E(V/m)	2.205	1.531	1.193
Limits (V/m)	614		
50% Limits(V/m)	307		

Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110.5 to 205 kHz		
Position A(A/m)	0.497	0.353	0.214
Position B(A/m)	0.489	0.344	0.217
Position C(A/m)	0.423	0.325	0.223
Position D(A/m)	0.440	0.331	0.222
Position E(A/m)	0.454	0.392	0.225
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

Test Result for Test setup B:


Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	7.698	7.655	7.521	7.663	7.654	614
2	7.018	7.000	6.998	6.89	7.021	614
3	6.451	6.503	6.525	6.554	6.527	614
4	6.120	6.045	6.054	5.988	6.103	614
5	5.645	5.547	5.615	5.657	5.655	614
6	5.131	5.025	5.154	5.089	5.144	614
7	4.632	4.709	4.597	4.559	4.612	614
8	4.250	4.349	4.325	4.251	4.322	614
9	3.791	3.681	3.709	3.721	3.686	614
10	3.321	3.296	3.355	3.401	3.410	614



H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	0.711	0.701	0.693	0.712	0.705	1.63
2	0.681	0.683	0.683	0.692	0.683	1.63
3	0.670	0.672	0.675	0.683	0.665	1.63
4	0.661	0.665	0.665	0.661	0.658	1.63
5	0.651	0.652	0.651	0.654	0.645	1.63
6	0.641	0.642	0.635	0.633	0.634	1.63
7	0.621	0.621	0.625	0.625	0.618	1.63
8	0.605	0.613	0.594	0.597	0.613	1.63
9	0.593	0.595	0.588	0.589	0.609	1.63
10	0.591	0.575	0.585	0.581	0.591	1.63


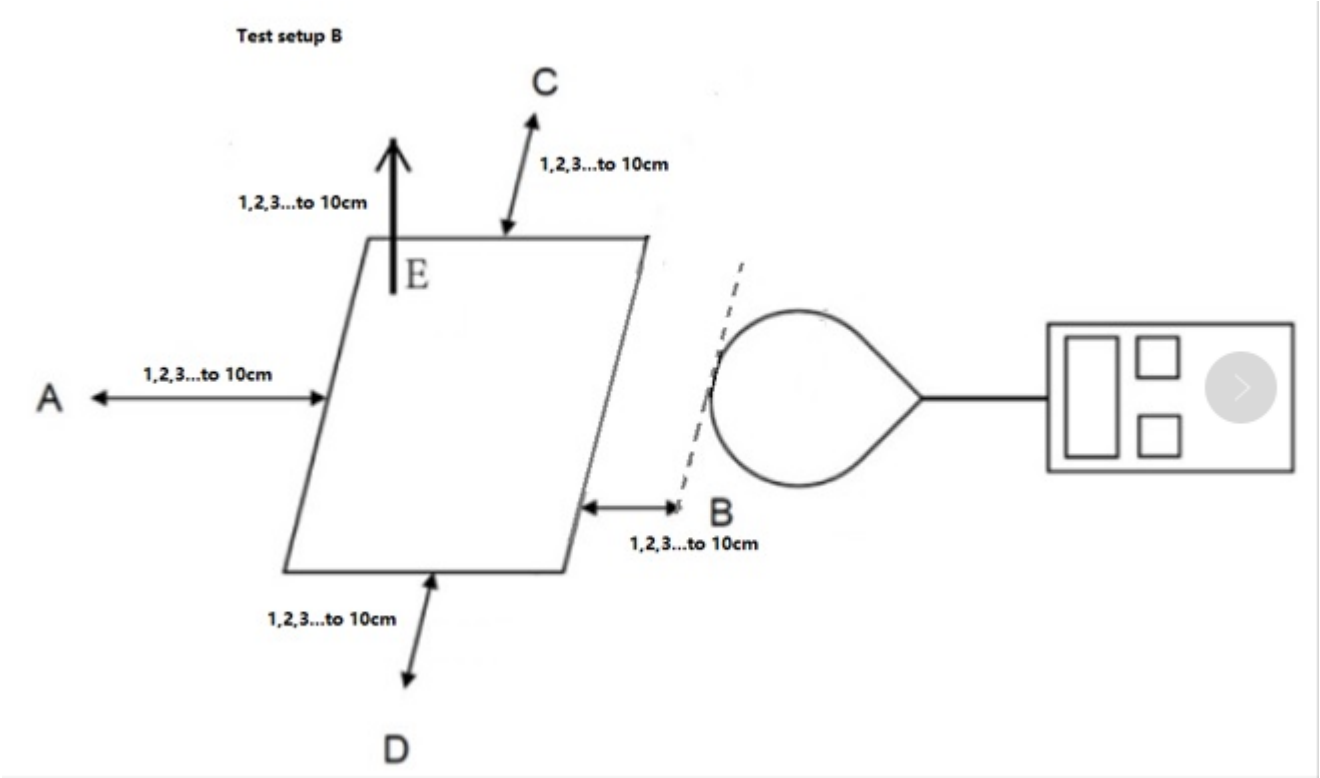


3. TEST SETUP PHOTO



Position A

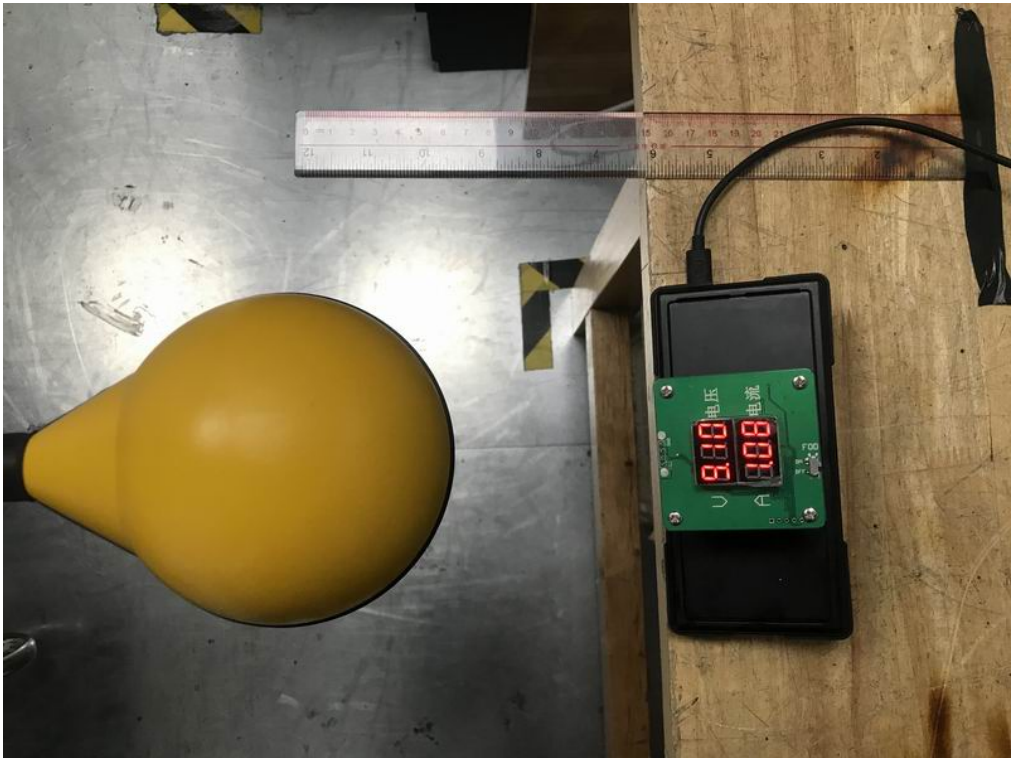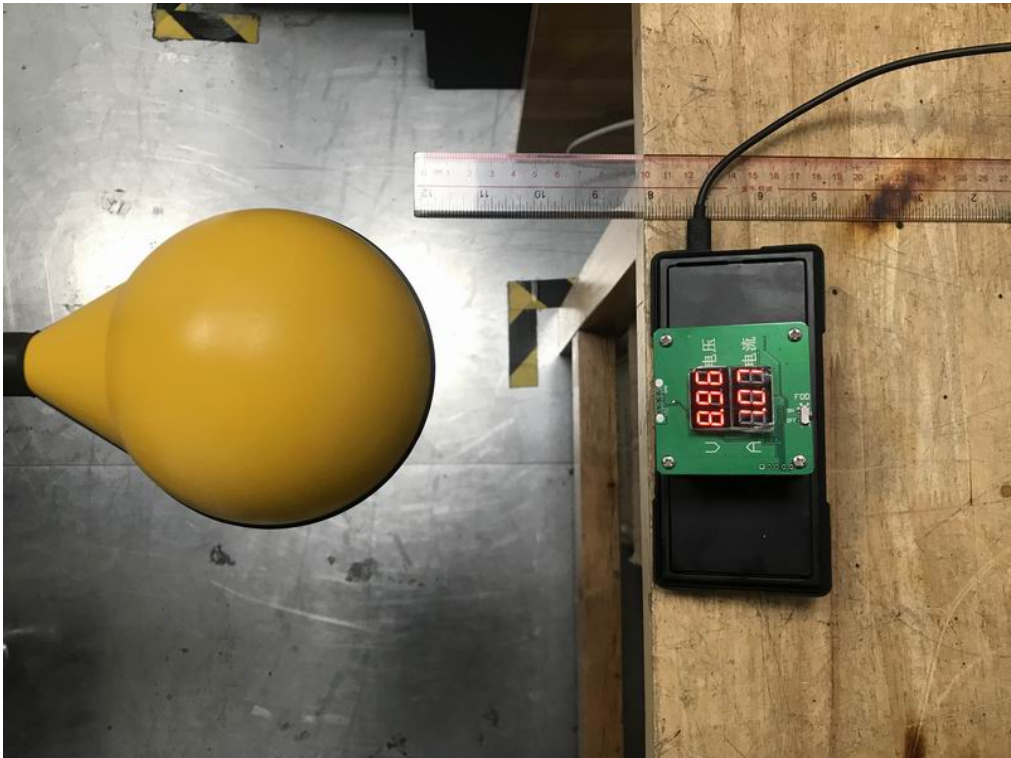



Position B

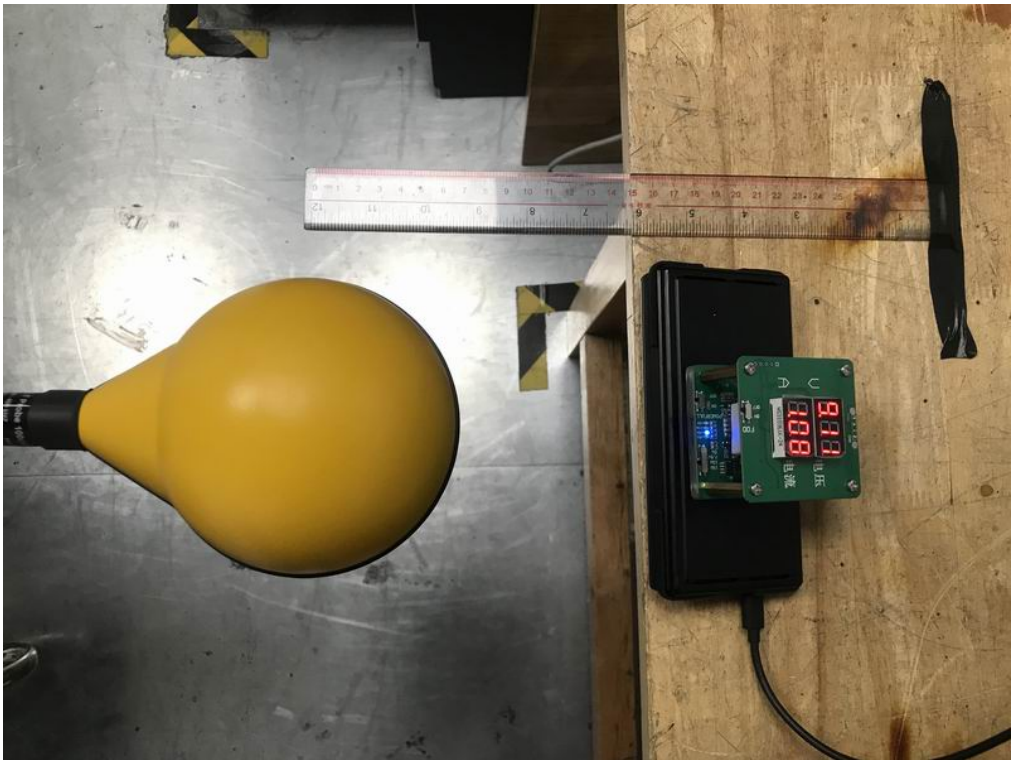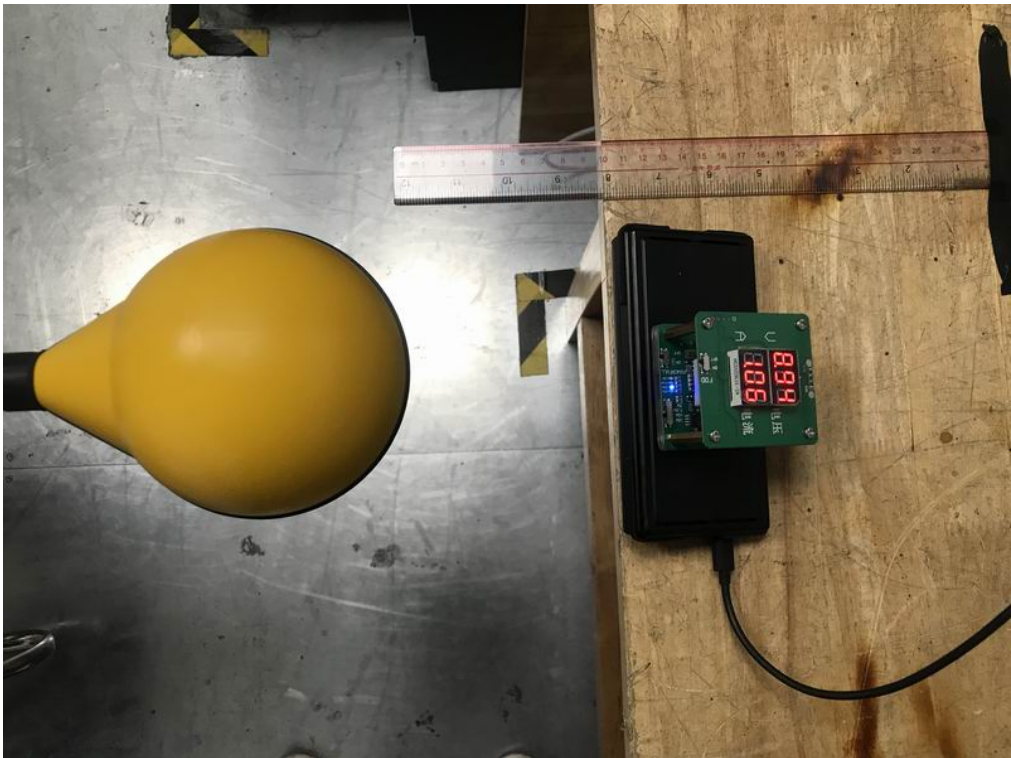



Position C

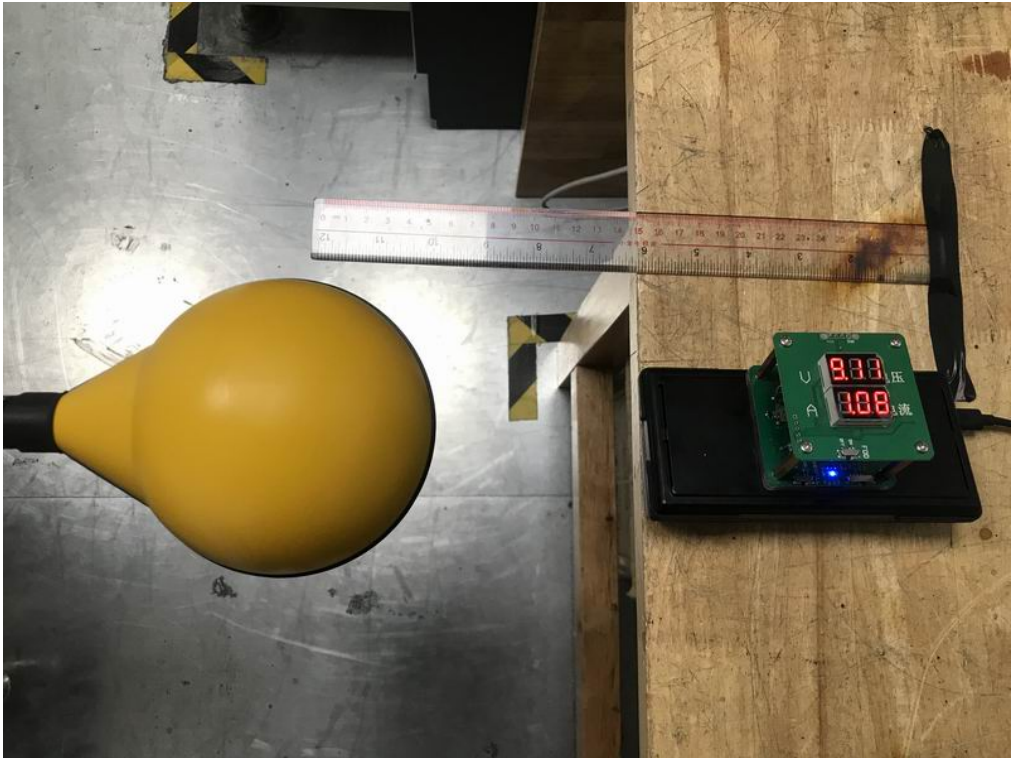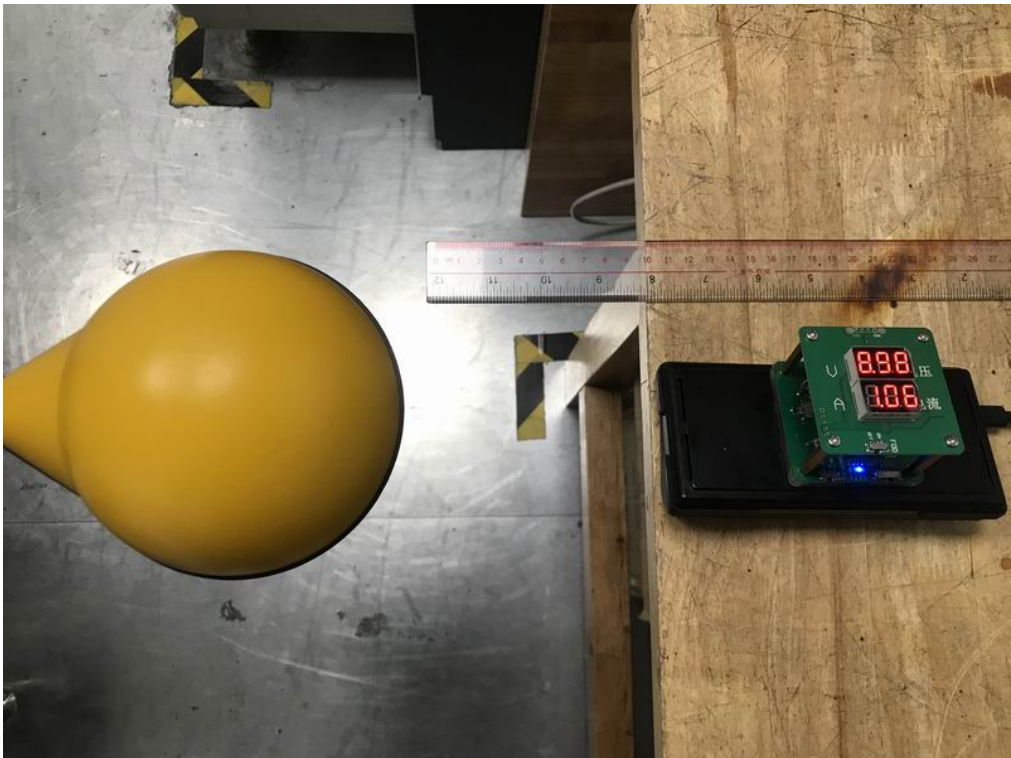

Position D

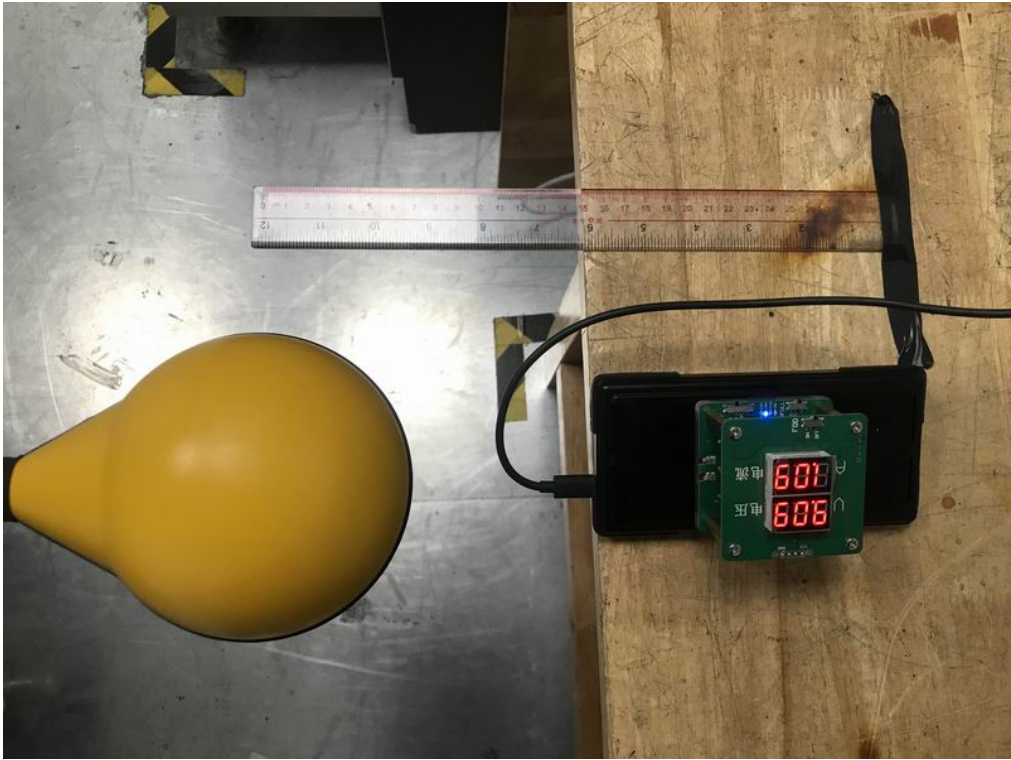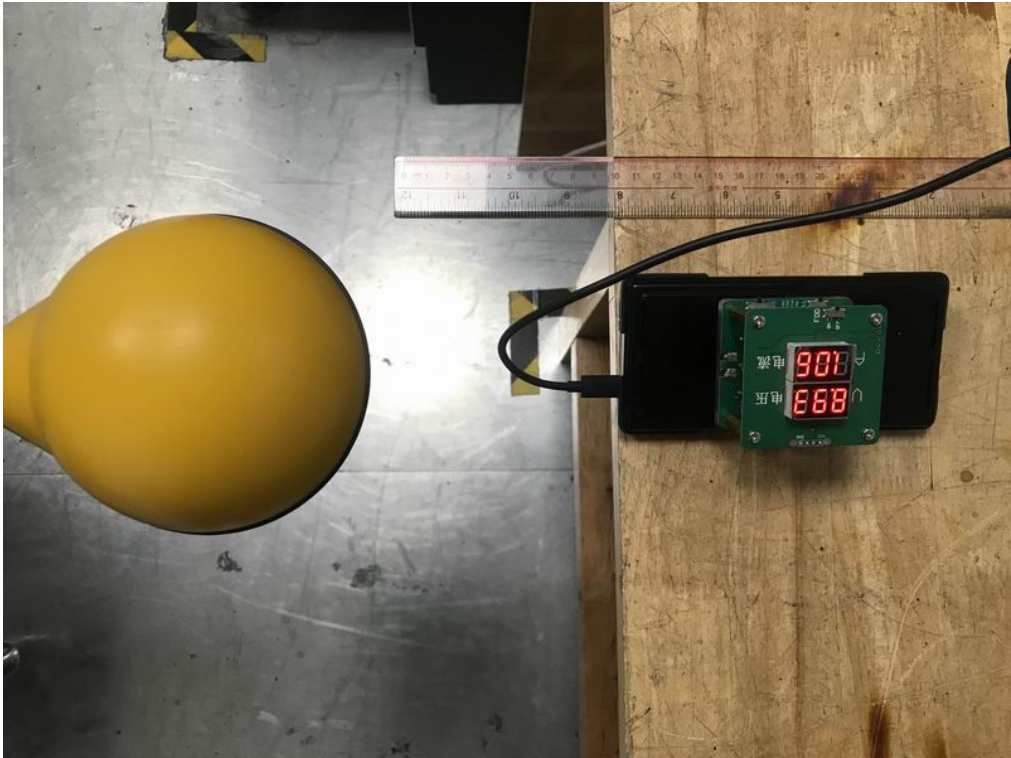

Position E

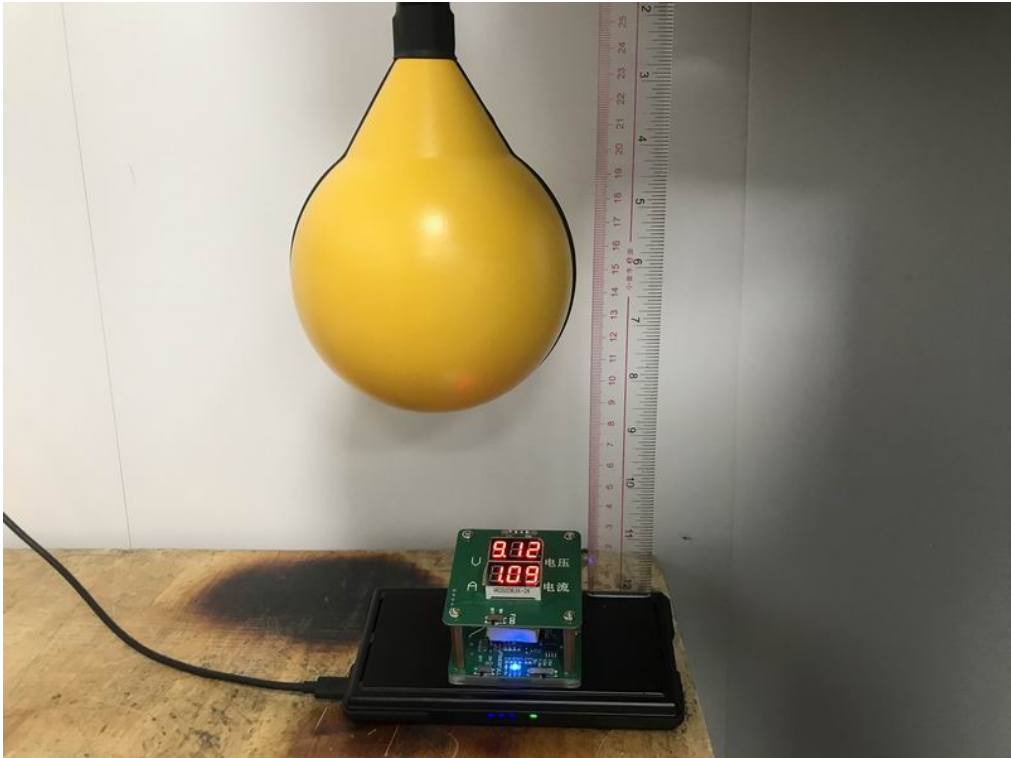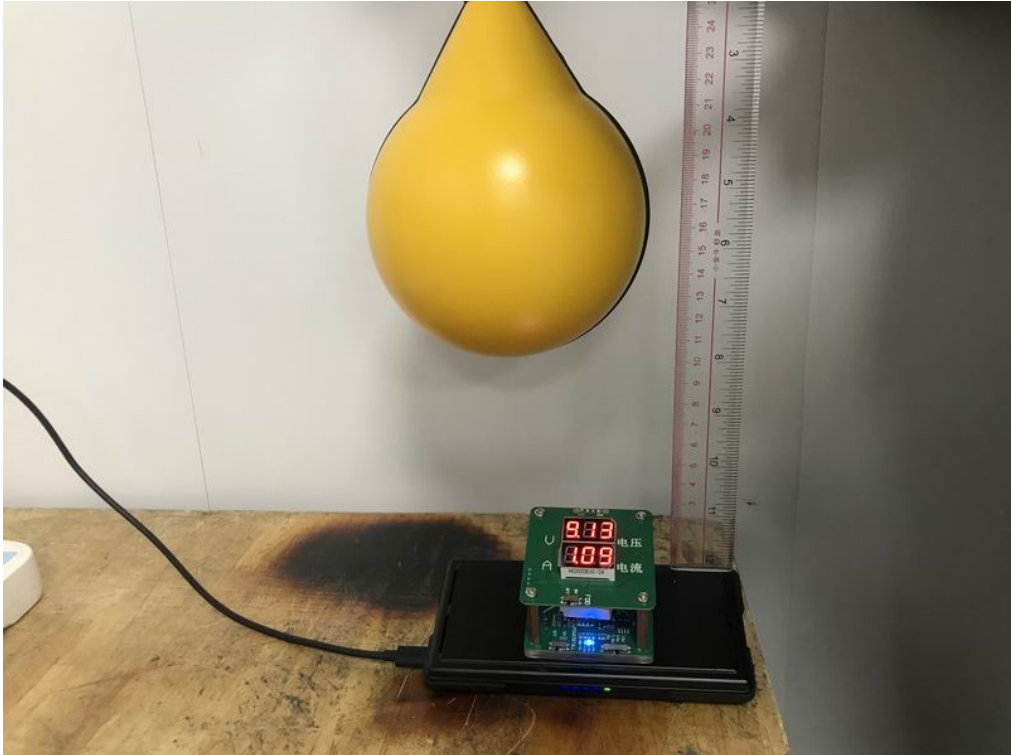

End of Test Report