

FCC Part 15C Test Report

FCC ID: 2ASXYLC-B41

Product Name:	Bluetooth headset
Trademark:	N/A
Model Name :	LC-B41 LC-B42, NB-12, NB-13, NB-14, NB-B41
Prepared For : Address :	Shenzhen Link Dream Electronic Co.,Ltd Room408, 4th Fl, Unit B, Bldg B. Min'sheng Industry, Gao'feng Rd, Long'hua District, Shengzhen City, Guangdong Province, China
Prepared By : Address :	Shenzhen BCTC Testing Co., Ltd. BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Mar. 15, 2019 – Mar. 29, 2019
Date of Report :	Mar. 29, 2019
Report No.:	BCTC-FY190301078E

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Link Dream Electronic Co.,Ltd
Address : Room408, 4th Fl, Unit B, Bldg B.Min'sheng Industry,
Gao'feng Rd, Long'hua District, Shengzhen City,
Guangdong Province, China
Manufacture's Name..... : Shenzhen Link Dream Electronic Co.,Ltd
Address : Room408, 4th Fl, Unit B, Bldg B.Min'sheng Industry,
Gao'feng Rd, Long'hua District, Shengzhen City,
Guangdong Province, China
Product description
Product name : Bluetooth headset
Trademark : N/A
Model and/or type reference
..... : LC-B41
Standards : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Cai Fang Zhong

Cai Fang Zhong

Reviewer(Supervisor): Eric Yang

Eric Yang

Approved(Manager): Carson Zhang



Table of Contents

Test Report Declaration	Page
1. TEST SUMMARY	5
2. TEST FACILITY	6
3. MEASUREMENT UNCERTAINTY	6
4. GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF EUT	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	9
5. EQUIPMENTS LIST FOR ALL TEST ITEMS	10
6. CONDUCTED EMISSIONS	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED EMISSIONS	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test procedure	16
7.4 Test Result	18
7.5 RADIATED Band EMISSION MEASUREMENT	22
8. CONDUCTED EMISSION	24
8.1 Block Diagram Of Test Setup	24
8.2 Limit	24
8.3 Test procedure	24
8.4 Test Result	25
9. 20 DB BANDWIDTH	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. MAXIMUM PEAK OUTPUT POWER	40
10.1 Applied procedures / limit	40
10.2 TEST PROCEDURE	40
10.3 DEVIATION FROM STANDARD	40
10.4 TEST SETUP	40
10.4 TEST SETUP	40
10.5 EUT OPERATION CONDITIONS	40
10.6 Test Result	41
11. HOPPING CHANNEL SEPARATION	42
11.1 Block Diagram Of Test Setup	42

11.2	Limit	42
11.3	Test procedure	42
11.4	Test Result	43
12.	NUMBER OF HOPPING FREQUENCY	48
12.1	Block Diagram Of Test Setup	48
12.2	Limit	48
12.3	Test procedure	48
12.4	Test Result	49
13.	DWELL TIME	51
13.1	Block Diagram Of Test Setup	51
13.2	Limit	51
13.3	Test procedure	51
13.4	Test Result	52
14.	ANTENNA REQUIREMENT	58
14.1	STANDARD REQUIREMENT	58
14.2	EUT ANTENNA	58
15.	EUT TEST SETUP PHOTOGRAPHS	59
16.	EUT PHOTOGRAPHS	62

(Note: N/A means not applicable)

1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.205(a) 15.209 15.247(d)	Radiated Spurious Emissions	PASS	
15.247(d)	Conducted Spurious emissions	PASS	
15.247(d) 15.205(a)	Band edge	PASS	
15.207	Conducted Emission	PASS	
15.247(a)	20dB Bandwidth	PASS	
15.247(b)	Maximum Peak Output Power	PASS	
15.247(a)	Frequency Separation	PASS	
15.247(a)	Number of Hopping Frequency	PASS	
15.247(a)	Dwell time	PASS	
15.203	Antenna Requirement	PASS	
Note: (1) "N/A" denotes test is not applicable in this Test Report			

2. TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

Test Firm Registration Number: 712850

IC Registered No.: 23583

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

4. GENERAL INFORMATION


4.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth headset									
Trade Name	N/A									
Model Name	LC-B41 LC-B42, NB-12, NB-13, NB-14, NB-B41									
Model Difference	All the model are the same circuit and RF module, except model names.									
Product Description	<table><tr><td>Operation Frequency:</td><td>2402-2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK, Pi/4DQPSK, 8DPSK</td></tr><tr><td>Number Of Channel</td><td>79CH</td></tr><tr><td>Antenna Designation:</td><td>PCB antenna, 0dBi</td></tr></table>		Operation Frequency:	2402-2480 MHz	Modulation Type:	GFSK, Pi/4DQPSK, 8DPSK	Number Of Channel	79CH	Antenna Designation:	PCB antenna, 0dBi
	Operation Frequency:	2402-2480 MHz								
	Modulation Type:	GFSK, Pi/4DQPSK, 8DPSK								
	Number Of Channel	79CH								
	Antenna Designation:	PCB antenna, 0dBi								
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.										
Channel List	Please refer to the Note 2.									
Ratings	DC 3.7V									
Connecting I/O Port(s)	Please refer to the User's Manual									

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP Photographs for the actual

Conducted Emission /Radiated Spurious Emission



4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth headset	N/A	LC-B41	N/A	EUT
E-2	Adapter	N/A	BCTC001	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

The EUT is Continue Transmitting.

The software is installed in operation system, named "RFTestTool.apk", Version 1.0.

Test Mode	Test mode	Low channel	Middle channel	High channel
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz
2	Transmitting(Pi/4DQPSK)	2402MHz	2441MHz	2480MHz
3	Transmitting(8DPSK)	2402MHz	2441MHz	2480MHz
4	Transmitting (conducted emission and Radiated emission)			

5. EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESRP	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	2018.06.23	2019.06.22
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	822	2018.08.06	2019.08.06
6	Amplifier (9KHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	2018.06.20	2019.06.20
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	2018.06.20	2019.06.20
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-H G	2034381	2018.08.06	2019.08.06
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	2018.06.23	2019.06.23
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	2019.03.27	2020.03.27
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	2018.06.19	2019.06.19
13	Power Metter	Keysight	E4419	\	2018.04.15	2019.04.15
14	Power Sensor (AV)	Keysight	E9300A	\	2018.04.15	2019.04.15
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.07.11	2019.07.11
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100550	2018.06.13	2019.06.12
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

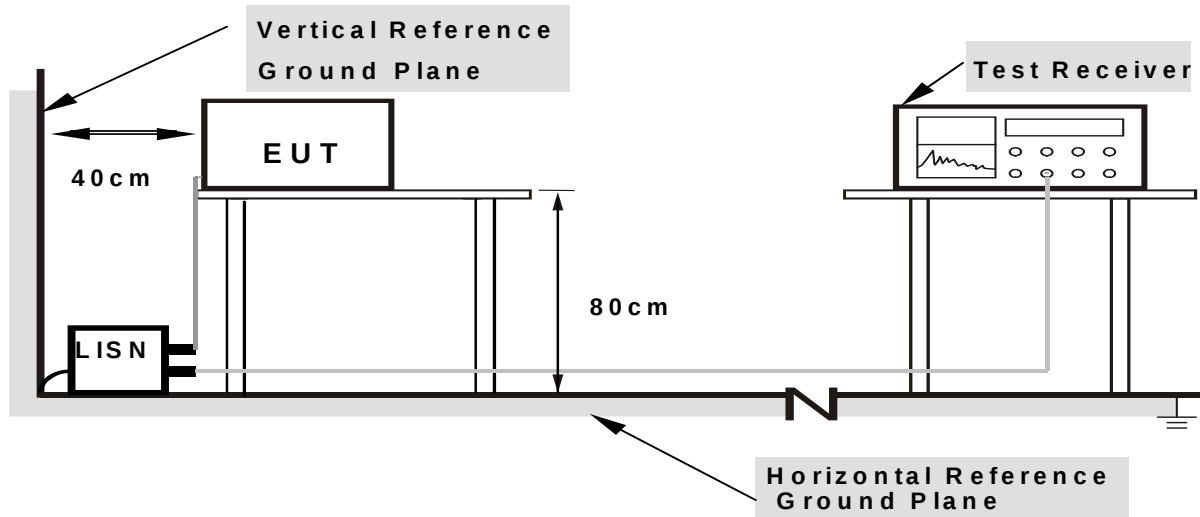

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

6.3 Test procedure


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

6.4 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	DC 5V from adapter	Test Mode :	Mode 4

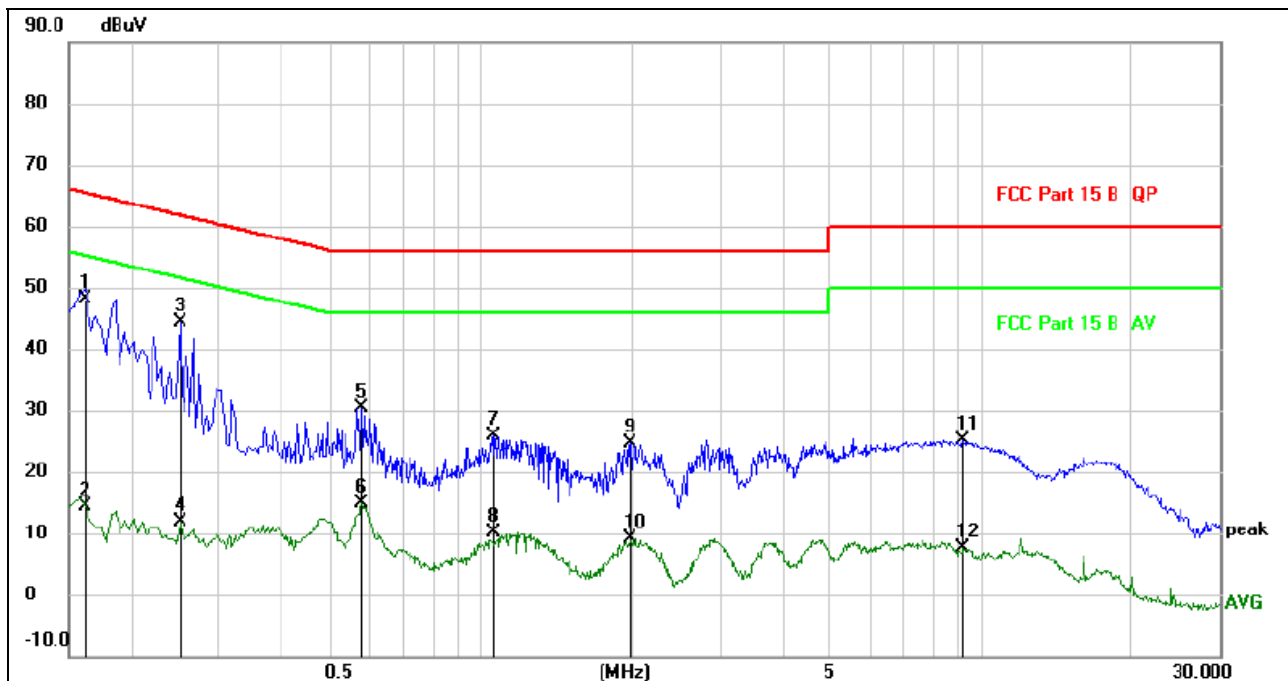


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1620	38.72	9.51	48.23	65.36	-17.13	QP	
2		0.1620	4.79	9.51	14.30	55.36	-41.06	AVG	
3		0.2500	34.81	9.52	44.33	61.76	-17.43	QP	
4		0.2500	2.26	9.52	11.78	51.76	-39.98	AVG	
5		0.5780	20.52	9.91	30.43	56.00	-25.57	QP	
6		0.5780	4.98	9.91	14.89	46.00	-31.11	AVG	
7		1.0620	16.39	9.57	25.96	56.00	-30.04	QP	
8		1.0620	0.45	9.57	10.02	46.00	-35.98	AVG	
9		1.9900	15.06	9.59	24.65	56.00	-31.35	QP	
10		1.9900	-0.45	9.59	9.14	46.00	-36.86	AVG	
11		9.1700	15.35	9.70	25.05	60.00	-34.95	QP	
12		9.1700	-2.01	9.70	7.69	50.00	-42.31	AVG	

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	DC 5V from adapter	Test Mode :	Mode 4

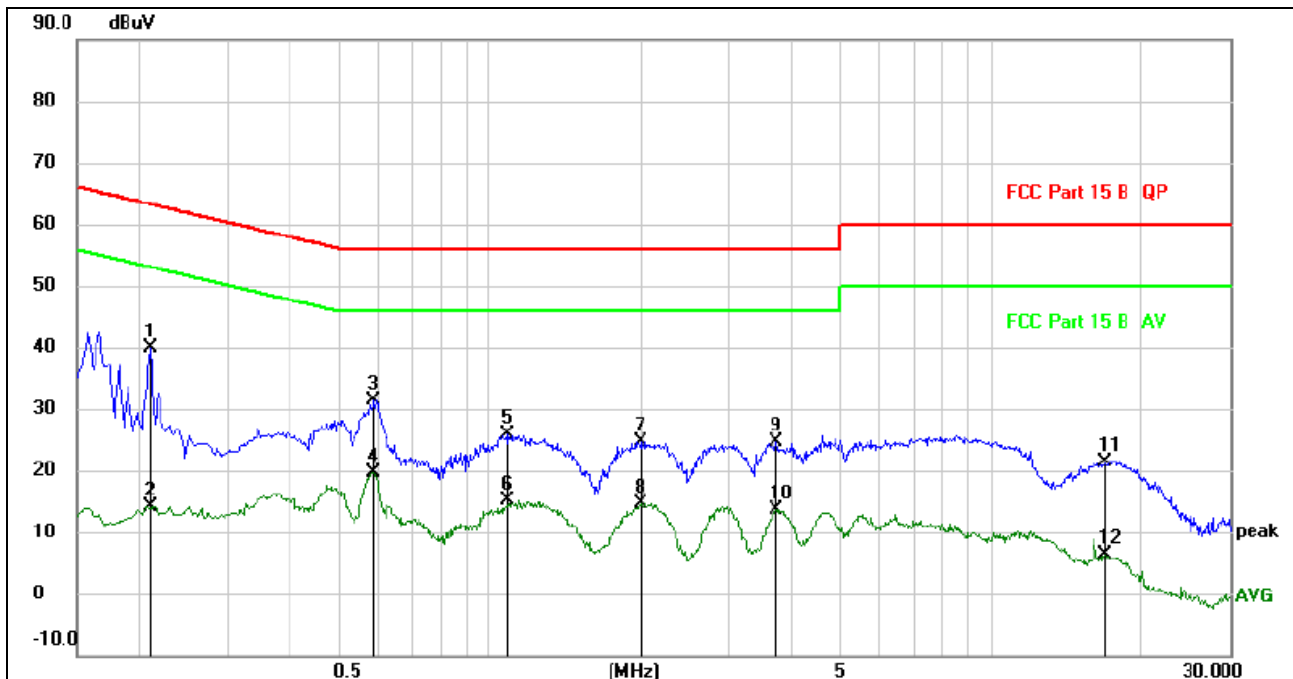

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.2100	30.47	9.47	39.94	63.21	-23.27	QP	
2		0.2100	4.75	9.47	14.22	53.21	-38.99	AVG	
3		0.5860	21.40	9.94	31.34	56.00	-24.66	QP	
4		0.5860	9.61	9.94	19.55	46.00	-26.45	AVG	
5		1.0820	16.19	9.57	25.76	56.00	-30.24	QP	
6		1.0820	5.65	9.57	15.22	46.00	-30.78	AVG	
7		2.0059	15.04	9.59	24.63	56.00	-31.37	QP	
8		2.0059	5.08	9.59	14.67	46.00	-31.33	AVG	
9		3.7220	15.04	9.71	24.75	56.00	-31.25	QP	
10		3.7220	3.97	9.71	13.68	46.00	-32.32	AVG	
11		16.9140	11.77	9.73	21.50	60.00	-38.50	QP	
12		16.9140	-3.31	9.73	6.42	50.00	-43.58	AVG	


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

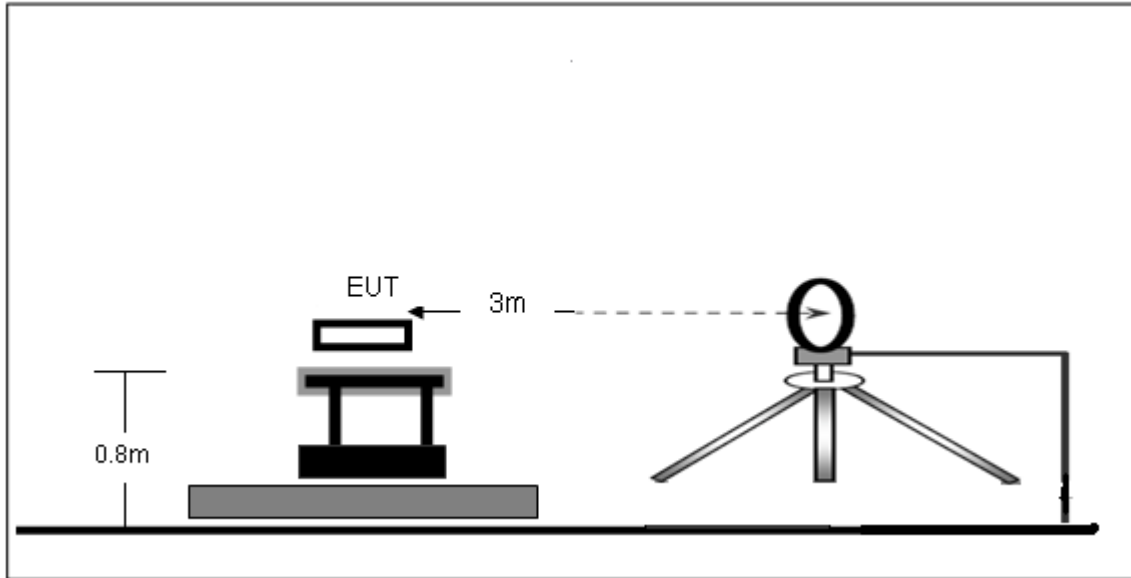

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

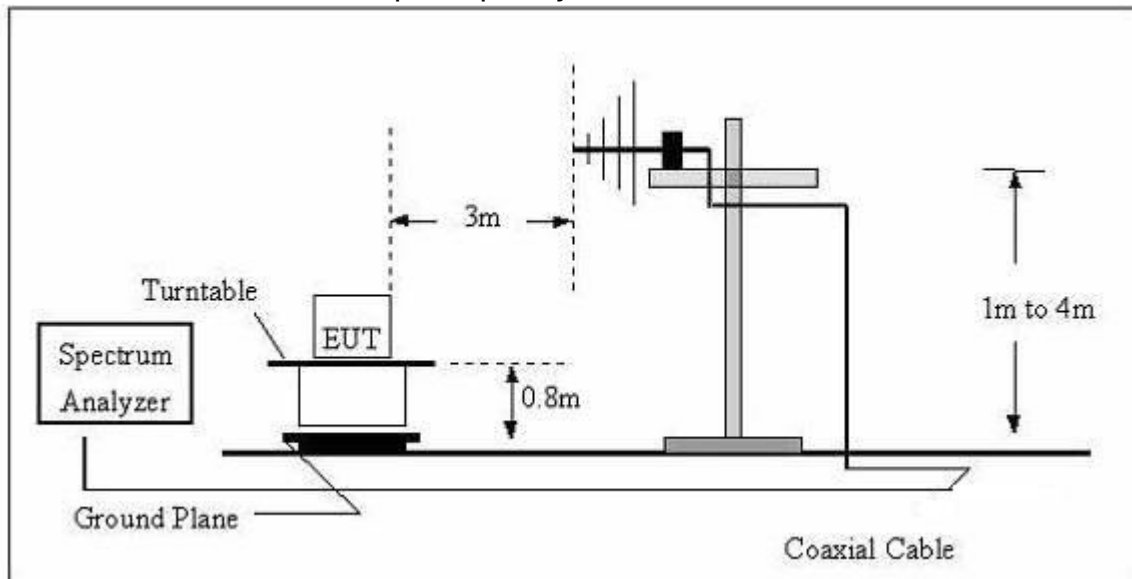

(C) Radiated Emission Test-Up Frequency Above 1GHz

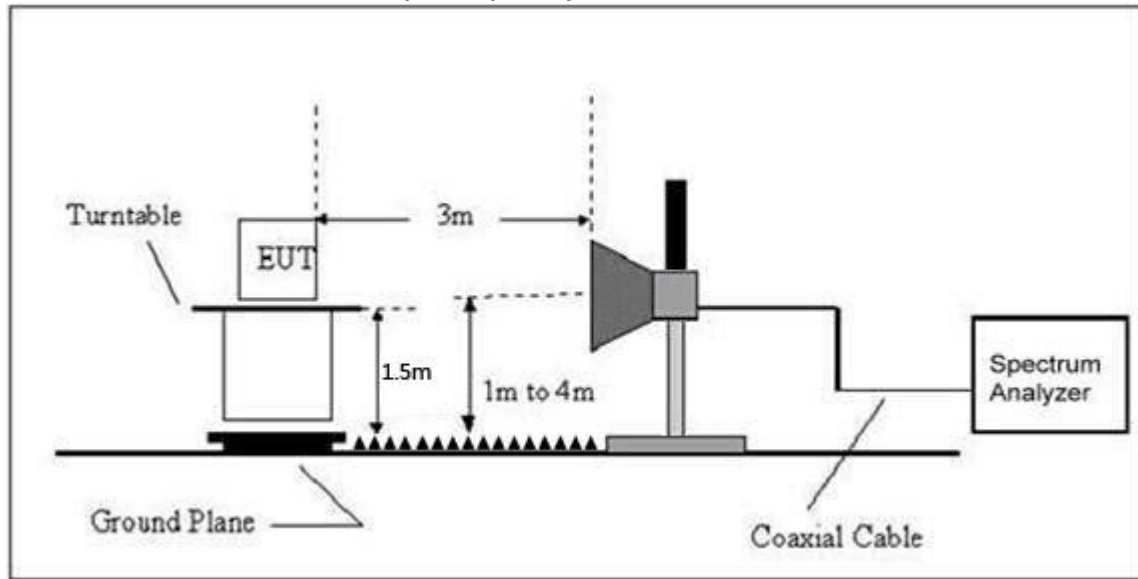

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 Test Result

Below 30MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	Horizontal

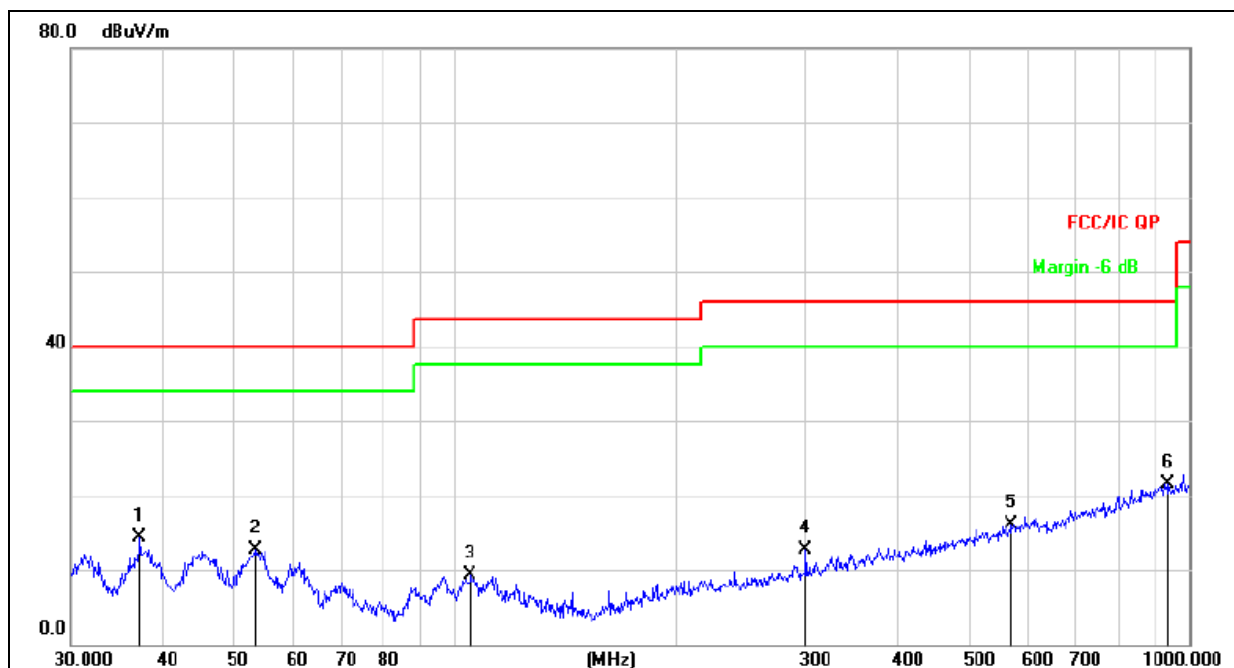


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.1550	30.28	-15.94	14.34	40.00	-25.66	QP
2		53.5052	27.84	-15.22	12.62	40.00	-27.38	QP
3		104.9033	25.88	-16.60	9.28	43.50	-34.22	QP
4		300.3672	26.29	-13.59	12.70	46.00	-33.30	QP
5		572.6144	23.29	-7.16	16.13	46.00	-29.87	QP
6	*	932.2715	22.73	-1.25	21.48	46.00	-24.52	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	Vertical

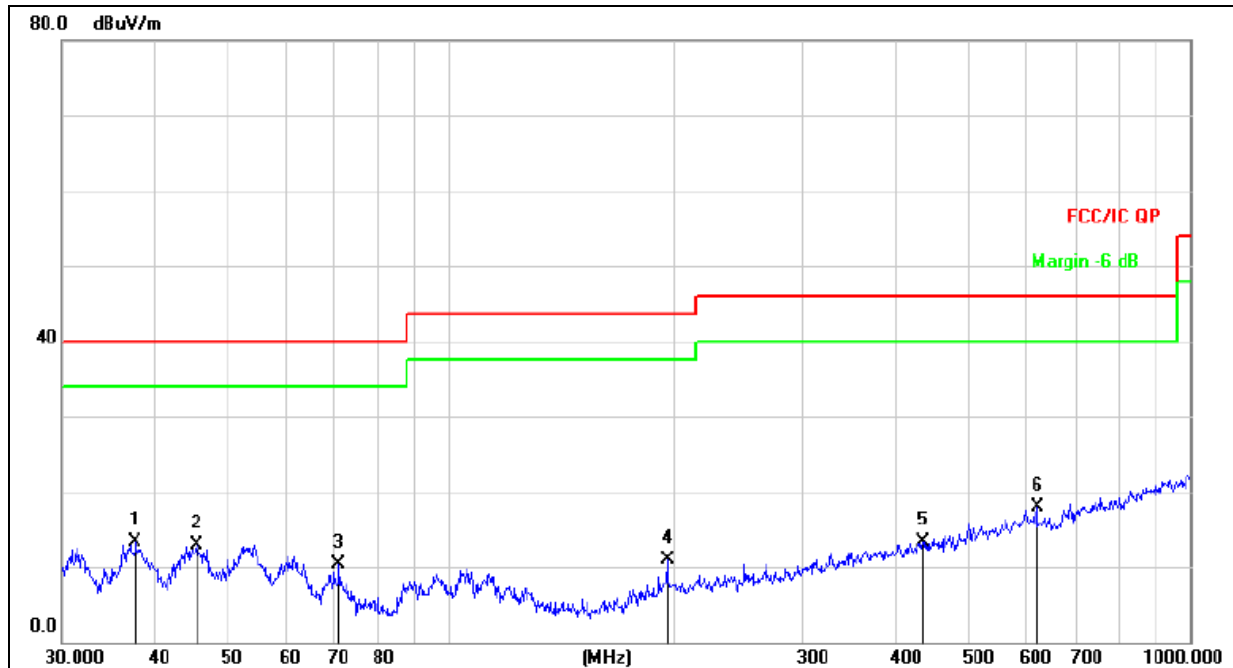

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	37.6798	29.19	-15.84	13.35	40.00	-26.65	QP
2		45.5348	28.06	-15.10	12.96	40.00	-27.04	QP
3		70.8315	28.73	-18.37	10.36	40.00	-29.64	QP
4		196.5098	27.52	-16.52	11.00	43.50	-32.50	QP
5		435.5898	23.60	-10.29	13.31	46.00	-32.69	QP
6		620.7096	24.64	-6.64	18.00	46.00	-28.00	QP

Between 1-25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
GFSK Low Channel:2402MHz									
V	4804.00	51.80	39.55	7.77	25.66	45.68	74.00	-28.32	PK
V	4804.00	43.24	39.55	7.77	25.66	37.12	54.00	-16.88	AV
V	7206.00	50.76	38.33	7.3	24.55	44.28	74.00	-29.72	PK
V	7206.00	43.41	38.33	7.3	24.55	36.93	54.00	-17.07	AV
V	15450.00	53.85	35.23	6.6	26.59	51.81	74.00	-22.19	PK
H	4804.00	54.34	39.55	7.77	25.66	48.22	74.00	-25.78	PK
H	4804.00	43.48	39.55	7.77	25.66	37.36	54.00	-16.64	AV
H	7206.00	53.85	38.33	7.3	23.55	46.37	74.00	-27.63	PK
H	7206.00	43.05	38.33	7.3	23.22	35.24	54.00	-18.76	AV
H	15450.00	54.05	35.45	6.6	27.88	53.08	74.00	-20.92	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
GFSK Middle Channel:2441MHz									
V	4882.00	51.96	38.89	7.57	25.45	46.09	74.00	-27.91	PK
V	4882.00	43.44	38.89	7.57	25.45	37.57	54.00	-16.43	AV
V	7323.00	52.38	38.78	7.35	24.78	45.73	74.00	-28.27	PK
V	7323.00	43.01	38.78	7.35	24.78	36.36	54.00	-17.64	AV
V	15450.00	54.62	35.89	6.42	26.47	51.62	74.00	-22.38	PK
H	4882.00	52.00	38.89	7.57	25.45	46.13	74.00	-27.87	PK
H	4882.00	43.88	38.89	7.57	25.45	38.01	54.00	-15.99	AV
H	7323.00	53.48	38.78	7.35	24.78	46.83	74.00	-27.17	PK
H	7323.00	43.64	38.78	7.35	24.78	36.99	54.00	-17.01	AV
H	15450.00	52.63	36.68	6.42	26.65	49.02	74.00	-24.98	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
GFSK High Channel:2480MHz									
V	4960.00	53.26	38.75	7.38	25.45	47.34	74.00	-26.66	PK
V	4960.00	43.62	38.75	7.38	25.45	37.70	54.00	-16.30	AV
V	7440.00	50.66	38.65	7.15	24.78	43.94	74.00	-30.06	PK
V	7440.00	43.90	38.65	7.15	24.78	37.18	54.00	-16.82	AV
V	15450.00	52.49	35.58	6.25	26.47	49.63	74.00	-24.37	PK
H	4960.00	54.00	38.75	7.38	25.45	48.08	74.00	-25.92	PK
H	4960.00	43.95	38.75	7.38	25.45	38.03	54.00	-15.97	AV
H	7440.00	50.13	38.65	7.15	24.78	43.41	74.00	-30.59	PK
H	7440.00	43.33	38.65	7.15	24.78	36.61	54.00	-17.39	AV
H	15450.00	54.13	36.42	6.25	26.65	50.61	74.00	-23.39	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the Modulation are test, the worst mode is GFSK, the data recording in the report.

7.5 RADIATED Band EMISSION MEASUREMENT

Test Requirement:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
GFSK	Low Channel 2402MHz									
	H	2390.00	58.09	38.06	7.42	20.15	47.60	74.00	54.00	PASS
	H	2400.00	51.22	38.06	7.42	20.15	40.73	74.00	54.00	PASS
	V	2390.00	58.66	38.06	7.42	20.15	48.17	74.00	54.00	PASS
	V	2400.00	50.93	38.06	7.42	20.15	40.44	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	56.77	38.17	7.45	20.54	46.59	74.00	54.00	PASS
	H	2485.50	54.74	38.17	7.45	20.54	44.56	74.00	54.00	PASS
	V	2483.50	59.99	38.2	7.45	20.54	49.78	74.00	54.00	PASS
	V	2485.50	50.88	38.2	7.45	20.54	40.67	74.00	54.00	PASS
Pi/4DQPSK	Low Channel 2402MHz									
	H	2390.00	60.05	38.06	7.42	20.15	49.56	74.00	54.00	PASS
	H	2400.00	53.74	38.06	7.42	20.15	43.25	74.00	54.00	PASS
	V	2390.00	61.04	38.06	7.42	20.15	50.55	74.00	54.00	PASS
	V	2400.00	53.16	38.06	7.42	20.15	42.67	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	58.49	38.17	7.45	20.54	48.31	74.00	54.00	PASS
	H	2485.50	53.33	38.17	7.45	20.54	43.15	74.00	54.00	PASS
	V	2483.50	61.14	38.2	7.45	20.54	50.93	74.00	54.00	PASS
	V	2485.50	51.10	38.2	7.45	20.54	40.89	74.00	54.00	PASS
8DPSK	Low Channel 2402MHz									
	H	2390.00	60.46	38.06	7.42	20.15	49.97	74.00	54.00	PASS
	H	2400.00	51.53	38.06	7.42	20.15	41.04	74.00	54.00	PASS
	V	2390.00	60.62	38.06	7.42	20.15	50.13	74.00	54.00	PASS
	V	2400.00	51.43	38.06	7.42	20.15	40.94	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	60.67	38.17	7.45	20.54	50.49	74.00	54.00	PASS
	H	2485.50	54.19	38.17	7.45	20.54	44.01	74.00	54.00	PASS
	V	2483.50	60.91	38.2	7.45	20.54	50.70	74.00	54.00	PASS
	V	2485.50	54.51	38.2	7.45	20.54	44.30	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										

8. CONDUCTED EMISSION

8.1 Block Diagram Of Test Setup

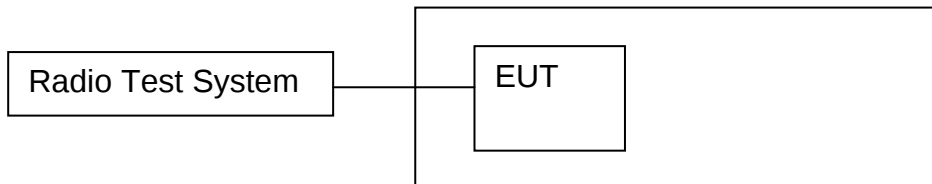

8.2 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result

GFSK


Low Channel 2402MHz

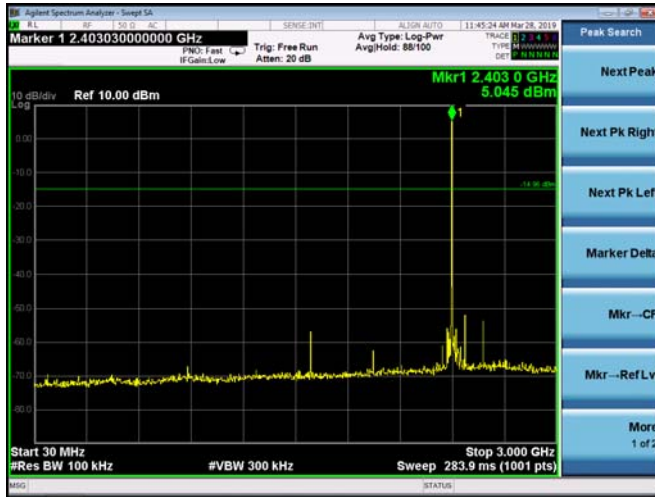

Middle Channel 2440MHz

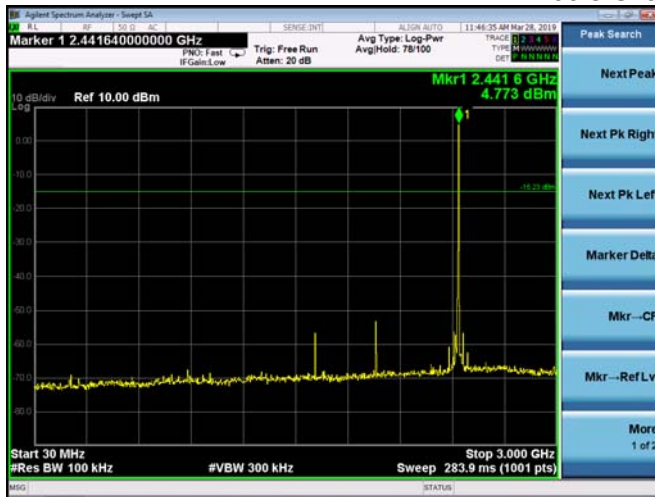


High Channel 2480MHz

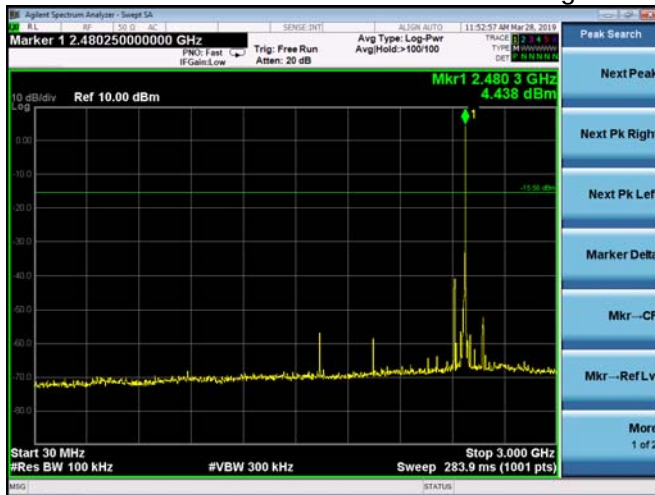


Pi/4 DQPSK


Low Channel 2402MHz

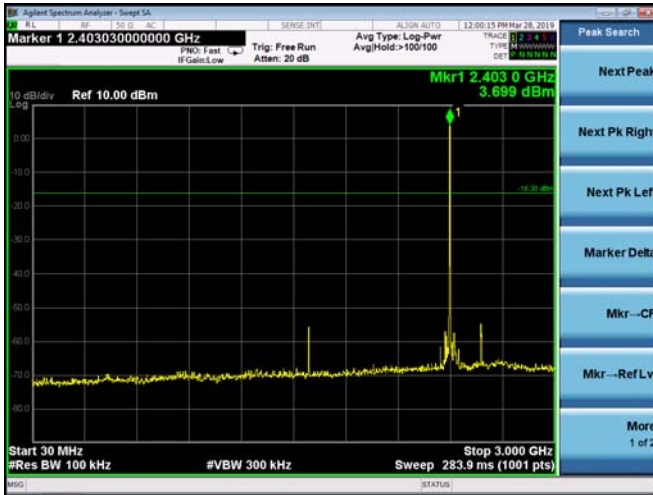

Middle Channel 2440MHz

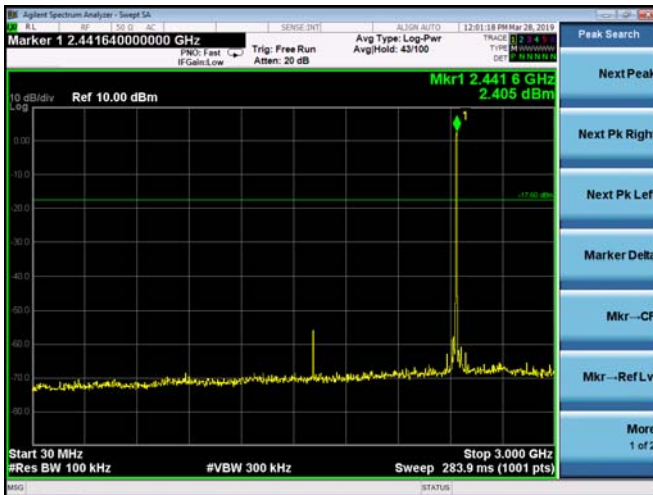


High Channel 2480MHz

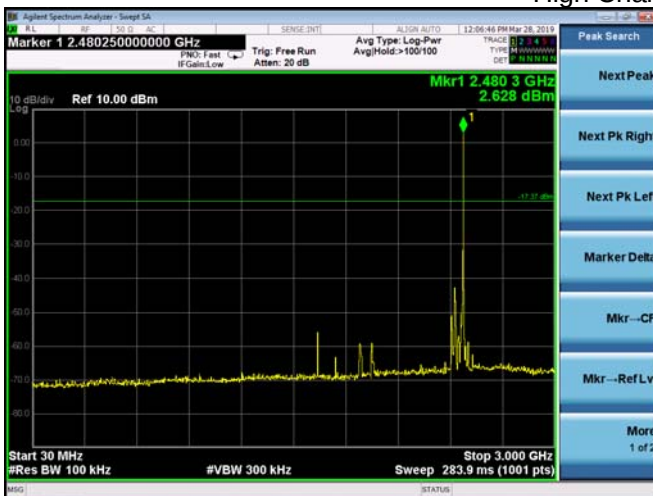

8DPSK


Low Channel 2402MHz

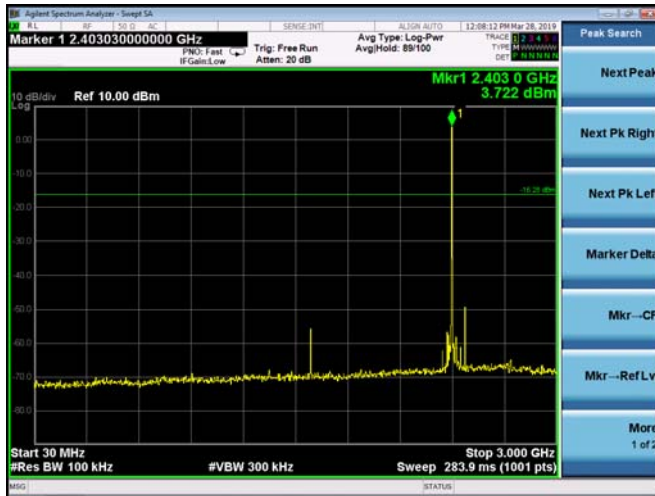


Middle Channel 2440MHz



High Channel 2480MHz

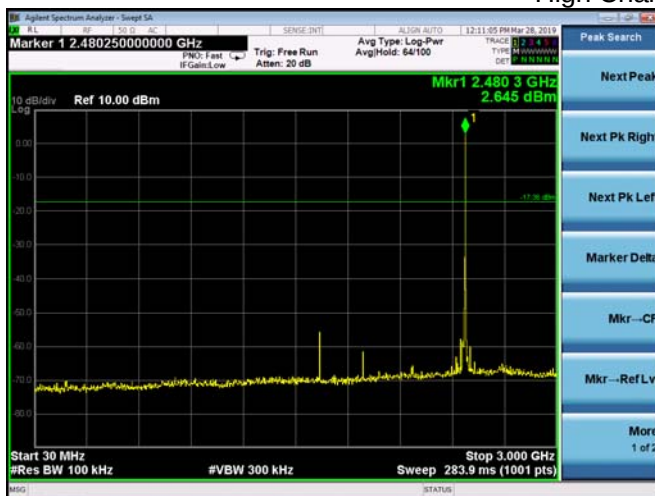


GFSK Transmitting Band edge-left side

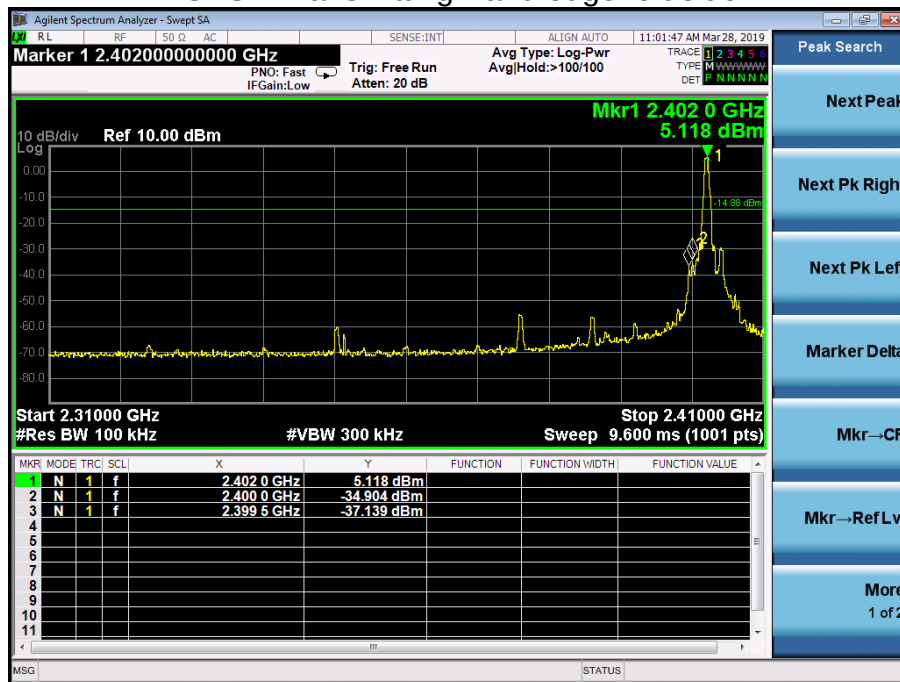


GFSK Transmitting Band edge-right side




GFSK Hopping Band edge-left side

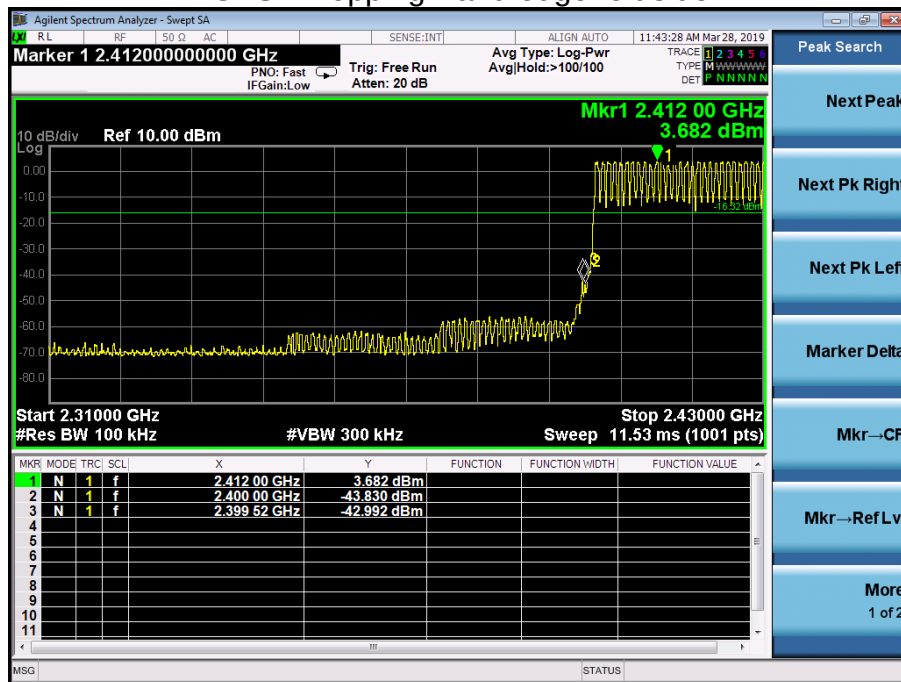

GFSK Hopping Band edge-right side

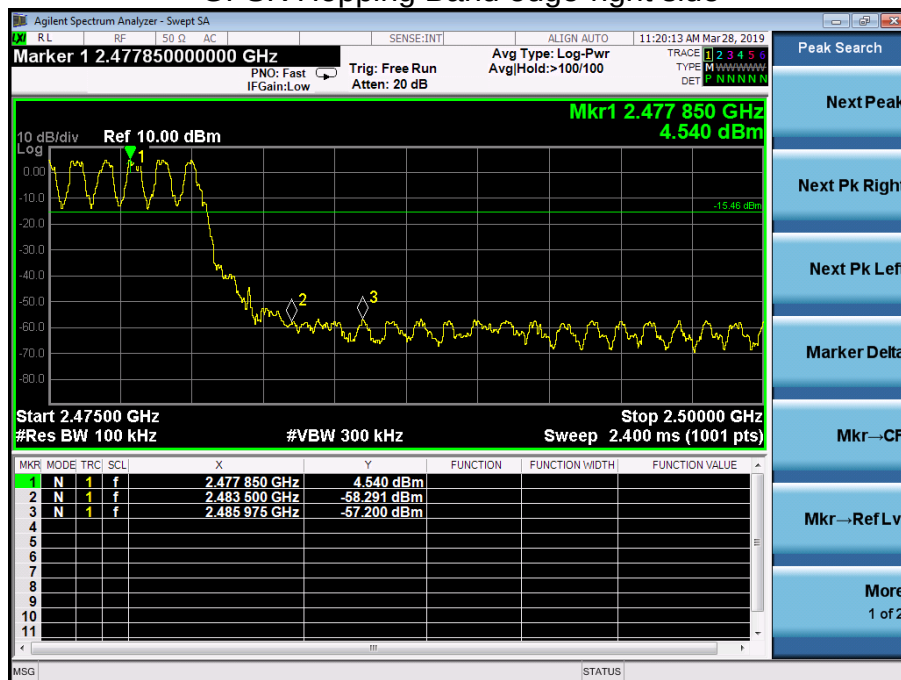


Pi/4 DQPSK Transmitting Band edge-left side

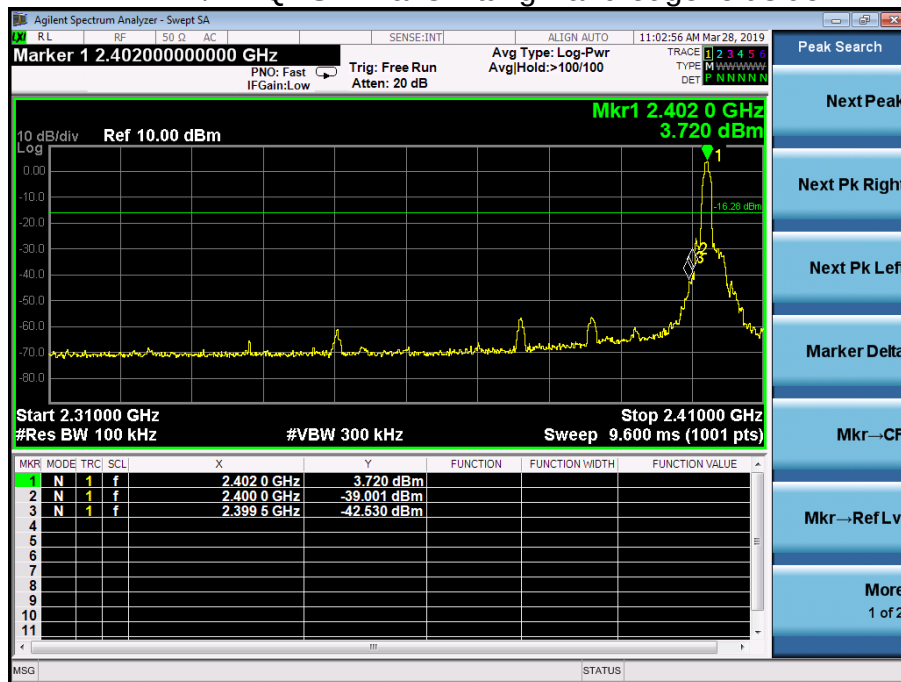


Pi/4 DQPSK Transmitting Band edge-right side




Pi/4 DQPSK Hopping Band edge-left side

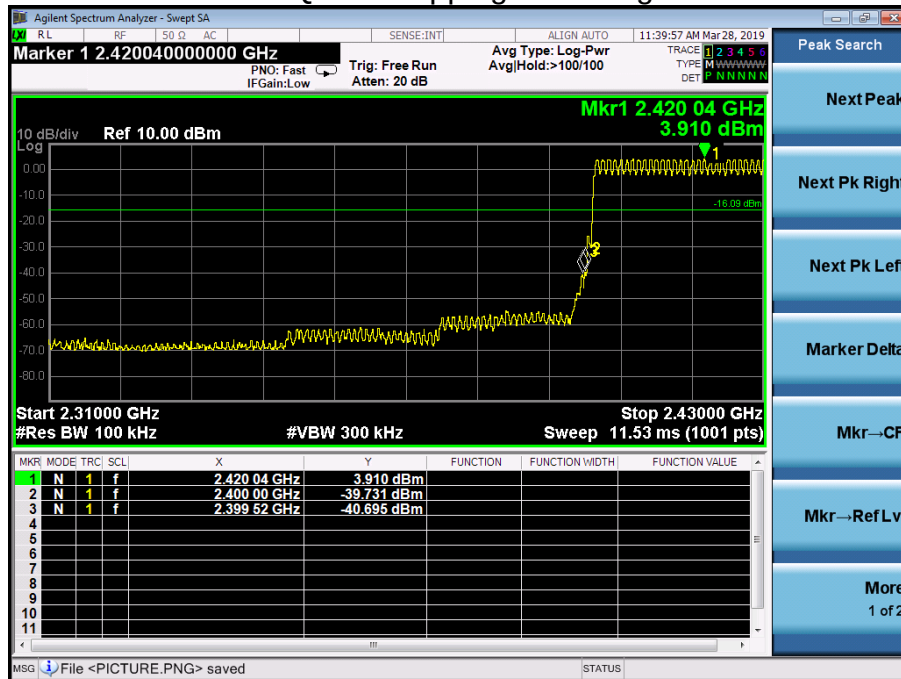

Pi/4 DQPSK Hopping Band edge-right side

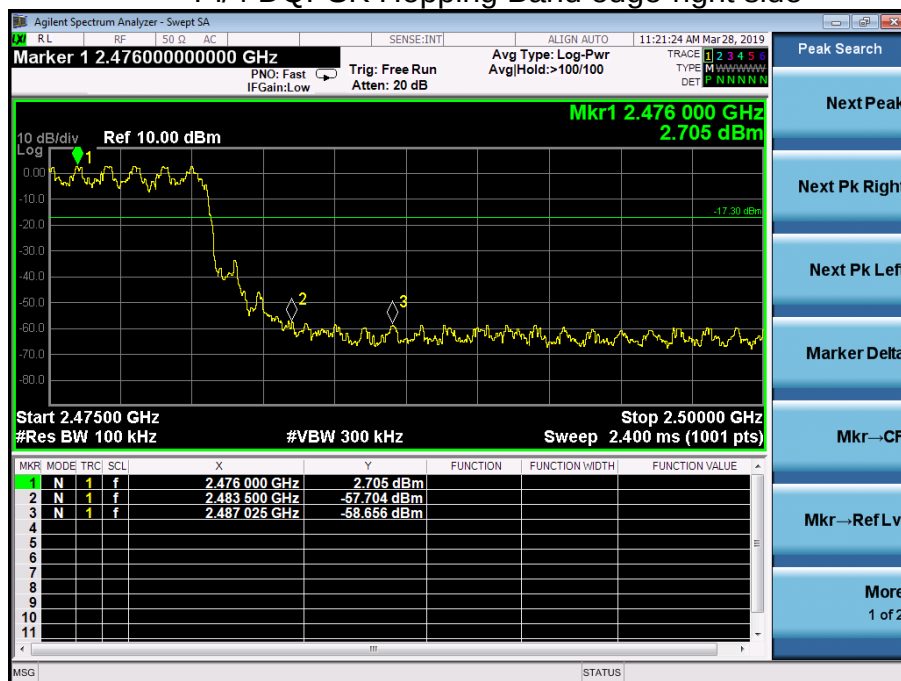


8DPSK Transmitting Band edge-left side

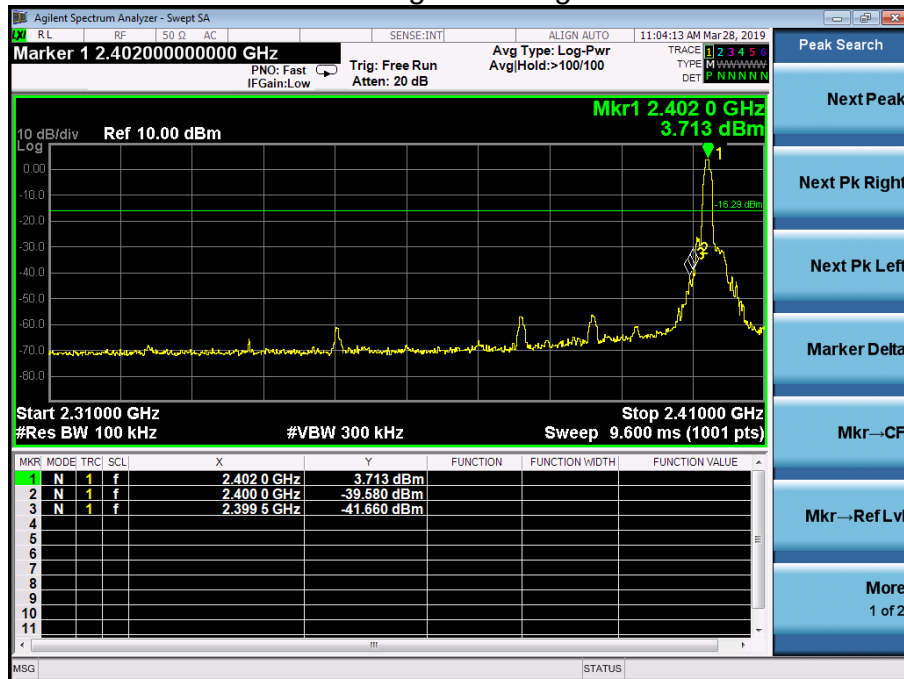


8DPSK Transmitting Band edge-right side



8DPSK Hopping Band edge-left side

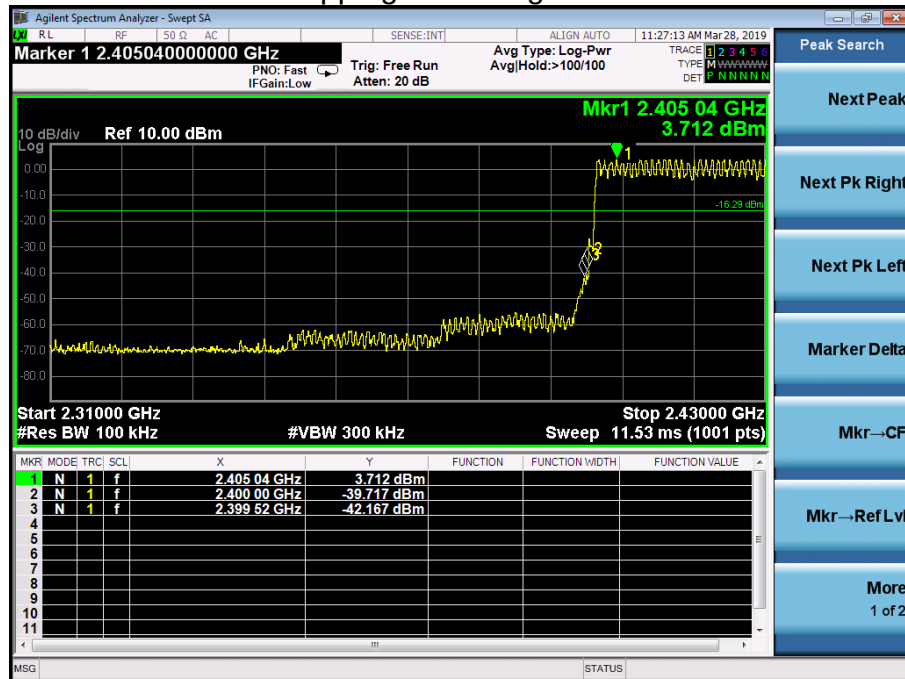


8DPSK Hopping Band edge-right side

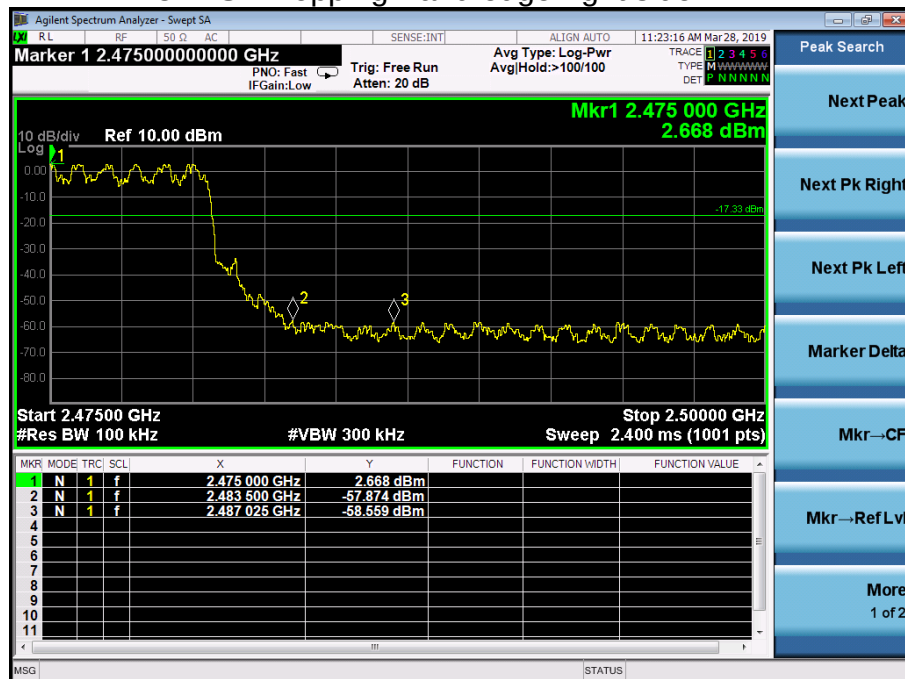

9. 20 DB BANDWIDTH

9.1 Block Diagram Of Test Setup

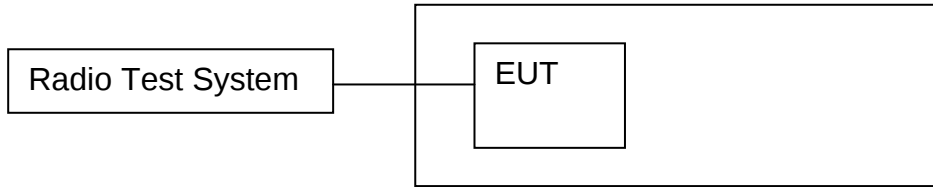

9.2 Limit

N/A


9.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.085
GFSK	Middle	1.077
GFSK	High	1.079
Pi/4 DQPSK	Low	1.381
Pi/4 DQPSK	Middle	1.374
Pi/4 DQPSK	High	1.361
8DPSK	Low	1.334
8DPSK	Middle	1.354
8DPSK	High	1.337

Test plots
GFSK Low Channel

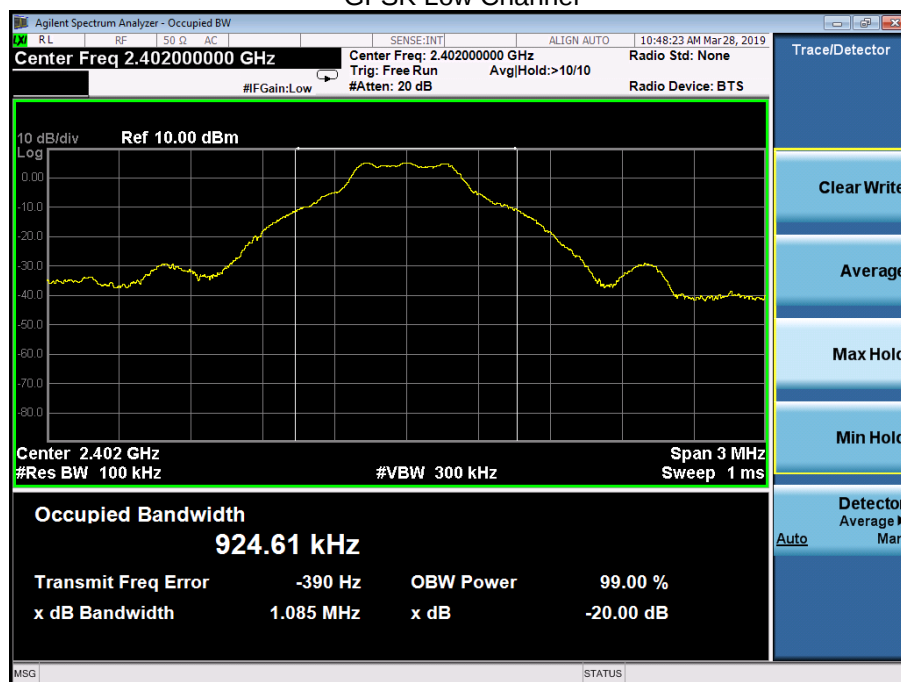





GFSK Middle Channel

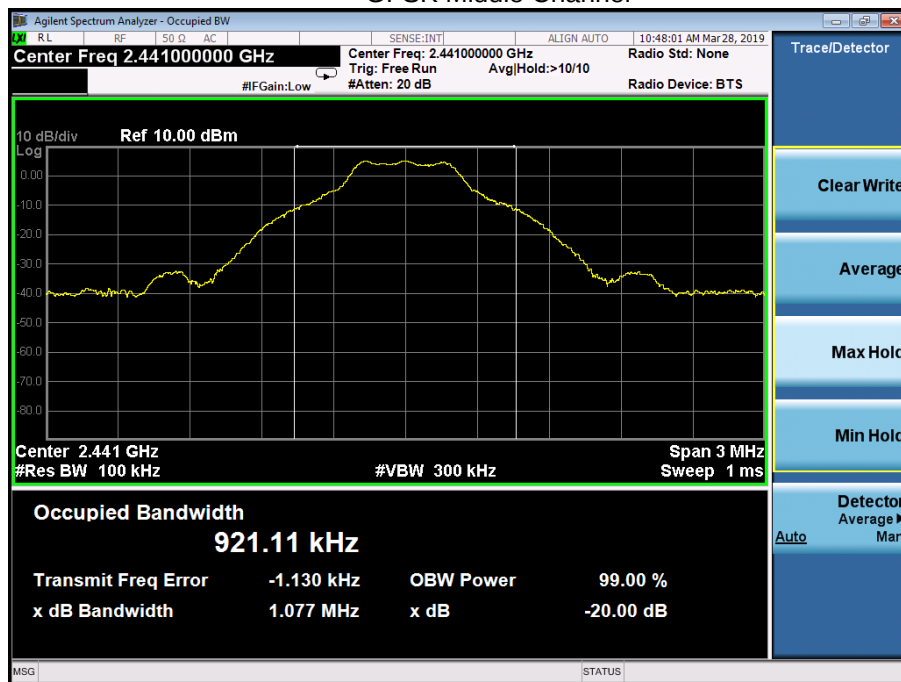


GFSK High Channel

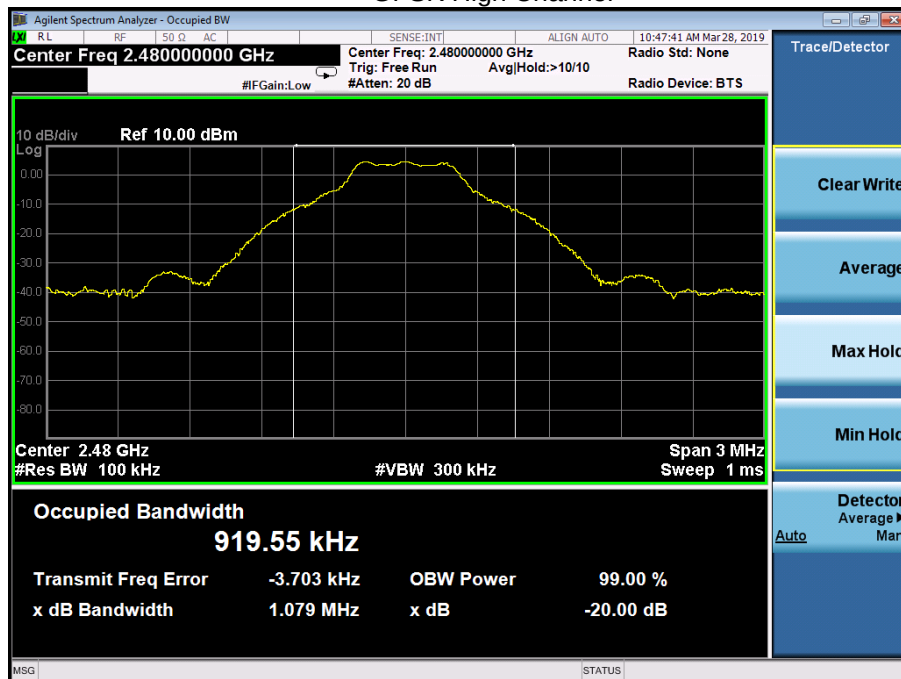

Pi/4 DQPSK Low Channel

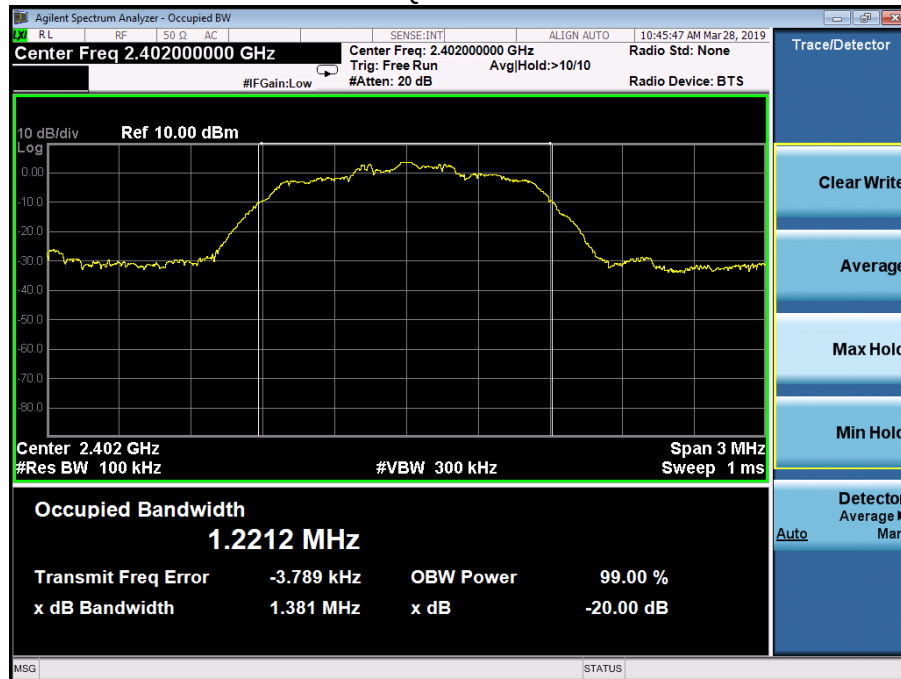


Pi/4 DQPSK Middle Channel

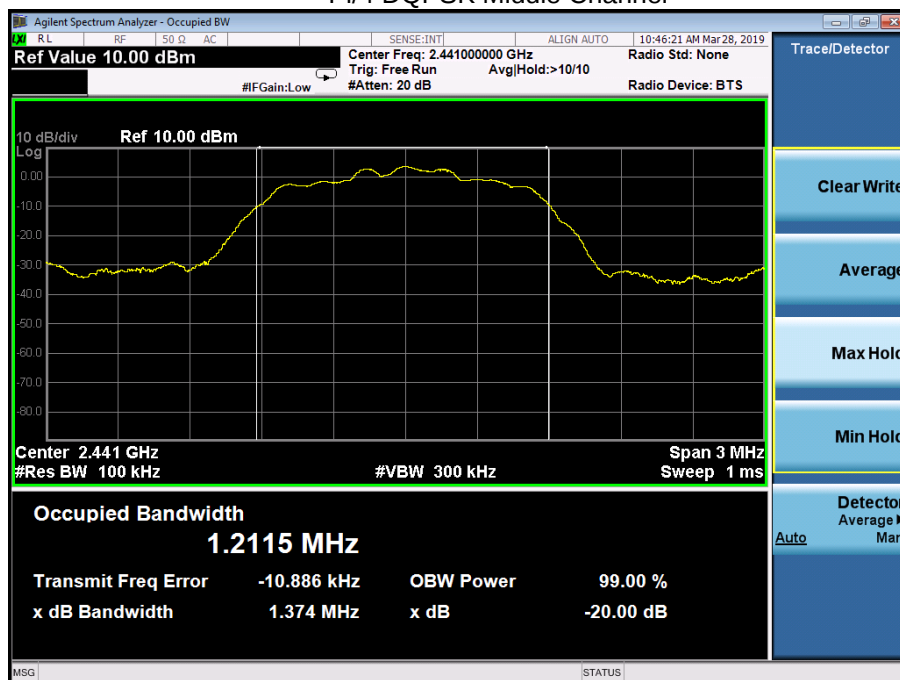




Pi/4 DQPSK High Channel

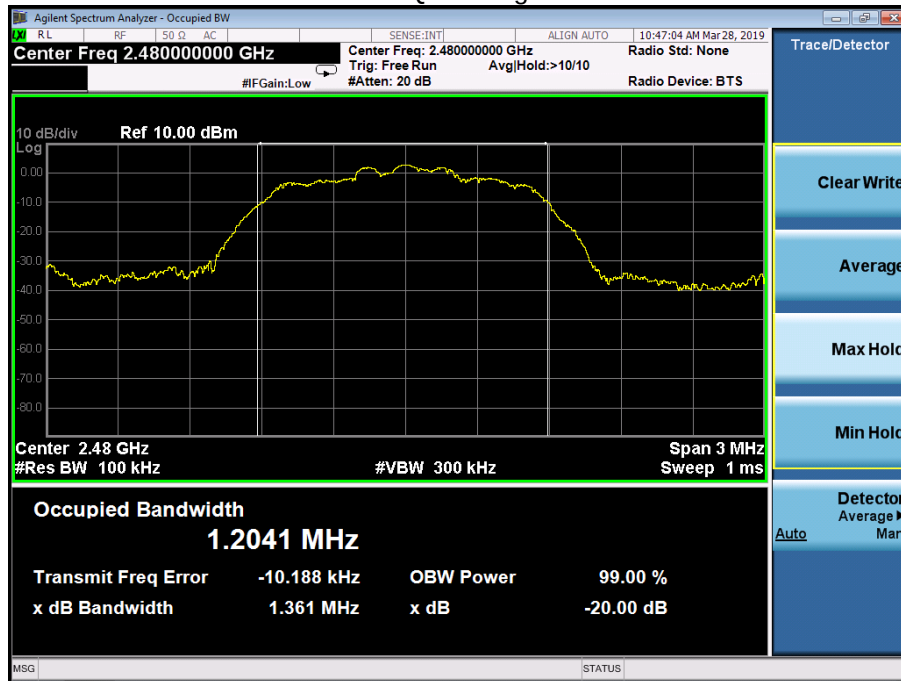


8DPSK Low Channel

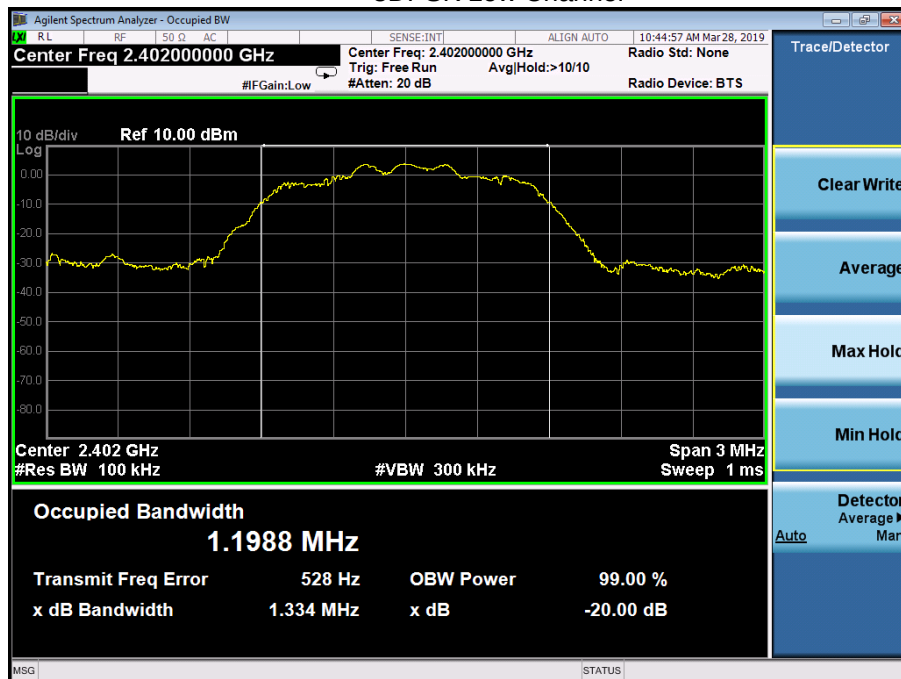




8DPSK Middle Channel

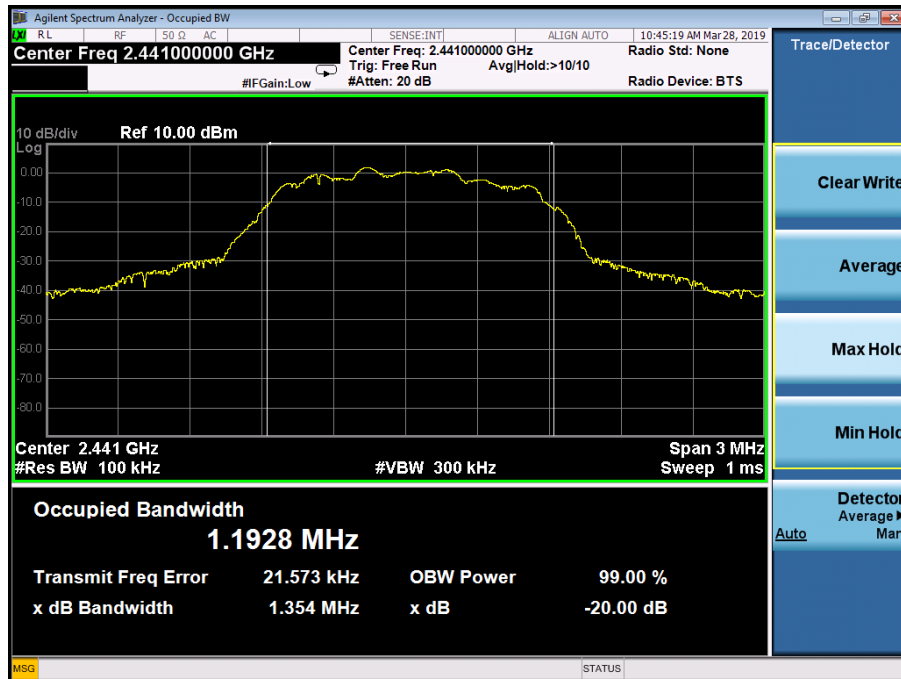

8DPSK High Channel

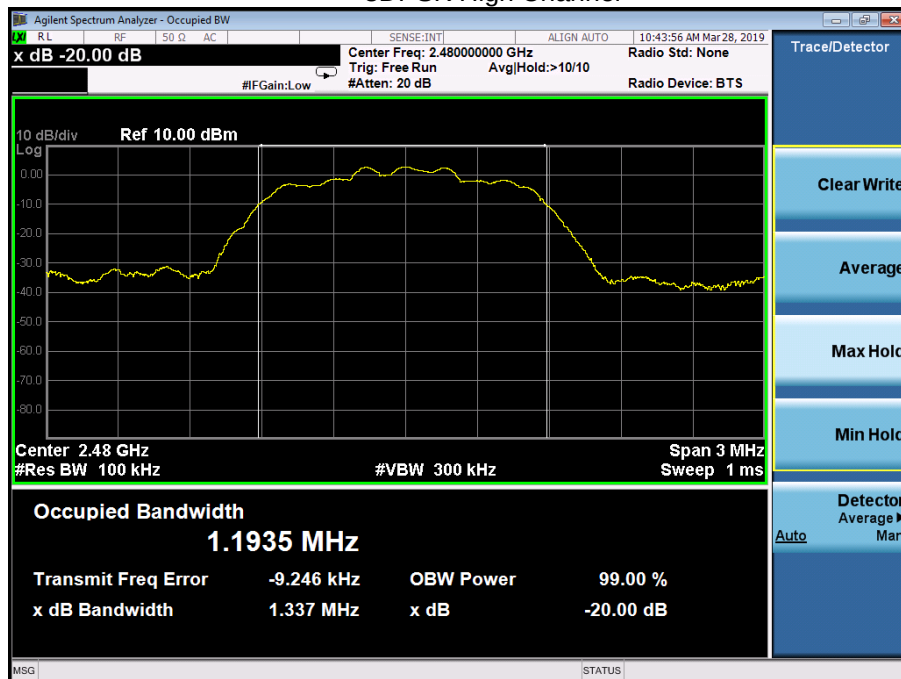

10. MAXIMUM PEAK OUTPUT POWER

10.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

10.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP



10.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

10.6 Test Result

Modulation	Test Channel	Output Power PK(dBm)	Limit (dBm)
GFSK	Low	4.28	21
GFSK	Middle	4.27	21
GFSK	High	3.80	21
Pi/4 DQPSK	Low	4.25	21
Pi/4 DQPSK	Middle	4.03	21
Pi/4 DQPSK	High	3.30	21
8DPSK	Low	4.49	21
8DPSK	Middle	4.31	21
8DPSK	High	3.65	21

11. HOPPING CHANNEL SEPARATION

11.1 Block Diagram Of Test Setup

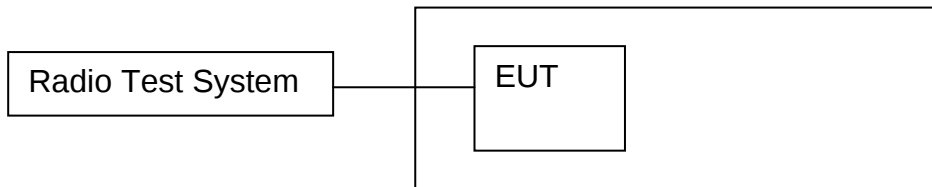

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.004	0.753	PASS
	Middle	0.990	0.755	PASS
	High	0.998	0.753	PASS
Pi/4DQPSK	Low	1.004	0.945	PASS
	Middle	1.008	0.941	PASS
	High	0.994	0.944	PASS
8DPSK	Low	1.010	0.929	PASS
	Middle	1.010	0.925	PASS
	High	1.000	0.927	PASS

Test plots
GFSK Low Channel



GFSK Middle Channel




GFSK High Channel



Pi/4 DQPSK Low Channel



Pi/4 DQPSK Middle Channel

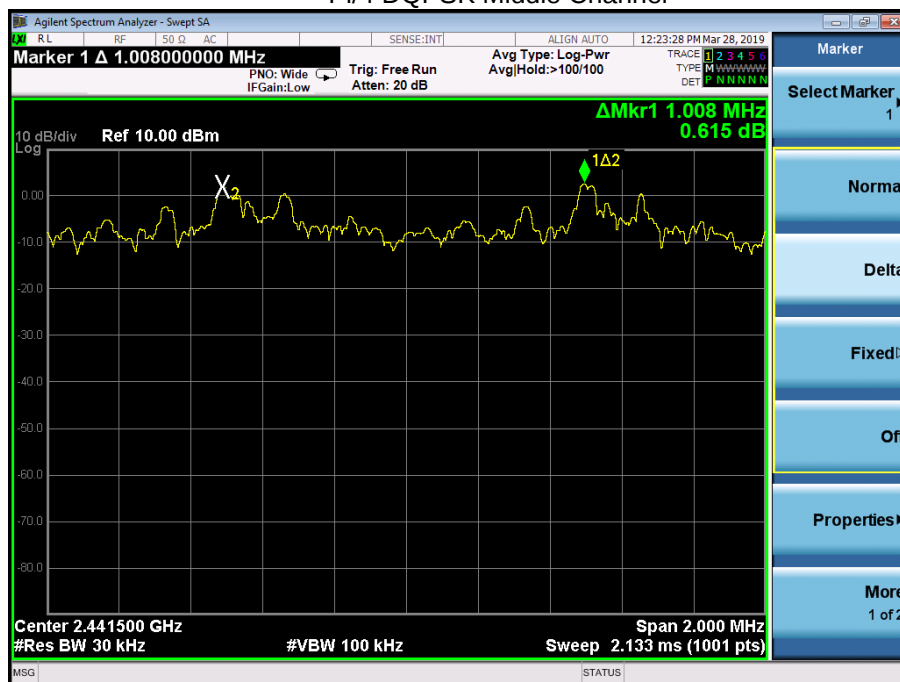

Pi/4 DQPSK High Channel



8DPSK Low Channel





8DPSK Middle Channel




8DPSK High Channel



12. NUMBER OF HOPPING FREQUENCY

12.1 Block Diagram Of Test Setup

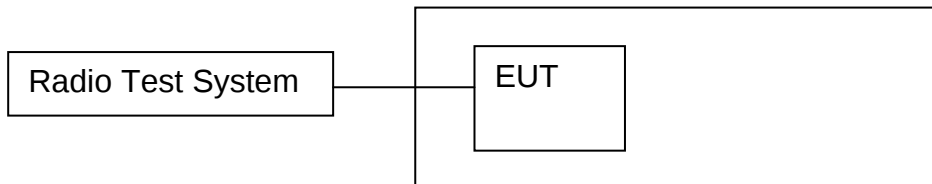

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MkHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Modulation	Hopping No	Limit	Result
GFSK	79	15	PASS
Pi/4 DQPSK	79	15	PASS
8DPSK	79	15	PASS

Test Plots:
79 Channels in total
GFSK

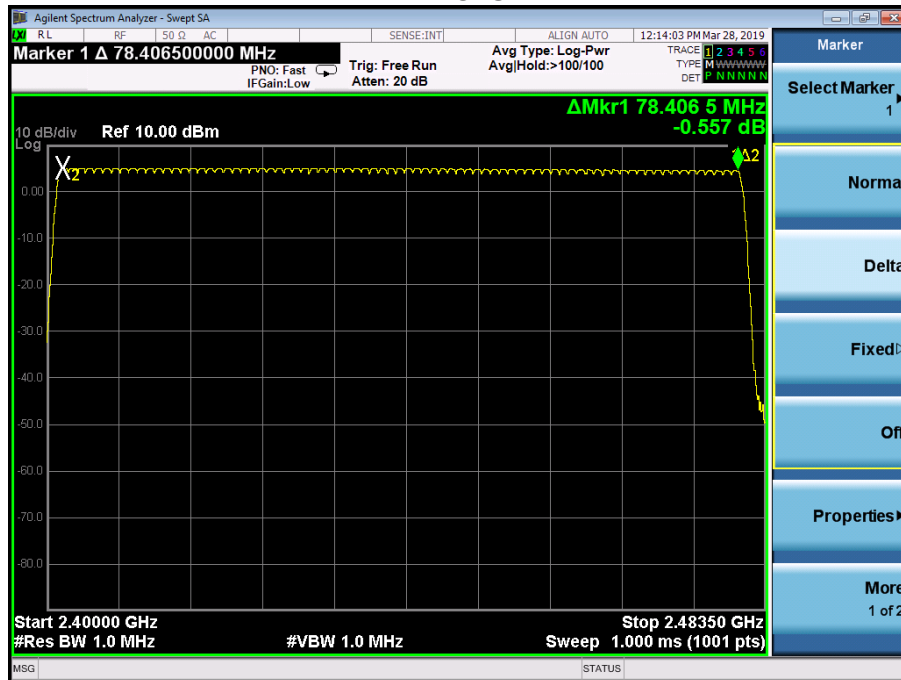




Pi/4 DQPSK

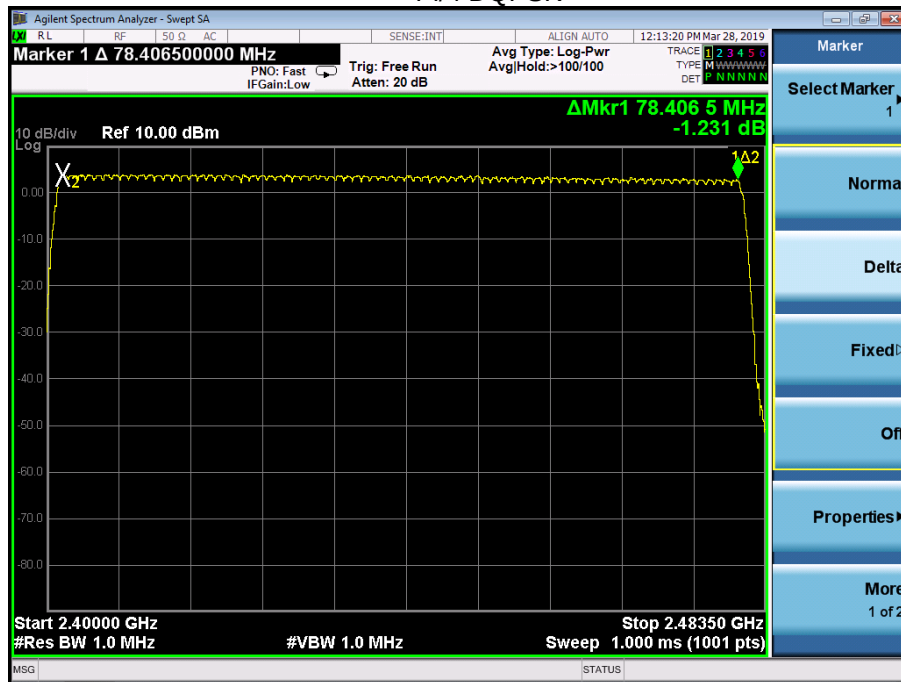


8DPSK

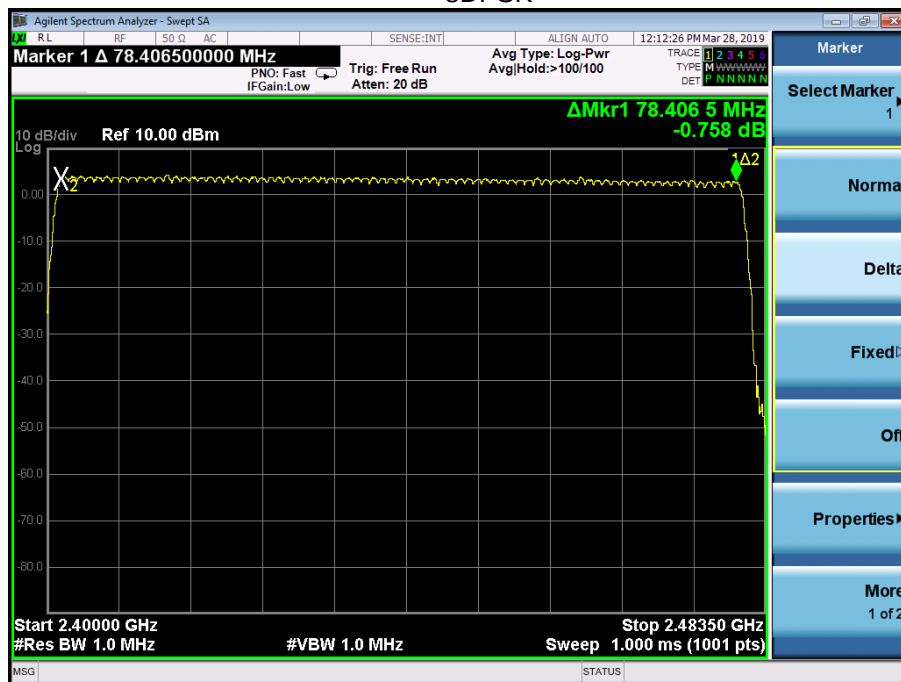

13. DWELL TIME

13.1 Block Diagram Of Test Setup

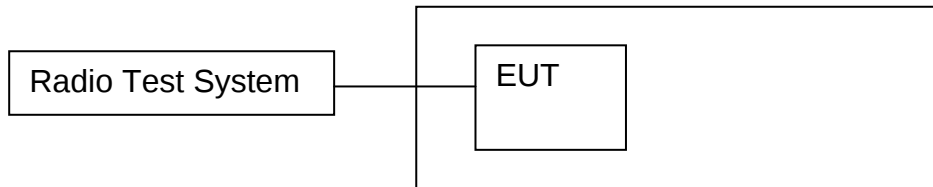

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


Remark: Mkr Delta is once pulse time.

Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.415	0.133	0.4
		DH3	1.674	0.268	0.4
		DH5	2.934	0.313	0.4
Pi/4DQPSK	Middle	2DH1	0.427	0.137	0.4
		2DH3	1.868	0.299	0.4
		2DH5	2.934	0.313	0.4
8DPSK	Middle	3DH1	0.425	0.136	0.4
		3DH3	1.677	0.268	0.4
		3DH5	2.946	0.314	0.4

Test Plots
GFSK DH1 Middle Channel

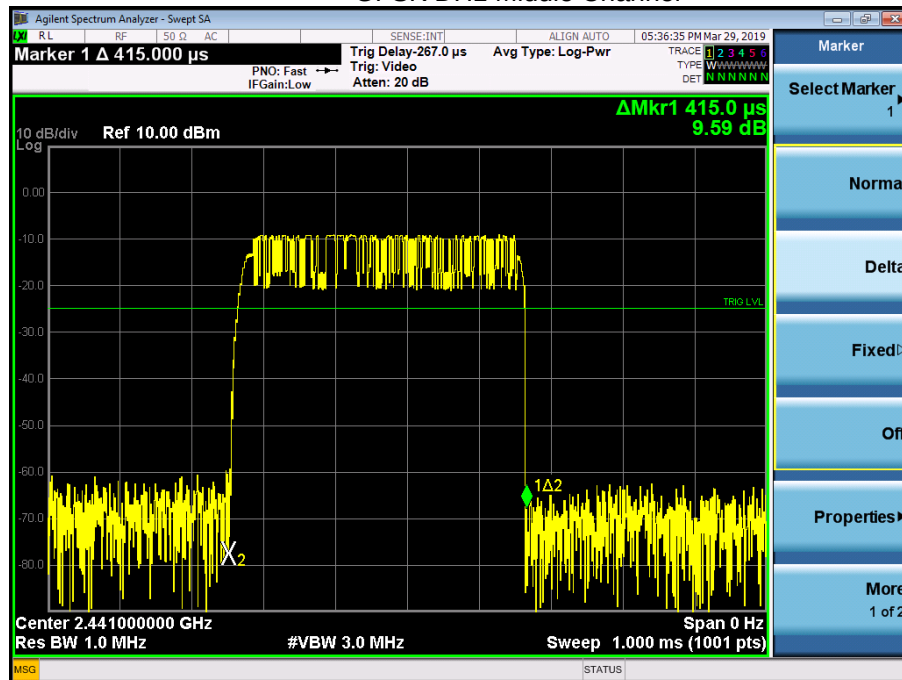


GFSK DH3 Middle Channel

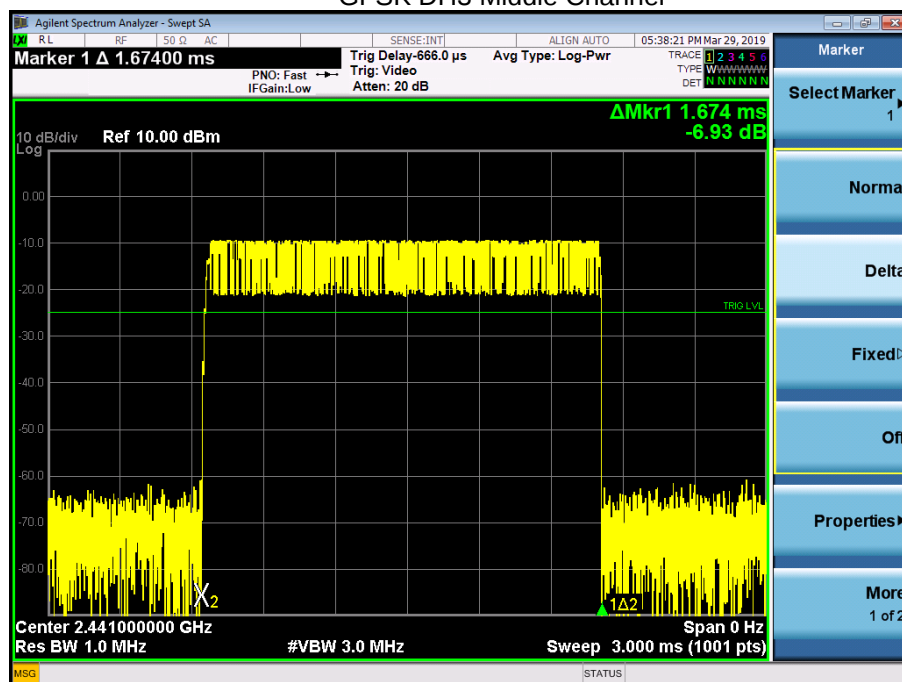





GFSK DH5 High Middle Channel

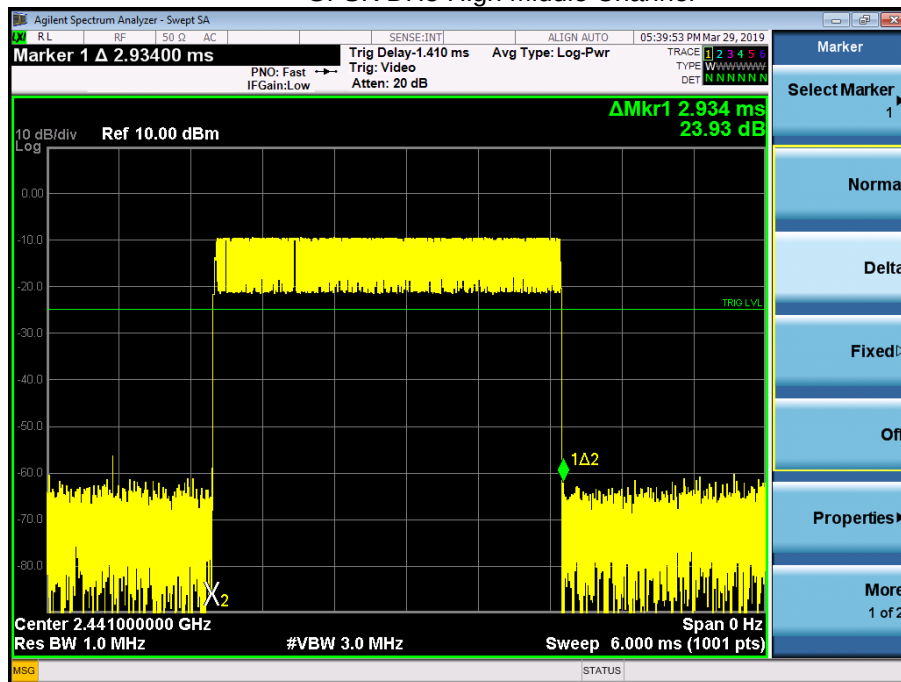


Pi/4DQPSK 2DH1 Middle Channel

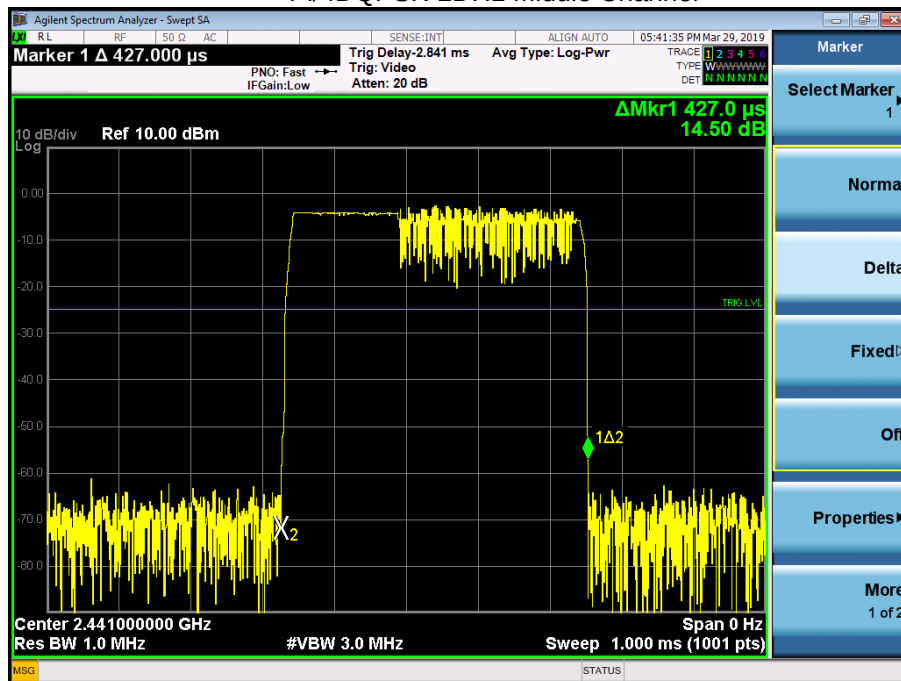


Pi/4DQPSK 2DH3 Middle Channel

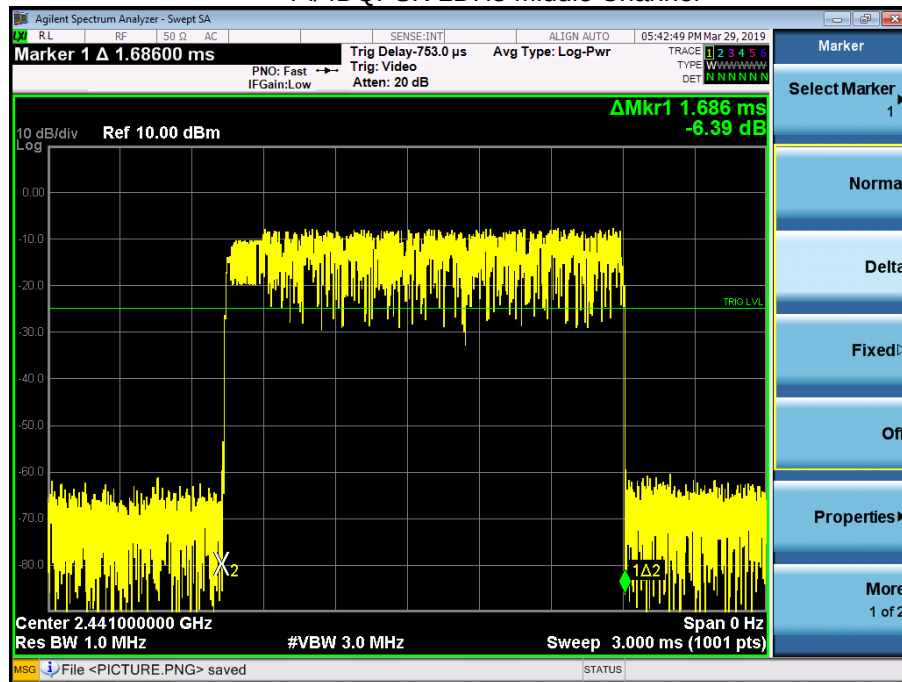


Pi/4DQPSK 2DH5 Middle Channel

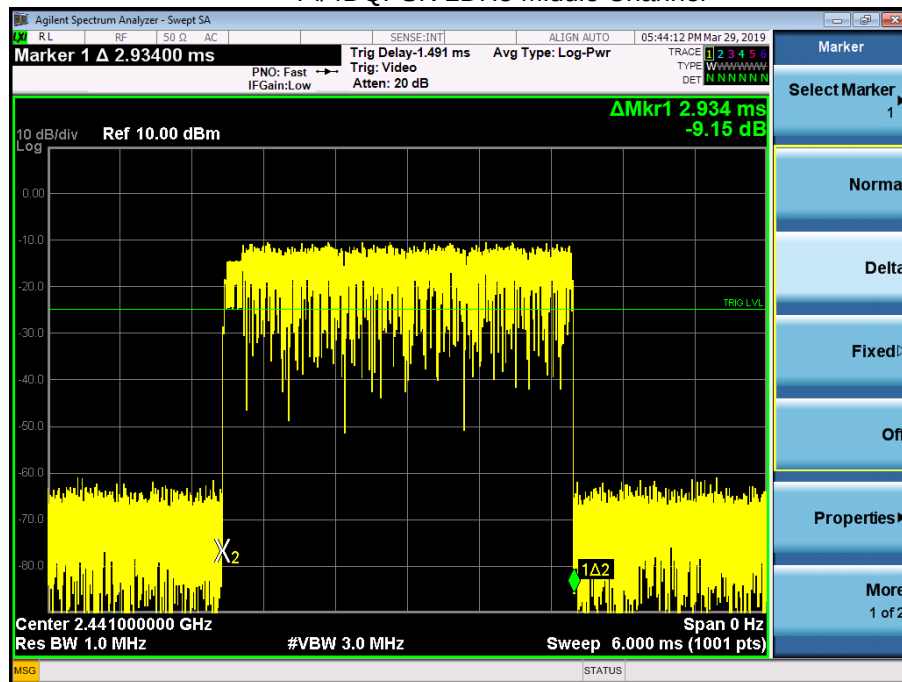

8DPSK 3DH1 Middle Channel

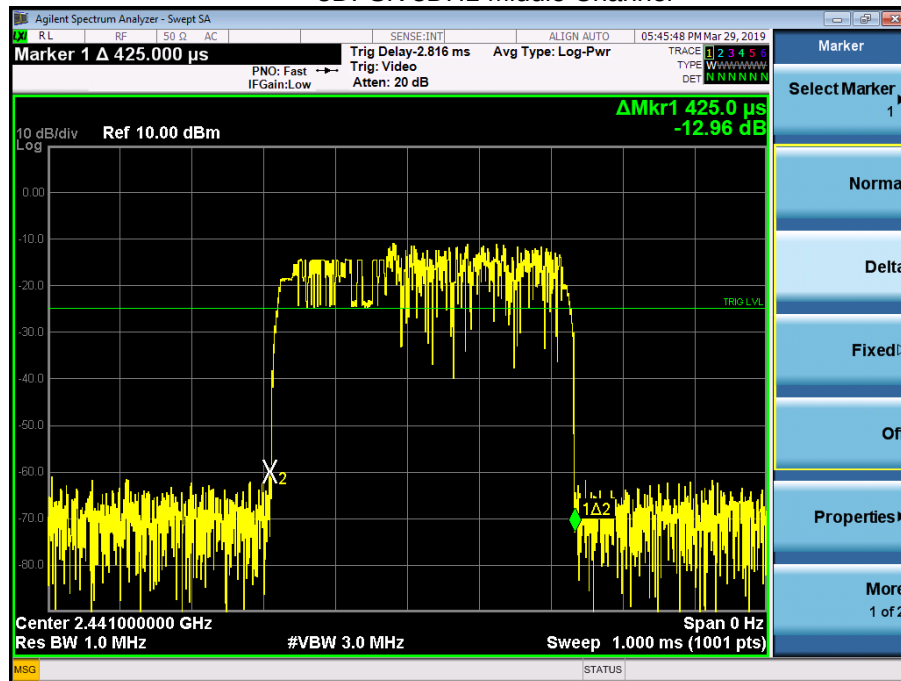


8DPSK 3DH3 Middle Channel

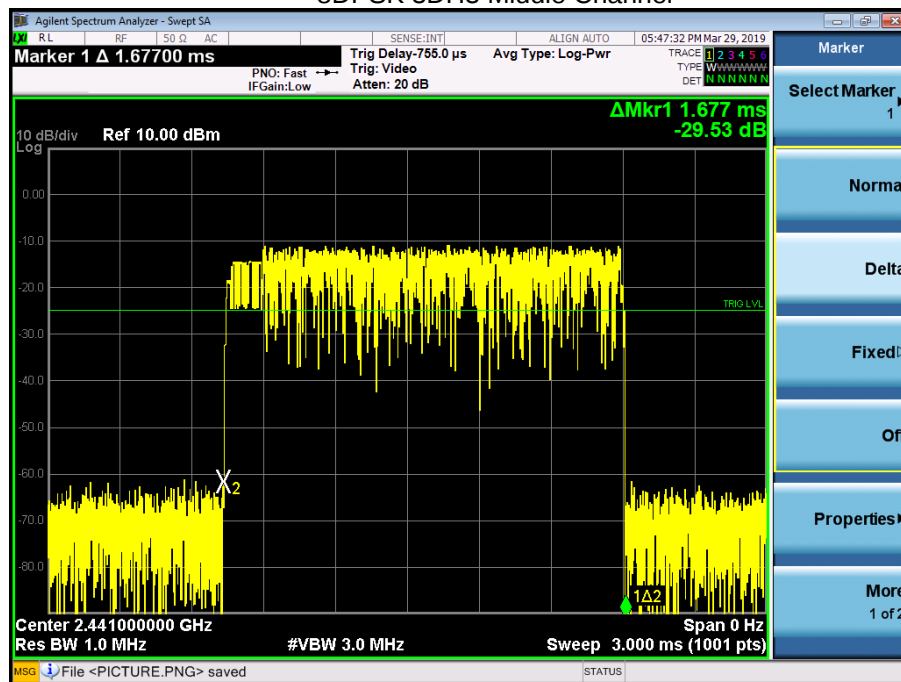



8DPSK 3DH5 Middle Channel

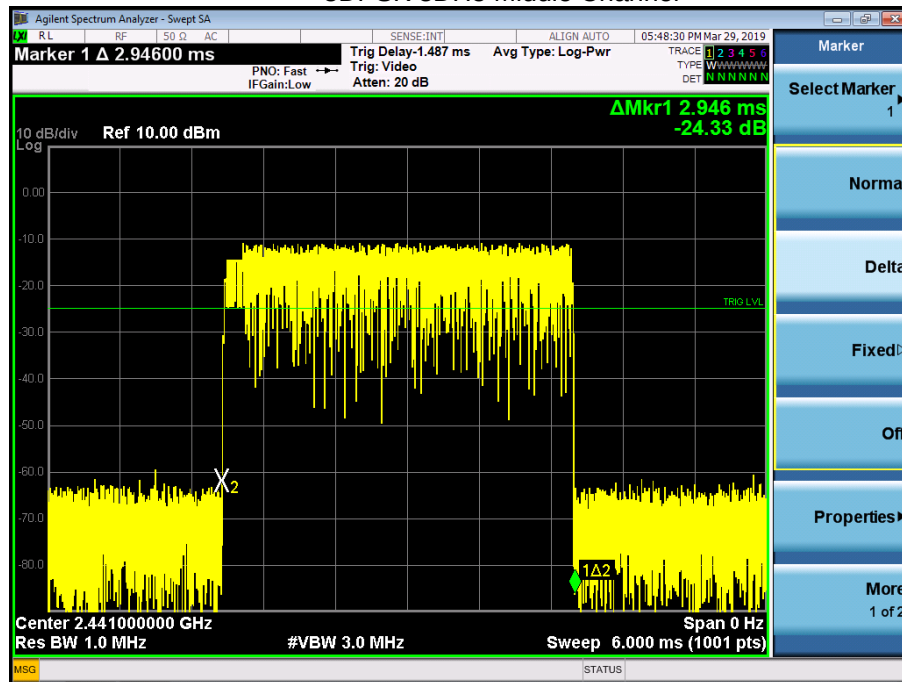

14. ANTENNA REQUIREMENT

14.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.2 EUT ANTENNA

The EUT antenna is PCB antenna, fulfill the requirement of this section.



15. EUT TEST SETUP PHOTOGRAPHS

Conducted Emission





Radiated Measurement Photos

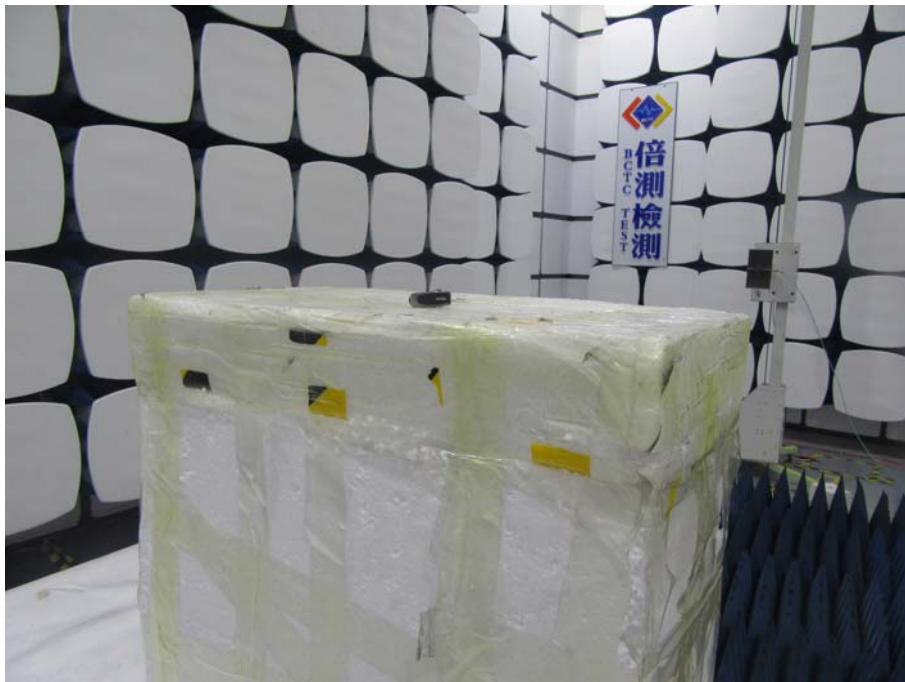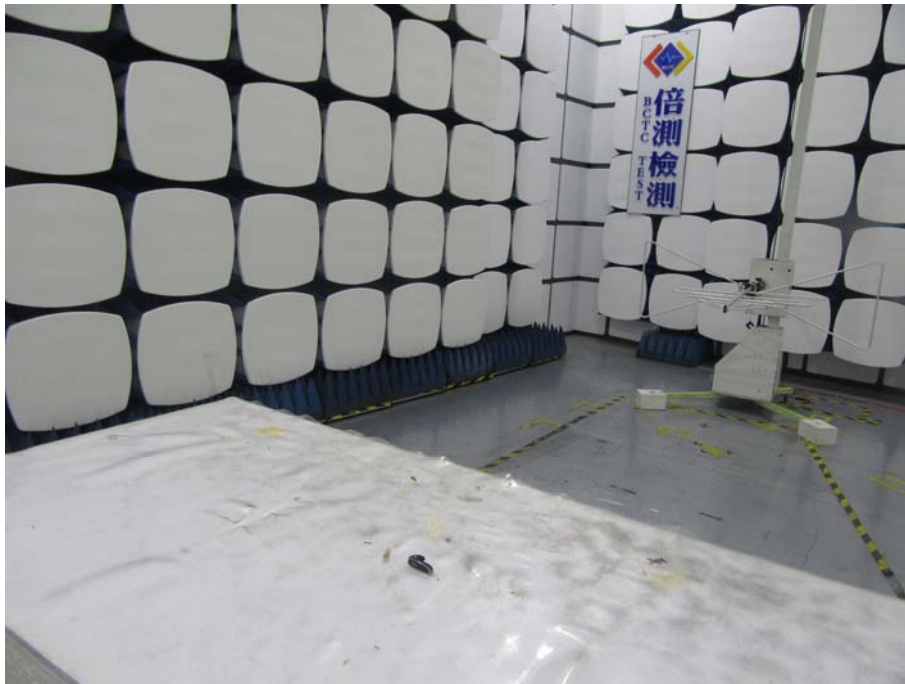



16. EUT PHOTOGRAPHS





***** END OF REPORT *****