



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.225

Report Reference No.....: **GTS20191021009-1-9-15**

FCC ID.....: **2AUUUB-S900PLUS**

Compiled by

(position+printed name+signature)...: File administrators Jimmy Wang

Supervised by

(position+printed name+signature)...: Test Engineer Aaron Tan



Approved by

(position+printed name+signature)...: Manager Jason Hu

Date of issue.....: Oct. 24, 2019

Representative Laboratory Name.: **Shenzhen Global Test Service Co., Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name.....: **BOXCHIP CO.,LTD**

Address: Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test specification

Standard: **FCC Part 15.225:** Operation within the band 13.110–14.010 MHz.

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Smart Terminal

Trade Mark: BOXCHIP

Manufacturer: **BOXCHIP CO.,LTD**

Model/Type reference.....: S900Plus

Listed Models: S900A_Plus, S900B_Plus, S1000, TVX-588d

Ratings: DC 3.8V from battery

Modulation: ASK

Hardware version: TVH30_S900+_MB_V2.0

Software version: V1.0

Frequency.....: 13.56MHz

Result.....: **PASS**

TEST REPORT

| | | |
|-------------------|-----------------------|---------------|
| Test Report No. : | GTS20191021009-1-9-15 | Oct. 24, 2019 |
| | | Date of issue |

Equipment under Test : Smart Terminal

Model /Type : S900Plus

Listed Models : S900A_Plus, S900B_Plus, S1000, TVX-588d

Applicant : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Manufacturer : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | | |
|----------|--|----|
| <u>1</u> | <u>SUMMARY</u> | 4 |
| 1.1 | Test Standards | 4 |
| 1.2 | Test Description | 4 |
| 1.3 | Address of the test laboratory | 5 |
| 1.4 | Test Facility | 5 |
| 1.5 | Statement of the measurement uncertainty | 5 |
| <u>2</u> | <u>GENERAL INFORMATION</u> | 6 |
| 2.1 | Environmental conditions | 6 |
| 2.2 | General Description of EUT | 6 |
| 2.3 | Equipments Used during the Test | 6 |
| 2.4 | Special Accessories | 7 |
| 2.5 | Related Submittal(s) / Grant (s) | 7 |
| 2.6 | Modifications | 7 |
| <u>3</u> | <u>TEST CONDITIONS AND RESULTS</u> | 8 |
| 3.1 | Conducted Emission (AC Main) | 8 |
| 3.2 | Radiated Emission | 11 |
| 3.3 | 20dB Bandwidth | 14 |
| 3.4 | Frequency Stability Test Data | 15 |
| <u>4</u> | <u>TEST SETUP PHOTOS OF THE EUT</u> | 17 |
| <u>5</u> | <u>PHOTOS OF THE EUT</u> | 18 |

1 S U M M A R Y

1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): Operation within the band 13.110–14.010 MHz

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

1.2 Test Description

| FCC PART 15 .225 | | |
|----------------------------|-------------------------------|------|
| FCC Part 15.207 | AC Power Conducted Emission | PASS |
| FCC Part 2.1049 | 20dB Bandwidth | PASS |
| FCC Part 15.225(a) (b) (c) | In-band Emissions | PASS |
| FCC Part 15.225(d)/15.207 | Out-of-band Emissions | PASS |
| FCC Part 15.225(e) | Frequency Stability Tolerance | PASS |

Remark: The measurement uncertainty is not included in the test result.

1.3 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

1.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10 dB | (1) |
| Radiated Emission | 1~18GHz | 4.32 dB | (1) |
| Radiated Emission | 18~40GHz | 5.54 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2 General Description of EUT

| | |
|-----------------------|----------------------|
| Product Name: | Smart Terminal |
| Model/Type reference: | S900Plus |
| Power supply: | DC 3.8V from battery |
| NFC | |
| Operation frequency: | 13.56MHz |
| Modulation : | ASK |
| No. of Channel : | 1 |
| Antenna type: | Loop Antenna |

Note: For more details, please refer to the user's manual of the EUT.

2.3 Equipments Used during the Test

| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|----------------------------|----------------|-----------------------|--------------|------------------|----------------------|
| LISN | R&S | ENV216 | 3560.6550.08 | 2019/09/20 | 2020/09/19 |
| LISN | R&S | ESH2-Z5 | 893606/008 | 2019/09/20 | 2020/09/19 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 976 | 2019/09/20 | 2020/09/19 |
| EMI Test Receiver | R&S | ESCI7 | 101102 | 2019/09/20 | 2020/09/19 |
| Spectrum Analyzer | Agilent | N9020A | MY48010425 | 2019/09/20 | 2020/09/19 |
| Spectrum Analyzer | R&S | FSP40 | 100019 | 2019/09/20 | 2020/09/19 |
| Controller | EM Electronics | Controller EM 1000 | N/A | N/A | N/A |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 01622 | 2019/09/20 | 2020/09/19 |
| Active Loop Antenna | SCHWARZBEC K | FMZB1519 | 1519-037 | 2019/09/20 | 2020/09/19 |
| Broadband Horn Antenna | SCHWARZBEC K | BBHA 9170 | 971 | 2019/09/20 | 2020/09/19 |
| Amplifier | Schwarzbeck | BBV 9743 | #202 | 2019/09/20 | 2020/09/19 |
| Amplifier | EMCI | EMC051845B | 980355 | 2019/09/20 | 2020/09/19 |
| Temperature/Humidity Meter | Gangxing | CTH-608 | 02 | 2019/09/20 | 2020/09/19 |
| High-Pass Filter | K&L | 9SH10-2700/X12750-O/O | KL142031 | 2019/09/20 | 2020/09/19 |
| High-Pass Filter | K&L | 41H10-1375/U12750-O/O | KL142032 | 2019/09/20 | 2020/09/19 |
| RF Cable(below 1GHz) | HUBER+SUHNE R | RG214 | RE01 | 2019/09/20 | 2020/09/19 |

| | | | | | |
|-----------------------|---------------|---------|------------|------------|------------|
| RF Cable(above 1GHz) | HUBER+SUHNE R | RG214 | RE02 | 2019/09/20 | 2020/09/19 |
| Data acquisition card | Agilent | U2531A | TW53323507 | 2019/09/20 | 2020/09/19 |
| Power Sensor | Agilent | U2021XA | MY5365004 | 2019/09/20 | 2020/09/19 |
| EMI Test Software | R&S | ES-K1 | V1.7.1 | 2019/09/20 | 2020/09/19 |
| EMI Test Software | JS Tonscend | JS32-RE | 2.0.1.5 | 2019/09/20 | 2020/09/19 |

The calibration interval was one year

2.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description | Manufacturer | Model | Technical Parameters | Certificate | Provided by |
|-------------|--------------|-------|----------------------|-------------|-------------|
| / | / | / | / | / | / |
| / | / | / | / | / | / |
| / | / | / | / | / | / |
| / | / | / | / | / | / |

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the EUT filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.

3 TEST CONDITIONS AND RESULTS

3.1 Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |


* Decreases with the logarithm of the frequency.


TEST CONFIGURATION

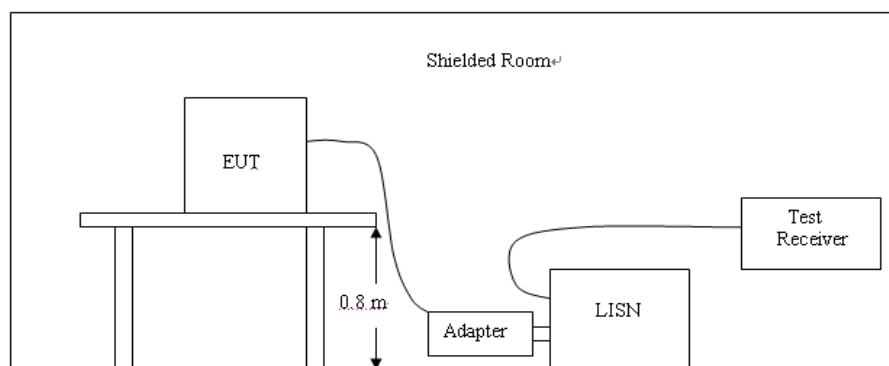

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a flood stand system; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

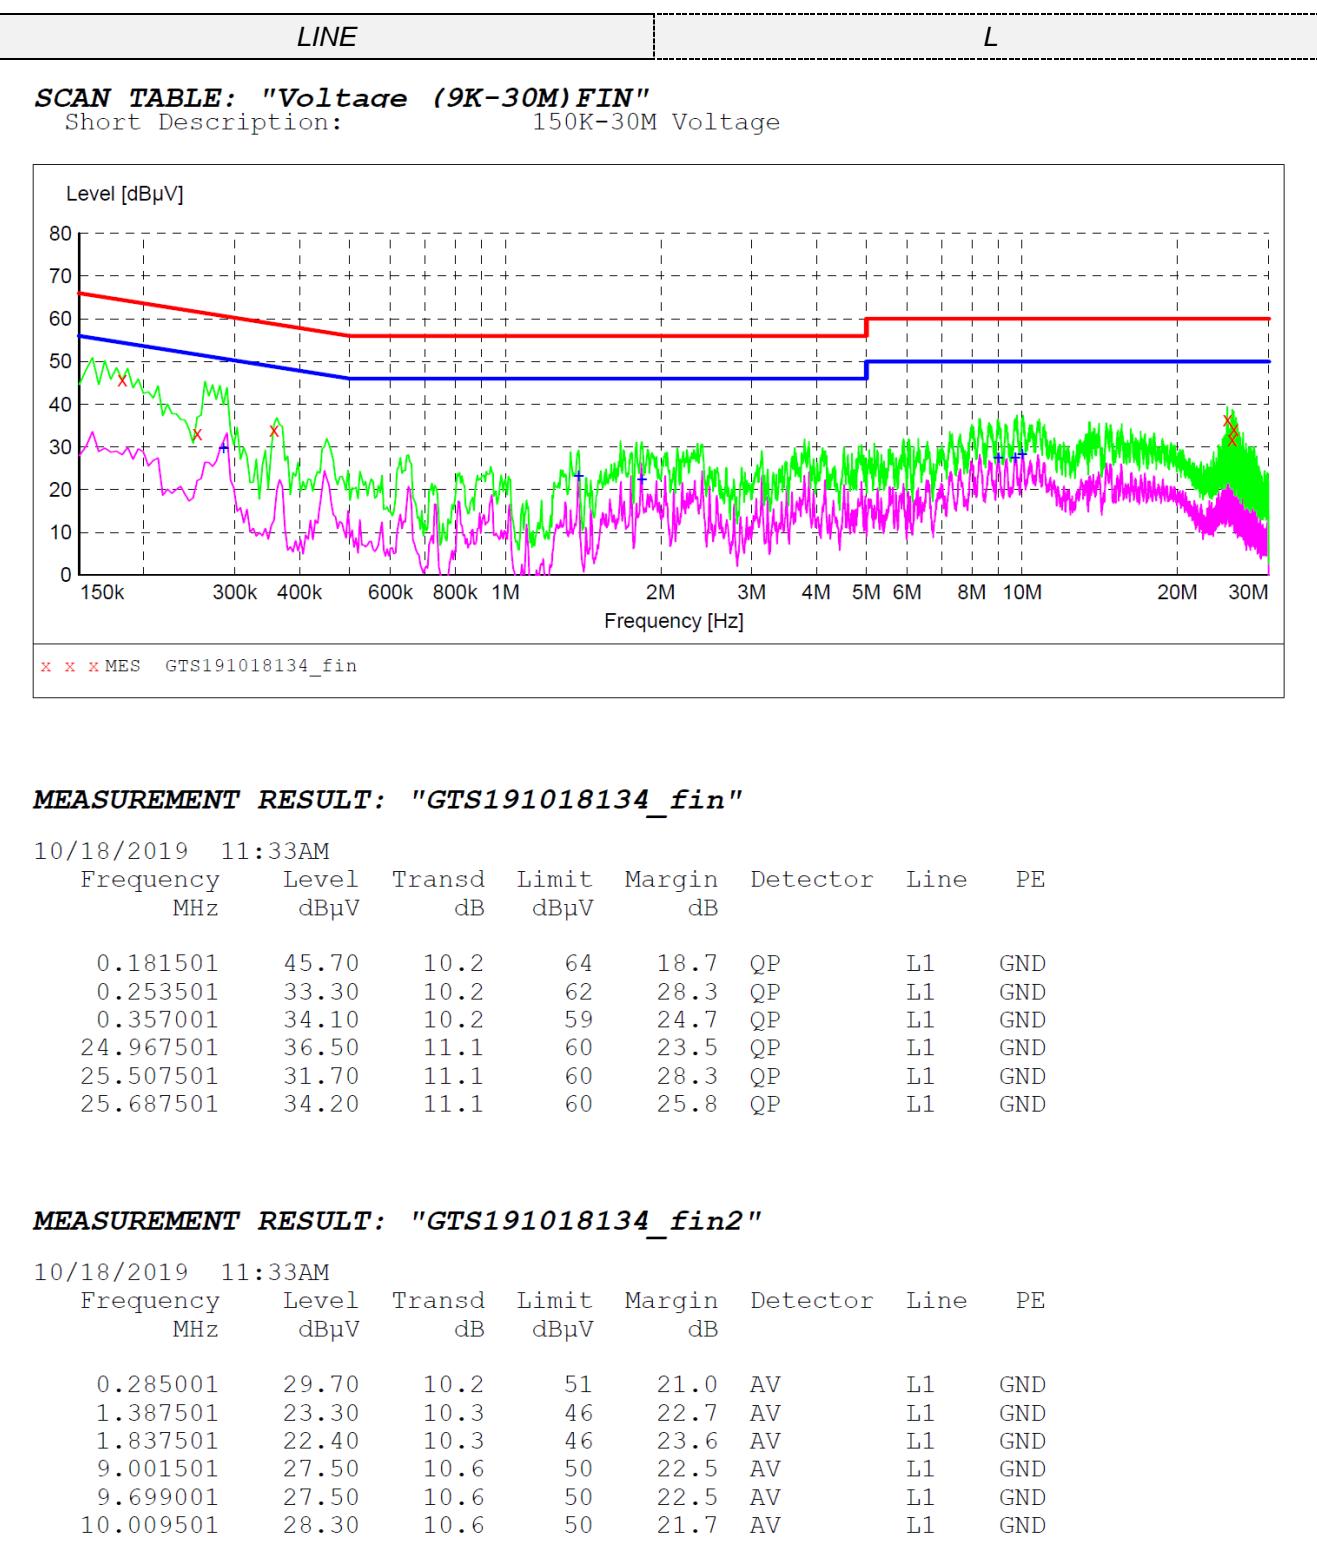TEST RESULTS
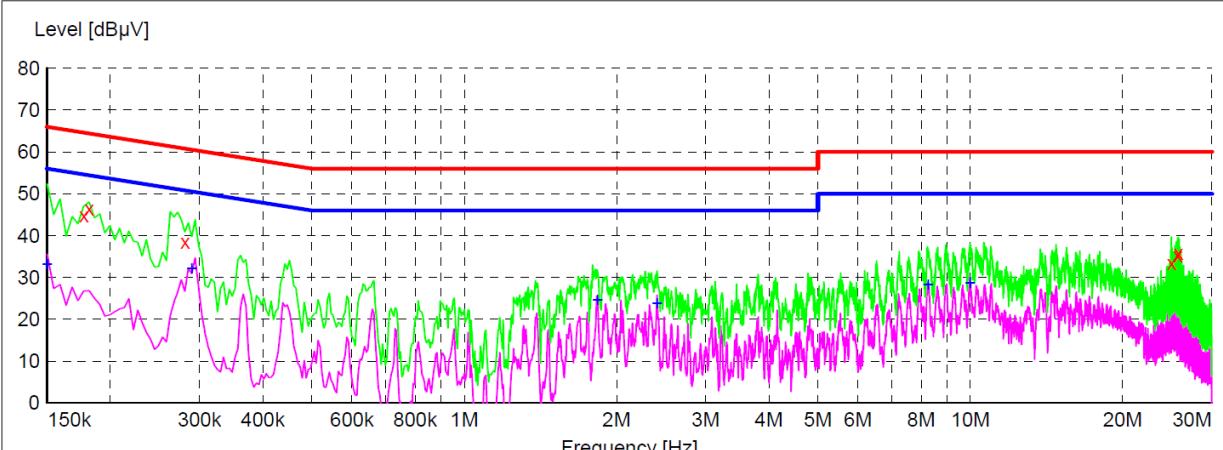
| LINE | N | | | | | | |
|--|---------------------|--------------|---------------------|--------------|----------|------|-----|
| SCAN TABLE: "Voltage (9K-30M) FIN" | | | | | | | |
| Short Description: 150K-30M Voltage | | | | | | | |
|  | | | | | | | |
| x x x MES GTS191018133_fin | | | | | | | |
| MEASUREMENT RESULT: "GTS191018133_fin" | | | | | | | |
| 10/18/2019 11:39AM | | | | | | | |
| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
| 0.178001 | 44.70 | 10.2 | 65 | 19.9 | QP | N | GND |
| 0.181601 | 46.40 | 10.2 | 64 | 18.0 | QP | N | GND |
| 0.280601 | 38.60 | 10.2 | 61 | 22.2 | QP | N | GND |
| 24.974001 | 33.30 | 11.1 | 60 | 26.7 | QP | N | GND |
| 25.693001 | 35.30 | 11.1 | 60 | 24.7 | QP | N | GND |
| 25.750501 | 35.90 | 11.1 | 60 | 24.1 | QP | N | GND |
| MEASUREMENT RESULT: "GTS191018133_fin2" | | | | | | | |
| 10/18/2019 11:39AM | | | | | | | |
| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
| 0.150011 | 33.20 | 10.2 | 56 | 22.8 | AV | N | GND |
| 0.289601 | 32.10 | 10.2 | 51 | 18.4 | AV | N | GND |
| 1.832001 | 24.70 | 10.3 | 46 | 21.3 | AV | N | GND |
| 2.404601 | 23.80 | 10.4 | 46 | 22.2 | AV | N | GND |
| 8.254501 | 28.40 | 10.5 | 50 | 21.6 | AV | N | GND |
| 9.991501 | 28.70 | 10.6 | 50 | 21.3 | AV | N | GND |

3.2 Radiated Emission

Limit

- a The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- b Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d The field strength of any emissions appearing outside of the 13.110– 14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

| Frequency (MHz) | Distance (Meters) | Radiated (dBuV/m) | Radiated (μ V/m) |
|-----------------|-------------------|----------------------------------|-----------------------|
| 0.009-0.49 | 3 | 20log(2400/F(KHz))+40log(300/3) | 2400/F(KHz) |
| 0.49-1.705 | 3 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz) |
| 1.705-13.110 | 3 | 69.54 | 30 |
| 13.110-13.410 | 3 | 80.50 | 106 |
| 13410-13.553 | 3 | 90.47 | 334 |
| 13.553-13.567 | 3 | 124.00 | 15848 |
| 13.567-13.710 | 3 | 90.47 | 334 |
| 13.710-14.010 | 3 | 80.50 | 106 |
| 14.010-30.0 | 3 | 69.54 | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

Test Procedure

1. The EUT was placed on 10cm wooden desk above ground plane which on a turn table.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |


For example

| Frequency (MHz) | FS (dBuV/m) | RA (dBuV/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------|-------------|---------|---------|---------|-------------|
| 150.00 | 40 | 58.1 | 12.2 | 1.6 | 31.90 | -18.1 |


$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

Test Configuration

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

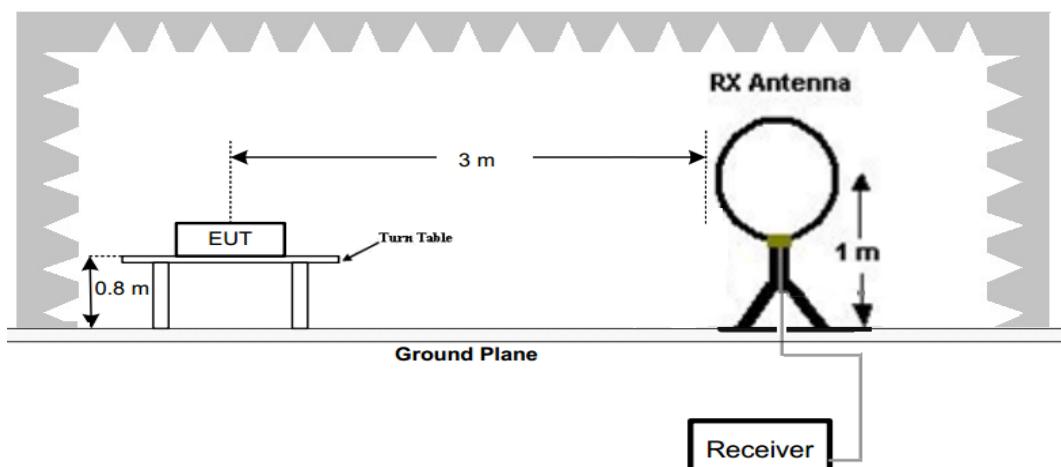

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

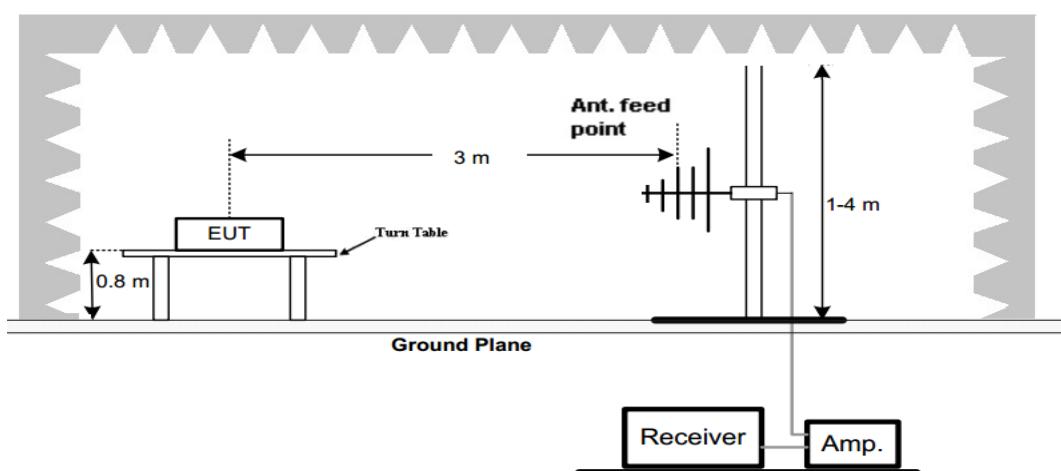

Test Results**3.2.1 In-band Emissions**

| Frequency(MHz): | | | 13.56 | | | Polarity: | | HORIZONTAL | |
|-----------------|-----------------|-------------------------|----------|----------------|-------------|------------------|-----------------------|-------------------|--------------------------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Detector | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Correction Factor (dB/m) |
| 1 | 13.15 | 41.25 | PK | 80.50 | 39.25 | 36.55 | 5.26 | -0.56 | 4.70 |
| 2 | 13.55 | 49.14 | PK | 90.47 | 41.33 | 44.35 | 5.36 | -0.57 | 4.79 |
| 3 | 13.56 | 86.23 | PK | 124.00 | 37.77 | 81.35 | 5.45 | -0.57 | 4.88 |
| 4 | 13.57 | 48.54 | PK | 90.47 | 41.93 | 43.40 | 5.49 | -0.35 | 5.14 |
| 5 | 13.75 | 40.22 | PK | 80.50 | 40.28 | 34.89 | 5.63 | -0.30 | 5.33 |

| Frequency(MHz): | | | 13.56 | | | Polarity: | | VERTICAL | |
|-----------------|-----------------|-------------------------|----------|----------------|-------------|------------------|-----------------------|-------------------|--------------------------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Detector | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Correction Factor (dB/m) |
| 1 | 13.15 | 41.69 | PK | 80.50 | 38.81 | 36.99 | 5.26 | -0.56 | 4.70 |
| 2 | 13.55 | 49.15 | PK | 90.47 | 41.32 | 44.36 | 5.36 | -0.57 | 4.79 |
| 3 | 13.56 | 87.21 | PK | 124.00 | 36.79 | 82.33 | 5.45 | -0.57 | 4.88 |
| 4 | 13.57 | 49.25 | PK | 90.47 | 41.22 | 44.11 | 5.49 | -0.35 | 5.14 |
| 5 | 13.75 | 40.87 | PK | 80.50 | 39.63 | 35.54 | 5.63 | -0.30 | 5.33 |

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
3. Margin value = Limit value- Emission level.
4. The other emission levels were very low against the limit.

3.2.2 Out-of-band Emissions

| Frequency(MHz): | | | 13.56 | | | Polarity: | | HORIZONTAL | |
|-----------------|-----------------|-------------------------|----------|----------------|-------------|------------------|-----------------------|-------------------|--------------------------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Detector | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Correction Factor (dB/m) |
| 1 | 27.12 | 35.69 | PK | 69.54 | 33.85 | 28.19 | 7.25 | 0.25 | 7.50 |
| 2 | 40.68 | 32.56 | PK | 40.00 | 7.44 | 23.75 | 8.25 | 0.56 | 8.81 |
| 3 | 54.24 | 28.24 | PK | 40.00 | 11.76 | 19.20 | 8.30 | 0.74 | 9.04 |
| 4 | 67.80 | 25.69 | PK | 40.00 | 14.31 | 16.16 | 8.55 | 0.98 | 9.53 |

| Frequency(MHz): | | | 13.56 | | | Polarity: | | VERTICAL | |
|-----------------|-----------------|-------------------------|----------|----------------|-------------|------------------|-----------------------|-------------------|--------------------------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Detector | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Correction Factor (dB/m) |
| 1 | 27.12 | 36.25 | PK | 69.54 | 33.29 | 28.75 | 7.25 | 0.25 | 7.50 |
| 2 | 40.68 | 33.41 | PK | 40.00 | 6.59 | 24.60 | 8.25 | 0.56 | 8.81 |
| 3 | 54.24 | 30.26 | PK | 40.00 | 9.74 | 21.22 | 8.30 | 0.74 | 9.04 |
| 4 | 67.80 | 28.54 | PK | 40.00 | 11.46 | 19.01 | 8.55 | 0.98 | 9.53 |

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
3. Margin value = Limit value- Emission level.
4. The other emission levels were very low against the limit.

3.3 20dB Bandwidth

Limit


No limit for 20dB bandwidth.

Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration

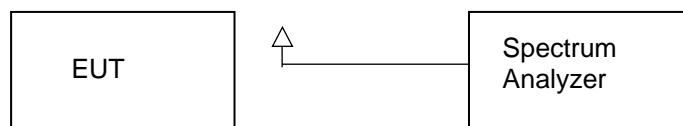

Test Results

| Modulation | Frequency(MHz) | 20dB bandwidth (KHz) | 99%dB bandwidth (KHz) | Result |
|------------|----------------|----------------------|-----------------------|--------|
| ASK | 13.56 | 2.854 | 2.422 | Pass |

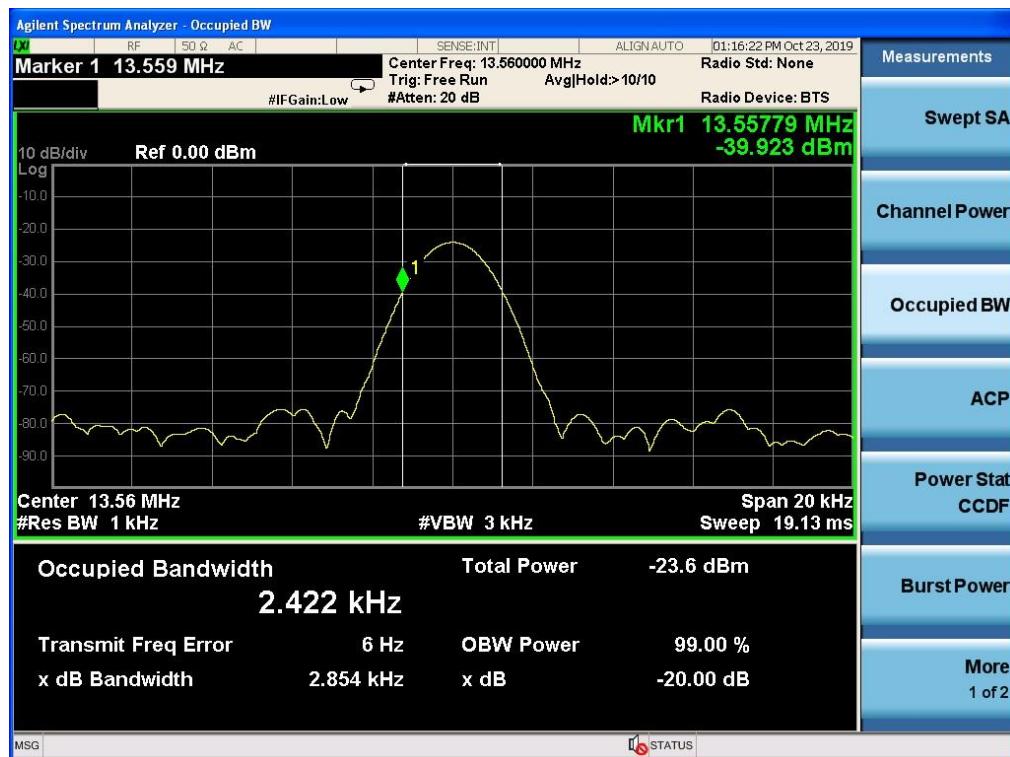


3.4 Frequency Stability Test Data

LIMIT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

TEST CONFIGURATION

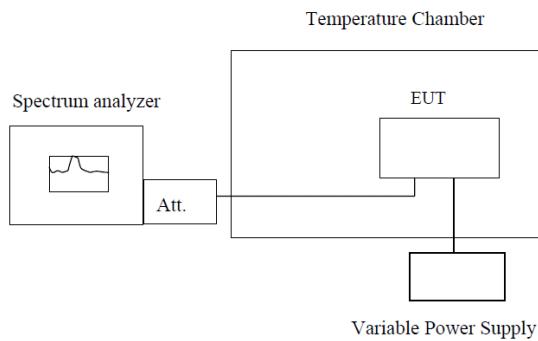

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE




1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
7. Reduce the input voltage to specified extreme voltage variation (+/- 15%) or endpoint, record the maximum frequency change.

TEST RESULTS

| Reference Frequency: 13.56MHz | | | | |
|-------------------------------|--------------------|----------------|-------------------------|---------------|
| Voltage (V) | Temperature (°C) | Frequency (Hz) | Frequency Deviation(Hz) | Deviation (%) |
| 3.80 | +20(Ref) | 13.560102 | 102 | 0.000752% |
| | -20 | 13.560062 | 62 | 0.000457% |
| | -10 | 13.560188 | 188 | 0.001386% |
| | 0 | 13.560129 | 129 | 0.000951% |
| | +10 | 13.560107 | 107 | 0.000789% |
| | +20 | 13.560091 | 91 | 0.000671% |
| | +25 | 13.560141 | 141 | 0.001040% |
| | +30 | 13.560152 | 152 | 0.001121% |
| | +40 | 13.560178 | 178 | 0.001313% |
| | +50 | 13.560061 | 61 | 0.000450% |
| 4.37 | +20 | 13.560050 | 50 | 0.000369% |
| 3.23 | +20 | 13.560100 | 100 | 0.000737% |

4 Test Setup Photos of the EUT

Radiated Emission

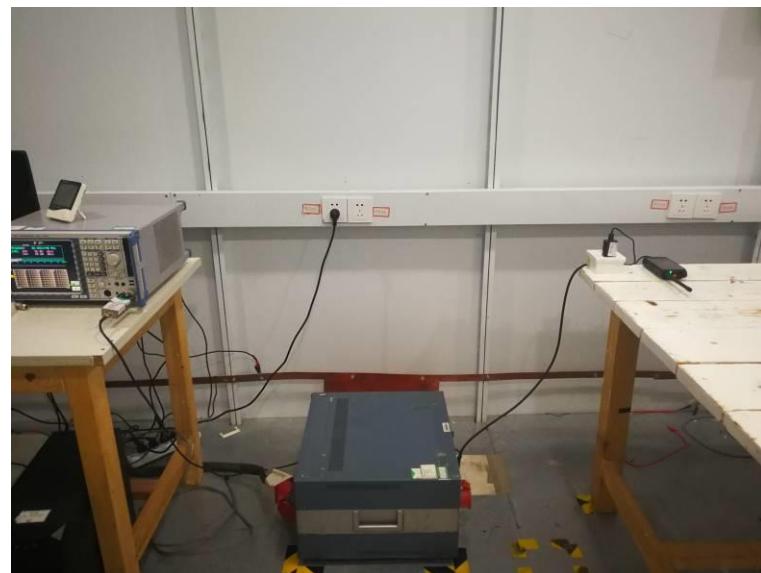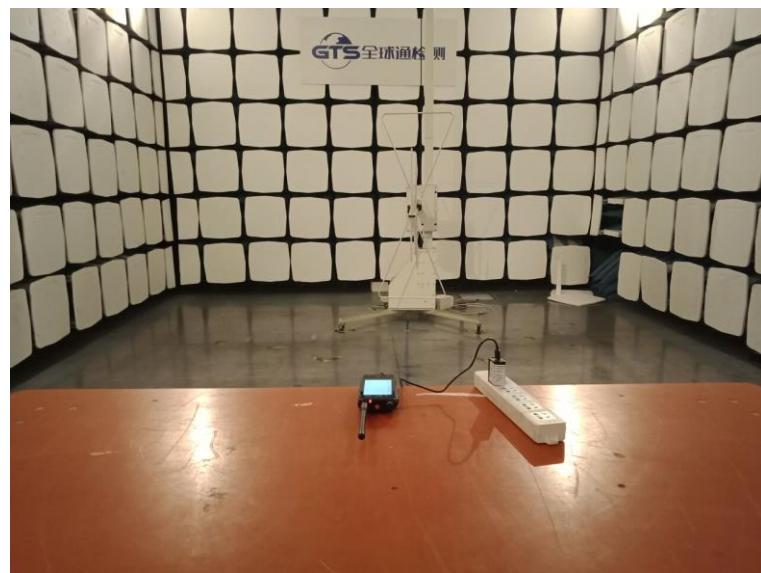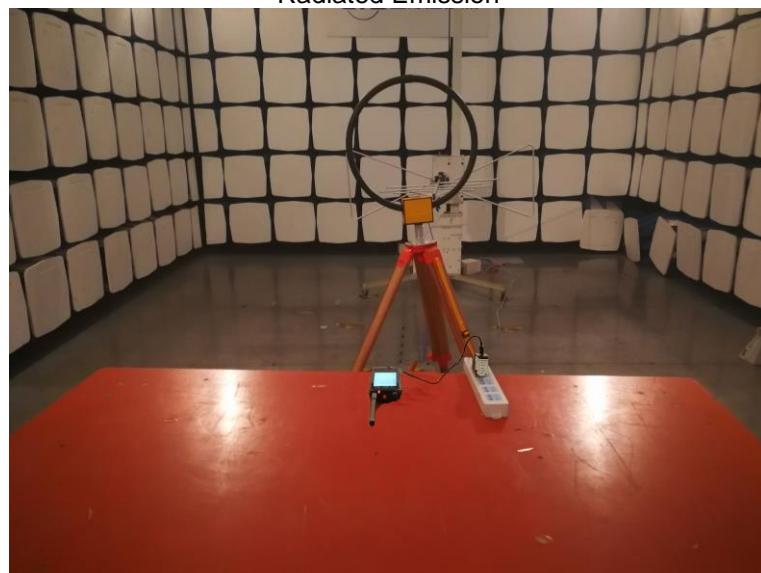

5 Photos of the EUT

Reference to the test report No. GTS20191021009-1-9-1

***** End of Report *****