



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz

6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).



a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum



6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5G) Mode Frequency U-NII-1 (5180-5240MHz)		

Antenna A gain: 5dBi, Antenna B gain: 5dBi, Directional gain=[10log(GA+ G B)] dbi =8.01dbi

limit=30-(8.01-6)=27.99

Test Channel	Frequency	Maximum output power. Antenna port (AV)			LIMIT	Result
	(MHz)	ANT A(dBm)	ANT B(dBm)	Total(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	17.482	17.264	/	30	Pass
CH40	5200	17.661	17.302	/	30	Pass
CH48	5240	17.520	17.547	/	30	Pass
TX 802.11 n20M Mode						
CH36	5180	17.467	17.289	20.39	27.99	Pass
CH40	5200	17.737	18.114	20.94	27.99	Pass
CH48	5240	17.569	17.976	20.79	27.99	Pass
TX 802.11 n40M Mode						
CH38	5190	16.091	16.522	19.32	27.99	Pass
CH46	5230	16.261	16.366	19.32	27.99	Pass
TX 802.11 AC20M Mode						
CH36	5180	17.163	17.011	20.10	27.99	Pass
CH40	5200	17.807	17.774	20.80	27.99	Pass
CH48	5240	17.676	17.662	20.68	27.99	Pass
TX 802.11 AC40M Mode						
CH38	5190	16.031	16.852	19.47	27.99	Pass
CH46	5230	16.509	16.277	19.40	27.99	Pass
TX 802.11 AC80M Mode						
CH42	5210	16.482	16.498	19.50	27.99	Pass



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5G) Mode Frequency U-NII-3 (5745-5825MHz)		

Antenna A gain: 5dBi, Antenna B gain: 5 dBi, Directional gain=[10log(GA+ G B)] dbi =8.01dbi

limit=30-(8.01-6)=27.99

Test Channel	Frequency	Maximum output power. Antenna port (AV)			LIMIT	Result
	(MHz)	ANT A(dBm)	ANT B(dBm)	Total(dBm)	dBm	
TX 802.11a Mode						
CH 149	5745	20.667	20.669	/	30	Pass
CH 157	5785	20.285	20.464	/	30	Pass
CH 165	5825	19.238	20.174	/	30	Pass
TX 802.11 n20M Mode						
CH 149	5745	20.535	20.444	23.50	27.99	Pass
CH 157	5785	20.933	20.645	23.80	27.99	Pass
CH 165	5825	20.172	20.006	23.10	27.99	Pass
TX 802.11 n40M Mode						
CH 151	5755	18.079	18.047	21.07	27.99	Pass
CH 159	5795	18.113	18.204	21.17	27.99	Pass
TX 802.11 AC20M Mode						
CH 149	5745	20.623	20.602	23.62	27.99	Pass
CH 157	5785	20.218	20.967	23.62	27.99	Pass
CH 165	5825	20.285	19.901	23.11	27.99	Pass
TX 802.11 AC40M Mode						
CH 151	5755	17.499	18.014	20.77	27.99	Pass
CH 159	5795	19.170	18.289	21.76	27.99	Pass
TX 802.11 AC80M Mode						
CH 155	5775	16.361	16.296	19.34	27.99	Pass



7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP





7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A . Plot.Antenna A: 5180-5240MHz


5.2G

5.180~5.240 GHz

(802.11a) Band Edge, Left Side

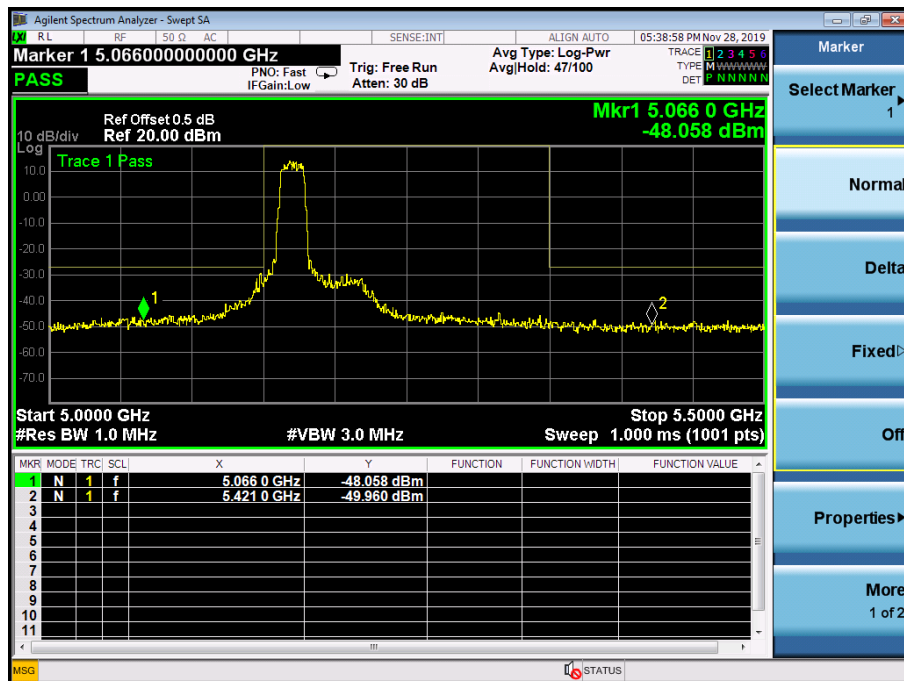


(802.11a) Band Edge, Right Side

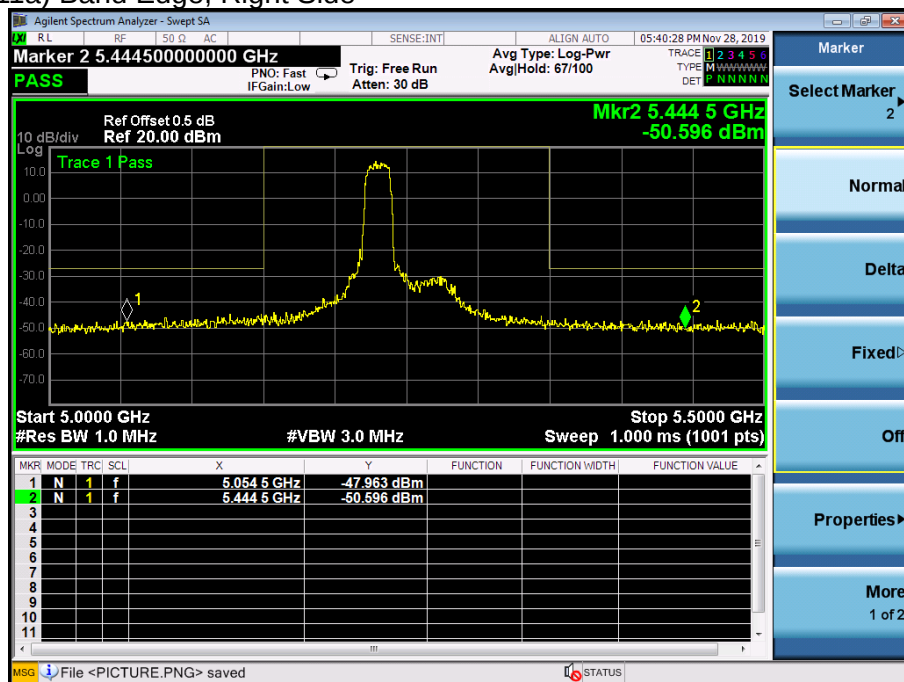




(802.11n20) Band Edge, Left Side

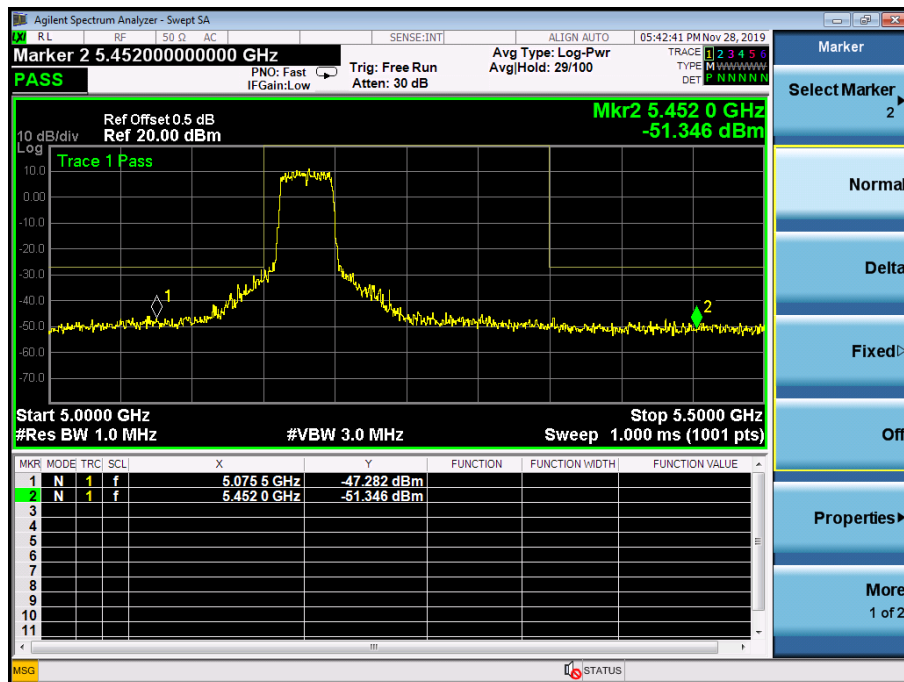


(802.11n20) Band Edge, Right Side

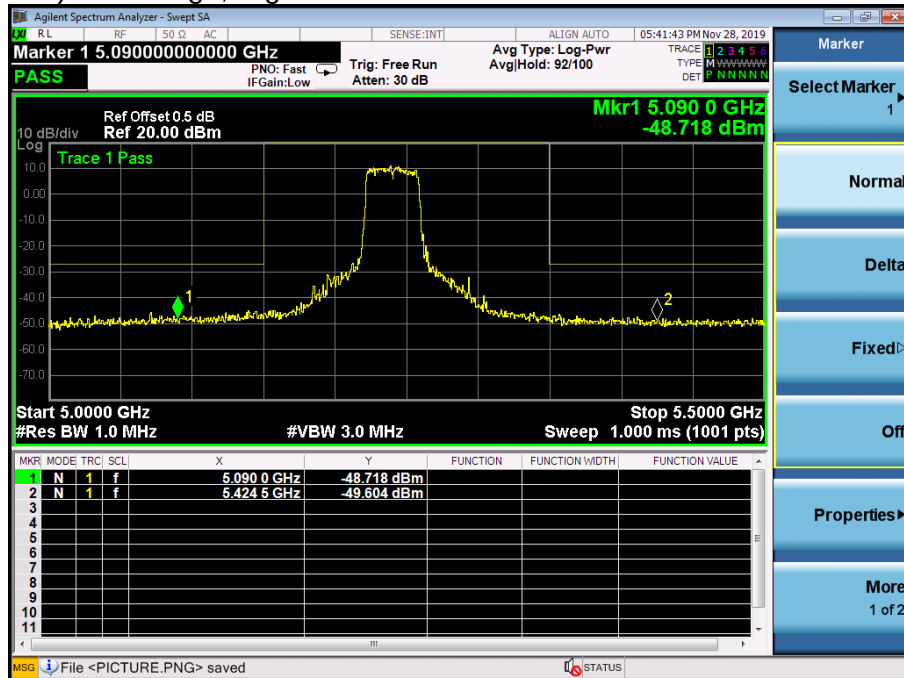




5.180~5.240 GHz

(802.11n40) Band Edge, Left Side

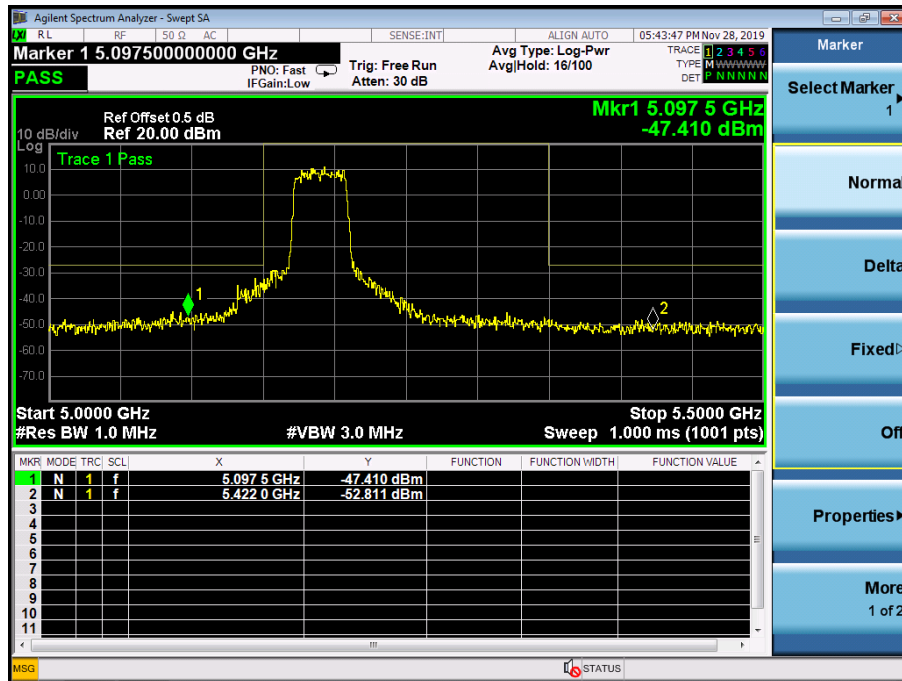


(802.11n40) Band Edge, Right Side

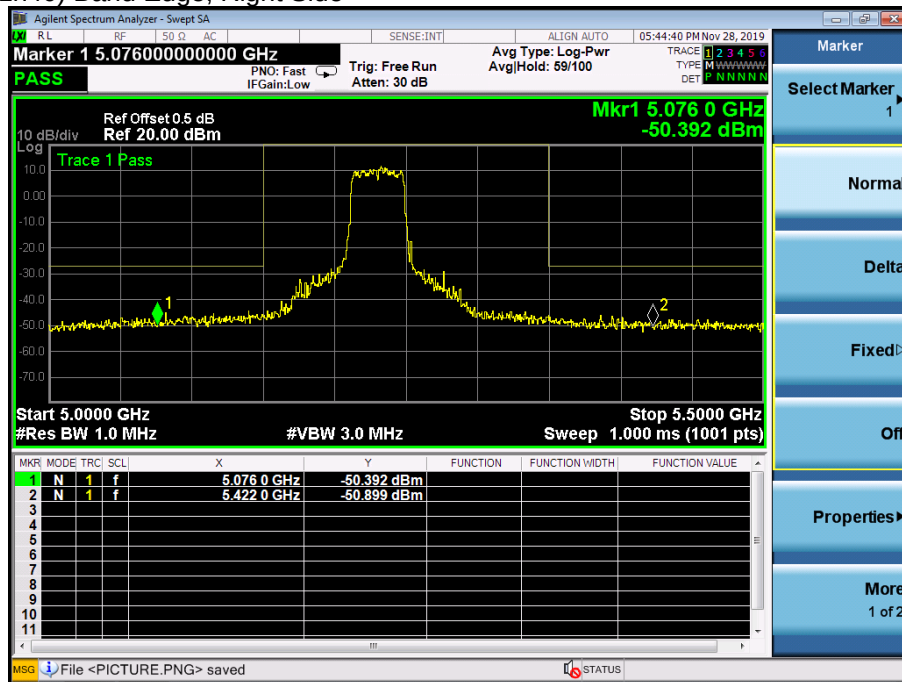




5.180~5.240 GHz

(802.11ac20) Band Edge, Left Side

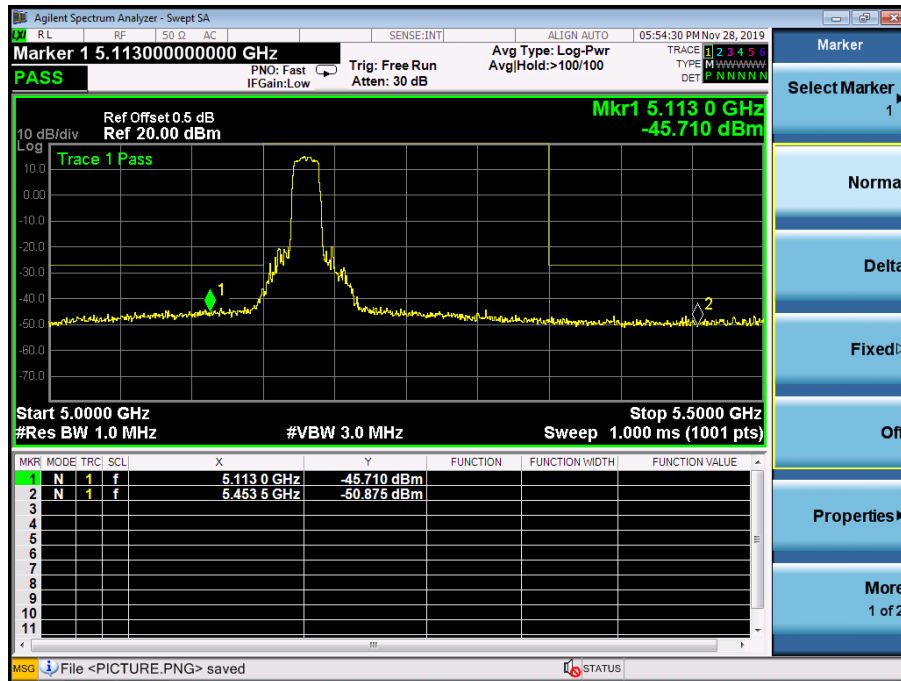


(802.11ac20) Band Edge, Right Side

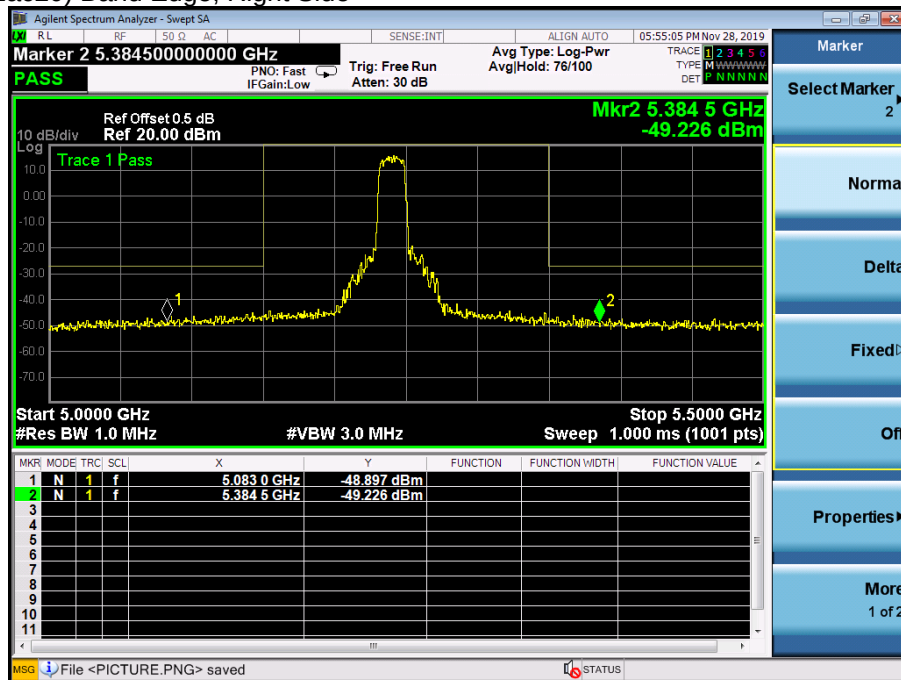




5.180~5.240 GHz

(802.11ac40) Band Edge, Left Side

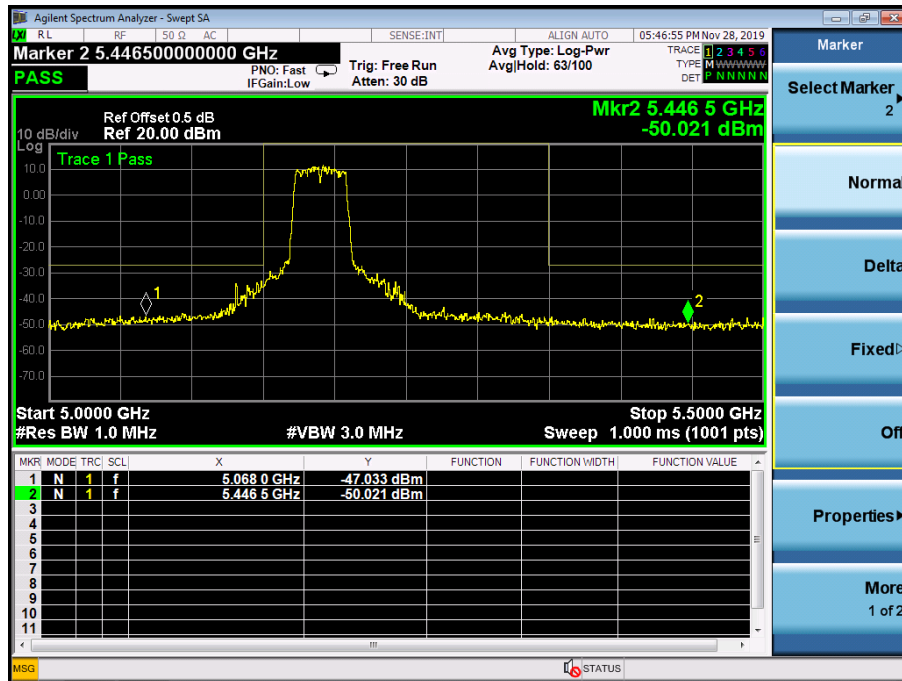


(802.11ac40) Band Edge, Right Side

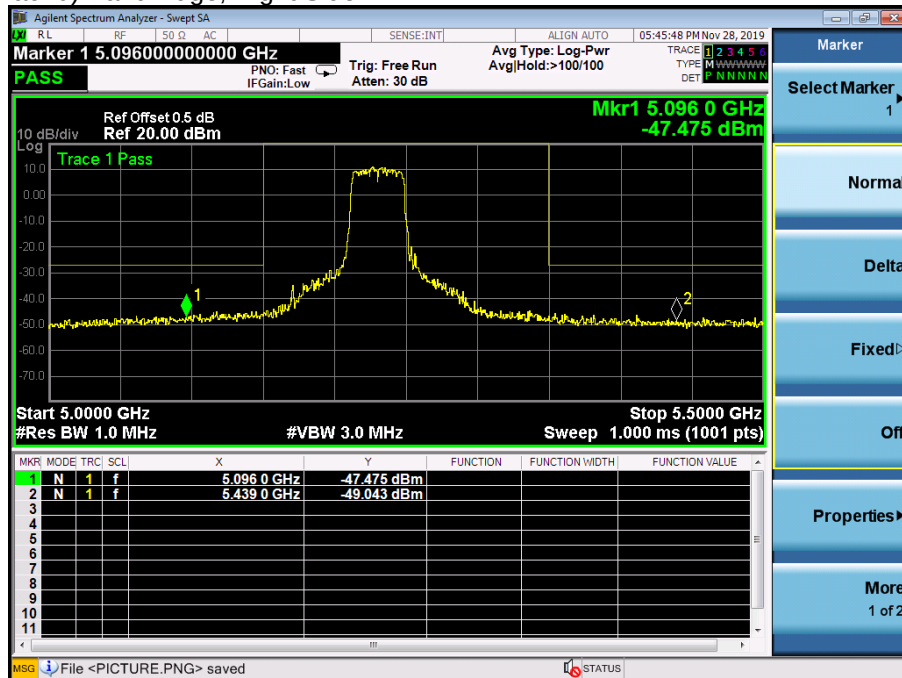




5.180~5.240 GHz

(802.11 ac80) Band Edge, Left Side

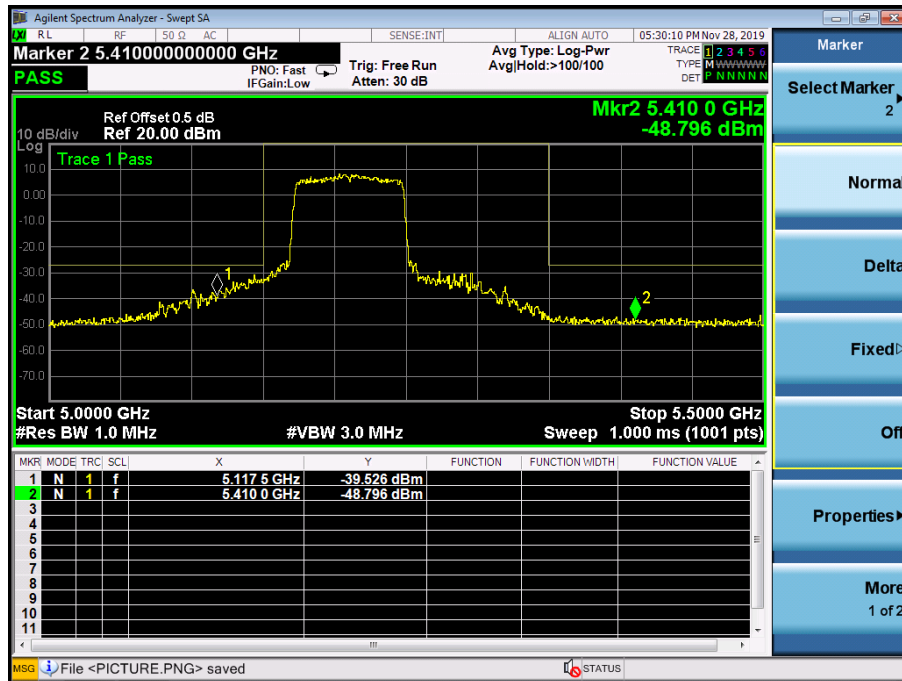

(802.11ac80) Band Edge, Right Side

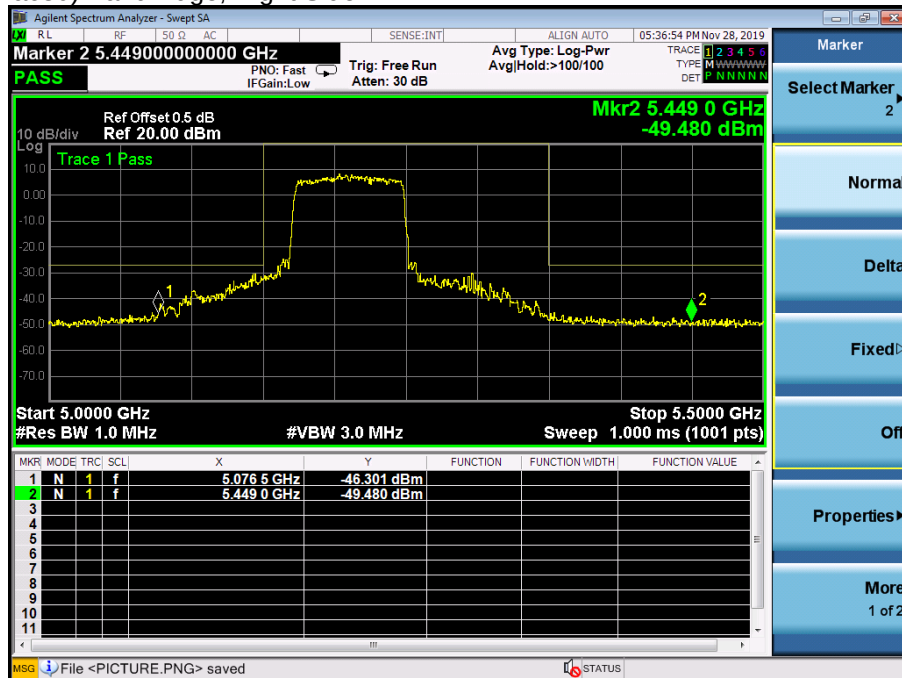




Antenna A: 5745-58250MHz


5.8G

5.745~5.825 GHz

(802.11a) Band Edge, Left Side

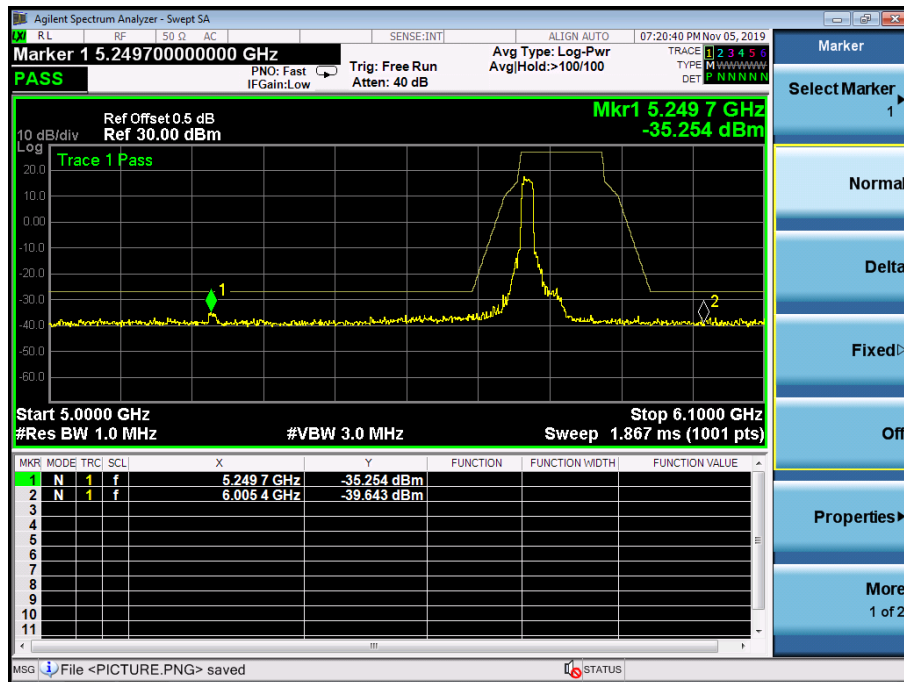


(802.11a) Band Edge, Right Side

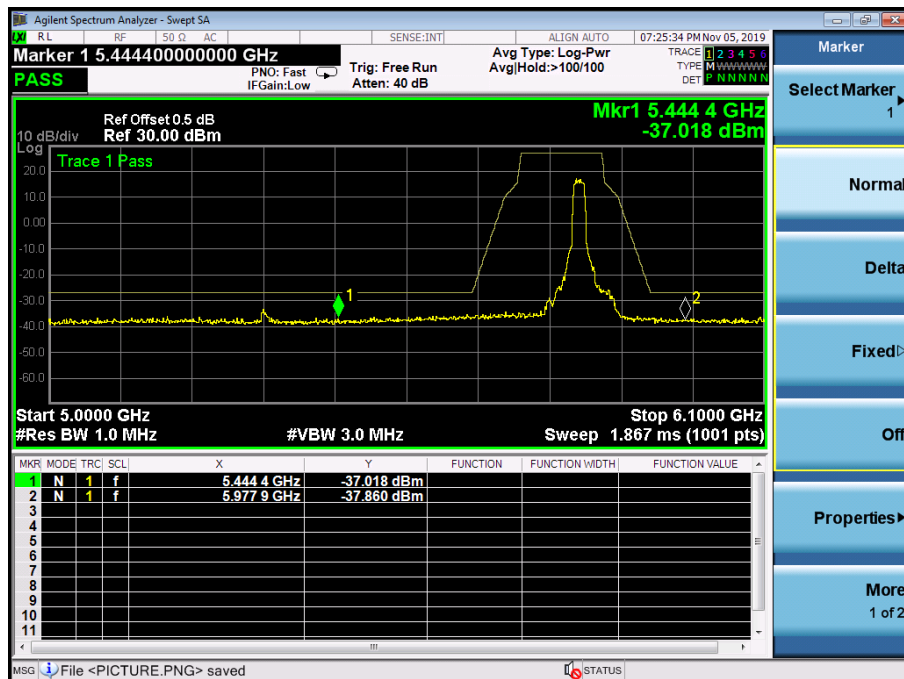




(802.11 n20) Band Edge, Left Side

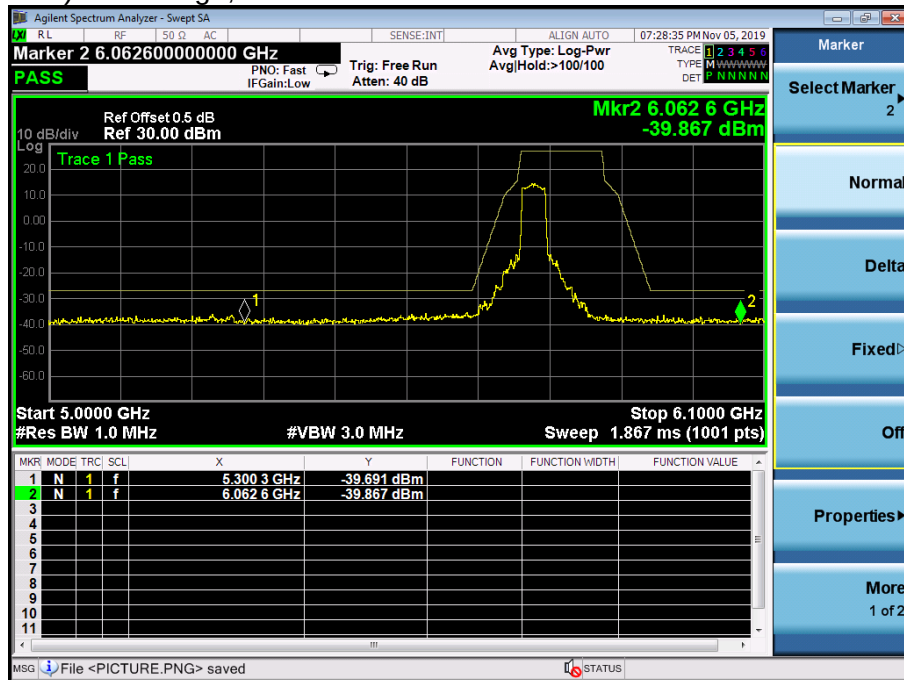


(802.11n20) Band Edge, Right Side

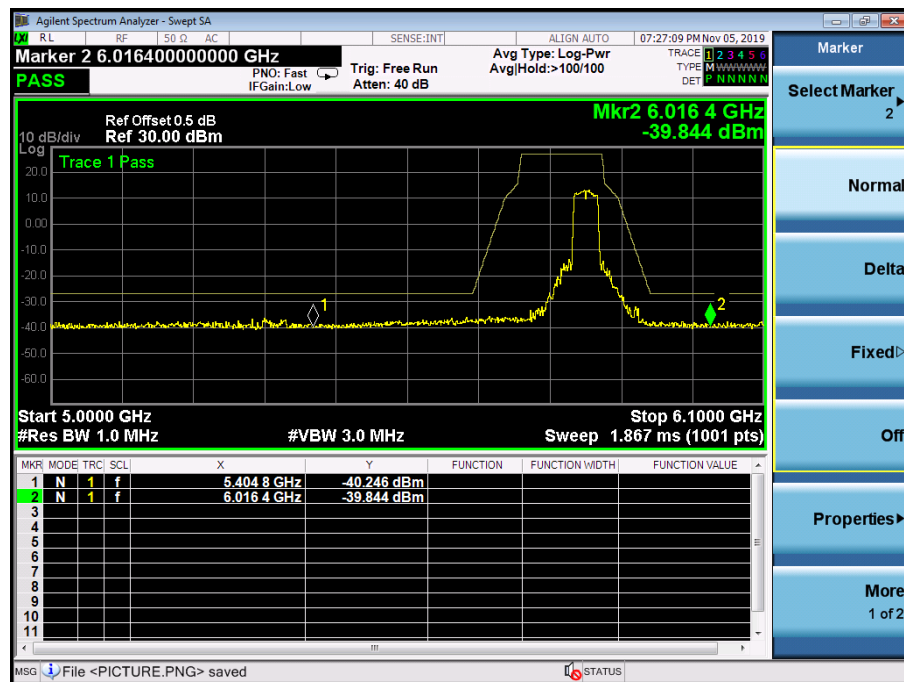




5.745~5.825 GHz

(802.11n40) Band Edge, Left Side

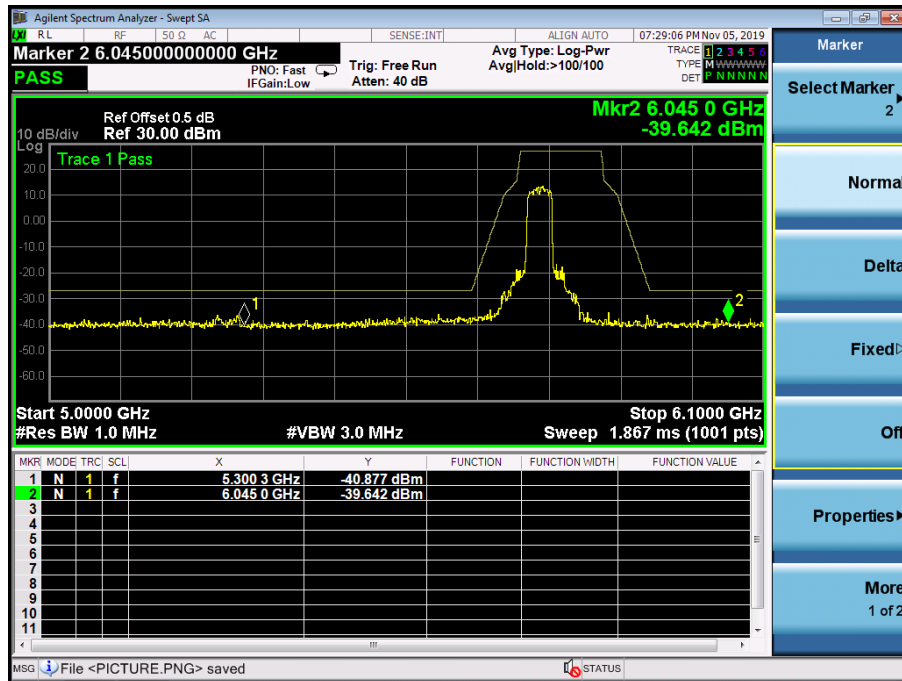


(802.11n40) Band Edge, Right Side

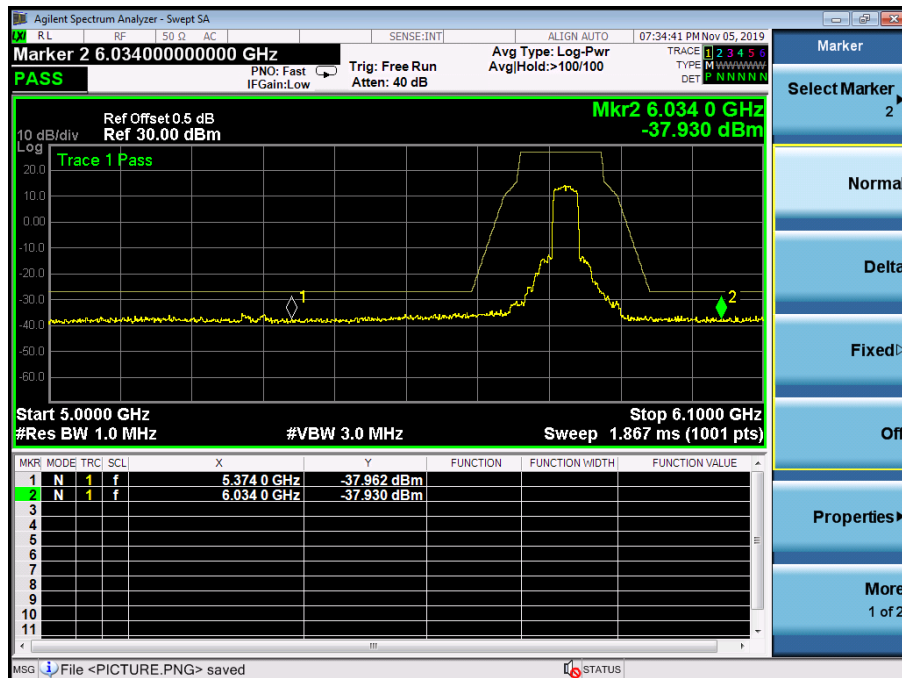




5.745~5.825 GHz

(802.11ac20) Band Edge, Left Side

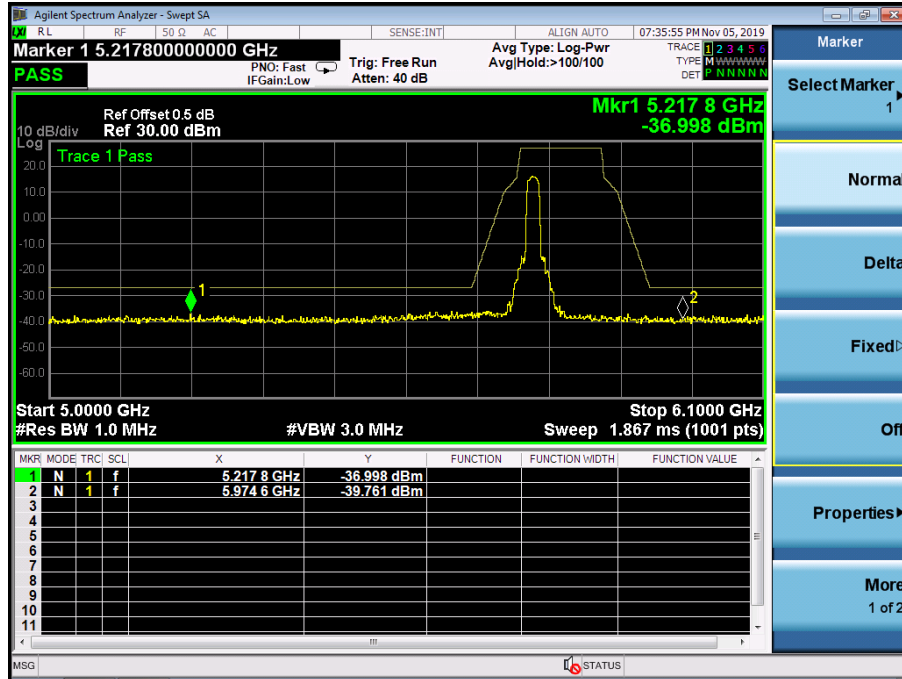


(802.11 ac20) Band Edge, Right Side

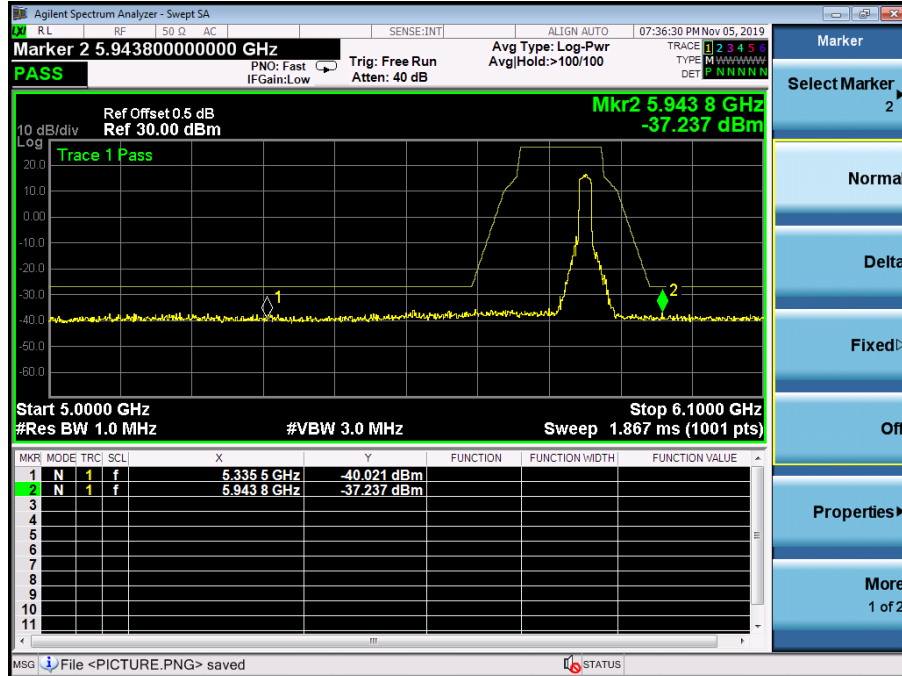




5.745~5.825 GHz

(802.11ac40) Band Edge, Left Side

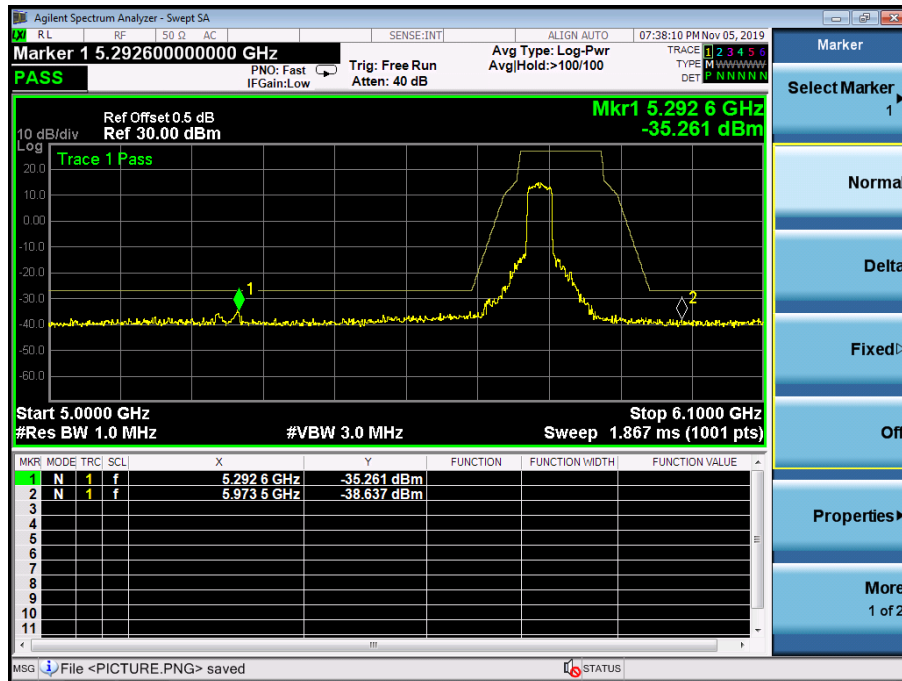


(802.11ac40) Band Edge, Right Side

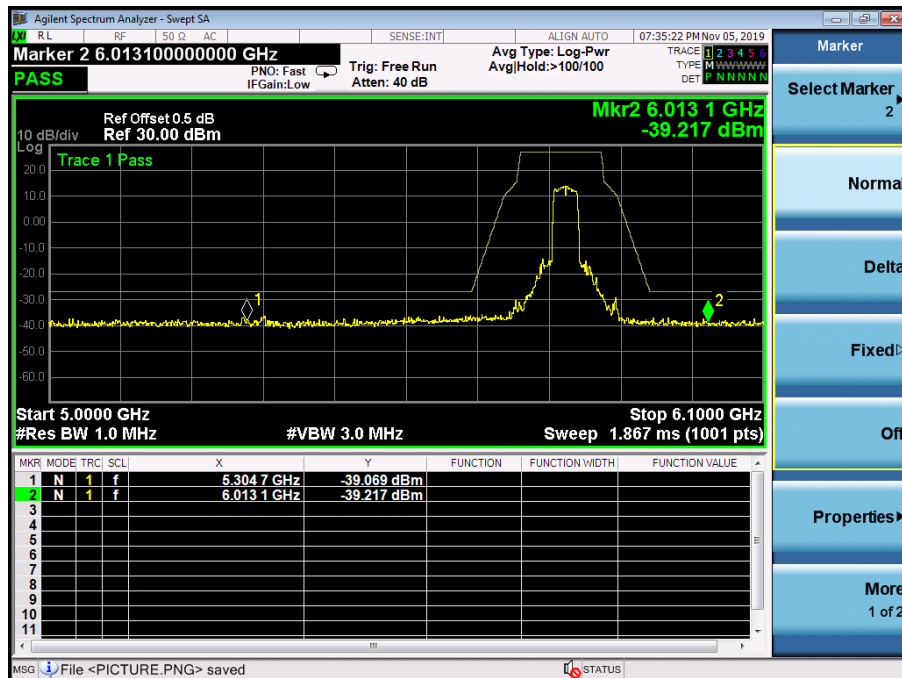




5.745~5.825 GHz

(802.11ac80) Band Edge, Left Side

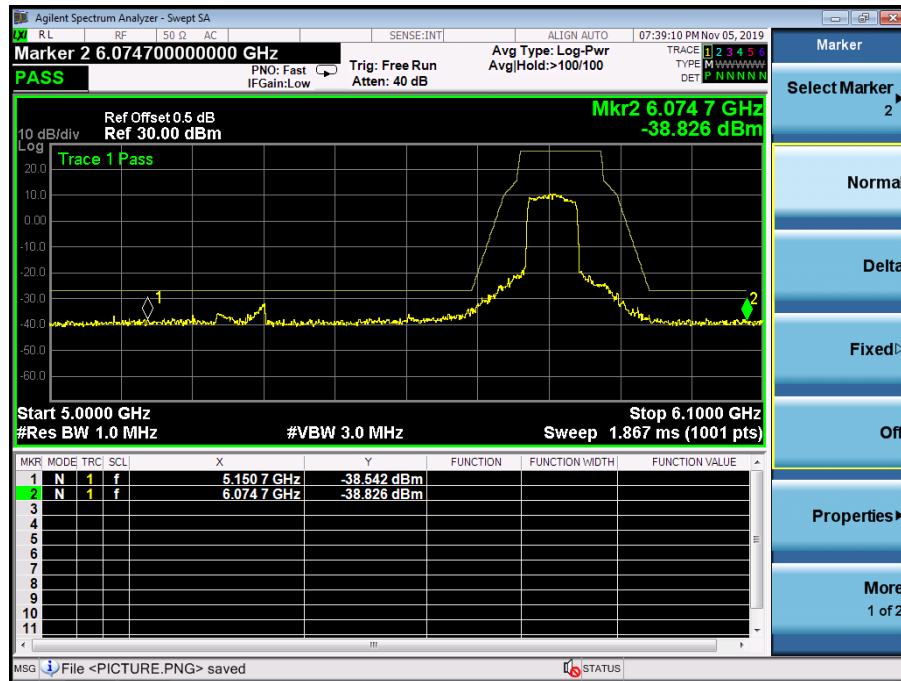

(802.11ac80) Band Edge, Right Side

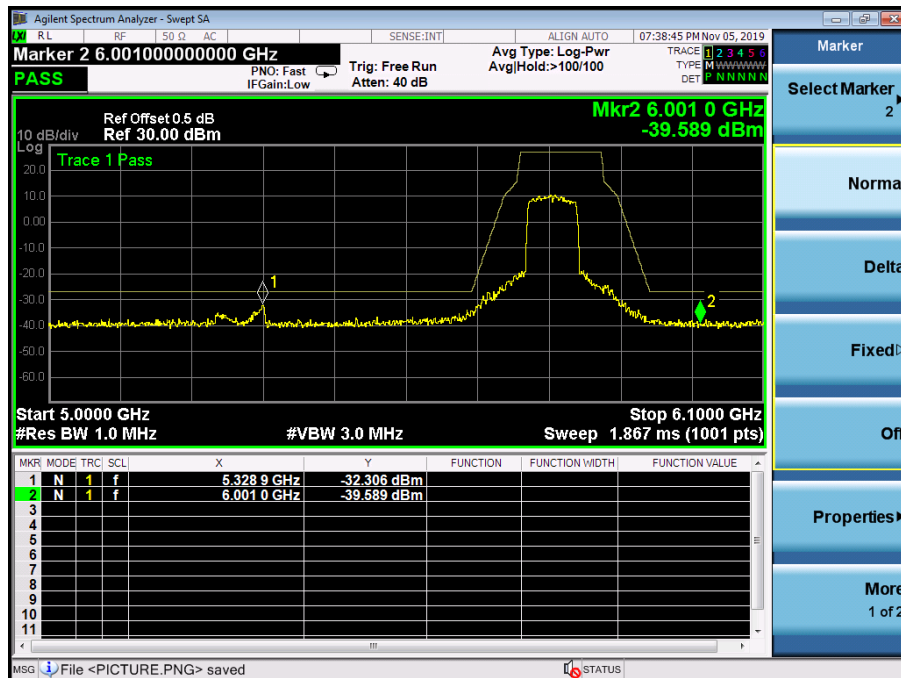





Radiated bandedge

802.11 a(Antenna A)

For the frequency band 5180-5240MHz

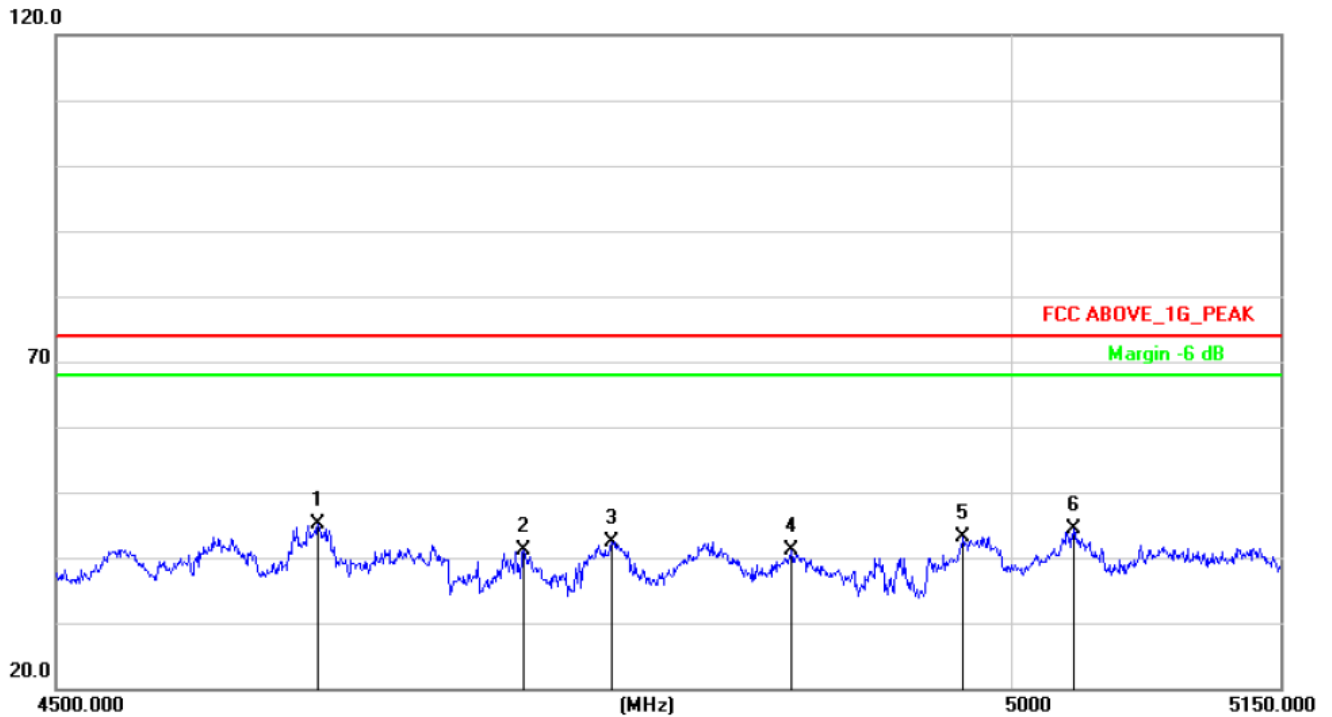

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4631.950	45.65	-0.55	45.10	74.00	-28.90	peak
2	4738.550	41.66	-0.48	41.18	74.00	-32.82	peak
3	4784.700	42.73	-0.44	42.29	74.00	-31.71	peak
4	4880.250	41.49	-0.38	41.11	74.00	-32.89	peak
5	4973.200	43.34	-0.31	43.03	74.00	-30.97	peak
6	5034.300	44.63	-0.14	44.49	74.00	-29.51	peak

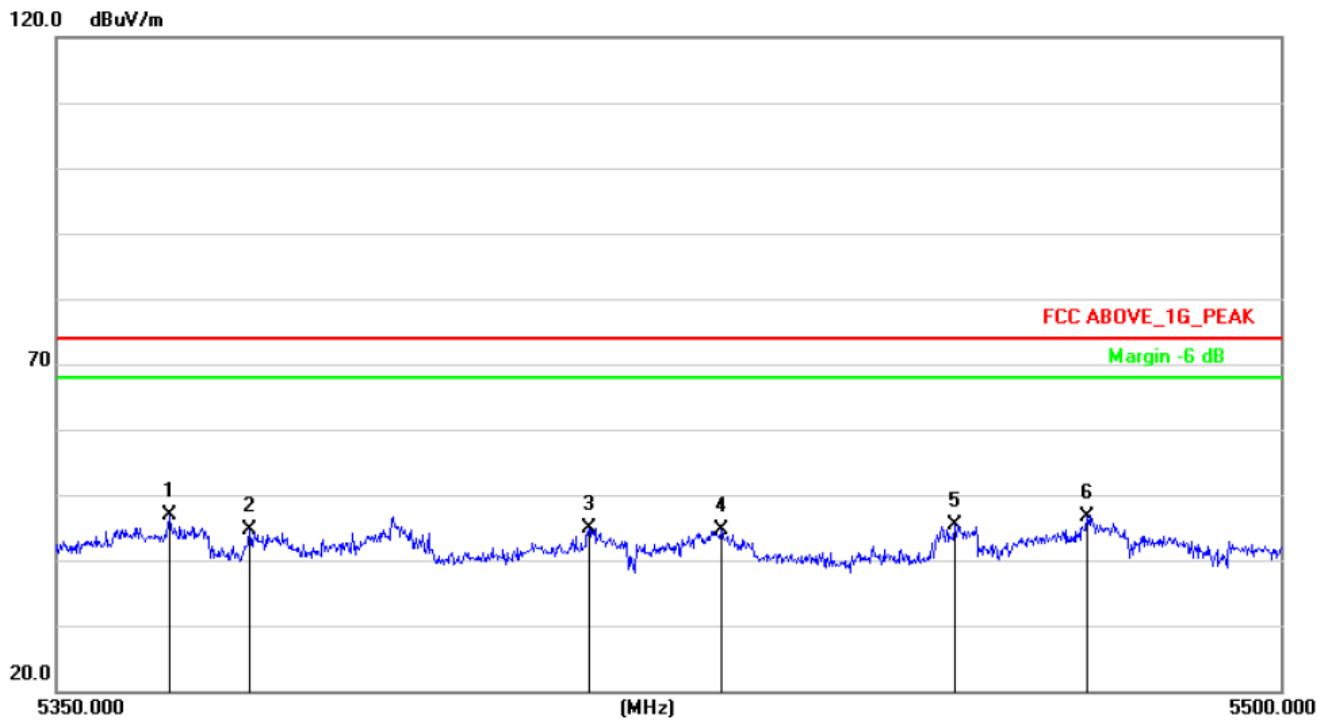

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	5363.800	45.65	1.26	46.91	74.00	-27.09	peak
2	5373.550	43.22	1.30	44.52	74.00	-29.48	peak
3	5414.800	43.46	1.47	44.93	74.00	-29.07	peak
4	5431.000	43.05	1.54	44.59	74.00	-29.41	peak
5	5459.800	43.78	1.66	45.44	74.00	-28.56	peak
6	5476.150	45.02	1.73	46.75	74.00	-27.25	peak

Note:


1. This EUT was tested in 802.11a/n(HT20), n(HT40) mode and 802.11a (Antenna A) the worst case position data was reported.



802.11n(HT20)

For the frequency band 5745-5825MHz


Low Channel

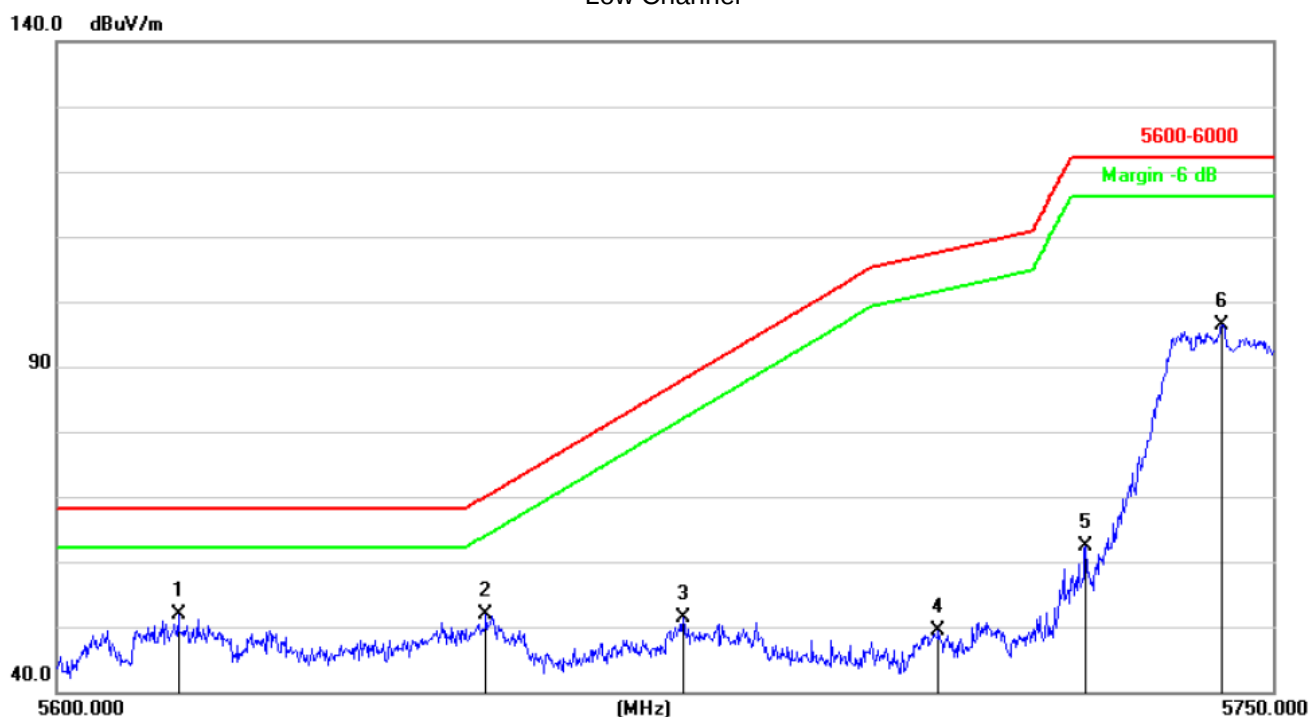


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5614.850	49.45	2.32	51.77	68.20	-16.43	peak
2	5652.500	49.38	2.48	51.86	70.06	-18.20	peak
3	5676.800	48.86	2.59	51.45	88.07	-36.62	peak
4	5708.450	46.60	2.72	49.32	107.57	-58.25	peak
5	5726.750	59.57	2.80	62.37	122.20	-59.83	peak
6	5743.700	93.55	2.87	96.42	122.20	-25.78	peak



Middle Channel

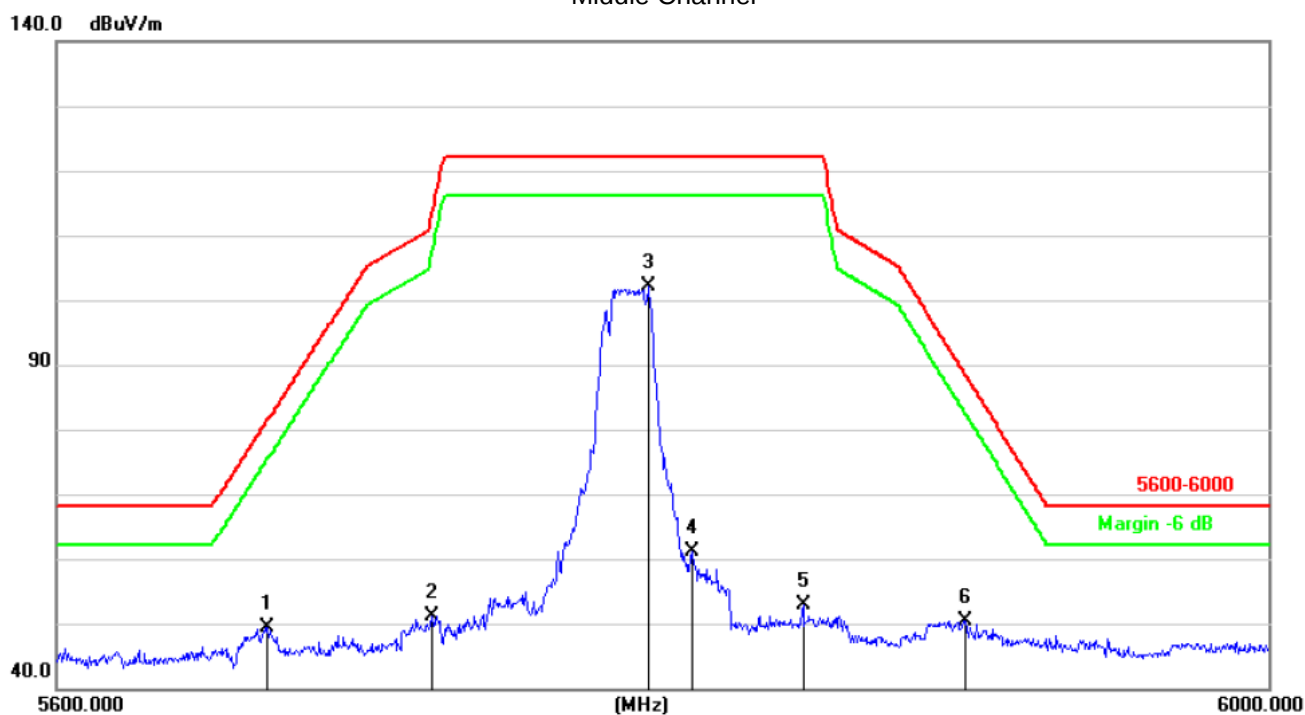

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5668.000	46.85	2.55	49.40	81.56	-32.16	peak
2	5721.200	48.41	2.78	51.19	113.54	-62.35	peak
3	5792.000	98.93	3.08	102.01	122.20	-20.19	peak
4	5806.800	57.92	3.14	61.06	122.20	-61.14	peak
5	5843.200	49.63	3.29	52.92	122.20	-69.28	peak
6	5897.600	46.81	3.52	50.33	88.44	-38.11	peak

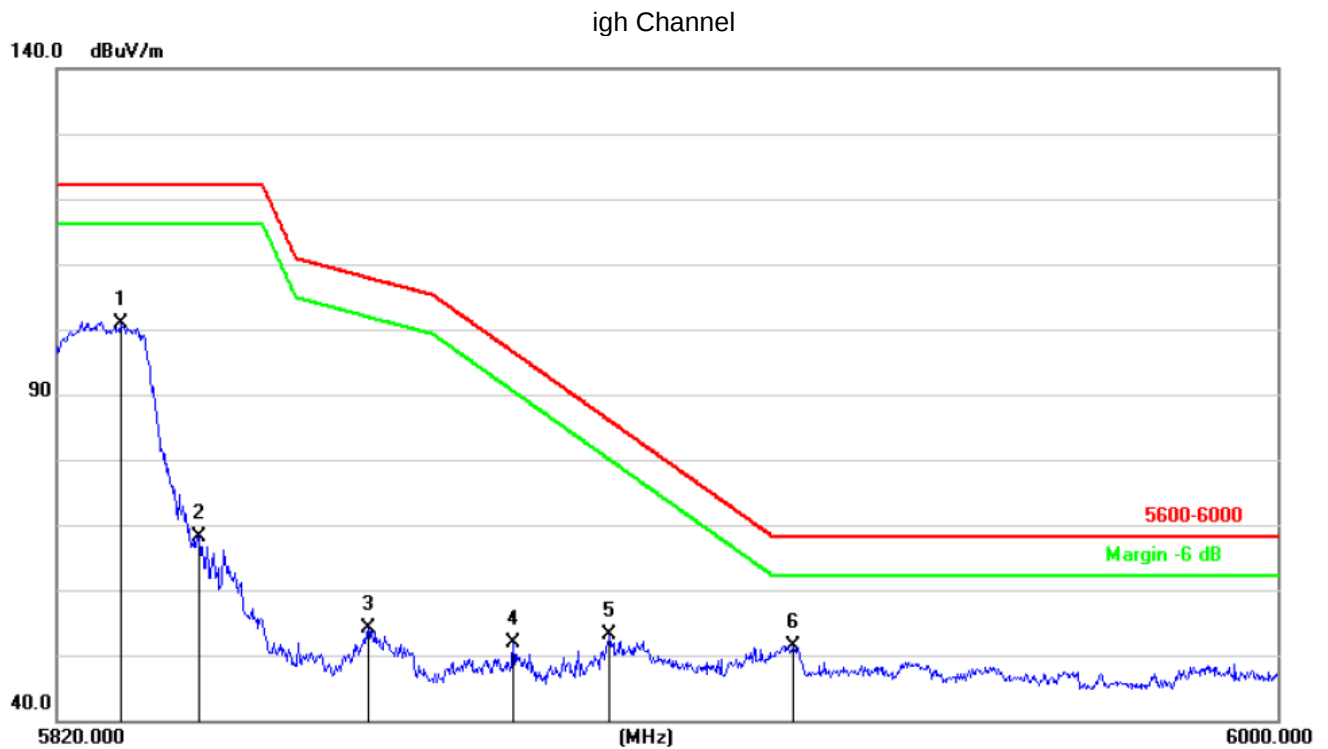

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5829.540	97.62	3.24	100.86	122.20	-21.34	peak
2	5840.880	64.95	3.28	68.23	122.20	-53.97	peak
3	5865.540	50.64	3.39	54.03	107.85	-53.82	peak
4	5886.780	48.43	3.48	51.91	96.45	-44.54	peak
5	5901.000	49.52	3.54	53.06	85.92	-32.86	peak
6	5928.000	47.76	3.65	51.41	68.20	-16.79	peak

Note:

1. This EUT was tested in 802.11a/n/ac(HT20), n/ac(HT40), ac(HT80) mode and 802.11n(HT20) (Antenna A) the worst case position data was reported.