



EMI TEST REPORT


Test Report No. : 13174068H-R3

Applicant : HARTING K.K.
Type of EUT : rMICA-vibration (RF Sensor Box)
Model Number of EUT : 72RMICAVIBR11
FCC ID : 2AVNORMICAV
Test regulation : FCC Part 15 Subpart B: 2020 Class A
Test Result : Complied (Refer to SECTION 3.2)


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 13174068H-R2. 13174068H-R2 is replaced with this report.

Date of test: November 1, 2020

Representative test engineer:


Masaya Minami
Engineer
Consumer Technology Division

Approved by:


Shinichi Miyazono
Engineer
Consumer Technology Division



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13174068H

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13174068H	December 17, 2020	-	-
1	13174068H-R1	January 18, 2021	P.11	Correction of the Test distance in Clause 5.4; from 3 m to 10 m
1	13174068H-R1	January 18, 2021	P.12	Correction of the Test distance in Figure 2 (1 GHz – 5 GHz drawing); from 3 m to 10 m
1	13174068H-R1	January 18, 2021	P.15, 16	Data replacement by limit correction
2	13174068H-R2	January 20, 2021	P.10	Addition of the No. I and Cable 6 in configuration diagram and list for Clause 4.2.
2	13174068H-R2	January 20, 2021	P.12	Correction of the Test distance in Figure 2 (1 GHz - 5 GHz drawing); from 10 m to 3 m
3	13174068H-R3	January 25, 2021	P.10	Correction of Model number and Serial number for the No. I and Cable length for No.6 in configuration diagram and list for Clause 4.2; < No. I > From Model number: AD-A240P80 Serial number: 001 To Model number: AD-B240P100 Serial number: 1913 <Cable length for No.6> From 1.6 m to 3.6

Reference: Abbreviations (Including words undescribed in this report)

AAN	Asymmetric Artificial Network	ILAC	International Laboratory Accreditation Conference
AC	Alternating Current	ISED	Innovation, Science and Economic Development Canada
AM	Amplitude Modulation	ISN	Impedance Stabilization Network
AMN	Artificial Mains Network	ISO	International Organization for Standardization
Amp, AMP	Amplifier	JAB	Japan Accreditation Board
ANSI	American National Standards Institute	LAN	Local Area Network
Ant, ANT	Antenna	LCL	Longitudinal Conversion Loss
AP	Access Point	LIMS	Laboratory Information Management System
ASK	Amplitude Shift Keying	LISN	Line Impedance Stabilization Network
Atten., ATT	Attenuator	MRA	Mutual Recognition Arrangement
AV	Average	N/A	Not Applicable
BPSK	Binary Phase-Shift Keying	NIST	National Institute of Standards and Technology
BR	Bluetooth Basic Rate	NS	No signal detect.
BT	Bluetooth	NSA	Normalized Site Attenuation
BT LE	Bluetooth Low Energy	NVLAP	National Voluntary Laboratory Accreditation Program
BW	BandWidth	OBW	Occupied Band Width
C.F	Correction Factor	OFDM	Orthogonal Frequency Division Multiplexing
Cal Int	Calibration Interval	PK	Peak
CAV	CISPR AV	P _{LT}	long-term flicker severity
CCK	Complementary Code Keying	POHC(A)	Partial Odd Harmonic Current
CDN	Coupling Decoupling Network	Pol., Pola.	Polarization
Ch., CH	Channel	PR-ASK	Phase Reversal ASK
CISPR	Comite International Special des Perturbations Radioelectriques	P _{ST}	short-term flicker severity
Corr.	Correction	QAM	Quadrature Amplitude Modulation
CPE	Customer premise equipment	QP	Quasi-Peak
CW	Continuous Wave	QPSK	Quadri-Phase Shift Keying
DBPSK	Differential BPSK	r.m.s., RMS	Root Mean Square
DC	Direct Current	RBW	Resolution Band Width
DET	Detector	RE	Radio Equipment
D-factor	Distance factor	REV	Reverse
Dmax	maximum absolute voltage change during an observation period	RF	Radio Frequency
DQPSK	Differential QPSK	RFID	Radio Frequency Identifier
DSSS	Direct Sequence Spread Spectrum	RSS	Radio Standards Specifications
EDR	Enhanced Data Rate	Rx	Receiving
e.i.r.p., EIRP	Equivalent Isotropically Radiated Power	SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
EM clamp	Electromagnetic clamp	S/N	Signal to Noise ratio
EMC	ElectroMagnetic Compatibility	SA, S/A	Spectrum Analyzer
EMI	ElectroMagnetic Interference	SG	Signal Generator
EMS	ElectroMagnetic Susceptibility	SVSWR	Site-Voltage Standing Wave Ratio
EN	European Norm	THC(A)	Total Harmonic Current
e.r.p., ERP	Effective Radiated Power	THD(%)	Total Harmonic Distortion
EU	European Union	TR	Test Receiver
EUT	Equipment Under Test	Tx	Transmitting
Fac.	Factor	VBW	Video BandWidth
FCC	Federal Communications Commission	Vert.	Vertical
FHSS	Frequency Hopping Spread Spectrum	WLAN	Wireless LAN
FM	Frequency Modulation	xDSL	Generic term for all types of DSL technology (DSL: Digital Subscriber Line)
Freq.	Frequency		
FSK	Frequency Shift Keying		
Fund	Fundamental		
FWD	Forward		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
I/O	Input/Output		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Radiated Emission.....	11
APPENDIX 1: Test data	13
Radiated Emission	13
APPENDIX 2: Test instruments	17
APPENDIX 3: Photographs of test setup	18
Radiated Emission	18
Worst Case Position.....	20

SECTION 1: Customer information

Company Name	:	HARTING K.K.
Address	:	YusenShinYokohama1Bldg 2F, 1-7-9 ShinYokohama, Kohoku-ku, Yokohama, 2220033 Japan
Telephone Number	:	+81-45-476-3456
Facsimile Number	:	+81-45-476-3466
Contact Person	:	Kenji Nogata

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model Number of EUT on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT. during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type	:	rMICA-vibration (RF Sensor Box)
Model Number	:	72RMICAVIBR11
Serial Number	:	Refer to SECTION 4.2
Rating	:	DC 2.1 V to 3.6 V
Receipt Date	:	October 25, 2020
Country of Mass-production	:	Taiwan
Condition	:	Production model
Modification	:	No Modification by the test lab

2.2 Product Description

Model: 72RMICAVIBR11 (referred to as the EUT in this report) is a rMICA-vibration (RF Sensor Box).

General Specification

Clock frequency (Maximum)	:	32 MHz
Operating temperature range	:	-25 deg. C to +75 deg. C

Radio Specification*

Sub GHz

Radio Type	:	Transceiver
Frequency of Operation	:	902 MHz to 928 MHz
Modulation	:	FSK
Antenna type	:	Dipole antenna
Antenna Gain	:	5 dBi

*The RF module is a FCC certificated module.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart B
FCC Part 15 final revised on October 13, 2020
Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result	Remarks
Conducted emission	FCC: ANSI C63.4: 2014 + C63.4a: 2017 7. AC power - line conducted emission measurements	FCC:Part 15 Subpart B 15.107(b)	N/A	N/A	N/A	*1)
Radiated emission	FCC: ANSI C63.4: 2014 + C63.4a: 2017 8. Radiated emission measurements	FCC: Part 15 Subpart B 15.109(b)	N/A	2.4 dB 35.908 MHz, Vertical, QP	Complied# a)	-
*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line. a) Refer to APPENDIX 1 (data of Radiated Emission)						
Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.						

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	5.0 dB
	200 MHz to 1000 MHz (Horizontal)	5.2 dB
	(Vertical)	6.3 dB
10 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	4.8 dB
	200 MHz to 1000 MHz (Horizontal)	5.0 dB
	(Vertical)	5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

* A2LA Certificate Number: 5107.02/ FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

Mode	Remarks
Mode 1	Normal operation mode
Mode 2	Standby mode
*EUT was set by the software as follows; Software: (MPU) rMICA_vibration_xbee Version SX082420 (DIGI SX920 module) XbeeSX Version 9007	

*The test signal level was confirmed to be sufficient to stabilize the local oscillator of the EUT.

* It was confirmed by using checker that the EUT receives the signal from the transmitter (pair of EUT).

4.2 Configuration and peripherals

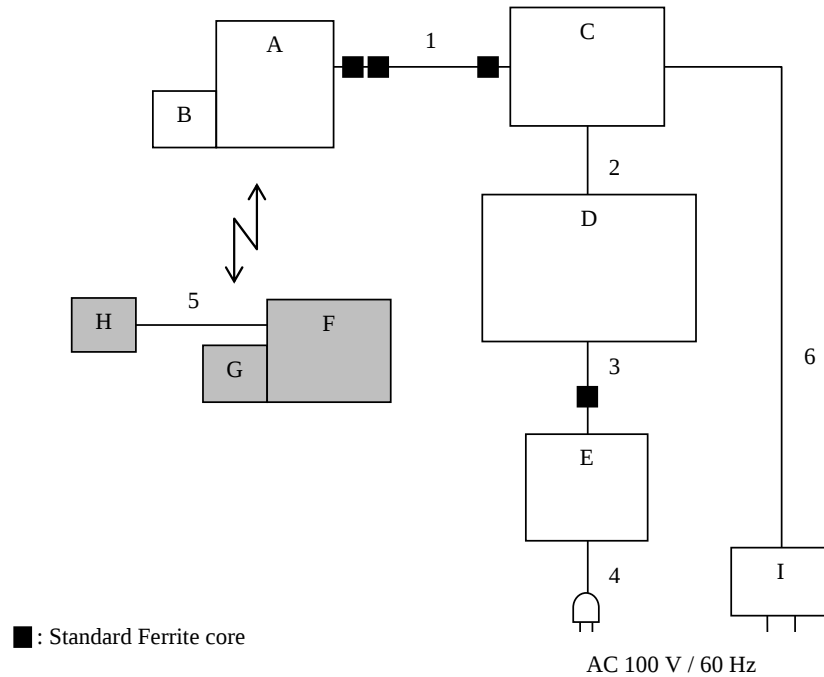

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	USB RF Reciever	72RMICAMSTR11	0013A200 418EB7FD	HARTING K.K.	-
B	Antenna	A09-HASM-7	001	DIGI International	-
C	MICA-R BASIC	72MRSN1000R20	1049630200FB	HARTING K.K.	-
D	Laptop PC	CF-N8HWCDPS	0CKSA09265	Panasonic	-
E	AC Adapter	CF-AA6372B	6372BM610X10953E	Panasonic	-
F	RF Sensor BOX	72RMICAVIBR11	0013A200 418EB7DF	HARTING K.K.	EUT
G	Antenna	A09-HASM-7	001	DIGI International	EUT
H	Sensor	72SMICAACCR01	001	HARTING K.K.	EUT
I	AC Adapter	AD-B240P100	1913	XIAMEN UME ELECTRONICS CO.,LTD	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	USB Cable	2.0	Shielded	Shielded	-
2	LAN Cable	2.0	Unshielded	Unshielded	-
3	DC Cable	1.0	Unshielded	Unshielded	-
4	AC Cable	0.8	Unshielded	Unshielded	-
5	Signal Cable	2.0	Shielded	Shielded	-
6	DC Cable	3.6	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Emission

5.1 Operating environment

Test place : No.1 semi anechoic chamber
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 3.

5.3 Test conditions

Frequency range : 30 MHz - 200 MHz (Biconical antenna) / 200 MHz - 1000 MHz (Logperiodic antenna)
1000 MHz - 5000 MHz (Horn antenna)
Test distance : 10 m (30 MHz - 1000 MHz) / 3 m (1000 MHz - 5000 MHz)
EUT position : Table top
EUT operation mode : See Clause 4.1

5.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver.

The radiated emission measurements were made with the following detector function of the Test Receiver.

For above 1 GHz, test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.


Frequency	Below 1GHz	Above 1GHz *1)
Instrument used	Test Receiver	Test Receiver
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CISPR AV: BW 1 MHz

*1) The measurement data was adjusted to a 10 m distance using the following Distance Factor.

Distance Factor: See Figure 2.

Figure 2: Test Setup


Below 1 GHz

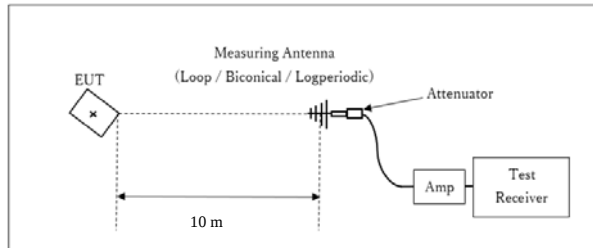

x : Center of turn table

Test Distance: 10 m

1 GHz - 5 GHz

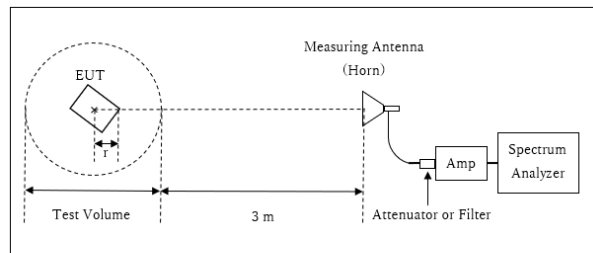

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log(3.9 \text{ m} / 10.0 \text{ m}) = -8.18 \text{ dB}$

* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.9 \text{ m}$

Test Volume: 2 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.1 \text{ m}$

The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at representative X-axis since no difference was found among each position.

5.5 Test result

Summary of the test results: Pass

The limit is rounded down to one decimal place.

The test result is rounded off to one or two decimal places, so some differences might be observed.

Date: November 1, 2020


Test engineer: Masaya Minami

APPENDIX 1: Test data

Radiated Emission

Report No. 13174068H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date November 1, 2020
Temperature / Humidity 21 deg. C / 55 % RH
Engineer Masaya Minami
(Below 1 GHz)
Mode Mode 1

Limit : FCC_Part 15 Subpart B(15.109)_Class A

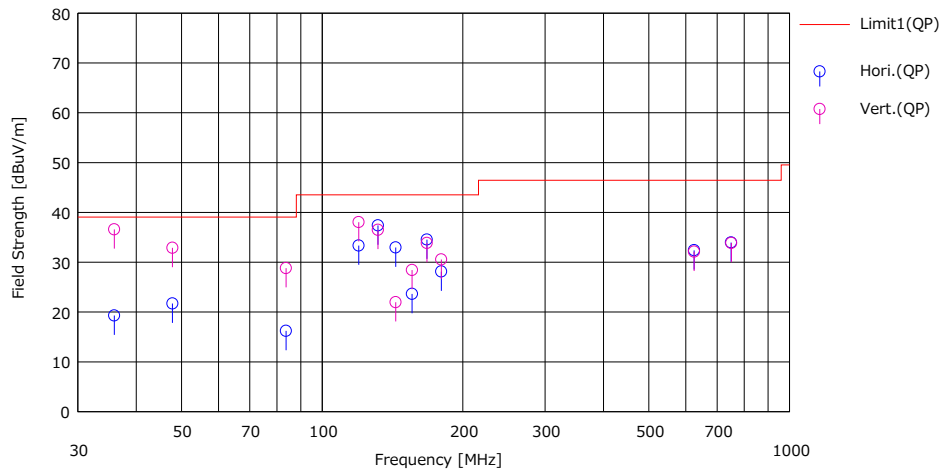

No.	Freq. [MHz]	Reading (QP)	Ant.Fac (dB/m)	Loss (dB)	Gain (dB)	Result (QP)	Limit (QP)	Margin (QP)	Pola. (H/V)	Height (cm)	Angle (deg)	Ant. Type	Comment
		[dBuV]				[dBuV/m]	[dBuV/m]						
1	35.908	34.60	16.06	7.44	38.81	19.29	39.08	19.7	Hori.	400	357	BA	
2	47.841	41.10	11.73	7.68	38.82	21.69	39.08	17.3	Hori.	390	323	BA	
3	83.690	39.40	7.38	8.30	38.88	16.20	39.08	22.8	Hori.	357	4	BA	
4	119.750	50.90	12.61	8.79	38.95	33.35	43.52	10.1	Hori.	356	39	BA	
5	131.652	53.70	13.69	8.94	38.94	37.39	43.52	6.1	Hori.	395	8	BA	
6	143.632	48.30	14.50	9.10	38.94	32.96	43.52	10.5	Hori.	395	163	BA	
7	155.704	38.20	15.13	9.24	38.94	23.63	43.52	19.8	Hori.	390	171	BA	
8	167.540	48.50	15.62	9.37	38.94	34.55	43.52	8.9	Hori.	353	185	BA	
9	179.820	41.50	16.06	9.50	38.93	28.13	43.52	15.3	Hori.	369	177	BA	
10	62.4990	38.40	19.20	13.00	38.20	32.40	46.44	14.0	Hori.	100	274	LA20	
11	75.0000	38.40	20.01	13.75	38.20	33.96	46.44	12.4	Hori.	100	151	LA20	
12	35.908	51.90	16.06	7.44	38.81	36.59	39.08	2.4	Vert.	100	14	BA	
13	47.841	52.30	11.72	7.68	38.82	32.88	39.08	6.2	Vert.	131	14	BA	
14	83.690	52.10	7.30	8.30	38.88	28.82	39.08	10.2	Vert.	140	4	BA	
15	119.750	55.60	12.61	8.79	38.95	38.05	43.52	5.4	Vert.	120	4	BA	
16	131.652	52.80	13.69	8.94	38.94	36.49	43.52	7.0	Vert.	139	9	BA	
17	143.632	37.30	14.50	9.10	38.94	21.96	43.52	21.5	Vert.	151	10	BA	
18	155.704	43.00	15.13	9.24	38.94	28.43	43.52	15.0	Vert.	100	7	BA	
19	167.540	47.80	15.62	9.37	38.94	33.85	43.52	9.6	Vert.	164	8	BA	
20	179.820	43.90	16.06	9.50	38.93	30.53	43.52	12.9	Vert.	145	10	BA	
21	62.4990	38.10	19.20	13.00	38.20	32.10	46.44	14.3	Vert.	100	282	LA20	
22	75.0591	38.30	20.02	13.75	38.20	33.87	46.44	12.5	Vert.	100	151	LA20	

* Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission

Report No. 13174068H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date November 1, 2020
Temperature / Humidity 21 deg. C / 55 % RH
Engineer Masaya Minami
(Below 1 GHz)
Mode Mode 2

Limit : FCC_Part 15 Subpart B(15.109)_Class A

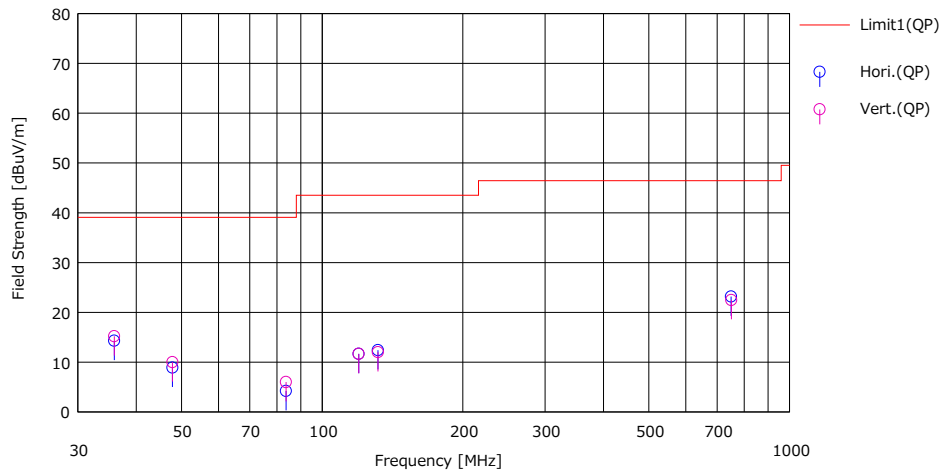

No.	Freq. [MHz]	Reading (QP)	Ant.Fac. (dB/m)	Loss (dB)	Gain (dB)	Result	Limit	Margi	Pola.	Height [cm]	Angle [deg]	Ant. Type	Comment
		(dBuV)				(dBuV/m)	(QP)	(QP)					
1	35.908	29.60	16.06	7.44	38.81	14.29	39.08	24.7	Hori.	40.0	9	BA	
2	47.841	28.30	11.73	7.68	38.82	8.89	39.08	30.1	Hori.	39.0	0	BA	
3	83.690	27.40	7.38	8.30	38.88	4.20	39.08	34.8	Hori.	38.9	4	BA	
4	119.750	29.20	12.61	8.79	38.95	11.65	43.52	31.8	Hori.	36.6	39	BA	
5	131.652	28.70	13.71	8.94	38.94	12.41	43.52	31.1	Hori.	39.5	8	BA	
6	750.000	27.60	20.01	13.75	38.20	23.16	46.44	23.2	Hori.	100	114	LA20	
7	35.908	30.50	16.06	7.44	38.81	15.19	39.08	23.8	Vert.	100	21	BA	
8	47.841	29.40	11.73	7.68	38.82	9.99	39.08	29.0	Vert.	131	14	BA	
9	83.690	29.20	7.38	8.30	38.88	6.00	39.08	33.0	Vert.	140	5	BA	
10	119.750	29.20	12.61	8.79	38.95	11.65	43.52	31.8	Vert.	120	1	BA	
11	131.652	28.30	13.71	8.94	38.94	12.01	43.52	31.5	Vert.	139	11	BA	
12	750.591	26.90	20.02	13.75	38.20	22.47	46.44	23.9	Vert.	100	155	LA20	

* Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission

Report No. 13174068H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date November 1, 2020
Temperature / Humidity 21 deg. C / 55 % RH
Engineer Masaya Minami
(Above 1 GHz)
Mode Mode 1

Limit : FCC_Part 15 Subpart B(15.109)_Class A

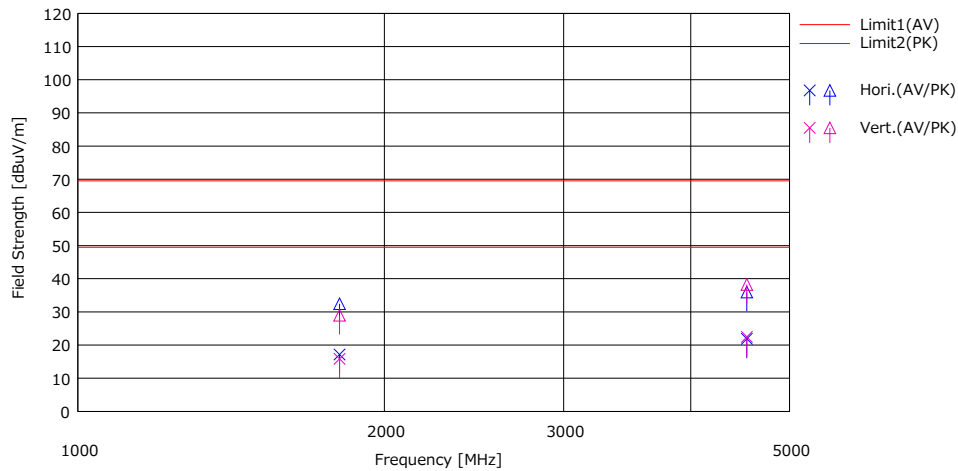

No.	Freq. [MHz]	Reading		Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1807.223	33.60	48.90	25.31	-5.17	36.57	17.17	32.47	49.50	69.50	32.3	37.0	Hori.	100	60	HA5	
2	4540.400	31.30	45.40	30.69	-4.13	36.00	21.86	35.96	49.50	69.50	27.6	33.5	Hori.	100	100	HA5	
3	1807.223	32.30	45.40	25.31	-5.17	36.57	15.87	28.97	49.50	69.50	33.6	40.5	Vert.	100	0	HA5	
4	4540.400	31.90	47.70	30.69	-4.13	36.00	22.46	38.26	49.50	69.50	27.0	31.2	Vert.	100	112	HA5	

* Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + Filter + D-factor) - GAIN(AMP)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission

Report No. 13174068H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date November 1, 2020
Temperature / Humidity 21 deg. C / 55 % RH
Engineer Masaya Minami
(Above 1 GHz)
Mode Mode 2

Limit : FCC_Part 15 Subpart B(15.109)_Class A

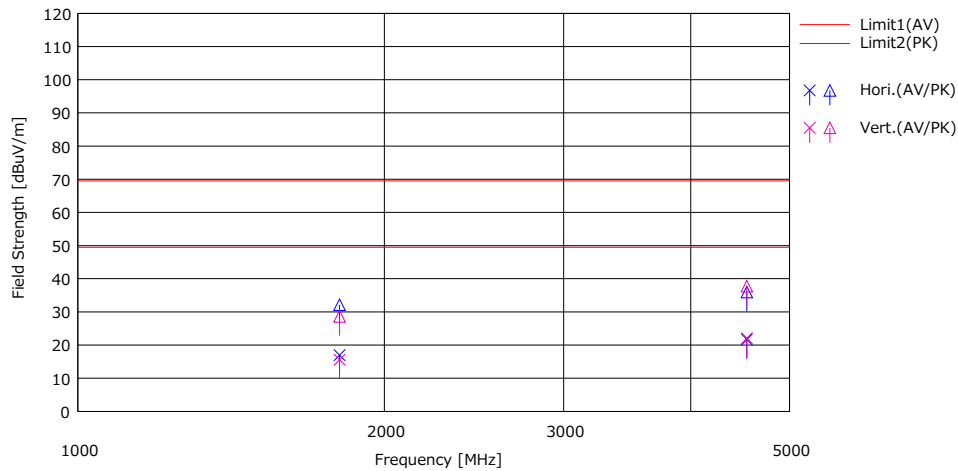

No.	Freq. [MHz]	Reading		Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1807.223	33.40	48.60	25.31	-5.17	36.57	16.97	32.17	49.50	69.50	32.5	37.3	Hori.	100	56	HA5	
2	4540.400	31.10	45.40	30.69	-4.13	36.00	21.66	35.96	49.50	69.50	27.8	33.5	Hori.	100	92	HA5	
3	1807.223	32.00	45.10	25.31	-5.17	36.57	15.57	28.67	49.50	69.50	33.9	40.8	Vert.	100	0	HA5	
4	4540.400	31.50	47.20	30.69	-4.13	36.00	22.06	37.76	49.50	69.50	27.4	31.7	Vert.	100	104	HA5	

* Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + Filter + D-factor) - GAIN(AMP)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	A08Q26	01/07/2020	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	08/18/2020	12
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	06/08/2020	24
RE	MAEC-01-SVSWR	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	04/16/2019	24
RE	MAT-08	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/14/2019	12
RE	KBA-05	141198	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	2513	04/22/2020	12
RE	MCC-02	141350	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	-	06/25/2020	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/03/2020	12
RE	MLA-20	141264	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-189	04/22/2020	12
RE	MPA-19	141585	Pre Amplifier	MITEQ	MLA-10K01-B01-35	1237616	02/10/2020	12
RE	MHA-05	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	253	09/01/2020	12
RE	MCC-216	141392	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 537073/126E(5 m)	02/18/2020	12
RE	MPA-01	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/20/2020	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124