

Antenna Passive TEST REPORT

Report No: DDT-B23090404-2E01

Applicant	:	Guangdong A-OK Technology Grand Development Co.,Ltd.
Applicant Address	:	Hexing Road South Side Sanhe Economic Development Zone.Huiyang Huizhou, Guangdong PEOPLE'S REPUBLIC OF CHINA
Equipment Under Test	:	AM25D-1/25-ES-E-Z
Model No.	:	AM25D-1.8/25-ES-E-Z
Trade Mark	:	AOK
Manufacturer	:	Guangdong A-OK Technology Grand Development Co.,Ltd.
Manufacturer Address	:	Hexing Road South Side Sanhe Economic Development Zone.Huiyang Huizhou, Guangdong PEOPLE'S REPUBLIC OF CHINA

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road Microelectronics Industrial Park, Development Area, Tianjin, China.

Tel: +86-22-58038033, **E-mail:** ddt@dgdt.com, <http://www.dgdttest.com>



REPORT

Test Report Declare

Applicant	:	Guangdong A-OK Technology Grand Development Co.,Ltd.
Address	:	Hexing Road South Side Sanhe Economic Development Zone.Huiyang Huizhou, Guangdong PEOPLE'S REPUBLIC OF CHINA
Equipment under Test	:	AM25D-1/25-ES-E-Z
Model No.	:	AM25D-1.8/25-ES-E-Z
Trade Mark	:	AOK
Manufacturer	:	Guangdong A-OK Technology Grand Development Co.,Ltd.
Address	:	Hexing Road South Side Sanhe Economic Development Zone.Huiyang Huizhou, Guangdong PEOPLE'S REPUBLIC OF CHINA

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

Report No:	DDT-B23090404-2E01		
Date of Receipt:	Sep. 04, 2023	Date of Test:	Sep. 18, 2023

Prepared By:

Approved By:

Novak Wei

Aaron Zhang

Novak Wei / Engineer

Aaron Zhang / RF Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 18, 2023	

COMMENT

1.	General TEST Information.....	5
1.1	Description of EUT.....	5
1.2	Accessories of EUT.....	5
1.3	Assistant equipment used for test.....	5
1.4	Block diagram of EUT configuration for test.....	5
1.5	Measurement uncertainty.....	5
1.6	Antenna Parameter.....	6
1.7	Test laboratory.....	6
2.	Near-field gain measurement.....	7
2.1	General Information.....	7
2.2	Test Equipment.....	7
2.3	Block Diagram of Test Setup.....	7
2.4	Test Procedure.....	7
2.5	Result.....	8
3.	Near-field pattern measurement.....	9
3.1	General Information.....	9
3.2	Test Equipment.....	9
3.3	Block Diagram of Test Setup.....	9
3.4	Test Procedure.....	9
3.5	Result.....	10
Annex A	Test Setup Photo.....	13
Annex B	EUT Photos.....	14

1. General TEST Information

1.1 Description of EUT

EUT Description	:	AM25D-1/25-ES-E-Z
Model Number	:	AM25D-1.8/25-ES-E-Z
Frequency Band	:	2400MHz-2500 MHz
Power Supply	:	N/A
Sample No	:	Y23090404-01
Note	:	N/A

1.2 Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

1.3 Assistant equipment used for test

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A


1.4 Block diagram of EUT configuration for test



1.5 Measurement uncertainty

Test Item	uncertainty
Near-field gain measurement	0.44 dB
Near-field pattern measurement	0.44 dB
Note: This uncertainty indicates that the extended uncertainty confidence interval is about 95% and the corresponding inclusion factor k=2 is obtained.	

1.6 Antenna Parameter

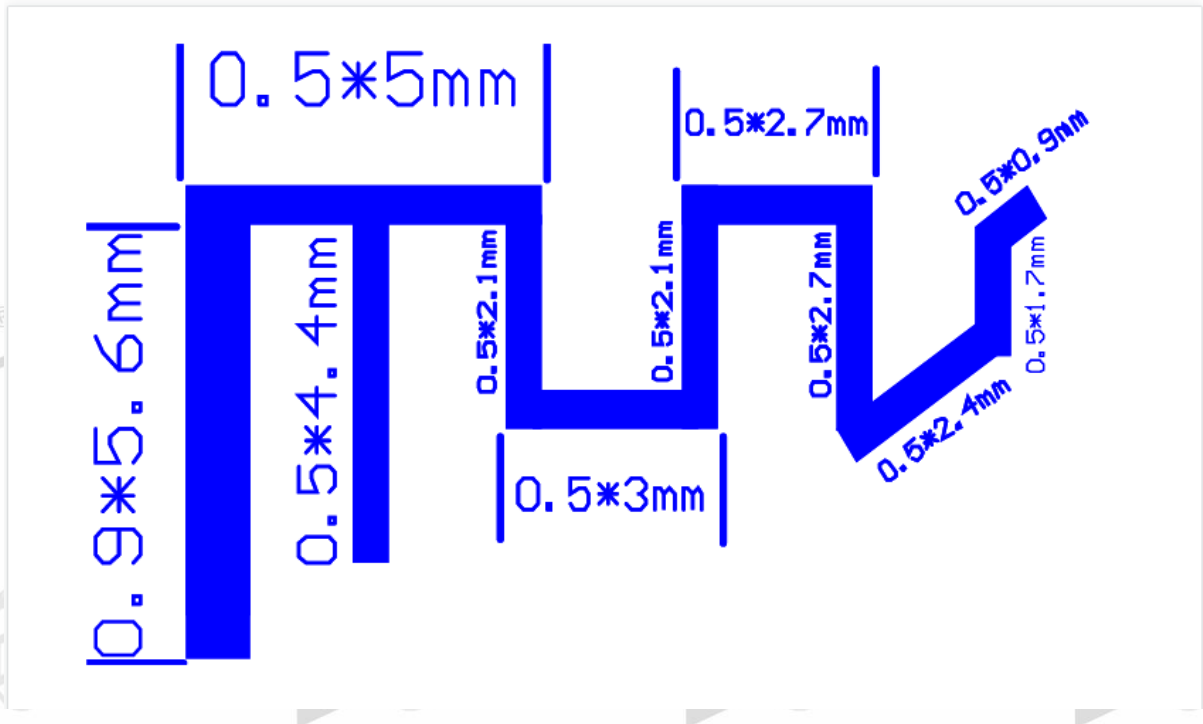

1.7 Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China., 300385

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2. Near-field gain measurement


2.1 General Information

Test Date	2023-09-18		
Test Condition	Temperature: 23.5±1℃	Humidity: 40±1%	Pressure: 100.8±0.2 kPa
Test Place	OTA Room	Test Engineer	Novak Wei

2.2 Test Equipment

Equipment	Manufacturer	Mode No	Serial No	Last Cal.	Cal.Interval
ENA network analyzer	Keysight	E5071C	MY46900684	2023-04-11	1 year

2.3 Block Diagram of Test Setup

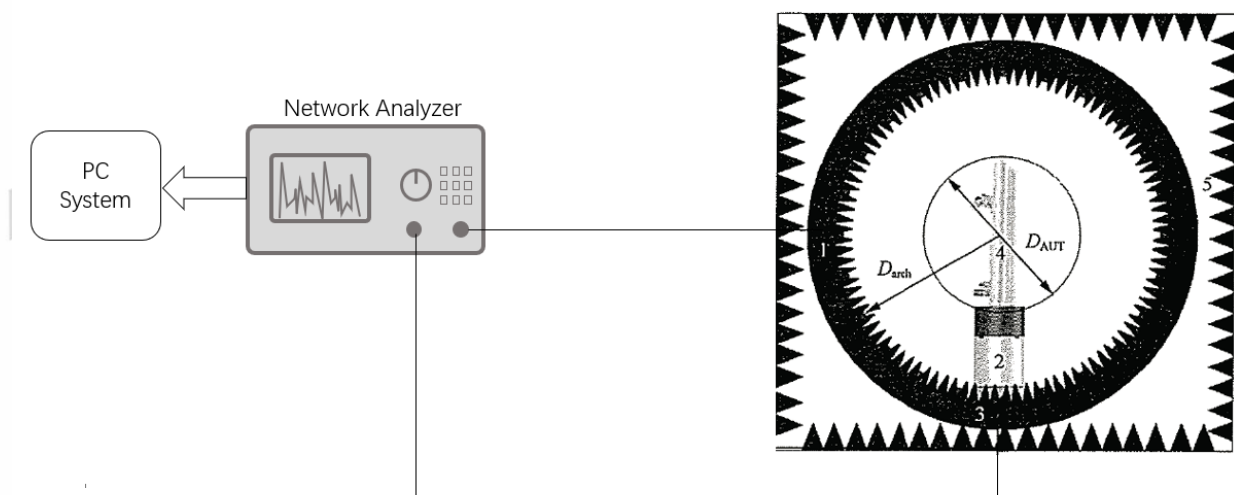

2.4 Test Procedure

- (1) Set up the antenna to be measured. Set up the antenna and mark the cross reference line at the center of the antenna port surface to be measured.
- (2) Connect the reception antenna test port to the test equipment port
- (3) Open the test software, create the test project, and configure the test port.
- (4) Use test software for automatic testing and save test data of electromagnetic field distribution.
- (5) Change the port, down dip Angle, or test frequency (if necessary), and repeat steps (3) to (4) until all status data to be measured is collected.

2.5 Result

Frequency ID	Frequency (MHz)	Efficiency (dBi)	Efficiency (%)	Peak Gain (dBi)
1	2400.0	-5.32	29.38	-0.85
2	2410.0	-4.88	32.50	-0.51
3	2420.0	-4.55	35.09	-0.17
4	2430.0	-4.36	36.66	-0.02
5	2440.0	-4.06	39.23	0.63
6	2450.0	-3.89	40.79	1.11
7	2460.0	-3.51	44.58	1.60
8	2470.0	-3.51	44.57	1.62
9	2480.0	-3.54	44.30	1.57
10	2490.0	-3.69	42.71	1.37
11	2500.0	-3.77	41.97	1.43

3. Near-field pattern measurement


3.1 General Information

Test Date	2023-09-18		
Test Condition	Temperature: 23.5±1℃	Humidity: 40±1%	Pressure: 100.8±0.2 kPa
Test Place	OTA Room	Test Engineer	Novak Wei

3.2 Test Equipment

Equipment	Manufacturer	Mode No	Serial No	Last Cal.	Cal.Interval
ENA network analyzer	Keysight	E5071C	MY46900684	2023-04-11	1 year

3.3 Block Diagram of Test Setup

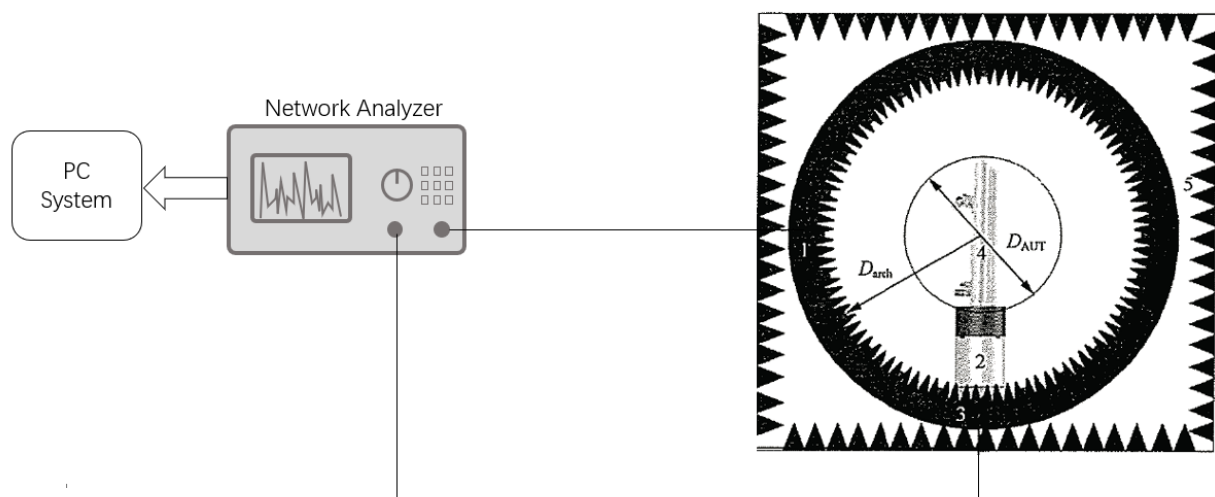

3.4 Test Procedure


- (1) Set up the antenna to be measured. Set up the antenna and mark the cross reference line at the center of the antenna port surface to be measured.
- (2) Connect the cable connector and adjust the downdip Angle (electrically tuned antenna).
- (3) Open the test software, create the test project, and configure the test port.
- (4) Use test software for automatic testing and save test data of electromagnetic field distribution.
- (5) Change the port, downdip Angle, or test frequency (if necessary), and repeat steps (3) to (4) until all status data to be measured is collected.
- (6) After near and far field exchange, the three-position spherical pattern of the antenna to be tested is obtained, and the Theta and Phi angles of the position where the maximum level of the three-position spherical pattern is located are found. The horizontal plane pattern curve of the

antenna to be tested is obtained by cutting according to equal Theta Angle, and the vertical plane pattern of the antenna to be tested is cancelled by cutting according to equal Phi Angle. Then the radiation parameters of the horizontal plane and vertical plane pattern of the antenna to be measured are obtained by using the processing method similar to that of the far field.



3.5 Result

Fre. (MHz)	Eff. (dBi)	Gain (dBi)	Eff. (%)	Directivity (dB)	Peak Gain Position (Theta)	Peak Gain Position (Phi)	Eff. ThetaPol (%)	Eff. PhiPol (%)	Upper Hem. Eff. (%)	Lower Hem. Eff. (%)
2400.0	-5.32	-0.85	29.38	4.47	135.00	225.00	11.91	17.47	14.19	15.19
2410.0	-4.88	-0.51	32.50	4.37	135.00	225.00	13.42	19.08	16.06	16.44
2420.0	-4.55	-0.17	35.09	4.38	135.00	225.00	14.96	20.13	17.40	17.69
2430.0	-4.36	-0.02	36.66	4.34	135.00	225.00	16.07	20.59	18.20	18.46
2440.0	-4.06	0.63	39.23	4.69	165.00	15.00	17.85	21.38	19.35	19.88
2450.0	-3.89	1.11	40.79	5.00	165.00	15.00	19.23	21.56	19.87	20.92
2460.0	-3.51	1.60	44.58	5.11	165.00	15.00	21.76	22.82	21.67	22.91
2470.0	-3.51	1.62	44.57	5.13	165.00	15.00	22.41	22.17	21.82	22.76
2480.0	-3.54	1.57	44.30	5.10	165.00	15.00	22.73	21.58	21.99	22.31
2490.0	-3.69	1.37	42.71	5.06	165.00	15.00	22.02	20.70	21.77	20.95
2500.0	-3.77	1.43	41.97	5.20	165.00	15.00	21.50	20.47	21.67	20.30


2400.0MHz H+V, Eff: 29.4%

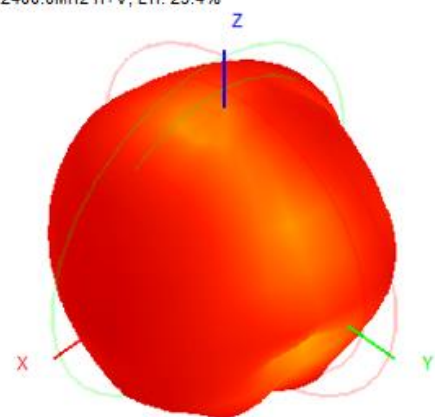



Back View

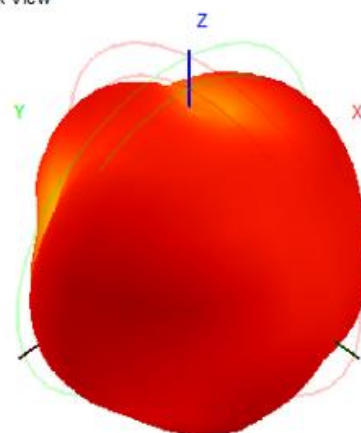


2440.0MHz H+V, Eff: 39.2%

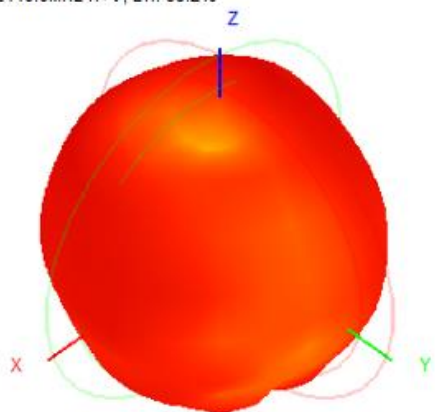



Back View

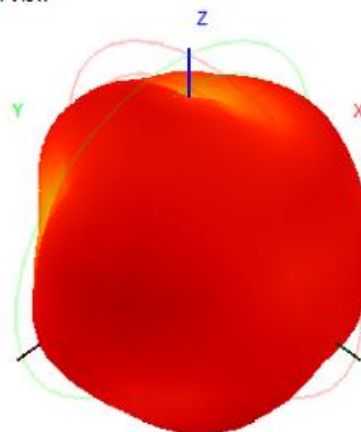


2480.0MHz H+V, Eff: 44.3%

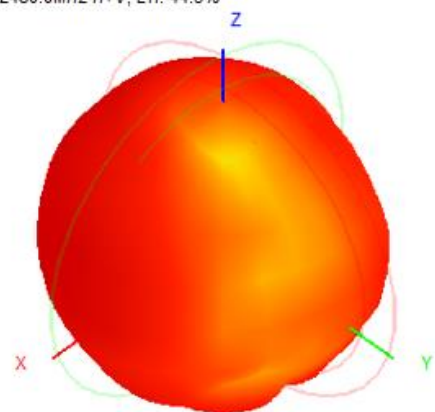


Back View

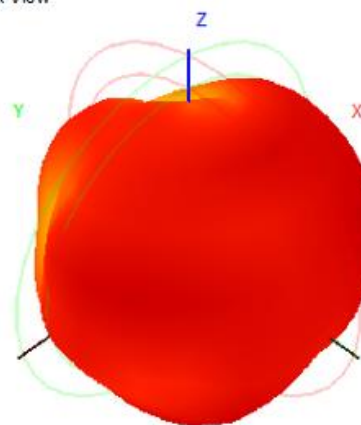


2400.0MHz Total(E1-XZ), Max=-2.81dBi

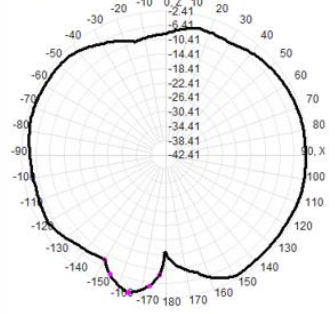


2400.0MHz Total(E2-YZ), Max=-3.54dBi

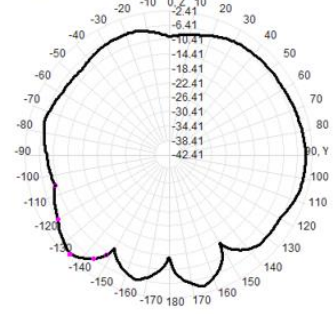


Total(H-XY), Max=-2.41dBi, CirD=8.88

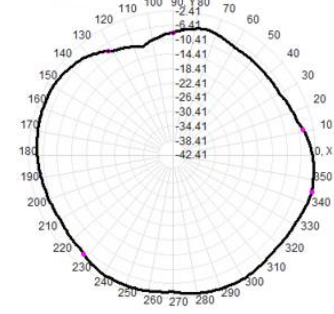


2440.0MHz Total(E1-XZ), Max=-0.08dBi




2440.0MHz Total(E2-YZ), Max=-1.06dBi

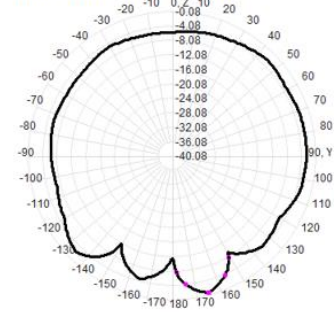


Total(H-XY), Max=-1.88dBi, CirD=6.07

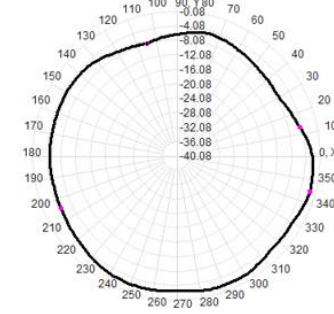





2480.0MHz Total(E1-XZ), Max=0.29dBi

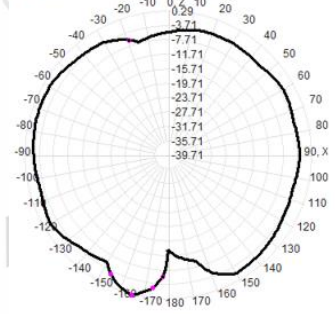


2480.0MHz Total(E2-YZ), Max=-1.66dBi





Total(H-XY), Max=-1.81dBi, CirD=5.05



Annex A Test Setup Photo

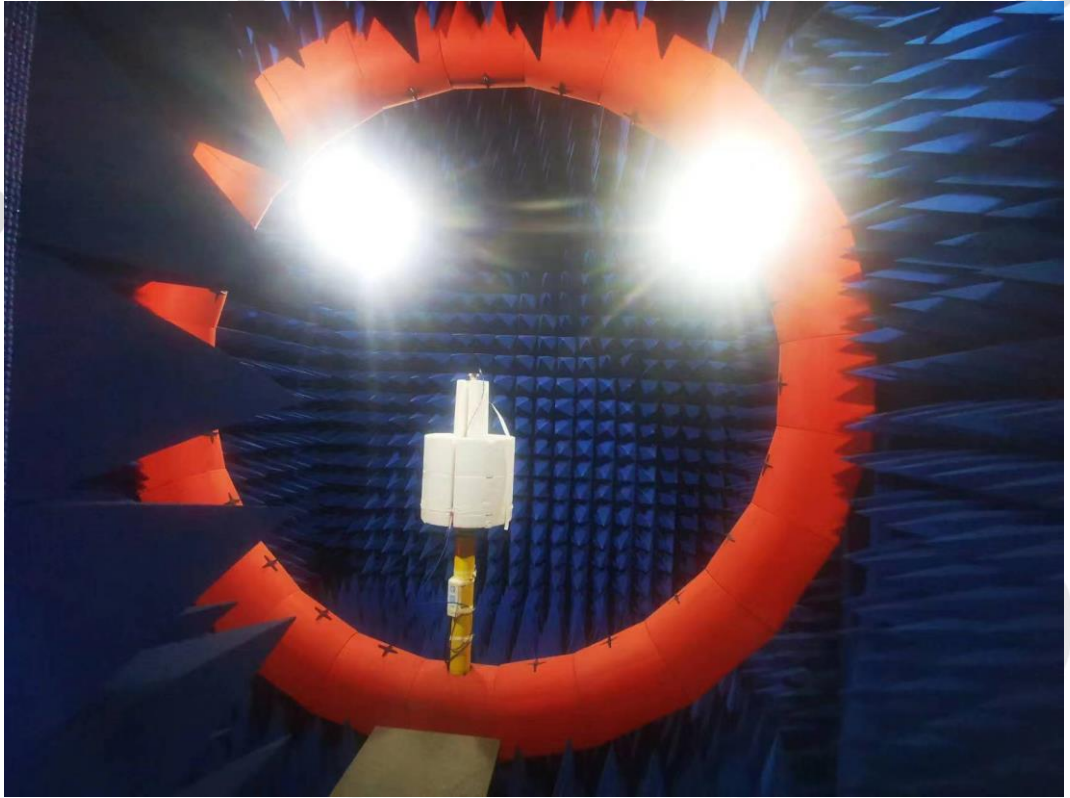

Annex B EUT Photos

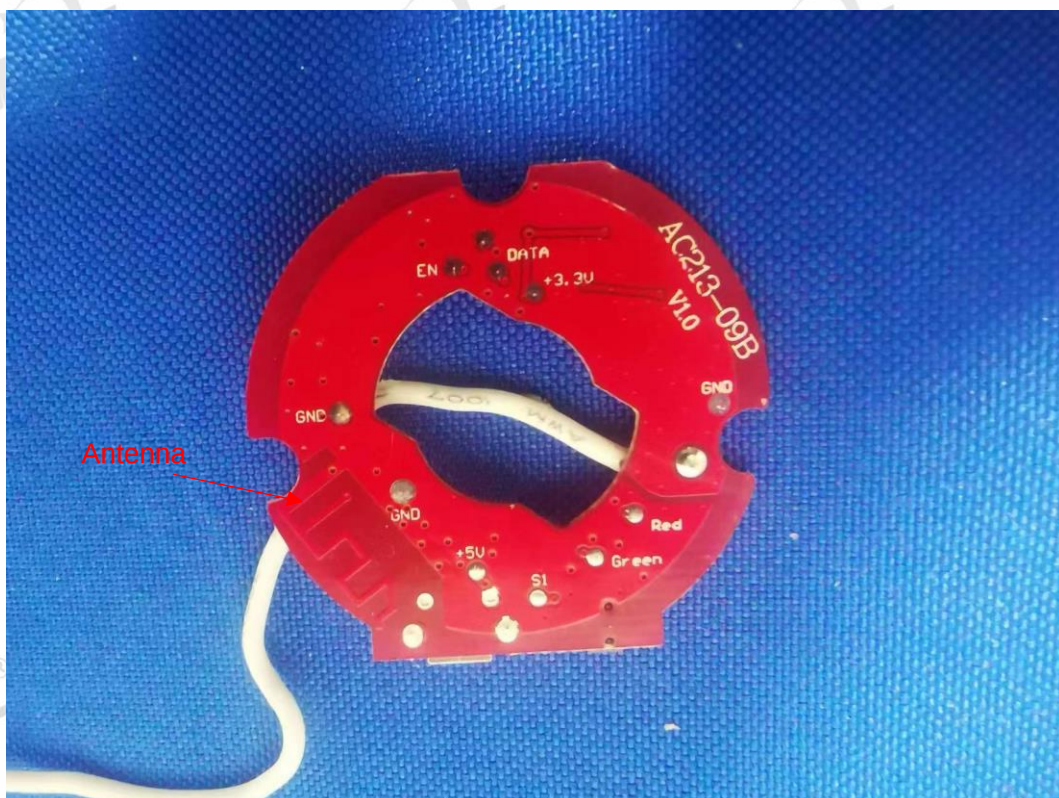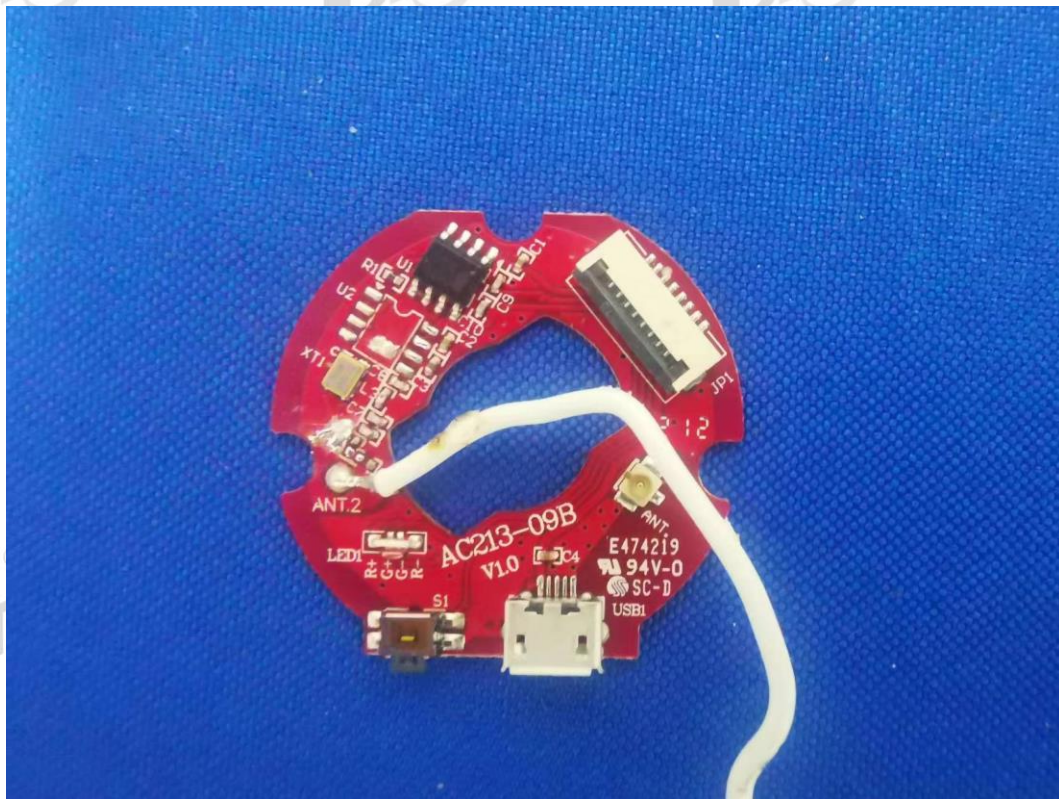

Antenna

END