



RADIO TEST REPORT

Report No.:STS2104117W02

Issued for

Bowei Technology Co., Ltd

2F, Building No. 6C, 1658, Gumei Rd., Xuhui District,
Shanghai, China

Product Name:	Wi-Fi 6 MESH AP
Brand Name:	AZORES
Model Name:	AX6600
Series Model:	N/A
FCC ID:	2AVWB-AX6600
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name..... : Bowei Technology Co., Ltd
Address : 2F, Building No. 6C, 1658, Gumei Rd., Xuhui District, Shanghai, China
Manufacturer's Name : TDG Technology Co., Ltd
Address : No.1 Yatai Road, Jiaxing City, Zhejiang Province, P.R.C.

Product Description

Product Name..... : Wi-Fi 6 MESH AP
Brand Name : **AZORES**
Model Name : AX6600
Series Model..... : N/A

Test Standards..... : FCC Part15.407

Test Procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date of receipt of test item : 22 Apr. 2021

Date (s) of performance of tests..... : 22 Apr. 2021 ~ 18 May 2021

Date of Issue..... : 18 May 2021

Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 TEST SOFTWARE AND POWER LEVEL	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	20
4. POWER SPECTRAL DENSITY TEST	36
4.1 LIMIT	36
4.2 TEST PROCEDURE	36
4.3 DEVIATION FROM STANDARD	37
4.4 TEST SETUP	37
4.5 EUT OPERATION CONDITIONS	37
4.6 TEST RESULTS	38
5. BANDWIDTH MEASUREMENT	39
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	39
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	41
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	43
6. MAXIMUM CONDUCTED OUTPUT POWER	44
6.1 LIMIT	44
6.2 TEST PROCEDURE	44
6.3 DEVIATION FROM STANDARD	44
6.4 TEST SETUP	44
6.5 EUT OPERATION CONDITIONS	44
6.6 TEST RESULTS	45
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	48
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	48
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	48



Table of Contents	Page
8. ANTENNA REQUIREMENT	49
8.1 STANDARD REQUIREMENT	49
8.2 EUT ANTENNA	49
APPENDIX - PHOTOS OF TEST SETUP	50



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	18 May 2021	STS2104117W02	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Wi-Fi 6 MESH AP	
Trade Name	AZORES	
Model Name	AX6600	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Wi-Fi 6 MESH AP	
	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20)/ax(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40) /ax(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80) /ax(VHT80): 5.210GHz
	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM,1024QAM
	Antenna Designation:	See Note 2
	Max.Output Power(Conducted):	8.36 dBm
	More details of EUT technical specification, please refer to the User Manual.	
Test Channel	Please refer to the Note 2.	
Adapter	Model: BY-SKY120200U70L Input: 100-240V AC, 50/60Hz,0.7A MAX Output:DC12V 2A Model: RD1202000-C55-154MG Input: 100-240V AC, 50/60Hz,1.0A MAX Output: DC12V 2A	
Hardware version number	V1.0.0	
Software version number	V1.0.1	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



1.

Operation Frequency of channel	
5.180GHz-5.240GHz	
Channel	Frequency
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20) /ac (VHT20) /ax (VHT20)	
Channel	Freq.(MHz)
36	5180
40	5200
48	5240

For 802.11n(HT40) /ac (VHT40) /ax (VHT40)	
Channel	Freq.(MHz)
38	5190
46	5230

For 802.11ac (VHT80) /ax (VHT80)	
Channel	Freq.(MHz)
42	5210



2. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain = $G_{ANT} + 10 \log(NANT)$ dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = G_{ANT}

Antenna number: 2

Antenna A gain : 4.5dBi


Antenna B gain : 4.5dBi

$G_{ANT} + 10 \log(NANT)$ dBi

MIMO technology Directional gain=7.51dBi

Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A	AZORES	AX6600	PIFA	N/A	ANT A : 4.5 ANT B : 4.5 MIMO A+B : 7.51	WLAN ANT

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

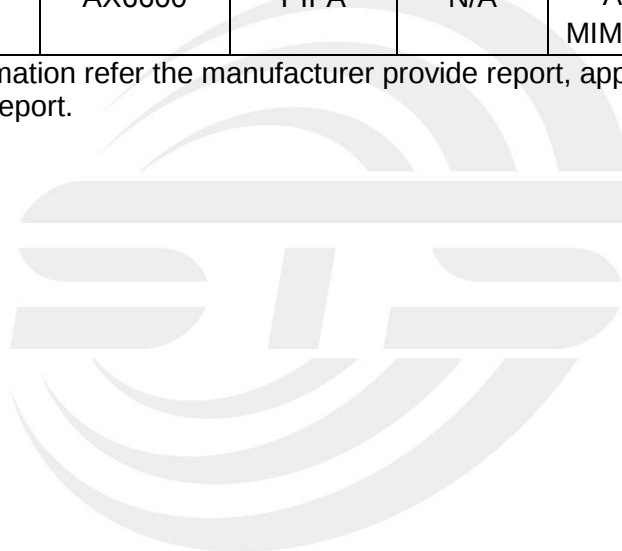



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 3	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 4	TX IEEE 802.11ax VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 6	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 10	TX IEEE 802.11ax VHT40 CH38&CH46	NSS1 MCS0
Mode 11	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ax VHT80 CH42	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The battery is fully-charged during the radiated and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link




2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_A Power Class	ANT_B Power Class	Software For Testing
WIFI(5G)	5G WIFI Band1 (5150MHz-5250MHz)	802.11a	ANT A: 4.5 ANT B: 4.5 MIMO A+B: 7.51	30	30	accessMTool_3_1_0_4
		802.11n(HT20)		30	30	
		802.11n(HT40)		30	30	
		802.11ac(VHT20)		30	30	
		802.11ac(VHT40)		30	30	
		802.11ac(VHT80)		30	30	
		802.11ax(VHT20)		30	30	
		802.11ax(VHT40)		30	30	
		802.11ax(VHT80)		30	30	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious EmissionTest

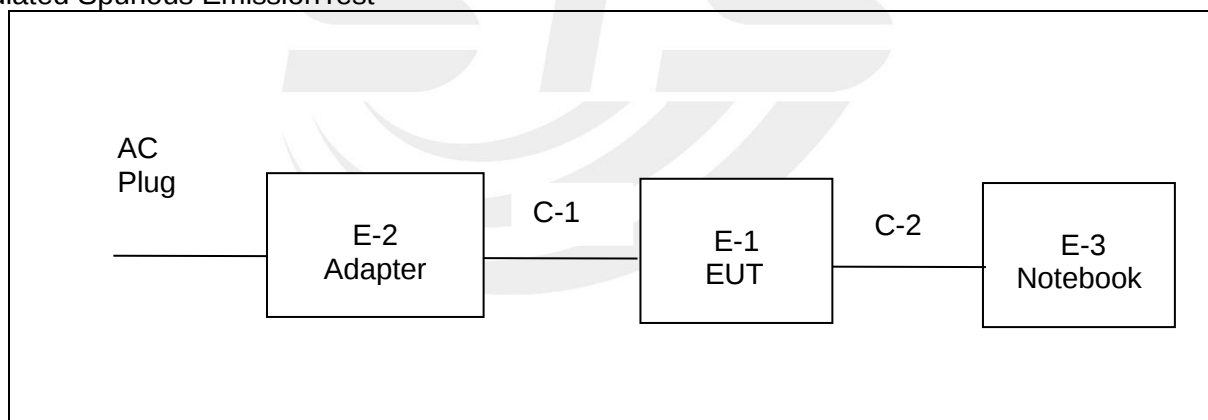

Conducted Emission Test

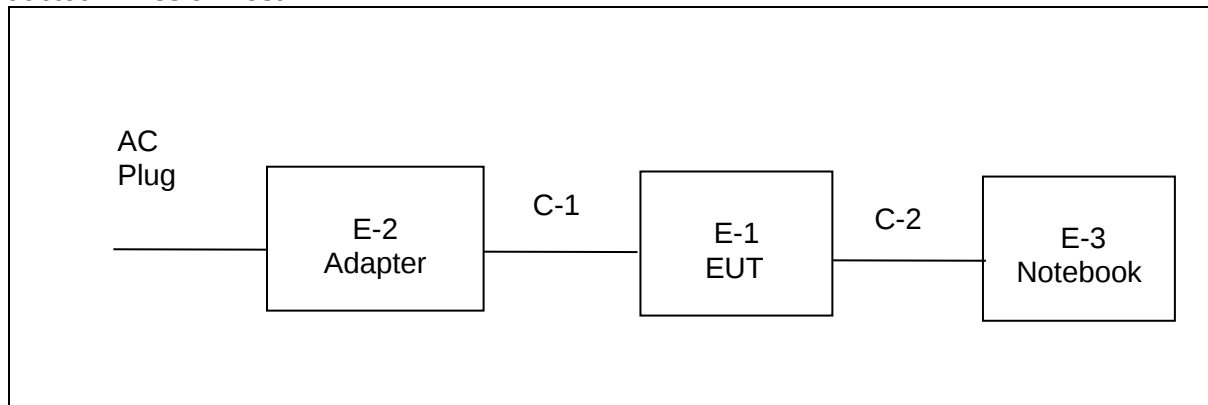



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Adapter	N/A	RD1202000-C55-154MG	N/A	N/A
E-2	Adapter	N/A	BY-SKY120200U70L	N/A	
C-1	DC Cable	N/A	N/A	150cm	NO

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-3	Notebook	LENOVO	ThinkPad E470	N/A	N/A
C-2	USB Cable	N/A	N/A	120cm	NO

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Active loop Antenna	ZHINAN	ZN30900C	16035	2019.07.11	2021.07.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2019.10.15	2021.10.14
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2020.10.12	2021.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2020.10.10	2021.10.09
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
LISN	R&S	ENV216	101242	2020.10.12	2021.10.11
LISN	EMCO	3810/2NM	23625	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Power Sensor	Keysight	U2021XA	MY55520005	2020.10.10	2021.10.09
			MY55520006	2020.10.10	2021.10.09
			MY56120038	2020.10.10	2021.10.09
			MY56280002	2020.10.10	2021.10.09
Signal Analyzer	Agilent	N9020A	MY51110105	2021.03.04	2022.03.03
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	LZ-RF /LzRf-3A3			





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

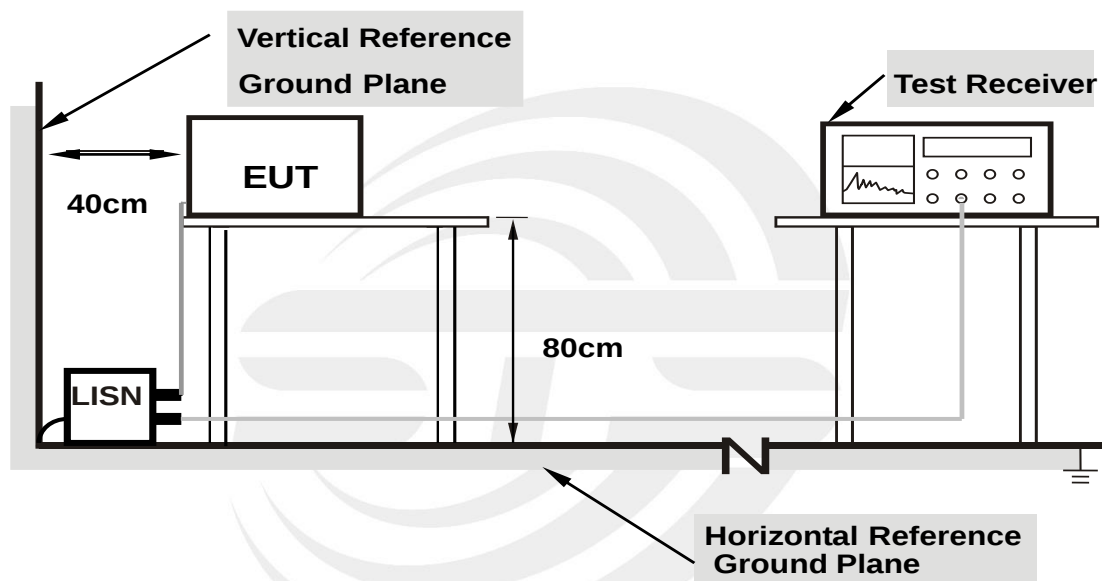

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	26.1(C)	Relative Humidity:	68%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1860	34.76	20.23	54.99	64.21	-9.22	QP
2	0.1860	13.72	20.23	33.95	54.21	-20.26	AVG
3	0.4180	24.51	20.49	45.00	57.49	-12.49	QP
4	0.4180	13.66	20.49	34.15	47.49	-13.34	AVG
5	0.8620	13.47	20.20	33.67	56.00	-22.33	QP
6	0.8620	0.99	20.20	21.19	46.00	-24.81	AVG
7	1.8540	13.52	20.07	33.59	56.00	-22.41	QP
8	1.8540	-0.46	20.07	19.61	46.00	-26.39	AVG
9	6.0860	17.75	19.89	37.64	60.00	-22.36	QP
10	6.0860	3.71	19.89	23.60	50.00	-26.40	AVG
11	26.9380	18.03	20.63	38.66	60.00	-21.34	QP
12	26.9380	6.17	20.63	26.80	50.00	-23.20	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

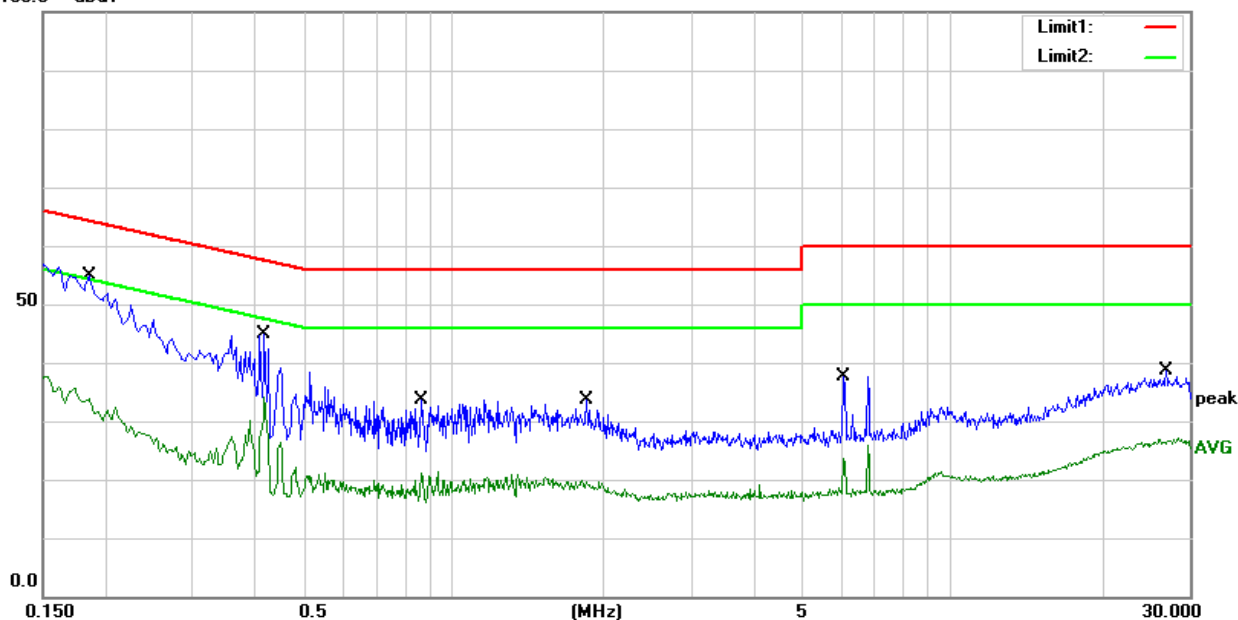




Temperature:	26.1(C)	Relative Humidity:	68%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	37.25	20.23	57.48	66.00	-8.52	QP
2	0.1500	16.17	20.23	36.40	56.00	-19.60	AVG
3	0.4180	24.36	20.49	44.85	57.49	-12.64	QP
4	0.4180	18.01	20.49	38.50	47.49	-8.99	AVG
5	0.9660	15.99	20.18	36.17	56.00	-19.83	QP
6	0.9660	1.39	20.18	21.57	46.00	-24.43	AVG
7	4.6980	10.18	19.95	30.13	56.00	-25.87	QP
8	4.6980	-1.25	19.95	18.70	46.00	-27.30	AVG
9	9.3820	12.02	20.09	32.11	60.00	-27.89	QP
10	9.3820	0.88	20.09	20.97	50.00	-29.03	AVG
11	29.1340	17.65	20.72	38.37	60.00	-21.63	QP
12	29.1340	6.68	20.72	27.40	50.00	-22.60	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

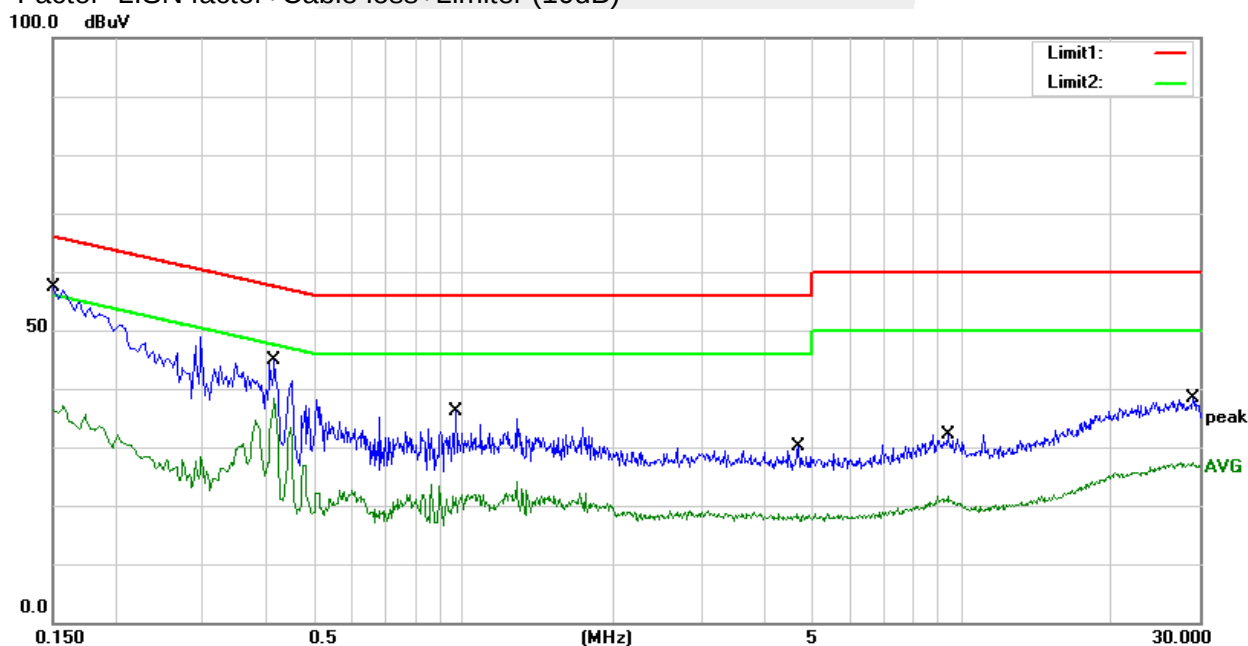



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.

**LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS**

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


3.2.2 DEVIATION FROM TEST STANDARD

No deviation




3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

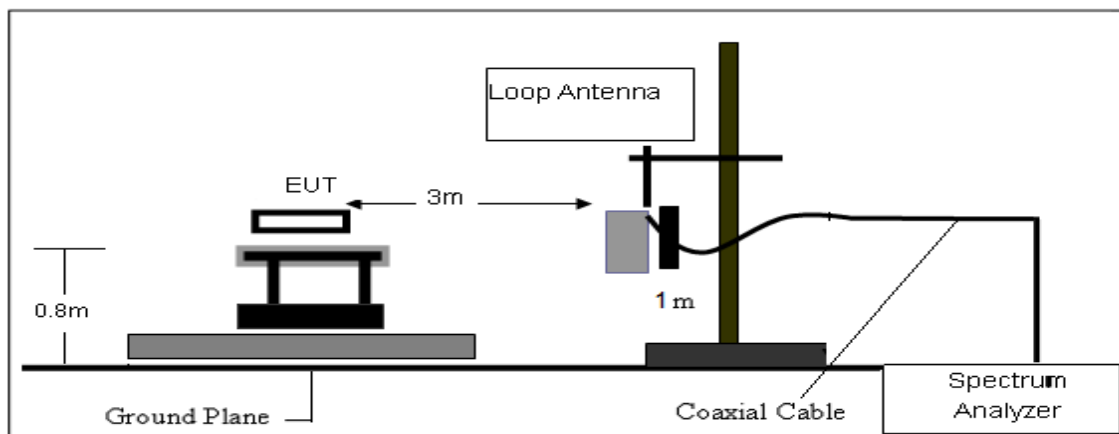

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

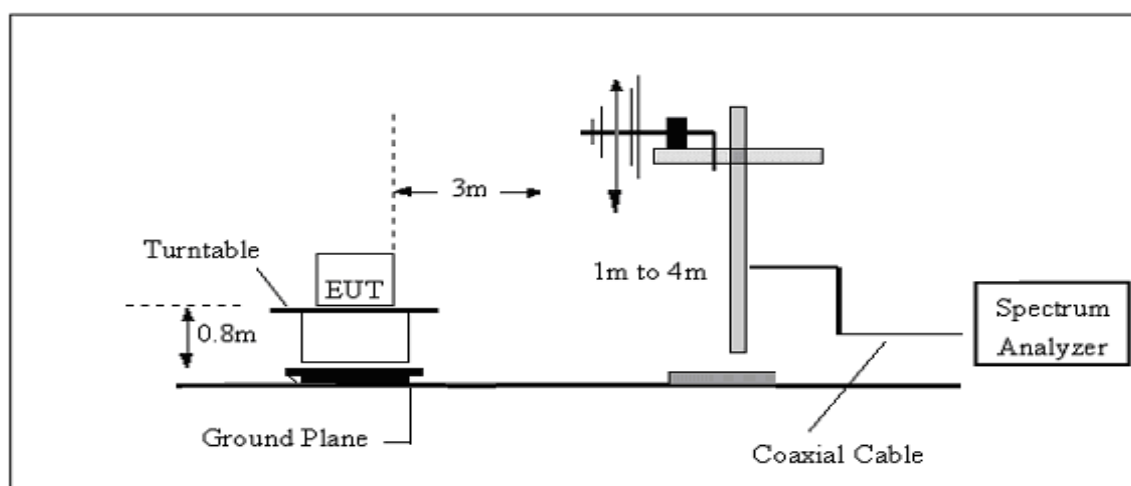

(C) Radiated Emission Test-Up Frequency Above 1GHz

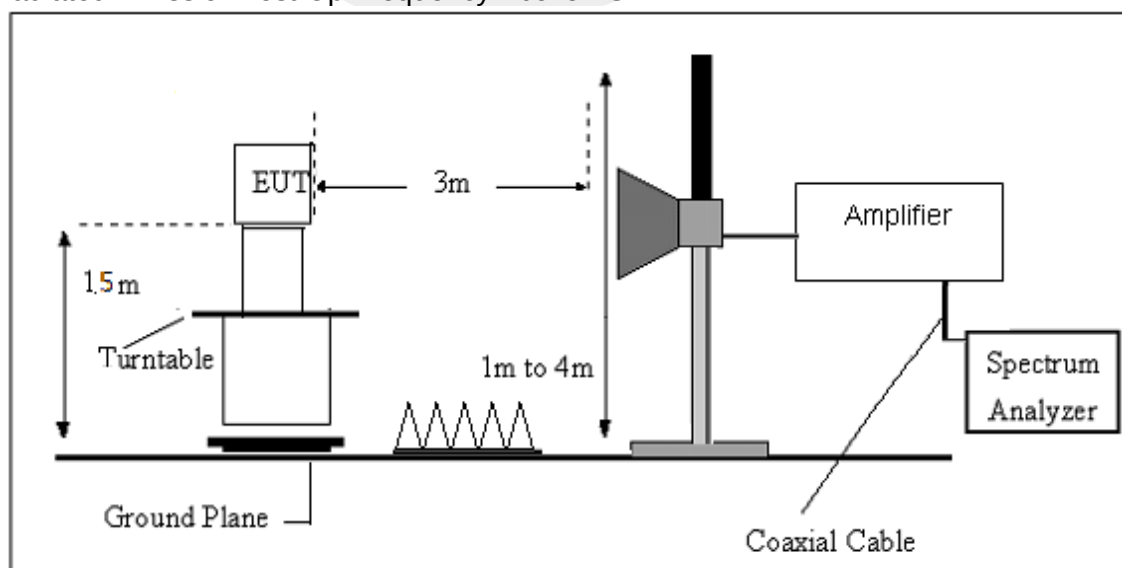



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Polarization :	--
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

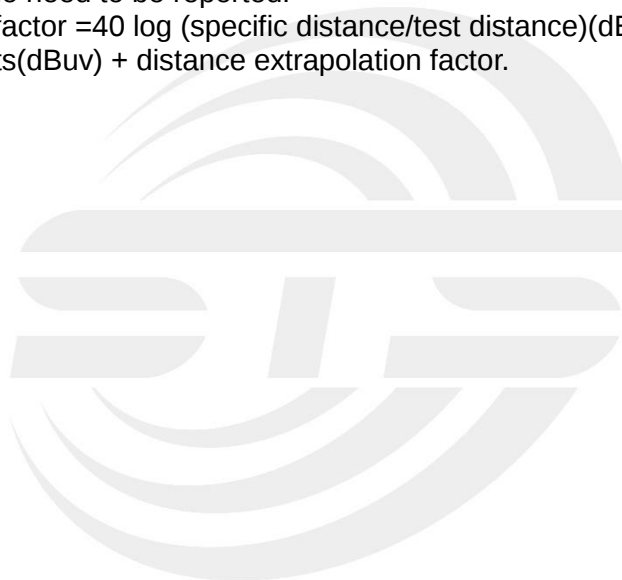


**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	AC 120V/60Hz	Polarization:	Horizontal
Test Mode	Mode 1~12(Mode 4 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	59.31	-20.67	38.64	43.50	-4.86	QP
2	198.7800	61.18	-21.12	40.06	43.50	-3.44	QP
3	375.3200	46.93	-12.37	34.56	46.00	-11.44	QP
4	625.5800	43.26	-5.25	38.01	46.00	-7.99	QP
5	712.8800	34.38	-3.68	30.70	46.00	-15.30	QP
6	893.3000	31.11	-0.61	30.50	46.00	-15.50	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

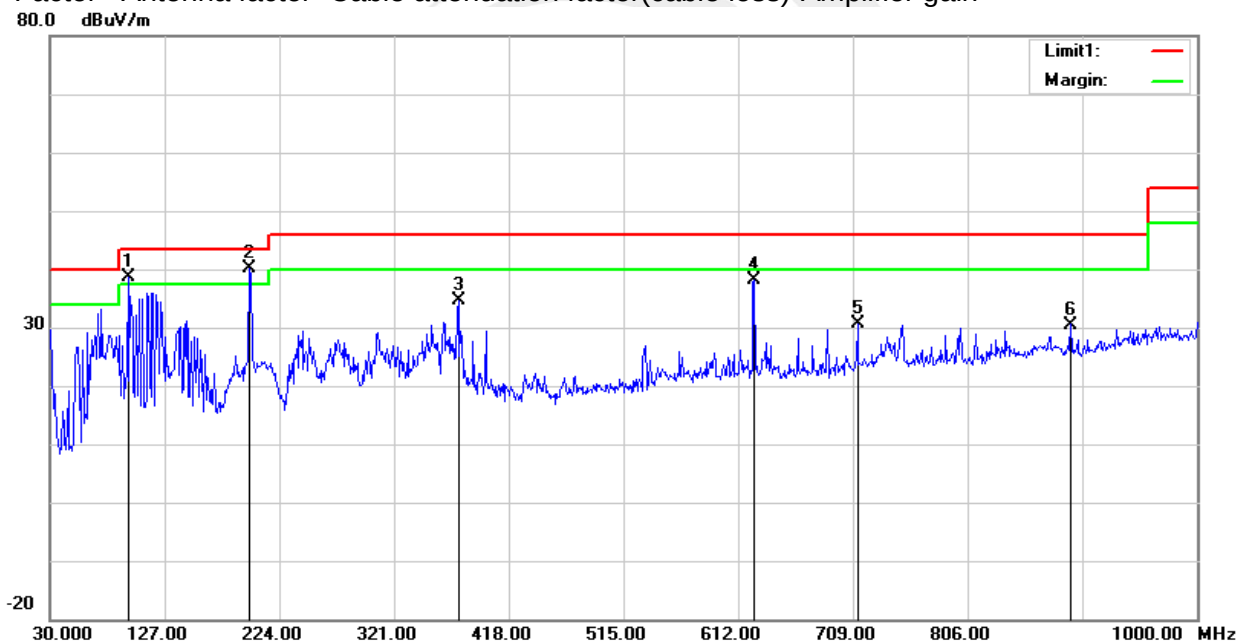




Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	AC 120V/60Hz	Polarization:	Vertical
Test Mode	Mode 1~12(Mode 4 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.6600	52.87	-19.53	33.34	43.50	-10.16	QP
2	239.5200	49.09	-18.10	30.99	46.00	-15.01	QP
3	399.5700	44.29	-11.16	33.13	46.00	-12.87	QP
4	625.5800	47.91	-5.25	42.66	46.00	-3.34	QP
5	775.9300	40.97	-2.26	38.71	46.00	-7.29	QP
6	875.8400	35.47	-0.61	34.86	46.00	-11.14	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

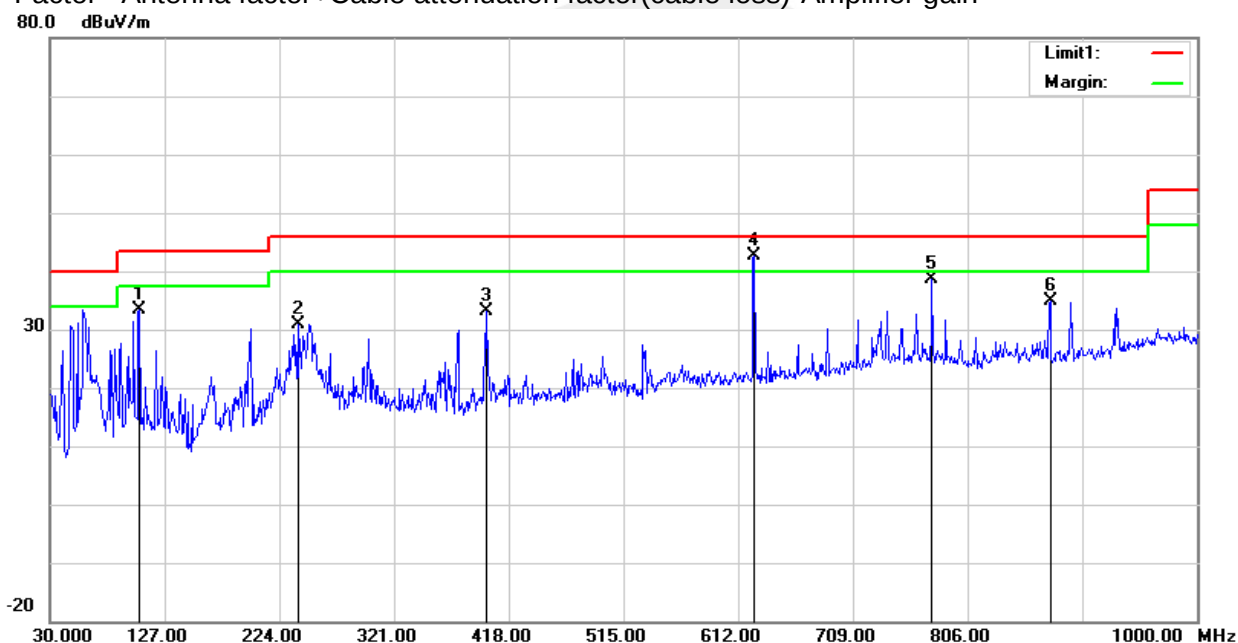



3.2.8 TEST RESULTS (Above 1000 MHz)

Band I 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11ax(VHT20)/ 5180 MHz)										
3248.47	44.65	44.70	6.70	28.20	-9.80	34.85	68.20	-33.35	Pk	Vertical
3248.47	42.00	44.70	6.70	28.20	-9.80	32.20	54.00	-21.80	AV	Vertical
3248.28	44.94	44.70	6.70	28.20	-9.80	35.14	68.20	-33.06	Pk	Horizontal
3248.28	41.87	44.70	6.70	28.20	-9.80	32.07	54.00	-21.93	AV	Horizontal
3986.85	39.29	44.20	7.90	29.70	-6.60	32.69	74.00	-35.51	Pk	Vertical
3986.85	35.70	44.20	7.90	29.70	-6.60	29.10	54.00	-24.90	AV	Vertical
3996.82	39.03	44.20	7.90	29.70	-6.60	32.43	74.00	-35.77	Pk	Horizontal
3996.82	36.35	44.20	7.90	29.70	-6.60	29.75	54.00	-24.25	AV	Horizontal
7229.49	37.38	43.50	11.40	35.50	3.40	40.78	68.20	-27.42	Pk	Vertical
7229.49	34.33	43.50	11.40	35.50	3.40	37.73	54.00	-16.27	AV	Vertical
7224.45	36.64	43.50	11.40	35.50	3.40	40.04	68.20	-28.16	Pk	Horizontal
7224.45	33.92	43.50	11.40	35.50	3.40	37.32	54.00	-16.68	AV	Horizontal
10360.02	39.91	44.50	13.80	38.80	8.10	48.01	68.20	-20.19	Pk	Vertical
10360.02	37.03	44.50	13.80	38.80	8.10	45.13	54.00	-8.87	AV	Vertical
10359.99	39.14	44.50	13.80	38.80	8.10	47.24	68.20	-20.96	Pk	Horizontal
10359.99	36.46	44.50	13.80	38.80	8.10	44.56	54.00	-9.44	AV	Horizontal
11016.89	32.91	43.60	14.30	39.50	10.20	43.11	74.00	-25.09	Pk	Vertical
11016.89	30.54	43.60	14.30	39.50	10.20	40.74	54.00	-13.26	AV	Vertical
11030.40	33.25	43.60	14.30	39.50	10.20	43.45	74.00	-24.75	Pk	Horizontal
11030.40	30.30	43.60	14.30	39.50	10.20	40.50	54.00	-13.50	AV	Horizontal
13295.67	31.82	42.60	15.90	38.90	12.20	44.02	74.00	-24.18	Pk	Vertical
13295.67	29.94	42.60	15.90	38.90	12.20	42.14	54.00	-11.86	AV	Vertical
13294.37	32.95	42.60	15.90	38.90	12.20	45.15	74.00	-23.05	Pk	Horizontal
13294.37	29.44	42.60	15.90	38.90	12.20	41.64	54.00	-12.36	AV	Horizontal
Mid Channel (802.11ax(VHT20)/ 5200 MHz)										
3253.76	44.04	44.70	6.70	28.20	-9.80	34.24	68.20	-33.96	Pk	Vertical
3253.76	40.86	44.70	6.70	28.20	-9.80	31.06	54.00	-22.94	AV	Vertical
3246.04	44.84	44.70	6.70	28.20	-9.80	35.04	68.20	-33.16	Pk	Horizontal
3246.04	41.12	44.70	6.70	28.20	-9.80	31.32	54.00	-22.68	AV	Horizontal
3992.40	39.10	44.20	7.90	29.70	-6.60	32.50	74.00	-35.70	Pk	Vertical
3992.40	36.91	44.20	7.90	29.70	-6.60	30.31	54.00	-23.69	AV	Vertical
3998.59	39.90	44.20	7.90	29.70	-6.60	33.30	74.00	-34.90	Pk	Horizontal
3998.59	36.58	44.20	7.90	29.70	-6.60	29.98	54.00	-24.02	AV	Horizontal
7227.44	37.39	43.50	11.40	35.50	3.40	40.79	68.20	-27.41	Pk	Vertical
7227.44	33.95	43.50	11.40	35.50	3.40	37.35	54.00	-16.65	AV	Vertical
7234.65	36.57	43.50	11.40	35.50	3.40	39.97	68.20	-28.23	Pk	Horizontal
7234.65	33.75	43.50	11.40	35.50	3.40	37.15	54.00	-16.85	AV	Horizontal
10400.13	38.75	44.50	13.80	38.80	8.10	46.85	68.20	-21.35	Pk	Vertical
10400.13	36.56	44.50	13.80	38.80	8.10	44.66	54.00	-9.34	AV	Vertical
10400.32	39.18	44.50	13.80	38.80	8.10	47.28	68.20	-20.92	Pk	Horizontal
10400.32	36.59	44.50	13.80	38.80	8.10	44.69	54.00	-9.31	AV	Horizontal
11028.58	33.70	43.60	14.30	39.50	10.20	43.90	74.00	-24.30	Pk	Vertical
11028.58	30.63	43.60	14.30	39.50	10.20	40.83	54.00	-13.17	AV	Vertical
11032.69	33.32	43.60	14.30	39.50	10.20	43.52	74.00	-24.68	Pk	Horizontal
11032.69	30.40	43.60	14.30	39.50	10.20	40.60	54.00	-13.40	AV	Horizontal
13290.48	32.38	42.60	15.90	38.90	12.20	44.58	74.00	-23.62	Pk	Vertical
13290.48	29.40	42.60	15.90	38.90	12.20	41.60	54.00	-12.40	AV	Vertical
13291.06	32.76	42.60	15.90	38.90	12.20	44.96	74.00	-23.24	Pk	Horizontal
13291.06	28.80	42.60	15.90	38.90	12.20	41.00	54.00	-13.00	AV	Horizontal



High Channel (802.11ax(VHT20)/ 5240 MHz)										
3257.62	45.01	44.70	6.70	28.20	-9.80	35.21	68.20	-32.99	Pk	Vertical
3257.62	40.73	44.70	6.70	28.20	-9.80	30.93	54.00	-23.07	AV	Vertical
3253.98	44.84	44.70	6.70	28.20	-9.80	35.04	68.20	-33.16	Pk	Horizontal
3253.98	41.63	44.70	6.70	28.20	-9.80	31.83	54.00	-22.17	AV	Horizontal
3990.62	38.80	44.20	7.90	29.70	-6.60	32.20	74.00	-41.80	Pk	Vertical
3990.62	35.76	44.20	7.90	29.70	-6.60	29.16	54.00	-24.84	AV	Vertical
3993.02	40.03	44.20	7.90	29.70	-6.60	33.43	74.00	-40.57	Pk	Horizontal
3993.02	36.11	44.20	7.90	29.70	-6.60	29.51	54.00	-24.49	AV	Horizontal
7221.48	36.50	43.50	11.40	35.50	3.40	39.90	68.20	-28.30	Pk	Vertical
7221.48	34.62	43.50	11.40	35.50	3.40	38.02	54.00	-15.98	AV	Vertical
7222.29	37.31	43.50	11.40	35.50	3.40	40.71	68.20	-27.49	Pk	Horizontal
7222.29	34.37	43.50	11.40	35.50	3.40	37.77	54.00	-16.23	AV	Horizontal
10480.22	39.57	44.50	13.80	38.80	8.10	47.67	68.20	-20.53	Pk	Vertical
10480.22	36.97	44.50	13.80	38.80	8.10	45.07	54.00	-8.93	AV	Vertical
10480.05	38.85	44.50	13.80	38.80	8.10	46.95	68.20	-21.25	Pk	Horizontal
10480.05	36.37	44.50	13.80	38.80	8.10	44.47	54.00	-9.53	AV	Horizontal
11018.66	33.83	43.60	14.30	39.50	10.20	44.03	74.00	-29.97	Pk	Vertical
11018.66	30.97	43.60	14.30	39.50	10.20	41.17	54.00	-12.83	AV	Vertical
11025.53	32.83	43.60	14.30	39.50	10.20	43.03	74.00	-30.97	Pk	Horizontal
11025.53	30.39	43.60	14.30	39.50	10.20	40.59	54.00	-13.41	AV	Horizontal
13283.09	32.76	42.60	15.90	38.90	12.20	44.96	74.00	-29.04	Pk	Vertical
13283.09	29.40	42.60	15.90	38.90	12.20	41.60	54.00	-12.40	AV	Vertical
13286.94	31.86	42.60	15.90	38.90	12.20	44.06	74.00	-29.94	Pk	Horizontal
13286.94	28.88	42.60	15.90	38.90	12.20	41.08	54.00	-12.92	AV	Horizontal

Remark:


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80), 802.11ax (VHT-20),802.11ax (VHT-40), 802.11ax (VHT-80) the worst case is 802.11ax (VHT-20).
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



3.2.9 RESTRICTED FREQUENCY BANDS AND BAND EDGE


Band I 5150-5250MHz

802.11ax20-L-H

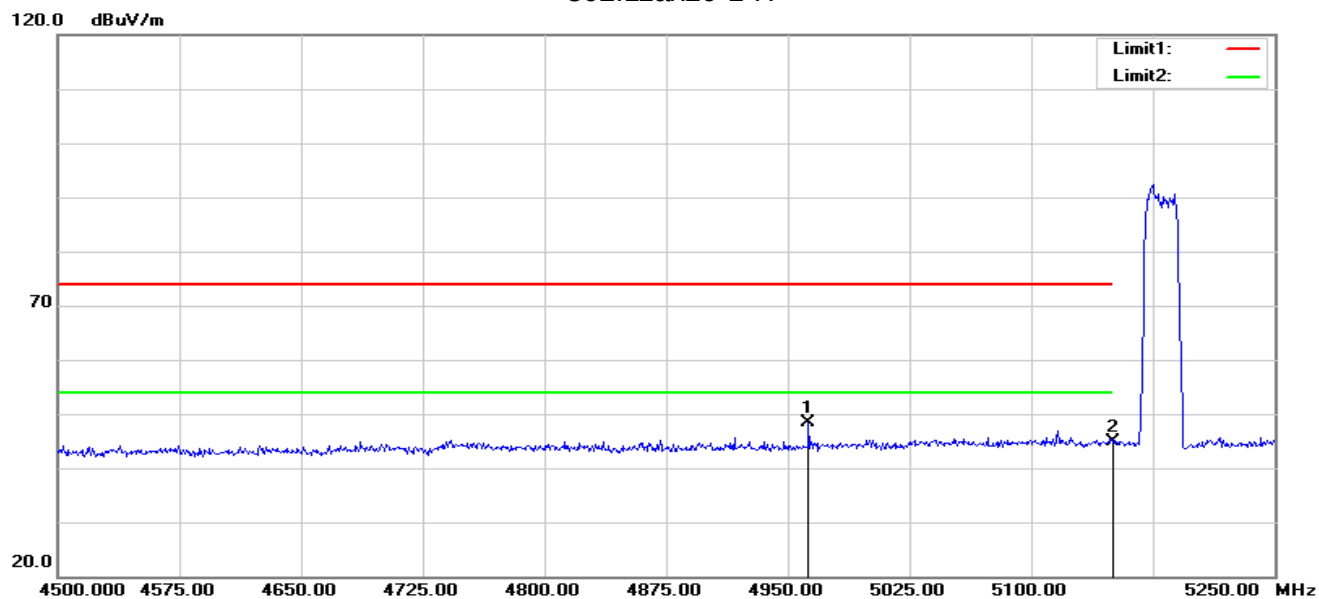

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4962.750	54.82	-6.43	48.39	74.00	-25.61	peak
2	5150.000	50.57	-5.73	44.84	74.00	-29.16	peak


802.11ax20-L-V

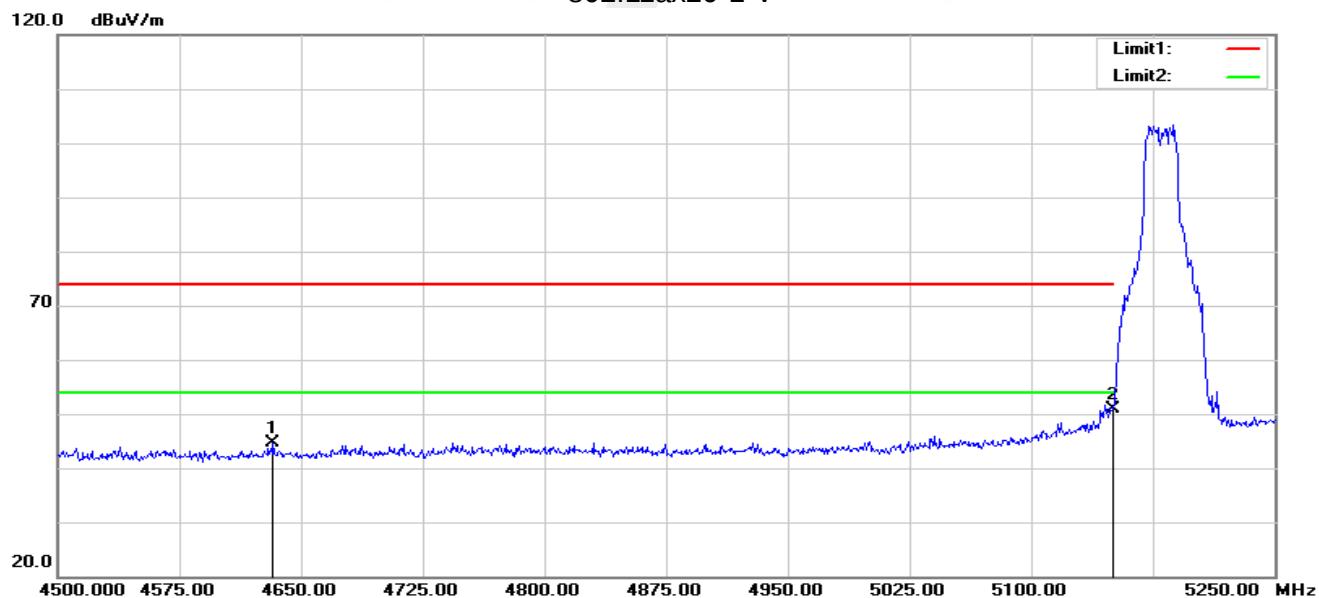

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.750	52.45	-7.70	44.75	74.00	-29.25	peak
2	5150.000	56.70	-5.73	50.97	74.00	-23.03	peak




802.11ax20-H-H

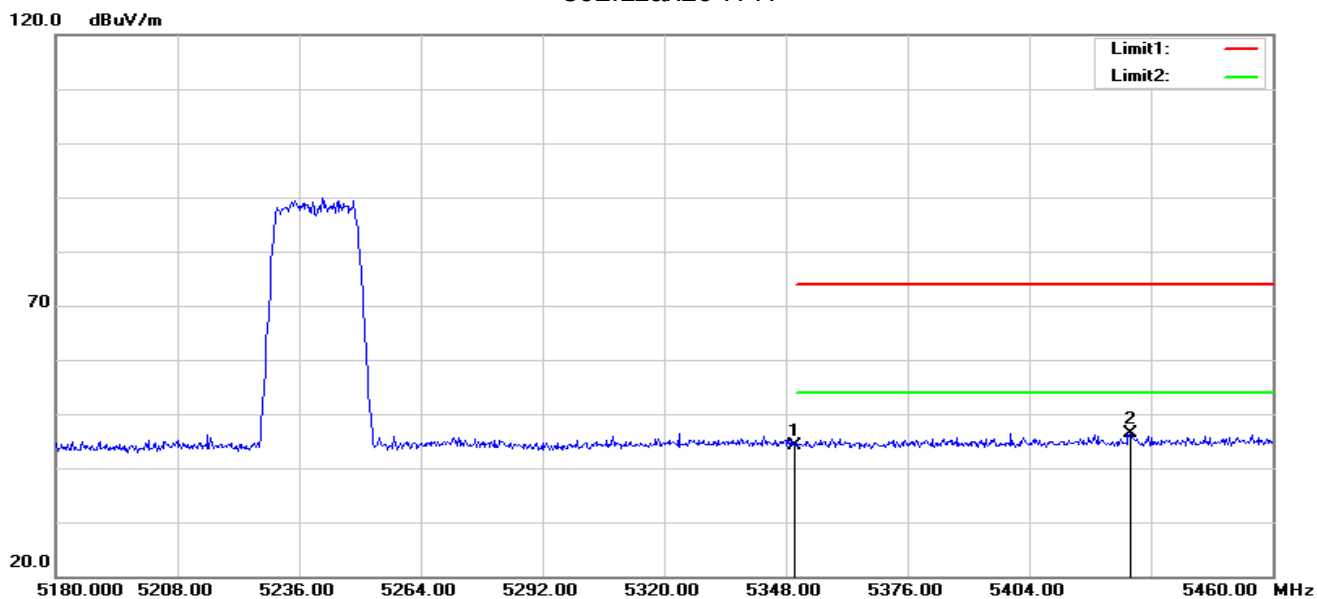

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.32	-5.23	44.09	74.00	-29.91	peak
2	5427.240	51.69	-5.19	46.50	74.00	-27.50	peak


802.11ax20-H-V

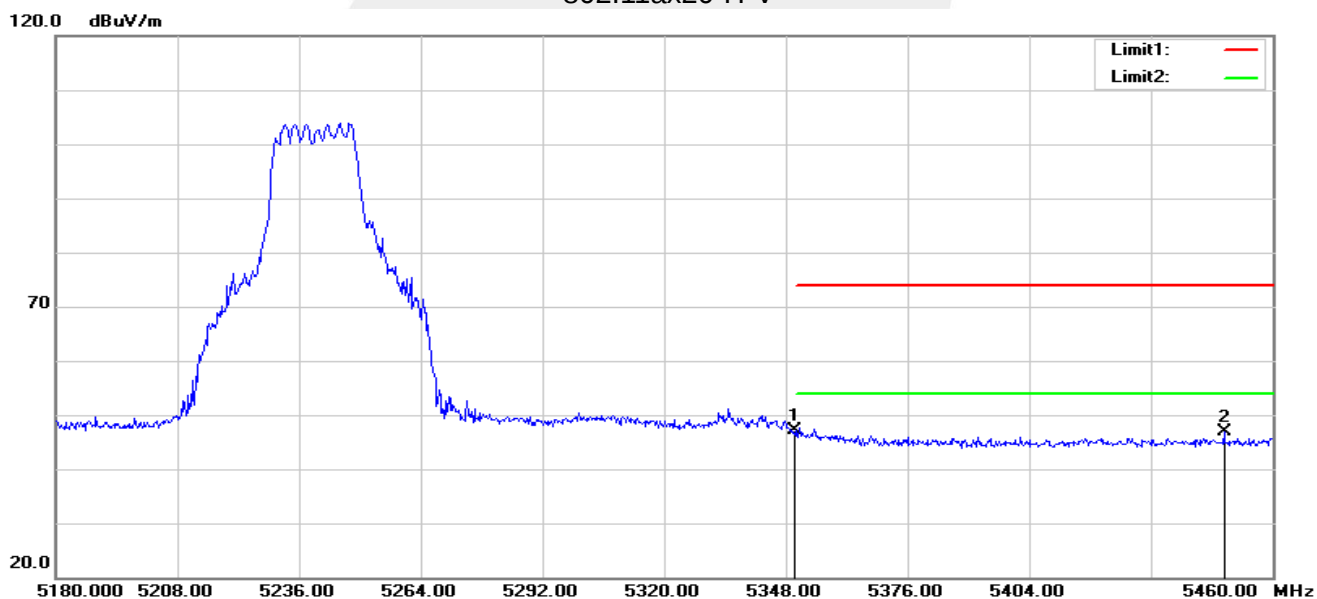

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.32	-5.23	47.09	74.00	-26.91	peak
2	5448.800	51.98	-5.14	46.84	74.00	-27.16	peak




802.11ax40-L-H

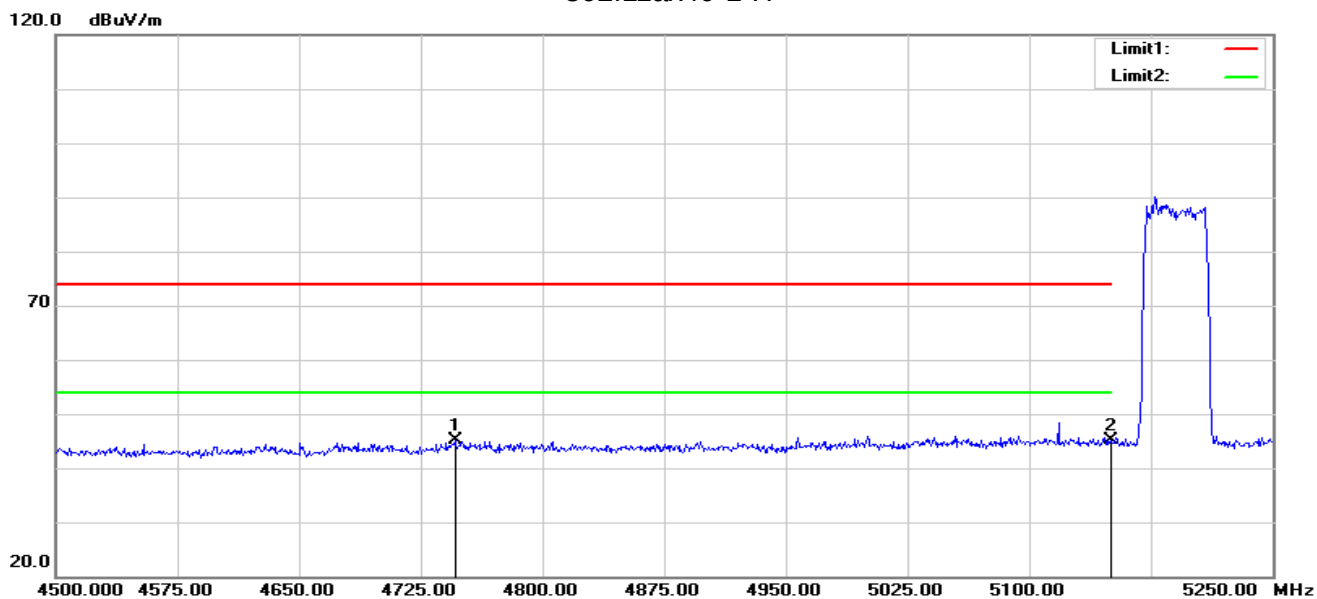

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4746.000	52.44	-7.30	45.14	74.00	-28.86	peak
2	5150.000	50.76	-5.73	45.03	74.00	-28.97	peak


802.11ax40-L-V

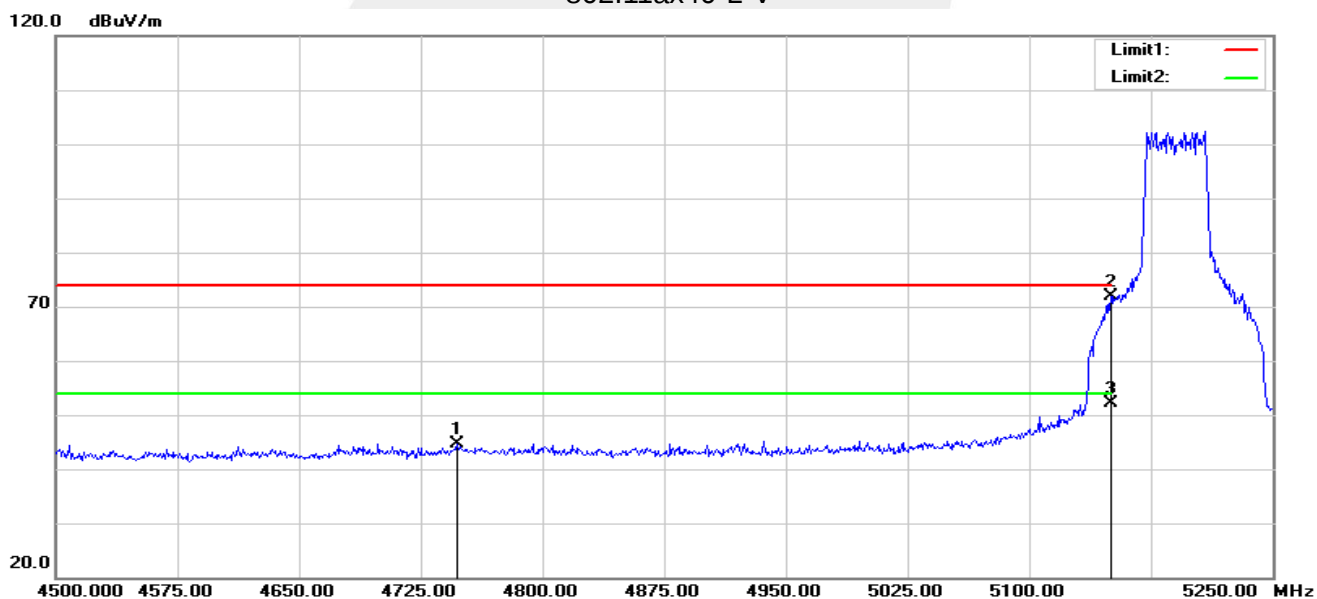

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4747.500	51.88	-7.29	44.59	74.00	-29.41	peak
2	5150.000	77.73	-5.73	72.00	74.00	-2.00	peak
3	5150.000	57.85	-5.73	52.12	54.00	-1.88	AVG




802.11ax40-H-H

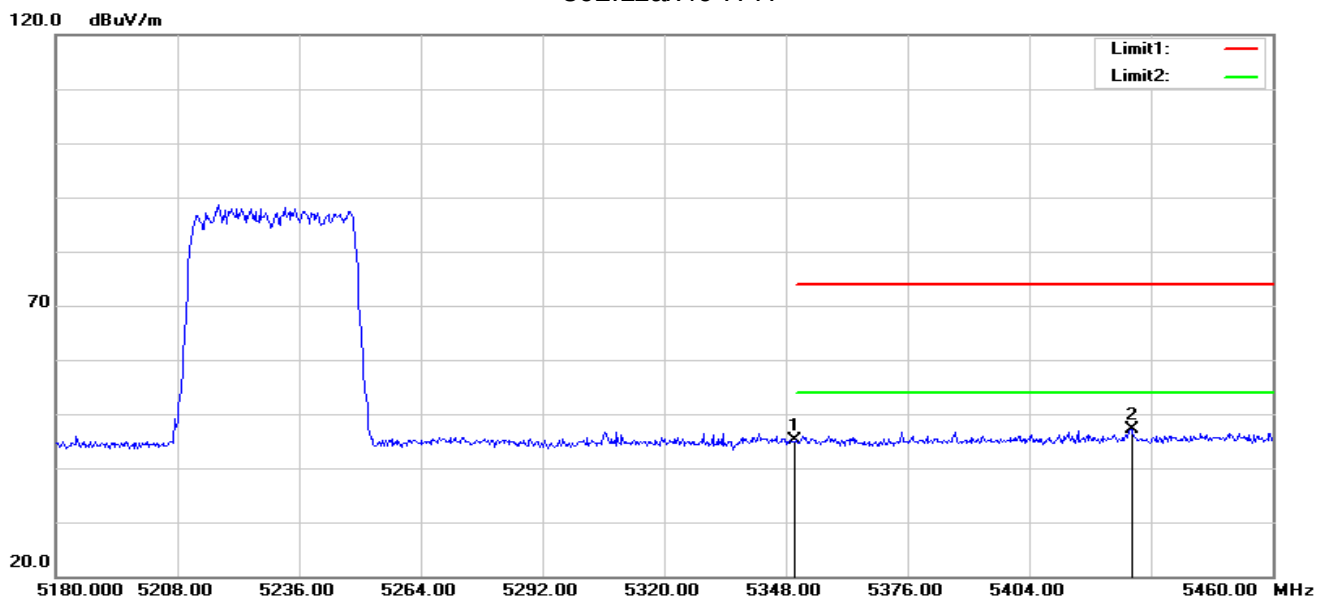

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.32	-5.23	45.09	74.00	-28.91	peak
2	5427.520	52.41	-5.19	47.22	74.00	-26.78	peak


802.11ax40-H-V

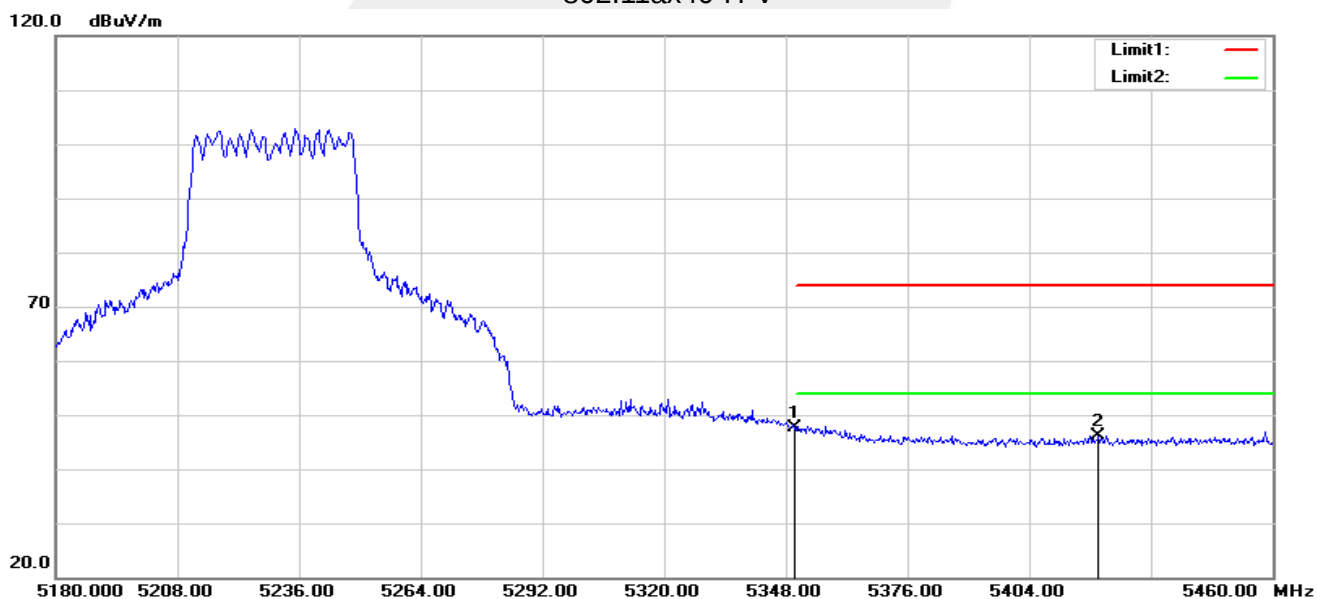

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.83	-5.23	47.60	74.00	-26.40	peak
2	5419.960	51.43	-5.20	46.23	74.00	-27.77	peak




802.11ax80-L-H

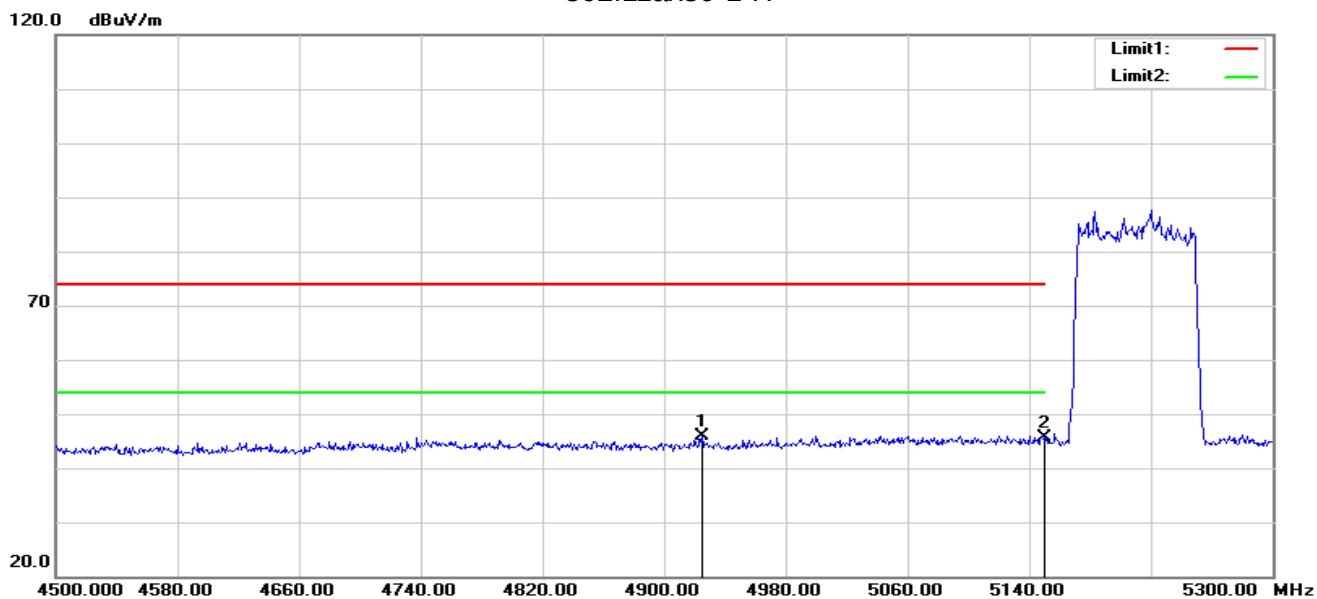

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.800	52.48	-6.68	45.80	74.00	-28.20	peak
2	5150.000	51.47	-5.73	45.74	74.00	-28.26	peak


802.11ax80-L-V

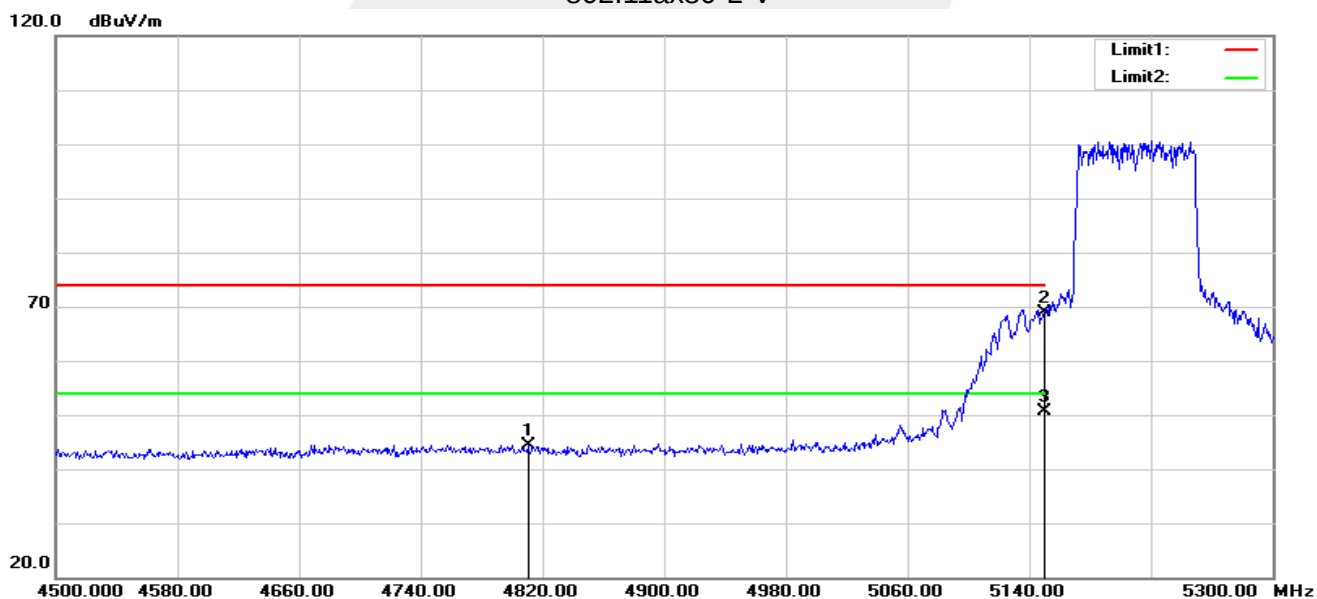

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4810.400	51.67	-7.18	44.49	74.00	-29.51	peak
2	5150.000	74.69	-5.73	68.96	74.00	-5.04	peak
3	5150.000	56.31	-5.73	50.58	54.00	-3.42	AVG




802.11ax80-H-H

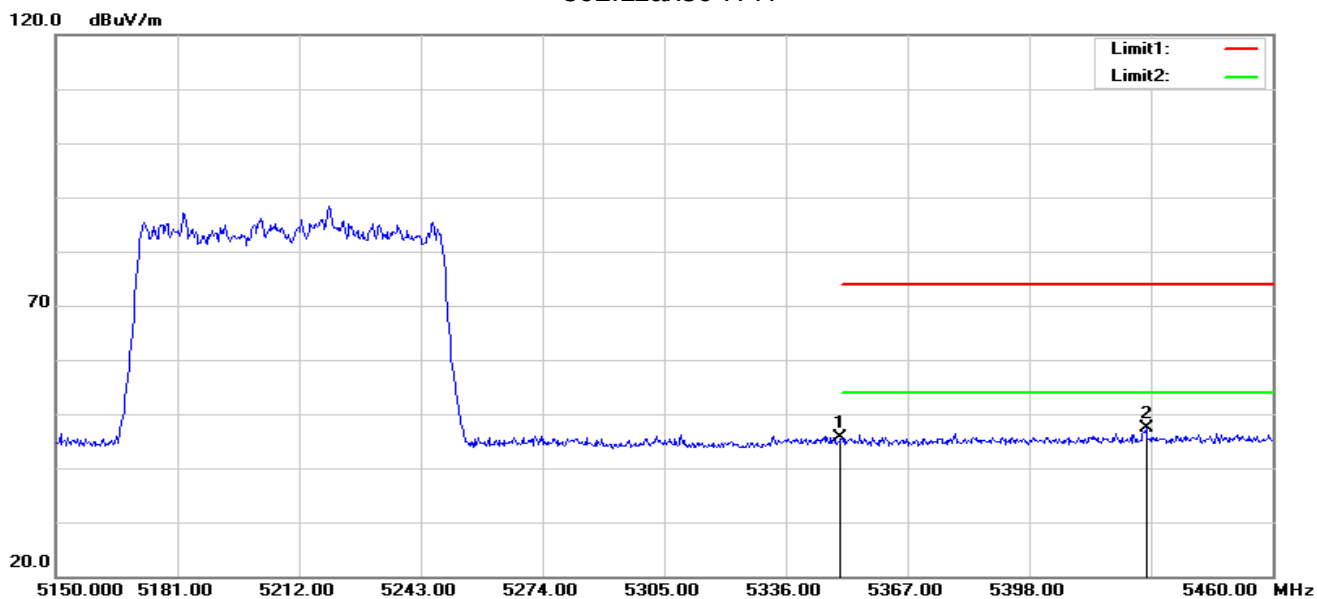

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.75	-5.23	45.52	74.00	-28.48	peak
2	5427.760	52.55	-5.19	47.36	74.00	-26.64	peak

802.11ax80-H-V

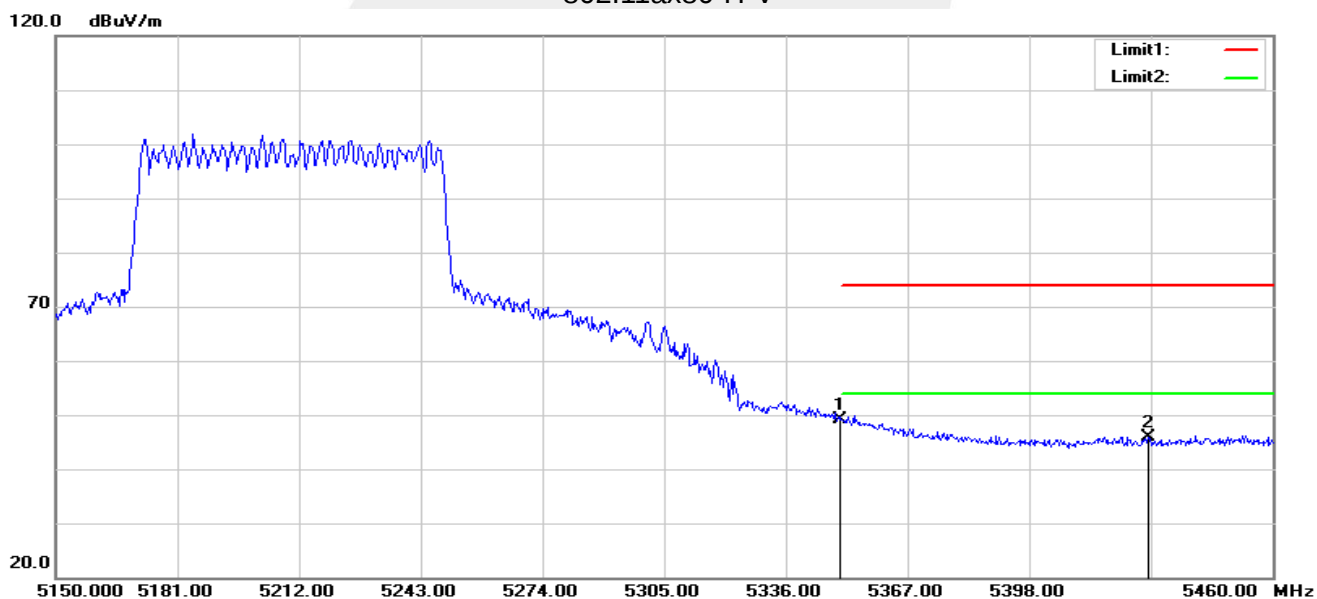

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	54.30	-5.23	49.07	74.00	-24.93	peak
2	5428.380	51.16	-5.19	45.97	74.00	-28.03	peak

Note: All modes have been tested. Only the worst mode shown in the report.



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz.

Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD


No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

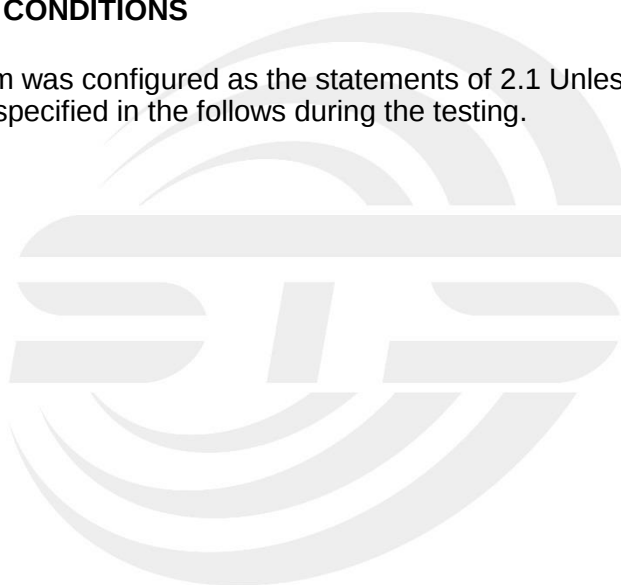



4.6 TEST RESULTS

5150-5250MHz								
Frequency	Direct measurement Ant_A Power Density (dBm)	Direct measurement Ant_B Power Density (dBm)	Duty cycle factor	Final Ant_A Power Density (dBm)	Final Ant_B Power Density (dBm)	Power Density Total (dBm)	Limit (dBm)	Result
802.11a								
5180	-7.144	-9.057	0.195	-6.949	-8.862	--	11	PASS
5200	-6.870	-7.458	0.195	-6.675	-7.263	--	11	PASS
5240	-8.103	-9.439	0.195	-7.908	-9.244	--	11	PASS
802.11n20								
5180	-7.676	-6.686	0.199	-7.477	-6.487	-3.944	9.49	PASS
5200	-7.741	-6.530	0.199	-7.542	-6.331	-3.885	9.49	PASS
5240	-8.633	-7.755	0.199	-8.434	-7.556	-4.963	9.49	PASS
802.11n40								
5190	-11.143	-9.672	0.311	-10.832	-9.361	-7.024	9.49	PASS
5230	-12.215	-10.121	0.311	-11.904	-9.810	-7.721	9.49	PASS
802.11ac20								
5180	-7.482	-7.262	0.027	-7.455	-7.235	-4.334	9.49	PASS
5200	-8.043	-6.527	0.027	-8.016	-6.500	-4.182	9.49	PASS
5240	-8.963	-7.302	0.027	-8.936	-7.275	-5.017	9.49	PASS
802.11ac40								
5190	-11.403	-9.404	0.080	-11.323	-9.324	-7.199	9.49	PASS
5230	-11.859	-9.927	0.080	-11.779	-9.847	-7.696	9.49	PASS
802.11ac80								
5210	-14.040	-12.440	0.199	-13.841	-12.241	-9.958	9.49	PASS
802.11ax20								
5180	-7.969	-6.697	0.046	-7.923	-6.651	-4.230	9.49	PASS
5200	-7.828	-6.347	0.046	-7.782	-6.301	-3.968	9.49	PASS
5240	-9.188	-7.585	0.046	-9.142	-7.539	-5.257	9.49	PASS
802.11ax40								
5190	-10.976	-9.916	0.114	-10.862	-9.802	-7.289	9.49	PASS
5230	-12.094	-10.499	0.114	-11.980	-10.385	-8.099	9.49	PASS
802.11ax80								
5210	-14.083	-12.861	0.247	-13.836	-12.614	-10.172	9.49	PASS

ote: 1. RB conversion formula: $10 \cdot \log(500\text{KHz}/\text{RBW})$

2. Test plots see Attachment A.

3. The MIMO antenna gain is 7.51dBi, which is greater than 6dBi, the MIMO mode limit will be reduced by 1.51dBm.

5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.5 TEST RESULTS

Note: Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5180	21.12	Pass
5200	21.11	Pass
5240	21.10	Pass
802.11n(HT20)		
5180	21.40	Pass
5200	21.43	Pass
5240	21.37	Pass
802.11n(HT40)		
5190	39.46	Pass
5230	39.60	Pass
802.11ac(VHT20)		
5180	21.31	Pass
5200	21.28	Pass
5240	21.40	Pass
802.11ac(VHT40)		
5190	39.54	Pass
5230	39.44	Pass
802.11ac(VHT80)		
5210	80.42	Pass
802.11ax(VHT20)		
5180	21.31	Pass
5200	21.32	Pass
5240	21.31	Pass
802.11ax(VHT40)		
5190	39.67	Pass
5230	39.71	Pass
802.11ax(VHT80)		
5210	80.44	Pass

Test plots see Attachment B

5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.2.5 TEST RESULTS

Note: Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5180	16.659	Pass
5200	16.606	Pass
5240	16.666	Pass
802.11n(HT20)		
5180	17.816	Pass
5200	17.810	Pass
5240	17.819	Pass
802.11n(HT40)		
5190	36.259	Pass
5230	36.235	Pass
802.11ac(VHT20)		
5180	17.764	Pass
5200	17.771	Pass
5240	17.762	Pass
802.11ac(VHT40)		
5190	36.240	Pass
5230	36.243	Pass
802.11ac(VHT80)		
5210	75.726	Pass
802.11ax(VHT20)		
5180	19.050	Pass
5200	19.030	Pass
5240	19.024	Pass
802.11ax(VHT40)		
5190	37.535	Pass
5230	37.570	Pass
802.11ax(VHT80)		
5210	76.834	Pass

Test plots See Attachment B

5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

Note: The EUT not support Band 5.725-5.85 GHz, not applicable.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

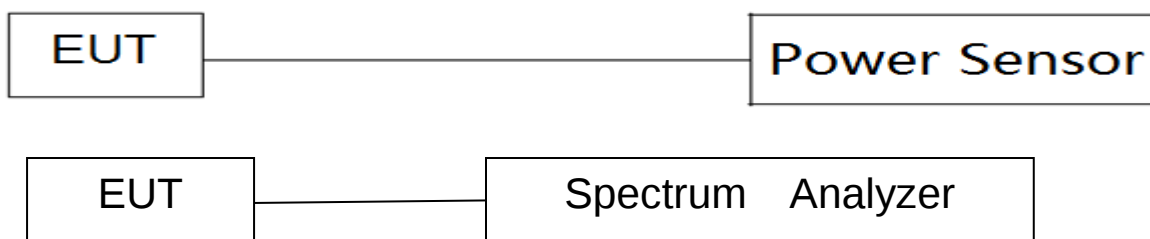

6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS

Note: The MIMO antenna gain is 7.21dBi, which is greater than 6dBi, the MIMO mode limit will be reduced by 1.21dBm.


Band I (5.15-5.25GHz)								
Test Channel	Frequency (MHz)	Direct measurement Ant_A AV Power (dBm)	Direct measurement Ant_B_AV Power (dBm)	Duty cycle factor (dB)	Final Ant_A AV Power (dBm)	Final Ant_B AV Power (dBm)	AV Power Total (dBm)	LIMIT (dBm)
802.11a								
36	5180	5.66	5.67	0.195	5.86	5.87	--	23.98
40	5200	5.07	5.51	0.195	5.27	5.71	--	23.98
48	5240	3.61	5.40	0.195	3.81	5.60	--	23.98
802.11n(HT20)								
36	5180	4.71	5.24	0.199	4.91	5.44	8.19	22.47
40	5200	4.57	5.33	0.199	4.77	5.53	8.18	22.47
48	5240	3.75	4.48	0.199	3.95	4.68	7.34	22.47
802.11n(HT40)								
38	5190	4.42	4.92	0.311	4.73	5.23	8.00	22.47
46	5230	4.21	4.23	0.311	4.52	4.54	7.54	22.47
802.11ac(VHT20)								
36	5180	4.72	5.31	0.027	4.75	5.34	8.06	22.47
40	5200	4.64	5.40	0.027	4.67	5.43	8.07	22.47
48	5240	3.82	4.56	0.027	3.85	4.59	7.24	22.47
802.11ac(VHT40)								
38	5190	4.37	4.67	0.080	4.45	4.75	7.61	22.47
46	5230	3.88	4.93	0.080	3.96	5.01	7.53	22.47
802.11ac(VHT80)								
42	5210	4.11	4.87	0.199	4.31	5.07	7.72	22.47
802.11ax(VHT20)								
36	5180	4.88	5.60	0.046	4.93	5.65	8.31	22.47
40	5200	4.79	5.76	0.046	4.84	5.81	8.36	22.47
48	5240	3.96	4.99	0.046	4.01	5.04	7.56	22.47
802.11ax(VHT40)								
38	5190	4.38	5.12	0.114	4.49	5.23	7.89	22.47
46	5230	3.87	4.94	0.114	3.98	5.05	7.56	22.47
802.11ax(VHT80)								
42	5210	4.78	4.93	0.247	5.03	5.18	8.11	22.47

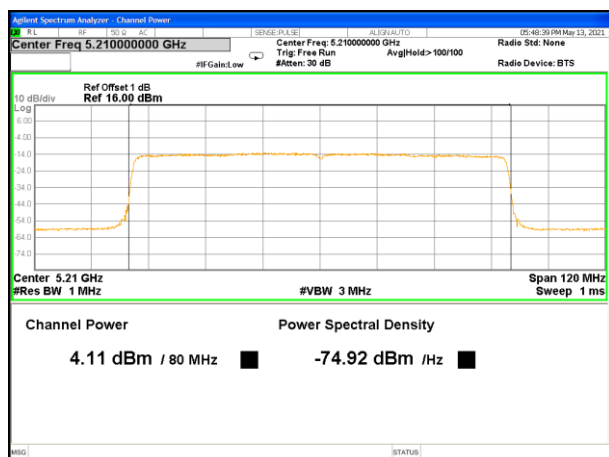


5210MHz_ac80_Ant A

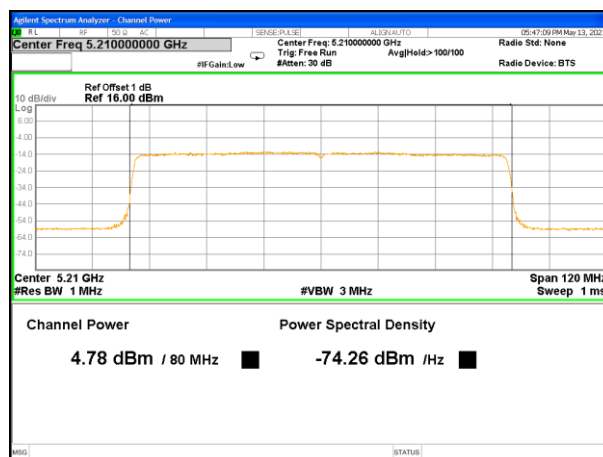

5210MHz_ax80_Ant A

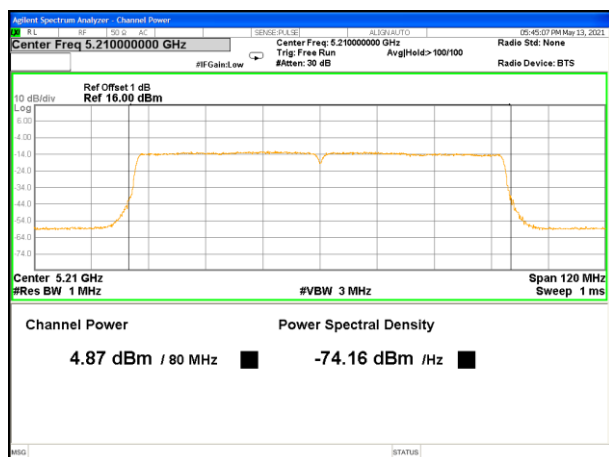


5210MHz_AV_Ant B

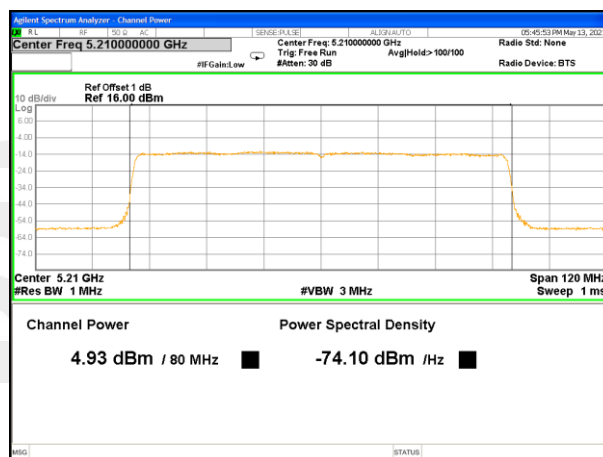


5210MHz_AV_Ant B




Band1				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.088	2.184	95.60%	0.195
n20	1.945	2.036	95.53%	0.199
n40	0.969	1.041	93.08%	0.311
ac20	1.944	1.956	99.39%	0.027
ac40	0.969	0.987	98.18%	0.080
ac80	0.470	0.492	95.53%	0.199
ax20	1.504	1.520	98.95%	0.046
ax40	0.789	0.810	97.41%	0.114
ax80	0.420	0.445	94.47%	0.247

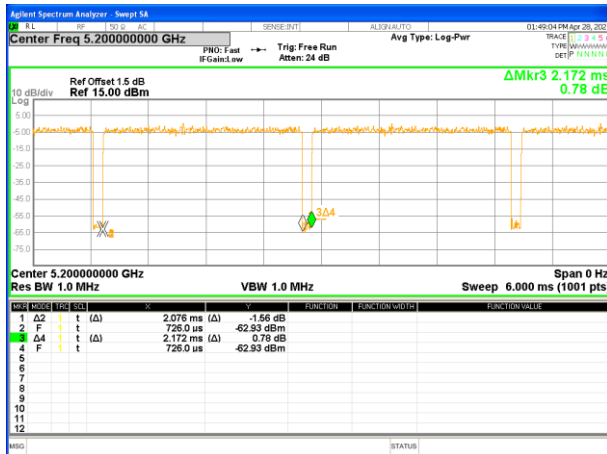

Band 1-a20

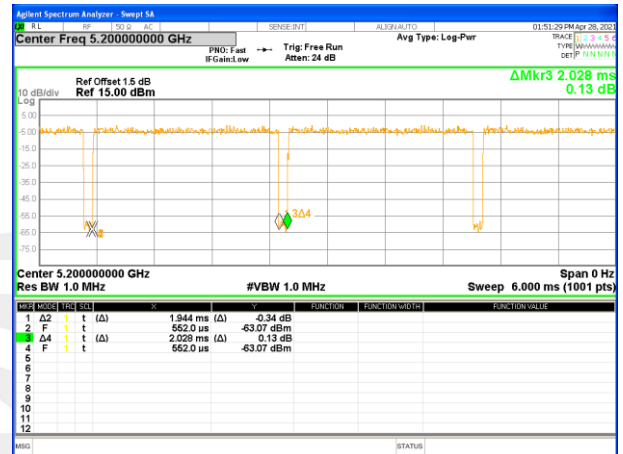


Band 1-n20

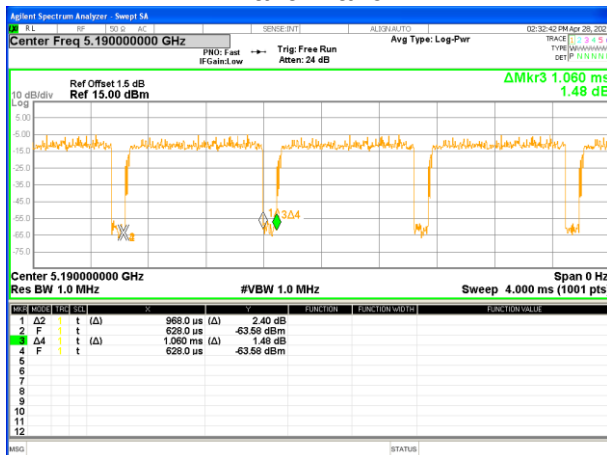


Band 1-n40



Band 1-ac20

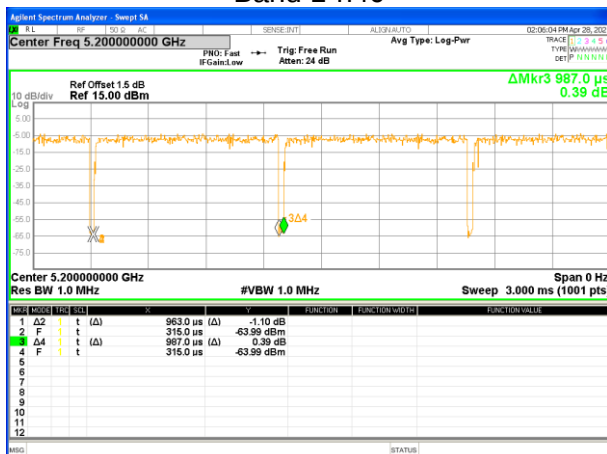

Band 1-ac40

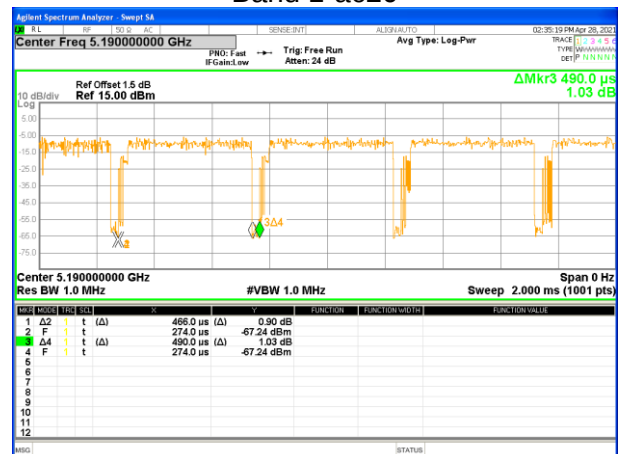

Band 1-ac80




7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

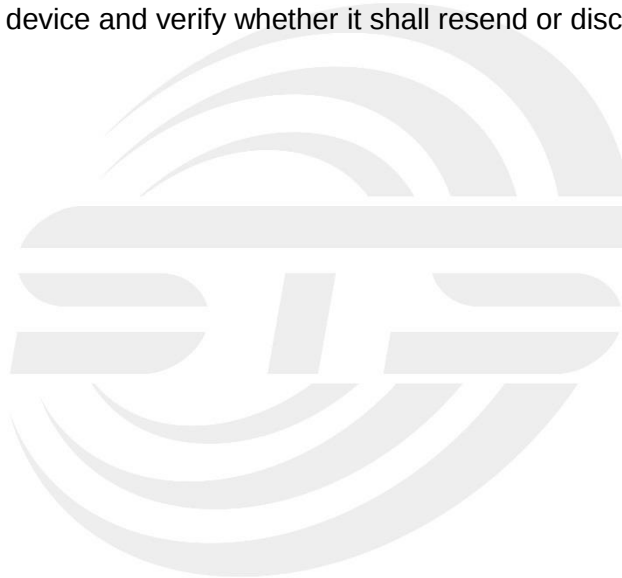



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

