

FCC ID : 2AW9D-HUB  
**FCC Test Report**  
 Part 15 subpart C

Client Information:

Applicant: Skylo Technologies

Applicant add.: 268 Lambert Avenue, Palo Alto, CA, 94306, USA

Product Information:

EUT Name: IoT Hub

Model No.:S-111 MK I

Derivative Model No.:S-101 Mk I , S-121 Mk I

Brand Name: Skylo Technologies

Standards: FCC PART 15 Subpart C 15.247

Prepared By:

AA Electro Magnetic Test Laboratory Private Limited

Add. : Plot No 174, Udyog Vihar - Phase 4, Sector 18,  
 Gurgaon, Haryana, India

Date of Receipt: May. 11, 2020

Date of Test: Jun. 02~ Jun.17 , 2020

Date of Issue: Jul.15, 2020

Test Result: Pass

This device described above has been tested by AA Electro Magnetic Test Laboratory Private Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: \_\_\_\_\_ Approved by: \_\_\_\_\_

(Dr R Lenin Raja) (Authorized Representative) (/ lenin83/)

(Steven Wu)

# 1 Contents

|                                                   | Page      |
|---------------------------------------------------|-----------|
| <b>COVER PAGE</b>                                 |           |
| <b>1 CONTENTS.....</b>                            | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                       | <b>4</b>  |
| COMPLIANCE WITH FCC PART 15 SUBPART C .....       | 4         |
| TEST LOCATION.....                                | 5         |
| MEASUREMENT UNCERTAINTY .....                     | 5         |
| <b>3 TEST FACILITY .....</b>                      | <b>6</b>  |
| DEVIATION FROM STANDARD .....                     | 6         |
| ABNORMALITIES FROM STANDARD CONDITIONS.....       | 6         |
| <b>4 GENERAL INFORMATION.....</b>                 | <b>7</b>  |
| GENERAL DESCRIPTION OF EUT .....                  | 7         |
| DESCRIPTION OF TEST CONDITIONS .....              | 9         |
| TEST PERIPHERAL LIST .....                        | 10        |
| EUT PERIPHERAL LIST .....                         | 10        |
| <b>5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....</b> | <b>11</b> |
| <b>6 TEST RESULT.....</b>                         | <b>13</b> |
| ANTENNA REQUIREMENT.....                          | 13        |
| Standard requirement .....                        | 13        |
| EUT Antenna .....                                 | 13        |
| CONDUCTION EMISSIONS MEASUREMENT .....            | 14        |
| Applied procedures / Limit .....                  | 14        |
| Test procedure.....                               | 14        |
| Test results .....                                | 15        |
| RADIATED EMISSIONS MEASUREMENT .....              | 17        |
| Applied procedures / Limit .....                  | 17        |
| Test setup .....                                  | 17        |
| Test procedure.....                               | 19        |
| Test Result .....                                 | 20        |
| TEST RESULTS (Restricted Bands Requirements)..... | 30        |
| BANDWIDTH TEST .....                              | 31        |
| Applied procedures / Limit .....                  | 31        |
| Test procedure.....                               | 31        |
| Deviation from standard.....                      | 31        |

|                                             |    |
|---------------------------------------------|----|
| Test setup .....                            | 31 |
| Test results .....                          | 32 |
| PEAK POWER DENSITY .....                    | 35 |
| Applied procedures / Limit .....            | 35 |
| Test procedure.....                         | 35 |
| Deviation from standard.....                | 35 |
| Test results .....                          | 36 |
| MAXIMUM PEAK OUTPUT POWER .....             | 39 |
| Applied procedures / Limit .....            | 39 |
| Test procedure.....                         | 39 |
| Deviation from standard.....                | 39 |
| Test setup .....                            | 39 |
| Test results .....                          | 40 |
| BAND EDGE .....                             | 43 |
| Applied procedures / Limit .....            | 43 |
| Test procedure.....                         | 43 |
| Deviation from standard.....                | 43 |
| Test setup .....                            | 43 |
| Test results .....                          | 44 |
| CONDUCTED SPURIOUS EMISSIONS.....           | 45 |
| Applied procedures / Limit .....            | 45 |
| Test procedure.....                         | 45 |
| Deviation from standard.....                | 45 |
| Test setup .....                            | 45 |
| Test results .....                          | 46 |
| PHOTOGRAPHS .....                           | 53 |
| RADIATED SPURIOUS EMISSION TEST SETUP ..... | 53 |
| CONDUCTED EMISSION TEST SETUP.....          | 54 |

## 2 Test Summary

### Compliance with FCC Part 15 subpart C

| Test                         | Test Requirement                                            | Standard Paragraph   | Result      |
|------------------------------|-------------------------------------------------------------|----------------------|-------------|
| Antenna Requirement          | FCC Part 15 C:2013                                          | Section 15.247(c)    | <b>PASS</b> |
| Conduction Emissions         | FCC Part 15 C:2013                                          | Section 15.207(a)    | <b>PASS</b> |
| Radiated Emissions           | FCC Part 15 C:2013                                          | Section 15.247(d)    | <b>PASS</b> |
| Occupied Bandwidth           | FCC Part 15 C:2013                                          | Section 15.247(a)(2) | <b>PASS</b> |
| Peak power density           | FCC Part 15 C:2013                                          | Section 15.247(e)    | <b>PASS</b> |
| Maximum Peak Output Power    | FCC Part 15 C:2013                                          | Section 15.247(b)(1) | <b>PASS</b> |
| Band edge                    | FCC Part 15 C:2013                                          | Section 15.247(d)    | <b>PASS</b> |
| Conducted Spurious Emissions | FCC Part 15 C:2013                                          | Section 15.247(d)    | <b>PASS</b> |
| Note:                        |                                                             |                      |             |
| (1)                          | Reference to the KDB 558074 D01 15.247 Meas Guidance v05r02 |                      |             |
| (2)                          | Reference to ANSI C63.10:2013                               |                      |             |

## Test Location

All tests were performed at:

AA Electro Magnetic Test Laboratory Private Limited

Plot No 174, Udyog Vihar - Phase 4, Sector 18, Gurgaon, Haryana, India

Tel.: +91-0124-4235350

## Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.4:2013, the maximum value of the uncertainty as below

| No. | Item                    | Uncertainty |
|-----|-------------------------|-------------|
| 1   | Conducted Emission Test | 2.70dB      |
| 2   | Radiated Emission Test  | 2.90dB      |

### 3 Test Facility

AA Electro Magnetic Test Laboratory is an ISO 17025:2017 certified lab by NABL, Certification No.TC-8597, CE Marking Certificate from Phoenix Germany #800058\_00 and ILAC-MRA #0366. We are also accredited ISO17025:2017 by A2LA(American association for laboratory accreditation) #5593.01 ,FCC Recognized #137777, ISED recognized for wireless product #26046, VCCI(Japan) supporting member #4053..

#### 3.1 Deviation from standard

None

#### 3.2 Abnormalities from standard conditions

None

## 4 General Information


### General Description of EUT

|                        |                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------|
| Manufacturer:          | VVDN Technologies Pvt. Ltd.                                                                                       |
| Manufacturer Address:  | 1st-2nd Floor, Plot no- 441, Sector-8,IMT Manesar,Gurgaon-122050,INDIA                                            |
| EUT Name:              | IoT Hub                                                                                                           |
| Model No:              | S-111 MK I                                                                                                        |
| Derivative Model No.:  | S-101 Mk I , S-121 Mk I                                                                                           |
| Brand Name:            | Skylo Technologies                                                                                                |
| Serial No:             | N/A                                                                                                               |
| Derivative model No.:  | S-101 MK I                                                                                                        |
| Operation frequency:   | 2402 MHz to 2480 MHz                                                                                              |
| NUMBER OF CHANNEL:     | 40                                                                                                                |
| Modulation Technology: | GFSK(1Mbps,2Mbps)                                                                                                 |
| Bluetooth version:     | Bluetooth v5.0                                                                                                    |
| Antenna Type:          | External FPC antenna                                                                                              |
| Antenna Gain:          | Maximum 5.6dBi                                                                                                    |
| H/W No.:               | 901-1-00624 (Rev B1)                                                                                              |
| S/W No.:               | 1.4.1                                                                                                             |
| Power Supply Range:    | 100-240VAC/50-60Hz,1.3A for adaptor<br>9-36VDC @ 2.5A from adaptor                                                |
| Output power (max) :   | 7.21dBm                                                                                                           |
| Note:                  |                                                                                                                   |
| 1.                     | For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |

| Description of Channel: |                 |         |                 |
|-------------------------|-----------------|---------|-----------------|
| Channel                 | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                      | 2402            | 20      | 2442            |
| 01                      | 2404            | 21      | 2444            |
| 02                      | 2406            | 22      | 2446            |
| 03                      | 2408            | 23      | 2448            |
| 04                      | 2410            | 24      | 2450            |
| 05                      | 2412            | 25      | 2452            |
| 06                      | 2414            | 26      | 2454            |
| 07                      | 2416            | 27      | 2456            |
| 08                      | 2418            | 28      | 2458            |
| 09                      | 2420            | 29      | 2460            |
| 10                      | 2422            | 30      | 2462            |
| 11                      | 2424            | 31      | 2464            |
| 12                      | 2426            | 32      | 2466            |
| 13                      | 2428            | 33      | 2468            |
| 14                      | 2430            | 34      | 2470            |
| 15                      | 2432            | 35      | 2472            |
| 16                      | 2434            | 36      | 2474            |
| 17                      | 2436            | 37      | 2476            |
| 18                      | 2438            | 38      | 2478            |
| 19                      | 2440            | 39      | 2480            |

## Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

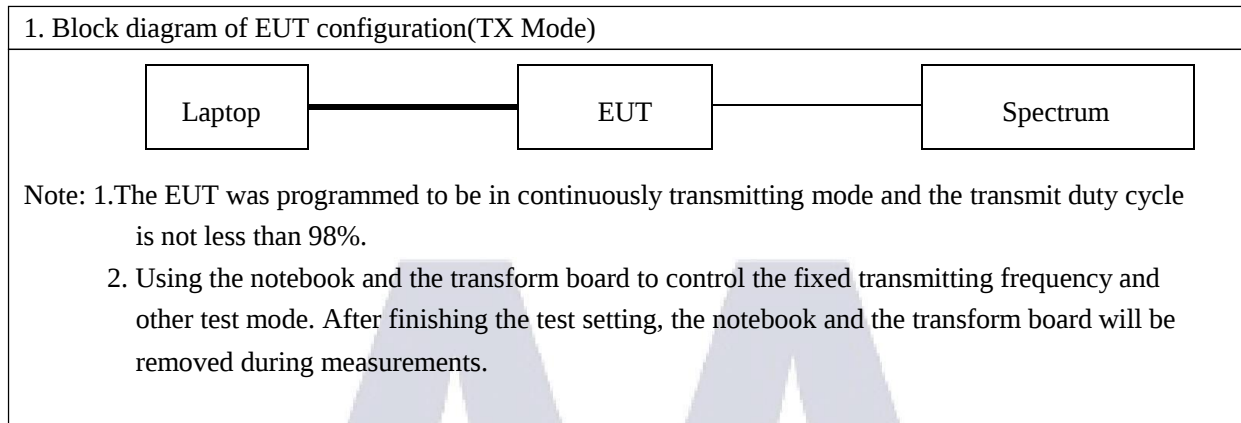

- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

| Frequency range over which device operates | Number of frequencies | Location in the range of operation          |
|--------------------------------------------|-----------------------|---------------------------------------------|
| 1 MHz or less                              | 1                     | Middle                                      |
| 1 to 10 MHz                                | 2                     | 1 near top and 1 near bottom                |
| More than 10 MHz                           | 3                     | 1 near top, 1 near middle and 1 near bottom |

- (4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

## Test Peripheral List

| No. | Equipment | Manufacturer | EMC Compliance | Model No.     | Serial No. | Power cord    | signal cable |
|-----|-----------|--------------|----------------|---------------|------------|---------------|--------------|
| 1   | Laptop    | DELL         | N/A            | Latitude 3490 | 5M2Z1W2    | 2m unshielded | N/A          |

## EUT Peripheral List

| No. | Equipment | Manufacturer | EMC Compliance | Model No. | Serial No.  | Power cord      | Remark |
|-----|-----------|--------------|----------------|-----------|-------------|-----------------|--------|
| 1   | Adapter   | EPSON        | N/A            | PS-180    | QLMZJ25323D | 1.5m unshielded | N/A    |

## 5 Equipments List for All Test Items

| No | Test Equipment              | Manufacturer      | Model No    | Serial No  | Cal. Date  | Cal. Due Date |
|----|-----------------------------|-------------------|-------------|------------|------------|---------------|
| 1  | EMI TEST Receiver           | Rohde and Schwarz | ESIB26      | 838786/010 | 2020/01/28 | 2021/01/27    |
| 2  | Loop antenna                | DAZE Beijing      | ZN30900C    | 18052      | 2020/01/29 | 2021/01/28    |
| 3  | Hi power horn antenna       | DAZE Beijing      | ZN30700     | 18012      | 2020/01/30 | 2021/01/29    |
| 4  | Horn antenna                | DAZE Beijing      | ZN30702     | 18006      | 2020/01/30 | 2021/01/29    |
| 5  | Horn antenna                | DAZE Beijing      | ZN30703     | 18005      | 2020/01/30 | 2021/01/29    |
| 6  | Preamplifier                | KELIANDA          | LNA-0009295 | -          | 2020/01/28 | 2021/01/29    |
| 7  | Preamplifier                | KELIANDA          | CF-00218    | -          | 2020/01/28 | 2021/01/27    |
| 8  | Bi conical Antenna          | DAZE Beijing      | ZN30505C    | 17038      | 2020/01/28 | 2021/01/29    |
| 9  | EMI-RECEIVER                | Schwarzbeck       | FCKL        | 1528194    | 2020/01/28 | 2021/01/27    |
| 10 | Spectrum Analyzer           | ADVANTEST         | R3361       | -          | 2019/05/15 | 2021/05/14    |
| 11 | LISN                        | Kyoritsu          | KNW-407     | 8-1789-5   | 2020/01/28 | 2021/01/27    |
| 12 | Network-LISN                | Schwarzbeck       | NNBM8125    | 81251314   | 2020/01/28 | 2021/01/27    |
| 13 | Network-LISN                | Schwarzbeck       | NNBM8125    | 81251315   | 2020/01/28 | 2021/01/27    |
| 14 | PULSELIMITER                | Rohde and Schwarz | ESH3-Z2     | 100681     | 2020/05/13 | 2021/05/12    |
| 15 | 50ΩCoaxialSwitch            | DAIWA             | 1565157     | -          | 2019/05/13 | 2021/05/12    |
| 16 | 50ΩCoaxialSwitch            | -                 | -           | -          | 2019/05/13 | 2021/05/12    |
| 17 | Wireless signal power meter | DARE!!            | RPR3006W    | RFSW190220 | 2019/01/29 | 2021/01/28    |

|    |                            |          |            |                          |            |            |
|----|----------------------------|----------|------------|--------------------------|------------|------------|
| 18 | Signal Generator           | KEYSIGHT | N5181A     | 512071                   | 2020/01/29 | 2021/01/28 |
| 19 | RF Vector Signal Generator | Keysight | N5182B     | 512094                   | 2020/01/29 | 2021/01/28 |
| 20 | Spectrum analyzer          | R&S      | FSV-40N    | 101385                   | 2020/01/29 | 2021/01/28 |
| 21 | Radio Communication Tester | R&S      | CMW 500    | 124589                   | 2019/5/15  | 2021/5/14  |
| 22 | Signal Generator           | R&S      | SMP02      | 837017/004<br>836593/005 | 2019/5/15  | 2021/5/14  |
| 23 | DC Power Supply            | Guanker  | JK15040K   | TNC/ET/C/0<br>01/15      | 2020/2/2   | 2021/2/1   |
| 24 | Pro. Temp & Humi. chamber  | MENTEK   | MHP-150-1C | MAA081125<br>01          | 2020/2/2   | 2021/2/1   |
| 25 | Attenuators                | AGILENT  | 8494B      | -                        | -          | -          |
| 26 | Attenuators                | AGILENT  | 8495B      | -                        | -          | -          |

## 6 Test Result

### Antenna Requirement

#### Standard requirement

15.203 requirements: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### EUT Antenna

The antenna is an external FPC antenna which is connected to the board via UFL connector. Antenna gain is maximum 5.6 dBi from 2.4GHz to 2.5 GHz

## Conduction Emissions Measurement

### Applied procedures / Limit


| Frequency of Emission (MHz) | Conducted Limit (dBμV) |            |
|-----------------------------|------------------------|------------|
|                             | Quasi-peak             | Average    |
| 0.15-0.5                    | 66 to 56 *             | 56 to 46 * |
| 0.5-5                       | 56                     | 46         |
| 5-30                        | 60                     | 50         |

Note: Decreases with the logarithm of the frequency.

### Test procedure

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

### Test setup

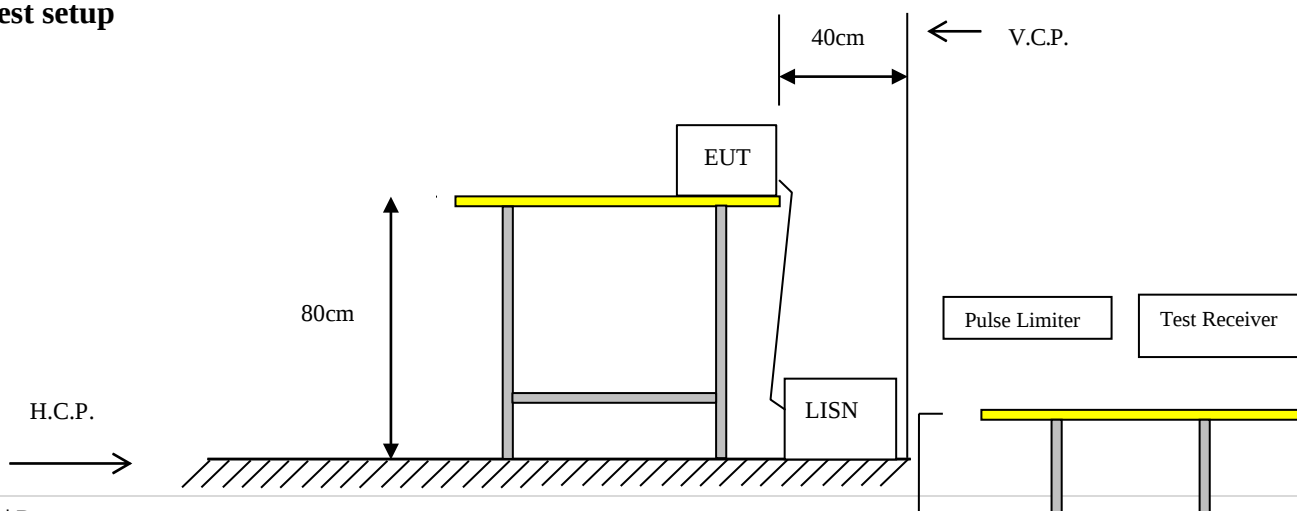


## Test results

|                       |                      |                     |            |
|-----------------------|----------------------|---------------------|------------|
| EUT :                 | IoT Hub              | Model Name. :       | S-111 MK I |
| Temperature :         | 25 °C                | Relative Humidity : | 51%        |
| Pressure :            | 1010hPa              | Test Date :         | 2020-06-17 |
| Test Mode :           | TX CH00 (worst case) | Phase :             | Line       |
| <b>Test Voltage :</b> | AC 120V,60Hz         |                     |            |

| Frequency (MHz) | Meter Reading (dBμV) | Factor(dB) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Detector   |
|-----------------|----------------------|------------|-----------------------|---------------|-------------|------------|
| 0.1573          | 44.45                | 15.48      | 59.93                 | 65.6          | -5.67       | Quasi-Peak |
| 0.1582          | 18.67                | 15.48      | 34.15                 | 55.55         | -21.4       | Average    |
| 0.6169          | 29.99                | 15.41      | 45.4                  | 56            | -10.6       | Quasi-Peak |
| 0.6169          | 11.9                 | 15.41      | 27.31                 | 46            | -18.69      | Average    |
| 1.8589          | 34.75                | 15.41      | 50.16                 | 56            | -5.84       | Quasi-Peak |
| 1.8678          | 21.88                | 15.41      | 37.29                 | 46            | -8.71       | Average    |


Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

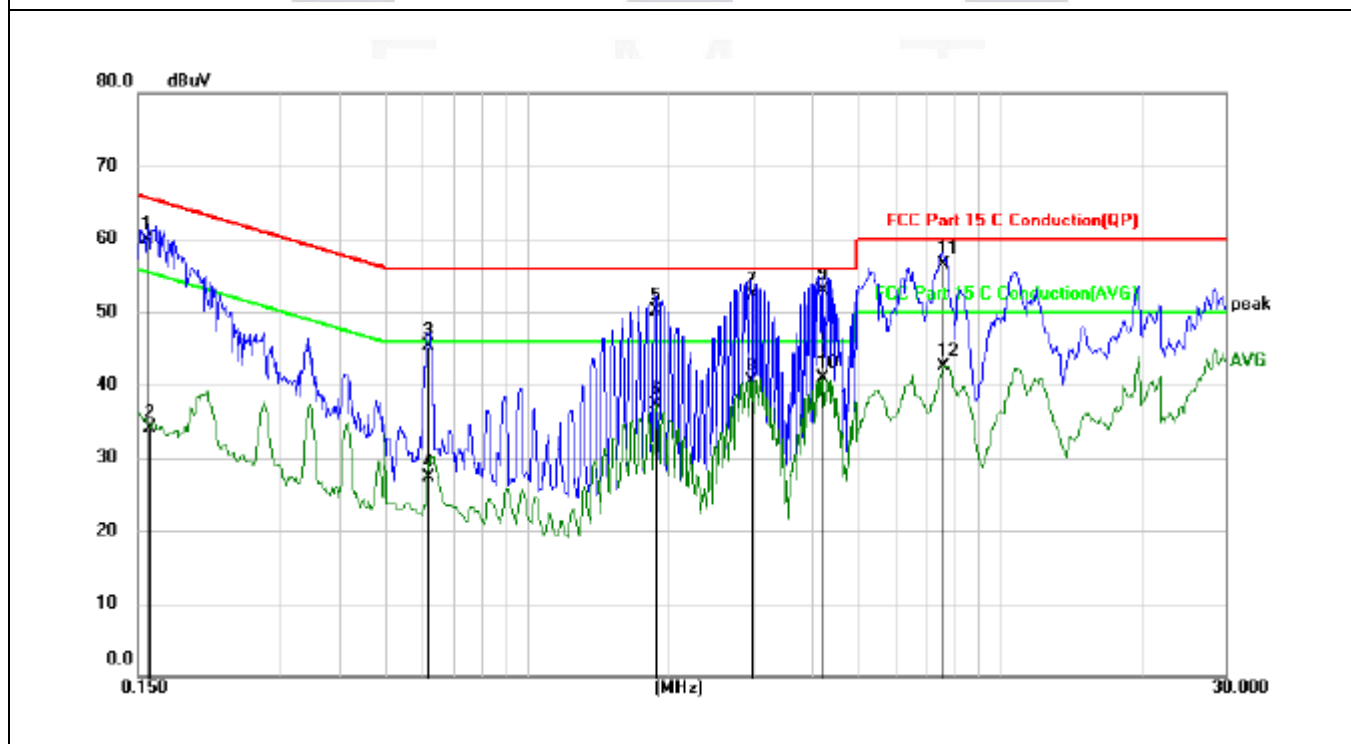

|                       |                      |                     |            |
|-----------------------|----------------------|---------------------|------------|
| EUT :                 | IoT Hub              | Model Name. :       | S-111 MK I |
| Temperature :         | 25 °C                | Relative Humidity : | 50%        |
| Pressure :            | 1010hPa              | Test Date :         | 2020-06-17 |
| Test Mode :           | TX CH00 (worst case) | Phase :             | Neutral    |
| <b>Test Voltage :</b> | AC 120V,60Hz         |                     |            |

| Frequency (MHz) | Meter Reading (dBμV) | Factor(dB) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Detector   |
|-----------------|----------------------|------------|-----------------------|---------------|-------------|------------|
| 0.1582          | 44.95                | 15.48      | 60.43                 | 65.55         | -5.12       | Quasi-Peak |
| 0.1582          | 19.54                | 15.48      | 35.02                 | 55.55         | -20.53      | Average    |
| 0.6169          | 31.5                 | 15.41      | 46.91                 | 56            | -9.09       | Quasi-Peak |
| 0.6169          | 13.57                | 15.41      | 28.98                 | 46            | -17.02      | Average    |
| 1.8588          | 34.69                | 15.41      | 50.1                  | 56            | -5.9        | Quasi-Peak |
| 1.8677          | 21.96                | 15.41      | 37.37                 | 46            | -8.63       | Average    |

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

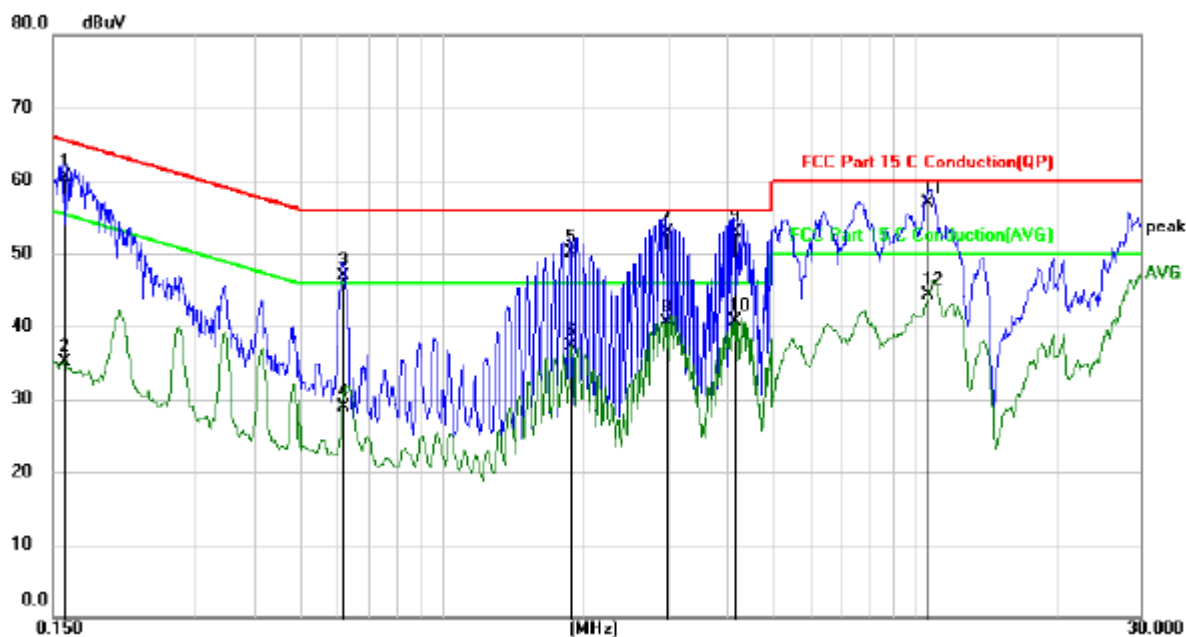

## Radiated Emissions Measurement

### Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

| Frequency of Emission (MHz) | Field Strength  |                          | Measurement Distance (meters) |
|-----------------------------|-----------------|--------------------------|-------------------------------|
|                             | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |                               |
| 0.009-0.49                  | 2400/F(kHz)     |                          | 300                           |
| 0.49-1.705                  | 24000/F(kHz)    |                          | 30                            |
| 1.705-30                    | 30              |                          | 30                            |
| 30-88                       | 100             | 40                       | 3                             |
| 88-216                      | 150             | 43.5                     | 3                             |
| 216-960                     | 200             | 46                       | 3                             |
| Above 960                   | 500             | 54                       | 3                             |


### Test setup

#### Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

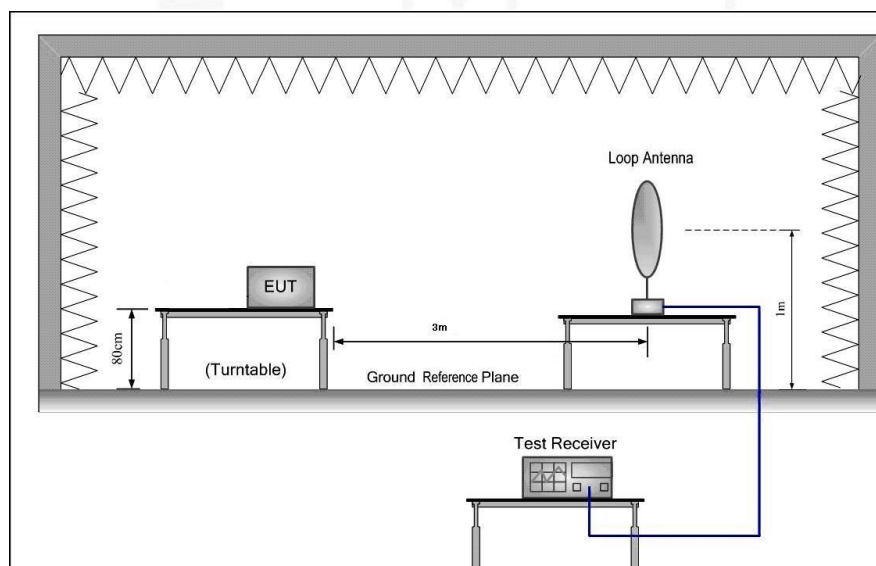

2) 30 MHz to 1 GHz emissions:

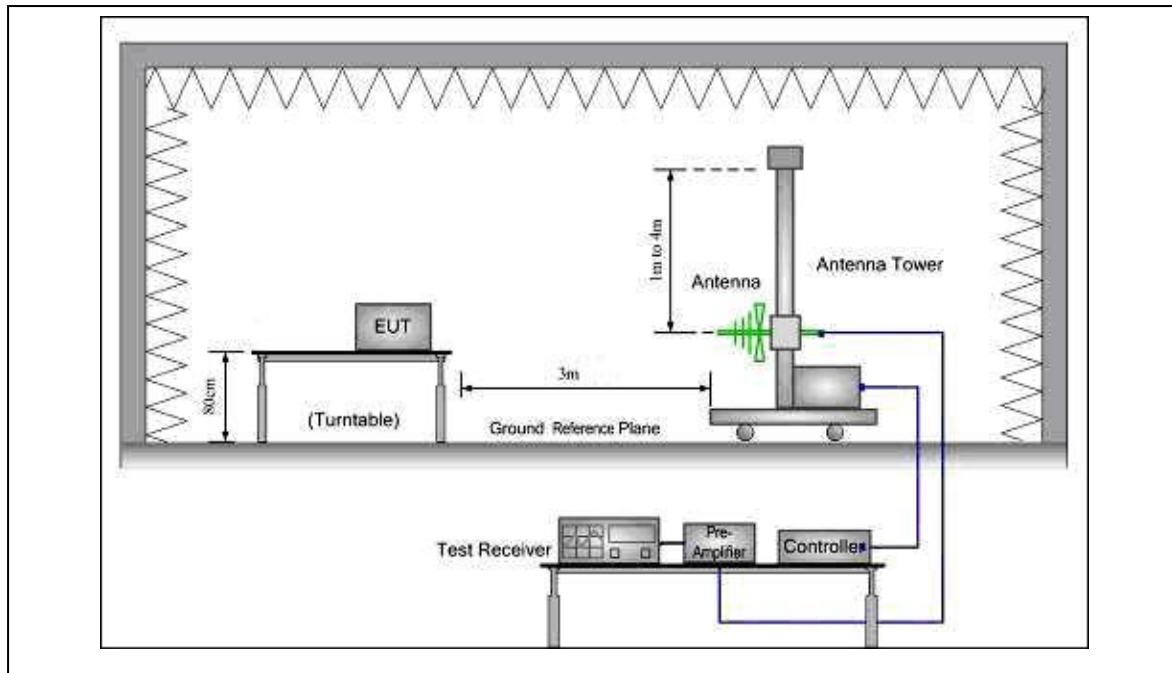

3) 1 GHz to 25 GHz emissions:

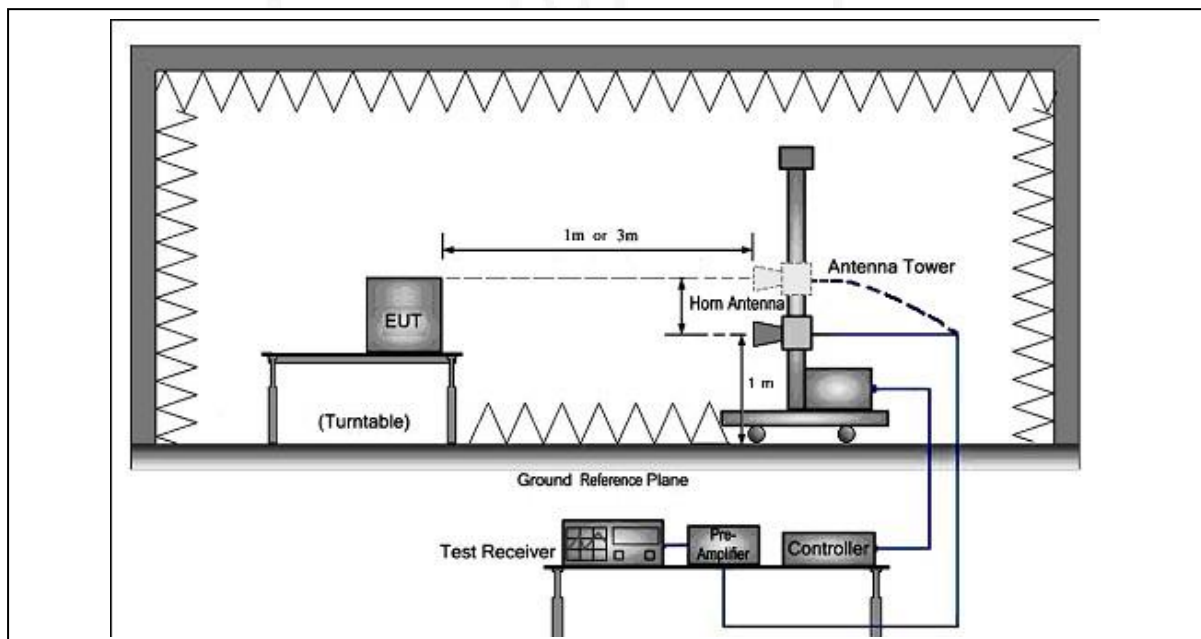

## Test procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter, for the test frequency of above 1GHz, horn antenna opening in the test would have been facing the EUT when rise or fall) and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 1MHz for Peak detection at frequency above 1GHz.
- Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
- Repeat above procedures until all frequencies measured was complete.

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For Average measurement at frequency above 1GHz.

The resolution bandwidth of the test receiver was 1MHz; due to the shortest pulse width  $T$  is 116us, according the video bandwidth should not smaller than  $1/T$ , so the video bandwidth is 10Hz.

In 18GHz to 25GHz, The EUT was checked by Horn ANT. But the test result at least have 20dB margin.

The EUT was tested in Chamber Site.

## Test Result

### Radiated Emissions Test Data Below 30MHz

|                      |                                                          |                     |               |
|----------------------|----------------------------------------------------------|---------------------|---------------|
| EUT :                | IoT Hub                                                  | Model Name :        | S-111 MK I    |
| Temperature :        | 26 °C                                                    | Test Data           | 2020-06-03    |
| Pressure :           | 1005 hPa                                                 | Relative Humidity : | 56%           |
| Test Mode :          | TX                                                       | Test Voltage :      | AC 120V,60Hz  |
| Measurement Distance | 3 m                                                      | Frenqucy Range      | 9KHz to 30MHz |
| RBW/VBW              | 9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP |                     |               |

No emission found between lowest internal used/generated frequencies to 30MHz.

## Radiated Emissions Test Data Below 1GHz

|                      |                                                        |                     |               |
|----------------------|--------------------------------------------------------|---------------------|---------------|
| EUT :                | IoT Hub                                                | Model Name :        | S-111 MK I    |
| Temperature :        | 25 °C                                                  | Test Data           | 2020-06-03    |
| Pressure :           | 1010 hPa                                               | Relative Humidity : | 60%           |
| Test Mode :          | TX (1Mbps) CH00 (worst case)                           | Test Voltage :      | AC 120V,60Hz  |
| Measurement Distance | 3 m                                                    | Frenqucy Range      | 30MHz to 1GHz |
| RBW/VBW              | 100KHz / 300KHz for spectrum, RBW=120KHz for receiver. |                     |               |

Test at Channel 00 (2.402 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV/m | Limit<br>dB/m | Over<br>dB | Detector |
|---------|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 *     | 33.8877      | 69.01                    | -34.02                  | 34.99                      | 40.00         | -5.01      | QP       |
| 2       | 47.4949      | 54.89                    | -30.80                  | 24.09                      | 40.00         | -15.91     | QP       |
| 3       | 68.8777      | 61.68                    | -29.03                  | 32.65                      | 40.00         | -7.35      | QP       |
| 4       | 156.3527     | 49.77                    | -21.78                  | 27.99                      | 43.50         | -15.51     | QP       |
| 5       | 875.5911     | 39.20                    | -4.63                   | 34.57                      | 46.00         | -11.43     | QP       |
| 6       | 937.7955     | 37.81                    | -3.44                   | 34.37                      | 46.00         | -11.63     | QP       |

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Test at Channel 00 (2.402 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   | !   | 33.8878      | 70.11                    | -34.02                  | 36.09                      | 40.00         | -3.91      | QP       |
| 2   |     | 47.4950      | 60.29                    | -30.80                  | 29.49                      | 40.00         | -10.51     | QP       |
| 3   | *   | 66.9339      | 65.61                    | -29.14                  | 36.47                      | 40.00         | -3.53      | QP       |
| 4   |     | 142.7455     | 47.53                    | -22.49                  | 25.04                      | 43.50         | -18.46     | QP       |
| 5   |     | 875.5912     | 37.85                    | -4.63                   | 33.22                      | 46.00         | -12.78     | QP       |
| 6   |     | 949.4589     | 37.09                    | -3.07                   | 34.02                      | 46.00         | -11.98     | QP       |

Note: “\*” means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Test at Channel 19 (2.440 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   |          |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|
|     |     | MHz      | Level   | Factor  | ment     |       |        | Detector |
|     |     |          | dBμV    | dB      | dBμV/m   | dB/m  | dB     |          |
| 1   | !   | 35.8316  | 68.76   | -33.88  | 34.88    | 40.00 | -5.12  | QP       |
| 2   |     | 47.4950  | 55.03   | -30.80  | 24.23    | 40.00 | -15.77 | QP       |
| 3   | *   | 68.8777  | 64.21   | -29.03  | 35.18    | 40.00 | -4.82  | QP       |
| 4   |     | 111.6433 | 53.39   | -24.80  | 28.59    | 43.50 | -14.91 | QP       |
| 5   |     | 875.5912 | 39.88   | -4.63   | 35.25    | 46.00 | -10.75 | QP       |
| 6   |     | 941.6834 | 35.76   | -3.31   | 32.45    | 46.00 | -13.55 | QP       |

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Test at Channel 19 (2.440 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   | !   | 35.8316      | 69.39                    | -33.88                  | 35.51                      | 40.00         | -4.49      | QP       |
| 2   |     | 47.4950      | 59.06                    | -30.80                  | 28.26                      | 40.00         | -11.74     | QP       |
| 3   | *   | 66.9339      | 66.11                    | -29.14                  | 36.97                      | 40.00         | -3.03      | QP       |
| 4   |     | 150.5210     | 46.49                    | -21.88                  | 24.61                      | 43.50         | -18.89     | QP       |
| 5   |     | 875.5912     | 37.30                    | -4.63                   | 32.67                      | 46.00         | -13.33     | QP       |
| 6   |     | 949.4589     | 37.11                    | -3.07                   | 34.04                      | 46.00         | -11.96     | QP       |

Note: ‘\*’ means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Test at Channel 39 (2.480 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Horizontal:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   | *   | 35.8316      | 69.11                    | -33.88                  | 35.23                      | 40.00         | -4.77      | QP       |
| 2   |     | 47.4950      | 56.75                    | -30.80                  | 25.95                      | 40.00         | -14.05     | QP       |
| 3   |     | 68.8777      | 62.90                    | -29.03                  | 33.87                      | 40.00         | -6.13      | QP       |
| 4   |     | 113.5872     | 51.44                    | -24.67                  | 26.77                      | 43.50         | -16.73     | QP       |
| 5   |     | 875.5912     | 37.20                    | -4.63                   | 32.57                      | 46.00         | -13.43     | QP       |
| 6   |     | 949.4589     | 33.83                    | -3.07                   | 30.76                      | 46.00         | -15.24     | QP       |

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifie

Test at Channel 39 (2.480 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

**Vertical:**

Peak scan

Level (dBμV/m)



Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   | !   | 33.8878      | 69.06                    | -34.02                  | 35.04                      | 40.00         | -4.96      | QP       |
| 2   | *   | 68.8777      | 64.68                    | -29.03                  | 35.65                      | 40.00         | -4.35      | QP       |
| 3   |     | 109.6994     | 47.90                    | -24.95                  | 22.95                      | 43.50         | -20.55     | QP       |
| 4   |     | 156.3527     | 48.19                    | -21.78                  | 26.41                      | 43.50         | -17.09     | QP       |
| 5   |     | 875.5912     | 39.26                    | -4.63                   | 34.63                      | 46.00         | -11.37     | QP       |
| 6   |     | 941.6834     | 39.57                    | -3.31                   | 36.26                      | 46.00         | -9.74      | QP       |

Note: ‘\*’ means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifie

**Radiated Emissions Test Data Above 1GHz**

|                      |                                                                                                               |                     |               |
|----------------------|---------------------------------------------------------------------------------------------------------------|---------------------|---------------|
| EUT :                | IoT Hub                                                                                                       | Model Name :        | S-111 MK I    |
| Temperature :        | 25 °C                                                                                                         | Test Data           | 2020-06-03    |
| Pressure :           | 1010 hPa                                                                                                      | Relative Humidity : | 60%           |
| Test Mode :          | TX(1Mbps)                                                                                                     | Test Voltage :      | AC 120V,60Hz  |
| Measurement Distance | 3 m                                                                                                           | Frenqucy Range      | 1GHz to 25GHz |
| RBW/VBW              | Spurious emission: 1MHz/1MHz for Peak, 1MHz/10Hz for Average.<br>non-restricted band: 100KHz/300KHz for Peak. |                     |               |

**(a) Antenna polarization: Horizontal**

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4804.000        | 51.29                | 5.06                | 56.35                  | 74.00          | -17.65      | PEAK          |
| 4804.000        | 39.43                | 5.06                | 44.49                  | 54.00          | -09.51      | AVERAGE       |
| 7206.000        | 46.67                | 7.03                | 53.70                  | 74.00          | -20.30      | PEAK          |
| 7206.000        | 35.56                | 7.03                | 42.59                  | 54.00          | -11.41      | AVERAGE       |

**(b) Antenna polarization: Vertical**

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4804.000        | 50.19                | 5.06                | 55.25                  | 74.00          | -18.75      | PEAK          |
| 4804.000        | 36.95                | 5.06                | 42.01                  | 54.00          | -11.99      | AVERAGE       |
| 7206.000        | 45.66                | 7.03                | 52.69                  | 74.00          | -21.31      | PEAK          |
| 7206.000        | 34.29                | 7.03                | 41.32                  | 54.00          | -12.68      | AVERAGE       |

Note:

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 00: 2402 MHz

Data rate: 1Mbps

(a) Antenna polarization: Horizontal

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4880.000        | 48.76                | 5.14                | 53.91                  | 74.00          | -20.09      | PEAK          |
| 4880.000        | 37.13                | 5.14                | 42.27                  | 54.00          | -11.73      | AVERAGE       |
| 7320.000        | 44.85                | 7.52                | 52.37                  | 74.00          | -21.63      | PEAK          |
| 7320.000        | 31.91                | 7.52                | 39.43                  | 54.00          | -14.57      | AVERAGE       |

(b) Antenna polarization: Vertical

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4880.000        | 48.53                | 5.14                | 53.67                  | 74.00          | -20.33      | PEAK          |
| 4880.000        | 35.97                | 5.14                | 41.11                  | 54.00          | -12.89      | AVERAGE       |
| 7320.000        | 43.67                | 7.52                | 51.19                  | 74.00          | -22.81      | PEAK          |
| 7320.000        | 33.85                | 7.52                | 41.37                  | 54.00          | -12.63      | AVERAGE       |

Note:

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Middle Channel 19: 2440 MHz

Data rate: 1Mbps

**(a) Antenna polarization: Horizontal**

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4960.000        | 49.28                | 5.14                | 54.42                  | 74.00          | -19.58      | PEAK          |
| 4960.000        | 38.39                | 5.14                | 43.53                  | 54.00          | -10.47      | AVERAGE       |
| 7440.000        | 45.51                | 7.52                | 53.03                  | 74.00          | -20.97      | PEAK          |
| 7440.000        | 35.38                | 7.52                | 42.90                  | 54.00          | -11.10      | AVERAGE       |

**(b) Antenna polarization: Vertical**

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| 4960.000        | 48.32                | 5.14                | 53.46                  | 74.00          | -20.54      | PEAK          |
| 4960.000        | 37.24                | 5.14                | 42.38                  | 54.00          | -11.62      | AVERAGE       |
| 7440.000        | 45.87                | 7.52                | 53.39                  | 74.00          | -20.61      | PEAK          |
| 7440.000        | 34.81                | 7.52                | 42.33                  | 54.00          | -11.67      | AVERAGE       |

**Note:**

**8~25GHz at least have 20dB margin. No recording in the test report.**

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 39: 2480 MHz

Data rate: 1Mbps

### TEST RESULTS (Restricted Bands Requirements)

|               |                                                                                                                                                                                                                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| EUT :         | IoT Hub                                                                                                                                                                                                                                                                                                    | Model Name :        | S-111 MK I   |
| Temperature : | 25 °C                                                                                                                                                                                                                                                                                                      | Test Data           | 2020-06-03   |
| Pressure :    | 1010 hPa                                                                                                                                                                                                                                                                                                   | Relative Humidity : | 60%          |
| Test Mode :   | TX(1Mbps)                                                                                                                                                                                                                                                                                                  | Test Voltage :      | AC 120V,60Hz |
| RBW/VBW       | 1MHz/1MHz for Peak, 1MHz/10Hz for Average.                                                                                                                                                                                                                                                                 |                     |              |
| Note :        | 1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                     |              |

| Test Mode                | Ant.Pol. H/V | Freq. (MHz) | Reading     |           | Ant/CF CF(dB) | Act           |             | Limit         |             |
|--------------------------|--------------|-------------|-------------|-----------|---------------|---------------|-------------|---------------|-------------|
|                          |              |             | Peak (dBuv) | AV (dBuv) |               | Peak (dBuv/m) | AV (dBuv/m) | Peak (dBuv/m) | AV (dBuv/m) |
| TX<br>Data rate<br>1Mbps | H            | 2390.00     | 46.45       | 35.36     | -5.79         | 40.66         | 29.57       | 74.00         | 54.00       |
|                          | V            | 2390.00     | 46.37       | 38.29     | -5.79         | 40.58         | 32.50       | 74.00         | 54.00       |
|                          | H            | 2483.50     | 44.82       | 34.31     | -4.98         | 39.84         | 29.33       | 74.00         | 54.00       |
|                          | V            | 2483.50     | 45.29       | 36.39     | -4.98         | 40.31         | 31.41       | 74.00         | 54.00       |

## BANDWIDTH TEST

### 6.4.1 Applied procedures / Limit

15.247(a) (2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test procedure

- The testing follows FCC KDB publication No.558074 D01 15.247 Meas Guidance v05r02
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW $\geq$ 3 $\times$ RBW, Sweep time = Auto, Detector Function = Peak, centering on a hopping channel Trace = Max Hold.
- Mark the peak frequency and -6 dB points bandwidth.

### 6.4.3 Deviation from standard

No deviation.

### 6.4.4 Test setup




### 6.4.5 Test results

|               |           |                     |              |
|---------------|-----------|---------------------|--------------|
| EUT :         | IoT Hub   | Model Name :        | S-111 MK I   |
| Temperature : | 26 °C     | Relative Humidity : | 53%          |
| Pressure :    | 1010 hPa  | Test Power :        | AC 120V,60Hz |
| Test Mode :   | TX(1Mbps) |                     |              |

| Test Mode       | Test Channel | Frequency<br>(MHz) | 6 dB Bandwidth<br>(KHz) | Limit<br>(kHz) |
|-----------------|--------------|--------------------|-------------------------|----------------|
| Data rate 1Mbps | CH00         | 2402               | 681.6                   | ≥500           |
|                 | CH19         | 2440               | 729.4                   | ≥500           |
|                 | CH39         | 2480               | 720.7                   | ≥500           |


(1Mbps)

The Lowest Channel 00: 2402 MHz

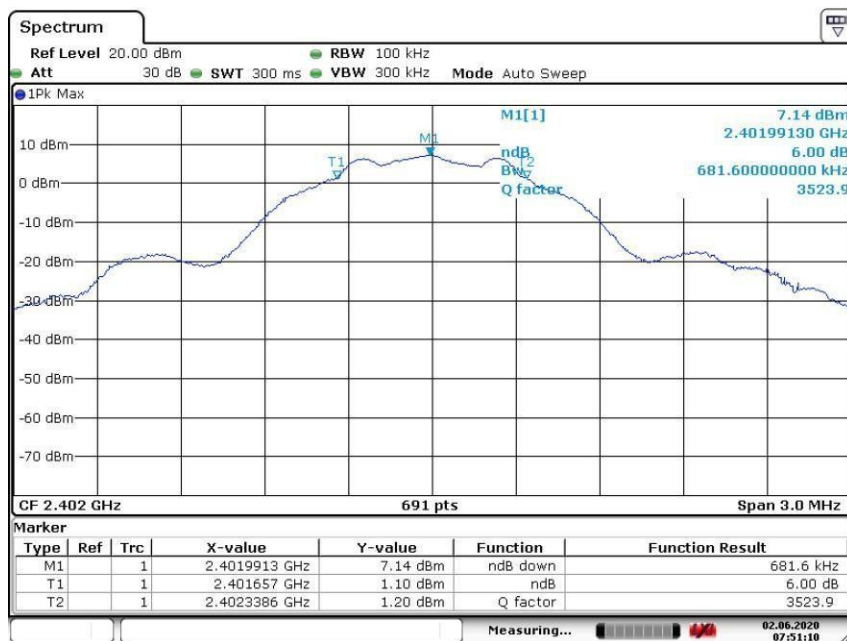


(1Mbps)

The Middle Channel 19: 2440 MHz

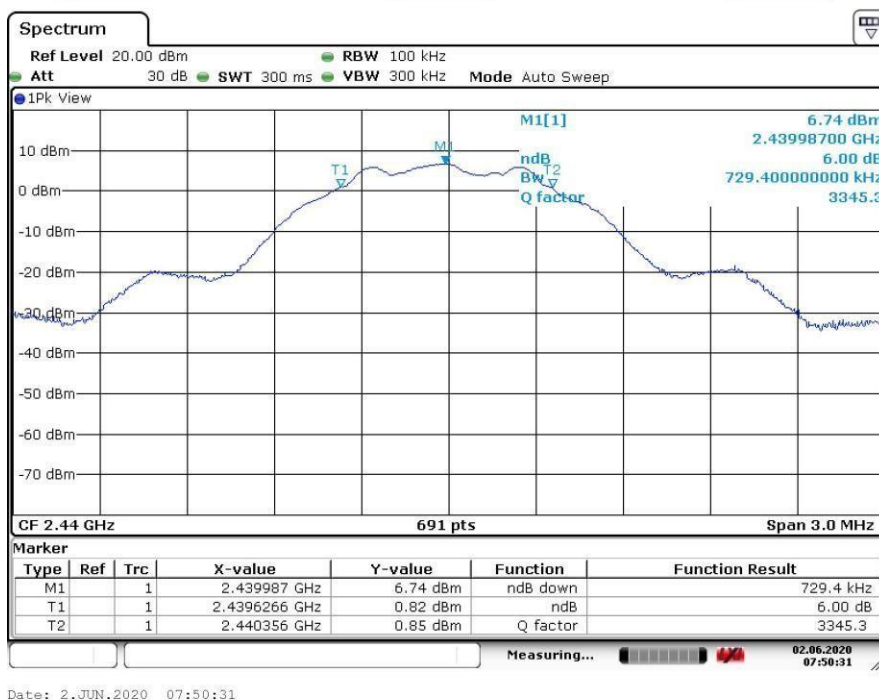

(1Mbps)  
The High Channel 39: 2480MHz

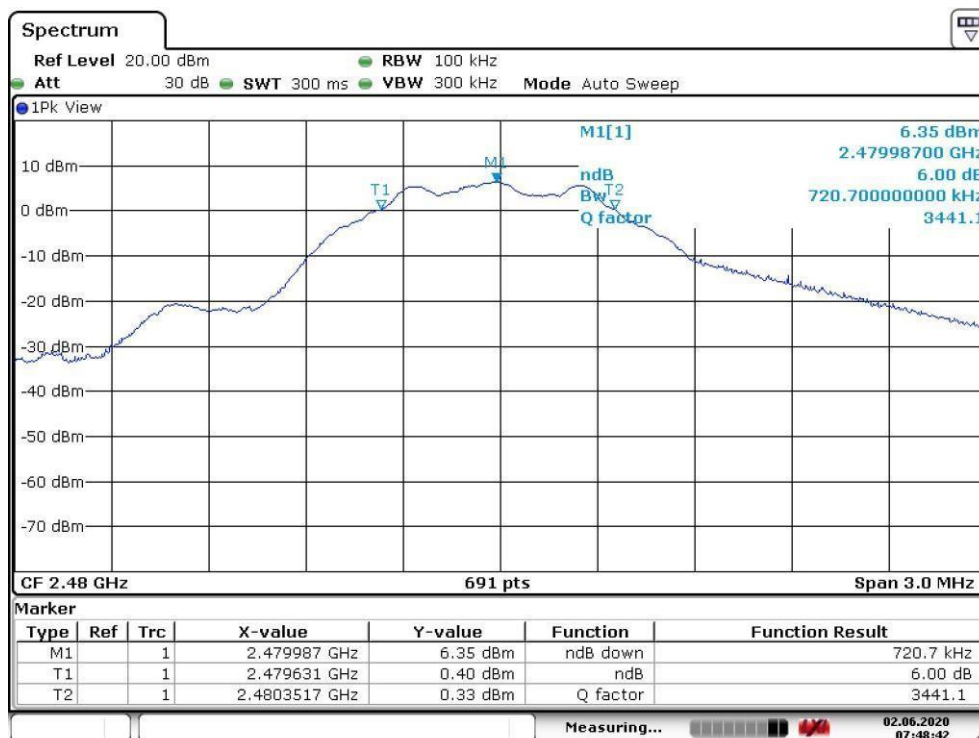

Date: 2.JUN.2020 07:48:42

## Peak Power Density

### Applied procedures / Limit

15.247(a) (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test procedure

- The testing follows Measurement procedure 10.2 Method PKPSD of FCC KDB publication No. 558074 D01 15.247 Meas Guidance v05r02
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as center frequency to channel center frequency, span=1.5 times the bandwidth, detector = peak  
 $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ ,  $\text{VBW} \geq 3 \times \text{RBW}$  kHz, Sweep time=Auto.
- Trace mode = max hold. Mark the peak.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Deviation from standard

No deviation.


### Test results

|               |           |                     |              |
|---------------|-----------|---------------------|--------------|
| EUT :         | IoT Hub   | Model Name :        | S-111 MK I   |
| Temperature : | 24 °C     | Relative Humidity : | 53%          |
| Pressure :    | 1010 hPa  | Test Power :        | AC 120V,60Hz |
| Test Mode :   | TX(1Mbps) |                     |              |


| Test Mode  | Channel frequency (MHz) | Power Density           | Limit (dBm/3kHz) | Result |
|------------|-------------------------|-------------------------|------------------|--------|
|            |                         | PSD 100kHz (dBm/100kHz) |                  |        |
| TX (1Mbps) | 2402                    | 7.17                    | 8                | Pass   |
|            | 2440                    | 6.77                    | 8                | Pass   |
|            | 2480                    | 6.41                    | 8                | Pass   |

**Note: The cable loss is 1.0dB**


## PSD 100kHz (1Mbps) The Lowest Channel 00: 2402MHz

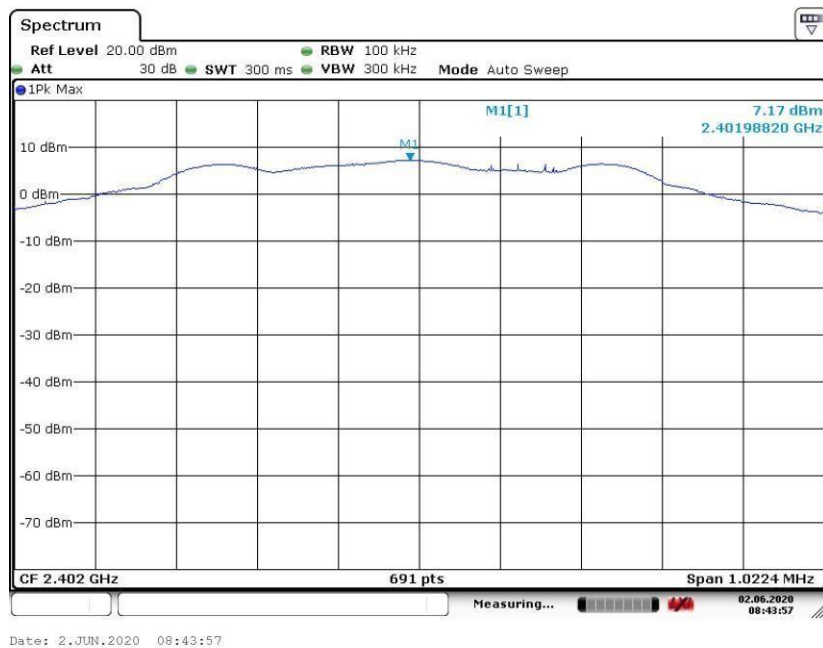

## PSD 100kHz (1Mbps) The Middle Channel 19: 2440MHz

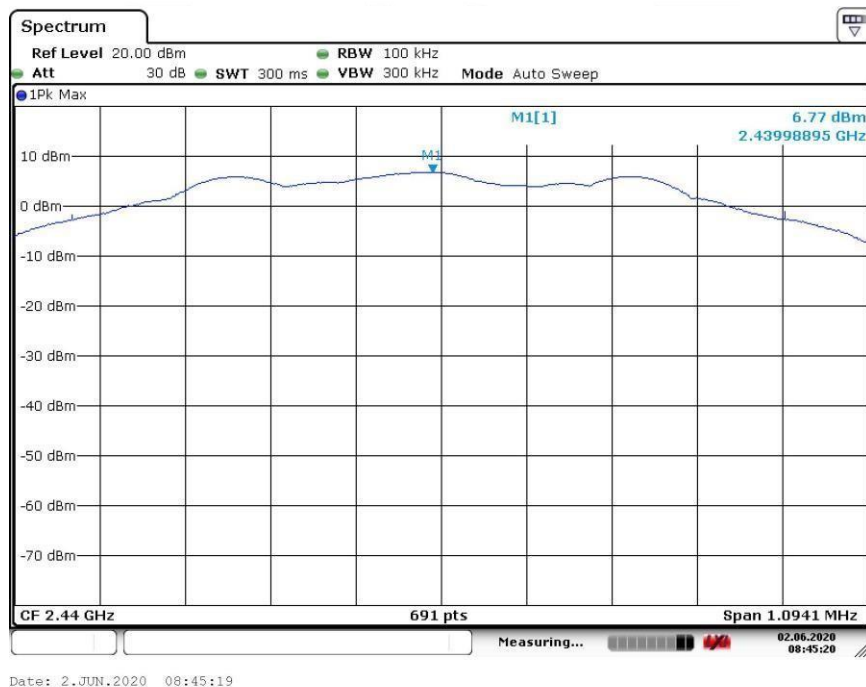

## PSD 100kHz (1Mbps) The High Channel 39: 2480MHz

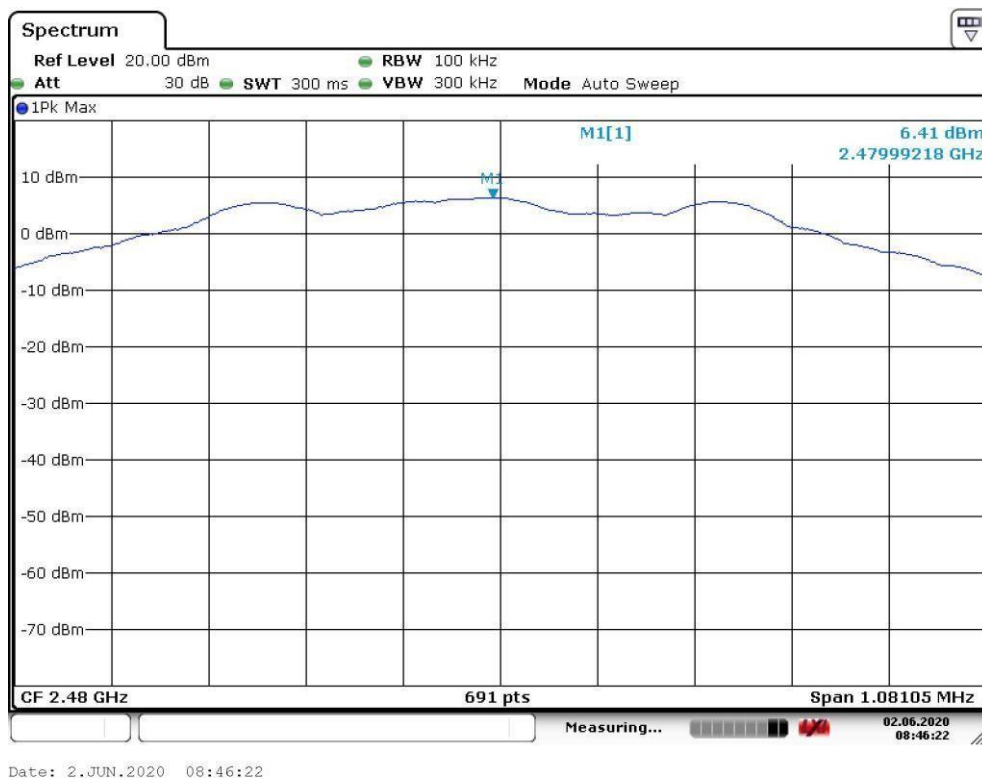

EMT

## Maximum Peak Output Power

### Applied procedures / Limit

15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


### Test procedure

- The testing follows FCC KDB publication No.558074 D01 15.247 Meas Guidance v05r02
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:  $RBW \geq \text{Bandwidth}$ ,  $VBW \geq 3 \times RBW$ , Sweep time = Auto,  $\text{Span} \geq 3 \times RBW$ ,
- Detector = peak. Trace mode = max hold.
- Use peak marker function to determine the peak amplitude level.

### Deviation from standard

No deviation.

### Test setup

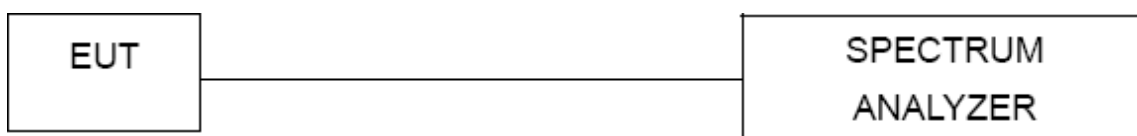

### Test results


|               |            |                     |              |
|---------------|------------|---------------------|--------------|
| EUT :         | IoT Hub    | Model Name :        | S-111 MK I   |
| Temperature : | 26 °C      | Relative Humidity : | 60%          |
| Pressure :    | 1010 hPa   | Test Voltage :      | AC 120V,60Hz |
| Test Mode :   | TX (1Mbps) |                     |              |
| Note: N/A     |            |                     |              |

| Test Mode       | Frequency | Peak Output Power (dBm) | Limit (dBm) | Result |
|-----------------|-----------|-------------------------|-------------|--------|
| Data rate 1Mbps | 2402 MHz  | 7.21                    | 30          | Pass   |
|                 | 2440 MHz  | 6.85                    | 30          | Pass   |
|                 | 2480 MHz  | 6.45                    | 30          | Pass   |

**Note: The cable loss is 1.0dB**


(1Mbps)

The Lowest Channel 00: 2402MHz

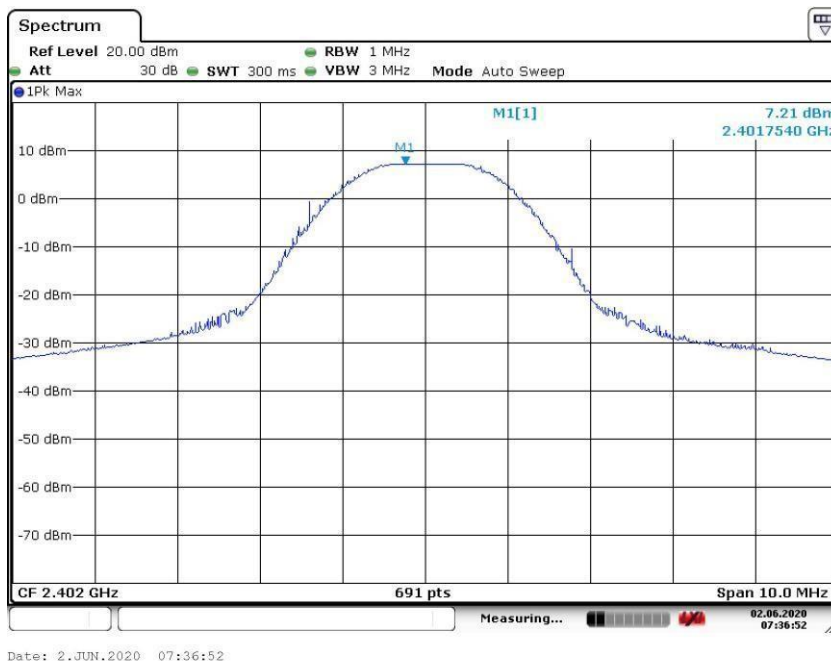

(1Mbps)

The Middle Channel 19: 2440MHz

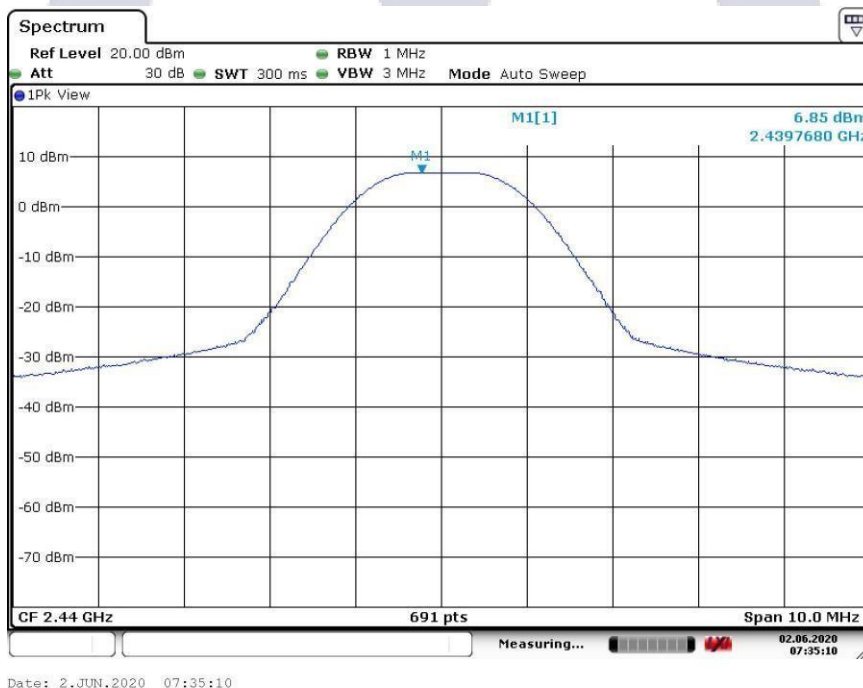

(1Mbps)

The High Channel 39: 2480MHz



Date: 2.JUN.2020 07:37:38

AA EMT

## Band edge

### Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test procedure

- The testing follows FCC KDB publication No.558074 D01 15.247 Meas Guidance v05r02
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100kHz, VBW $\geq$ 300kHz, Sweep time=Auto, Detector Function=Peak.
- The band edges was measured and recorded Result:  
The Lower Edges attenuated more than 20dB.  
The Upper Edges attenuated more than 20dB.

### Deviation from standard


No deviation.

### Test setup




## Test results

### (1Mbps) The Lowest Channel 00: 2402MHz

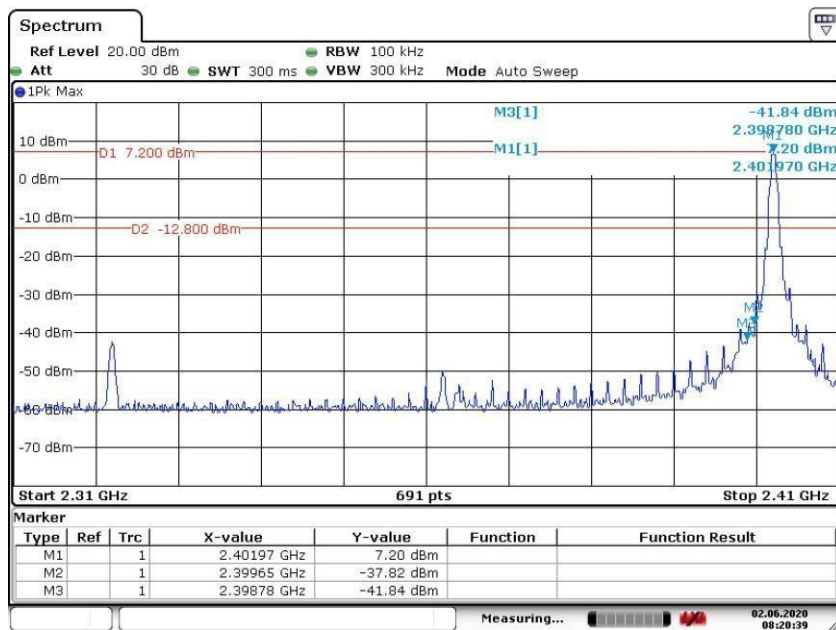

Date: 2.JUN.2020 08:20:39

### (1Mbps) The High Channel 39: 2480MHz

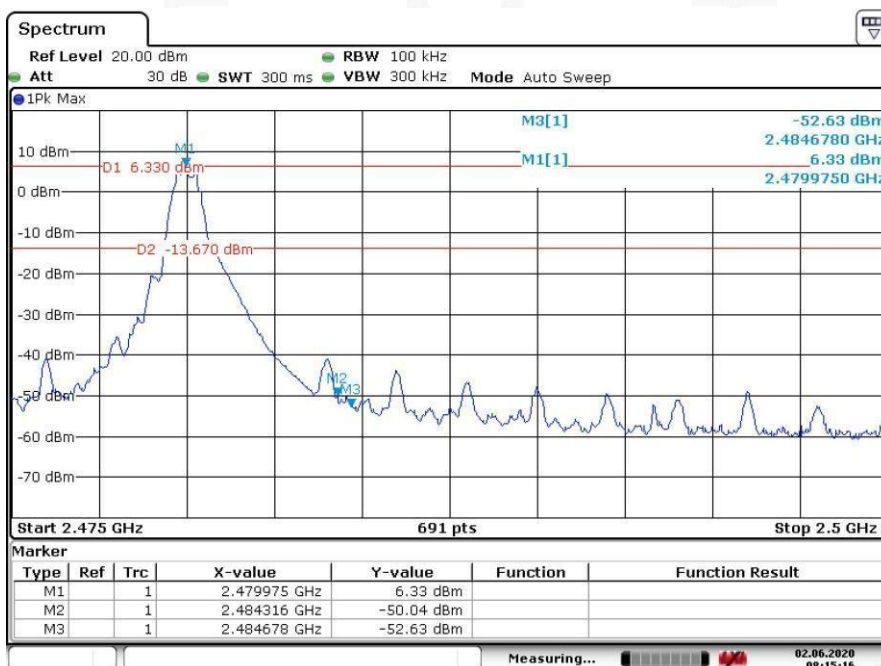

Date: 2.JUN.2020 08:15:16

## Conducted Spurious Emissions

### Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test procedure

- The testing follows FCC KDB publication No.558074 D01 15.247 Meas Guidance v05r02
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100kHz, VBW=300kHz, Sweep time=Auto, Detector Function=Peak, sweep points  $\geq$  investigated frequency range/RBW.

### Deviation from standard


No deviation.

### Test setup




## Test results

The Lowest Channel 00 (1Mbps): 2402MHz

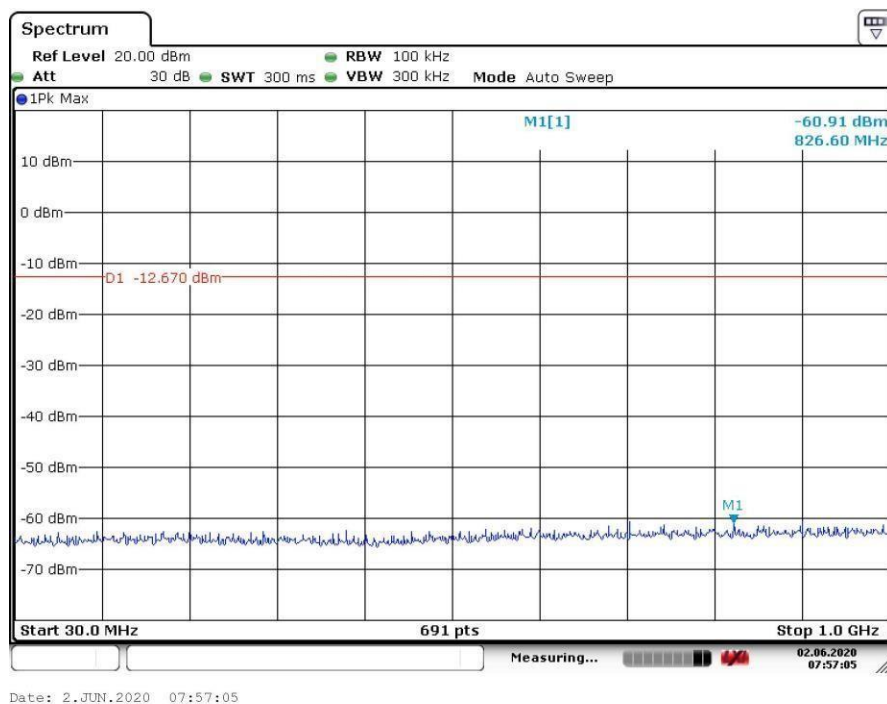


Date: 2.JUN.2020 07:57:05

Note: Sweep Points=691

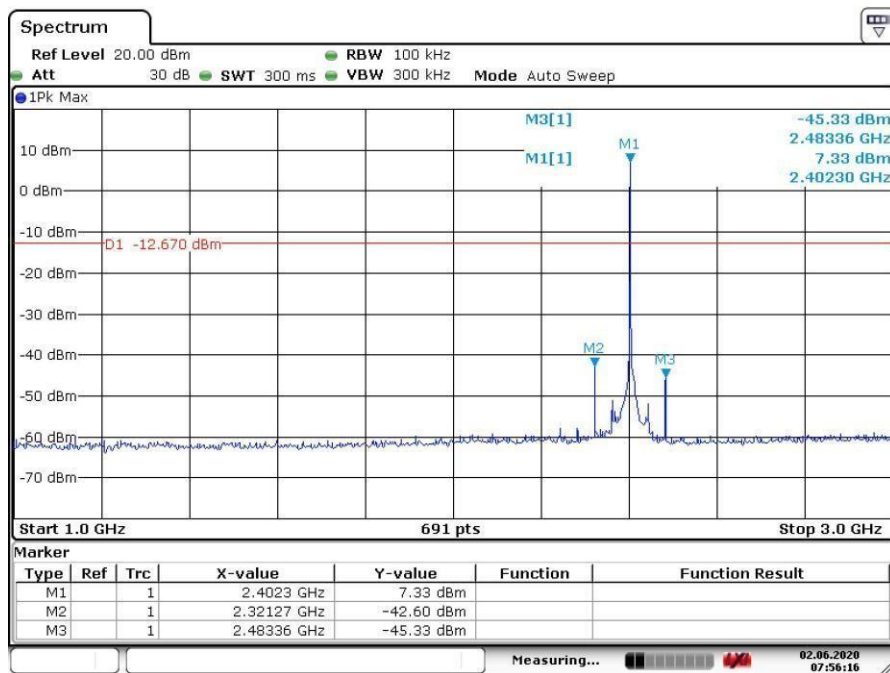


Date: 2.JUN.2020 07:56:16

Note: Sweep Points=691

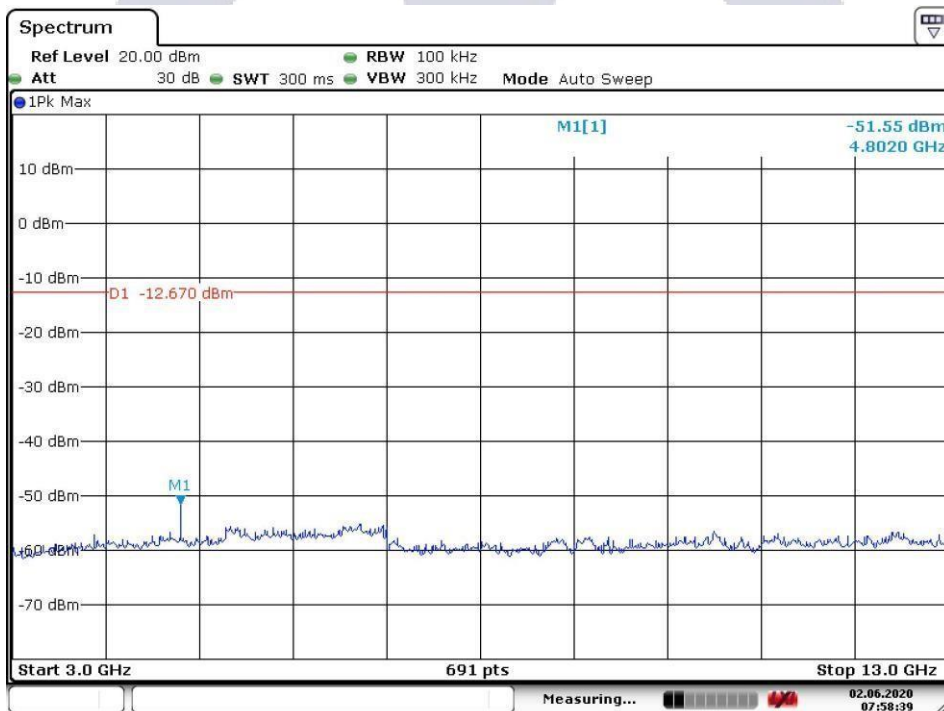

Date: 2.JUN.2020 07:58:39


Note: Sweep Points=691

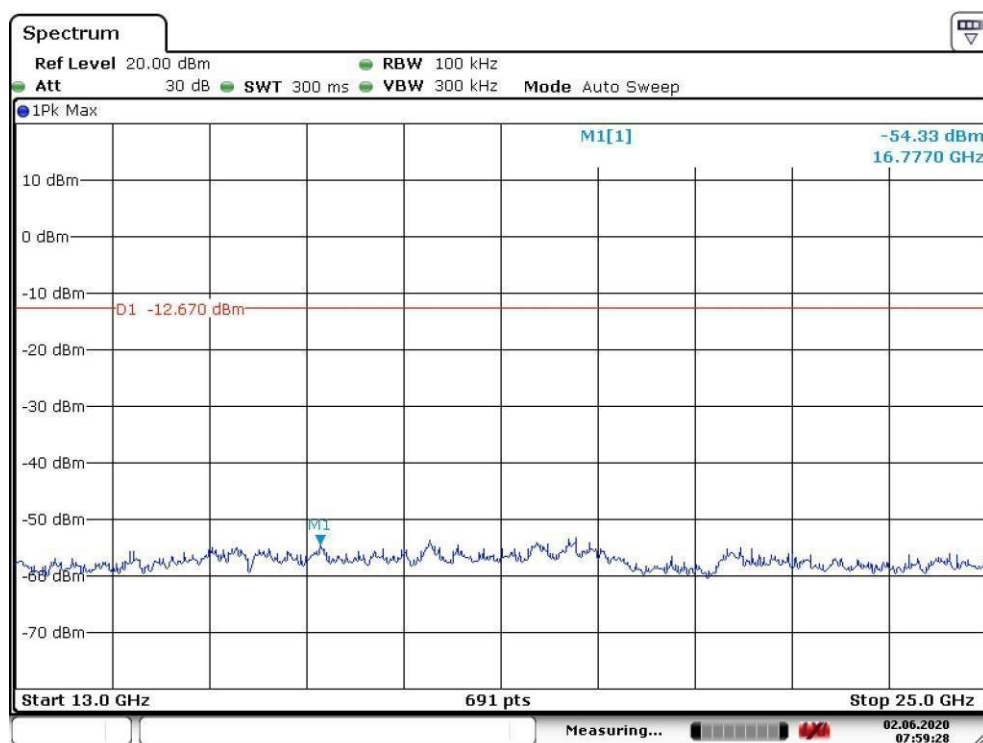


Date: 2.JUN.2020 07:59:28

Note: Sweep Points=691


## The Middle Channel 19(1Mbps): 2440MHz

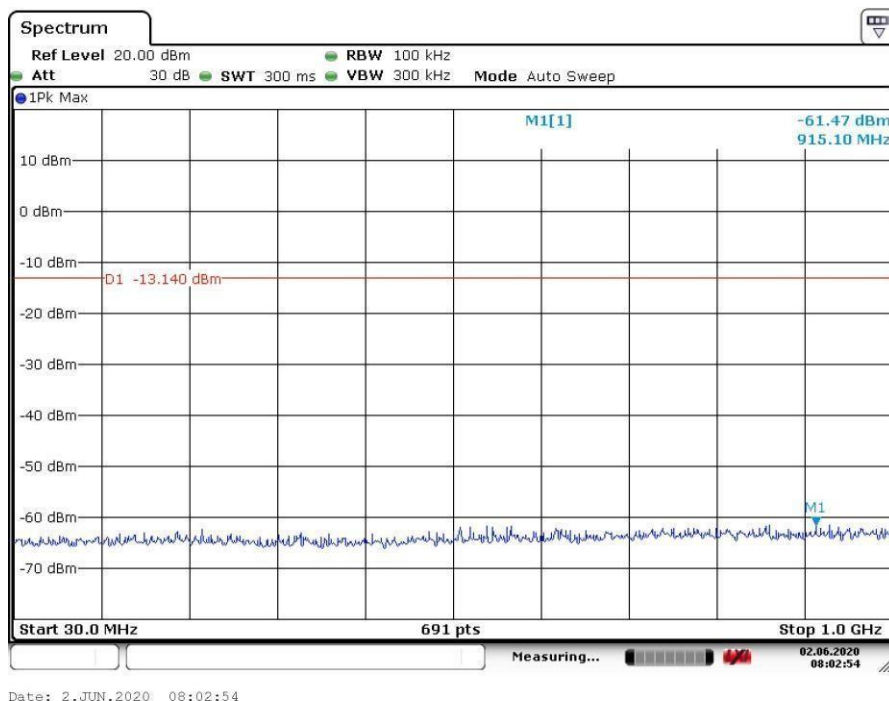

Note: Sweep Points=691

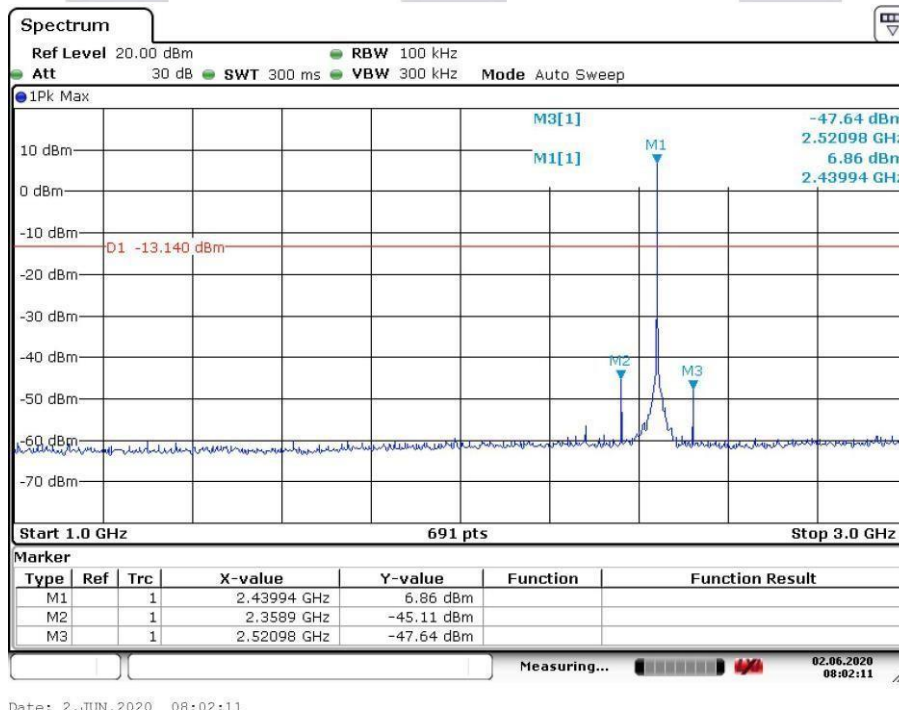


Note: Sweep Points=691

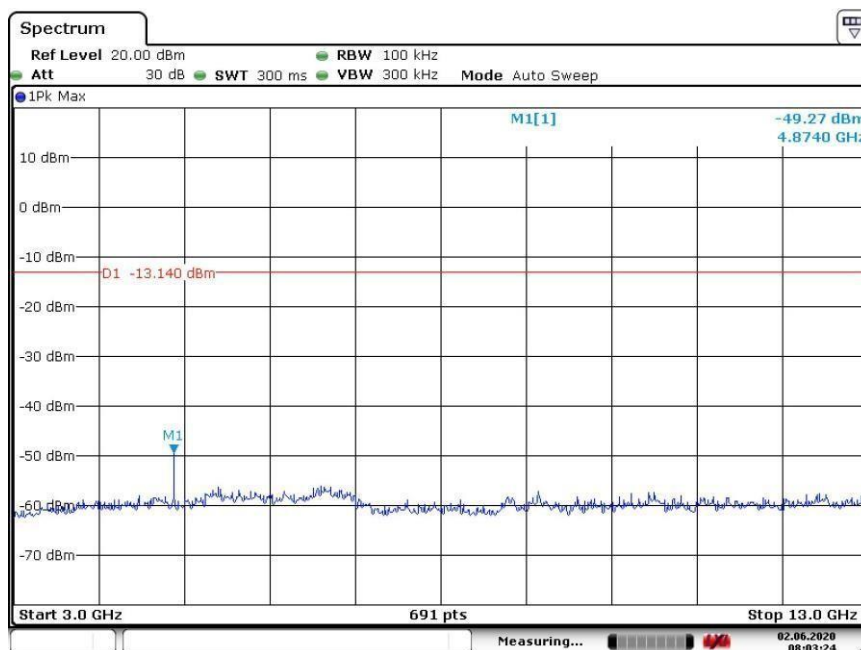

Date: 2.JUN.2020 08:03:24


Note: Sweep Points=691

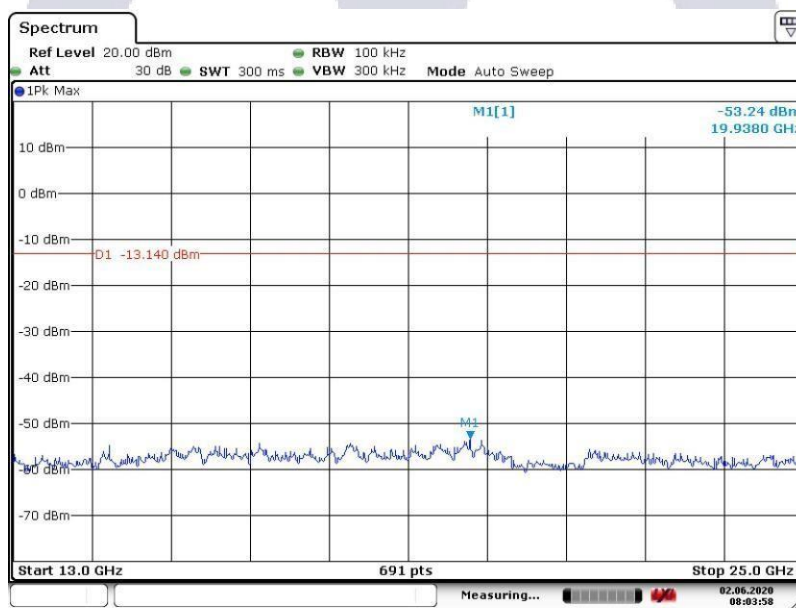


Date: 2.JUN.2020 08:03:58

Note: Sweep Points=691


## The High Channel 39(1Mbps): 2480MHz

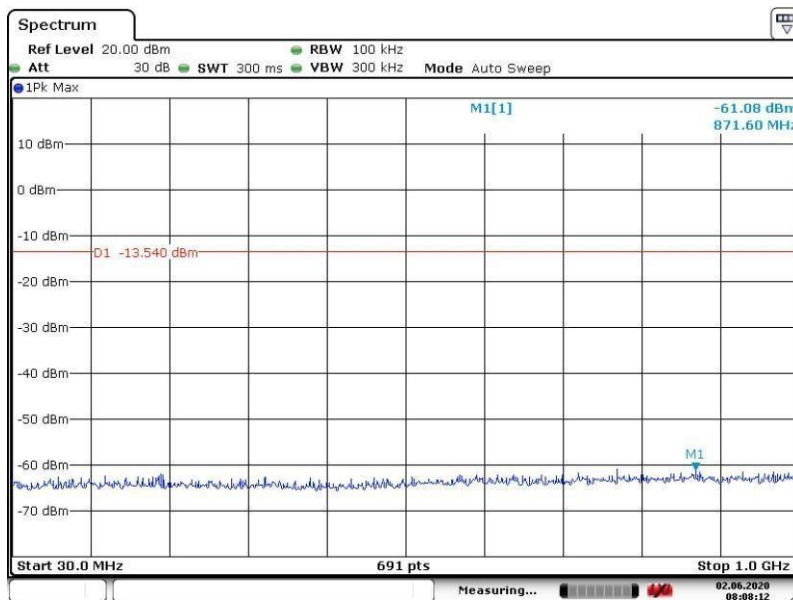

Note: Sweep Points=691

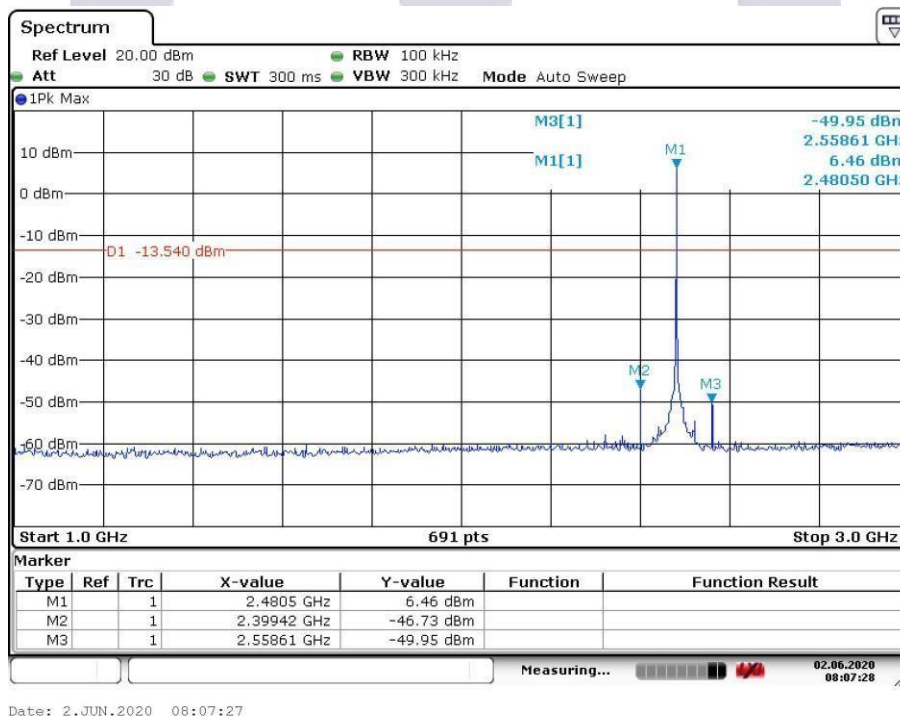


Note: Sweep Points=691

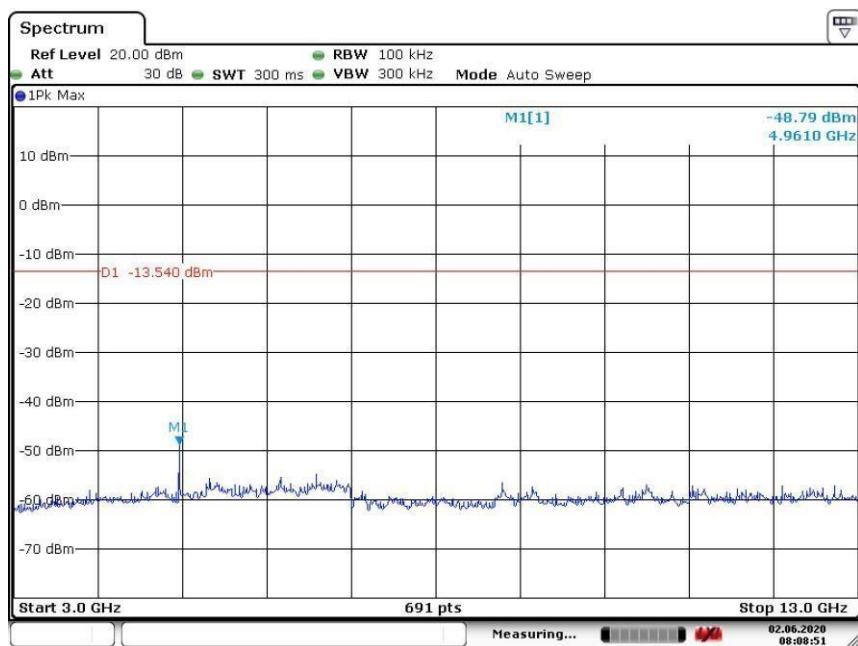

Date: 2.JUN.2020 08:08:51

Note: Sweep Points=691

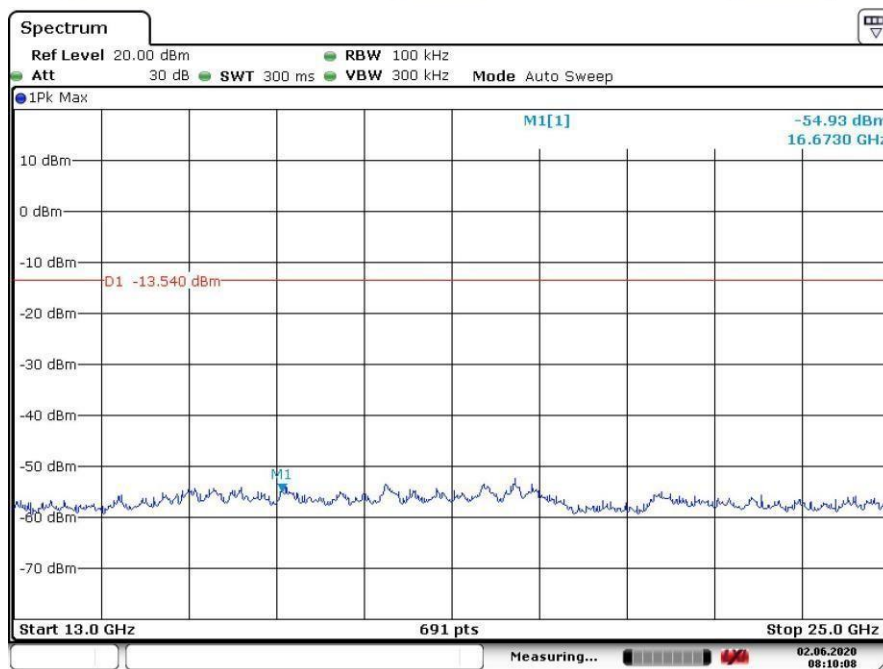


Date: 2.JUN.2020 08:10:08

Note: Sweep Points=691


## Photographs

### Radiated Spurious Emission Test Setup

Below 1GHz:

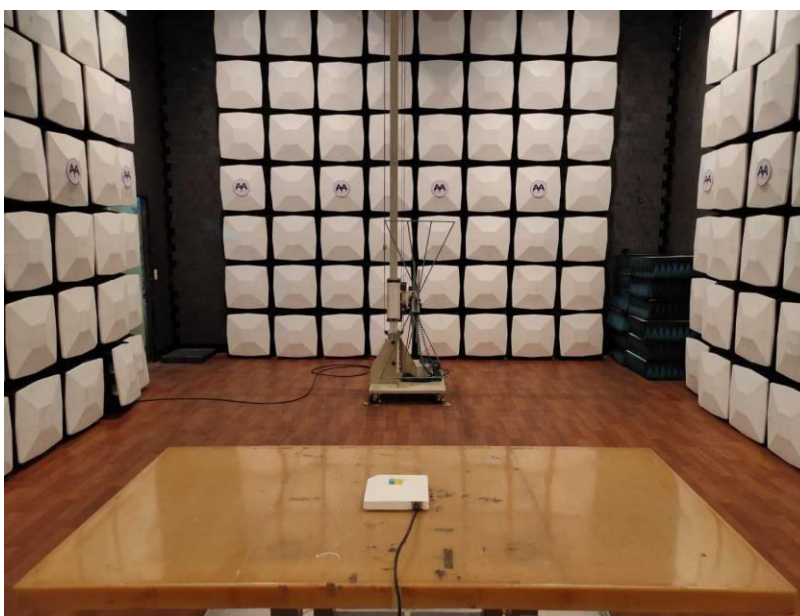

Above 1GHz:

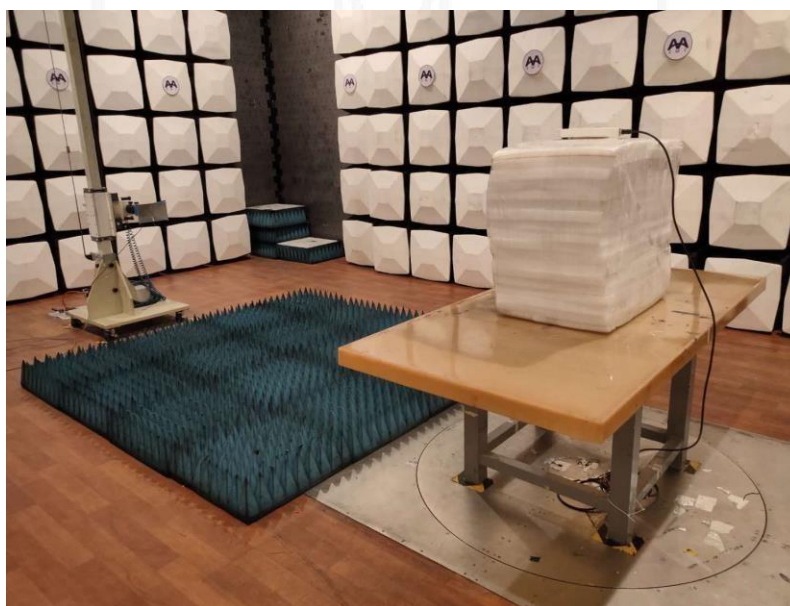

## Conducted Emission Test Setup



**“End of Report”**