#### Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



## TEST REPORT

Report No. ....: CHTEW20050094 Report Verification:

Project No...... SHT2003028702EW

FCC ID.....: 2AWCE-ZFT3

Applicant's name .....: Zenfox Limited

Address...... ROOM F, 8/F, WANG CHEONG BUILDING, NO.251

RECLAMATION STREET, KOWLOON, HONGKONG.

Manufacturer...... Zenfox Limited

Address...... ROOM F, 8/F, WANG CHEONG BUILDING, NO.251

RECLAMATION STREET, KOWLOON, HONGKONG.

Test item description .....: Car Dash Camera

Trade Mark ..... Zenfox

Model/Type reference...... T3

Listed Model(s) .....

Standard .....: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of receipt of test sample.......... Mar.30, 2020

Date of testing...... Mar.30, 2020- May 21, 2020

Date of issue...... May 22, 2020

Result.....: PASS

Compiled by

( Position+Printed name+Signature): File administrator Echo Wei

administrator Echo Wei

Supervised by

(Position+Printed name+Signature): Project Engineer Kiki Kong

Approved by

(Position+Printed name+Signature): RF Manager Hans Hu

Testing Laboratory Name .....: Shenzhen Huatongwei International Inspection Co., Ltd.

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Report No.: CHTEW20050094 Page: 2 of 32 Issued: 2020-05-22

### **Contents**

<u>1.</u>	IEST STANDARDS AND REPORT VERSION	3
		_
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
<u></u>	. 10. D100Kii 110K	<del></del>
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	TEST CONFIGURATION	7
<del></del>	TEST SOM TOOKATION	<u> </u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Maximum Conducted Output Power	15
5.4.	Power Spectral Density	16
5.5.	26dB bandwidth and 99% Occupy bandwidth	18
5.6.	6dB Bandwidth	19
5.7.	Band edge	20
5.8.	Radiated Spurious Emissions	23
5.9.	Frequency stability	29
<u>6.</u>	TEST SETUP PHOTOS	30
<u>7.</u>	EXTERANAL AND INTERNAL PHOTOS	32
<u>8.</u>	APPENDIX REPORT	32

Report No.: CHTEW20050094 Page: 3 of 32 Issued: 2020-05-22

### 1. TEST STANDARDS AND REPORT VERSION

#### 1.1. Test Standards

The tests were performed according to following standards:

- FCC Rules Part 15.407: General technical requirements.
- ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices
- KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

### 1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-05-22	Original

Report No.: CHTEW20050094 Page: 4 of 32 Issued: 2020-05-22

## 2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Maximum Conducted Output Power	15.407(a)	PASS
5.4	Maximum Power Spectral Density	15.407(a)	PASS
5.5 26dB Bandwidth and 99% Ocuppy bandwith		15.407(a)	PASS
5.6 6dB Bandwidth		15.407(a)	PASS
5.7	Band edge	15.407(b)	PASS
5.8	Radiated Spurious Emissions	15.209	PASS
5.9	Frequency Stability	15.407(g)	PASS

#### Note:

The measurement uncertainty is not included in the test result.

Report No.: CHTEW20050094 Page: 5 of 32 Issued: 2020-05-22

## 3. **SUMMARY**

#### 3.1. Client Information

Applicant: Zenfox Limited	
Address: ROOM F, 8/F, WANG CHEONG BUILDING, NO.251 RECLAMA STREET, KOWLOON, HONGKONG.	
Manufacturer:	Zenfox Limited
Address:	ROOM F, 8/F, WANG CHEONG BUILDING, NO.251 RECLAMATION STREET, KOWLOON, HONGKONG.

## 3.2. Product Description

Name of EUT:	Car Dash Camera	
Trade Mark: Zenfox		
Model No.:	ТЗ	
Listed Model(s):	-	
Power supply:	DC 5V	
Hardware version:	T820_M15_V1.0_MPS	
Software version:	Zenfox_T3 _V1.0	

### 3.3. Radio Specification Description

Support type <sup>*1</sup>	⊠ 802.11a	⊠ 802.11n(HT20)	⊠ 802.11n(HT40)		
	☐ 802.11ac(HT20)	☐ 802.11ac(HT40)	☐ 802.11ac(HT80)		
Function:	Outdoor AP	☐ Indoor AP	☐ Fixed P2P		
Modulation:	BPSK, QPSK, 16QAM, 64QAM				
Operation fraguancy	⊠ Band I: 5150MHz~5250MHz				
Operation frequency:	☐ Band IV: 5725MHz~5850MHz				
Channel number:	6 for 802.11a/802.11n(HT20)				
Charmer number.	2 for 802.11n(HT40)				
Supported Bandwidth	20MHz:	802.11n, 802.11a			
	40MHz:	802.11n			
Antenna type:	FPC Antenna				
Antenna gain:	3dBi				

Note:

<sup>\*1:</sup> only show the RF function associated with this report.

Report No.: CHTEW20050094 Page: 6 of 32 Issued: 2020-05-22

## 3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.		
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China		
	Туре	Accreditation Number	
	CNAS	L1225	
Qualifications	A2LA	3902.01	
	FCC	762235	
	Canada	5377A	

Report No.: CHTEW20050094 Page: 7 of 32 Issued: 2020-05-22

### 4. TEST CONFIGURATION

#### 4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below .

		20MHz		40MHz	
Band	Test Channel	Channel	Frequency (MHz)	Channel	Frequency (MHz)
	CH <sub>L</sub>	36	5180	38	5190
1	CH <sub>M</sub>	44	5220	-	-
	CH <sub>H</sub>	48	5240	46	5230
	CH <sub>L</sub>	149	5745	151	5755
IV	CH <sub>M</sub>	157	5785	-	-
	CH <sub>H</sub>	165	5825	159	5795

### 4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11a	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

#### 4.3. Test mode

For RF test items

The engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions:

The EUT was set to connect with the WLAN AP under large package sizes transmission.

For Radiated spurious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit.

The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

Report No.: CHTEW20050094 Page: 8 of 32 Issued: 2020-05-22

### 4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Wheth	Whether support unit is used?				
✓	✓ No				
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

#### 4.5. Testing environmental condition

Туре	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

#### 4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz
Frequency error	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: CHTEW20050094 Page: 9 of 32 Issued: 2020-05-22

## 4.7. Equipment Used during the Test

•	Conducted Emission										
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)				
•	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27				
•	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25				
•	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22				
•	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22				
•	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM- BNCM-2M	2019/10/23	2020/10/22				
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A				

•	Radiated emission-6th test site									
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
•	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29			
•	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25			
•	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01			
•	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03			
•	Pre-Amplifer	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13			
•	RF Connection Cable	HUBER+SUHNER	HTWE0062- 01	N/A	N/A	2019/08/21	2020/08/20			
•	RF Connection Cable	HUBER+SUHNER	HTWE0062- 02	SUCOFLEX 104	501184/4	2019/05/27	2020/05/26			
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A			

•	Radiated emis	sion-7th test site	1				
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
•	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
•	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
•	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2017/03/27	2020/03/26
•	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
•	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
•	Broadband Pre- amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
•	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
•	Test Software	Audix	N/A	E3	N/A	N/A	N/A

Report No.: CHTEW20050094 Page: 10 of 32 Issued: 2020-05-22

•	RF Conducted Method										
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)					
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25					
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25					
•	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25					
0	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25					

Report No.: CHTEW20050094 Page: 11 of 32 Issued: 2020-05-22

### 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

#### FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responseble party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **TEST RESULT**

☐ Not Applicable

The antenna type is a FPC antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



Report No.: CHTEW20050094 Page: 12 of 32 Issued: 2020-05-22

#### 5.2. AC Conducted Emission


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fragues ou range (MHz)	Limit (d	BuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### **TEST CONFIGURATION**

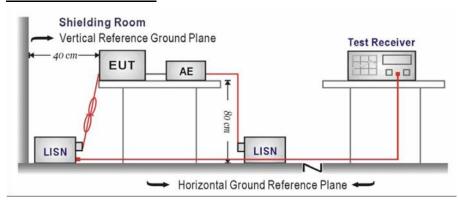

#### **TEST PROCEDURE**

- 1. The EUT was setup according to ANSI C63.10 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

#### TEST MODE:

Please refer to the clause 4.3

#### **TEST RESULT**

 Report No.: CHTEW20050094 Page: 13 of 32 Issued: 2020-05-22

#### Test Line: L Level [dBµV] 70 60 50 40 30 10 0 150k 4M 5M 6M 30M 300k 400k 600k 800k 1M 2M 3M 8M 10M 20M Frequency [Hz] x x x MES GM2004115013\_fin MEASUREMENT RESULT: "GM2004115013 fin" 4/11/2020 4:49PM Level Transd Limit Margin Detector Line Frequency PΕ dΒ MHz dΒμV dB dΒμV 0.181500 45.80 10.0 64 18.6 QP L1GND 0.528000 38.50 17.5 QP 10.1 56 L1GND 1.414500 30.00 26.0 QP 10.1 56 L1GND 32.60 23.4 QP 2.850000 10.2 56 L1GND 10.009500 10.3 10.5 27.00 60 33.0 QP ь1 GND 26.5 QP 20.022000 33.50 ь1 60 GND MEASUREMENT RESULT: "GM2004115013 fin2" 4/11/2020 4:49PM Level Transd Limit Margin Detector Line PEFrequency dB dΒμ∇ dΒ MHzdΒμV 0.181500 30.40 54 24.0 AV 10.0 L1GND 32.70 0.523500 46 13.3 AV 10.1 L1GND

22.0 AV

28.6 AV

25.7 AV

ΑV

22.3

1.225500

2.845500

5.401500

20.017500

24.00

23.70

21.40

24.30

10.1

10.2

10.2

10.5

46

46

50

50

L1

L1

L1

 $L_1$ 


GND

GND

GND

GND

Report No.: CHTEW20050094 Page: 14 of 32 Issued: 2020-05-22

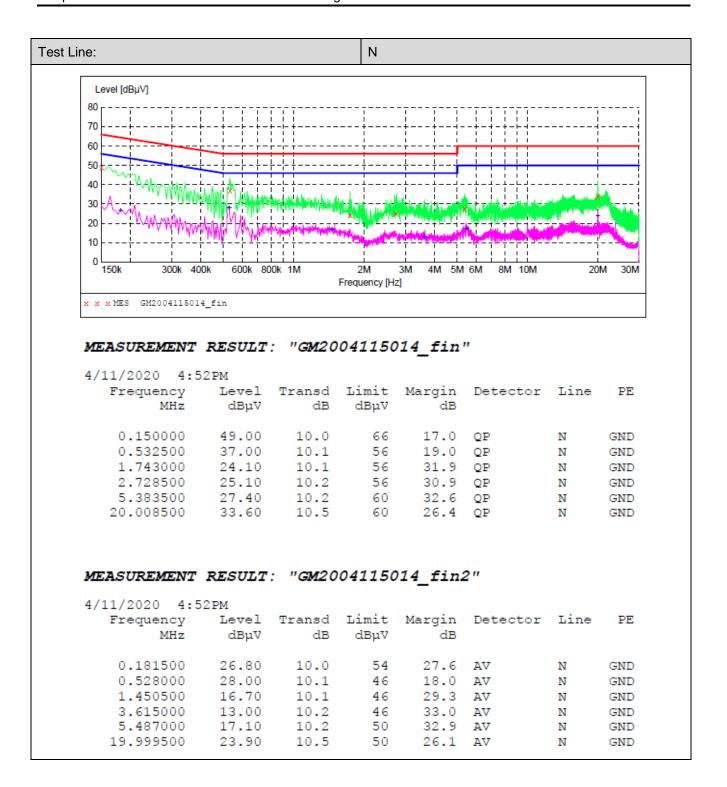

Report No.: CHTEW20050094 Page: 15 of 32 Issued: 2020-05-22

#### 5.3. Maximum Conducted Output Power

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

#### For the 5.15~5.25GHz band:

Outdoor AP

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm). if  $G_{Tx}$ >6dBi, then  $P_{out}$  =30-( $G_{Tx}$ -6). e.i.r.p. at any elevation angle above 30 degrees  $\leq$  125mW (21dBm)

Indoor AP

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm). if  $G_{Tx}$ >6dBi, then Pout =30-( $G_{Tx}$ -6).

Point-to-point AP

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm). if  $G_{Tx}$ >23dBi, then Pout =30-( $G_{Tx}$ -23).

Client devices

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 250W (24dBm). if  $G_{Tx}$ >6dBi, then Pout =24-( $G_{Tx}$ -6).

#### For the 5.725~5.85GHz band:


Point-to-multipoint systems (P2M)

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm). if  $G_{Tx}$ >6dBi, then  $P_{out}$  =30-( $G_{Tx}$ -6).

Point-to-point systems (P2P)

The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm).

#### **TEST CONFIGURATION**

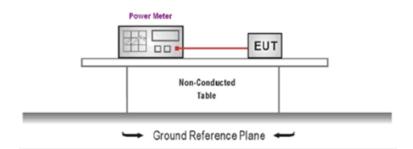

#### **TEST PROCEDURE**

- 1. The EUT was tested according to KDB789033 Section E-3-b)
- 2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
- 3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 5. Record the measurement data.

#### 6. TEST MODE:

Please refer to the clause 4.3

#### **TEST RESULT**

#### **TEST Data**

Please refer to appendix A on the appendix report

Report No.: CHTEW20050094 Page: 16 of 32 Issued: 2020-05-22

#### 5.4. Power Spectral Density

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

#### For the 5.15~5.25GHz band:

Outdoor AP

The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if  $G_{Tx}$ >6dBi, then PSD =17-( $G_{Tx}$ -6).

Indoor AP

The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if  $G_{Tx}$ >6dBi, then PSD =17-( $G_{Tx}$ -6).

Point-to-point AP

The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if  $G_{Tx}$ >23dBi, then PSD =17-( $G_{Tx}$ -23).

Client devices

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if  $G_{Tx}$ >6dBi, then PSD =11-( $G_{Tx}$ -6).

#### For the 5.725~5.85GHz band:


Point-to-multipoint systems (P2M)

The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if  $G_{Tx}>6dBi$ , then PSD = $30-(G_{Tx}-6)$ .

Point-to-point systems (P2P)

The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

#### **TEST CONFIGURATION**

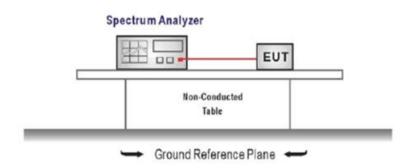

#### **TEST PROCEDURE**

- 1. According KDB 789033 D02 Section F
- 2. Analyzer was setting as follow:

Center frequency: test channel

Span was set to encompass the entire emission bandwidth of the signal

RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz

RBW=500kHz for devices operating in the band 5.725-5.85 GHz

VBW ≥ 3 RBW

Number of sweep points > 2 x (span/RBW)

Sweep time = auto

Detector = Peak

Trigger was set to free run for all modes, trace was averaged over 100 sweeps

3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

TEST MODE:			
Please refer to the	e clause 4.3		
TEST RESULT			
⊠ Passed	☐ Not Applicable		
TEST Data			

17 of 32

Issued:

2020-05-22

Page:

Report No.:

CHTEW20050094

Please refer to appendix B on the appendix report


Report No.: CHTEW20050094 Page: 18 of 32 Issued: 2020-05-22

#### 5.5. 26dB bandwidth and 99% Occupy bandwidth

#### LIMIT

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

#### **TEST CONFIGURATION**

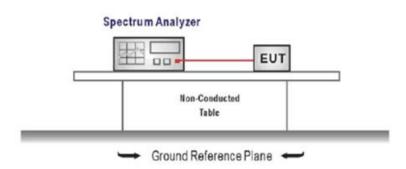

#### **TEST PROCEDURE**

- 1. According KDB 789033 D02 Section C
- 2. Connect the antenna port(s) to the spectrum analyzer input.
- 3. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency = Channel center frequency

Span=2 x emission bandwidth

RBW = 1% to 5% of the emission bandwidth

VBW>3 x RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission, and use the 99 % power bandwidth function of the instrument

#### TEST MODE:

Please refer to the clause 4.3

#### **TEST RESULT**

#### **TEST Data**

Please refer to appendix C and D on the appendix report

Report No.: CHTEW20050094 Page: 19 of 32 Issued: 2020-05-22


#### 5.6. 6dB Bandwidth

#### **LIMIT**

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

#### **TEST CONFIGURATION**

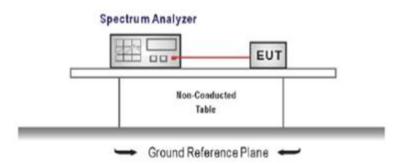

#### **TEST PROCEDURE**

- 1. C Connect the antenna port(s) to the spectrum analyzer input.
- 2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency =test channel center frequency

Span=2 x emission bandwidth

RBW = 100 kHz, VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

#### **TEST MODE:**

Please refer to the clause 4.3

#### **TEST RESULT**

#### **TEST Data**

Please refer to appendix E on the appendix report

Report No.: CHTEW20050094 Page: 20 of 32 Issued: 2020-05-22

### 5.7. Band edge

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart E Section 15.407(b)


	Un-restricted band emissions above 1GHz								
Operating Band	Frequency	EIRP Limit	Value						
5150-5250MHz	Above 1GHz	Above 1GHz -27dBm/MHz(68.2dBuV/m)@3m							
5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak						
5470-5725MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak						
	1GHz-5.65GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak						
	5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)	Peak						
	5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)	Peak						
EZOE EREO MUL-	5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)	Peak						
5725-5850 MHz	5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)	Peak						
	5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m	Peak						
	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)							
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak						

<sup>\*</sup> Increase/Decreases with the linearly of the frequency.

For emission above 1GHz and in restricted band, according to FCC KDB 789033 D02 General UNII Test Procedure, all emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.  $E[dB\mu V/m] = EIRP[dBm] + 95.2$ , for d = 3 meters.


#### **TEST CONFIGURATION**

Radiated:

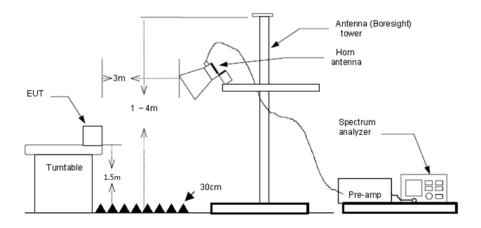

Report No.: CHTEW20050094 Page: 21 of 32 Issued: 2020-05-22

#### Conducted:

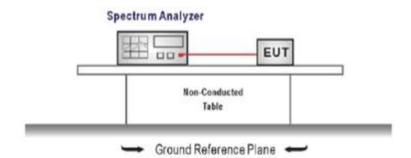

#### **TEST PROCEDURE**

- 1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1MHz, VBW=3MHz PEAK detector for Peak value. RBW=1MHz, VBW=3MHz RMS detector for Average value.

#### **TEST MODE:**

Please refer to the clause 4.3

#### **TEST RESULTS**

#### **Conducted Band Edge Test Data**

Please refer to appendix F on the appendix report

Report No.: CHTEW20050094 Page: 22 of 32 Issued: 2020-05-22

### Radiated Band Edge Test Data

Band: I			orst mode: 802	2.11a	Test o		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
5150.00	24.96	33.85	68.20	34.35	8.89	Vertical	Peak
5150.00	18.97	27.86	54.00	26.14	8.89	Vertical	Average
5150.00	26.07	34.96	68.20	33.24	8.89	Horizontal	Peak
5150.00	21.19	30.08	54.00	23.92	8.89	Horizontal	Average

Band: I Worst mode: 8				2.11a	Test o	hannel: CH <sub>H</sub>	
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
5350.00	25.38	33.92	68.20	34.28	8.54	Vertical	Peak
5350.00	25.38	33.92	54.00	20.08	8.54	Vertical	Average
5350.00	23.91	32.45	68.20	35.75	8.54	Horizontal	Peak
5350.00	18.71	27.25	54.00	26.75	8.54	Horizontal	Average

Band: IV	: IV Worst mode: 802.11a				Test o		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
5725.00	24.79	33.79	68.20	34.41	9.00	Vertical	Peak
5725.00	18.40	27.40	54.00	26.60	9.00	Vertical	Average
5725.00	24.26	33.26	68.20	34.94	9.00	Horizontal	Peak
5725.00	18.22	27.22	54.00	26.78	9.00	Horizontal	Average

Band: IV Worst mode: 802.11a				2.11a	Test channel: CH <sub>H</sub>			
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization	
5850.00	23.12	32.89	68.20	35.31	9.77	Vertical	Peak	
5850.00	17.17	26.94	54.00	27.06	9.77	Vertical	Average	
5850.00	23.61	33.38	68.20	34.82	9.77	Horizontal	Peak	
5850.00	17.52	27.29	54.00	26.71	9.77	Horizontal	Average	

#### Remark:

- 1. Final Level =Receiver Read level + Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Test 802.11a, 802.11n mode, all modulations have been tested, only worst case is reported

Report No.: CHTEW20050094 Page: 23 of 32 Issued: 2020-05-22

### 5.8. Radiated Spurious Emissions

#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.209 and Part 15 Subpart E Section 15.407

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40\*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40\*log(30/3)= Limit dBuV/m @30m + 40.


Unwanted emissions below 1GHz and Restricted band emissions above 1GHz							
Frequency	Limit (dBuV/m @3m)	Value					
30MHz-88MHz	40.00	Quasi-peak					
88MHz-216MHz	43.50	Quasi-peak					
216MHz-960MHz	46.00	Quasi-peak					
960MHz-1GHz	54.00	Quasi-peak					
Above 1GHz	54.00	Average					
Above IGHZ	74.00	Peak					

#### **TEST CONFIGURATION**

#### ➤ 9KHz ~30MHz

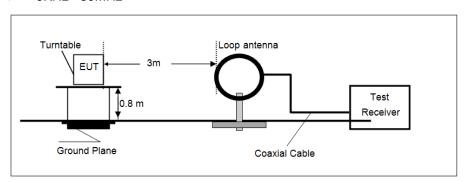


#### > 30MHz ~ 1GHz

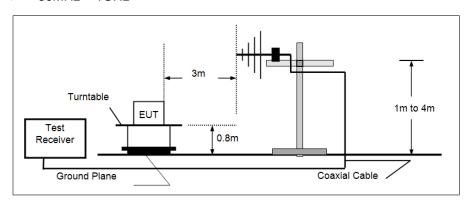

Report No.: CHTEW20050094 Page: 24 of 32 Issued: 2020-05-22

#### Above 1GHz

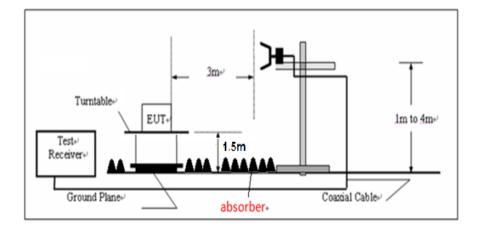

#### **TEST PROCEDURE**

- 1. The EUT was setup and tested according to ANSI C63.10:2013
- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
  - a) Span shall wide enough to fully capture the emission being measured;
  - Below 1 GHz:
     RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
     If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit,
     the peak emission level will be reported. Otherwise, the emission measurement will be repeated
  - using the quasi-peak detector and reported.
    c) From 1 GHz to 10<sup>th</sup> harmonic:
    RBW=1MHz, VBW=3MHz Peak detector for Peak value.
    RBW=1MHz, VBW=3MHz RMS detector for Average value.

#### **TEST MODE:**

Please refer to the clause 4.3

#### **TEST RESULT**

 Report No.: CHTEW20050094 Page: 25 of 32 Issued: 2020-05-22


#### **TEST Data**

#### TEST DATA FOR 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### **TEST DATA FOR 30MHz-1GHz**

Report No.: CHTEW20050094 Page: 26 of 32 Issued: 2020-05-22

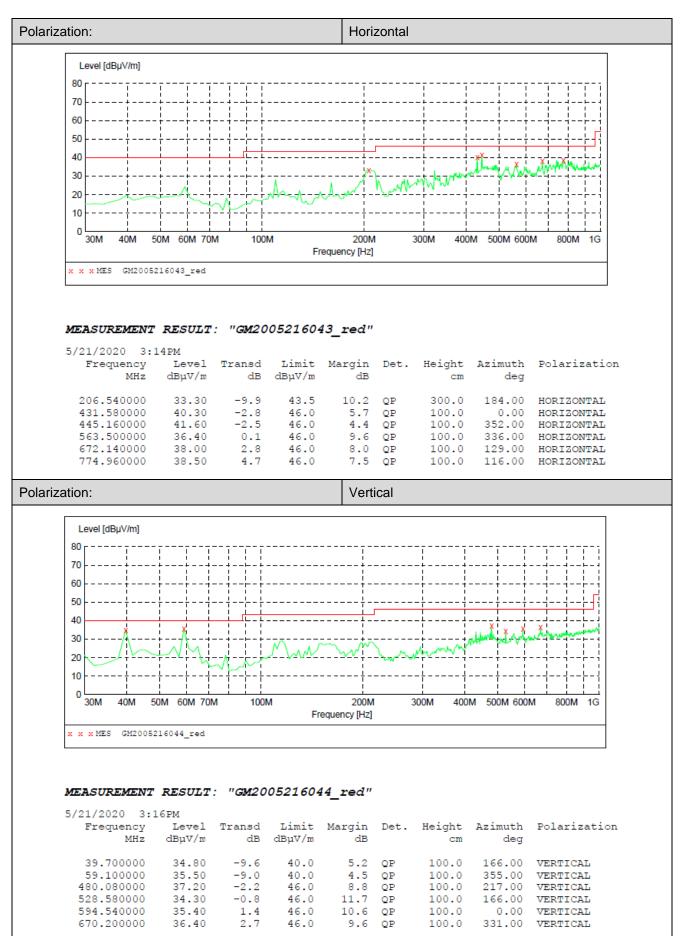

Remark:

Transd=Cable lose+ Antenna factor- Pre-amplifier; Margin=Limit -Level

Report No.: CHTEW20050094 Page: 27 of 32 Issued: 2020-05-22

### **TEST DATA FOR Above 1GHz**

Band: I			Worst mode	: 802.11a	Test	L	
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1346.63	23.39	17.82	74.00	56.18	-5.57	Vertical	Peak
3185.50	29.92	30.68	74.00	43.32	0.76	Vertical	Peak
5200.63	28.05	37.03	74.00	36.97	8.98	Vertical	Peak
7133.50	29.27	43.89	74.00	30.11	14.62	Vertical	Peak
1312.84	23.31	17.74	74.00	56.26	-5.57	Horizontal	Peak
3203.13	30.14	30.94	74.00	43.06	0.80	Horizontal	Peak
5136.00	27.70	36.56	74.00	37.44	8.86	Horizontal	Peak
7026.28	28.65	42.89	74.00	31.11	14.24	Horizontal	Peak

Band: I			Worst mode	: 802.11a	Test channel: CH <sub>M</sub>		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1223.25	23.17	17.40	74.00	56.60	-5.77	Vertical	Peak
3192.84	29.92	30.72	74.00	43.28	0.80	Vertical	Peak
5081.66	28.06	36.69	74.00	37.31	8.63	Vertical	Peak
6642.94	28.55	41.84	74.00	32.16	13.29	Vertical	Peak
1396.56	24.03	18.45	74.00	55.55	-5.58	Horizontal	Peak
3182.56	30.36	31.11	74.00	42.89	0.75	Horizontal	Peak
5153.63	27.88	36.78	74.00	37.22	8.90	Horizontal	Peak
7157.00	28.95	43.70	74.00	30.30	14.75	Horizontal	Peak

Band: I			Worst mode	: 802.11a	Test	Test channel: CH <sub>H</sub>	
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1314.31	23.09	17.52	74.00	56.48	-5.57	Vertical	Peak
3144.38	30.07	30.62	74.00	43.38	0.55	Vertical	Peak
4865.75	28.69	35.83	74.00	38.17	7.14	Vertical	Peak
6685.53	28.44	41.86	74.00	32.14	13.42	Vertical	Peak
1239.41	23.90	18.17	74.00	55.83	-5.73	Horizontal	Peak
3166.41	30.42	31.09	74.00	42.91	0.67	Horizontal	Peak
4865.75	27.92	35.06	74.00	38.94	7.14	Horizontal	Peak
6801.56	29.04	42.25	74.00	31.75	13.21	Horizontal	Peak

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Measuring frequencies from 1 GHz to 40GHz.
- 4. Test 802.11a, 802.11n mode, all modulations have been tested, only worst case is reported

Report No.: CHTEW20050094 Page: 28 of 32 Issued: 2020-05-22

Band: IV			Worst mode	: 802.11a	Test	L	
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1251.16	23.43	17.73	74.00	56.27	-5.70	Vertical	Peak
3141.44	30.33	30.87	74.00	43.13	0.54	Vertical	Peak
5227.06	27.78	36.62	74.00	37.38	8.84	Vertical	Peak
6645.88	28.94	42.24	74.00	31.76	13.30	Vertical	Peak
1293.75	23.71	18.12	74.00	55.88	-5.59	Horizontal	Peak
3209.00	30.41	31.14	74.00	42.86	0.73	Horizontal	Peak
5089.00	27.71	36.41	74.00	37.59	8.70	Horizontal	Peak
6662.03	29.45	42.80	74.00	31.20	13.35	Horizontal	Peak

Band: IV			Worst mode	: 802.11a	Test channel: CH <sub>M</sub>		
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1252.63	24.13	18.44	74.00	55.56	-5.69	Vertical	Peak
3125.28	30.32	30.77	74.00	43.23	0.45	Vertical	Peak
4780.56	28.47	35.39	74.00	38.61	6.92	Vertical	Peak
6710.50	29.83	43.27	74.00	30.73	13.44	Vertical	Peak
1277.59	23.90	18.27	74.00	55.73	-5.63	Horizontal	Peak
3164.94	31.61	32.27	74.00	41.73	0.66	Horizontal	Peak
5125.72	28.37	37.22	74.00	36.78	8.85	Horizontal	Peak
7187.84	28.49	43.41	74.00	30.59	14.92	Horizontal	Peak

Band: IV			Worst mode	: 802.11a	Test	Test channel: CH <sub>H</sub>	
Frequency (MHz)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Factor (dB)	Test value	Polarization
1276.13	23.36	17.73	74.00	56.27	-5.63	Vertical	Peak
3159.06	30.55	31.18	74.00	42.82	0.63	Vertical	Peak
5228.53	28.08	36.91	74.00	37.09	8.83	Vertical	Peak
7287.72	28.82	43.86	74.00	30.14	15.04	Vertical	Peak
1271.72	23.88	18.24	74.00	55.76	-5.64	Horizontal	Peak
3147.31	30.58	31.15	74.00	42.85	0.57	Horizontal	Peak
5096.34	27.66	36.43	74.00	37.57	8.77	Horizontal	Peak
6988.09	27.99	42.15	74.00	31.85	14.16	Horizontal	Peak

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Measuring frequencies from 1 GHz to 40GHz.
- 4. Test 802.11a, 802.11n mode, all modulations have been tested, only worst case is reported


Report No.: CHTEW20050094 Page: 29 of 32 Issued: 2020-05-22

#### 5.9. Frequency stability

#### LIMIT

Within Operation Band

#### **TEST CONFIGURATION**



Note: Measurement setup for testing on Antenna connector

#### **TEST PROCEDURE**

- 1. The equipment under test was connected to an external power supply.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to −20 °C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached..

#### **TEST MODE:**

Please refer to the clause 4.3

#### **TEST RESULT**

Please refer to appendix G on the appendix report


Report No.: CHTEW20050094 Page: 30 of 32 Issued: 2020-05-22

## 6. TEST SETUP PHOTOS


Radiated Emission





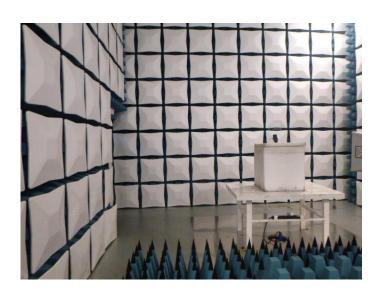

Report No.: CHTEW20050094 Page: 31 of 32 Issued: 2020-05-22

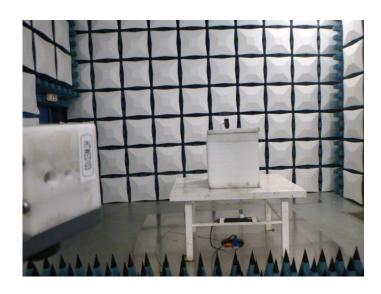

#### AC Conducted Emission



Report No.: CHTEW20050094 Page: 32 of 32 Issued: 2020-05-22

## 7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: CHTEW20050093

## 8. APPENDIX REPORT

Project No.: SHT2003028702EW Radio Specification: WIFI 5G

# **APPENDIX REPORT**

Project No.	SHT2003028702EW	Radio Specification	WIFI 5G
Test sample No.	YPHT20030287001	Model No.	Т3
Start test date	2020/4/13	Finish date	2020/4/13
Temperature	25°C	Humidity	50%
Test Engineer	Jinyue.Yan	Auditor	William . wang

Appendix clause	Test item	Result
А	Maximum Conducted Output Power	PASS
В	Maximum Power Spectral Density	PASS
С	26 dB Bandwidth	PASS
D	99% Occupy bandwidth	PASS
Е	6 dB Bandwidth	PASS
F	Band edge	PASS
G	Frequency stability	PASS

Project No.: SHT2003028702EW Radio Specification: WIFI 5G


### **Appendix A: Maximum Conducted Output Power**


Band	Bandwidth (MHz)	Туре	Channel	Conducted Output Power (dBm)	Limit (dBm)	Result
			CH <sub>L</sub>	13.46		
		802.11n	CH <sub>M</sub>	14.36	24.00	Pass
	20		CH <sub>H</sub>	14.59		
1	20		CH <sub>L</sub>	12.97		
Į.		802.11a	CH <sub>M</sub>	13.68	24.00	Pass
			CH <sub>H</sub>	14.30		
	40	802.11n	CH <sub>L</sub>	12.58	24.00	Pass
	40		CH <sub>H</sub>	13.00	24.00	
			CH <sub>L</sub>	7.48		Pass
		802.11n	CH <sub>M</sub>	7.71	30.00	
	20		CH <sub>H</sub>	8.90		
IV	20		CH <sub>L</sub>	6.56		
IV		802.11a	CH <sub>M</sub>	6.84	30.00	Pass
			CH <sub>H</sub>	8.08		
	40	802.11n	CH <sub>L</sub>	7.64	30.00	Pass
	40	002.1111	CH <sub>H</sub>	6.76	30.00	F 433


Project No.: SHT2003028702EW Radio Specification: WIFI 5G


# Appendix B: Maximum Power Spectral Density


Band	Bandwidth (MHz)	Туре	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result	
			CHL	3.34			
		802.11n	CH <sub>M</sub>	4.88	11.00	Pass	
	20		CH <sub>H</sub>	4.52			
	20		CH∟	3.09			
!		802.11a	CH <sub>M</sub>	3.74	11.00	Pass	
			CH <sub>H</sub>	4.28			
	40	40	802.11n	CH∟	0.45	11.00	Pass
		802.1111	CH <sub>H</sub>	-0.65	11.00	Fd55	
Band	Bandwidth (MHz)	Туре	Channel	Power Spectral Density (dBm/500kHz)	Limit (dBm/500KHz)	Result	
			CH∟	-3.75			
		802.11n	CH <sub>M</sub>	-3.67	30.00	Pass	
	20		CH <sub>H</sub>	-2.53			
11/	20		CH∟	-5.07			
IV	IV	802.11a	CH <sub>M</sub>	-4.39	30.00	Pass	
			CH <sub>H</sub>	-3.04			
	40	802.11n	CHL	-5.61	30.00	Page	
	40	002.1111	CH <sub>H</sub>	-7.28	30.00	Pass	

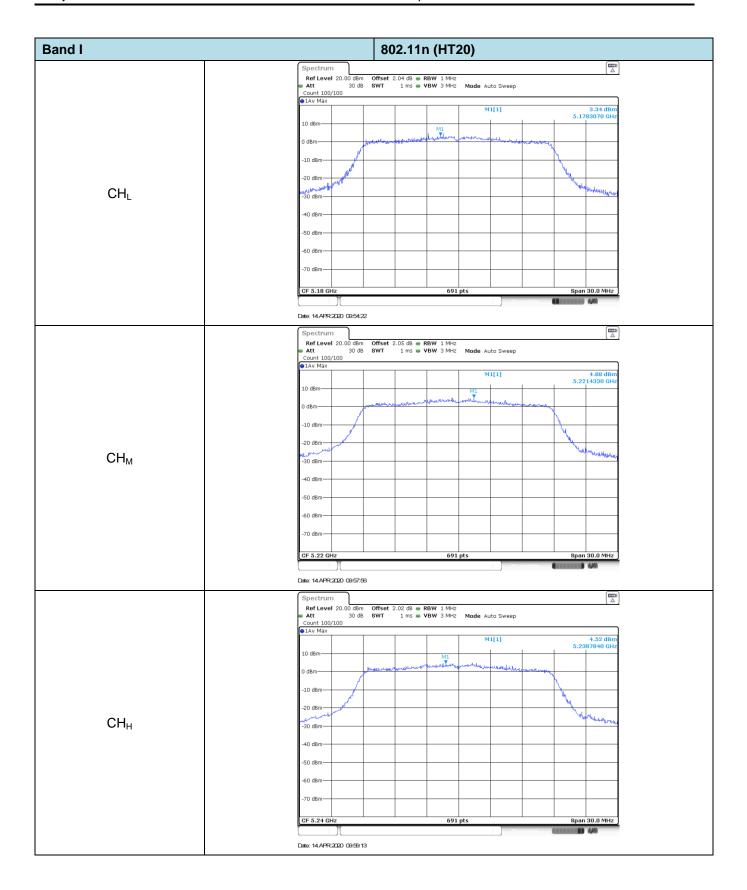


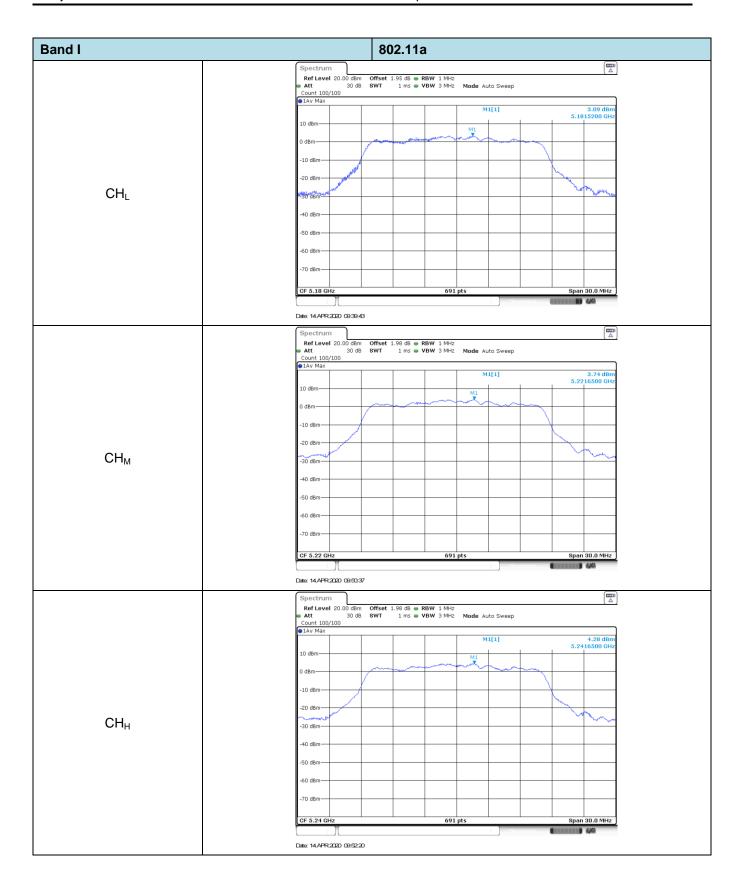

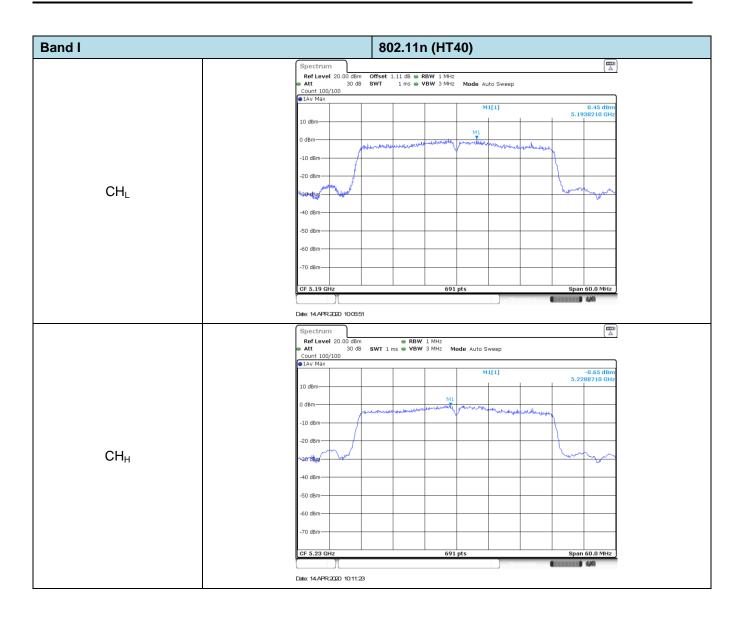

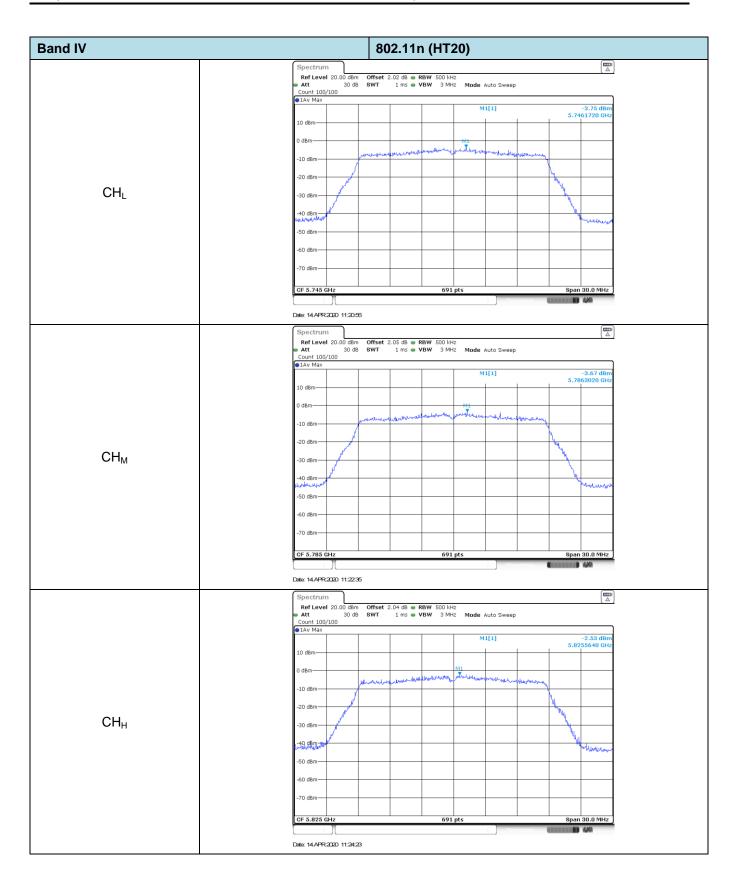


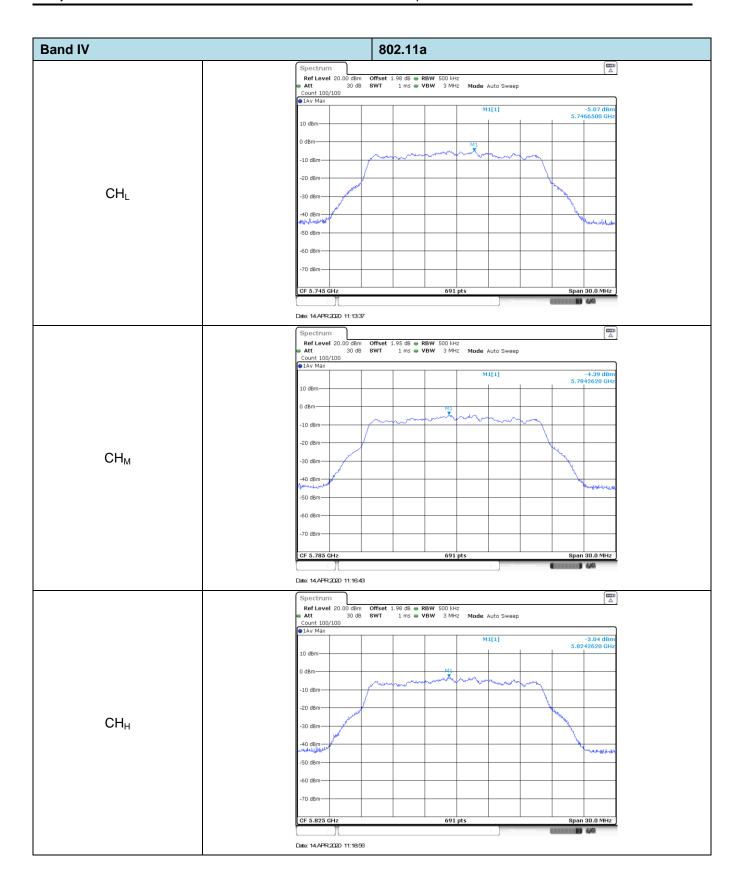


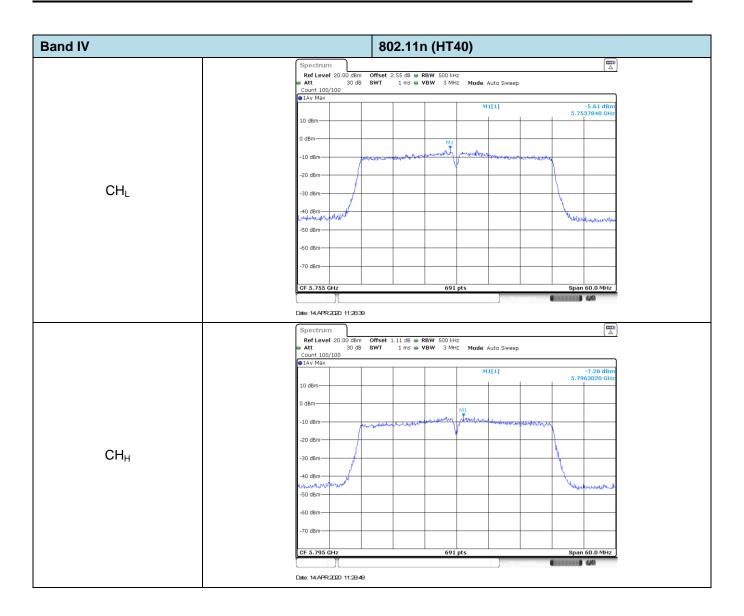


# Appendix C: 26dB bandwidth

Band	Bandwidth (MHz)	Туре	Channel	26dB bandwidth (MHz)	Result
	20	802.11n	CH <sub>L</sub>	22.56	Pass Pass
			CH <sub>M</sub>	21.72	
			CH <sub>H</sub>	21.09	
		802.11a	CH∟	21.48	
Į į			CH <sub>M</sub>	21.24	
			CH <sub>H</sub>	21.18	
	40	802.11n	CH∟	44.16	Door
			CH <sub>H</sub>	44.22	Pass

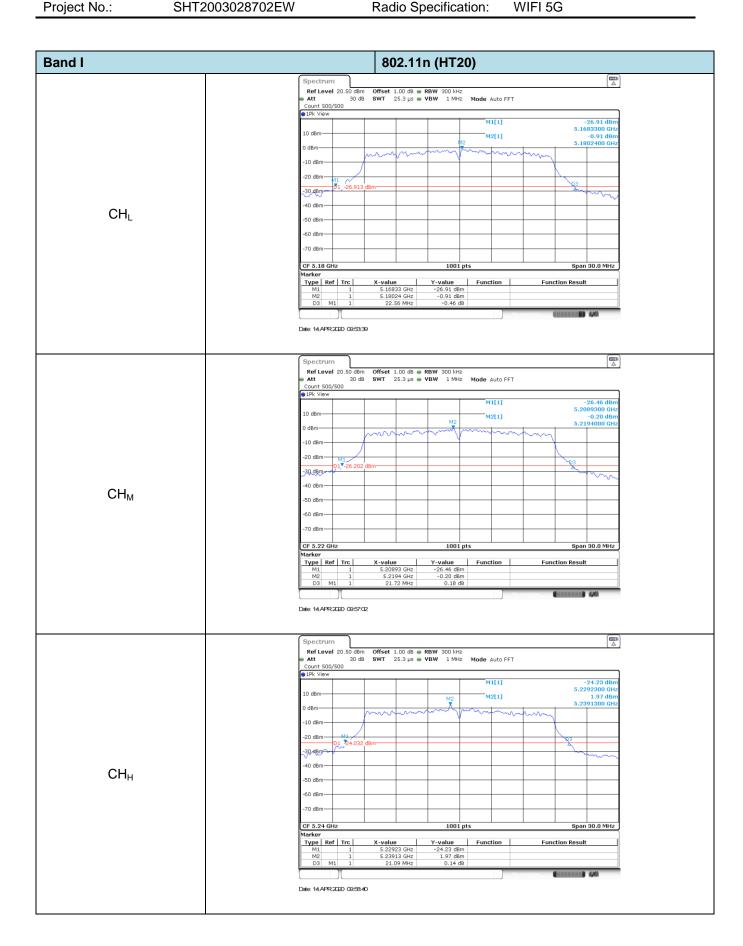


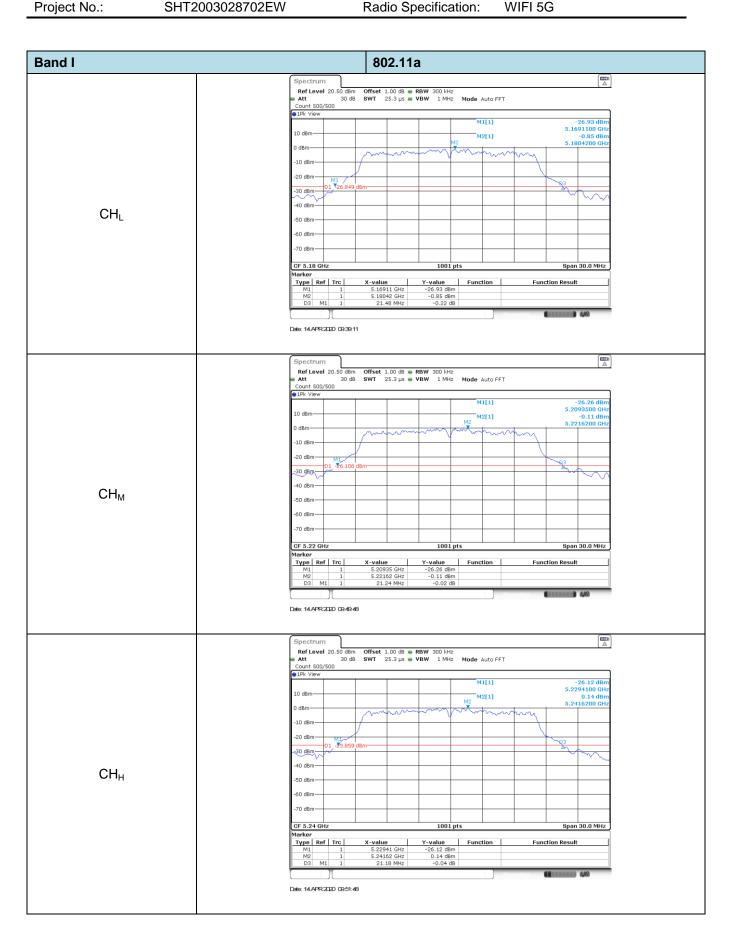


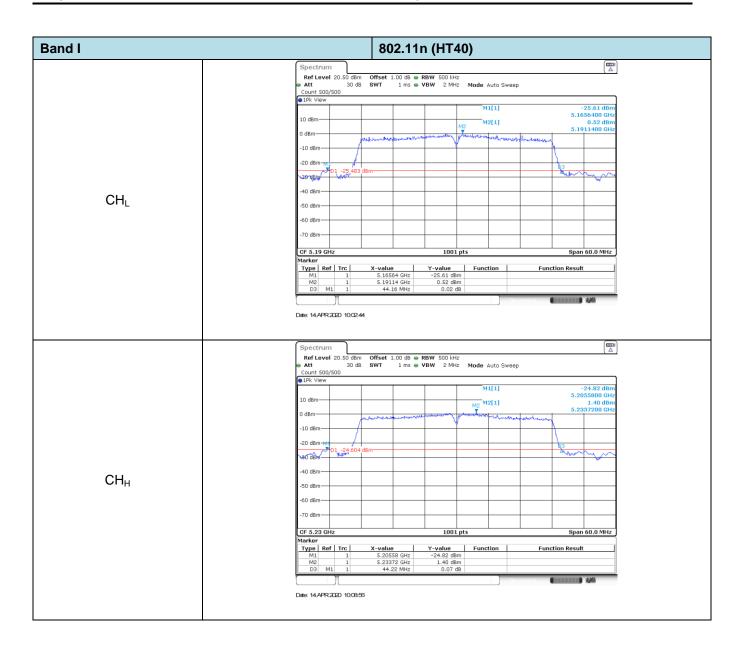



### Appendix D: 99% Occupy bandwidth


Band	Bandwidth (MHz)	Туре	Channel	99% Occupy bandwith (MHz)	Result
		802.11n	CH∟	17.80	Pass
			CH <sub>M</sub>	17.83	
	20		СНн	17.89	
١,	20		CH∟	16.57	Pass
'		802.11a	CH <sub>M</sub>	16.63	
			СНн	16.57	
	40	802.11n	CH∟	36.38	Pass
			CH <sub>H</sub>	36.38	
	20	802.11n	CH∟	17.98	Pass
			CH <sub>M</sub>	17.86	
			СНн	17.77	
IV		802.11a	CH∟	16.57	
IV			CH <sub>M</sub>	16.57	Pass
			CH <sub>H</sub>	16.54	
	40	802.11n	CH∟	36.30	Pass
			СНн	36.21	F 455

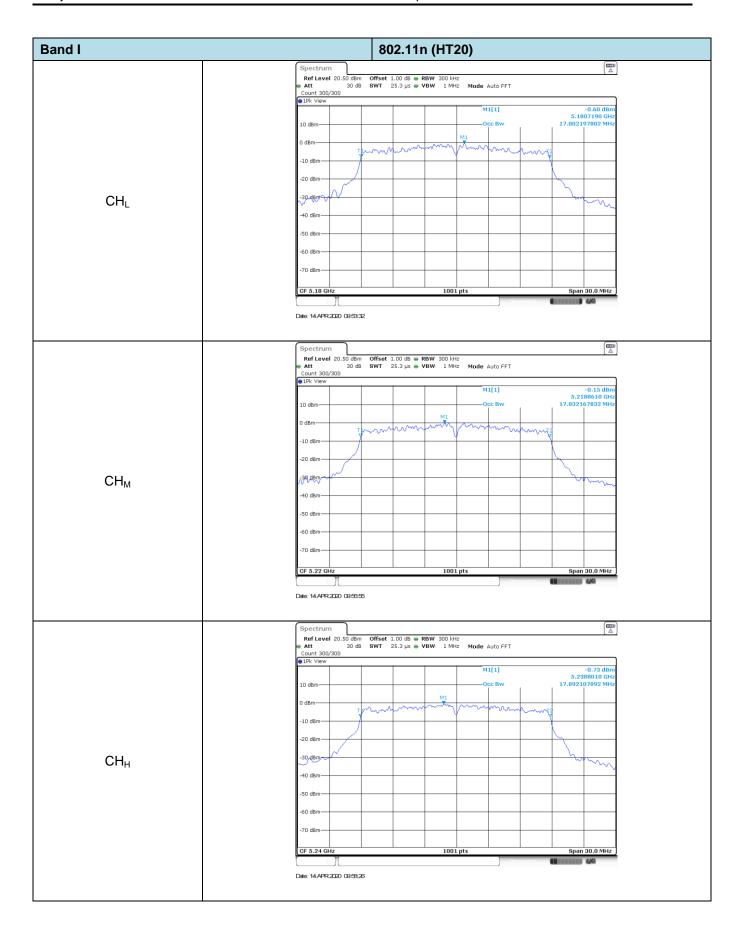


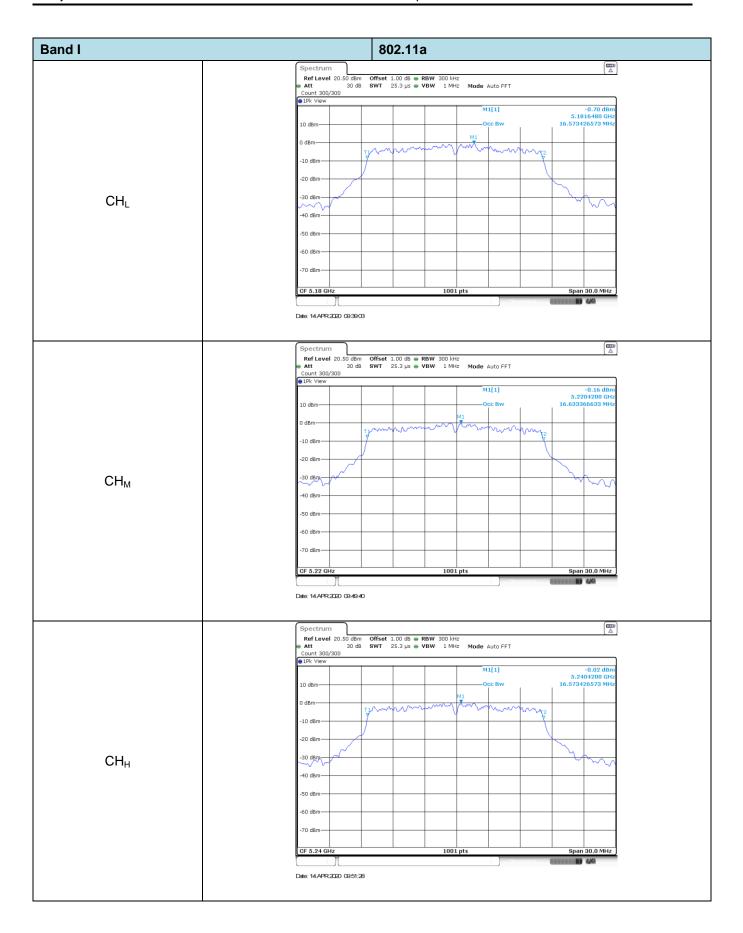

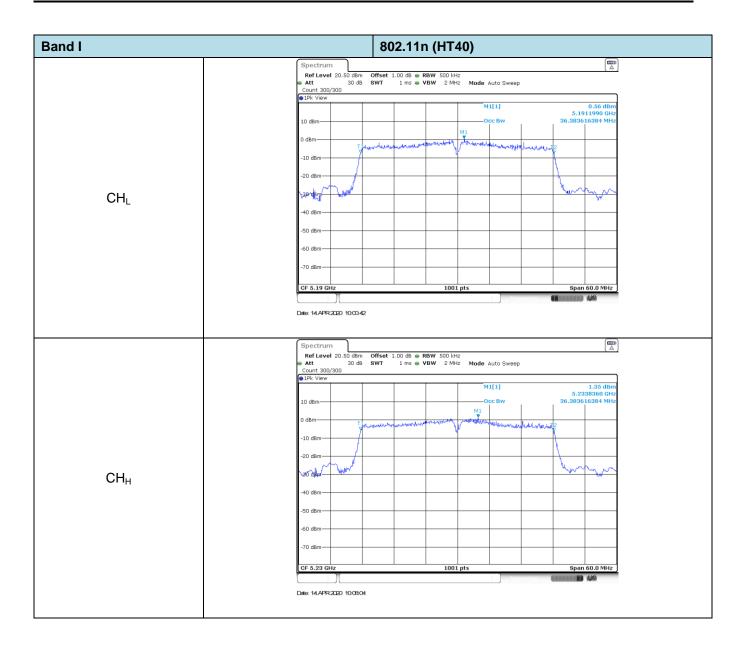

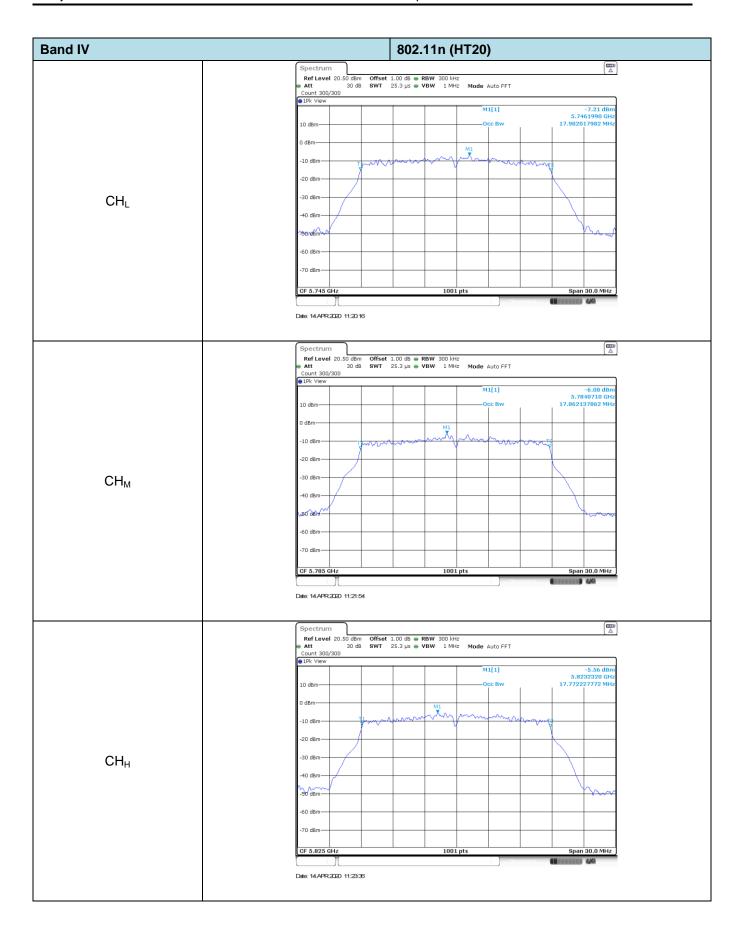


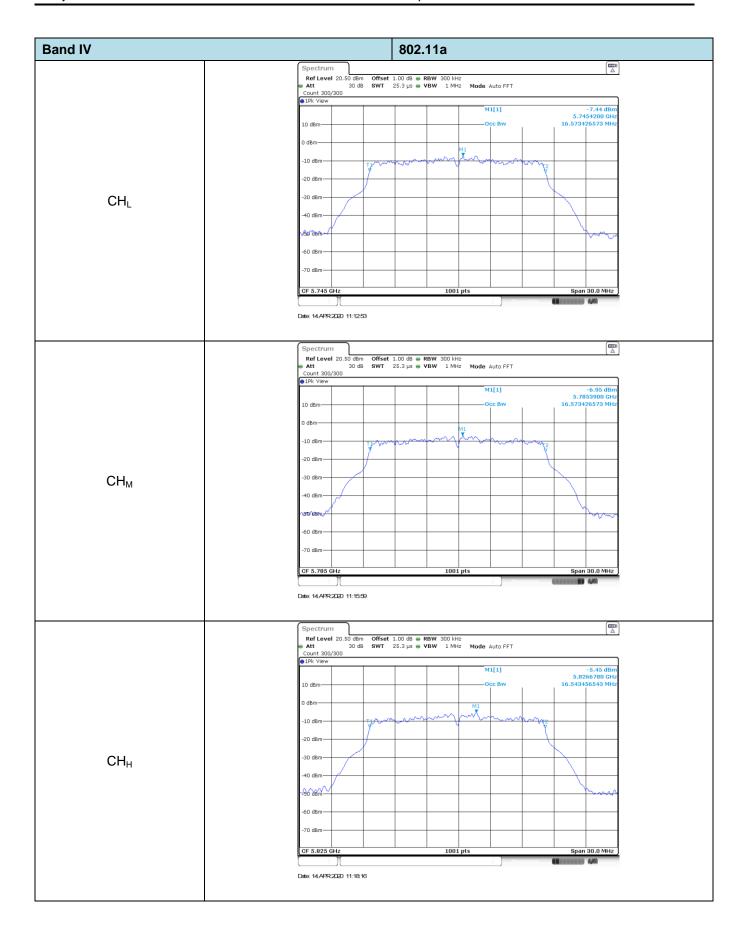

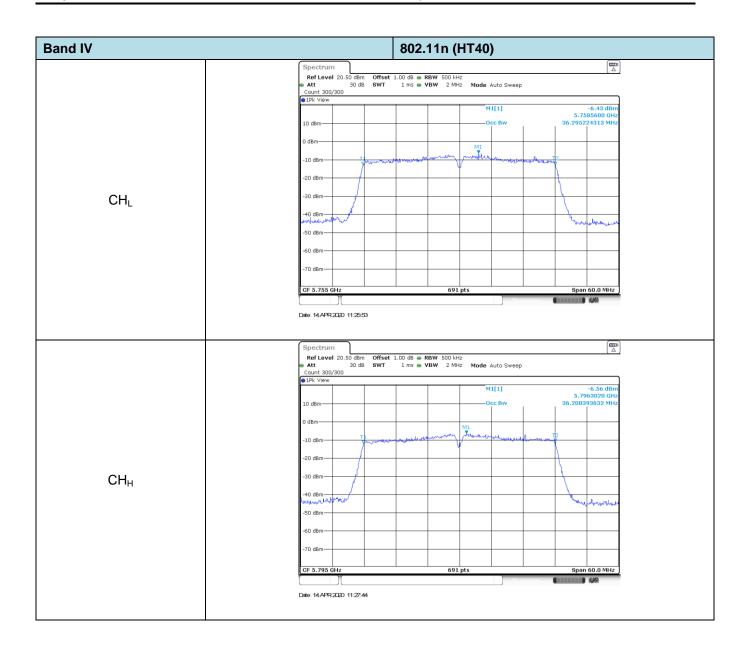



## Appendix E: 6dB Bandwidth

Band	Bandwidth (MHz)	Туре	Channel	6dB bandwith (MHz)	Result
	20	802.11n	CH <sub>L</sub>	17.70	Pass
			CH <sub>M</sub>	17.79	
			СНн	17.73	
IV		802.11a	CH∟	16.35	Pass
IV			CH <sub>M</sub>	16.38	
			СНн	16.02	
	40	802.11n	CH <sub>L</sub>	36.61	Door
			СНн	36.26	Pass

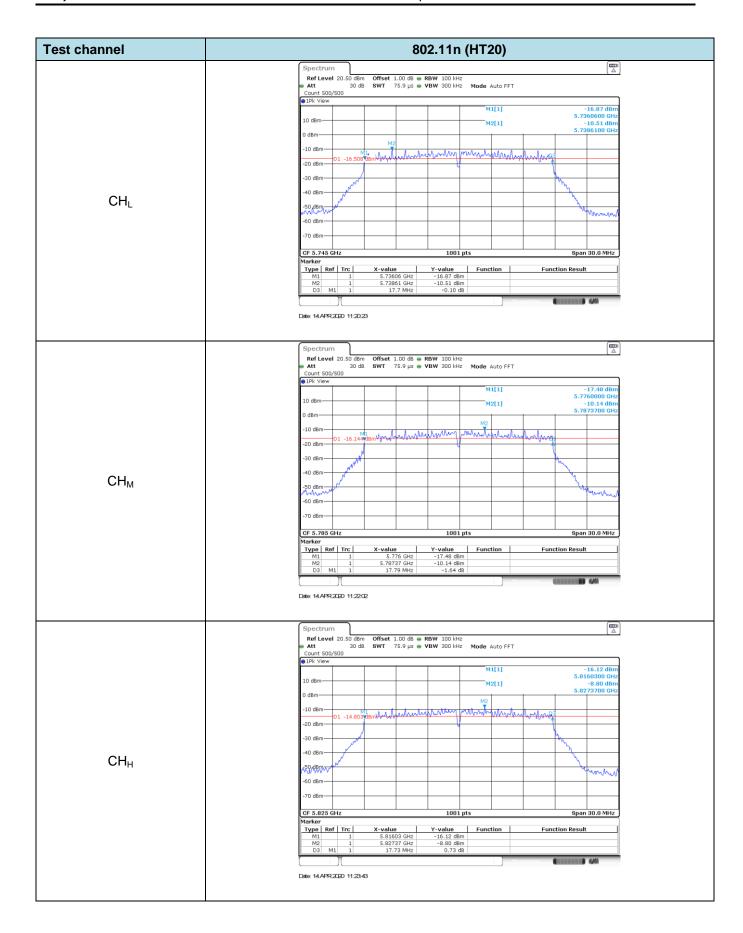



WIFI 5G

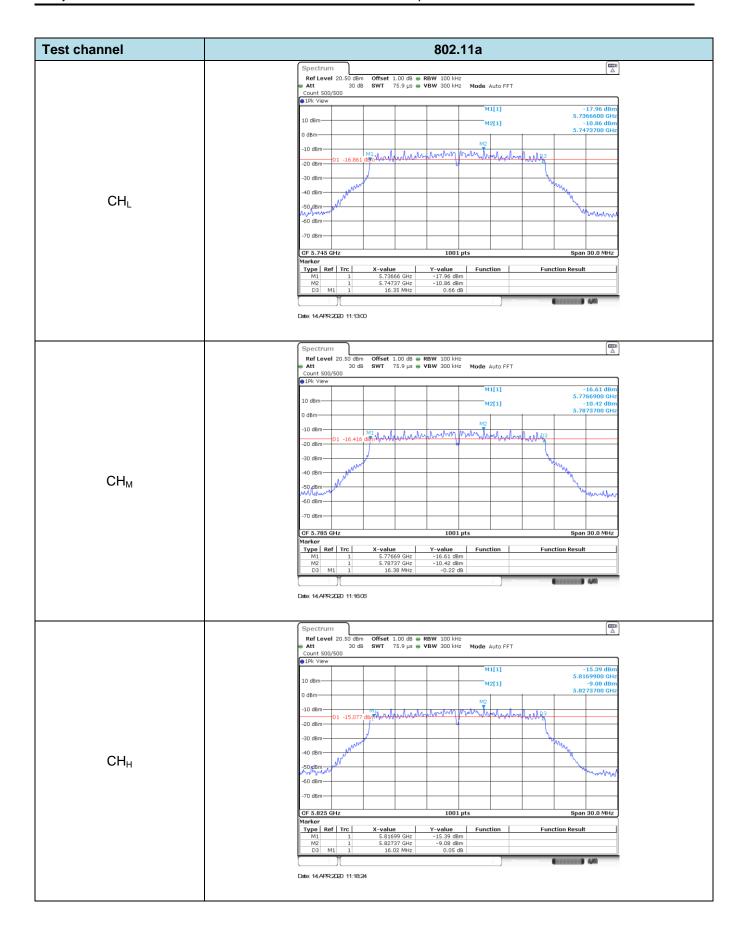

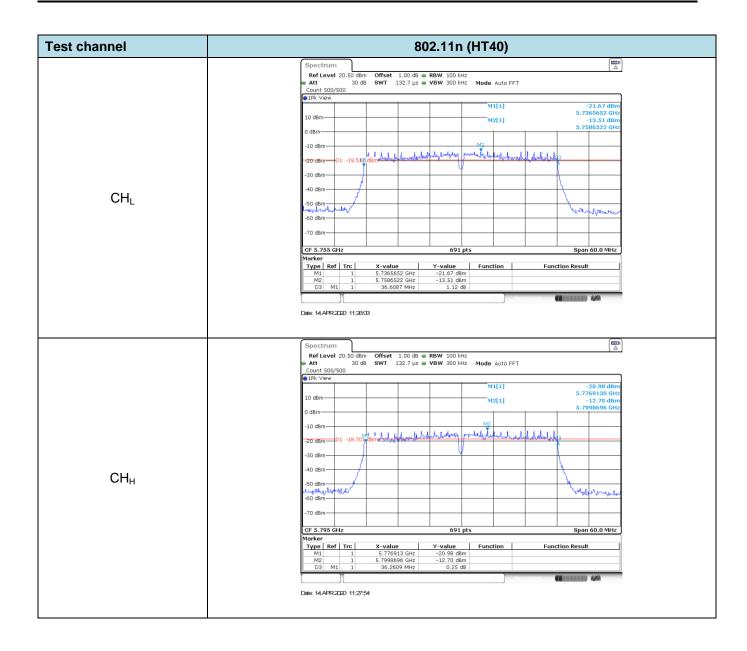

### Appendix F: Band edge

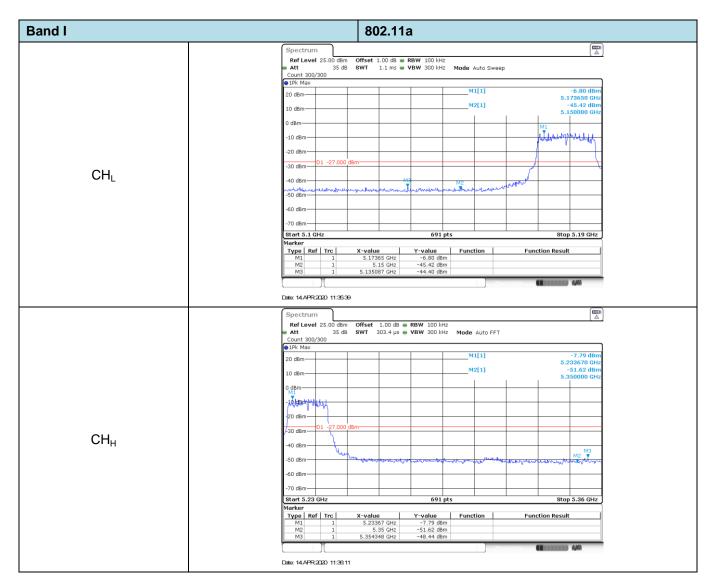

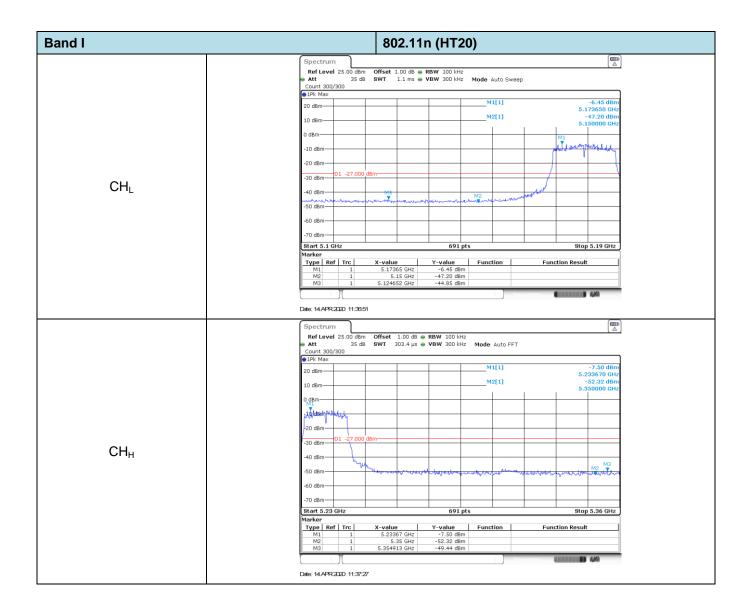









## Appendix G: Frequency stability

#### Voltage VS Frequency stability

Band: I			Test Frequency: 5180.00MHz		
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result	
25	$V_L$	-103900.00	-20.05792	PASS	
25	V <sub>N</sub>	-103900.00	-20.05792	PASS	
25	V <sub>H</sub>	-103900.00	-20.05792	PASS	

Band: IV			Test Frequency: 5745.00MHz		
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result	
25	V <sub>L</sub>	-113900.00	-19.82594	PASS	
25	$V_N$	-114900.00	-20.00000	PASS	
25	V <sub>H</sub>	-113900.00	-19.82594	PASS	

#### **Temperature VS Frequency stability**

Band: I			Test Frequency: 5180.00MHz	
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
V <sub>N</sub>	-20	-102900.00	-19.86487	PASS
$V_N$	-10	-103900.00	-20.05792	PASS
$V_N$	0	-102900.00	-19.86487	PASS
$V_N$	10	-102900.00	-19.86487	PASS
$V_N$	20	-102900.00	-19.86487	PASS
$V_N$	30	-102900.00	-19.86487	PASS
$V_N$	40	-102900.00	-19.86487	PASS
V <sub>N</sub>	50	-102900.00	-19.86487	PASS

Band: IV			Test Frequency: 5745.00MHz		
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result	
V <sub>N</sub>	-20	-112900.00	-19.65187	PASS	
V <sub>N</sub>	-10	-112900.00	-19.65187	PASS	
$V_N$	0	-112900.00	-19.65187	PASS	
$V_N$	10	-112900.00	-19.65187	PASS	
V <sub>N</sub>	20	-112900.00	-19.65187	PASS	
$V_N$	30	-112900.00	-19.65187	PASS	
V <sub>N</sub>	40	-112900.00	-19.65187	PASS	
V <sub>N</sub>	50	-112900.00	-19.65187	PASS	

End of	Report
--------	--------