



TEST REPORT

<p>KCTL KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR20-SRF0206-A Page (1) of (37)</p>	
---	--	---

1. Client

- Name : CATCHFLOW Co.,Ltd
- Address : (13496) B1,322, Yanghyeon-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2020-03-17

2. Use of Report : Certification

3. Name of Product / Model : SRAY / CF-S100

4. Manufacturer / Country of Origin : CATCHFLOW Co.,Ltd / Korea

5. FCC ID : 2AXB3-CF-S100

6. Date of Test : 2020-06-23 to 2020-06-25

7. Location of Test : Permanent Testing Lab On Site Testing (Address: Address of testing location)

8. Test method used : FCC Part 15 Subpart C, 15.247

9. Test Results : Refer to the test result in the test report

Affirmation	Tested by  Name : Minsoo Yoon (Signature)	Technical Manager  Name : Heesu Ahn (Signature)
-------------	--	--

2020-09-25

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2020-08-24	Originally issued	-
2020-09-25	Updated	6,9,10

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR20-SRF0206 is superseded by the report No. KR20-SRF0206-A.

General remarks for test reports

Nothing significant to report.

KCTL

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	4
2.2.	Frequency/channel operations.....	5
3.	Antenna requirement	5
4.	Summary of tests.....	6
5.	Measurement uncertainty	7
6.	Measurement results explanation example	8
7	Test results	9
7.1.	Maximum peak output power.....	9
7.2.	Radiated spurious emissions & band edge.....	11
7.3.	AC Conducted emission	35
8.	Measurement equipment.....	37

KCTL

1. General information

Client : CATCHFLOW Co.,Ltd
 Address : (13496) B1,322, Yanghyeon-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Manufacturer : CATCHFLOW Co.,Ltd
 Address : (13496) B1,322, Yanghyeon-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

Equipment under test : SRAY
 Model : CF-S100
 Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth(BDR/EDR/BLE))
 Modulation technique : Bluetooth(BDR/EDR)_GFSK, π /4DQPSK, 8DPSK
 Bluetooth(BLE)_GFSK
 Number of channels : Bluetooth(BDR/EDR)_79ch / Bluetooth(BLE)_40ch
 Power source : AC 110 V / 60 Hz
 Antenna specification : FPCB Antenna
 Antenna gain : 3.71 dBi
 Software version : V1.0.4
 Hardware version : V2.0
 Test device serial No. : N/A
 Operation temperature : -10 °C ~ 50 °C

Equipment	Manufacturer	Model	Serial No.	Power source
AC to DC Adapter	Dongguan Jinhuasheng Power Technology Co.,Ltd.	RS-300/120-S325	-	INPUT: 110 ~ 240 V / 50/60 Hz / 1.2 A OUTPUT: 12 V, 3.0 A
AUX Cable	-	-	-	-
TRIPOD	-	-	-	-

2.2. Frequency/channel

This device contains the following capabilities:
Bluetooth(BDR/EDR),Bluetooth Low Energy

Ch.	Frequency (MHz)
00	2 402
.	.
39	2 441
.	.
78	2 480

Table 2.2.1. Bluetooth(BDR/EDR)

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached FPCB Antenna (internal antenna) on board.

4. Summary of tests

FCC Part section(s)	Parameter	Test item	Test results
15.247(b)(1), (4)	Maximum peak output power	Conducted	Pass
15.247(a)(1)	Carrier frequency separation		N/T ^(Note1)
15.247(a)(1)	20 dB channel bandwidth		N/T ^(Note1)
15.247(a)(iii) 15.247(b)(1)	Number of hopping channel		N/T ^(Note1)
15.247(a) (iii)	Time of occupancy(dwel time)		N/T ^(Note1)
15.207(a)	Conducted emissions		Pass
15.205(a), 15.209(a) 15.247(d),	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

Notes:

- These test item was performed. (FCC ID: 2AC7Z-ESP32WROVERB)
Test Report No. RSHA180425002-00B issued on 13, June, 2018 by Bay Area Compliance Laboratories Corp. (Kunshan))
- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty(±)	
Conducted RF power	1.3 dB	
Conducted spurious emissions	1.3 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.3 dB
	30 MHz ~ 300 MHz	5.0 dB
	300 MHz ~ 1 000 MHz	5.1 dB
	Above 1 GHz	6.6 dB
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

KCTL

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	10.05	9 000	11.48
50	10.08	10 000	11.59
100	10.12	11 000	11.63
200	10.17	12 000	11.79
300	10.22	13 000	11.94
400	10.25	14 000	11.94
500	10.28	15 000	12.12
600	10.29	16 000	12.14
700	10.30	17 000	12.27
800	10.33	18 000	12.11
900	10.33	19 000	12.33
1 000	10.30	20 000	12.45
2 000	10.26	21 000	12.56
3 000	10.39	22 000	12.45
4 000	10.67	23 000	12.68
5 000	10.89	24 000	12.67
6 000	11.08	25 000	12.84
7 000	11.25	26 000	13.10
8 000	11.37	26 500	12.60


Note.

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7 Test results

7.1. Maximum peak output power

Test setup



Limit

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the 20 dB bandwidth is available to perform the measurement:

Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW ≥ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.
- 7) Allow trace to stabilize.

Notes:

A peak responding power meter is used, where the power meter system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results


Frequency(MHz)	Data rate(Mbps)	Measured output power(dBm)		Limit(dBm)
		Peak	Average	
2 402	1	0.65	-0.01	30.00
2 441		1.22	0.50	
2 480		1.65	1.01	
2 402	2	3.10	-0.01	20.97
2 441		3.74	0.60	
2 480		4.18	1.12	
2 402	3	3.38	0.17	20.97
2 441		3.75	0.56	
2 480		3.89	0.52	

KCTL


7.2. Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

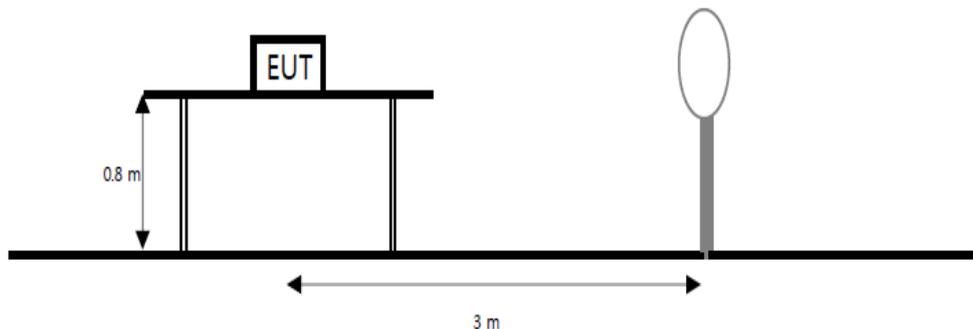

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

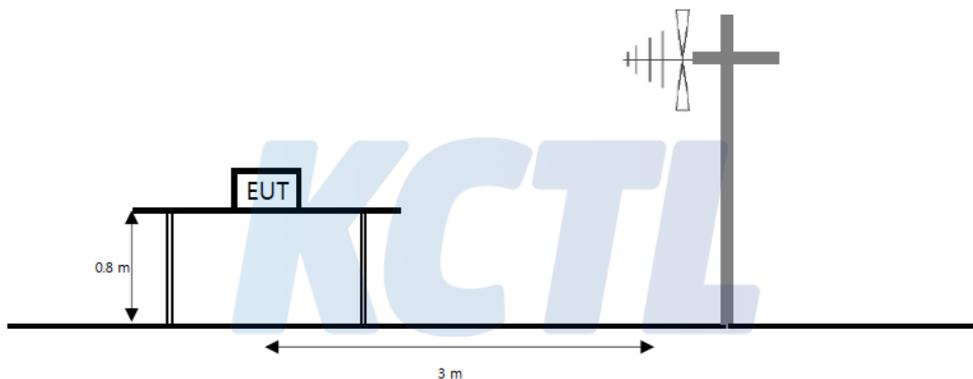

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

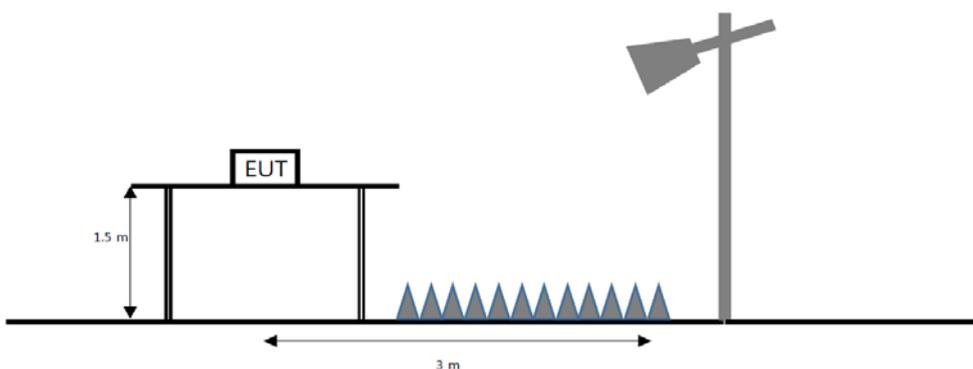

Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = $1/T \geq 1$ Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ means restricted band.

7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

Duty cycle correction factor calculation:

According to 7.5 Procedure for determining the average value of pulsed emissions


Duty Cycle Correction Factor Calculation

- Worst case : AFH mode
- Channel hop rate = 800 hops/second
- Hopping rate for DH5 mode = 800 hops/second / 6 (6 slots for DH5) = 133.33 hops/second
- Time per channel hop = 1 / 133.33 hops/second = 7.50 ms
- Time to cycle through all channels = 7.50 x 20 channels(AFH mode) = 150 ms
- Number of times transmitter hits on one channel = 100 ms / Time to cycle through all channels (ms)
= 100 ms / 150 ms = 1 time
- Worst case Dwell time = 7.5 ms
- Duty Cycle Correction Factor = $20\log(7.5 \text{ ms}/100 \text{ ms}) = -22.5 \text{ dB}$

KCTL


Test results (Below 30 MHz) – Worst case: $\pi/4$ DQPSK High frequency

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

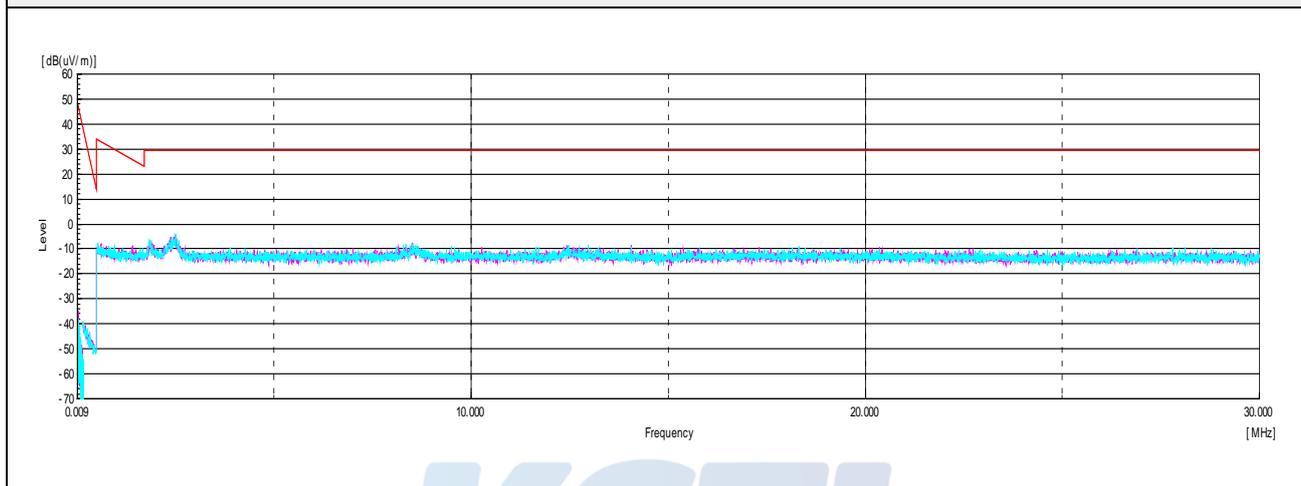Horizontal/Vertical


Test results (Below 1 000 MHz) – Worst case: π /4DQPSK High frequency

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Quasi peak data								
37.76 ¹⁾	V	32.8	20.91	-30.40	-	23.31	40.00	16.69
67.95	V	33.6	12.56	-29.74	-	16.42	40.00	23.58
70.50	V	29.3	12.62	-29.69	-	12.23	40.00	27.77
74.98 ¹⁾	V	32.1	12.80	-29.62	-	15.28	40.00	24.72
257.59 ¹⁾	H	27.9	19.53	-27.20	-	20.23	46.00	25.77
378.96 ¹⁾	V	28.5	21.10	-26.03	-	23.57	46.00	22.43

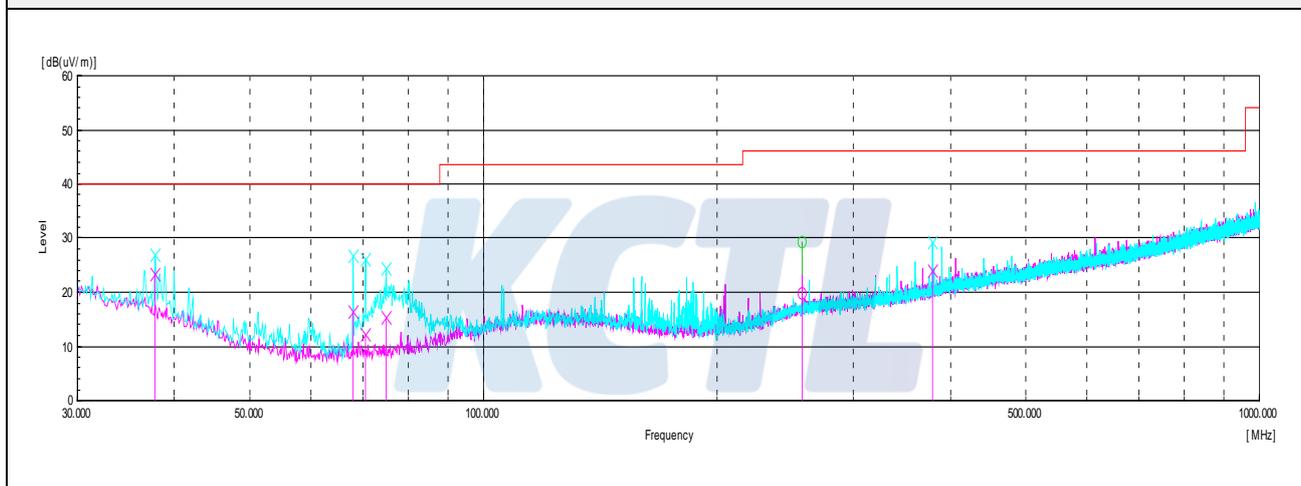
Horizontal/Vertical

Test results (Above 1 000 MHz)**GFSK****Low Channel**


Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ N/m))	Limit (dB(μ N/m))	Margin (dB)
Peak data								
2 388.98 ¹⁾	H	40.05	31.88	-29.04	-	42.89	74.00	31.11
4 805.00 ¹⁾	V	60.36	33.92	-53.04	-	41.24	74.00	32.76
16 419.05	H	57.21	41.84	-46.00	-	53.05	74.00	20.95
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

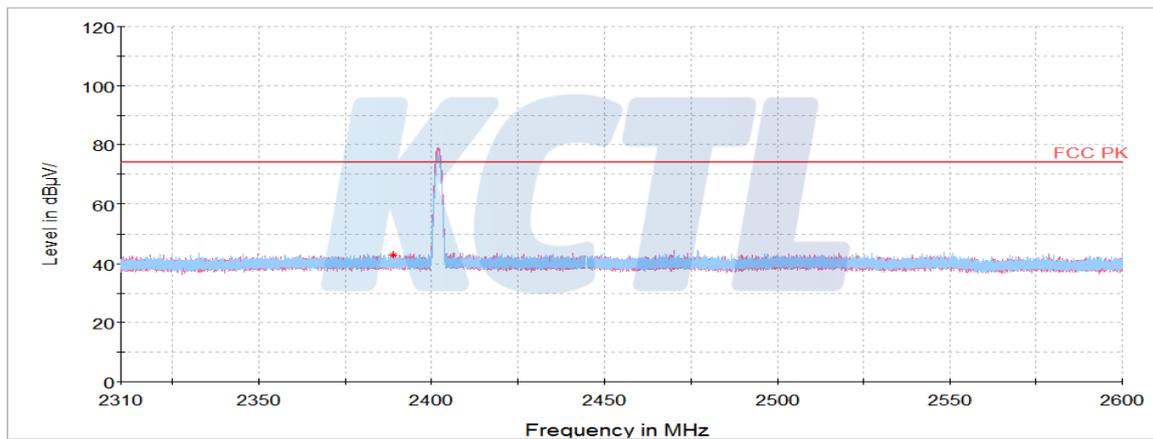Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

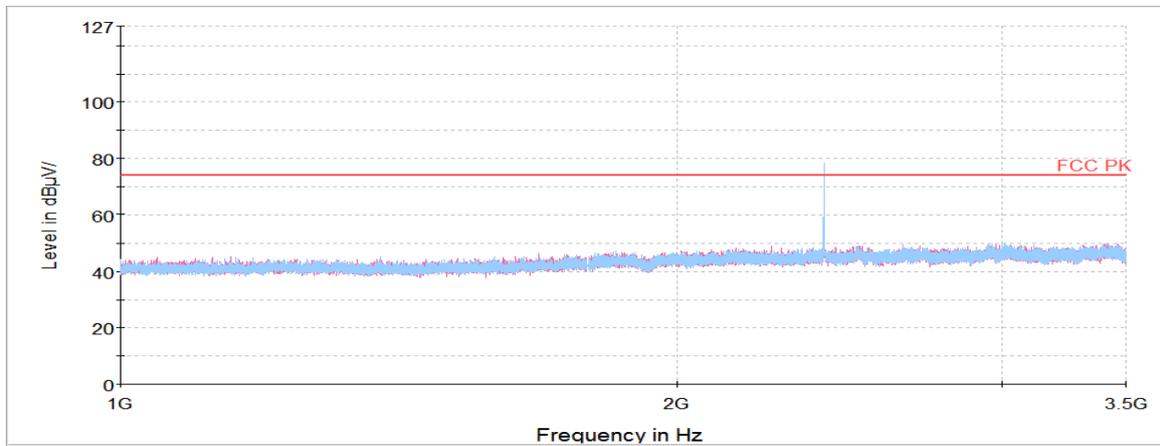

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

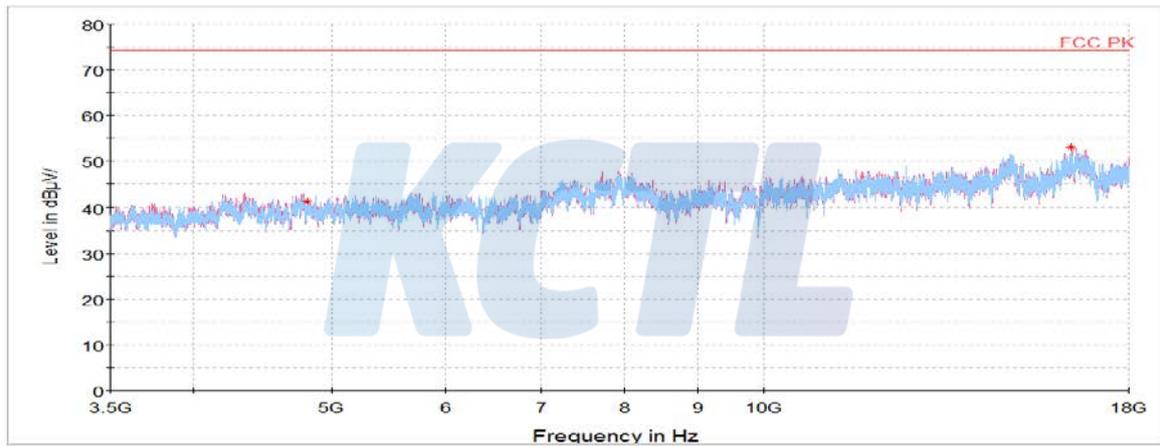

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

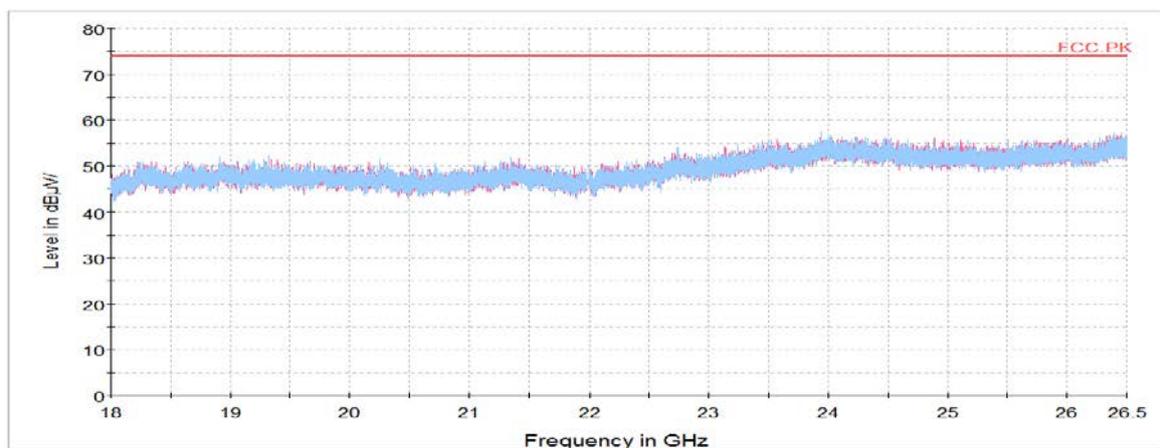


Middle Channel


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 851.22 ¹⁾	V	63.78	33.94	-54.35	-	43.37	74.00	30.63
16 743.48	H	56.92	41.74	-46.33	-	52.33	74.00	21.67
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

KCTL


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

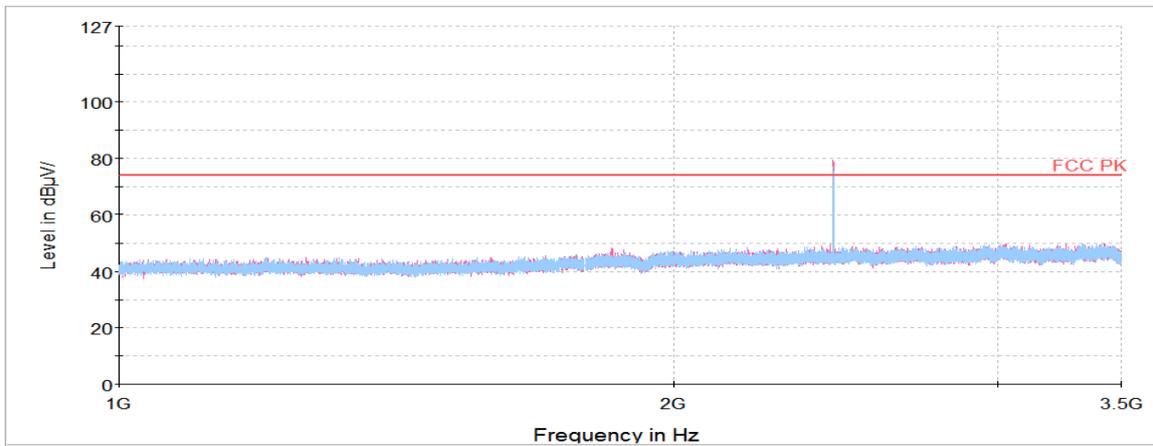

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

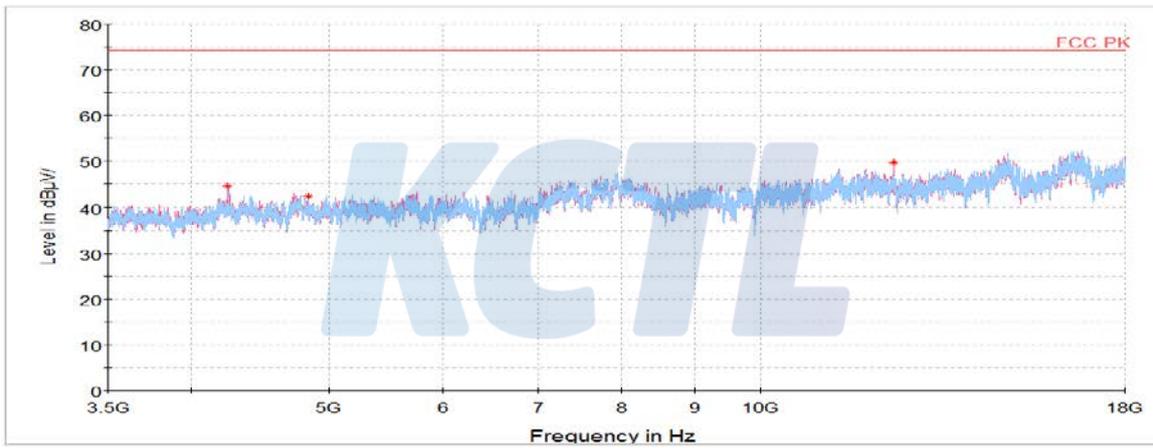


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

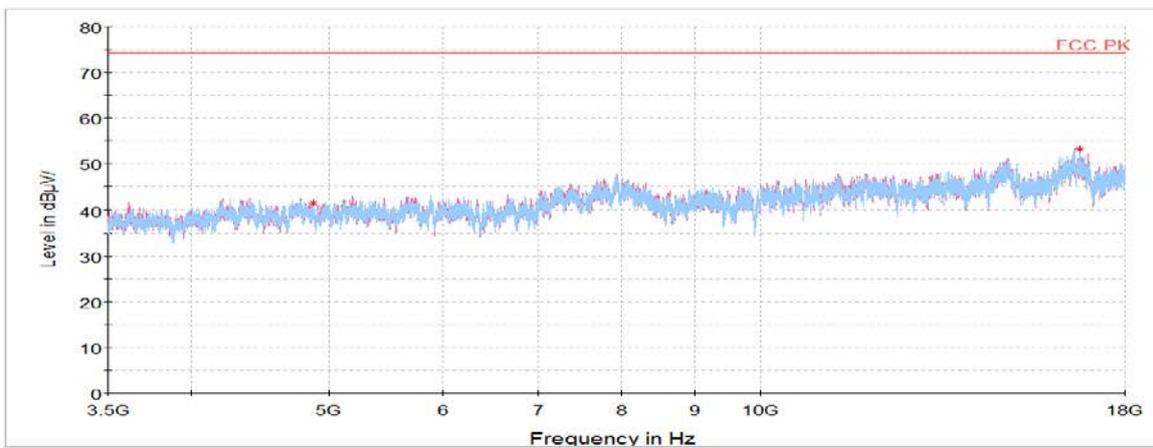


High Channel


Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
2 487.38 ¹⁾	V	42.30	32.07	-29.22	-	45.15	74.00	28.85
4 957.25 ¹⁾	H	62.38	33.98	-54.71	-	41.65	74.00	32.35
16 550.45	H	56.38	41.55	-45.67	-	52.26	74.00	21.74
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

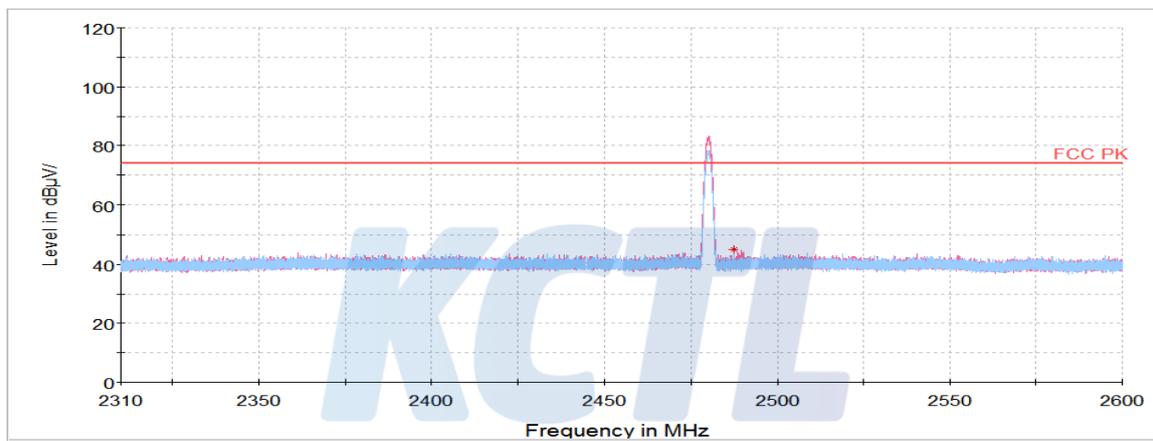Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

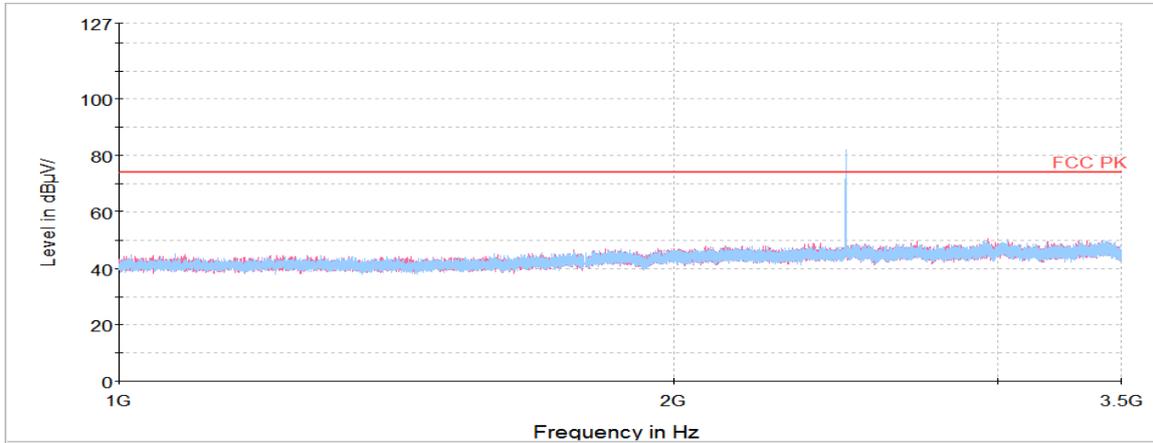

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

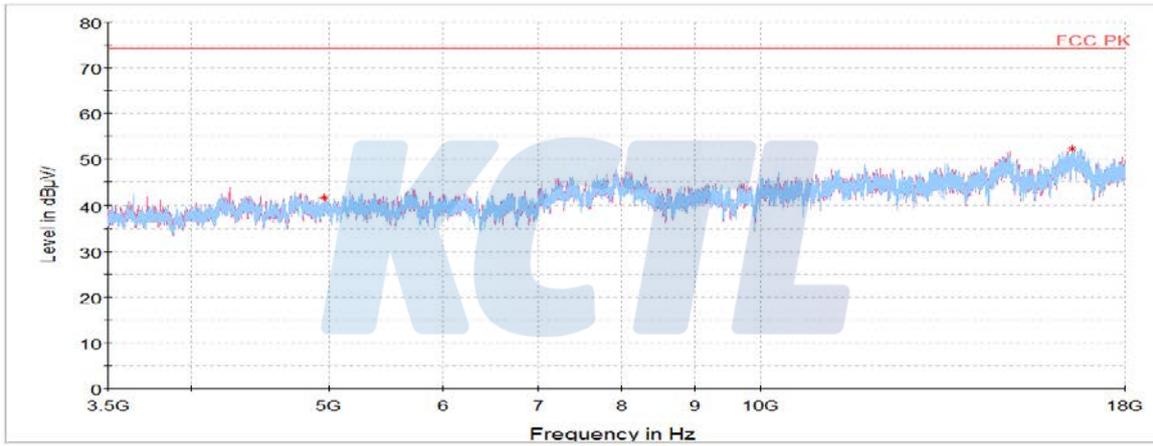


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

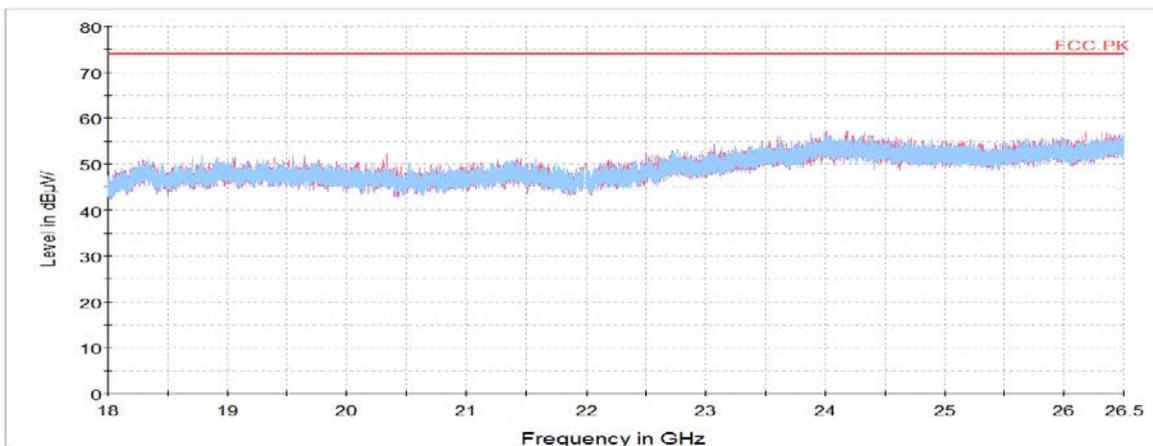


$\pi/4$ DQPSK**Low Channel**


Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
2 385.69 ¹⁾	H	41.32	31.87	-29.06	-	44.13	74.00	29.87
4 812.70 ¹⁾	V	61.94	33.93	-53.26	-	42.61	74.00	31.39
16 565.86	V	57.19	41.57	-45.73	-	53.03	74.00	20.97
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

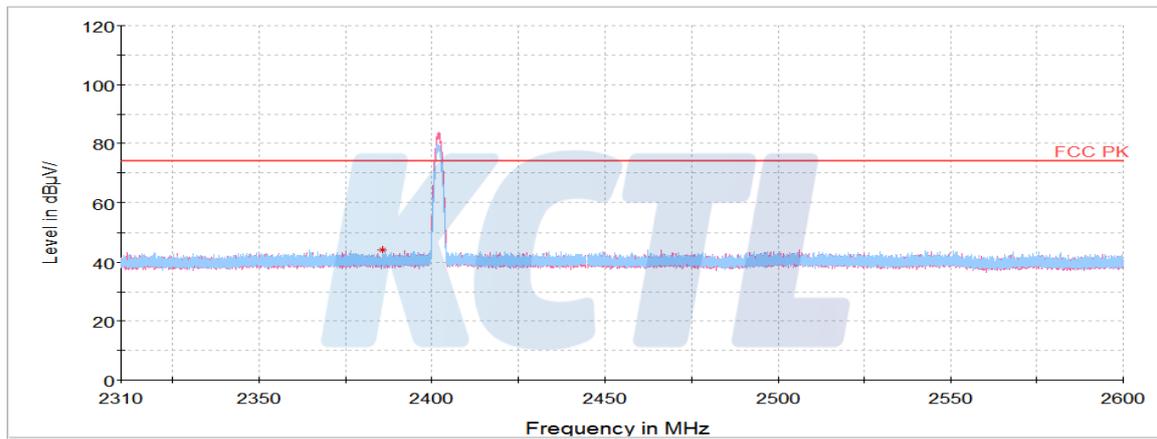Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

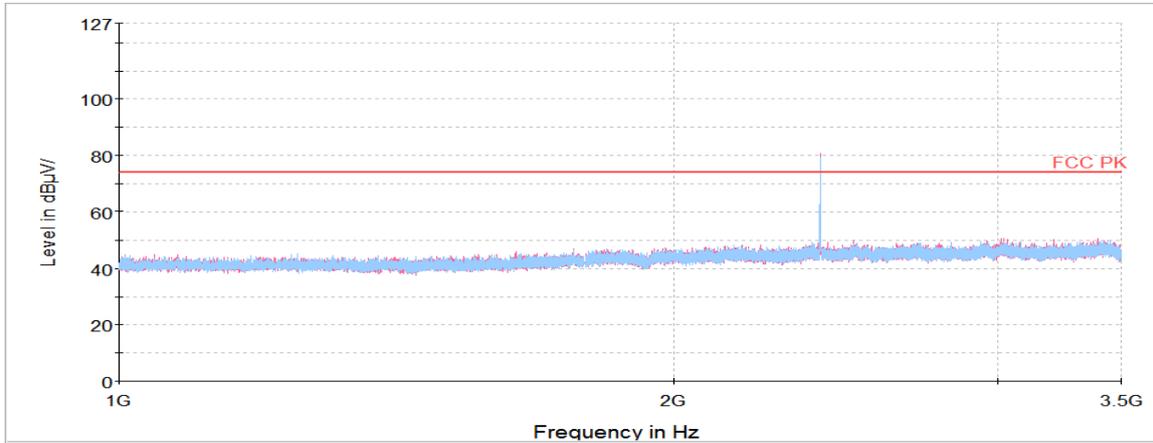

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

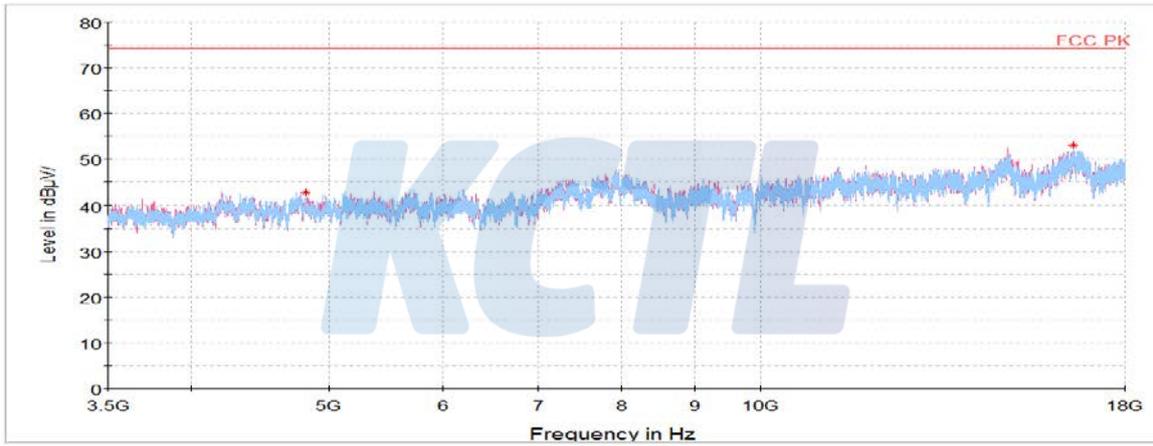

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

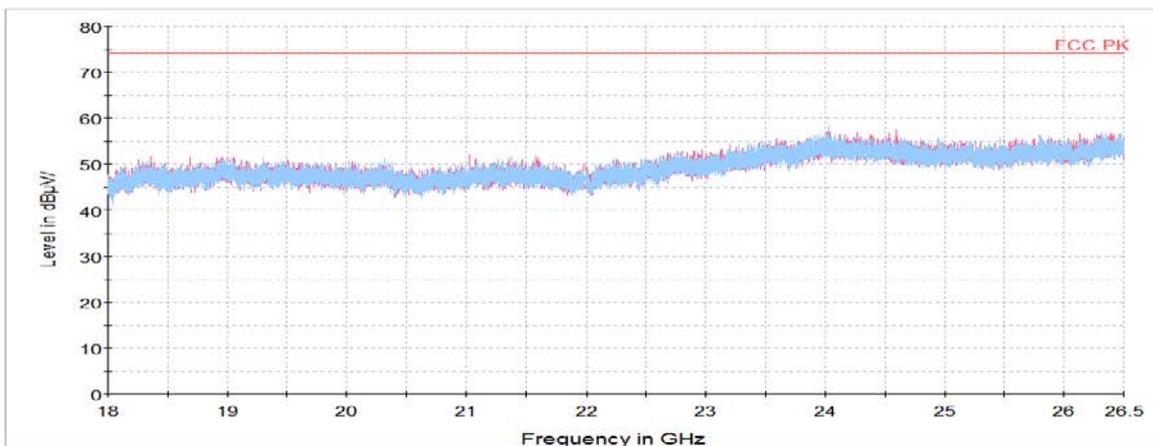


Middle Channel


Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
4 248.11 ¹⁾	V	66.14	33.40	-55.08	-	44.46	74.00	29.54
4 834.91 ¹⁾	H	62.31	33.93	-53.89	-	42.35	74.00	31.65
12 400.28 ¹⁾	V	60.94	39.08	-50.32	-	49.70	74.00	24.30
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

KCTL


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

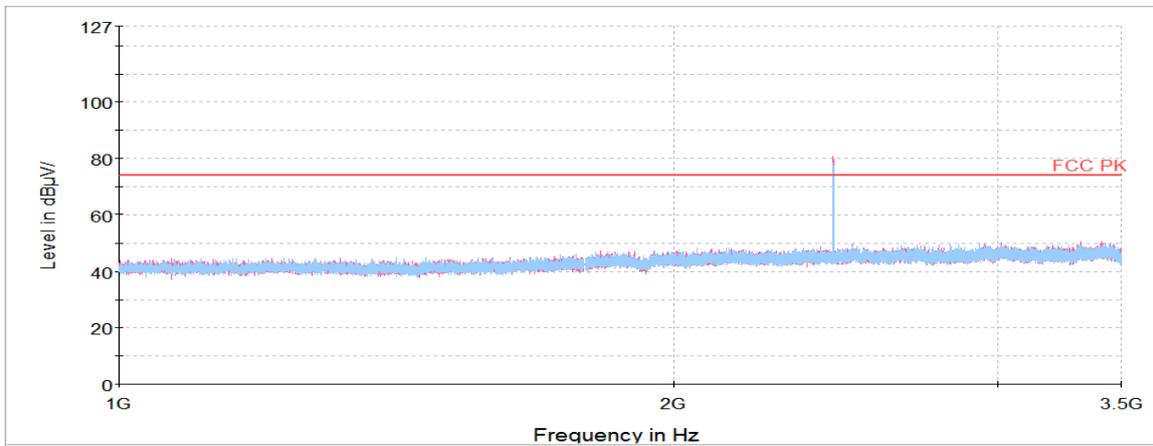

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

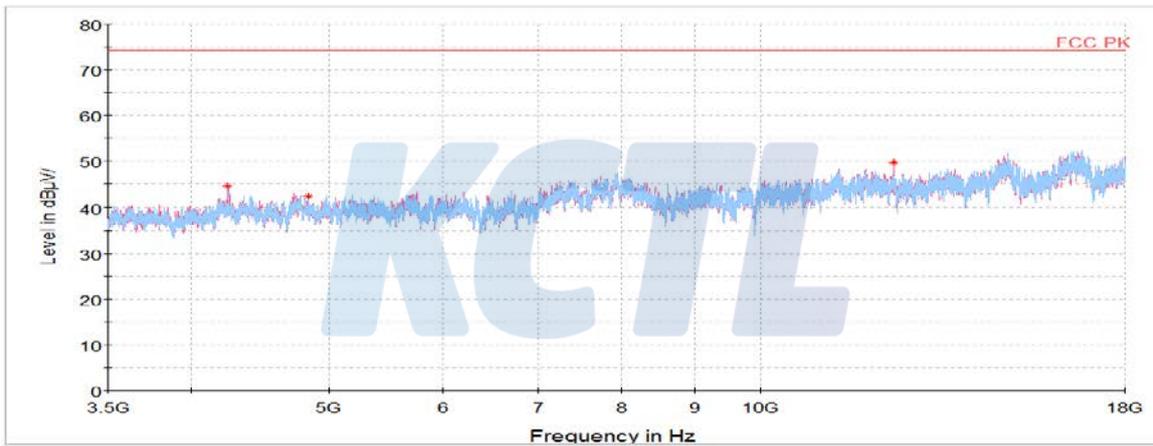


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

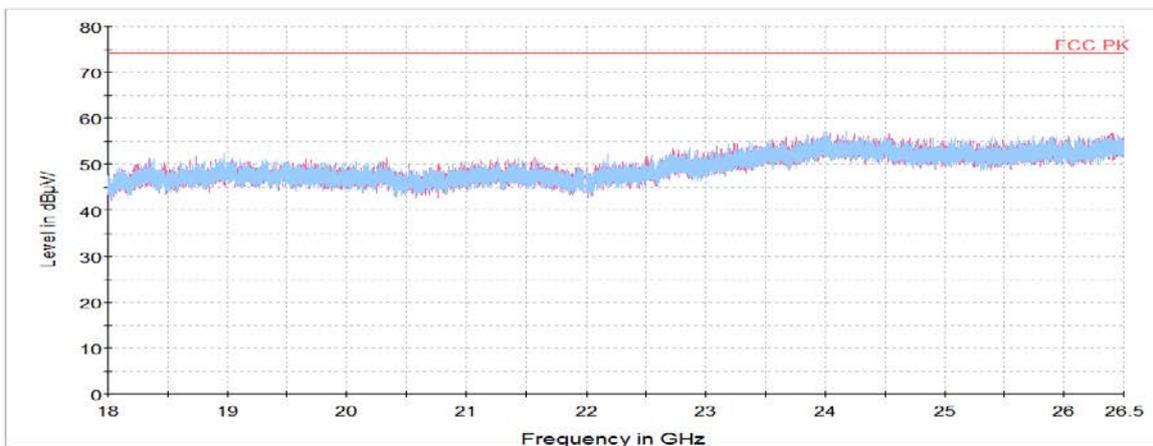


High Channel


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 488.66 ¹⁾	V	40.93	32.08	-29.23	-	43.78	74.00	30.22
4 952.72 ¹⁾	H	62.39	33.98	-54.79	-	41.58	74.00	32.42
16 559.97	V	56.36	41.56	-45.70	-	52.22	74.00	21.78
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

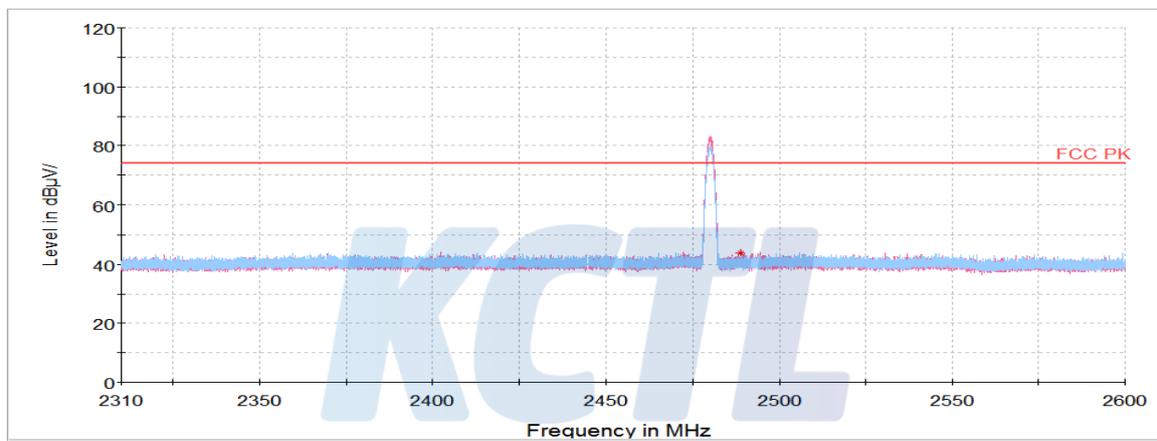Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

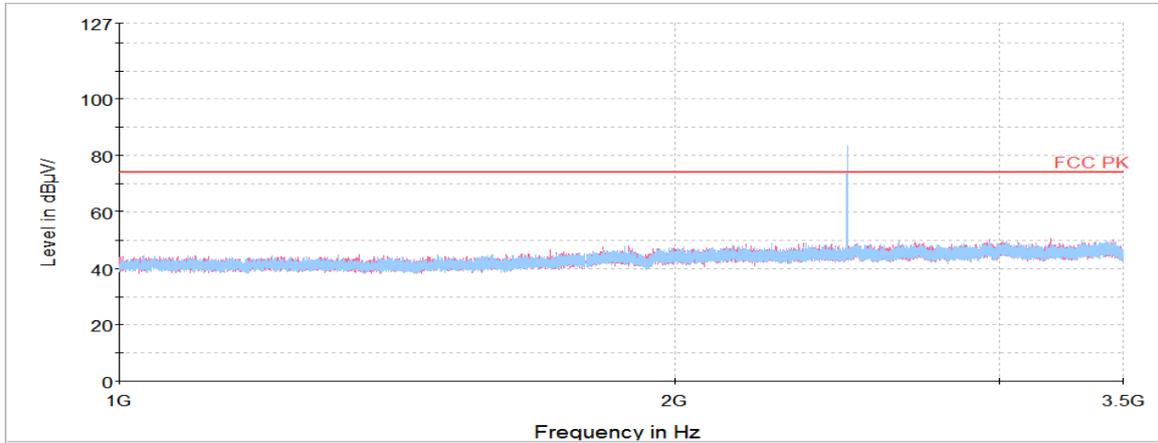

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

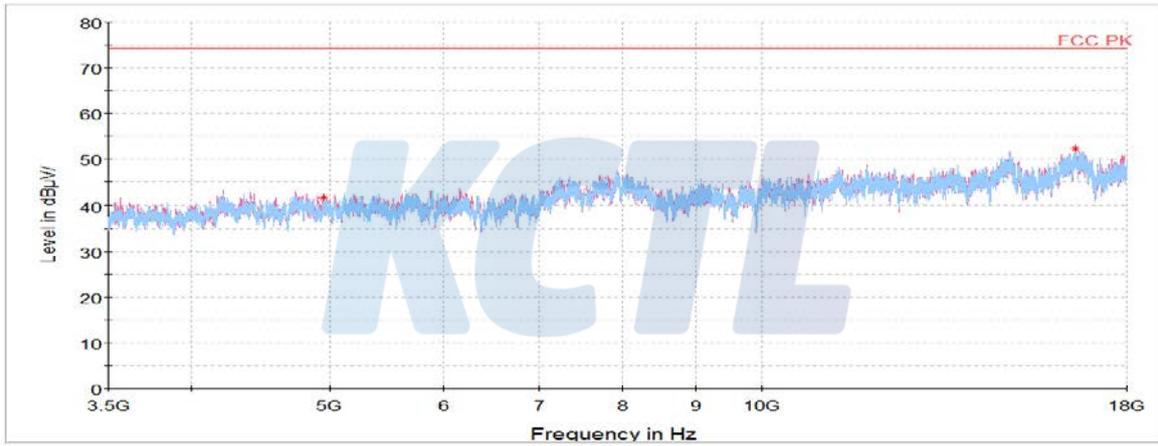


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

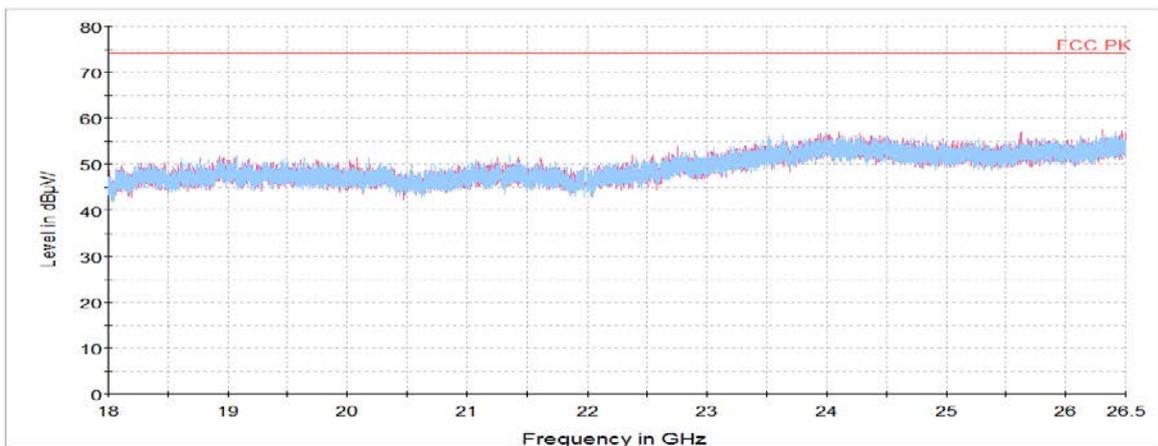


8DPSK**Low Channel**


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 383.39 ¹⁾	V	41.52	31.87	-29.07	-	44.32	74.00	29.68
4 811.34 ¹⁾	V	62.36	33.92	-53.22	-	43.06	74.00	30.94
16 548.64	H	56.84	41.55	-45.67	-	52.72	74.00	21.28
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

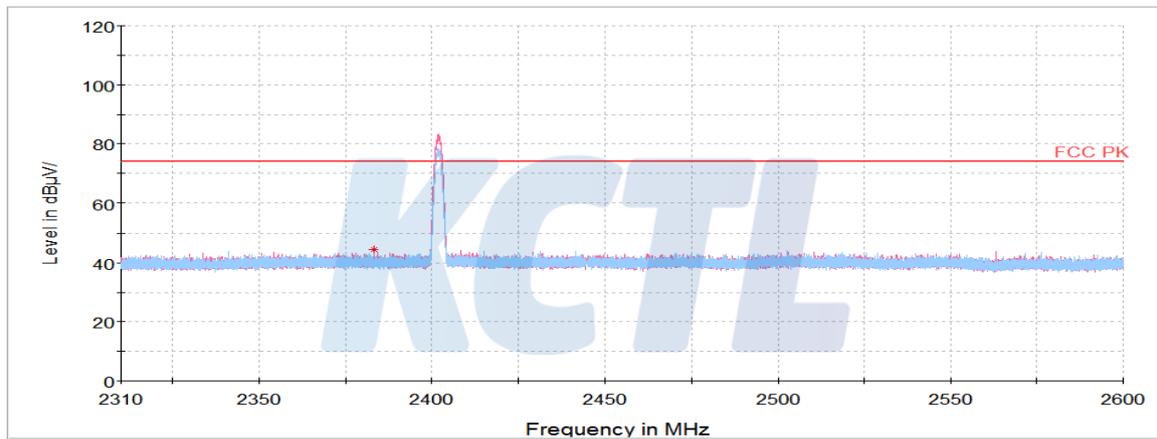Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

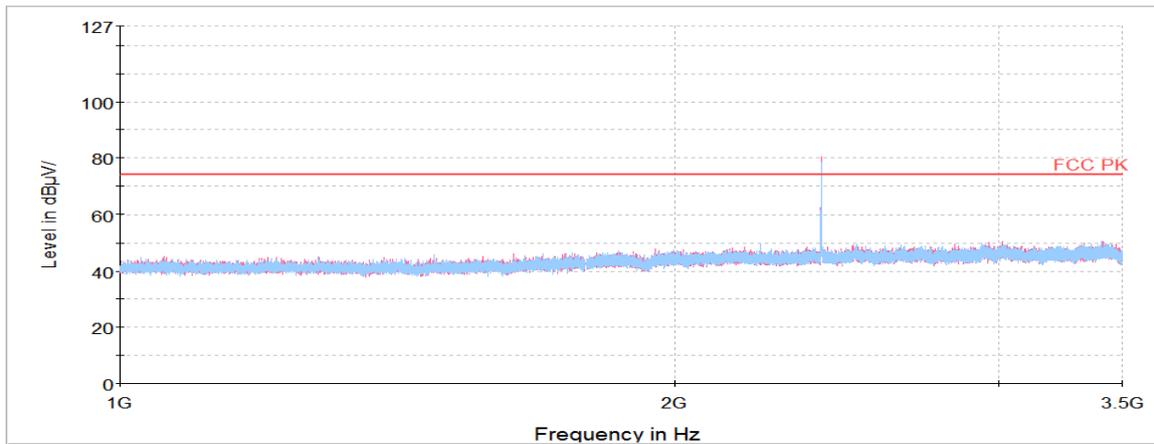

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

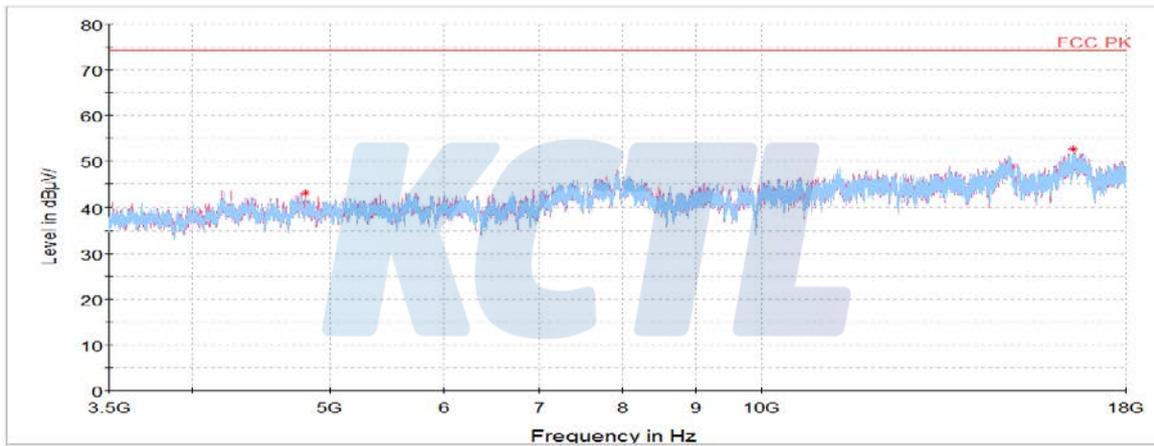

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

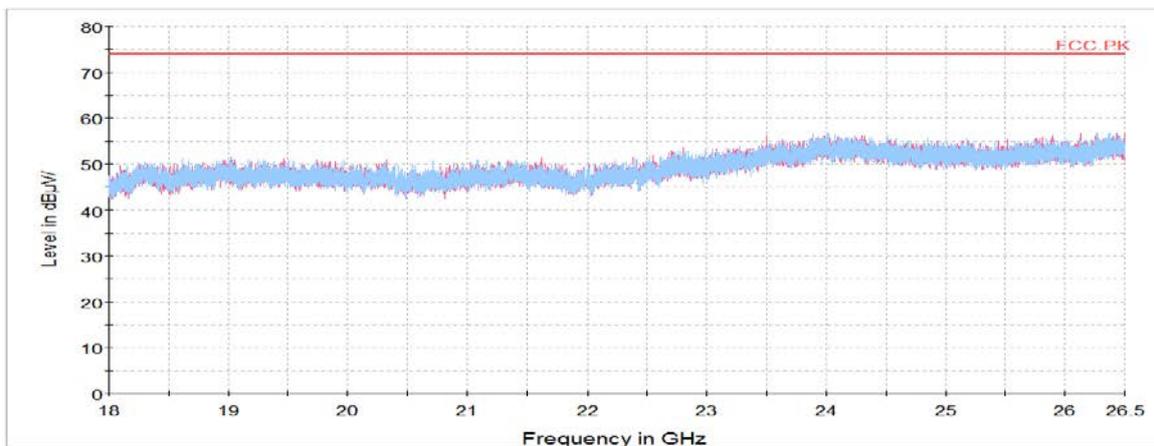


Middle Channel


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 869.80 ¹⁾	H	62.23	33.95	-54.88	-	41.30	74.00	32.70
16 734.42	H	57.87	41.73	-46.30	-	53.30	74.00	20.70
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

KCTL


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

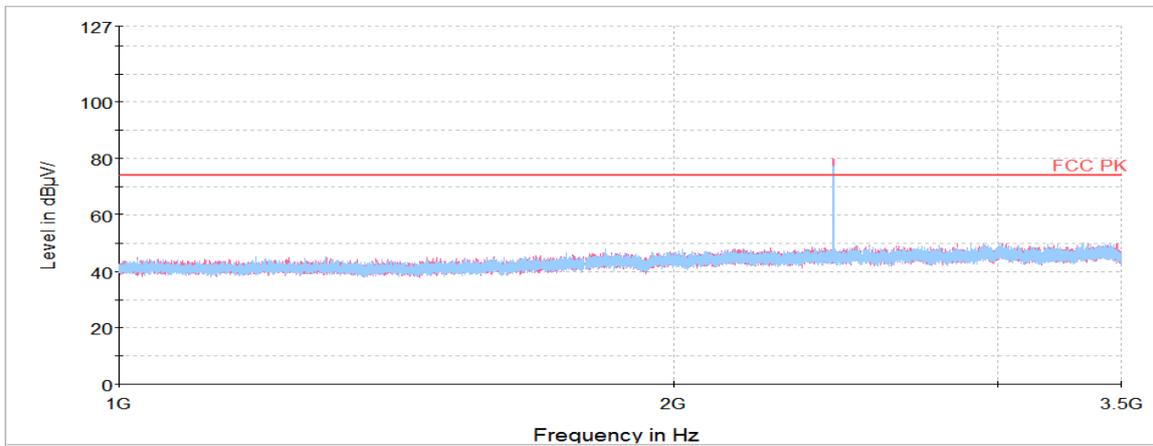

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

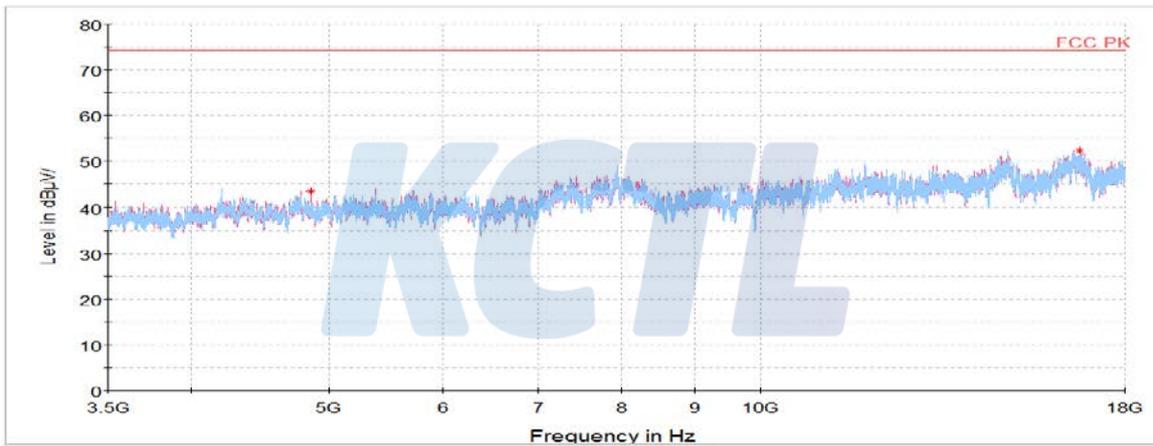


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

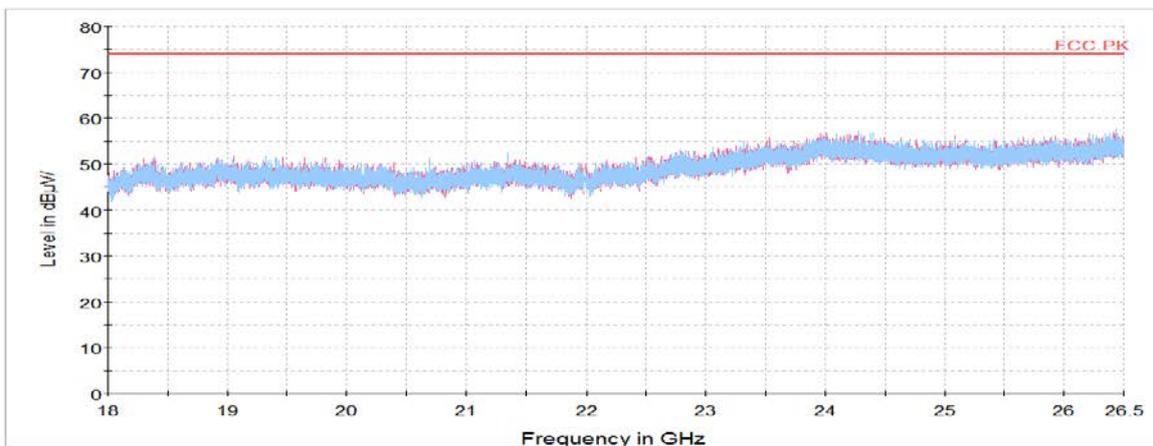


High Channel


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.57 ¹⁾	V	40.34	32.07	-29.21	-	43.20	74.00	30.80
4 950.91 ¹⁾	H	62.52	33.98	-54.83	-	41.67	74.00	32.33
16 570.39	H	56.40	41.57	-45.74	-	52.23	74.00	21.77
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

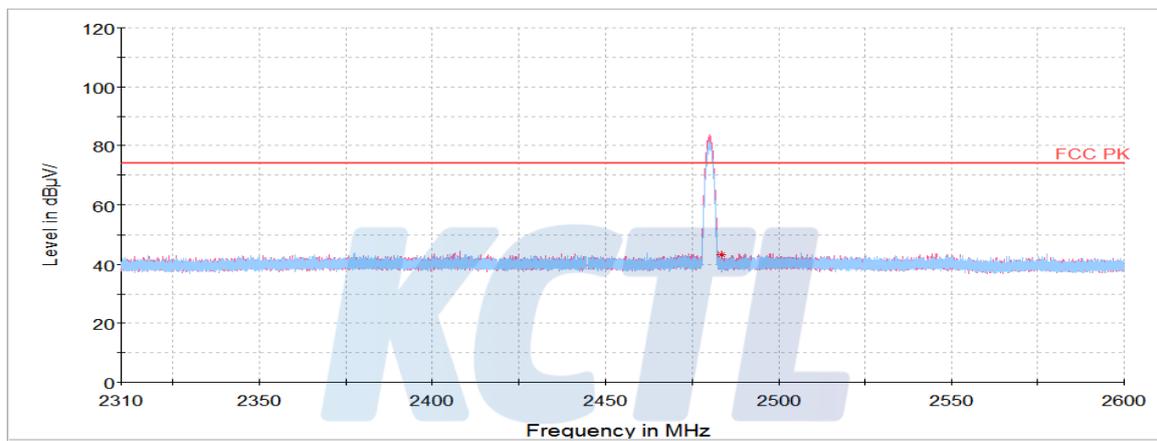Horizontal/Vertical for Band-edge


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

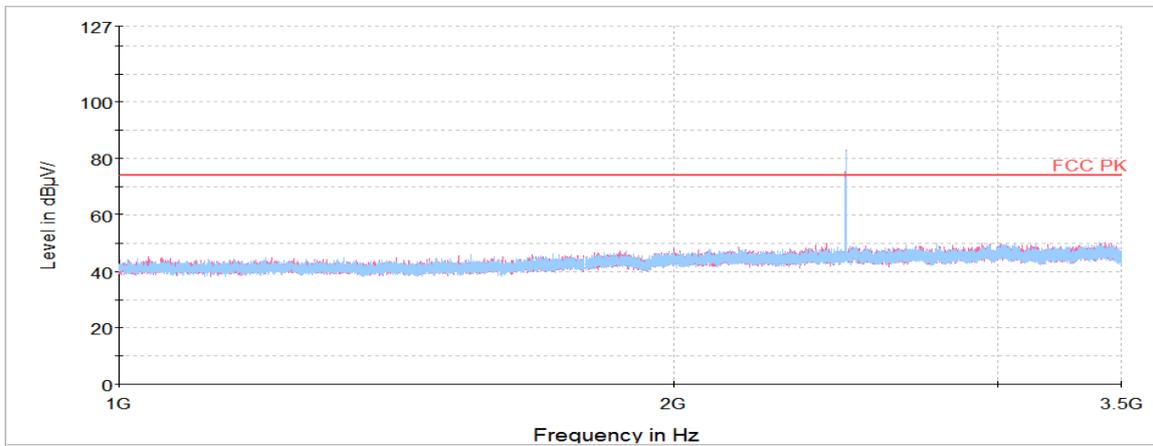


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

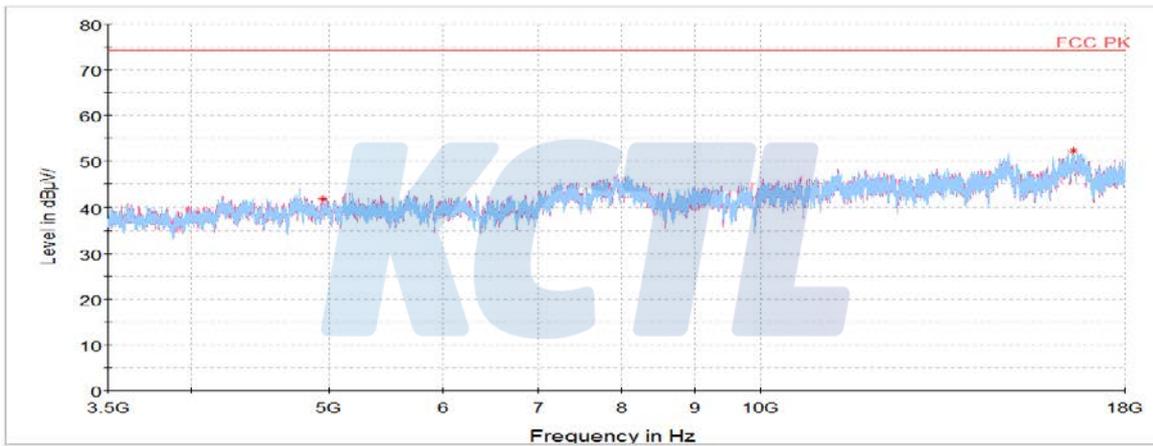

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

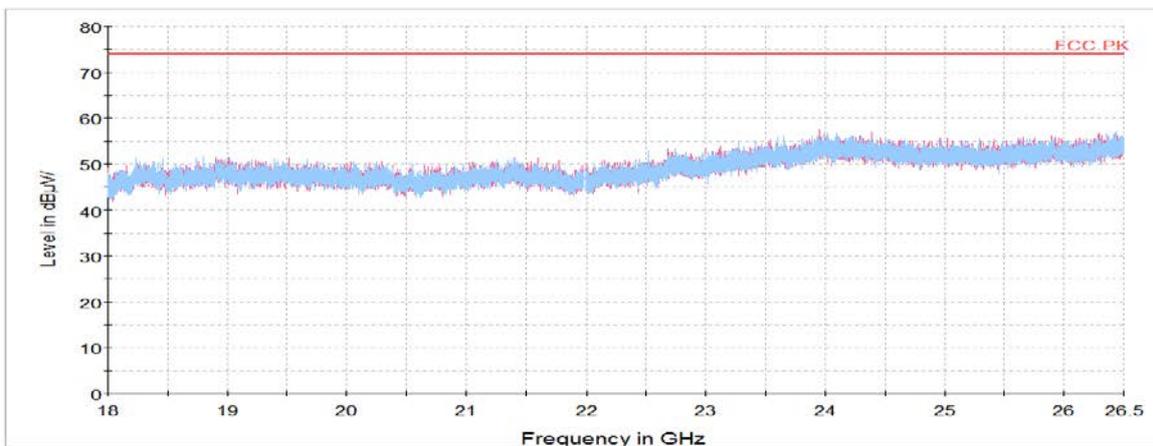

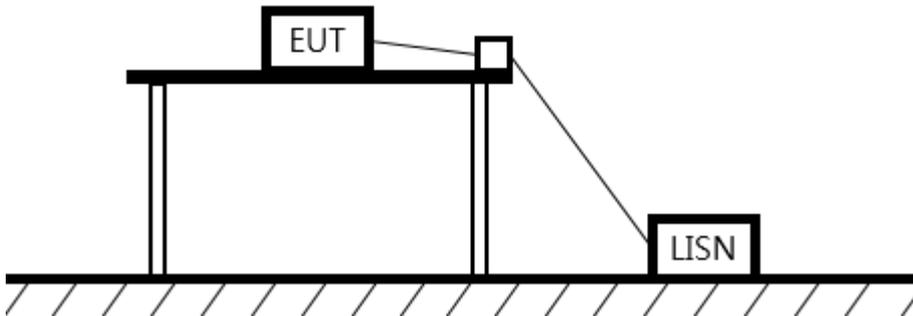Test setup**Limit**

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower value applies at the boundary between the frequency ranges.


Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results

Worst case: π /4DQPSK / Highest Channel

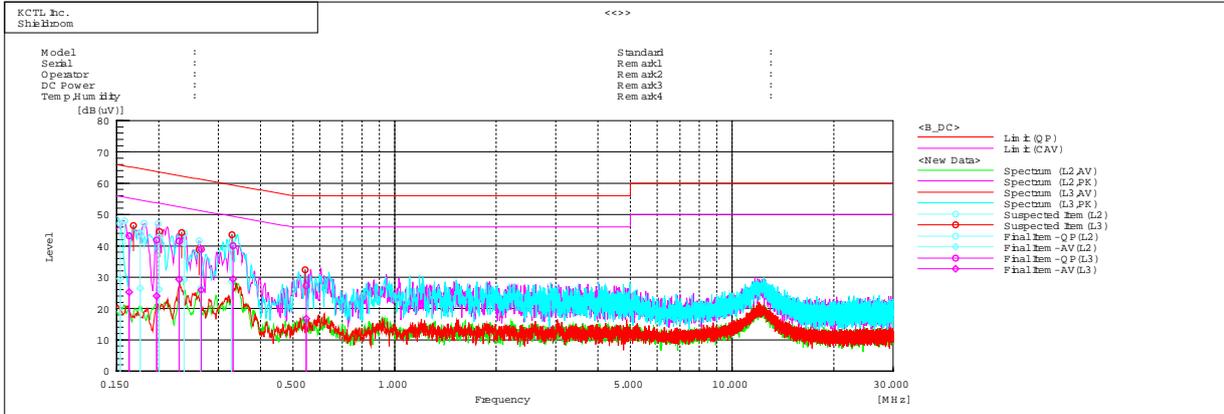

Final Result

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15373	37.1	19.4	10.1	47.2	29.5	65.8	55.8	18.6	26.3
2	0.1762	33.6	16.2	10.3	43.9	26.5	64.7	54.7	20.8	28.2
3	0.20056	32.6	16.0	10.2	42.8	26.2	63.6	53.6	20.8	27.4
4	0.23759	31.1	19.3	9.9	41.0	29.2	62.2	52.2	21.2	23.0
5	0.26641	29.0	16.6	9.9	38.9	26.5	61.2	51.2	22.3	24.7
6	0.32832	29.4	18.6	10.0	39.4	28.6	59.5	49.5	20.1	20.9

--- L3 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16351	32.9	14.9	10.3	43.2	25.2	65.3	55.3	22.1	30.1
2	0.19701	31.6	13.8	10.2	41.8	24.0	63.7	53.7	21.9	29.7
3	0.2295	31.6	19.3	10.0	41.6	29.3	62.5	52.5	20.9	23.2
4	0.26748	29.1	16.0	9.9	39.0	25.9	61.2	51.2	22.2	25.3
5	0.33187	30.0	19.4	10.1	40.1	29.5	59.4	49.4	19.3	19.9
6	0.54736	17.1	6.6	10.2	27.3	16.8	56.0	46.0	28.7	29.2

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100732	21.01.21
DC Power Supply	AGILENT	E3632A	MY40007371	21.05.11
Attenuator	API Inmet	40AH2W-10	15	21.05.12
Pulse Power Meter	ANRITSU	ML2495A	1608009	21.07.29
Pulse Power Sensor	ANRITSU	MA2411B	1726174	21.07.29
Spectrum Analyzer	R&S	FSV40	100989	21.01.03
EMI TEST RECEIVER	R&S	ESCI7	100732	20.08.22
Bi-Log Antenna	TESEQ	CBL 6112D	37876	22.07.20
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
ATTENUATOR	Agilent	8491B	MY39270292	22.07.20
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Horn antenna	ETS.lindgren	3116	00086632	21.02.17
Attenuator	API Inmet	40AH2W-10	12	21.05.12
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	21.07.28
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2031196	21.02.12
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	21.01.22
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	21.05.11
TWO-LINE V - NETWORK	R&S	ENV216	101358	20.10.02
EMI TEST RECEIVER	R&S	ESCI	100001	20.08.22
Vector Signal Generator	R&S	SMBV100A	257566	21.07.13
Signal Generator	R&S	SMR40	100007	21.04.08
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

End of test report