



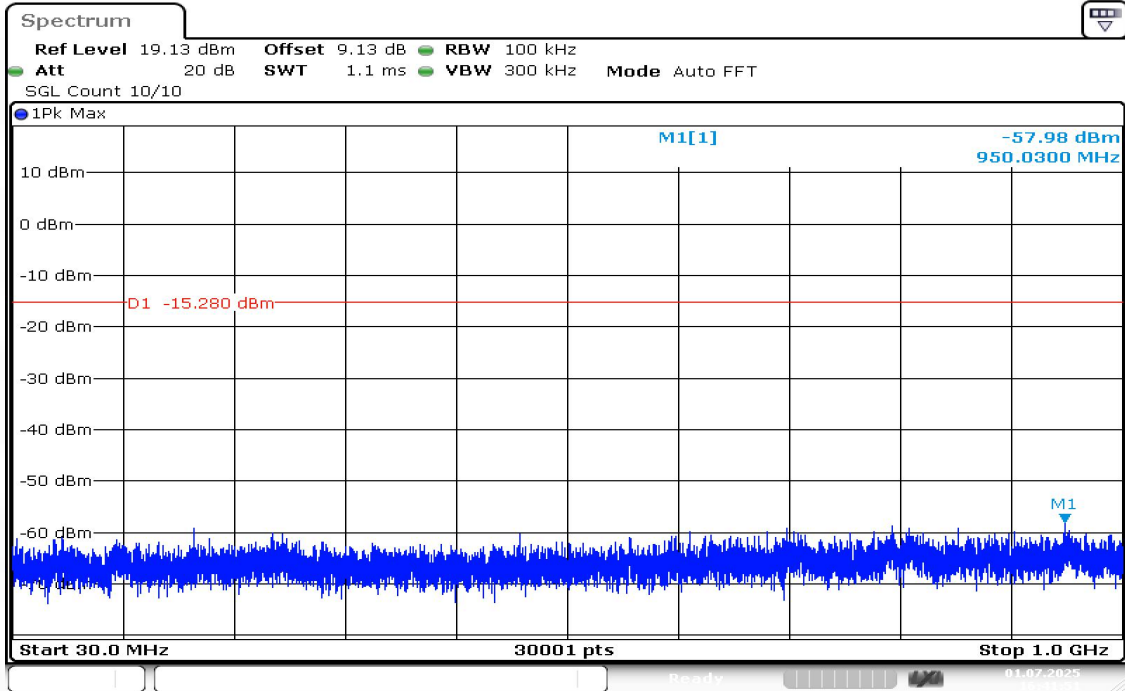


Date: 1.JUL.2025 16:41:51

BLE_1M-Ant1-2440-30~1000-PASS

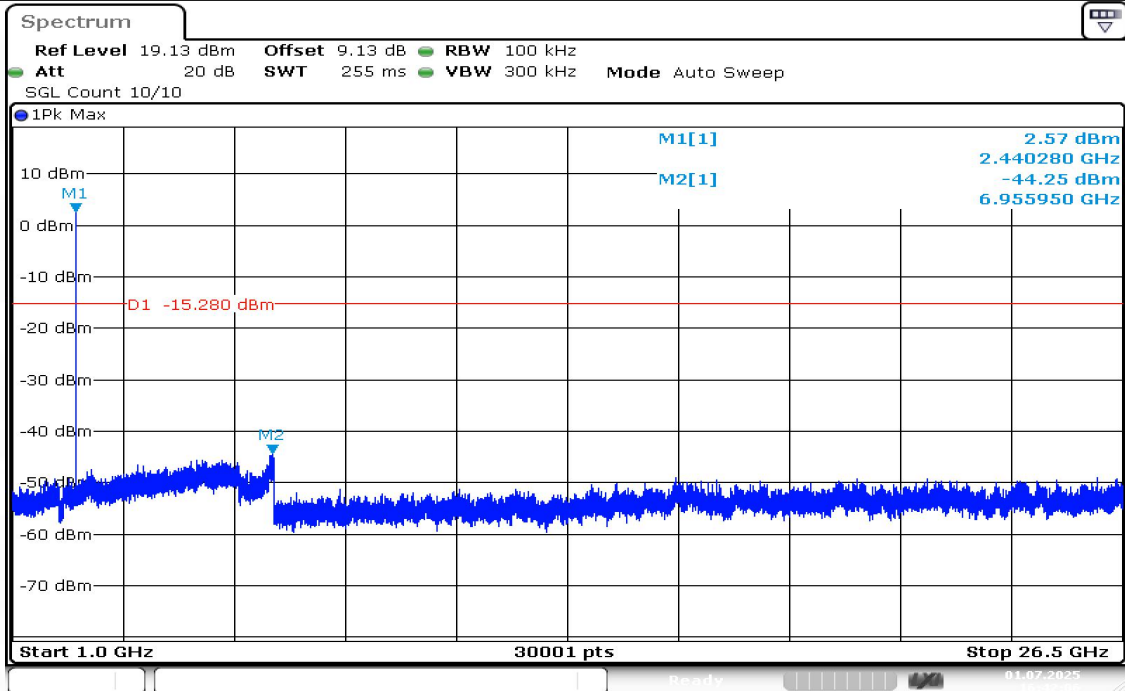


Date: 1.JUL.2025 16:42:06

BLE_1M-Ant1-2440-1000~26500-PASS

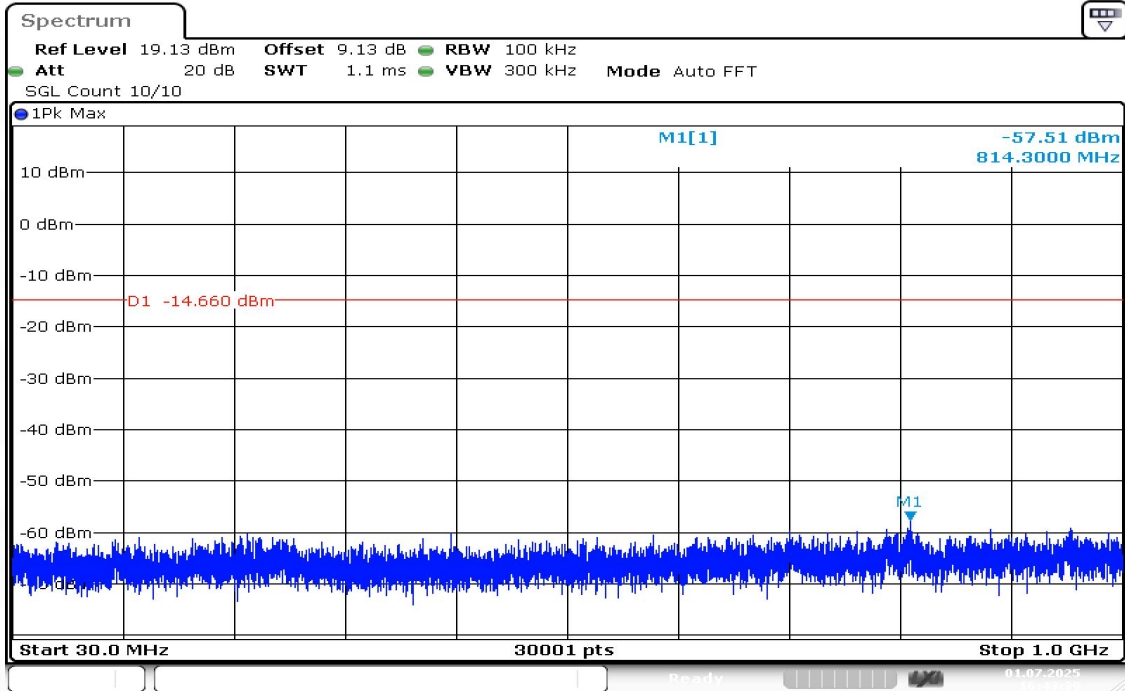


Date: 1.JUL.2025 16:43:39

BLE_1M-Ant1-2480-30~1000-PASS

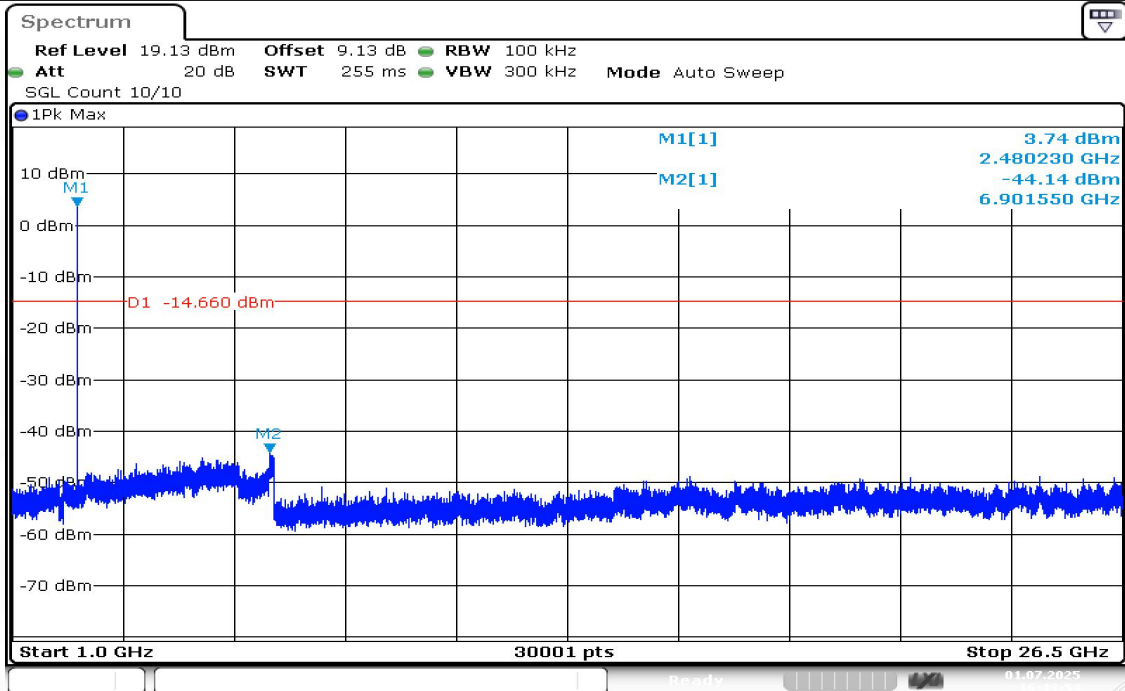


Date: 1.JUL.2025 16:43:54

BLE_1M-Ant1-2480-1000~26500-PASS

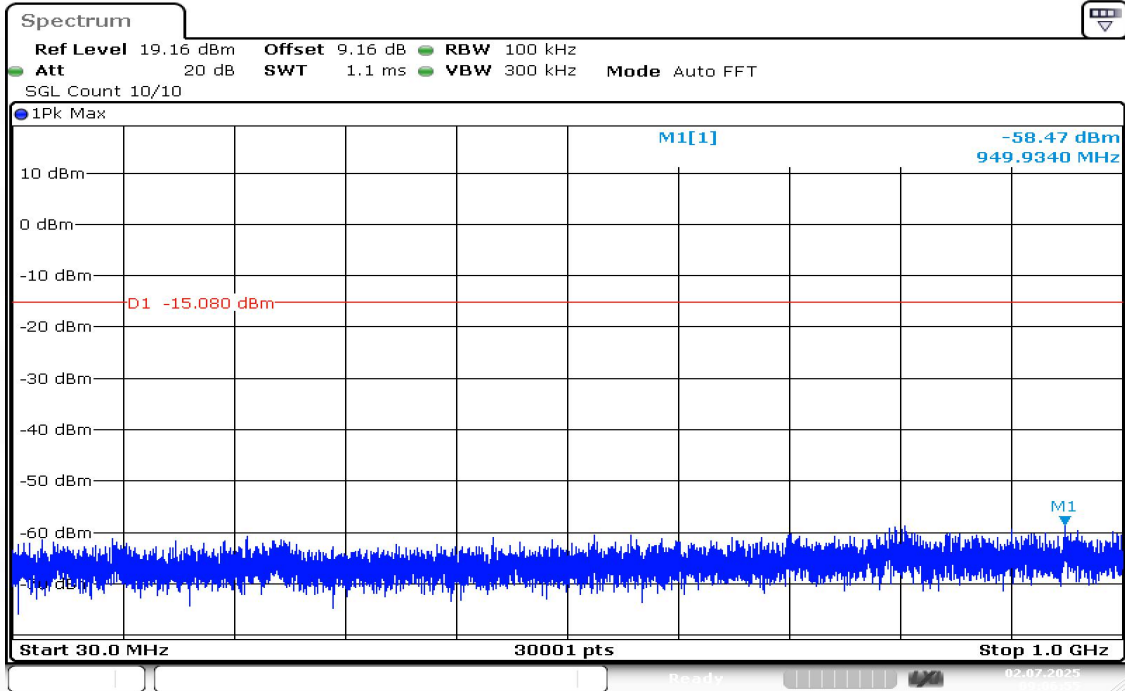


Date: 2.JUL.2025 09:06:55

BLE_2M-Ant1-2402-30~1000-PASS

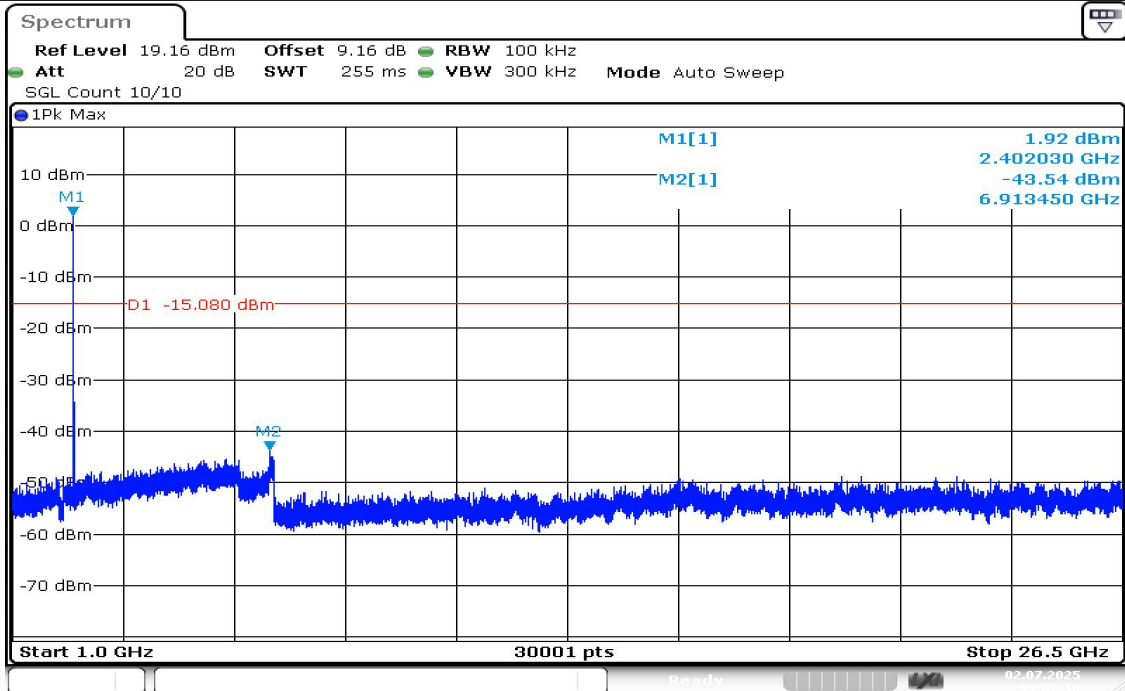


Date: 2.JUL.2025 09:07:09

BLE_2M-Ant1-2402-1000~26500-PASS

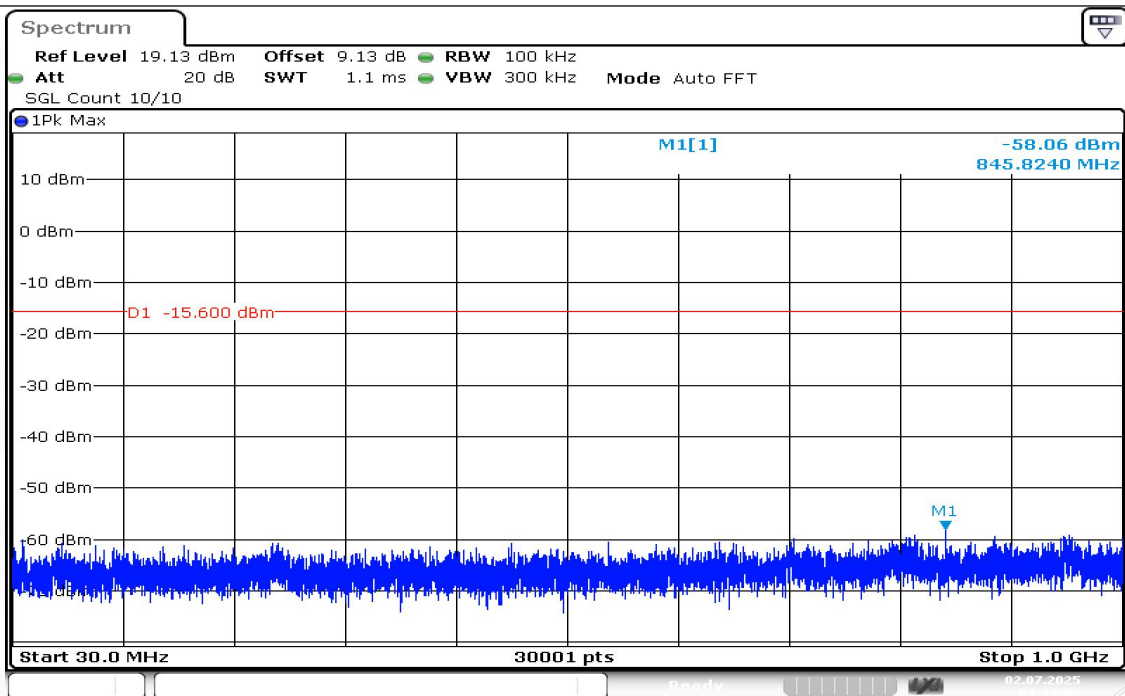


Date: 2.JUL.2025 09:08:08

BLE_2M-Ant1-2440-30~1000-PASS

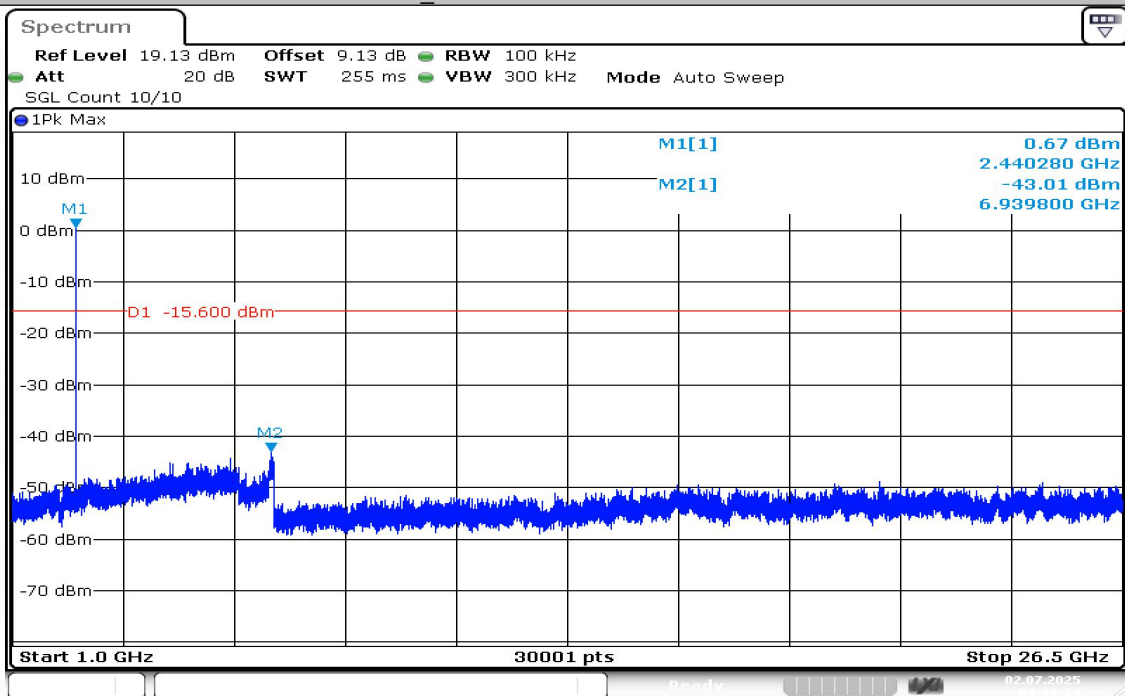


Date: 2.JUL.2025 09:08:23

BLE_2M-Ant1-2440-1000~26500-PASS

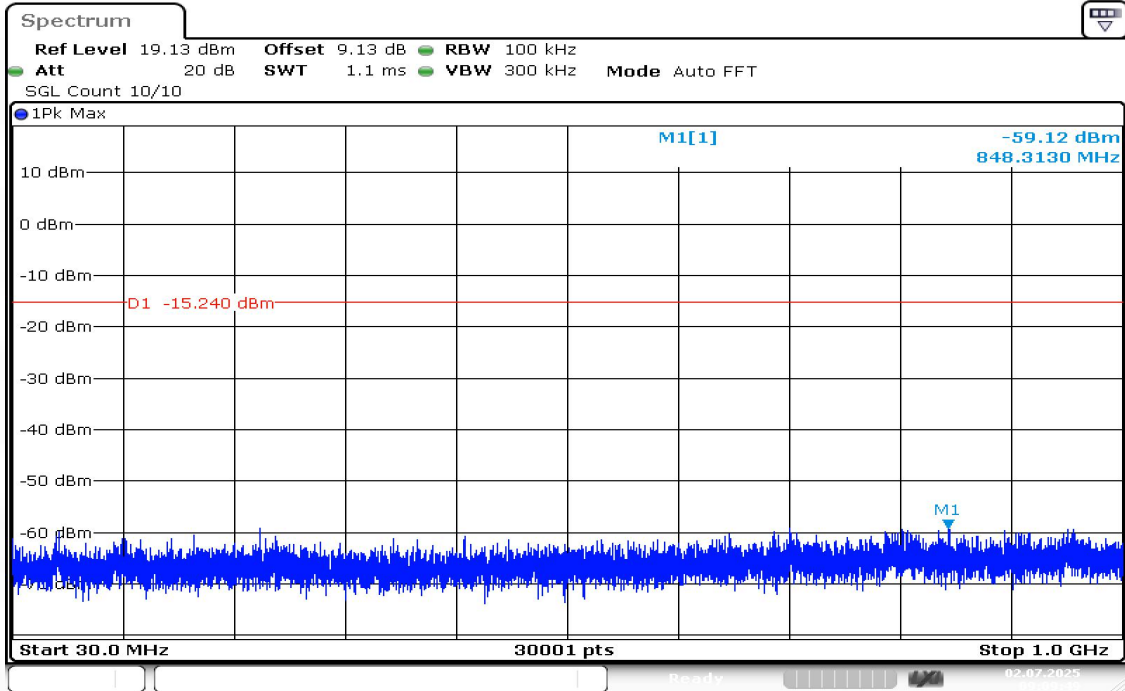

BLE_2M-Ant1-2480-30~1000-PASS

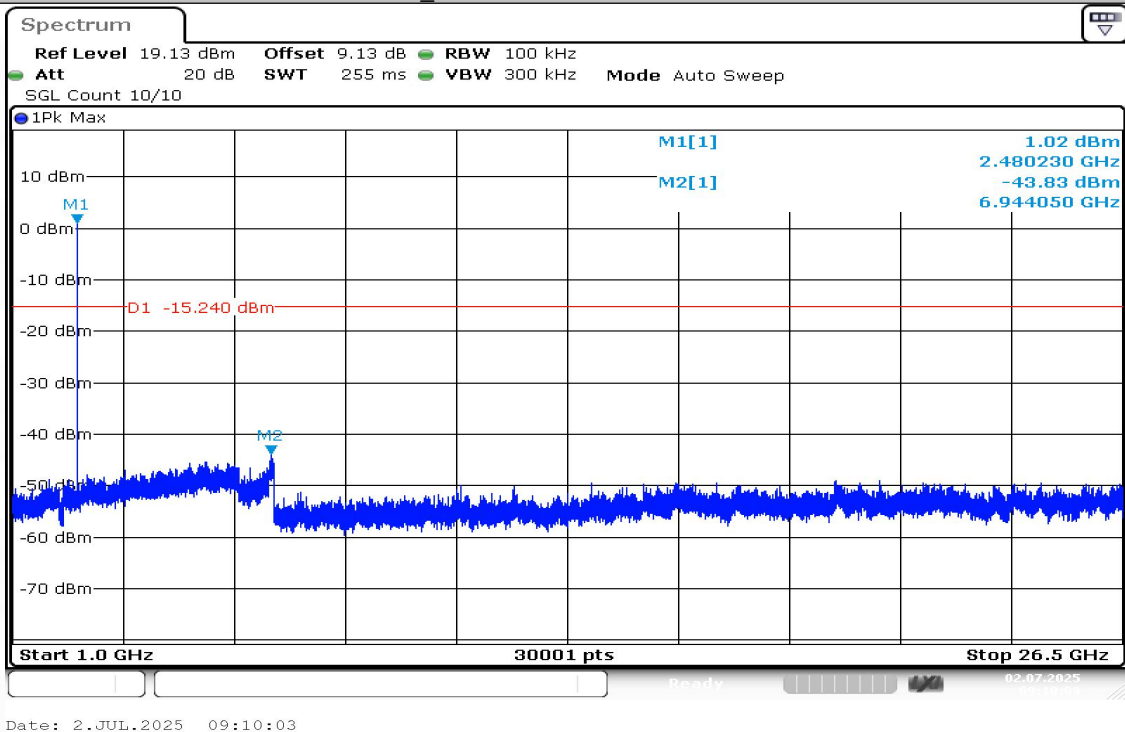


BLE_2M-Ant1-2480-1000~26500-PASS

1.8 Appendix H: Duty Cycle


1.8.1 Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.42	0.63	66.67	1.76
BLE_1M	Ant1	2440	0.42	0.63	66.67	1.76
BLE_1M	Ant1	2480	0.41	0.62	66.13	1.80
BLE_2M	Ant1	2402	0.23	0.62	37.10	4.31
BLE_2M	Ant1	2440	0.23	0.62	37.10	4.31
BLE_2M	Ant1	2480	0.24	0.63	38.10	4.19


1.8.2 Test Graphs

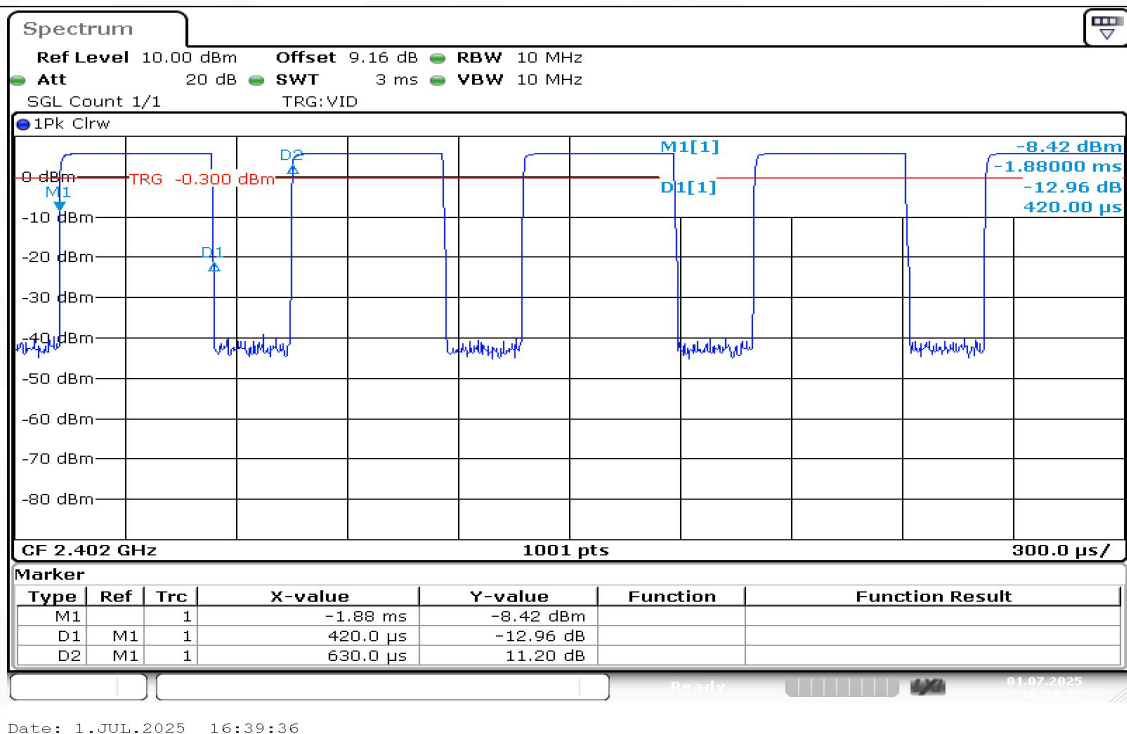

NTNV-BLE_1M-Ant1-2402

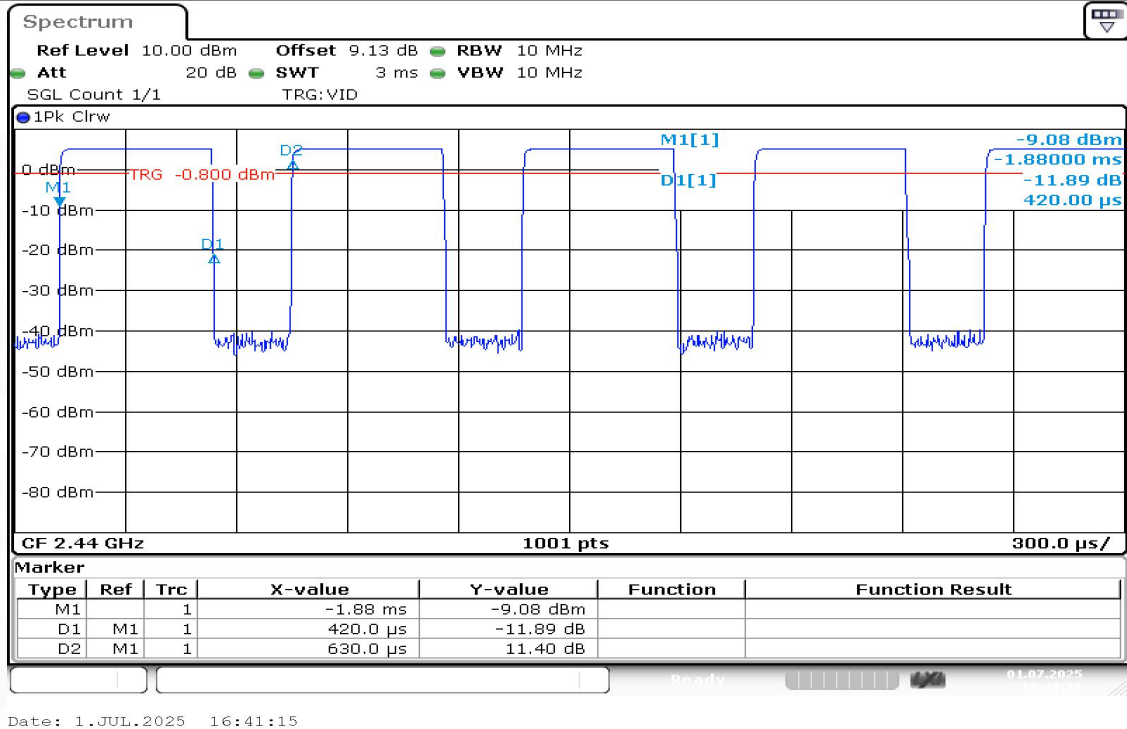


NTNV-BLE_1M-Ant1-2440

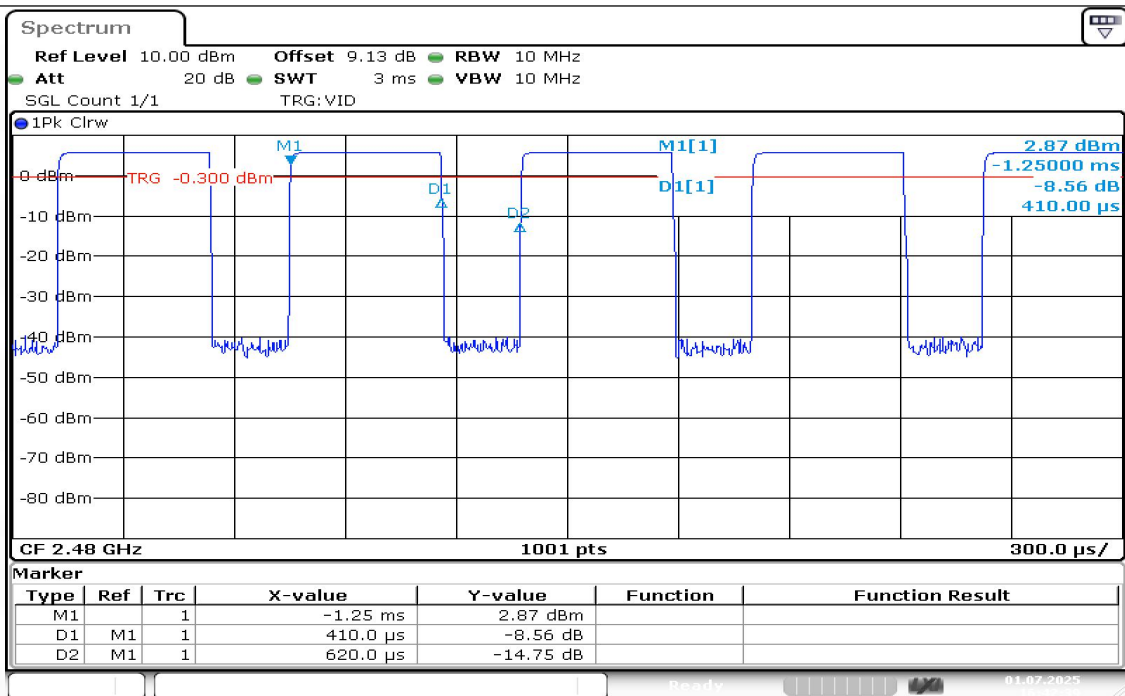


Date: 1.JUL.2025 16:42:39

NTNV-BLE_1M-Ant1-2480

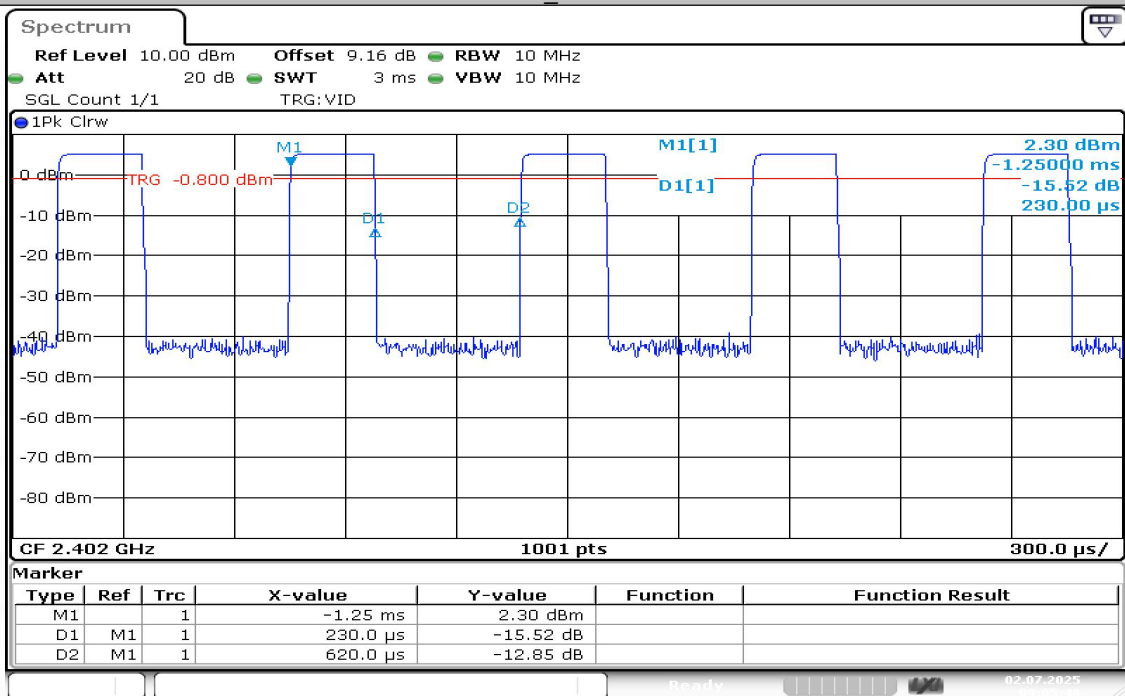


Date: 2.JUL.2025 09:05:49

NTNV-BLE_2M-Ant1-2402

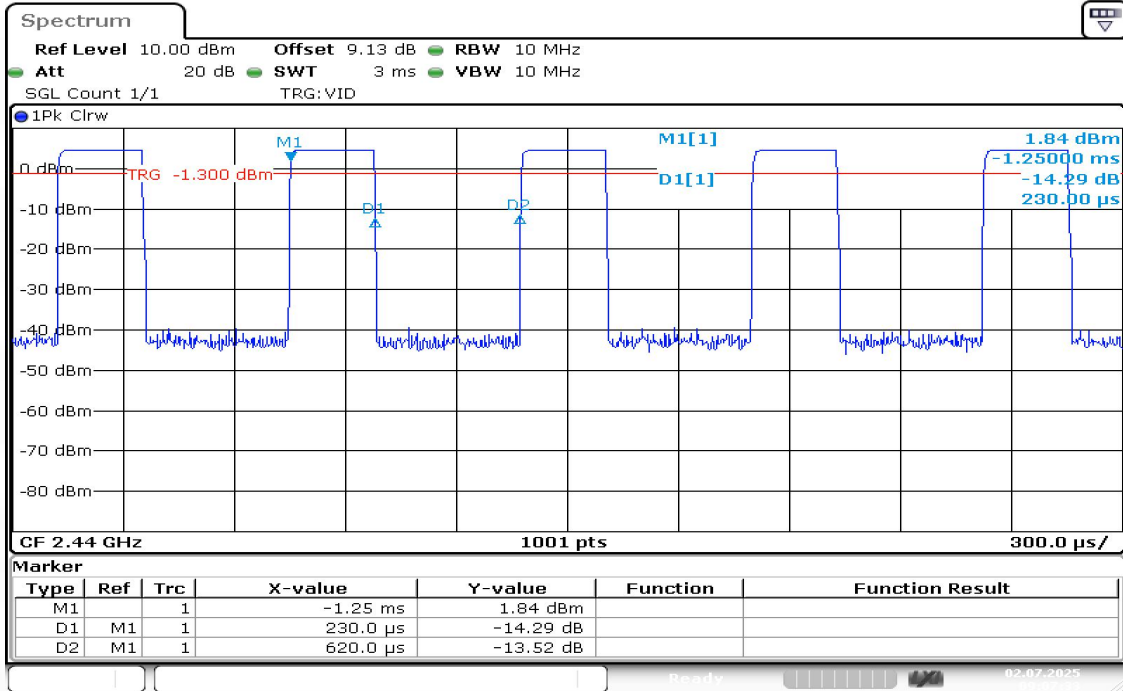

Date: 2.JUL.2025 09:07:33

NTNV-BLE_2M-Ant1-2440

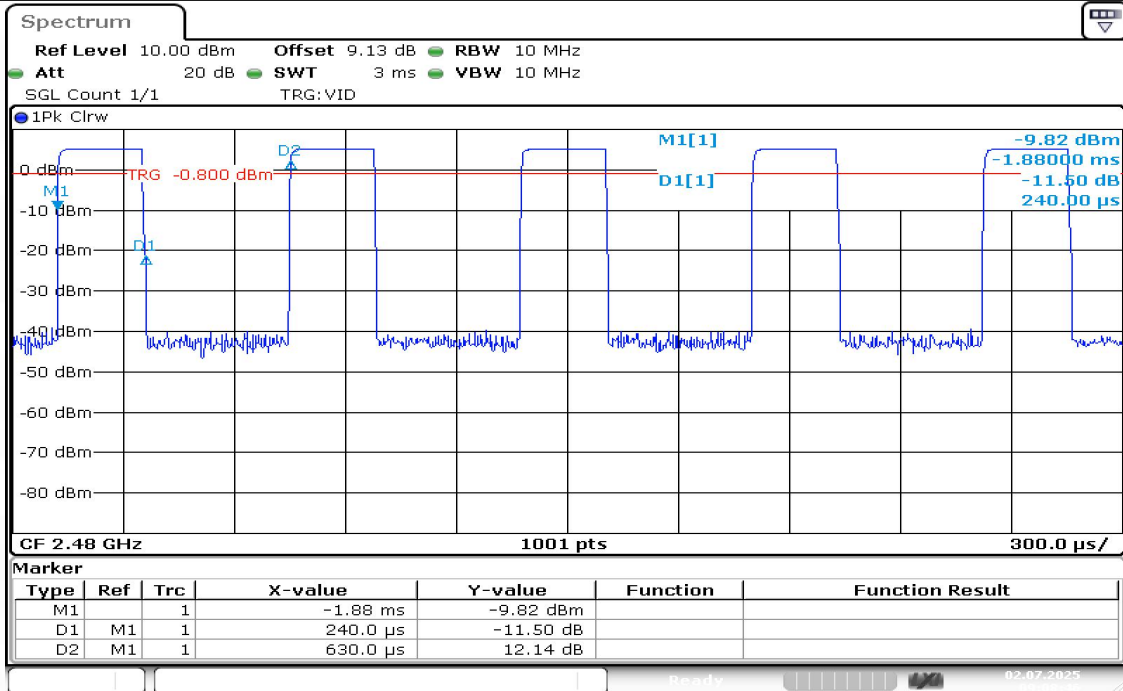

Date: 2.JUL.2025 09:08:45

NTNV-BLE_2M-Ant1-2480

1.9 Appendix I: Emissions in Restricted Bands


1.9.1 Test Result

TestMode	Antenna	ChName	Frequency[M Hz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]
BLE_1M	Ant1	Low	2402	Peak	2390.000	-48.6	≤-21.20	46.60	≤74
BLE_1M	Ant1	Low	2402	Peak	2310.000	-49.83	≤-21.20	45.37	≤74
BLE_1M	Ant1	Low	2402	Peak	2343.978	-45.26	≤-21.20	49.94	≤74
BLE_1M	Ant1	Low	2402	AV	2390.000	-57.61	≤-41.20	37.59	≤54
BLE_1M	Ant1	Low	2402	AV	2310.000	-57.94	≤-41.20	37.26	≤54
BLE_1M	Ant1	Low	2402	AV	2340.478	-55.62	≤-41.20	39.58	≤54
BLE_1M	Ant1	High	2480	Peak	2483.500	-48.75	≤-21.20	46.45	≤74
BLE_1M	Ant1	High	2480	Peak	2500.000	-50.51	≤-21.20	44.69	≤74
BLE_1M	Ant1	High	2480	Peak	2487.507	-46.62	≤-21.20	48.58	≤74
BLE_1M	Ant1	High	2480	AV	2483.500	-54.38	≤-41.20	40.82	≤54
BLE_1M	Ant1	High	2480	AV	2500.000	-57.41	≤-41.20	37.79	≤54
BLE_1M	Ant1	High	2480	AV	2483.681	-54.2	≤-41.20	41.00	≤54
BLE_2M	Ant1	Low	2402	Peak	2390.000	-49.66	≤-21.20	45.54	≤74
BLE_2M	Ant1	Low	2402	Peak	2310.000	-50.72	≤-21.20	44.48	≤74
BLE_2M	Ant1	Low	2402	Peak	2344.130	-46.12	≤-21.20	49.08	≤74
BLE_2M	Ant1	Low	2402	AV	2390.000	-58.1	≤-41.20	37.10	≤54
BLE_2M	Ant1	Low	2402	AV	2310.000	-57.76	≤-41.20	37.44	≤54
BLE_2M	Ant1	Low	2402	AV	2340.630	-55.28	≤-41.20	39.92	≤54
BLE_2M	Ant1	High	2480	Peak	2483.500	-40.72	≤-21.20	54.48	≤74
BLE_2M	Ant1	High	2480	Peak	2500.000	-47.82	≤-21.20	47.38	≤74
BLE_2M	Ant1	High	2480	Peak	2483.913	-38.43	≤-21.20	56.77	≤74
BLE_2M	Ant1	High	2480	AV	2483.500	-50.22	≤-41.20	44.98	≤54
BLE_2M	Ant1	High	2480	AV	2500.000	-57.27	≤-41.20	37.93	≤54
BLE_2M	Ant1	High	2480	AV	2483.565	-51.51	≤-41.20	43.69	≤54


Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.


1.9.2 Test Graphs

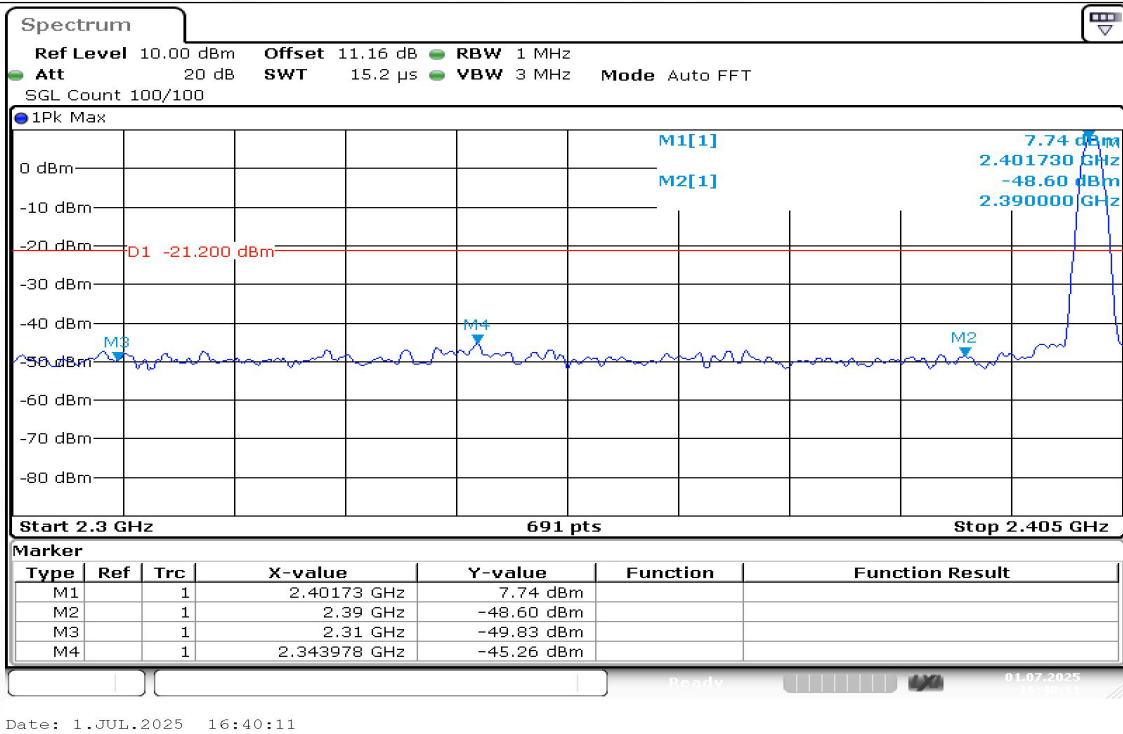

BLE_1M-Ant1-2402-PASS

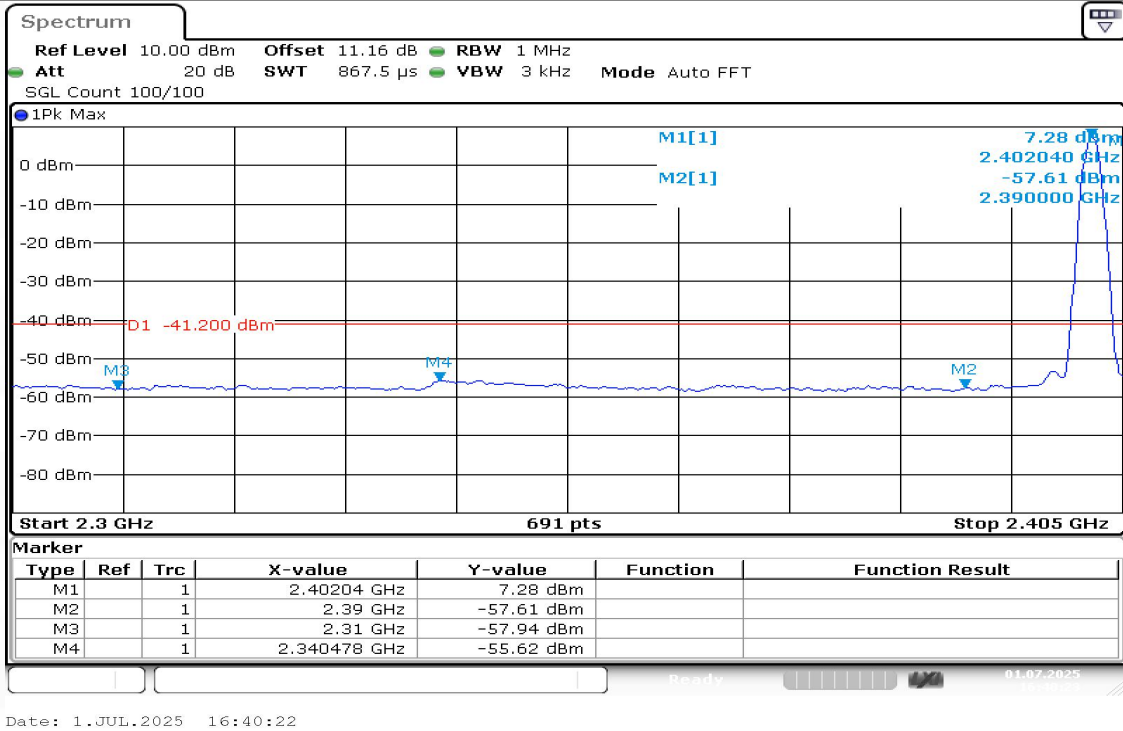


BLE_1M-Ant1-2402-PASS

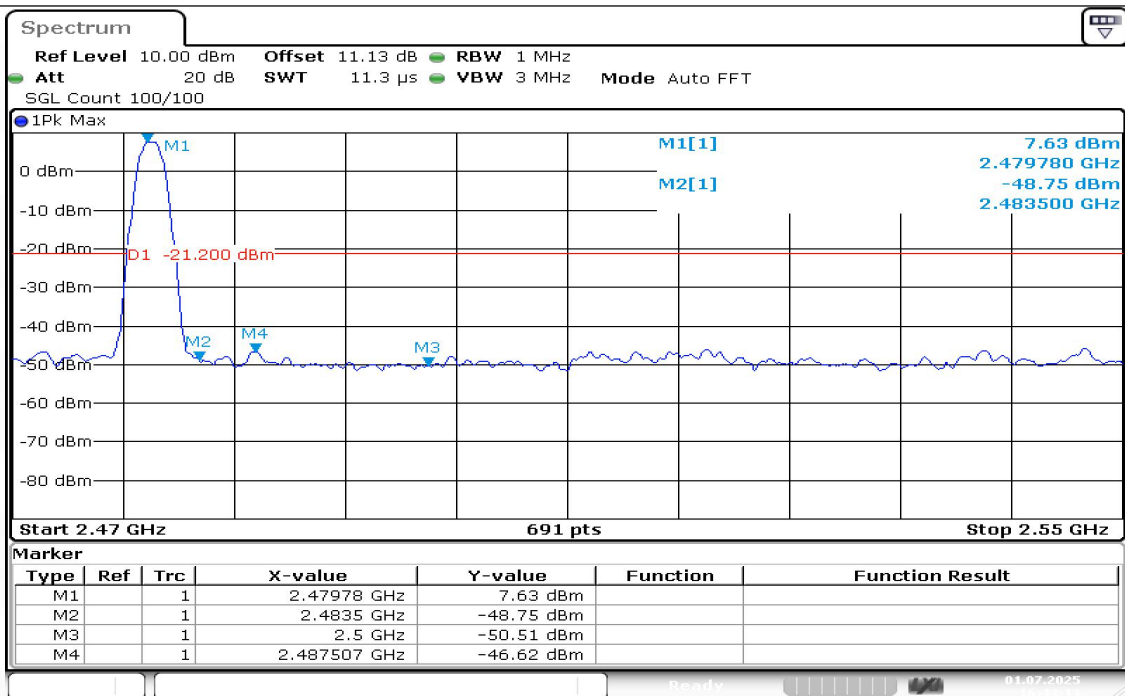


Date: 1.JUL.2025 16:43:13

BLE_1M-Ant1-2480-PASS

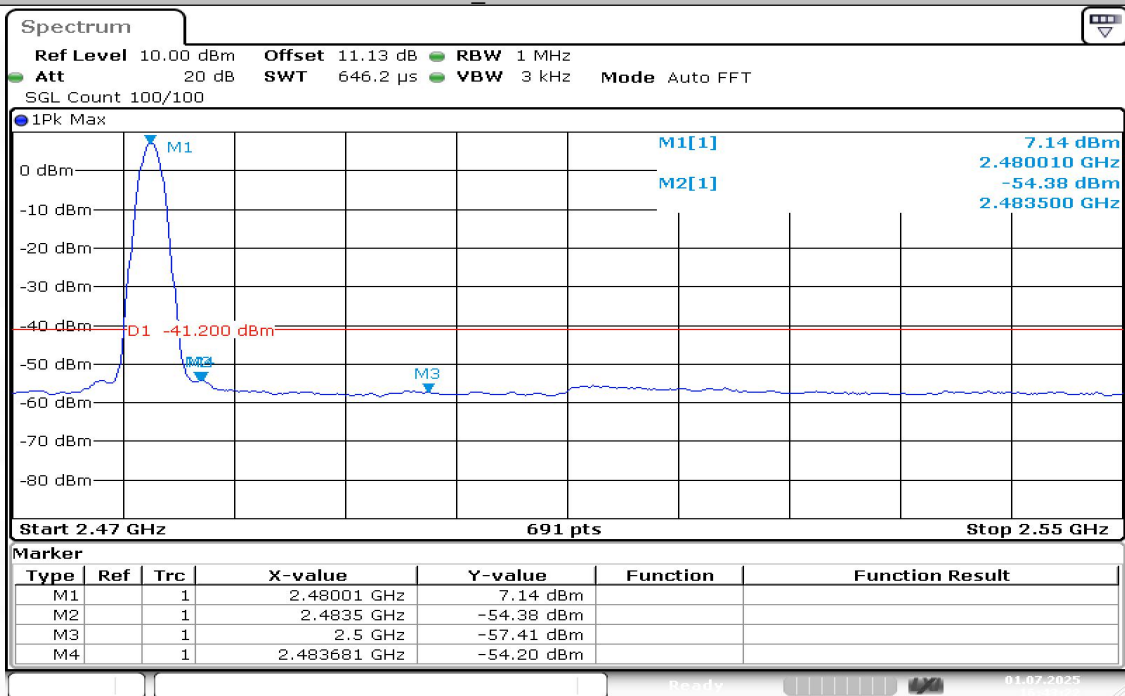


Date: 1.JUL.2025 16:43:22

BLE_1M-Ant1-2480-PASS

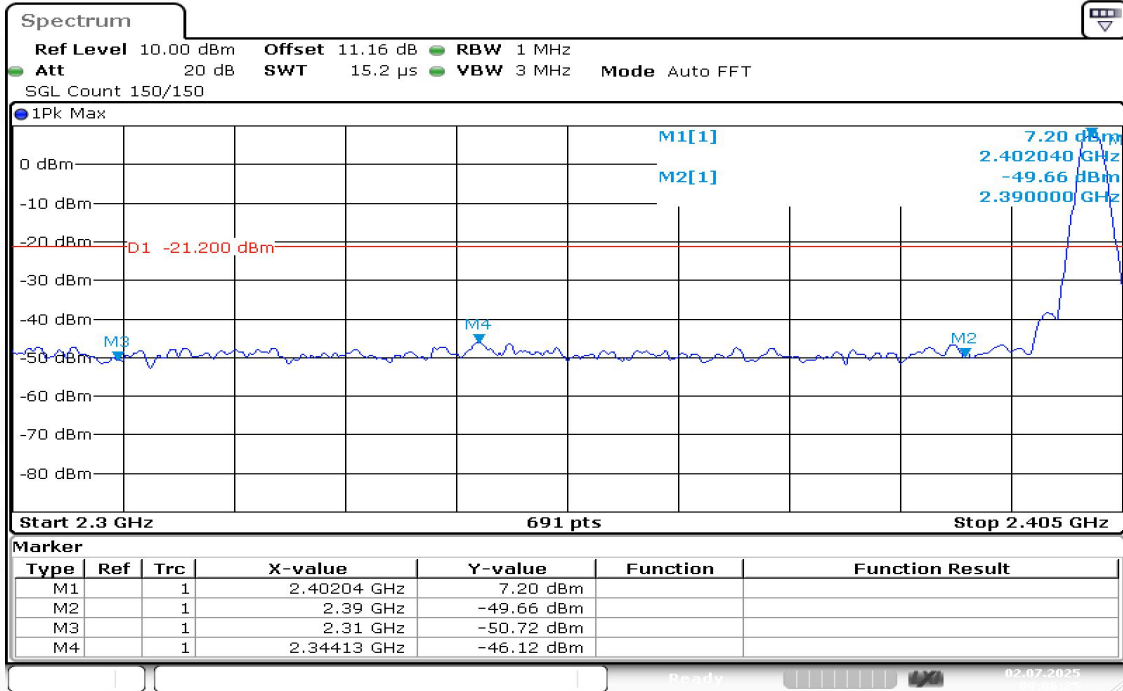


Date: 2.JUL.2025 09:06:25

BLE_2M-Ant1-2402-PASS

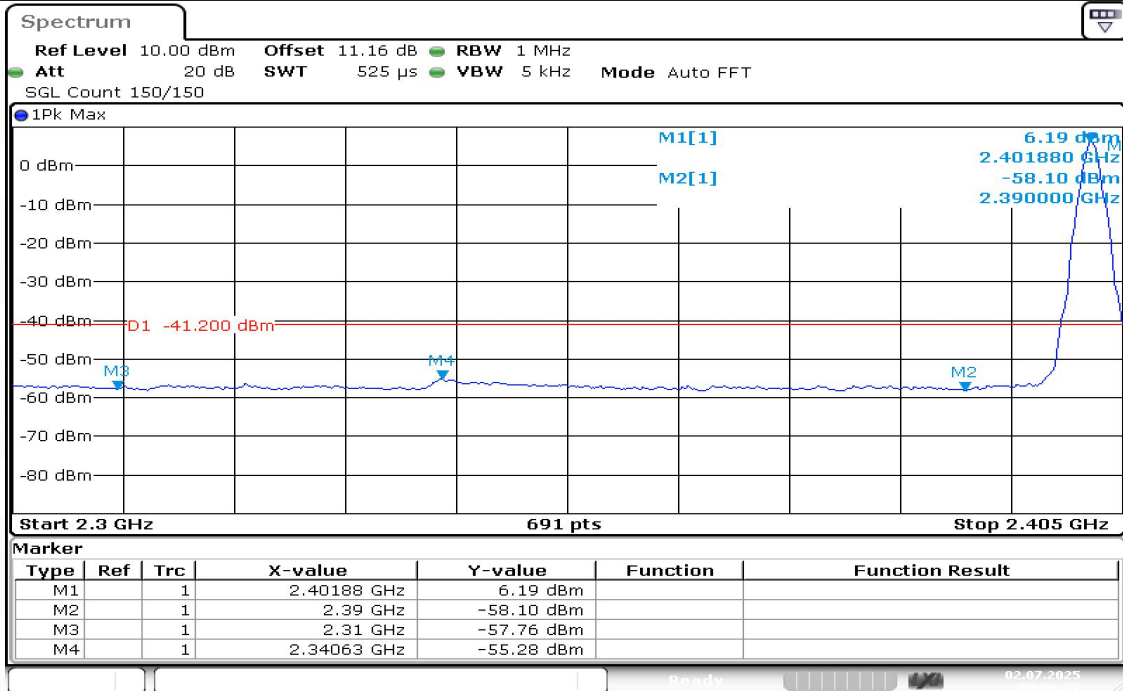


Date: 2.JUL.2025 09:06:37

BLE_2M-Ant1-2402-PASS

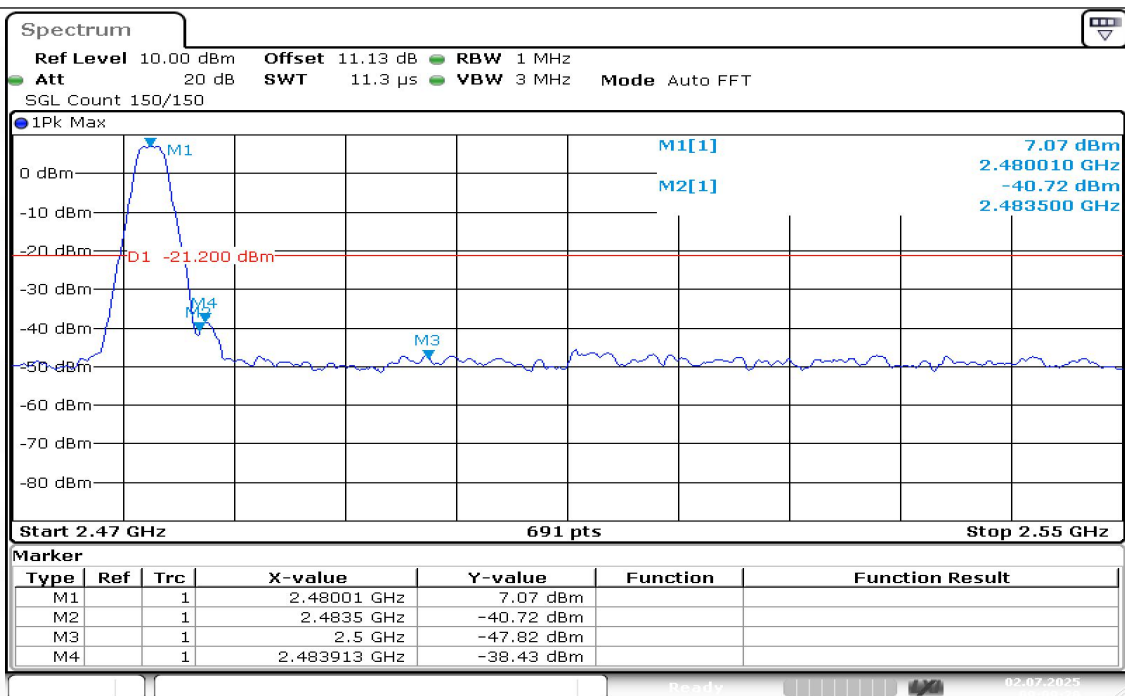

Date: 2.JUL.2025 09:09:20

BLE_2M-Ant1-2480-PASS

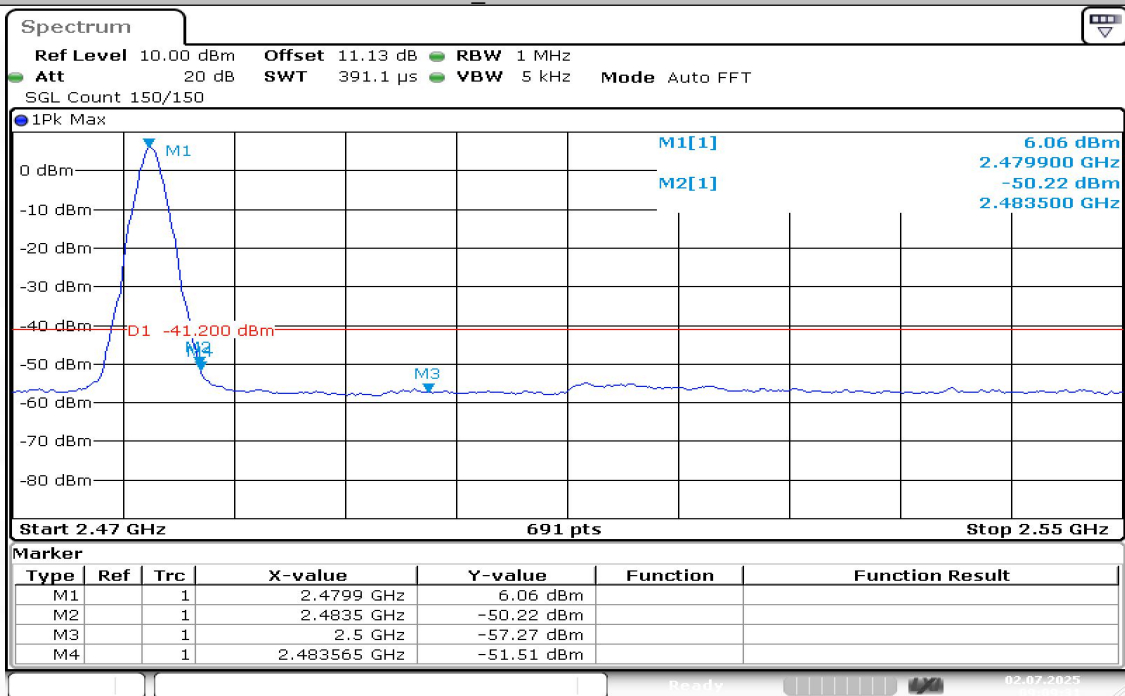

Date: 2.JUL.2025 09:09:31

BLE_2M-Ant1-2480-PASS