



FCC Test Report

Report No: FCS202008049W02

Issued for

Applicant:	Shenzhen Xiaopan Technology Co., Ltd
Address:	Room 532, 5 / F, Block C, Zhongxing Industrial Town, Chuangye Road, Nanshan Street, Nanshan District, Shenzhen City.
Product Name:	Remote control model
Brand Name:	NA
Model Name:	C119
Series Model:	C127, C128, C129, C135, C138, C139, C148, C159, C168, C184, C186, C187, C189, C190, A01, A26, A31, A32, A36, A52, A55, A58, A60, A61, A63, A66, A75, A85, A91, TWST1001B, TWST1001R
FCC ID:	2AXOW-C119
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name.....: Shenzhen Xiaopan Technology Co., Ltd

Address: Room 532, 5 / F, Block C, Zhongxing Industrial Town, Chuangye Road, Nanshan Street, Nanshan District, Shenzhen City.

Manufacture's Name.....: Shenzhen Xiaopan Technology Co., Ltd

Address: Room 532, 5 / F, Block C, Zhongxing Industrial Town, Chuangye Road, Nanshan Street, Nanshan District, Shenzhen City.

Product Description

Product Name.....: Remote control model

Brand Name: N/A

Model Name: C119

Series Model.....: C127, C128, C129, C135, C138, C139, C148, C159, C168, C184, C186, C187, C189, C190, A01, A26, A31, A32, A36, A52, A55, A58, A60, A61, A63, A66, A75, A85, A91, TWST1001B, TWST1001R

Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249

Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: 28 August, 2020 ~ 17 September, 2020

Date of Issue: 18 September, 2020

Test Result: Pass

Tested by : Scott Shen
(Scott Shen)

Reviewed by : Duke Qian
(Duke Qian)

Approved by : Kait Chen
(Kait Chen)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
3. RADIATED EMISSION MEASUREMENT	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	14
3.4 TEST RESULTS	15
4. BAND EDGE TEST	22
4.1 LIMIT	22
4.2 TEST PROCEDURE	22
4.3 TEST SETUP	23
4.4 TEST RESULTS	24
5. 20 DB BANDWIDTH TEST	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 TEST SETUP	25
5.4 TEST RESULTS	26
6. ANTENNA REQUIREMENT	29
6.1 STANDARD REQUIREMENT	29
6.2 EUT ANTENNA	29

Revision History

Rev.	Issue Date	Effect Page	Contents
00	18 September, 2020	All	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 30MHz-1000MHz	± 3.2 dB
6	All emissions, radiated (1GHz -18GHz)	± 3.66 dB
7	All emissions, radiated (18GHz -40GHz)	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Remote control model
Trade Name	N/A
Model Name	C119
Series Model	C127, C128, C129, C135, C138, C139, C148, C159, C168, C184, C186, C187, C189, C190, A01, A26, A31, A32, A36, A52, A55, A58, A60, A61, A63, A66, A75, A85, A91, TWST1001B, TWST1001R
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, only different color
Channel List	Please refer to the Note 2.
BT	Frequency:2405.5-2475MHz Modulation: GFSK Channel number: 16CH
Power Supply	DC 6V (4*1.5VAA)
Hardware version number	V1.1
Software version number	V1.1
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405.5	5	2425.5	9	2442.5	13	2460.5
2	2410.5	6	2430.0	10	2447.5	14	2465.0
3	2415.5	7	2434.0	11	2452.5	15	2470.0
4	2420.5	8	2437.5	12	2456.5	16	2475.0

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	XXFT	Integral Antenna	N/A	1.00dBi	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: FCC tool


The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

1. For radiated emission, 3 axis were chosen for testing for each applicable mode.
2. The EUT used fully charge battery when tested.

Configuration and peripherals

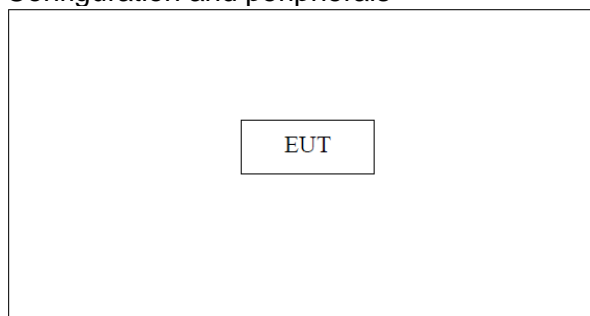

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1					
2					

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2019.10.11	2020.10.10
Signal Analyzer	R&S	FSV40-N	FCS-E012	2019.10.11	2020.10.10
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2019.10.11	2020.10.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2019.10.26	2020.10.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2019.10.11	2020.10.10
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2019.10.11	2020.10.10
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2019.10.11	2020.10.10
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2019.10.03	2020.10.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2019.10.08	2020.10.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2019.10.11	2020.10.10

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2019.10.11	2020.10.10
LISN	R&S	ENV216	FCS-E007	2019.10.11	2020.10.10
LISN	ETS	3810/2NM	FCS-E009	2019.10.15	2020.10.14
Temperature & Humidity	HTC-1	victor	FCS-E008	2019.10.11	2020.10.10

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2019.10.02	2020.10.01
Spectrum Analyzer	Agilent	E4447A	MY50180039	2019.11.08	2020.11.07
Spectrum Analyzer	R&S	FSV-40	101499	2019.10.10	2020.10.09

3. RADIATED EMISSION MEASUREMENT

3.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz PK detector is used


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz,and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

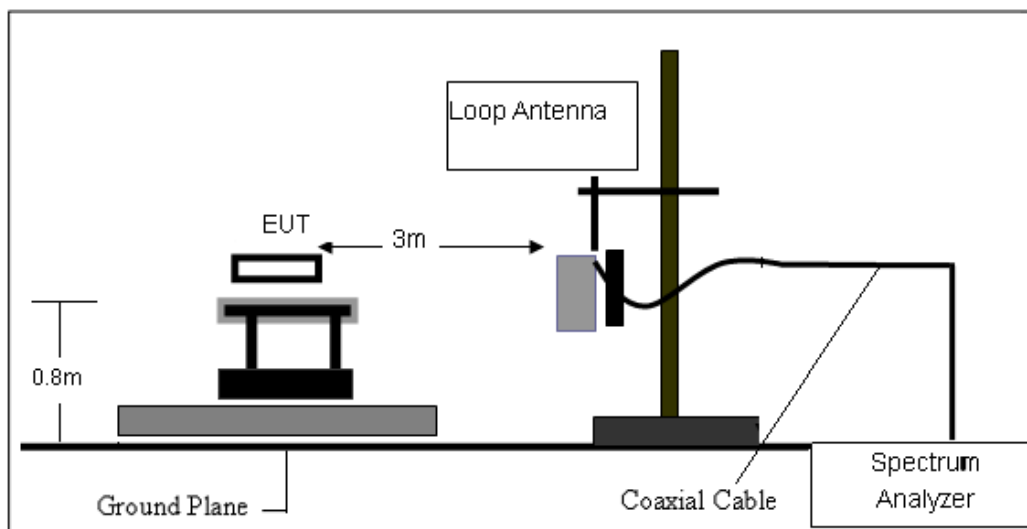

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

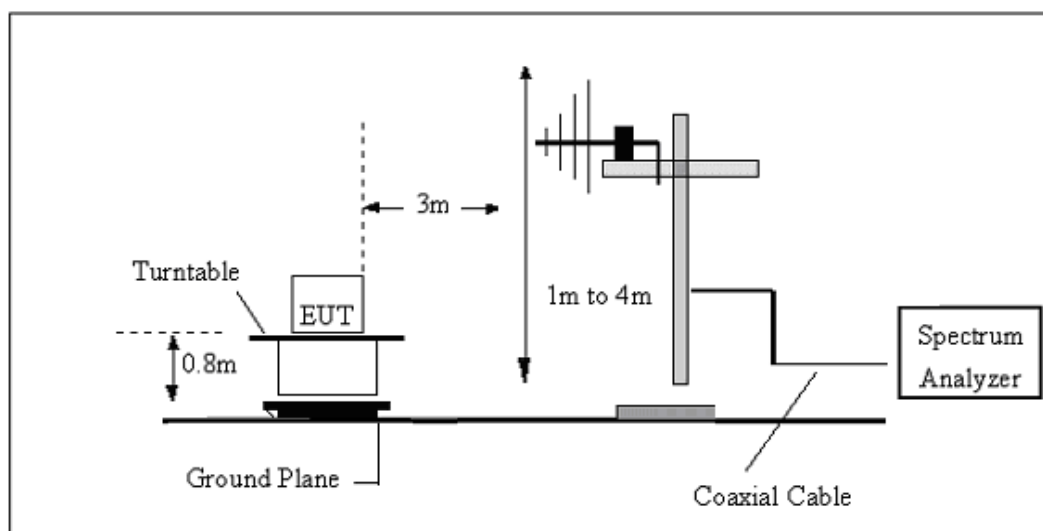

(C) Radiated Emission Test-Up Frequency Above 1GHz

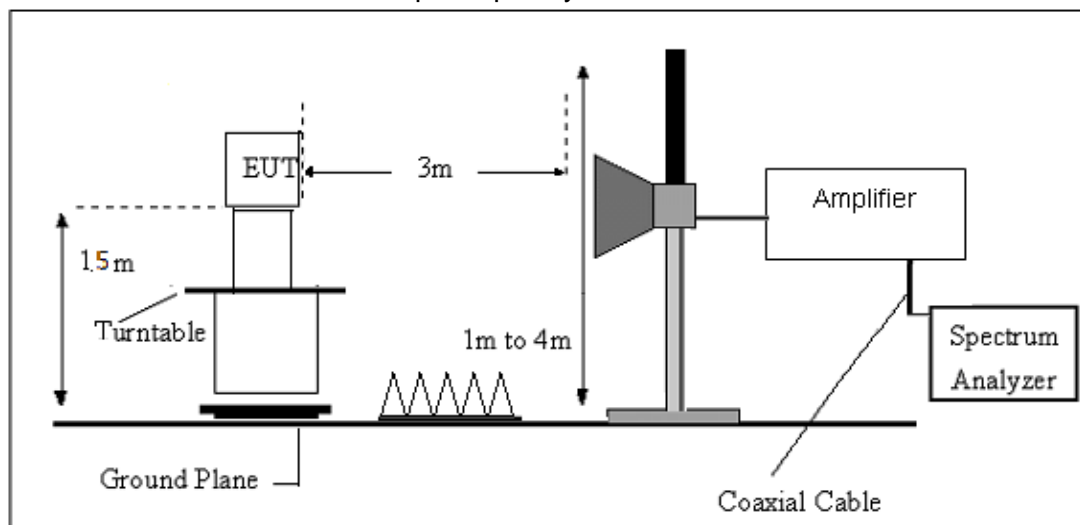

3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	GFSK	Test Voltage:	DC 6V

For field strength of the fundamental signal

H

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2405.013	108.68	-6.62	102.06	114	-11.94	peak
2405.013	96.24	-6.62	89.62	94	-4.38	AVG
2440.024	107.94	-6.45	101.49	114	-12.51	peak
2440.024	95.23	-6.45	88.78	94	-5.22	AVG
2475.023	108.12	-6.28	101.84	114	-12.16	peak
2475.023	95.23	-6.28	88.95	94	-5.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

V

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2405.013	106.27	-6.62	99.65	114	-14.35	peak
2405.013	94.16	-6.62	87.54	94	-6.46	AVG
2440.024	106.21	-6.45	99.76	114	-14.24	peak
2440.024	94.27	-6.45	87.82	94	-6.18	AVG
2475.023	107.08	-6.28	100.8	114	-13.2	peak
2475.023	94.68	-6.28	88.4	94	-5.6	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RBW>20DB BW,VBW>RBW ,PK DETECTOR FOR PK VALUE ,RMS DETECTOR FOR AV VALUE.

For spurious emission

(9KHz-30MHz)

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 6V	Phase:	Horizontal
Test Mode:	GFSK		

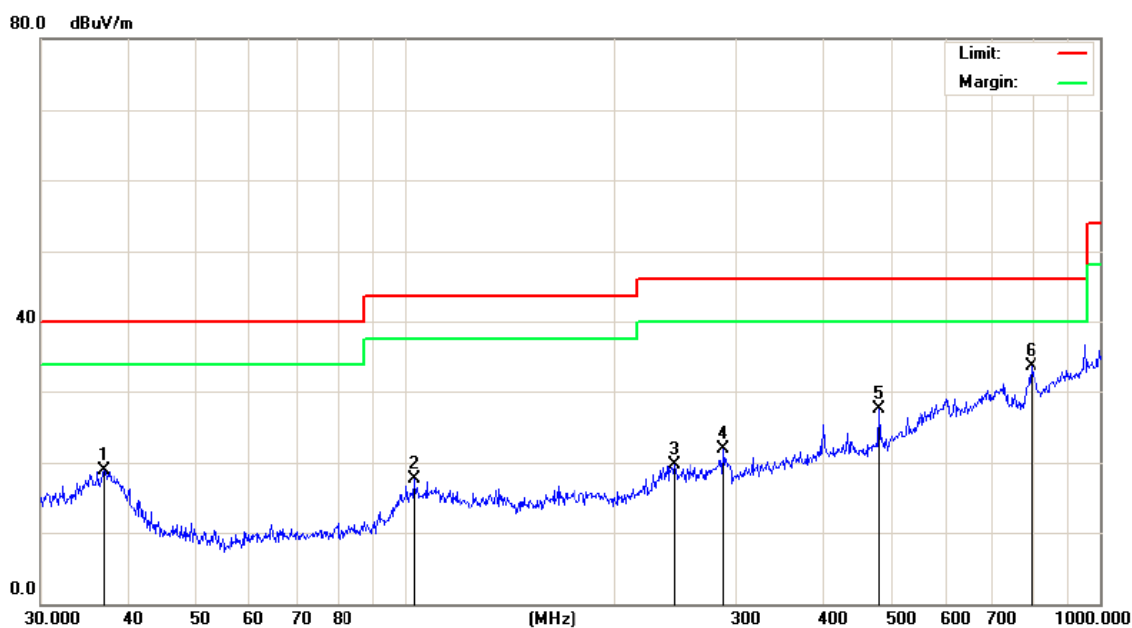

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.8953	35.68	-16.72	18.96	40.00	-21.04	QP
2		103.0800	31.44	-13.72	17.72	43.50	-25.78	QP
3		244.2321	31.16	-11.54	19.62	46.00	-26.38	QP
4		287.9904	31.76	-9.85	21.91	46.00	-24.09	QP
5		480.5276	33.40	-5.90	27.50	46.00	-18.50	QP
6	*	796.1830	30.64	3.01	33.65	46.00	-12.35	QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 6V	Phase:	Vertical
Test Mode:	GFSK		

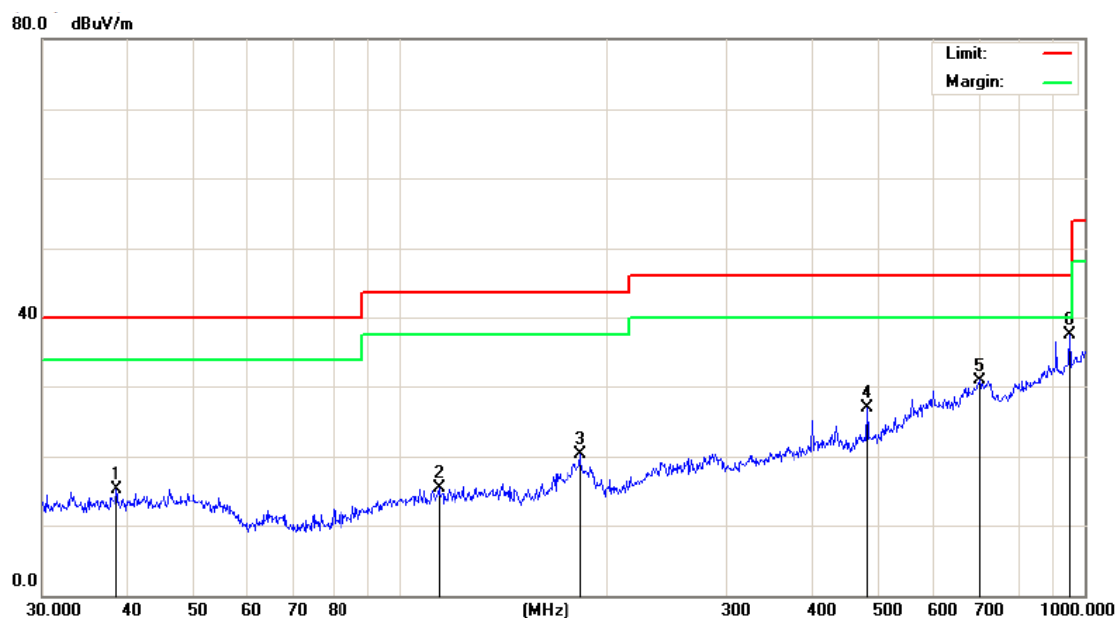

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		38.4809	29.77	-14.48	15.29	40.00	-24.71	QP
2		113.7143	30.66	-15.21	15.45	43.50	-28.05	QP
3		183.2005	30.71	-10.48	20.23	43.50	-23.27	QP
4		480.5276	32.74	-5.90	26.84	46.00	-19.16	QP
5		701.7610	30.61	0.32	30.93	46.00	-15.07	QP
6	*	952.0937	33.74	3.77	37.51	46.00	-8.49	QP

(1GHZ~25GHZ)

LOW CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4811.00	54.40	31.78	8.60	32.09	62.69	74.00	-11.31	Vertical
7216.50	29.75	36.15	11.66	31.99	45.57	74.00	-28.43	Vertical
9622.00	30.83	38.01	14.14	31.60	51.38	74.00	-22.62	Vertical
12027.50	*					74.00		Vertical
14433.00	*					74.00		Vertical
4811.00	51.57	31.78	8.60	32.09	59.86	74.00	-14.14	Horizontal
7216.50	29.32	36.15	11.66	31.99	45.14	74.00	-28.86	Horizontal
9622.00	28.35	38.01	14.14	31.60	48.90	74.00	-25.10	Horizontal
12027.50	*					74.00		Horizontal
14433.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4811.00	43.38	31.78	8.60	32.09	51.67	54.00	-2.33	Vertical
7216.50	19.67	36.15	11.66	31.99	35.49	54.00	-18.51	Vertical
9622.00	20.10	38.01	14.14	31.60	40.65	54.00	-13.35	Vertical
12027.50	*					54.00		Vertical
14433.00	*					54.00		Vertical
4811.00	41.54	31.78	8.60	32.09	49.83	54.00	-4.17	Horizontal
7216.50	19.59	36.15	11.66	31.99	35.41	54.00	-18.59	Horizontal
9622.00	17.45	38.01	14.14	31.60	38.00	54.00	-16.00	Horizontal
12027.50	*					54.00		Horizontal
14433.00	*					54.00		Horizontal

MIDDLE CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	48.61	31.85	8.66	32.12	57.00	74.00	-17.00	Vertical
7320.00	29.96	36.37	11.72	31.89	46.16	74.00	-27.84	Vertical
9760.00	29.69	38.35	14.25	31.59	50.70	74.00	-23.30	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	49.43	31.85	8.66	32.12	57.82	74.00	-16.18	Horizontal
7320.00	29.66	36.56	11.79	31.80	46.21	74.00	-27.79	Horizontal
9760.00	27.31	38.81	14.35	31.85	48.62	74.00	-25.38	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	38.77	31.85	8.66	32.12	47.16	54.00	-6.84	Vertical
7320.00	19.35	36.37	11.72	31.89	35.55	54.00	-18.45	Vertical
9760.00	19.15	38.35	14.25	31.59	40.16	54.00	-13.84	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	40.98	31.85	8.66	32.12	49.37	54.00	-4.63	Horizontal
7320.00	20.33	36.37	11.72	31.89	36.53	54.00	-17.47	Horizontal
9760.00	18.40	38.35	14.25	31.59	39.41	54.00	-14.59	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

HIGHT CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	50.29	31.91	8.71	32.16	58.75	74.00	-15.25	Vertical
7425.00	29.26	36.56	11.79	31.80	45.81	74.00	-28.19	Vertical
9900.00	28.42	38.81	14.35	31.85	49.73	74.00	-24.27	Vertical
12375.00	*					74.00		Vertical
14850.00	*					74.00		Vertical
4950.00	49.27	31.91	8.71	32.16	57.73	74.00	-16.27	Horizontal
7425.00	28.76	36.56	11.79	31.80	45.31	74.00	-28.69	Horizontal
9900.00	28.14	38.81	14.35	31.85	49.45	74.00	-24.55	Horizontal
12375.00	*					74.00		Horizontal
14850.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	40.00	31.91	8.71	32.16	48.46	54.00	-5.54	Vertical
7425.00	20.23	36.56	11.79	31.80	36.78	54.00	-17.22	Vertical
9900.00	18.86	38.81	14.35	31.85	40.17	54.00	-13.83	Vertical
12375.00	*					54.00		Vertical
14850.00	*					54.00		Vertical
4950.00	38.94	31.91	8.71	32.16	47.40	54.00	-6.60	Horizontal
7425.00	20.11	36.56	11.79	31.80	36.66	54.00	-17.34	Horizontal
9900.00	17.79	38.81	14.35	31.85	39.10	54.00	-14.90	Horizontal
12375.00	*					54.00		Horizontal
14850.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. **, means this data is the too weak instrument of signal is unable to test.

4. BAND EDGE TEST

4.1 LIMIT


According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

4.2 TEST PROCEDURE

- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
Use the following spectrum analyzer settings:
 - c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

4.3 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

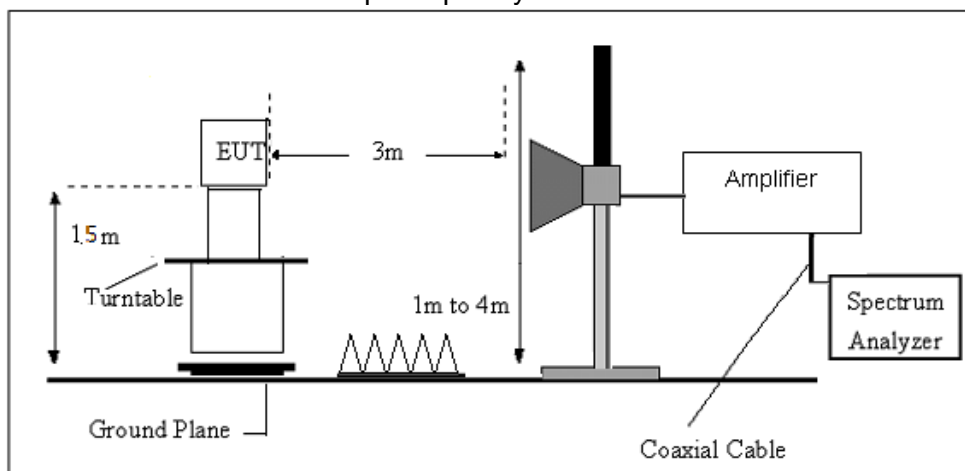

4.4 TEST RESULTS

Low CH

Peak Value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	60.08	27.59	5.38	30.18	62.87	74.00	-11.13	Horizontal
2400.00	69.81	27.58	5.39	30.18	72.60	74.00	-1.40	Horizontal
2390.00	61.23	27.59	5.38	30.18	64.02	74.00	-9.98	Vertical
2400.00	71.09	27.58	5.39	30.18	73.88	74.00	-0.12	Vertical

Average Value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.25	27.59	5.38	30.18	39.04	54.00	-14.96	Horizontal
2400.00	41.77	27.58	5.39	30.18	44.56	54.00	-9.44	Horizontal
2390.00	39.30	27.59	5.38	30.18	42.09	54.00	-11.91	Vertical
2400.00	45.22	27.58	5.39	30.18	48.01	54.00	-5.99	Vertical

High CH

Peak Value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.60	27.53	5.47	29.93	69.67	74.00	-4.33	Horizontal
2500.00	57.10	27.55	5.49	29.93	60.21	74.00	-13.79	Horizontal
2483.50	68.71	27.53	5.47	29.93	71.78	74.00	-2.22	Vertical
2500.00	60.99	27.55	5.49	29.93	64.10	74.00	-9.90	Vertical

Average Value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.67	27.53	5.47	29.93	46.74	54.00	-7.26	Horizontal
2500.00	39.53	27.55	5.49	29.93	42.64	54.00	-11.36	Horizontal
2483.50	45.03	27.53	5.47	29.93	48.10	54.00	-5.90	Vertical
2500.00	39.35	27.55	5.49	29.93	42.46	54.00	-11.54	Vertical

5. 20 DB BANDWIDTH TEST


5.1 LIMIT

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

5.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a
- known signal from an external generator
 - Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
 - Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


5.3 TEST SETUP

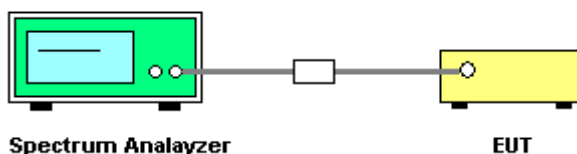


5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 6V


Frequency	20dB Bandwidth (MHz)	Result
2405.5 MHz	1.048	PASS
2440 MHz	1.050	PASS
2475 MHz	1.045	PASS

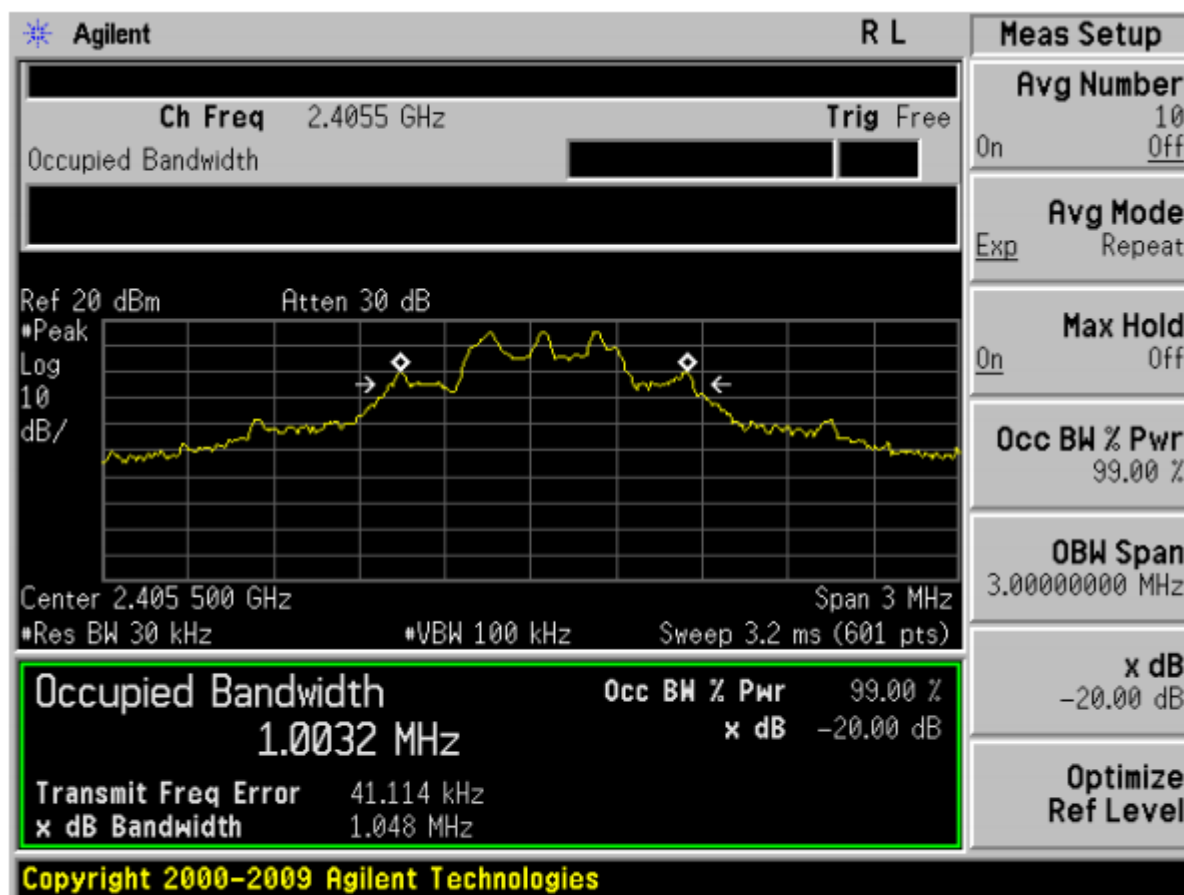

Lowest channel

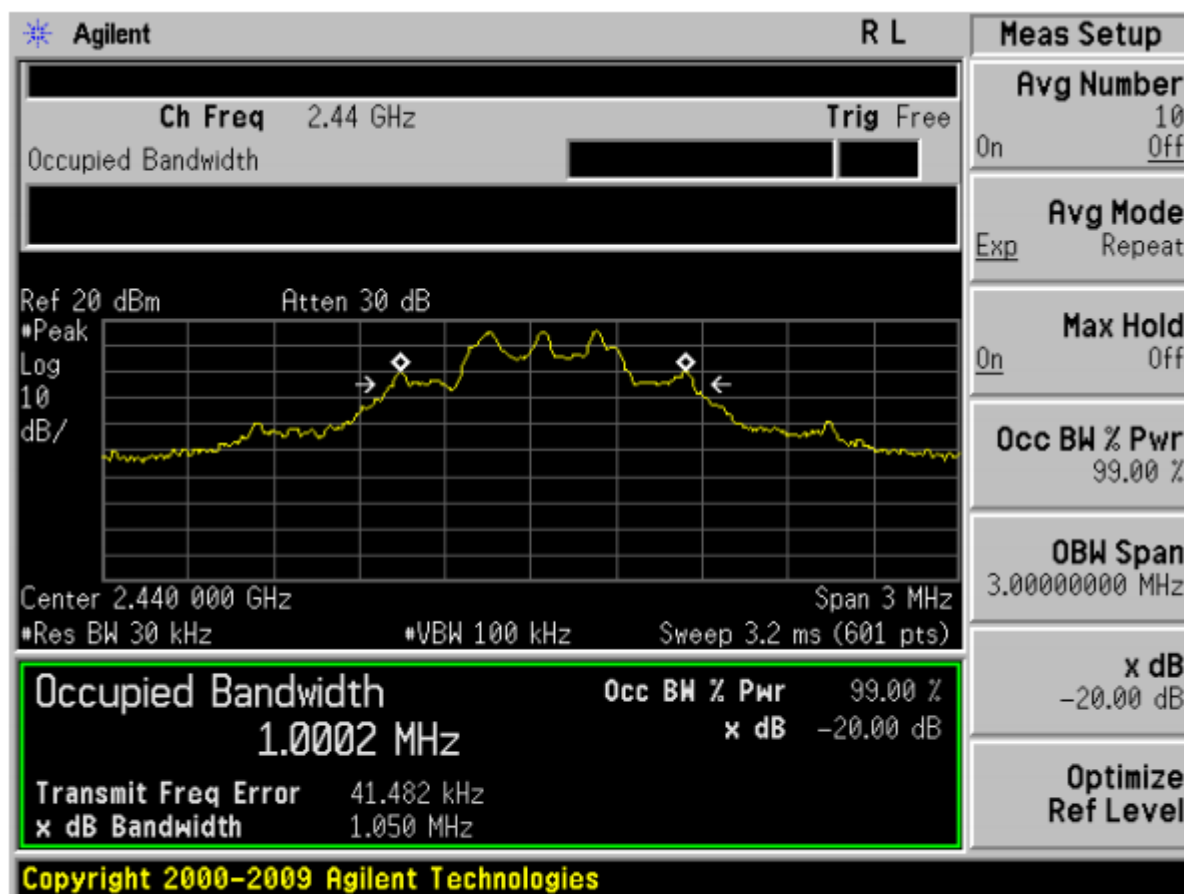

Middle channel

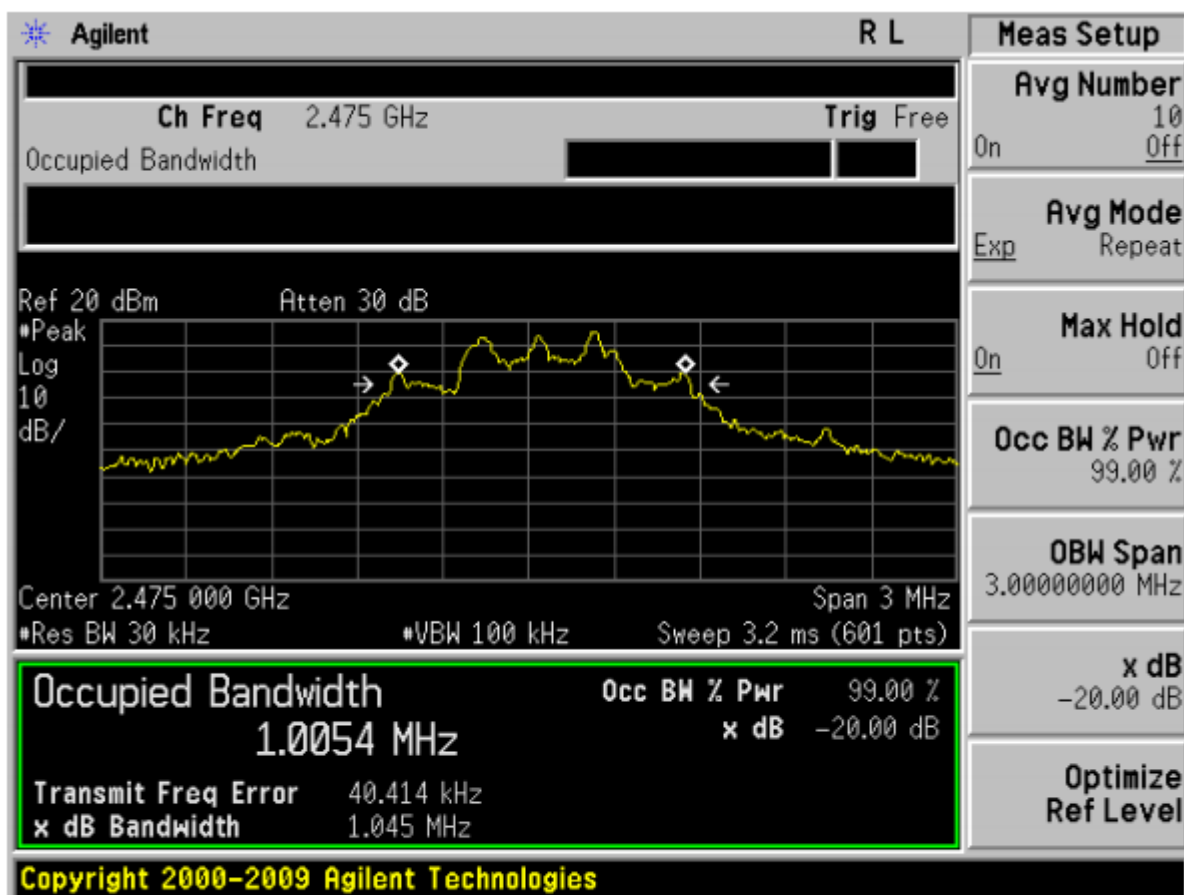

Highest channel

6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The antennas used for this product are integral antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

※※※※※END OF THE REPORT※※※※※