



# FCC Test Report

**Test report  
On Behalf of**

**Shenzhen Atongmu Technology Co., LTD**

**For  
Projector**

**Model No.: GC06C, Please refer to the series models on page 7**

**FCC ID: 2BAAR-GC06C**

**Prepared For :** Shenzhen Atongmu Technology Co., LTD  
Room 605,Office A Dong,Qiaohongsheng Wenhua Chuangyiyuan,Yintian  
Gongyequ,Yantian Shequ, Xixiang Jiedao,Baoan Qu,Shenzhen Shi,Guangdong,  
518000 China

**Prepared By :** Shenzhen HUAK Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Date of Test:** Jun. 03, 2025 ~ Jun. 27, 2025

**Date of Report:** Jun. 27, 2025

**Report Number:** HK2506032867-5E



HUAK TESTING

## Test Result Certification

**Applicant's name** : Shenzhen Atongmu Technology Co., LTD  
Address : Room 605,Office A Dong,Qiaohongsheng Wenhua  
Chuangyiyuan,Yintian Gongyequ,Yantian Shequ, Xixiang  
Jiedao,Baoan Qu,Shenzhen Shi,Guangdong, 518000 China

**Manufacturer's Name** : Shenzhen Atongmu Technology Co., LTD  
Address : Room 605,Office A Dong,Qiaohongsheng Wenhua  
Chuangyiyuan,Yintian Gongyequ,Yantian Shequ, Xixiang  
Jiedao,Baoan Qu,Shenzhen Shi,Guangdong, 518000 China

### Product description

**Trade Mark** :

**Product name** : Projector

**Series Models** : GC06C, Please refer to the series models on page 7

**Standards** : FCC Rules and Regulations Part 15 Subpart E Section 15.407  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** :

Date (s) of performance of tests : Jun. 03, 2025 ~ Jun. 27, 2025

Date of Issue : Jun. 27, 2025

Test Result : Pass

Testing Engineer

Len Liao

Len Liao

Technical Manager

Sliver Wan

Sliver Wan

Authorized Signatory

Jason Zhou

Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## Table of Contents

<b>1. Test Result Summary .....</b>	<b>5</b>
1.1. Test Procedures and Results.....	5
1.2. Information of the Test Laboratory .....	5
1.3. Measurement Uncertainty .....	6
<b>2. EUT Description .....</b>	<b>7</b>
2.1. General Description of EUT .....	7
2.2. Operation Frequency Each of Channel.....	8
2.3. Operation of EUT During Testing .....	8
2.4. Description of Test Setup.....	9
2.5. Description of Support Units .....	10
<b>3. Genera Information.....</b>	<b>11</b>
3.1. Test Environment and Mode .....	11
<b>4. Test Results and Measurement Data .....</b>	<b>13</b>
4.1. AC Power Line Conducted Emission.....	13
4.2. Maximum Conducted Output Power .....	17
4.3. 6db Emission Bandwidth .....	20
4.4. 26db Bandwidth and 99% Occupied Bandwidth.....	27
4.5. Power Spectral Density .....	28
4.6. Band Edge.....	35
4.7. Spurious Emission.....	50
4.8. Frequency Stability Measurement.....	68
4.9. Antenna Requirement .....	70
<b>5. Test Setup Photos of the EUT .....</b>	<b>71</b>
<b>6. Photos of the EUT.....</b>	<b>73</b>



**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

**\*\* Modified History \*\***

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Jun. 27, 2025	Jason Zhou



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 1. Test Result Summary

## 1.1. Test Procedures and Results

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	N/A
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(b)/15.209/15.205	PASS
Radiated Emission	§15.407(b)/15.209/15.205	PASS
Frequency Stability	§15.407(g)	PASS

---

**Note:**

1. **PASS:** Test item meets the requirement.
2. **Fail:** Test item does not meet the requirement.
3. **N/A:** Test case does not apply to the test object.
4. **The test result judgment is decided by the limit of test standard.**

## 1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.



## HUAK TESTING

### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±0.37dB
2	RF power, conducted	±3.35dB
3	Spurious emissions, conducted	±2.20dB
4	All emissions, radiated(<1G)	±3.90dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%



## HUAK TESTING

## 2. EUT Description

## 2.1. General Description of EUT

Equipment:	Projector
Model Name:	GC06C
Serial Models:	GC06C, GC06D, GC06E, GC06F, GC06C Rro, GC06D Rro, GC06E Rro, GC06F Rro, ATV06A, ATV06B, ATV06C, ATV06D, AT-M86V, AT-M86, AT-M350A, AT-M350B, AT-M350C, AT-M350D
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and product model named different. Test sample mode: GC06C.
Trade Mark:	  
FCC ID:	2BAAR-GC06C
Operation Frequency:	IEEE 802.11a/n/ac (HT20)5.745GHz-5.825GHz IEEE 802.11n/ac (HT40)5.755GHz-5.795GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type:	256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Antenna Type:	Internal Antenna
Antenna Gain:	4.45dBi
Power Source:	AC 100~240V 50/60Hz
Power Supply:	AC 100~240V 50/60Hz
Hardware Version:	ATM-269A713-V2.0
Software Version:	11-RS-20250515.1644

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China. Tel: +86-0755-2361 5501 E-mail: info@nuak.com Web: www.nuak.com




HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

## Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40) 802.11ac(HT40)	
Channel	Frequency	Channel	Frequency
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

## 2.3. Operation of EUT During Testing

Band IV (5725 - 5850 MHz)		
For 802.11a/n (HT20)/ac(HT20)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785
165	High	5825

For 802.11n (HT40)/ ac(HT40)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 2.4. Description of Test Setup

## Operation of EUT during radiation testing and AC Conducted testing:

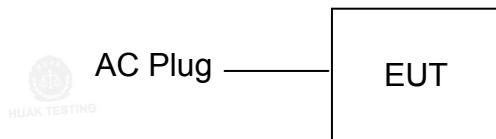

## Operation of EUT during RF Conducted testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



## 2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Projector		GC06C	N/A	EUT
					

**TING**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3. For conducted measurements (Output Power, 6db Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



### 3. General Information


### 3.1. Test Environment and Mode

<b>Operating Environment:</b>				
Temperature:	25.0 °C	HUAK TESTING		
Humidity:	56 % RH	HUAK TESTING		
Atmospheric Pressure:	1010 mbar	HUAK TESTING		
<b>Test Mode:</b>				
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations			
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
<b>Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.</b>				
Mode	Data rate			
802.11a	6 Mbps			
802.11n(HT20)	MCS0			
802.11n(HT40)	MCS0			
802.11ac(HT20)/ac(HT40)	MCS0			
<b>Final Test Mode:</b>				
Operation mode:	Keep the EUT in continuous transmitting with modulation			
<b>Mode Test Duty Cycle:</b>				
	Mode			
	Duty Cycle			
	802.11a	0.96		
	802.11n(HT20)	0.96		
	802.11n(HT40)	0.93		
	802.11ac(HT20)	0.96		
	802.11ac(HT40)	0.96		
<b>Test plots as follows:</b>				


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




## 802.11a

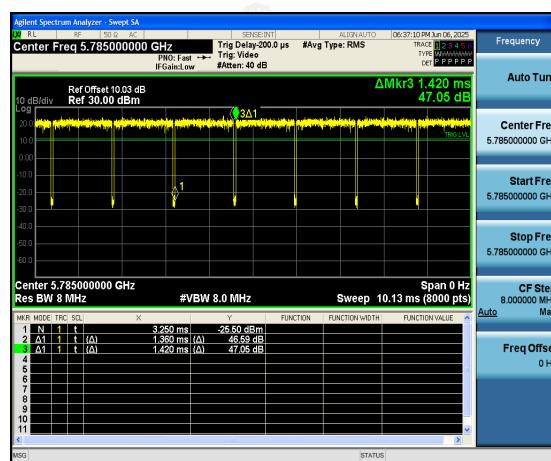


## 802.11n(HT20)

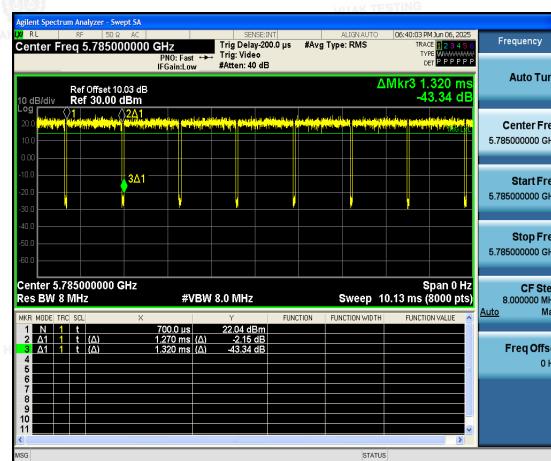


## 802.11n(HT40)

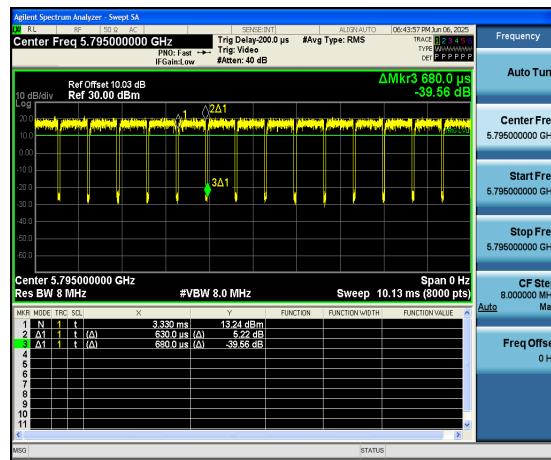

## 802.11ac(HT20)

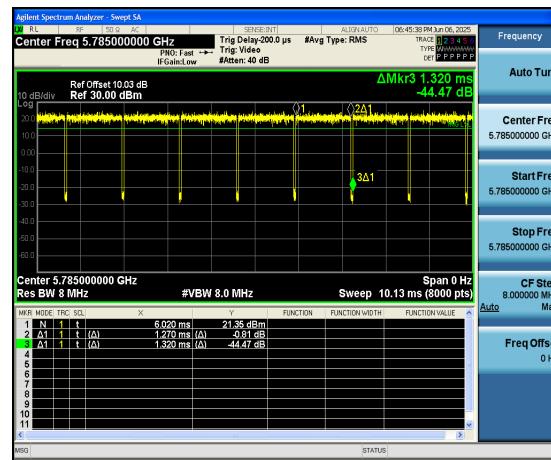

## 802.11ac(HT40)

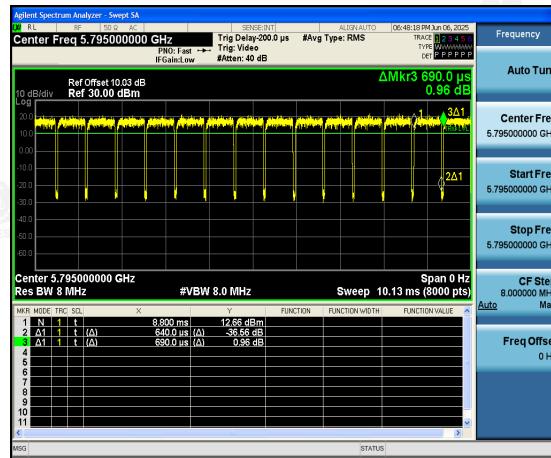

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 4. Test Results and Measurement Data

### 4.1. AC Power Line Conducted Emission

#### 4.1.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207																
<b>Test Method:</b>	ANSI C63.10:2013																
<b>Frequency Range:</b>	150 kHz to 30 MHz																
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
<b>Test Setup:</b>	<p>Reference Plane</p> <p>40cm</p> <p>E.U.T — AC power — LISN — Filter — AC power</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
<b>Test Mode:</b>	Tx Mode																
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>																
<b>Test Result:</b>	Pass																

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## HUAK TESTING

#### 4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	Feb. 18, 2026
LISN 	R&S	ENV216	HKE-002	Feb. 19, 2025	Feb. 18, 2026
LISN	R&S	ENV216	HKE-059	Feb. 19, 2025	Feb. 18, 2026
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Feb. 19, 2025	Feb. 18, 2026
EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	N/A	N/A
10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	Feb. 18, 2026


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).





**HUAK TESTING**  
TESTING

Test Specification: Neutral

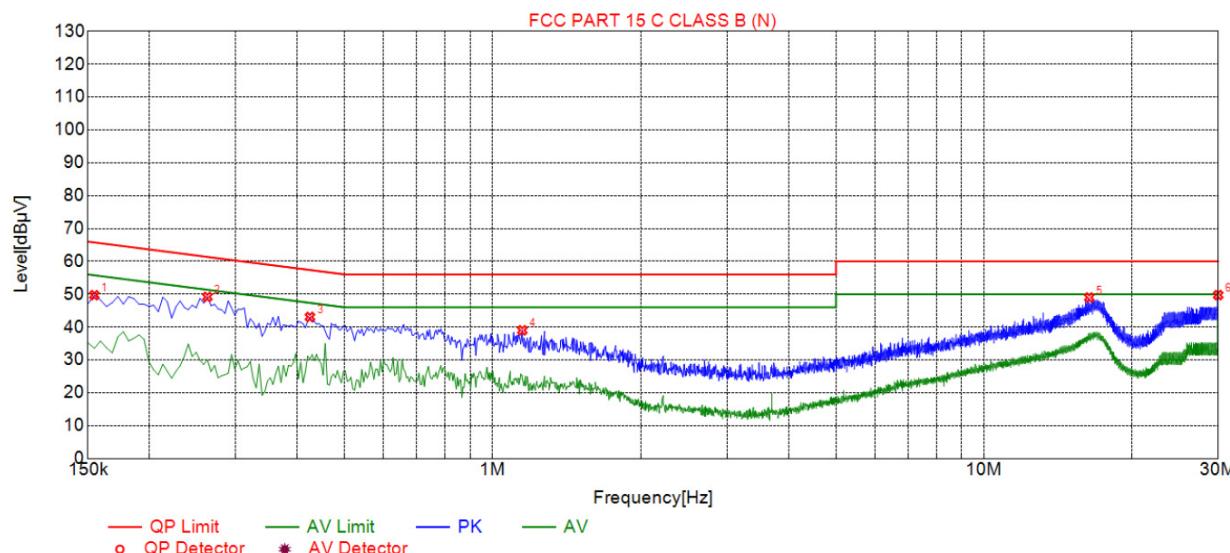

## Suspected List

NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Reading [dB $\mu$ V]	Detector	Type
1	0.1545	49.69	19.63	65.75	16.06	30.06	PK	N
2	0.2625	49.17	19.65	61.35	12.18	29.52	PK	N
3	0.4245	43.08	19.72	57.36	14.28	23.36	PK	N
4	1.1490	39.02	19.80	56.00	16.98	19.22	PK	N
5	16.3860	49.00	22.12	60.00	11.00	26.88	PK	N
6	30.0000	49.74	25.46	60.00	10.26	24.28	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor

## 4.2. Maximum Conducted Output Power

#### 4.2.1. Test Specification

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



### 4.2.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Power meter	Agilent	E4419B	HKE-085	Feb. 19, 2025	Feb. 18, 2026
Power Sensor	Agilent	E9300A	HKE-086	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## HUAK TESTING

## Test Data

Configuration Band IV (5725 - 5850 MHz )				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
802.11a	CH149	7.96	30	PASS
802.11a	CH157	7.21	30	PASS
802.11a	CH165	7.04	30	PASS
802.11n(HT20)	CH149	7.84	30	PASS
802.11n(HT20)	CH157	7.36	30	PASS
802.11n(HT20)	CH165	7.62	30	PASS
802.11n(HT40)	CH151	6.66	30	PASS
802.11n(HT40)	CH159	7.10	30	PASS
802.11ac(HT20)	CH149	6.56	30	PASS
802.11ac(HT20)	CH157	6.86	30	PASS
802.11ac(HT20)	CH165	7.49	30	PASS
802.11ac(HT40)	CH151	6.77	30	PASS
802.11ac(HT40)	CH159	6.64	30	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.

Add.: 1-ZH1, Building B2, Juhuasheng Zhongcheng Zhizao Innovation Park, Tieping, Futian Street, Bao'an District, Shenzhen, Guangdong, China





### 4.3.3. Test data

Band IV (5725 - 5850 MHz)					
Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	CH149	5745	16.400	0.5	PASS
802.11a	CH157	5785	16.400	0.5	PASS
802.11a	CH165	5825	16.360	0.5	PASS
802.11n(HT20)	CH149	5745	17.600	0.5	PASS
802.11n(HT20)	CH157	5785	17.600	0.5	PASS
802.11n(HT20)	CH165	5825	17.600	0.5	PASS
802.11n(HT40)	CH151	5755	36.320	0.5	PASS
802.11n(HT40)	CH159	5795	36.400	0.5	PASS
802.11ac(HT20)	CH149	5745	17.600	0.5	PASS
802.11ac(HT20)	CH157	5785	17.600	0.5	PASS
802.11ac(HT20)	CH165	5825	17.640	0.5	PASS
802.11ac(HT40)	CH151	5755	36.320	0.5	PASS
802.11ac(HT40)	CH159	5795	36.320	0.5	PASS
802.11ac(HT80)	CH155	5775	16.400	0.5	PASS

### Test plots as follows:



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## 802.11ac(HT20)



HUAK TESTING

Low



Mid



High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China



#### 4.4. 26db Bandwidth and 99% Occupied Bandwidth

#### 4.4.1. Test Specification

#### 4.4.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

#### 4.4.3. Test Result

The logo for HUAKE TESTING, featuring a circular emblem with scales of justice and the text "HUAKE TESTING" below it.

## 4.5. Power Spectral Density

#### 4.5.1. Test Specification

#### 4.5.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING  
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

#### 4.5.3. Test data

Configuration Band IV (5725 - 5850 MHz)						
Mode	Test Channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density	Limit (dBm/500kHz)	Result
802.11a	CH149	3.52	-0.086	3.434	30	PASS
802.11a	CH157	2.78	-0.086	2.694	30	PASS
802.11a	CH165	3.82	-0.086	3.734	30	PASS
802.11n(HT20)	CH149	5.21	-0.086	5.124	30	PASS
802.11n(HT20)	CH157	4.92	-0.086	4.834	30	PASS
802.11n(HT20)	CH165	4.11	-0.086	4.024	30	PASS
802.11n(HT40)	CH151	4.46	-0.086	4.374	30	PASS
802.11n(HT40)	CH159	3.34	-0.086	3.254	30	PASS
802.11ac(HT20)	CH149	4.13	-0.086	4.044	30	PASS
802.11ac(HT20)	CH157	4.95	-0.086	4.864	30	PASS
802.11ac(HT20)	CH165	4.75	-0.086	4.664	30	PASS
802.11ac(HT40)	CH151	6.36	-0.086	6.274	30	PASS
802.11ac(HT40)	CH159	5.66	-0.086	5.574	30	PASS
802.11ac(HT80)	CH155	3.52	-0.086	3.434	30	PASS

**Note: Power Spectral Density= Level [dBm/510kHz]+ (10log(Limit RBW/Test RBW))**

**Test plots as follows:**



HUAK TESTING

HUAK TESTING


HUAK TESTING

HUAK TESTING

Band IV (5725-5850 MHz)

Page 30 of 73


Report No.: HK2506032867-5E

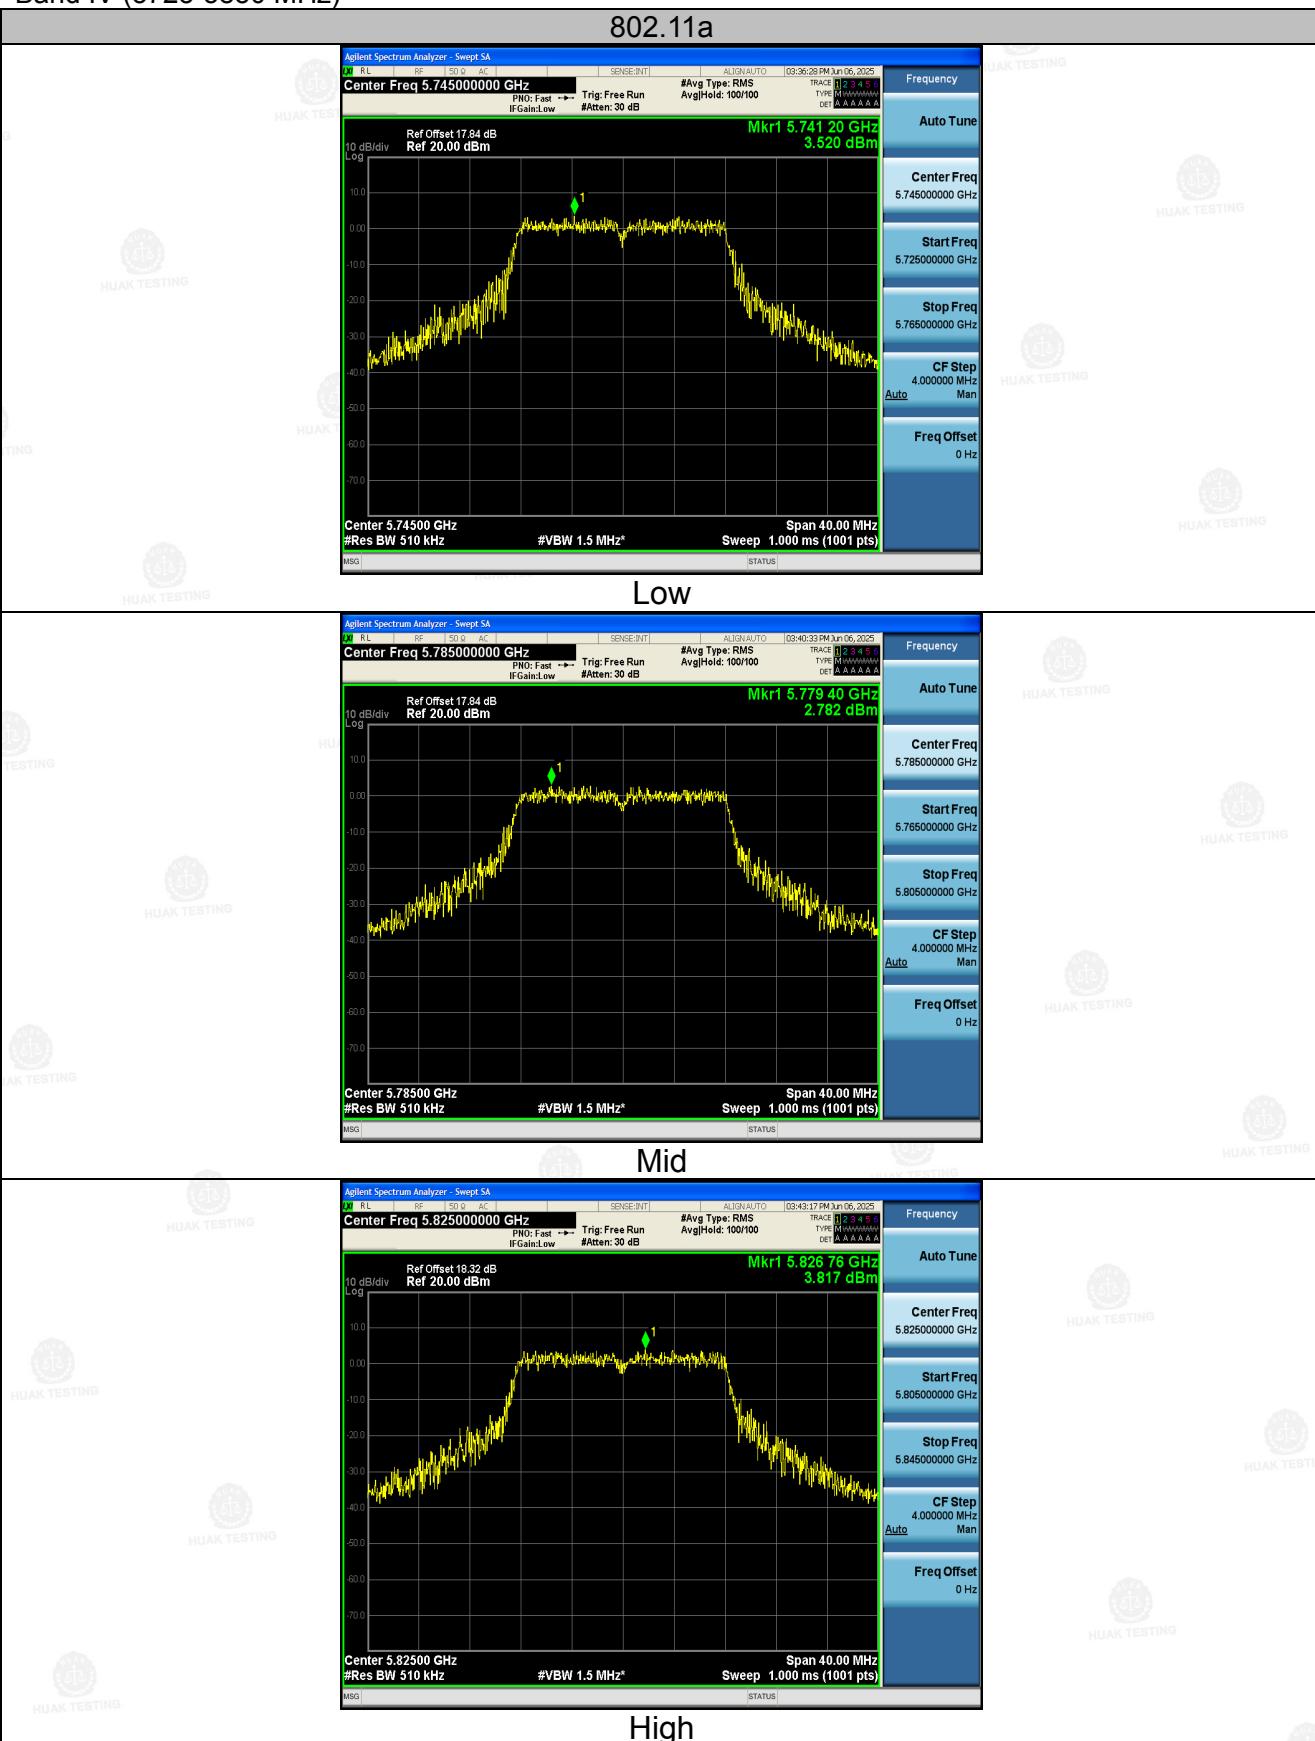

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

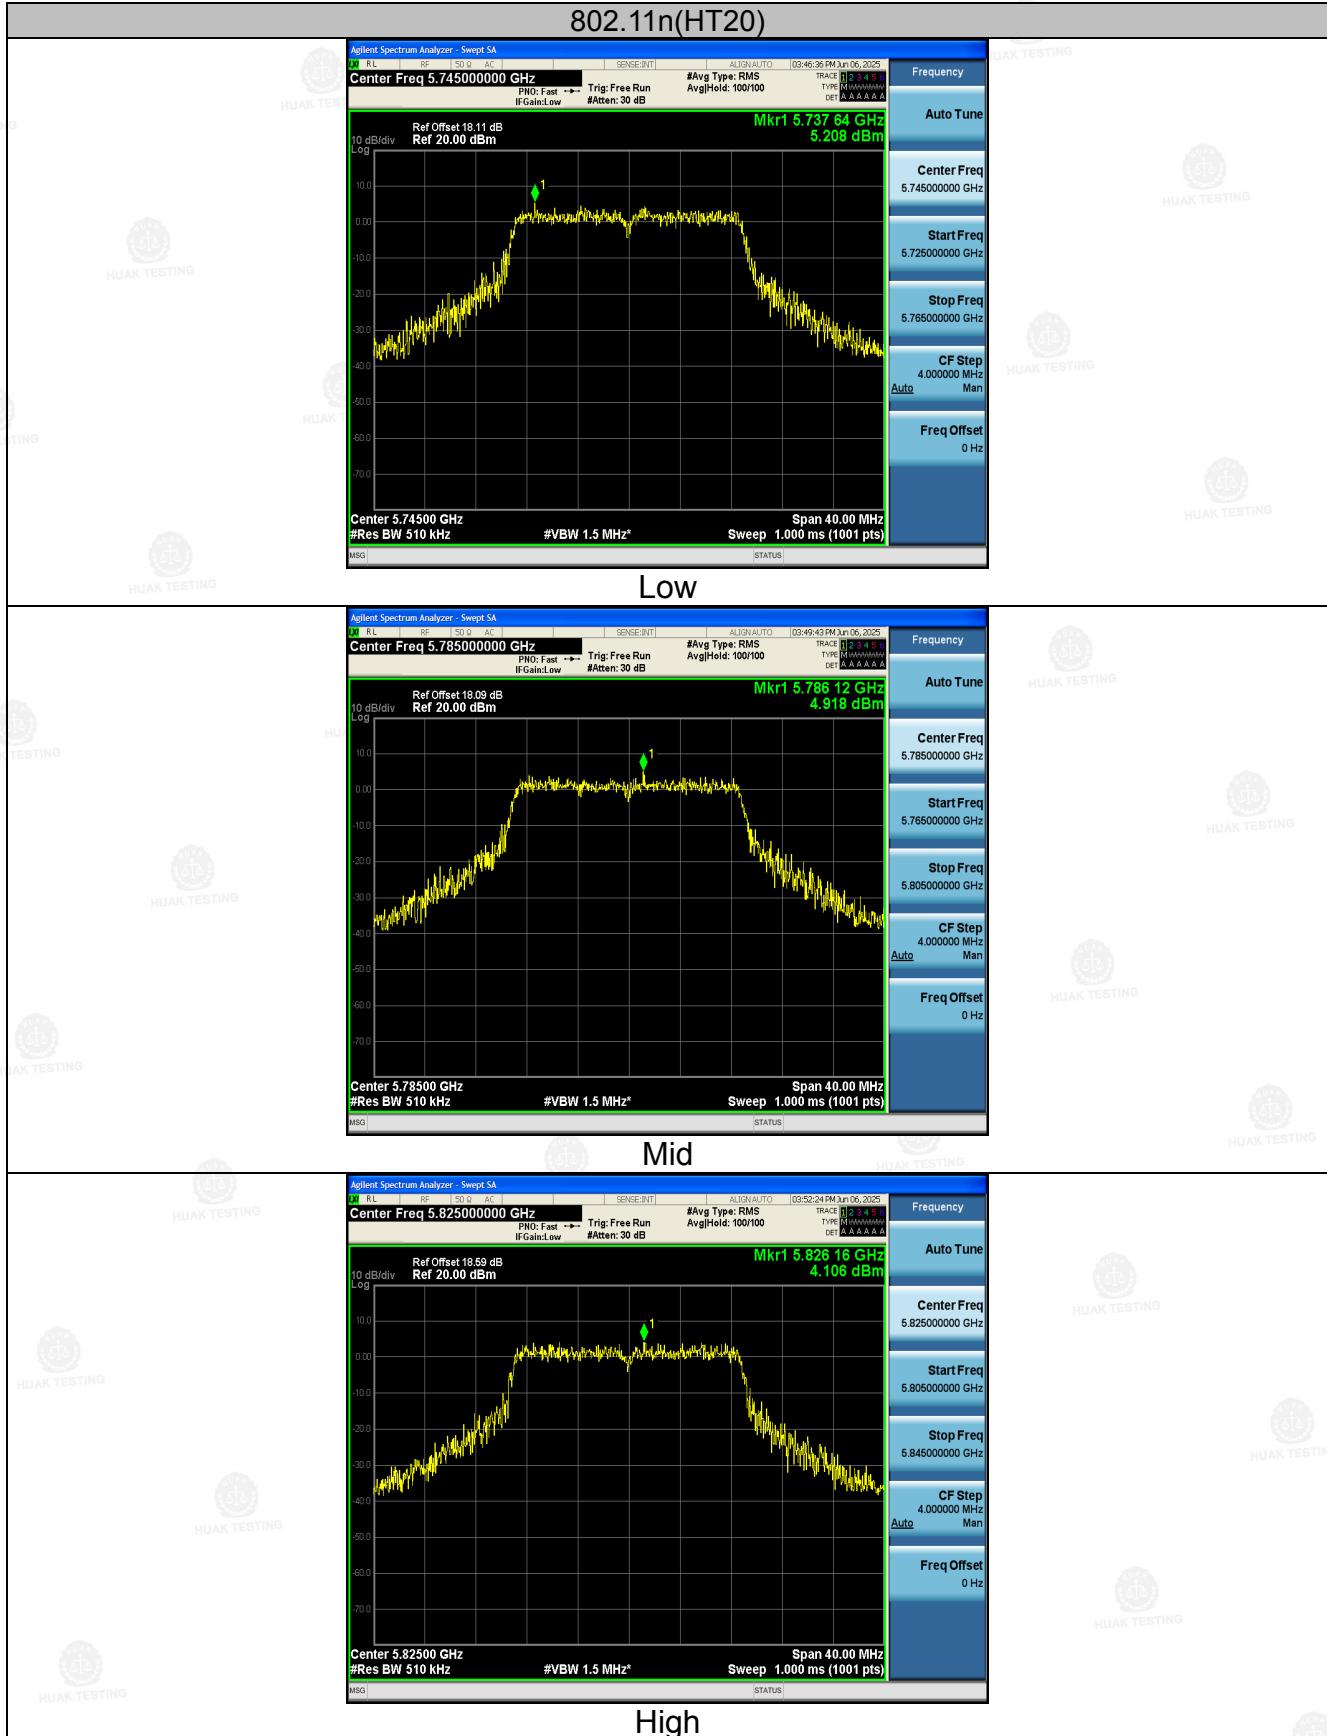


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## HUAK TESTING

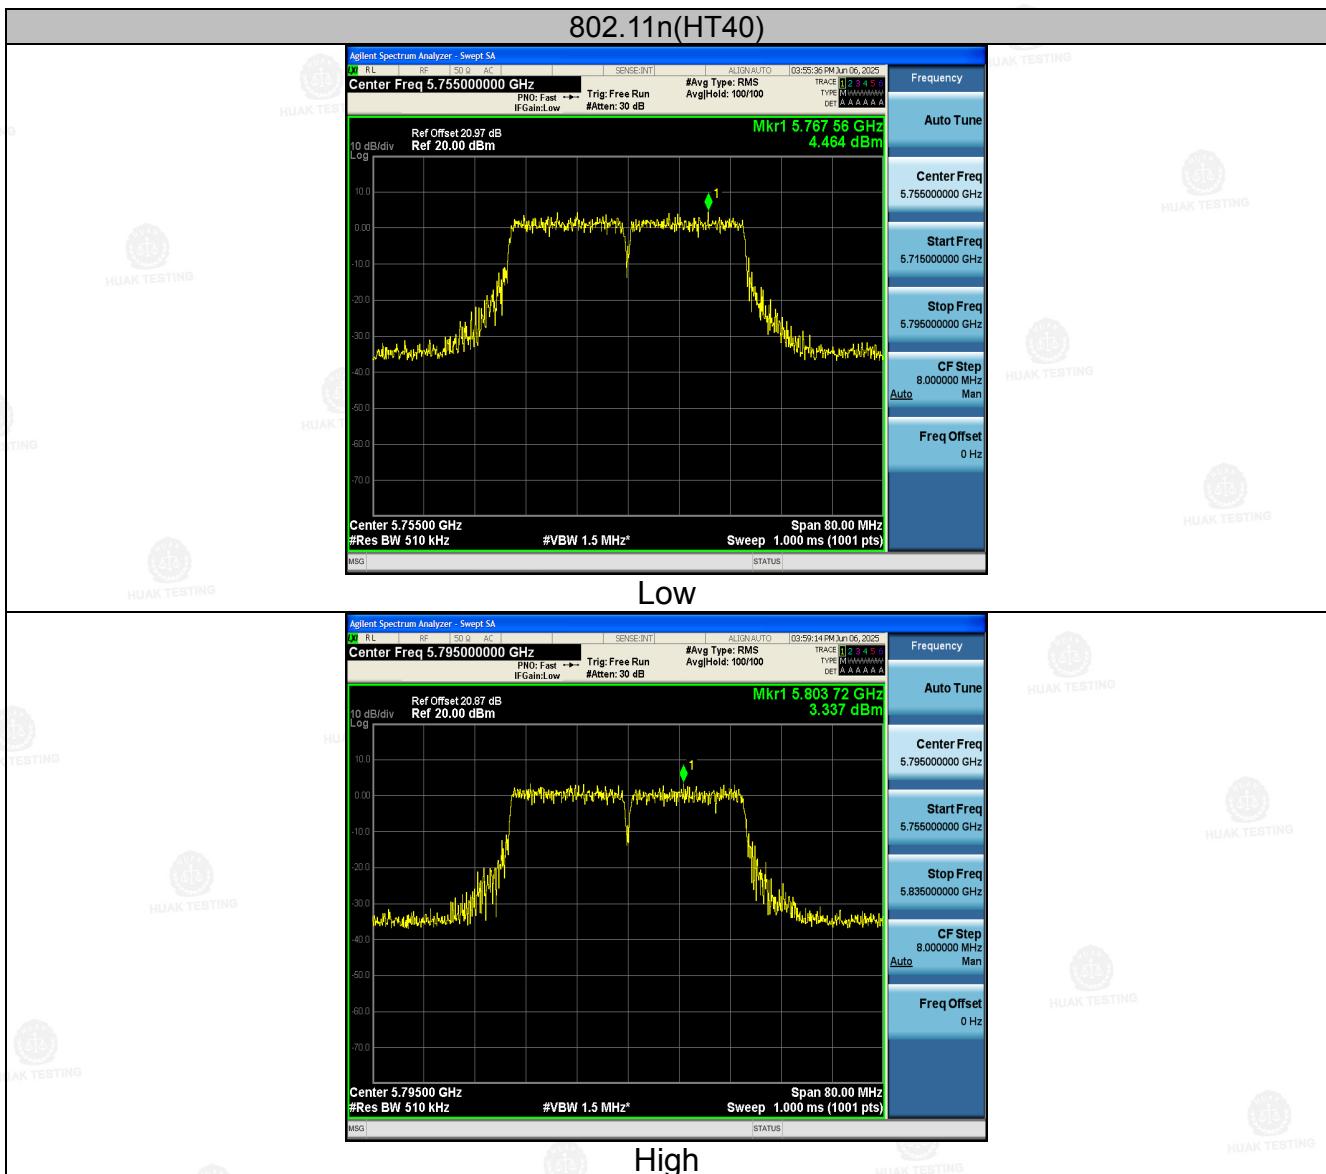

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd., Tel: +86-0755-2302 9901 E-mail: info@huak.com Web: www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

### 802.11ac(HT20)

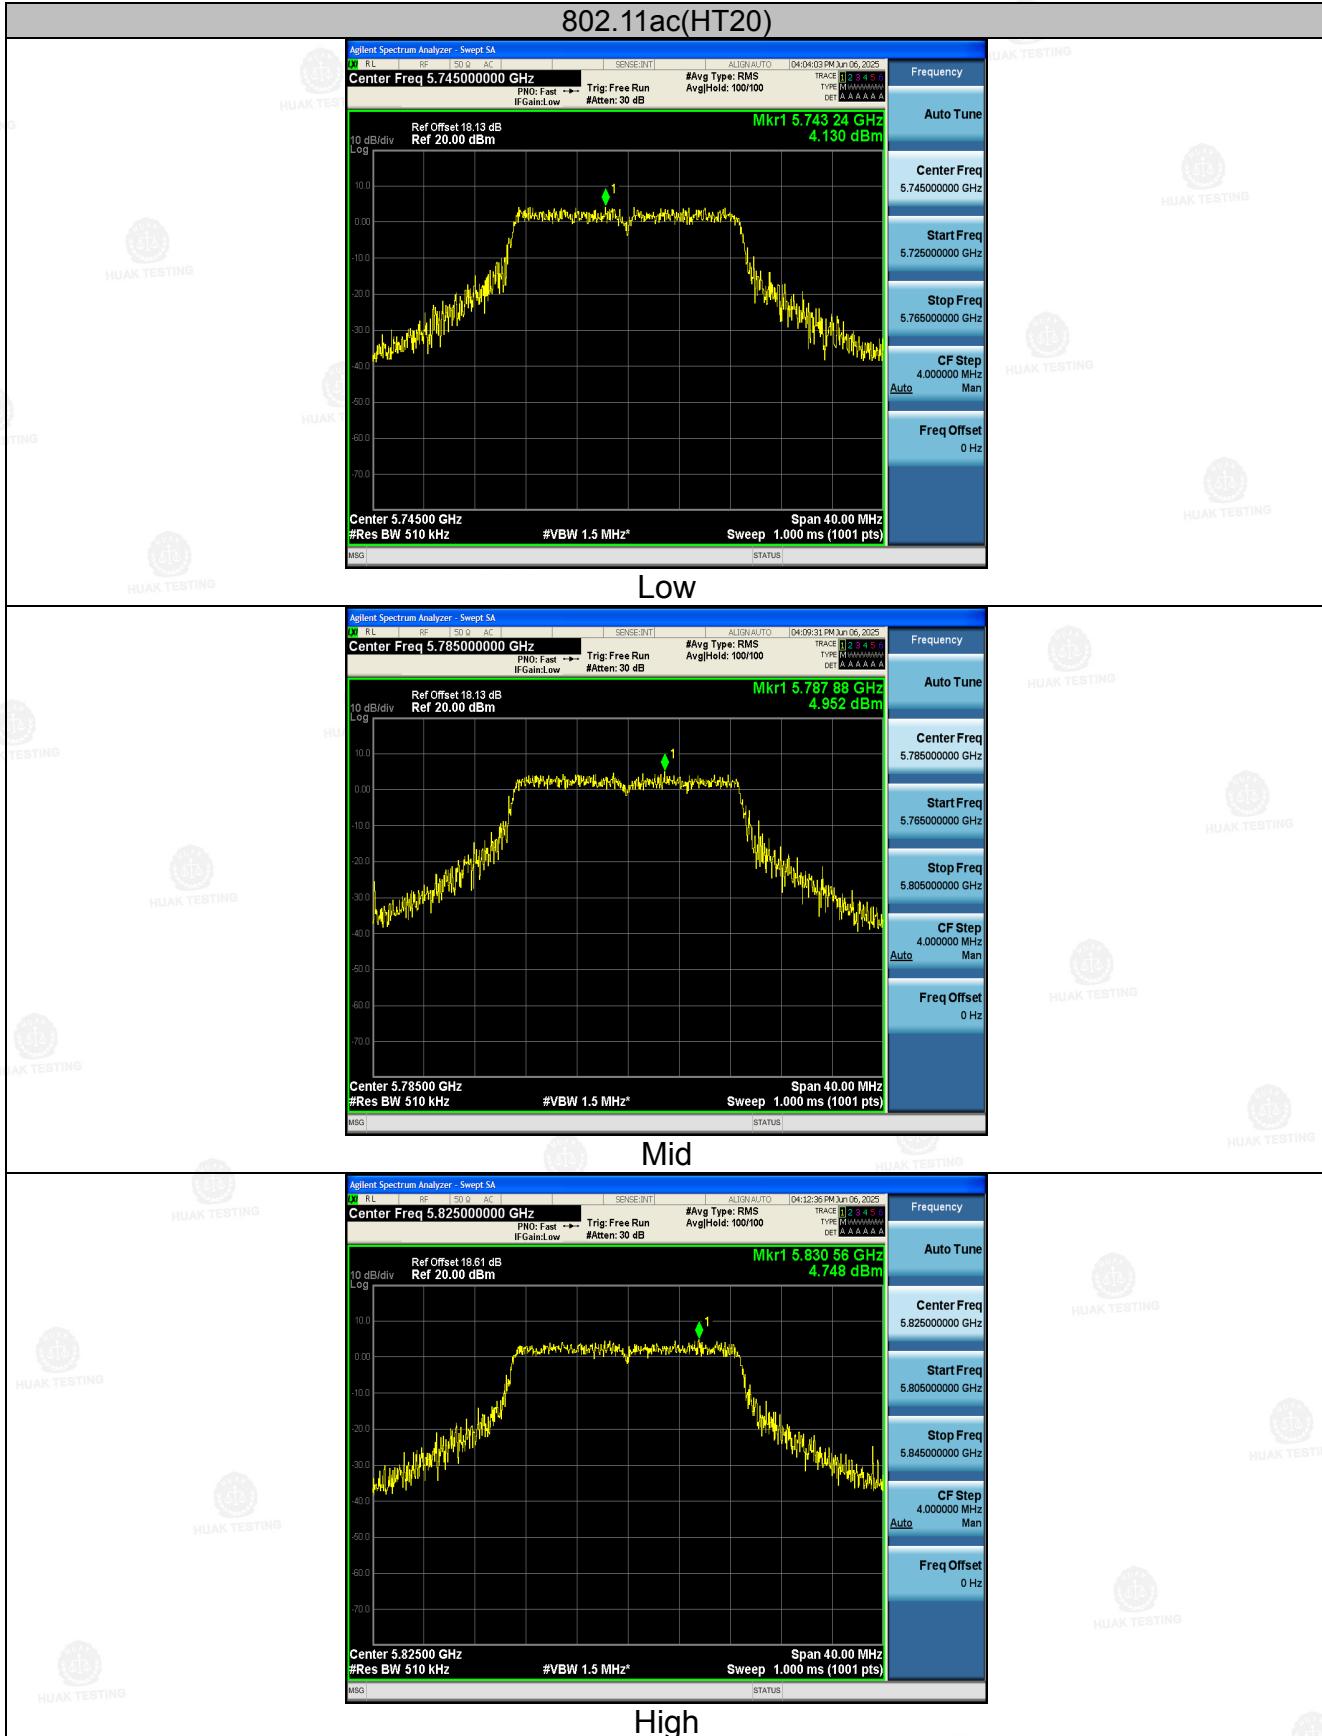

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## HUAK TESTING



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



## 4.6. Band Edge

### 4.6.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15E Section 15.407
<b>Test Method:</b>	ANSI C63.10 2013
<b>Limit:</b>	<p>(1) For transmitters operating in the 5.725-5.85 GHz band:          (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.</p>
<b>Test Setup:</b>	
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> </ol>



**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
<b>Test Result:</b>	PASS



#### 4.6.2. Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	Feb. 18, 2026
6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	Feb. 18, 2026
EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	Feb. 20, 2026
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	Feb. 20, 2026
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	N/A	N/A
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## HUAK TESTING

### 4.6.3. Test Data

Operation Mode: 802.11a Mode with 5.8G TX CH Low

## Horizontal

Frequency [MHz]	Meter Reading [dBµV]	Factor [dB]	Emission Level [dBµV/m]	Limits [dBµV/m]	Margin [dB]	Detector Type
5650	48.82	-2.06	46.76	68.2	21.44	peak
5700	80.42	-1.96	78.46	105.2	26.74	peak
5720	84.64	-2.87	81.77	110.8	29.03	peak
5725	98.14	-2.14	96	122.2	26.2	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	48.22	-2.06	46.16	68.2	22.04	peak
5700	79.01	-1.96	77.05	105.2	28.15	peak
5720	83.85	-2.87	80.98	110.8	29.82	peak
5725	97.66	-2.14	95.52	122.2	26.68	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit Level

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: TX CH High with 5.8G****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	99.93	-1.97	97.96	122.2	24.24	peak
5855	82.79	-2.13	80.66	110.8	30.14	peak
5875	79.75	-2.65	77.1	105.2	28.1	peak
5925	48.92	-2.28	46.64	68.2	21.56	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	101.18	-1.97	99.21	122.2	22.99	peak
5855	82.17	-2.13	80.04	110.8	30.76	peak
5875	79.87	-2.65	77.22	105.2	27.98	peak
5925	49.35	-2.28	47.07	68.2	21.13	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal**

Operation Mode: 802.11n/HT20 Mode with 5.8G TX CH Low

**Horizontal**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	48.27	-2.06	46.21	68.2	21.99	peak
5700	79.61	-1.96	77.65	105.2	27.55	peak
5720	85.98	-2.87	83.11	110.8	27.69	peak
5725	97.22	-2.14	95.08	122.2	27.12	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	48.75	-2.06	46.69	68.2	21.51	peak
5700	79.63	-1.96	77.67	105.2	27.53	peak
5720	83.55	-2.87	80.68	110.8	30.12	peak
5725	98.76	-2.14	96.62	122.2	25.58	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: TX CH High with 5.8G**

HUAK TESTING

**Report No.: HK2506032867-5E**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	101.37	-1.97	99.4	122.2	22.8	peak
5855	83.37	-2.13	81.24	110.8	29.56	peak
5875	80.27	-2.65	77.62	105.2	27.58	peak
5925	48.26	-2.28	45.98	68.2	22.22	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	102.42	-1.97	100.45	122.2	21.75	peak
5855	82.51	-2.13	80.38	110.8	30.42	peak
5875	79.58	-2.65	76.93	105.2	28.27	peak
5925	48.61	-2.28	46.33	68.2	21.87	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: 802.11n/HT40 Mode with 5.8G TX CH Low****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	47.62	-2.06	45.56	68.2	22.64	
5700	80.68	-1.96	78.72	105.2	26.48	peak
5720	85.2	-2.87	82.33	110.8	28.47	peak
5725	97.32	-2.14	95.18	122.2	27.02	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	48.48	-2.06	46.42	68.2	21.78	
5700	78.89	-1.96	76.93	105.2	28.27	peak
5720	84.6	-2.87	81.73	110.8	29.07	peak
5725	98.4	-2.14	96.26	122.2	25.94	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: TX CH High with 5.8G****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	100.84	-1.97	98.87	122.2	23.33	peak
5855	81.27	-2.13	79.14	110.8	31.66	peak
5875	81.58	-2.65	78.93	105.2	26.27	peak
5925	50.57	-2.28	48.29	68.2	19.91	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	101.78	-1.97	99.81	122.2	22.39	peak
5855	82.06	-2.13	79.93	110.8	30.87	peak
5875	81.85	-2.65	79.2	105.2	26	peak
5925	48.63	-2.28	46.35	68.2	21.85	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**HUAK TESTING**

HUAK TESTING

**Horizontal**

Operation Mode: 802.11ac/HT20 Mode with 5.8G TX CH Low

**Horizontal**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	50.03	-2.06	47.97	68.2	20.23	peak
5700	78.99	-1.96	77.03	105.2	28.17	peak
5720	83.6	-2.87	80.73	110.8	30.07	peak
5725	99.57	-2.14	97.43	122.2	24.77	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	49.95	-2.06	47.89	68.2	20.31	peak
5700	79.44	-1.96	77.48	105.2	27.72	peak
5720	85.23	-2.87	82.36	110.8	28.44	peak
5725	99.26	-2.14	97.12	122.2	25.08	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: TX CH High with 5.8G****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	100.53	-1.97	98.56	122.2	23.64	peak
5855	83.7	-2.13	81.57	110.8	29.23	peak
5875	80.34	-2.65	77.69	105.2	27.51	peak
5925	48.68	-2.28	46.4	68.2	21.8	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	100.96	-1.97	98.99	122.2	23.21	peak
5855	82.86	-2.13	80.73	110.8	30.07	peak
5875	79.53	-2.65	76.88	105.2	28.32	peak
5925	49.41	-2.28	47.13	68.2	21.07	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal**

Operation Mode: 802.11ac/HT40 Mode with 5.8G TX CH Low

**Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	50.05	-2.06	47.99	68.2	20.21	peak
5700	79.99	-1.96	78.03	105.2	27.17	peak
5720	83.65	-2.87	80.78	110.8	30.02	peak
5725	98.86	-2.14	96.72	122.2	25.48	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	50.06	-2.06	48	68.2	20.2	peak
5700	78.26	-1.96	76.3	105.2	28.9	peak
5720	83.73	-2.87	80.86	110.8	29.94	peak
5725	97.83	-2.14	95.69	122.2	26.51	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: TX CH High with 5.8G****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	102.48	-1.97	100.51	122.2	21.69	peak
5855	82.19	-2.13	80.06	110.8	30.74	peak
5875	80.39	-2.65	77.74	105.2	27.46	peak
5925	48.47	-2.28	46.19	68.2	22.01	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	101.32	-1.97	99.35	122.2	22.85	peak
5855	81.01	-2.13	78.88	110.8	31.92	peak
5875	80.44	-2.65	77.79	105.2	27.41	peak
5925	50.1	-2.28	47.82	68.2	20.38	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

**Horizontal****Operation Mode: 802.11ac/HT80 Mode with 5.8G TX CH Low****Horizontal**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	48.57	-2.06	46.51	68.2	21.69	
5700	78.19	-1.96	76.23	105.2	28.97	peak
5720	85.12	-2.87	82.25	110.8	28.55	peak
5725	98.67	-2.14	96.53	122.2	25.67	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Vertical:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5650	49.88	-2.06	47.82	68.2	20.38	
5700	78.26	-1.96	76.3	105.2	28.9	peak
5720	83.46	-2.87	80.59	110.8	30.21	peak
5725	99.78	-2.14	97.64	122.2	24.56	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Horizontal

Operation Mode: TX CH High with 5.8G

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	100.84	-1.97	98.87	122.2	23.33	
5855	83.47	-2.13	81.34	110.8	29.46	peak
5875	81.34	-2.65	78.69	105.2	26.51	peak
5925	48.97	-2.28	46.69	68.2	21.51	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
5850	100.7	-1.97	98.73	122.2	23.47	
5855	80.97	-2.13	78.84	110.8	31.96	peak
5875	81.16	-2.65	78.51	105.2	26.69	peak
5925	50.63	-2.28	48.35	68.2	19.85	peak


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 4.7. Spurious Emission

#### 4.7.1.1. Test Specification
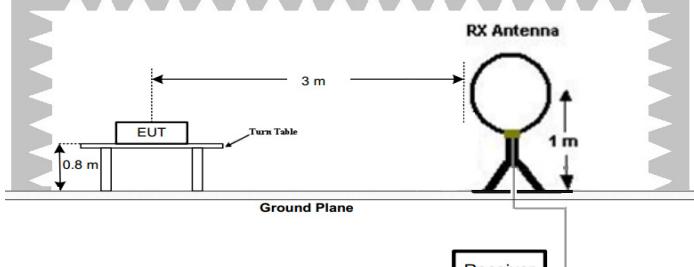
<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205																													
<b>Test Method:</b>	KDB 789033 D02 v02r01																													
<b>Frequency Range:</b>	9kHz to 40GHz																													
<b>Measurement Distance:</b>	3 m																													
<b>Antenna Polarization:</b>	Horizontal & Vertical																													
<b>Operation mode:</b>	Transmitting mode with modulation																													
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr> <tr> <td>150kHz- 30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark																										
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																										
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																										
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																										
Above 1GHz	Peak	1MHz	3MHz	Peak Value																										
	Peak	1MHz	10Hz	Average Value																										
<b>Limit:</b>	<p>(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(4) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.</p>																													
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p>																													

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




HUAK TESTING


HUAK TESTING

HUAK TESTING

HUAK TESTING

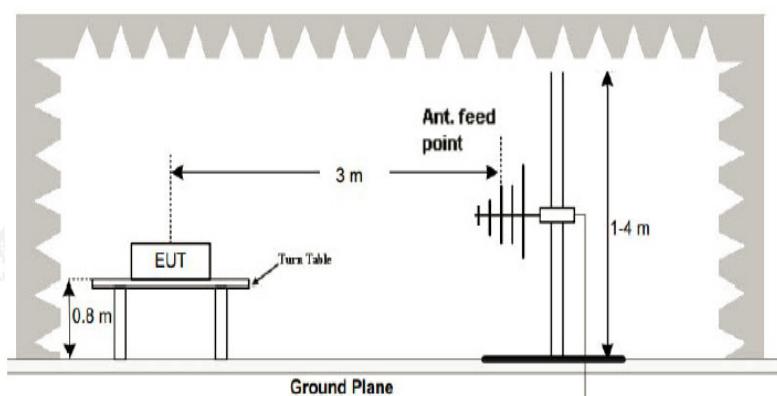

Above 1GHz

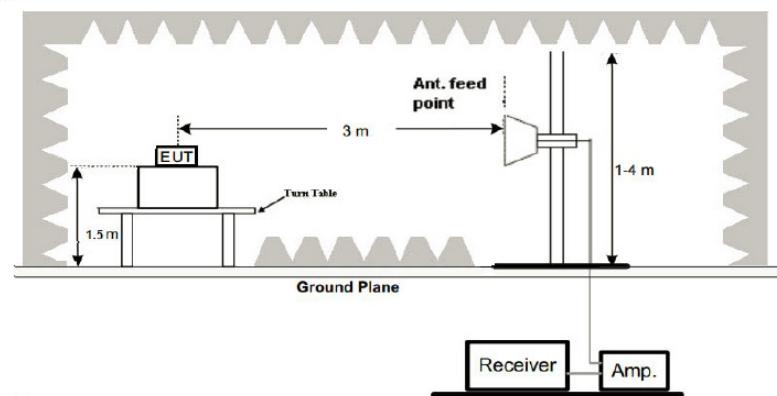

#### Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<b>Test results:</b>	PASS



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

DRT

AL

NO

OV

HUAK TE



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

HUAK



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

HUAK

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 4.7.2. Test Data

**All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.**



Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	110.5906	-14.50	46.51	32.01	43.50	11.49	100	306	Horizontal
2	167.8779	-17.31	47.19	29.88	43.50	13.62	100	332	Horizontal
3	205.7457	-15.25	48.17	32.92	43.50	10.58	100	15	Horizontal
4	319.3493	-11.24	50.36	39.12	46.00	6.88	100	337	Horizontal
5	392.1722	-9.40	46.52	37.12	46.00	8.88	100	219	Horizontal
6	663.0731	-4.76	40.35	35.59	46.00	10.41	100	196	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level




**HUAK TESTING**  
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

## Vertical

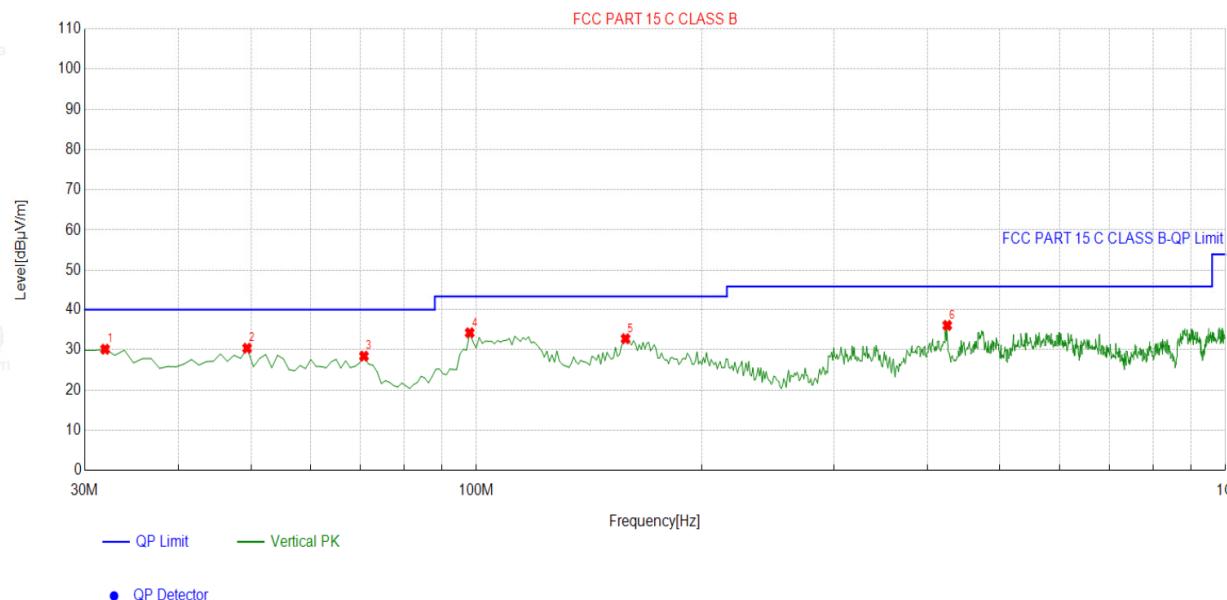

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.9419	-15.76	45.91	30.15	40.00	9.85	100	263	Vertical
2	49.4194	-13.14	43.54	30.40	40.00	9.60	100	82	Vertical
3	70.7808	-16.89	45.32	28.43	40.00	11.57	100	278	Vertical
4	97.9680	-15.12	49.35	34.23	43.50	9.27	100	272	Vertical
5	158.1682	-17.83	50.59	32.76	43.50	10.74	100	309	Vertical
6	425.1852	-8.84	44.91	36.07	46.00	9.93	100	306	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

## Harmonics and Spurious Emissions

### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.



**HUAK TESTING**

HUAK TESTING

**Above 1GHz**

**RADIATED EMISSION TEST**

LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3368	52.65	-4.59	48.06	68.2	20.14	peak
11096	39.15	4.21	43.36	74	30.64	peak
11096	39.59	4.21	43.8	54	10.2	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3368	50.45	-4.59	45.86	68.2	22.34	peak
11096	39.98	4.21	44.19	74	29.81	peak
11096	37.48	4.21	41.69	54	12.31	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



MID CH157 (802.11 a Mode with 5.8G)/5785

### Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	52.13	-4.59	47.54	68.2	20.66	peak
10523	54.97	4.21	59.18	68.2	9.02	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

### Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3172	55.75	-4.59	51.16	68.2	17.04	peak
10523	56.82	4.21	61.03	68.2	7.17	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2705	56.17	-4.59	51.58	74	22.42	peak
2705	42.17	-4.59	37.58	54	16.42	AVG
11717	54.9	4.84	59.74	74	14.26	peak
11717	42.87	4.84	47.71	54	6.29	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2705	54.45	-4.59	49.86	74	24.14	peak
2705	43.61	-4.59	39.02	54	14.98	AVG
11717	56.68	4.84	61.52	74	12.48	peak
11717	43.58	4.84	48.42	54	5.58	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



## HUAK TESTING

### 5.8G 802.11n/HT20 Mode

LOW CH 149

### Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3368	54.61	-4.59	50.02	68.2	18.18	peak
11096	48.76	4.21	52.97	74	21.03	peak
11096	40.26	4.21	44.47	54	9.53	AVG

HUAK TEST

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3368	51.48	-4.59	46.89	68.2	21.31	peak
11096	41.54	4.21	45.75	74	28.25	peak
11096	39.19	4.21	43.4	54	10.6	AVG



## HUAK TESTING

MID CH157

### Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type HUAK TESTING
3172	55.03	-4.59	50.44	68.2	17.76	peak
10523	50.16	4.21	54.37	68.2	13.83	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3172	53.61	-4.59	49.02	68.2	19.18	peak
10523	48.61	4.21	52.82	68.2	15.38	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



HIGH CH165

### Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2705	55.37	-4.59	50.78	74	23.22	peak
2705	42.14	-4.59	37.55	54	16.45	AVG
11717	56.66	4.84	61.5	74	12.5	peak
11717	42.82	4.84	47.66	54	6.34	AVG

## Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2705	54.39	-4.59	49.8	74	24.2	peak
2705	43.46	-4.59	38.87	54	15.13	AVG
11717	54.44	4.84	59.28	74	14.72	peak
11717	42.71	4.84	47.55	54	6.45	AVG

### Remark

**Remark:**

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



**HUAK TESTING**

HUAK TESTING

5.8G 802.11n/HT40 Mode

LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	55.27	-4.59	50.68	68.2	17.52	peak
11096	50.35	4.21	54.56	74	19.44	peak
11096	37.68	4.21	41.89	54	12.11	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	53.51	-4.59	48.92	68.2	19.28	peak
11096	50.56	4.21	54.77	74	19.23	peak
11096	36.42	4.21	40.63	54	13.37	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	55.07	-4.59	50.48	68.2	17.72	peak
10523	49.49	4.21	53.7	68.2	14.5	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	55.23	-4.59	50.64	68.2	17.56	peak
10523	51.59	4.21	55.8	68.2	12.4	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

5.8G 802.11ac/HT20 Mode

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	51.93	-4.59	47.34	68.2	20.86	peak
11096	42.88	4.21	47.09	74	26.91	peak
11096	38.42	4.21	42.63	54	11.37	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	51.63	-4.59	47.04	68.2	21.16	peak
11096	43.54	4.21	47.75	74	26.25	peak
11096	40.88	4.21	45.09	54	8.91	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## HUAK TESTING

MID CH157

### Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type HAWK 14-1210
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	53.64	-4.59	49.05	68.2	19.15	peak
10523	48.62	4.21	52.83	68.2	15.37	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	55.06	-4.59	50.47	68.2	17.73	peak
10523	52.36	4.21	56.57	68.2	11.63	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = [limit-1 level]



## HUAK TESTING

HIGH CH165

### Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2705	57.18	-4.59	52.59	74	21.41	peak
2705	43.57	-4.59	38.98	54	15.02	AVG
11717	54.11	4.84	58.95	74	15.05	peak
11717	42.77	4.84	47.61	54	6.39	AVG

## Vertical:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2705	56.12	-4.59	51.53	74	22.47	peak
2705	42.89	-4.59	38.3	54	15.7	AVG
11717	56.23	4.84	61.07	74	12.93	peak
11717	42.35	4.84	47.19	54	6.81	AVG

**Remark.**

**Remark:**

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**HUAK TESTING**

HUAK TESTING

5.8G 802.11ac/HT40 Mode

LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	55.09	-4.59	50.5	68.2	17.7	peak
11096	52.03	4.21	56.24	74	17.76	peak
11096	38.35	4.21	42.56	54	11.44	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3368	53.02	-4.59	48.43	68.2	19.77	peak
11096	51.09	4.21	55.3	74	18.7	peak
11096	37.41	4.21	41.62	54	12.38	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



## HUAK TESTING

MID CH159

## Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type HUAK TESTING
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3172	56.14	-4.59	51.55	68.2	16.65	peak
10523	50.39	4.21	54.6	68.2	13.6	peak

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
3172	55.32	-4.59	50.73	68.2	17.47	-50.73
10523	51.02	4.21	55.23	68.2	12.97	peak


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**Remark:**

(1) Measuring frequencies from 1 GHz to the 40 GHz.  
(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.  
(3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.  
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.  
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.  
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

## 4.8. Frequency Stability Measurement

#### 4.8.1. Test Specification
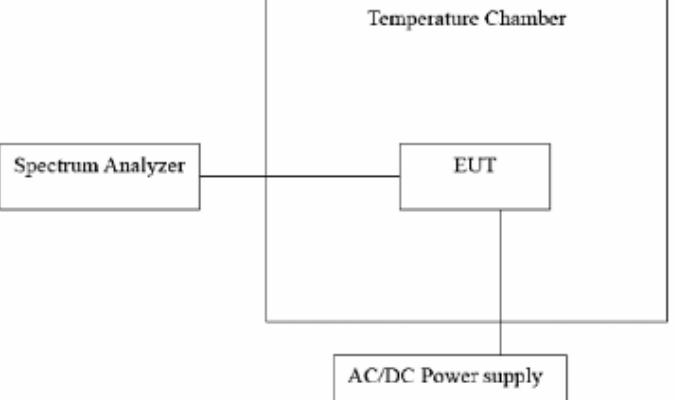
<b>Test Requirement:</b>	FCC Part15 Section 15.407(g)
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
<b>Test Setup:</b>	 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]     EUT --- ACDC[AC/DC Power supply]     subgraph TC [Temperature Chamber]         EUT     end   </pre>
<b>Test Procedure:</b>	<p>The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.</p> <p>b. Turn the EUT on and couple its output to a spectrum analyzer.</p> <p>c. Turn the EUT off and set the chamber to the highest temperature specified.</p> <p>d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.</p> <p>e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.</p> <p>f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.</p>
<b>Test Result:</b>	PASS
<b>Remark:</b>	N/A

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Test Result as follows:**

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	108V	5744.995	-5	5824.984	-16
	120V	5744.969	-31	5824.994	-6
	132V	5744.970	-30	5824.984	-16

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.971	-29	5824.981	-19
	-20	5744.966	-34	5825.018	18
	-10	5744.991	-19	5825.010	10
	0	5744.992	-8	5825.033	33
	10	5745.032	32	5824.975	-25
	20	5745.047	47	5825.036	36
	30	5745.038	38	5825.033	33
	40	5744.965	-35	5824.966	-34
	50	5744.960	-40	5825.034	34



HUAK TESTING

HUAK TESTING



HUAK TESTING

## 4.9. Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a Internal antenna, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 4.45dBi.

### WIFI ANTENNA

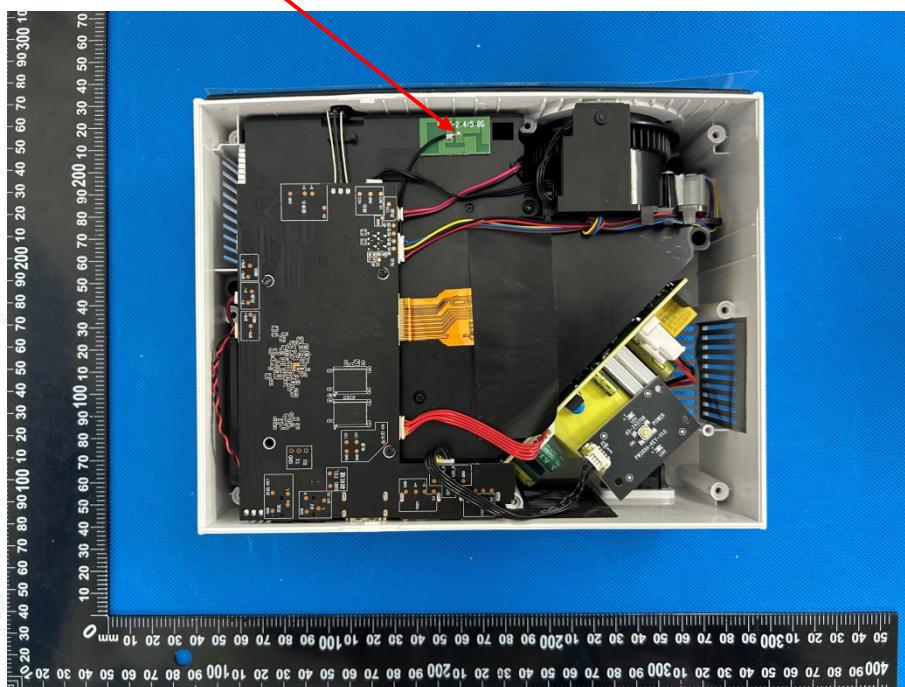



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING

## 5. Test Setup Photos of the EUT

Radiated Emission

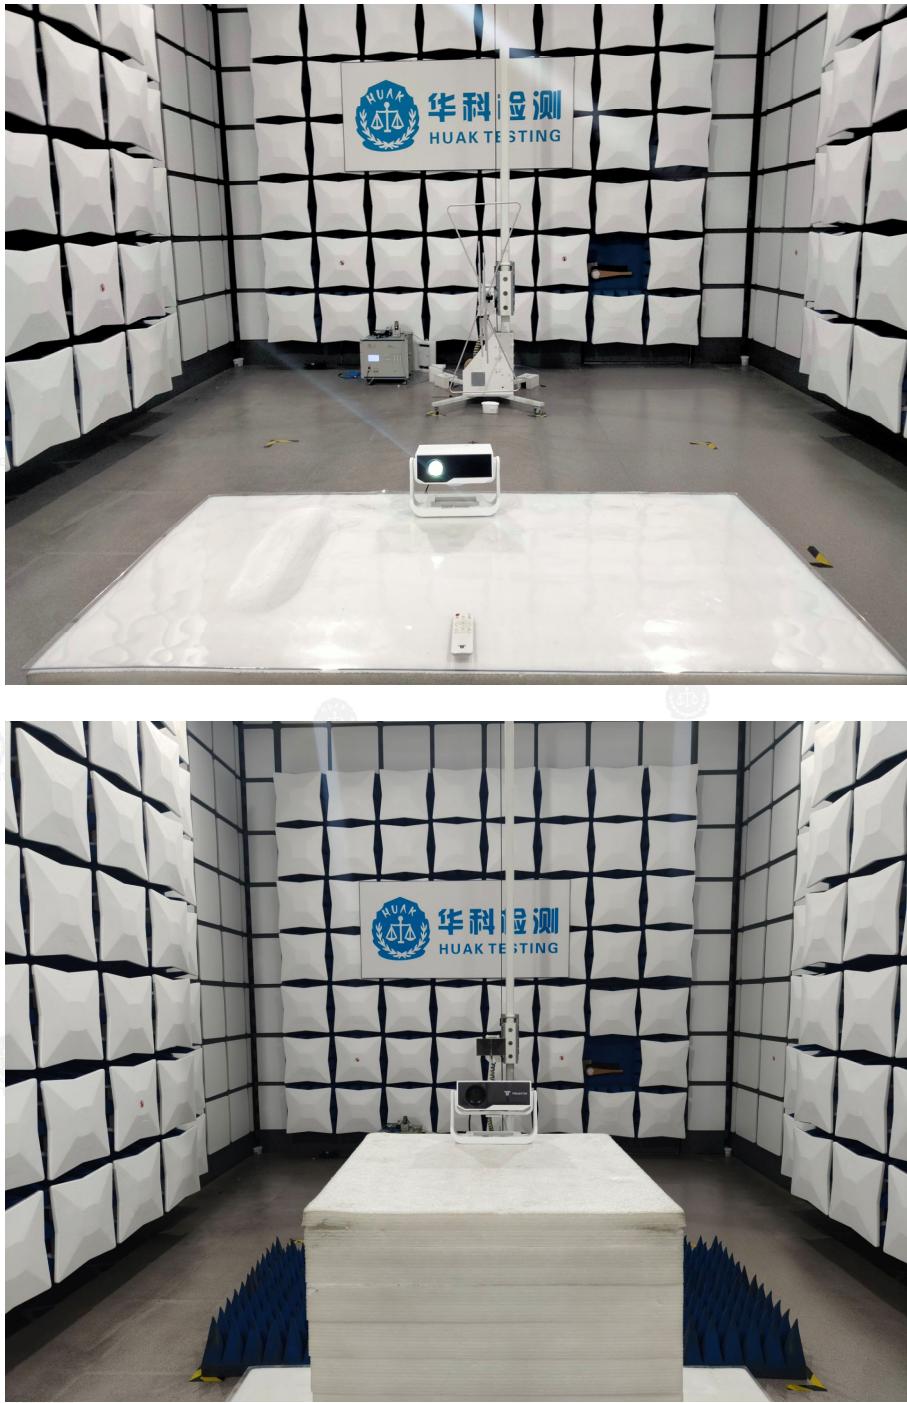

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**Shenzhen HUAK Testing Technology Co., Ltd.** Tel.: +86-0755-2302 9901 E-mail: [info@huak.com](mailto:info@huak.com) Web.: [www.huak.com](http://www.huak.com)

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING




HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

### AC Conducted Emission

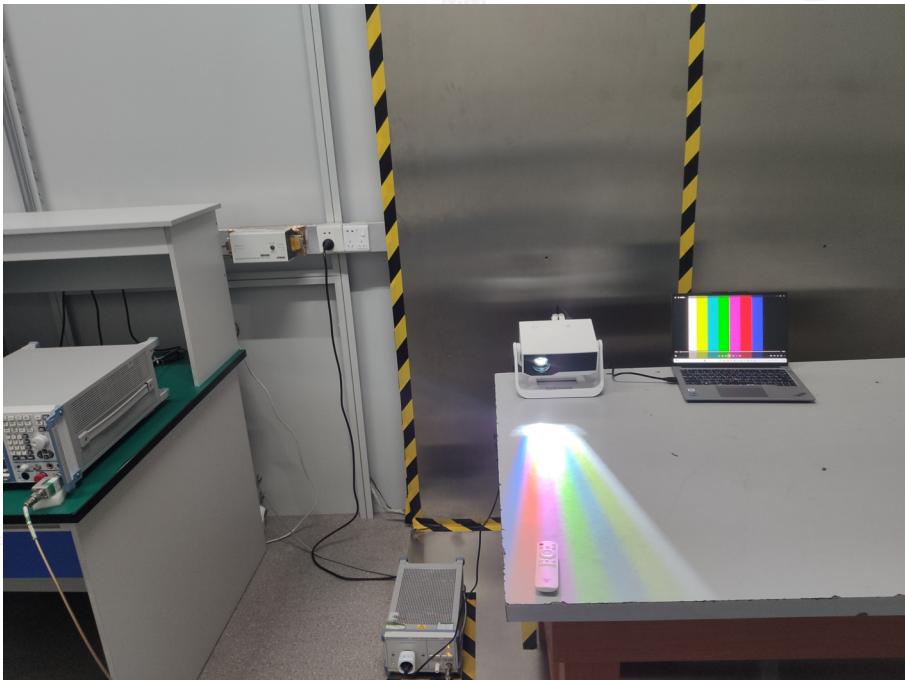

### RF Conducted Emission

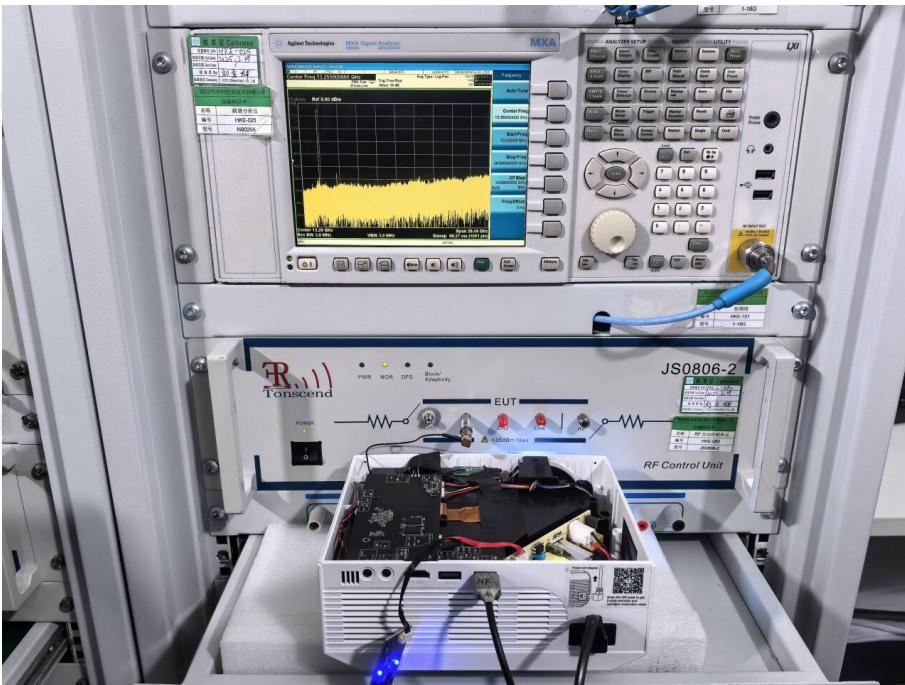



## 6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----