



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

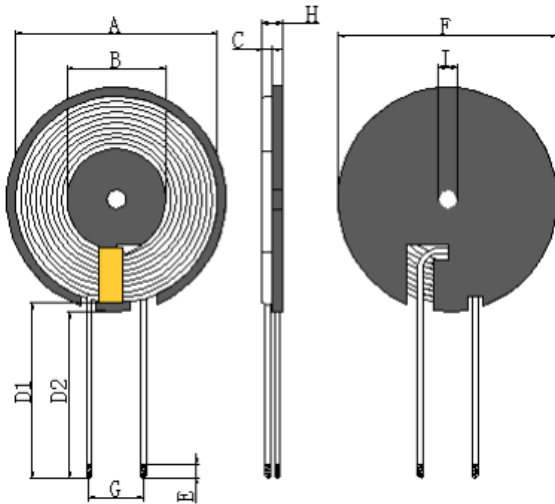

2. SCHEMATICS:



Antenna Gain: 0dBi

A	B	C	D1	D2	E	F	G	H	I
50±0.5	20.5±0.5	1.2±0.2	42±2	40±2	4±2	50±0.5		2.3±0.5	

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	ø0.08*105mm 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	IDC	Q值	HI-POT
TEST	S-F	S-F			
CON	100KHz, 0.25V	AT 25°C			
SPEC	6.5uH±10%	60mΩ Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	CORE	G50L开L槽/0.8mm	NANJINGJINNINGCO,LTD	
2	WIRE	ø0.08mm*105 2UEW	TAIYI CO.,LTD	
3	EPOXY	9999	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G50开槽
DRAWN BY	CHECKED BY		APPROVED BY
谢超	何伟华		韦立红