

TEST REPORT

Report No.: BCTC2407514850-4E

Applicant: Shenzhen Jizhi Acoustics Technology Co., Ltd

Product Name: Digital player

Test Model: DX180

Tested Date: 2024-07-09 to 2024-07-22

Issued Date: 2024-07-23

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BH33-DX180

Product Name: Digital player

Trademark: iBasso Audio

Model/Type reference: DX180
DX260, DX340, DX340MAX, DX360, DX360MAX, DX270

Prepared For: Shenzhen Jizhi Acoustics Technology Co., Ltd

Address: Unit606, T-Share International Center Tower A, Taoyuan Road, Nanshan District, Shenzhen, China

Manufacturer: Shenzhen Jizhi Acoustics Technology Co., Ltd

Address: Unit606, T-Share International Center Tower A, Taoyuan Road, Nanshan District, Shenzhen, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-07-09

Sample tested Date: 2024-07-09 to 2024-07-22

Issue Date: 2024-07-23

Report No.: BCTC2407514850-4E

Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01

Test Results: PASS

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test Procedure	13
6.4 EUT Operating Conditions	13
6.5 Test Result	14
7. Radiated Emissions	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	17
7.3 Test Procedure	18
7.4 EUT Operating Conditions	19
7.5 Test Result	19
8. Power Spectral Density Test	29
8.1 Block Diagram Of Test Setup	29
8.2 Limit	29
8.3 Test Procedure	30
8.4 EUT Operating Conditions	30
8.5 Test Result	31
9. 26dB & 6dB & 99% Emission Bandwidth	39
9.1 Block Diagram Of Test Setup	39
9.2 Limit	39
9.3 Test Procedure	39
9.4 EUT Operating Conditions	40
9.5 Test Result	40
10. Maximum Conducted Output Power	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test Procedure	55
10.4 EUT Operating Conditions	56
10.5 Test Result	57
11. Out Of Band Emissions	58

11.1	Block Diagram Of Test Setup.....	58
11.2	Limit	58
11.3	Test Procedure	58
11.4	EUT Operating Conditions	58
11.5	Test Result.....	59
12.	Spurious RF Conducted Emissions.....	65
12.1	Block Diagram Of Test Setup.....	65
12.2	Limit	65
12.3	Test Procedure	65
12.4	Test Result.....	65
13.	Frequency Stability Measurement	73
13.1	Block Diagram Of Test Setup.....	73
13.2	Limit	73
13.3	Test Procedure	73
13.4	Test Result.....	74
14.	Antenna Requirement	77
14.1	Limit	77
14.2	Test Result.....	77
15.	EUT Photographs.....	78
16.	EUT Test Setup Photographs.....	79

(Note: N/A Means Not Applicable)

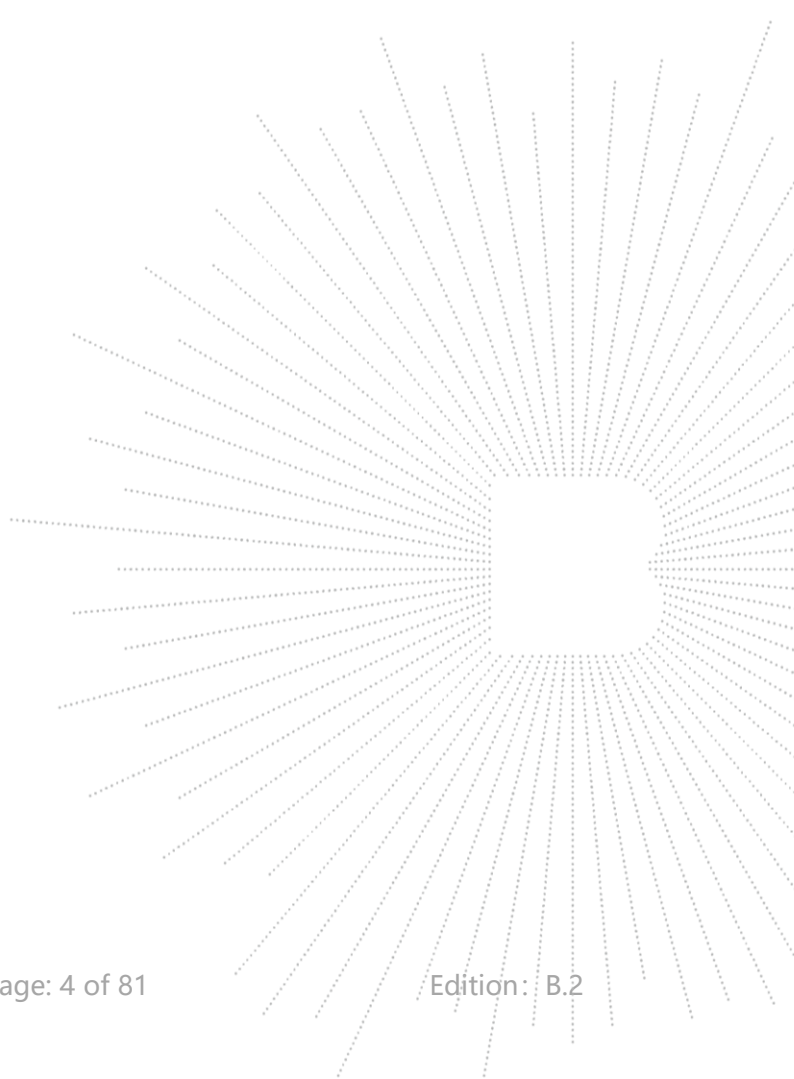

1. Version

Report No.	Issue Date	Description	Approved
BCTC2407514850-4E	2024-07-23	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

Note: The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	DX180 DX260, DX340, DX340MAX, DX360, DX360MAX, DX270
Model differences:	All the model are the same circuit and RF module, except model names and appearance of the color.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5210MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ;
Antenna installation:	FPC antenna 3.99 dBi
Antenna Gain:	Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 5V from USB, DC 3.8V from battery


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Digital player	iBasso Audio	DX180	More models Ref. the 4.1	EUT
E-2	Adapter	N/A	CD122	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

5.1G

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48
Mode 2	802.11n/ ac40 CH38/ CH 46
Mode 3	802.11 ac80 CH 42
Mode 4	WIFI Linking (Conducted Emissions & Radiated Emissions))

Note:

- 1.The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- 2.We're testing antenna A data.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	QRCT4		
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

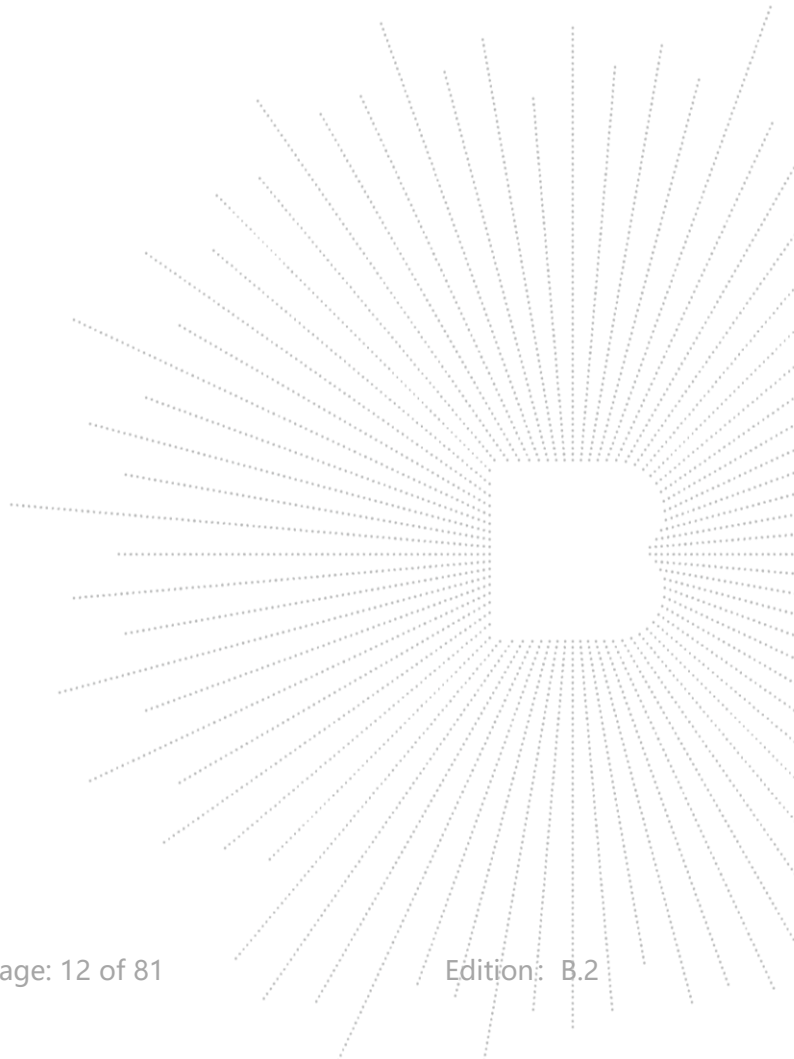

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

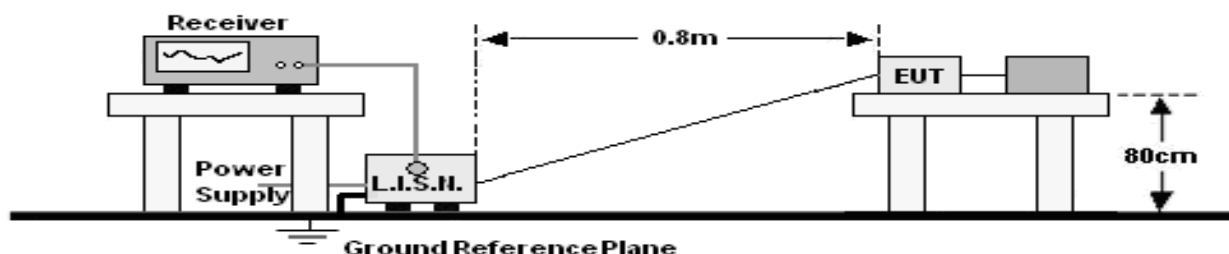

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

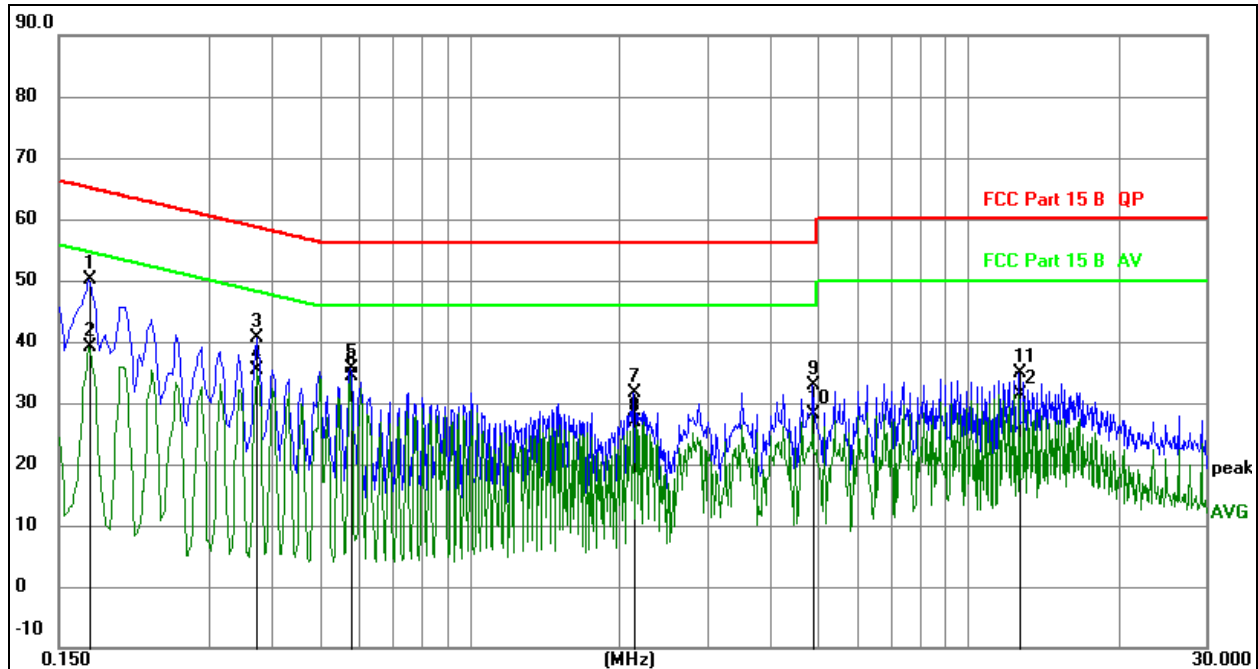


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1725	30.16	20.07	50.23	64.84	-14.61	QP
2		0.1725	19.06	20.07	39.13	54.84	-15.71	AVG
3		0.3750	20.62	20.08	40.70	58.39	-17.69	QP
4		0.3750	15.27	20.08	35.35	48.39	-13.04	AVG
5		0.5774	15.55	20.08	35.63	56.00	-20.37	QP
6	*	0.5774	14.20	20.08	34.28	46.00	-11.72	AVG
7		2.1344	11.48	20.10	31.58	56.00	-24.42	QP
8		2.1344	6.70	20.10	26.80	46.00	-19.20	AVG
9		4.8975	12.81	20.15	32.96	56.00	-23.04	QP
10		4.8975	7.94	20.15	28.09	46.00	-17.91	AVG
11		12.6780	14.59	20.24	34.83	60.00	-25.17	QP
12		12.6780	11.14	20.24	31.38	50.00	-18.62	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

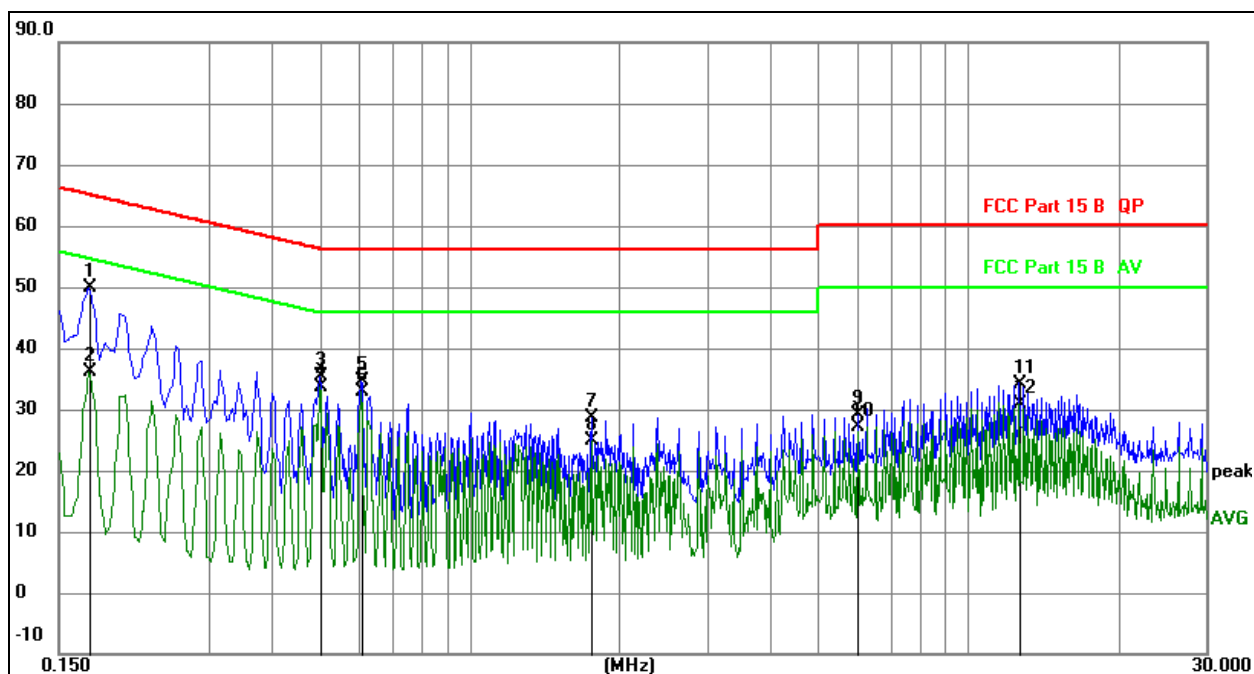

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.1725	29.82	20.07	49.89	64.84	-14.95	QP
2		0.1725	16.05	20.07	36.12	54.84	-18.72	AVG
3		0.5010	15.20	20.08	35.28	56.00	-20.72	QP
4	*	0.5010	13.64	20.08	33.72	46.00	-12.28	AVG
5		0.6044	14.42	20.09	34.51	56.00	-21.49	QP
6		0.6044	12.70	20.09	32.79	46.00	-13.21	AVG
7		1.7564	8.62	20.10	28.72	56.00	-27.28	QP
8		1.7564	4.82	20.10	24.92	46.00	-21.08	AVG
9		6.0225	8.94	20.15	29.09	60.00	-30.91	QP
10		6.0225	7.01	20.15	27.16	50.00	-22.84	AVG
11		12.6780	14.01	20.24	34.25	60.00	-25.75	QP
12		12.6780	10.58	20.24	30.82	50.00	-19.18	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

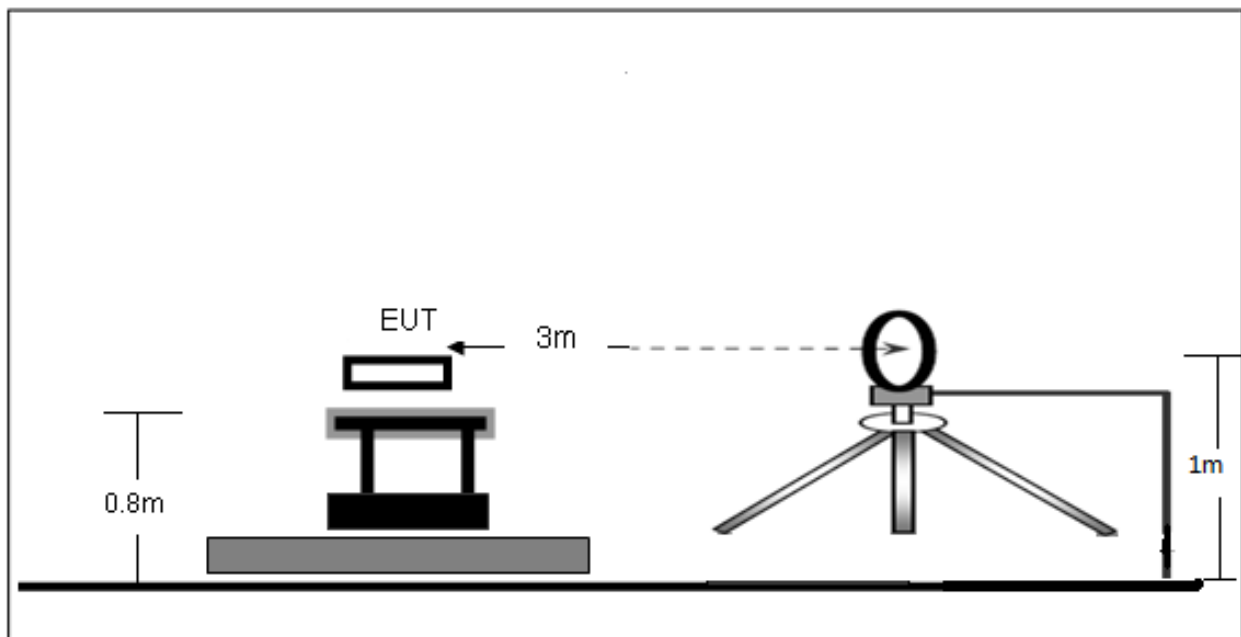

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

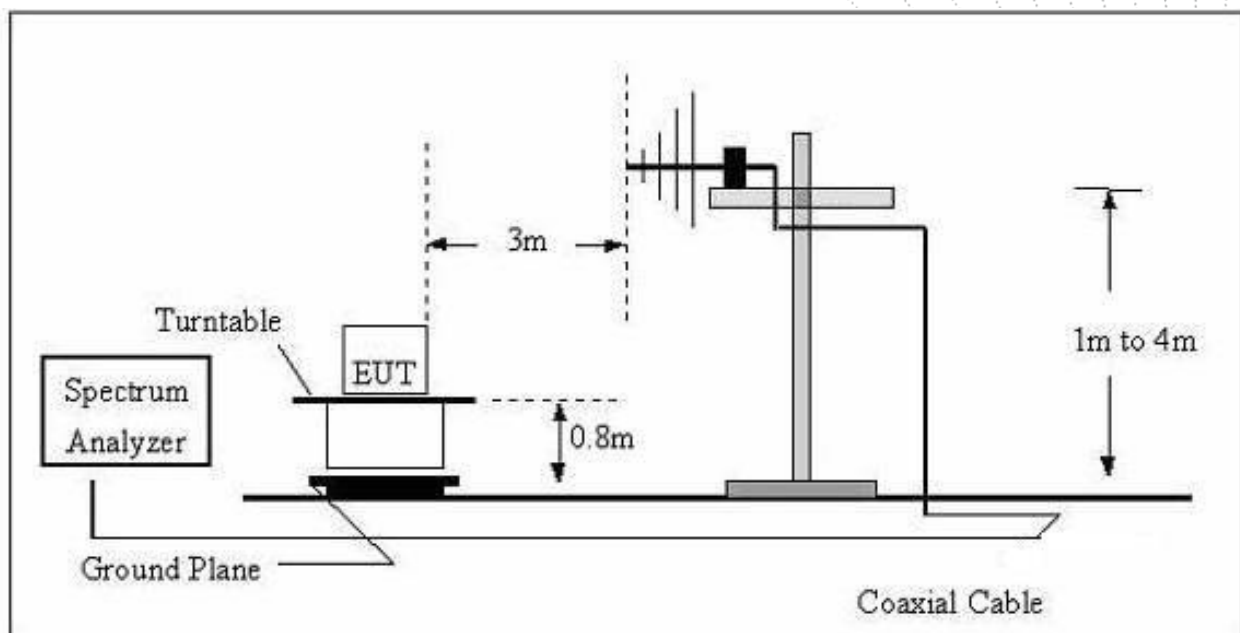

(C) Radiated Emission Test-Up Frequency Above 1GHz

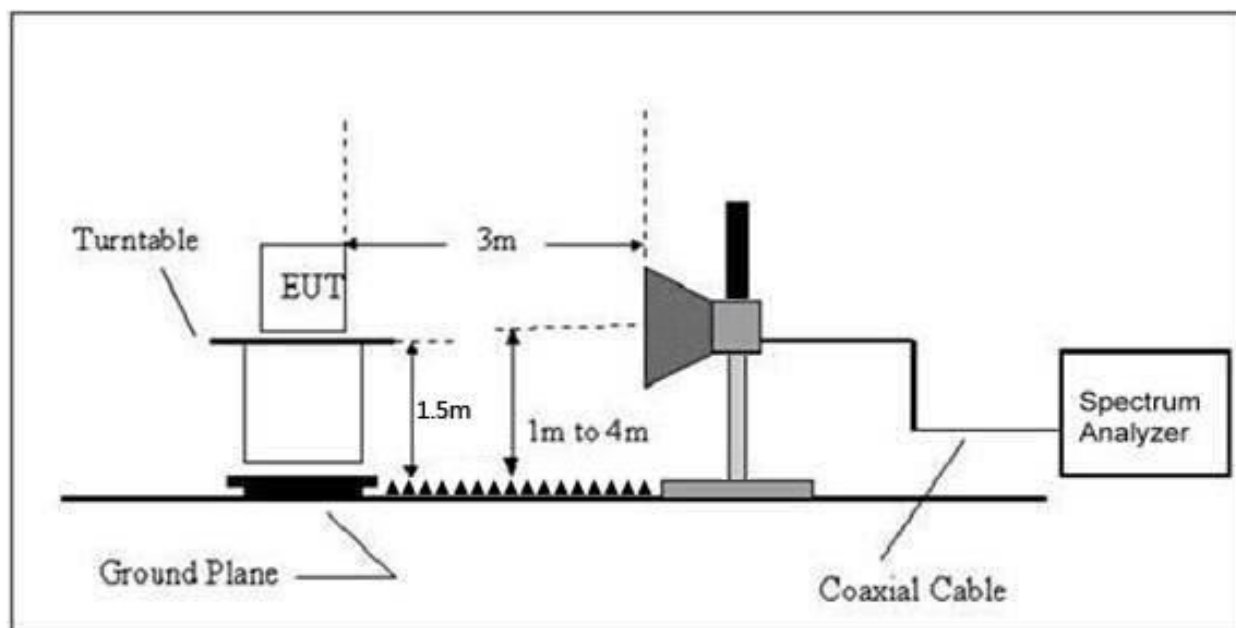

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

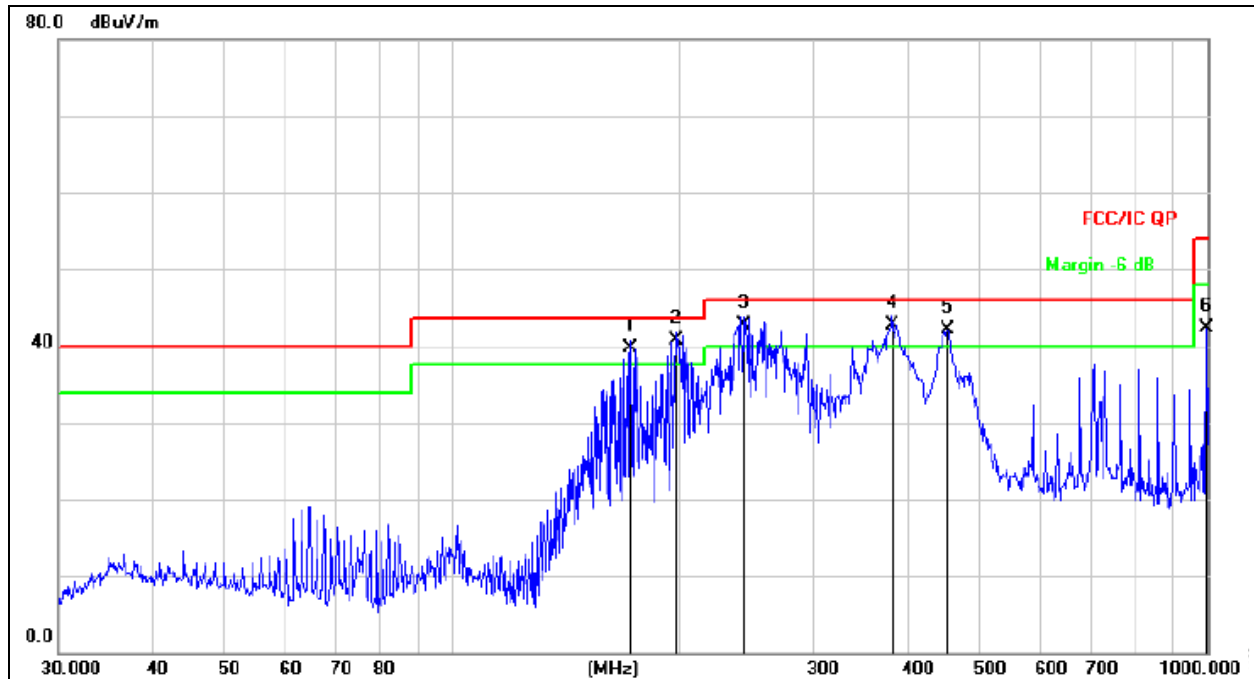


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	171.9946	57.48	-17.80	39.68	43.50	-3.82	QP
2	*	197.8928	56.57	-15.88	40.69	43.50	-2.81	QP
3	!	243.3772	57.21	-14.48	42.73	46.00	-3.27	QP
4	!	382.5879	53.74	-11.06	42.68	46.00	-3.32	QP
5	!	452.7196	51.90	-9.79	42.11	46.00	-3.89	QP
6		996.4995	44.74	-2.40	42.34	54.00	-11.66	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

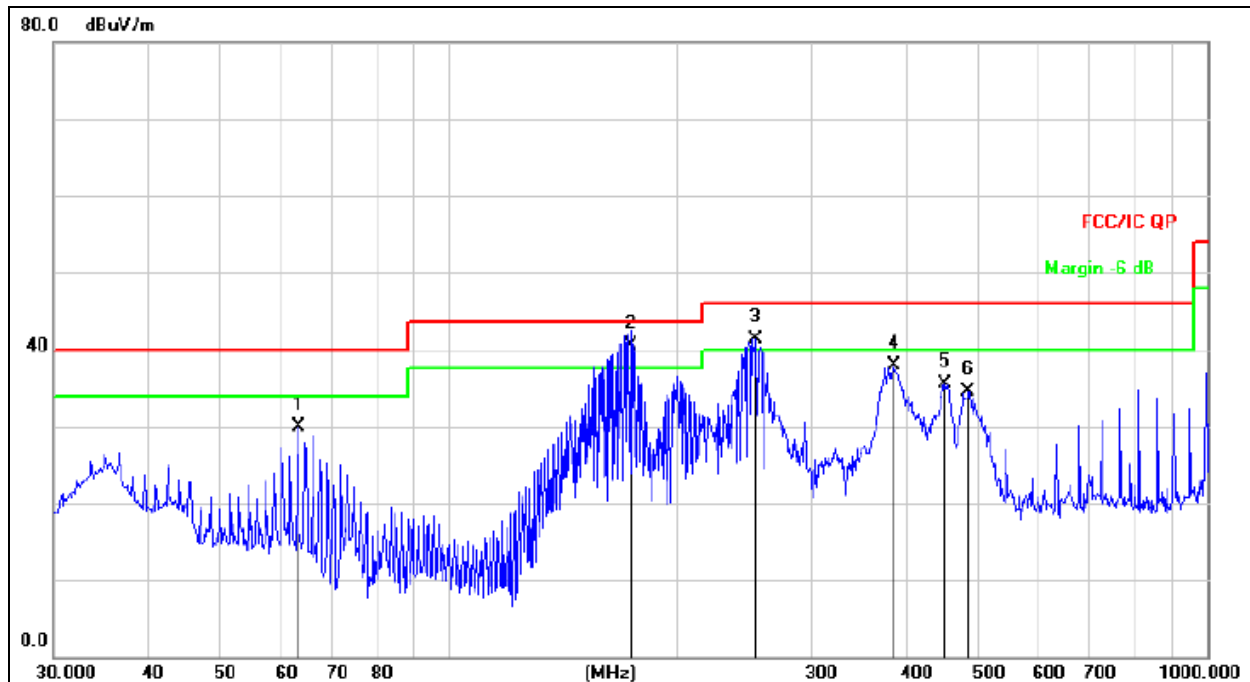

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		63.0915	46.02	-16.10	29.92	40.00	-10.08	QP
2	*	173.2050	58.15	-17.71	40.44	43.50	-3.06	QP
3	!	253.8367	55.58	-14.21	41.37	46.00	-4.63	QP
4		386.6338	48.88	-11.01	37.87	46.00	-8.13	QP
5		449.5557	45.32	-9.87	35.45	46.00	-10.55	QP
6		483.9094	43.55	-9.01	34.54	46.00	-11.46	QP

Between 1GHz – 40GHz

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
- All the modes has been tested and the worst result 802.11a recorded as below:


Test mode: 802.11a Frequency(MHz): 5180

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5149.75	H	58.33	74	45.74	54
5149.69	V	56.57	74	42.13	54

Test mode: 802.11a Frequency(MHz): 5240

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5300.65	H	46.75	74	31.88	54
5300.87	V	44.47	74	28.65	54

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp

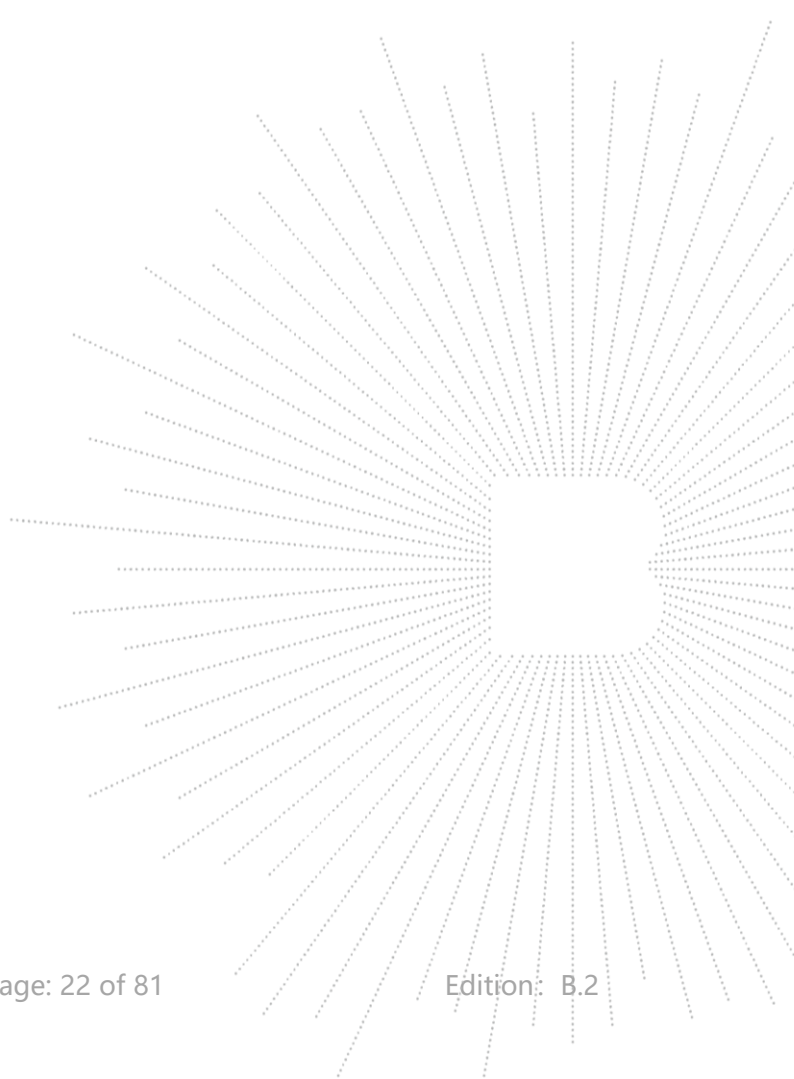

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.10	71.51	-20.73	50.78	68.20	-17.42	PK
Vertical	4434.10	59.72	-20.73	38.99	54.00	-15.01	AV
Vertical	10360.19	61.07	-9.36	51.71	68.20	-16.49	PK
Vertical	10360.19	49.88	-9.36	40.52	54.00	-13.48	AV
Vertical	15540.16	64.07	-7.84	56.23	74.00	-17.77	PK
Vertical	15540.16	49.03	-7.84	41.19	54.00	-12.81	AV
Horizontal	4434.02	74.66	-20.73	53.93	68.20	-14.27	PK
Horizontal	4434.02	59.27	-20.73	38.54	54.00	-15.46	AV
Horizontal	10360.19	63.90	-9.36	54.54	68.20	-13.66	PK
Horizontal	10360.19	49.34	-9.36	39.98	54.00	-14.02	AV
Horizontal	15540.06	60.18	-7.84	52.34	74.00	-21.66	PK
Horizontal	15540.06	49.78	-7.84	41.94	54.00	-12.06	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.04	72.47	-20.42	52.05	74.00	-21.95	PK
Vertical	4592.04	59.78	-20.42	39.36	54.00	-14.64	AV
Vertical	10400.07	60.85	-9.30	51.55	68.20	-16.65	PK
Vertical	10400.07	49.80	-9.30	40.50	54.00	-13.50	AV
Vertical	15600.03	63.68	-7.82	55.86	74.00	-18.14	PK
Vertical	15600.03	49.38	-7.82	41.56	54.00	-12.44	AV
Horizontal	4592.04	70.29	-20.42	49.88	74.00	-24.12	PK
Horizontal	4592.04	59.41	-20.42	38.99	54.00	-15.01	AV
Horizontal	10400.05	61.01	-9.30	51.71	68.20	-16.49	PK
Horizontal	10400.05	49.38	-9.30	40.08	54.00	-13.92	AV
Horizontal	15600.04	60.27	-7.82	52.45	74.00	-21.55	PK
Horizontal	15600.04	49.14	-7.82	41.32	54.00	-12.68	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.00	72.10	-20.12	51.97	74.00	-22.03	PK
Vertical	4739.00	59.59	-20.12	39.47	54.00	-14.53	AV
Vertical	10480.08	61.83	-9.18	52.65	68.20	-15.55	PK
Vertical	10480.08	49.84	-9.18	40.66	54.00	-13.34	AV
Vertical	15720.09	61.62	-7.78	53.84	74.00	-20.16	PK
Vertical	15720.09	49.32	-7.78	41.54	54.00	-12.46	AV
Horizontal	4739.14	70.72	-20.12	50.60	74.00	-23.40	PK
Horizontal	4739.14	59.05	-20.12	38.93	54.00	-15.07	AV
Horizontal	10480.05	62.66	-9.18	53.48	68.20	-14.72	PK
Horizontal	10480.05	49.90	-9.18	40.72	54.00	-13.28	AV
Horizontal	15720.20	61.54	-7.78	53.76	74.00	-20.24	PK
Horizontal	15720.20	49.89	-7.78	42.11	54.00	-11.89	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.12	70.88	-20.73	50.15	68.20	-18.05	PK
Vertical	4434.12	59.58	-20.73	38.85	54.00	-15.15	AV
Vertical	10360.19	61.25	-9.36	51.89	68.20	-16.31	PK
Vertical	10360.19	49.65	-9.36	40.29	54.00	-13.71	AV
Vertical	15540.14	63.79	-7.84	55.95	74.00	-18.05	PK
Vertical	15540.14	49.04	-7.84	41.20	54.00	-12.80	AV
Horizontal	4434.18	70.90	-20.73	50.17	68.20	-18.03	PK
Horizontal	4434.18	59.47	-20.73	38.74	54.00	-15.26	AV
Horizontal	10360.02	63.88	-9.36	54.52	68.20	-13.68	PK
Horizontal	10360.02	49.08	-9.36	39.72	54.00	-14.28	AV
Horizontal	15540.17	62.42	-7.84	54.58	74.00	-19.42	PK
Horizontal	15540.17	49.83	-7.84	41.99	54.00	-12.01	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.11	73.85	-20.42	53.44	74.00	-20.56	PK
Vertical	4592.11	59.62	-20.42	39.21	54.00	-14.79	AV
Vertical	10400.08	63.14	-9.30	53.84	68.20	-14.36	PK
Vertical	10400.08	49.52	-9.30	40.22	54.00	-13.78	AV
Vertical	15600.00	63.55	-7.82	55.73	74.00	-18.27	PK
Vertical	15600.00	49.98	-7.82	42.16	54.00	-11.84	AV
Horizontal	4592.15	70.10	-20.42	49.69	74.00	-24.31	PK
Horizontal	4592.15	59.35	-20.42	38.94	54.00	-15.06	AV
Horizontal	10400.12	64.26	-9.30	54.96	68.20	-13.24	PK
Horizontal	10400.12	49.76	-9.30	40.46	54.00	-13.54	AV
Horizontal	15600.06	61.17	-7.82	53.35	74.00	-20.65	PK
Horizontal	15600.06	49.99	-7.82	42.17	54.00	-11.83	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.20	72.84	-20.12	52.72	74.00	-21.28	PK
Vertical	4739.20	59.50	-20.12	39.38	54.00	-14.62	AV
Vertical	10480.15	63.20	-9.18	54.02	68.20	-14.18	PK
Vertical	10480.15	49.17	-9.18	39.99	54.00	-14.01	AV
Vertical	15720.20	60.68	-7.78	52.90	74.00	-21.10	PK
Vertical	15720.20	49.06	-7.78	41.28	54.00	-12.72	AV
Horizontal	4739.13	71.93	-20.12	51.81	74.00	-22.19	PK
Horizontal	4739.13	59.05	-20.12	38.93	54.00	-15.07	AV
Horizontal	10480.08	60.56	-9.18	51.38	68.20	-16.82	PK
Horizontal	10480.08	49.07	-9.18	39.89	54.00	-14.11	AV
Horizontal	15720.20	64.90	-7.78	57.12	74.00	-16.88	PK
Horizontal	15720.20	49.89	-7.78	42.11	54.00	-11.89	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.12	74.20	-20.73	53.47	68.20	-14.73	PK
Vertical	4434.12	59.44	-20.73	38.70	54.00	-15.30	AV
Vertical	10380.18	64.62	-9.33	55.29	68.20	-12.91	PK
Vertical	10380.18	49.86	-9.33	40.53	54.00	-13.47	AV
Vertical	15570.19	63.73	-7.83	55.90	74.00	-18.10	PK
Vertical	15570.19	49.08	-7.83	41.25	54.00	-12.75	AV
Horizontal	4434.06	72.25	-20.73	51.52	74.00	-22.48	PK
Horizontal	4434.06	59.36	-20.73	38.62	54.00	-15.38	AV
Horizontal	10380.00	63.08	-9.33	53.75	68.20	-14.45	PK
Horizontal	10380.00	49.54	-9.33	40.21	54.00	-13.79	AV
Horizontal	15570.04	63.70	-7.83	55.87	74.00	-18.13	PK
Horizontal	15570.04	49.24	-7.83	41.41	54.00	-12.59	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.10	74.06	-20.12	53.94	68.20	-14.26	PK
Vertical	4739.10	59.42	-20.12	39.30	54.00	-14.70	AV
Vertical	10460.05	60.97	-9.21	51.76	68.20	-16.44	PK
Vertical	10460.05	49.13	-9.21	39.92	54.00	-14.08	AV
Vertical	15690.16	61.30	-7.79	53.51	74.00	-20.49	PK
Vertical	15690.16	49.36	-7.79	41.57	54.00	-12.43	AV
Horizontal	4739.01	70.79	-20.12	50.67	68.20	-17.53	PK
Horizontal	4739.01	59.57	-20.12	39.45	54.00	-14.55	AV
Horizontal	10460.01	63.46	-9.21	54.25	68.20	-13.95	PK
Horizontal	10460.01	49.89	-9.21	40.68	54.00	-13.32	AV
Horizontal	15690.19	62.51	-7.79	54.72	74.00	-19.28	PK
Horizontal	15690.19	49.29	-7.79	41.50	54.00	-12.50	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.03	71.63	-20.73	50.90	68.20	-17.30	PK
Vertical	4434.03	59.75	-20.73	39.02	54.00	-14.98	AV
Vertical	10360.12	62.77	-9.36	53.41	68.20	-14.79	PK
Vertical	10360.12	49.01	-9.36	39.65	54.00	-14.35	AV
Vertical	15540.12	63.29	-7.84	55.45	74.00	-18.55	PK
Vertical	15540.12	49.59	-7.84	41.75	54.00	-12.25	AV
Horizontal	4434.12	73.07	-20.73	52.34	68.20	-15.86	PK
Horizontal	4434.12	59.40	-20.73	38.67	54.00	-15.33	AV
Horizontal	10360.06	60.60	-9.36	51.24	68.20	-16.96	PK
Horizontal	10360.06	49.00	-9.36	39.64	54.00	-14.36	AV
Horizontal	15540.09	62.50	-7.84	54.66	74.00	-19.34	PK
Horizontal	15540.09	49.78	-7.84	41.94	54.00	-12.06	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.02	74.70	-20.42	54.28	74.00	-19.72	PK
Vertical	4592.02	59.01	-20.42	38.60	54.00	-15.40	AV
Vertical	10400.14	63.71	-9.30	54.41	68.20	-13.79	PK
Vertical	10400.14	49.14	-9.30	39.84	54.00	-14.16	AV
Vertical	15600.12	62.87	-7.82	55.05	74.00	-18.95	PK
Vertical	15600.12	49.73	-7.82	41.91	54.00	-12.09	AV
Horizontal	4592.05	73.38	-20.42	52.96	74.00	-21.04	PK
Horizontal	4592.05	59.32	-20.42	38.91	54.00	-15.09	AV
Horizontal	10400.17	62.96	-9.30	53.66	68.20	-14.54	PK
Horizontal	10400.17	49.12	-9.30	39.82	54.00	-14.18	AV
Horizontal	15600.03	60.86	-7.82	53.04	74.00	-20.96	PK
Horizontal	15600.03	49.11	-7.82	41.29	54.00	-12.71	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.14	71.53	-20.12	51.41	74.00	-22.59	PK
Vertical	4739.14	59.30	-20.12	39.18	54.00	-14.82	AV
Vertical	10480.14	63.48	-9.18	54.30	68.20	-13.90	PK
Vertical	10480.14	49.19	-9.18	40.01	54.00	-13.99	AV
Vertical	15720.03	61.36	-7.78	53.58	74.00	-20.42	PK
Vertical	15720.03	49.29	-7.78	41.51	54.00	-12.49	AV
Horizontal	4739.01	71.76	-20.12	51.64	74.00	-22.36	PK
Horizontal	4739.01	59.68	-20.12	39.56	54.00	-14.44	AV
Horizontal	10480.12	61.11	-9.18	51.93	68.20	-16.27	PK
Horizontal	10480.12	49.77	-9.18	40.59	54.00	-13.41	AV
Horizontal	15720.15	63.76	-7.78	55.98	74.00	-18.02	PK
Horizontal	15720.15	49.37	-7.78	41.59	54.00	-12.41	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.01	71.09	-20.73	50.36	68.20	-17.84	PK
Vertical	4434.01	59.72	-20.73	38.98	54.00	-15.02	AV
Vertical	10380.11	61.05	-9.33	51.72	68.20	-16.48	PK
Vertical	10380.11	49.20	-9.33	39.87	54.00	-14.13	AV
Vertical	15570.19	63.15	-7.83	55.32	74.00	-18.68	PK
Vertical	15570.19	49.98	-7.83	42.15	54.00	-11.85	AV
Horizontal	4434.14	71.58	-20.73	50.85	74.00	-23.15	PK
Horizontal	4434.14	59.22	-20.73	38.49	54.00	-15.51	AV
Horizontal	10380.03	63.61	-9.33	54.28	68.20	-13.92	PK
Horizontal	10380.03	49.03	-9.33	39.70	54.00	-14.30	AV
Horizontal	15570.06	62.38	-7.83	54.55	74.00	-19.45	PK
Horizontal	15570.06	49.35	-7.83	41.52	54.00	-12.48	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.18	70.09	-20.12	49.97	68.20	-18.23	PK
Vertical	4739.18	59.33	-20.12	39.21	54.00	-14.79	AV
Vertical	10460.08	64.43	-9.21	55.22	68.20	-12.98	PK
Vertical	10460.08	49.94	-9.21	40.73	54.00	-13.27	AV
Vertical	15690.08	60.72	-7.79	52.93	74.00	-21.07	PK
Vertical	15690.08	49.14	-7.79	41.35	54.00	-12.65	AV
Horizontal	4739.08	73.33	-20.12	53.21	68.20	-14.99	PK
Horizontal	4739.08	59.75	-20.12	39.63	54.00	-14.37	AV
Horizontal	10460.14	62.49	-9.21	53.28	68.20	-14.92	PK
Horizontal	10460.14	49.20	-9.21	39.99	54.00	-14.01	AV
Horizontal	15690.20	64.12	-7.79	56.33	74.00	-17.67	PK
Horizontal	15690.20	49.66	-7.79	41.87	54.00	-12.13	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT80
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G							
Vertical	4434.11	72.15	-20.73	51.41	68.20	-16.79	PK
Vertical	4434.11	59.50	-20.73	38.77	54.00	-15.23	AV
Vertical	10420.14	62.44	-9.27	53.17	68.20	-15.03	PK
Vertical	10420.14	49.72	-9.27	40.45	54.00	-13.55	AV
Vertical	15630.00	64.08	-7.81	56.27	74.00	-17.73	PK
Vertical	15630.00	49.83	-7.81	42.02	54.00	-11.98	AV
Horizontal	4434.01	70.32	-20.73	49.59	68.20	-18.61	PK
Horizontal	4434.01	49.24	-20.73	28.51	54.00	-25.49	AV
Horizontal	10420.12	44.67	9.27	53.94	68.20	-14.26	PK
Horizontal	10420.12	29.36	9.27	38.63	54.00	-15.37	AV
Horizontal	15630.09	64.13	-7.81	56.32	74.00	-17.68	PK
Horizontal	15630.09	49.09	-7.81	41.28	54.00	-12.72	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

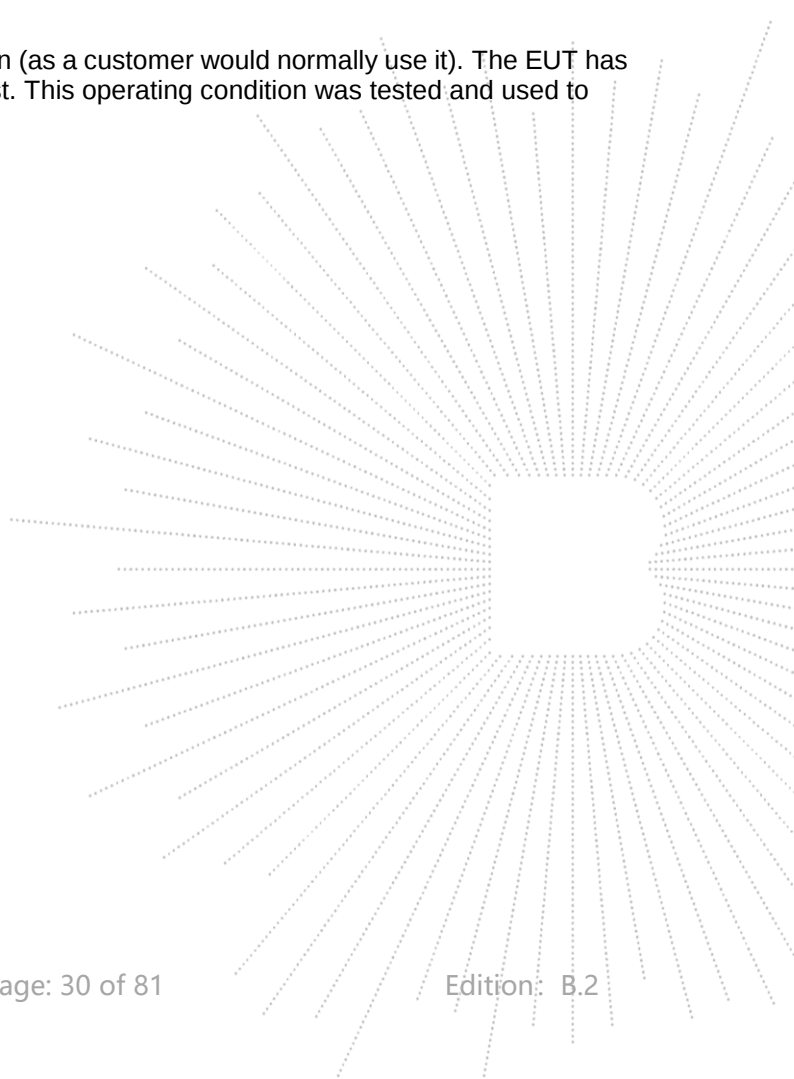



8.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 3.8V
Test Mode:	(5180-5240MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-4.78	11	Pass
NVNT	a	5200	-4.91	11	Pass
NVNT	a	5240	-5.08	11	Pass
NVNT	n20	5180	-6.02	11	Pass
NVNT	n20	5200	-6.25	11	Pass
NVNT	n20	5240	-6.24	11	Pass
NVNT	n40	5190	-10.24	11	Pass
NVNT	n40	5230	-10.37	11	Pass
NVNT	ac20	5180	-5.89	11	Pass
NVNT	ac20	5200	-5.77	11	Pass
NVNT	ac20	5240	-5.95	11	Pass
NVNT	ac40	5190	-10.19	11	Pass
NVNT	ac40	5230	-10.32	11	Pass
NVNT	ac80	5210	-13.83	11	Pass


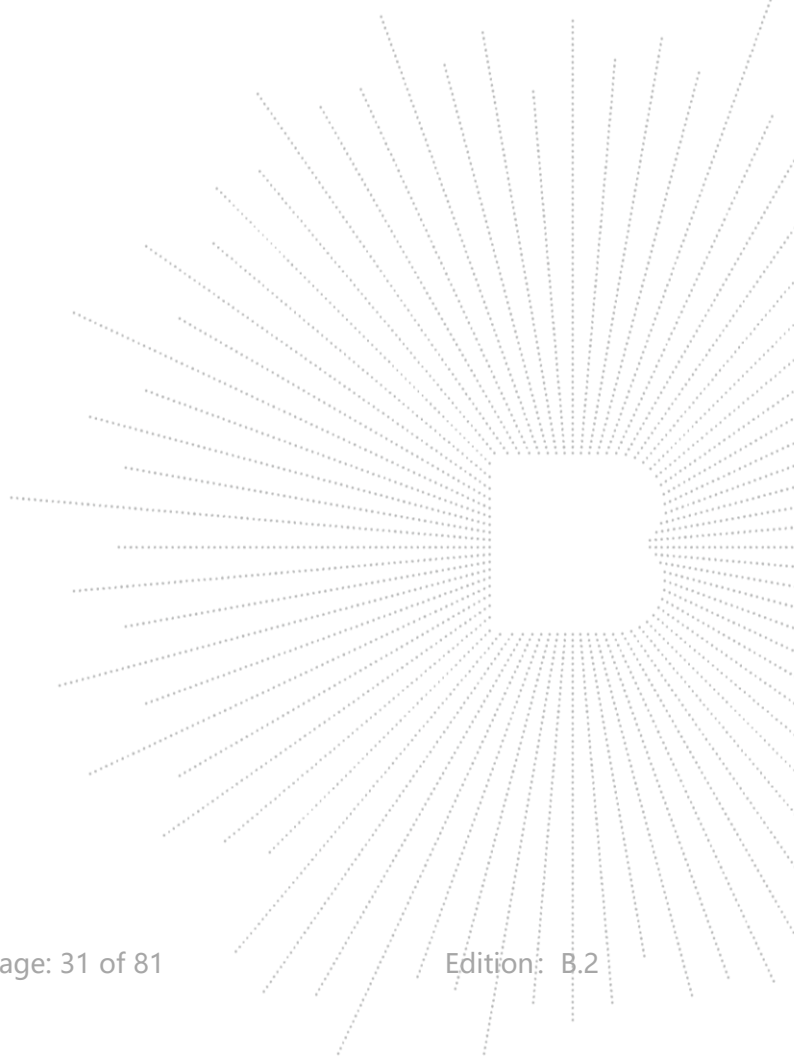






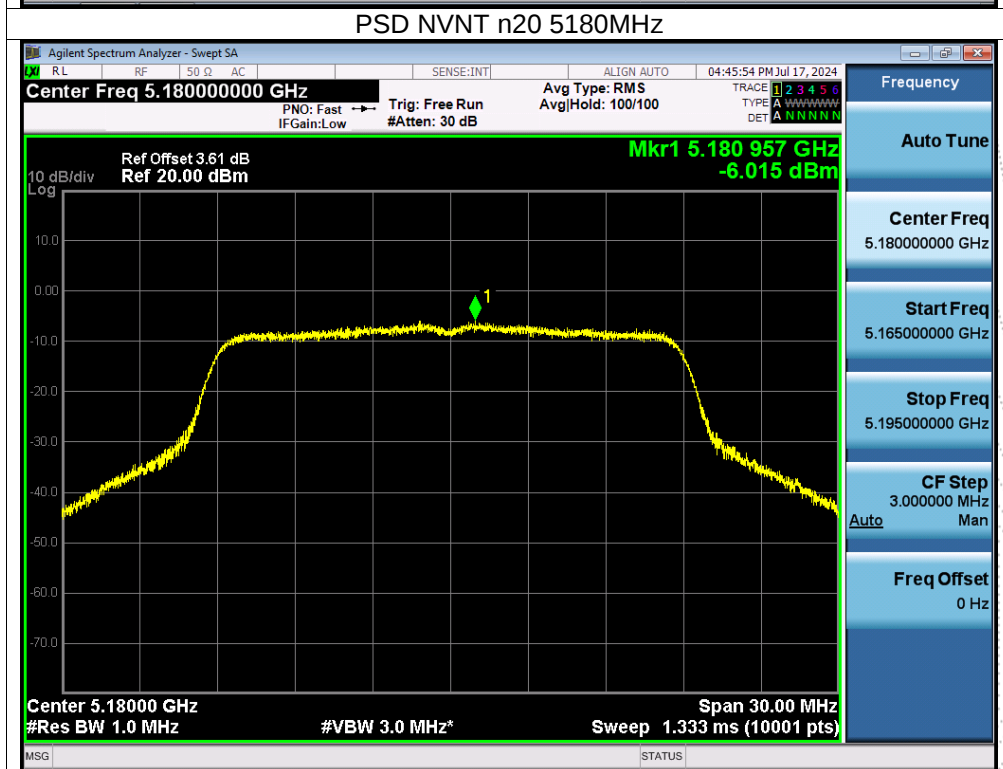
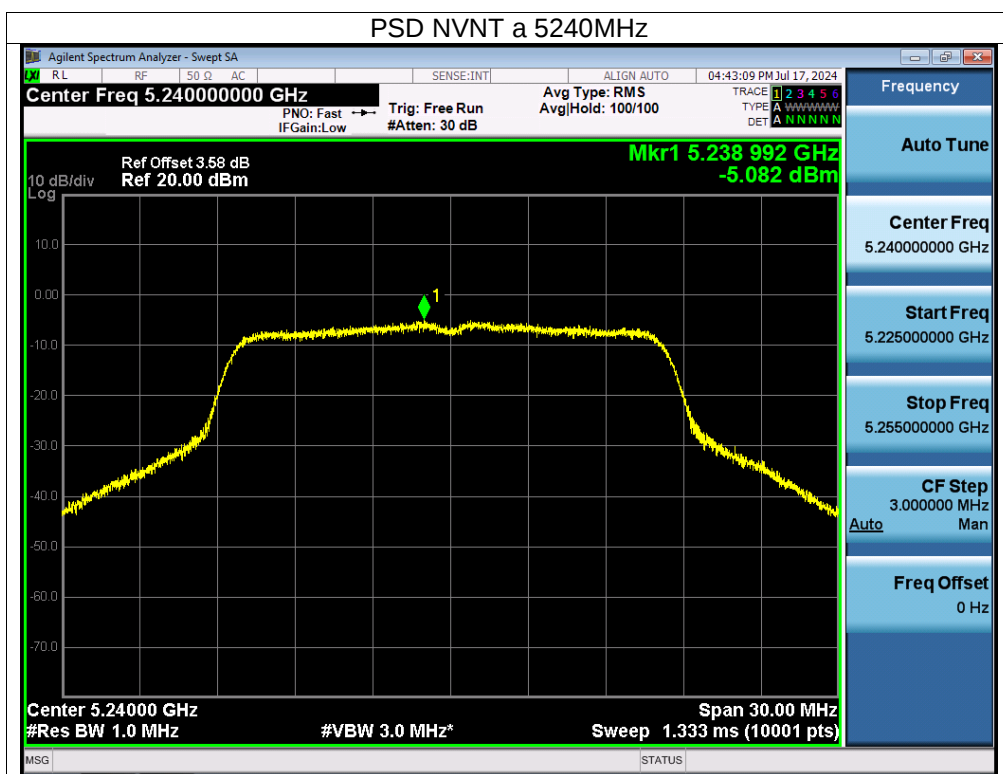


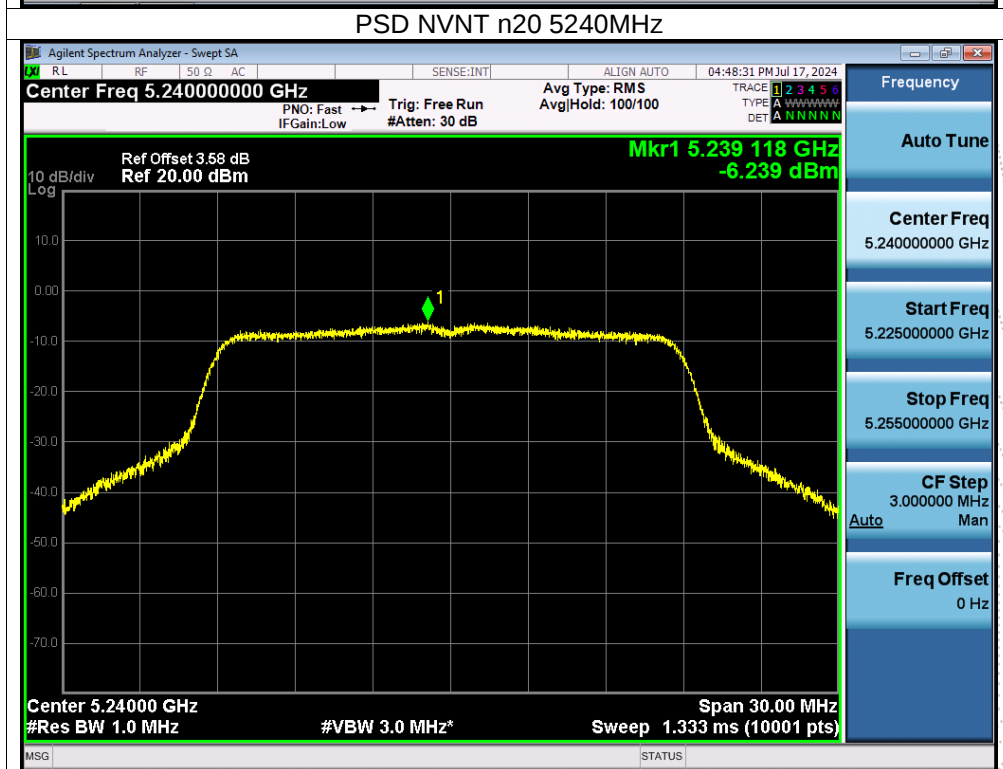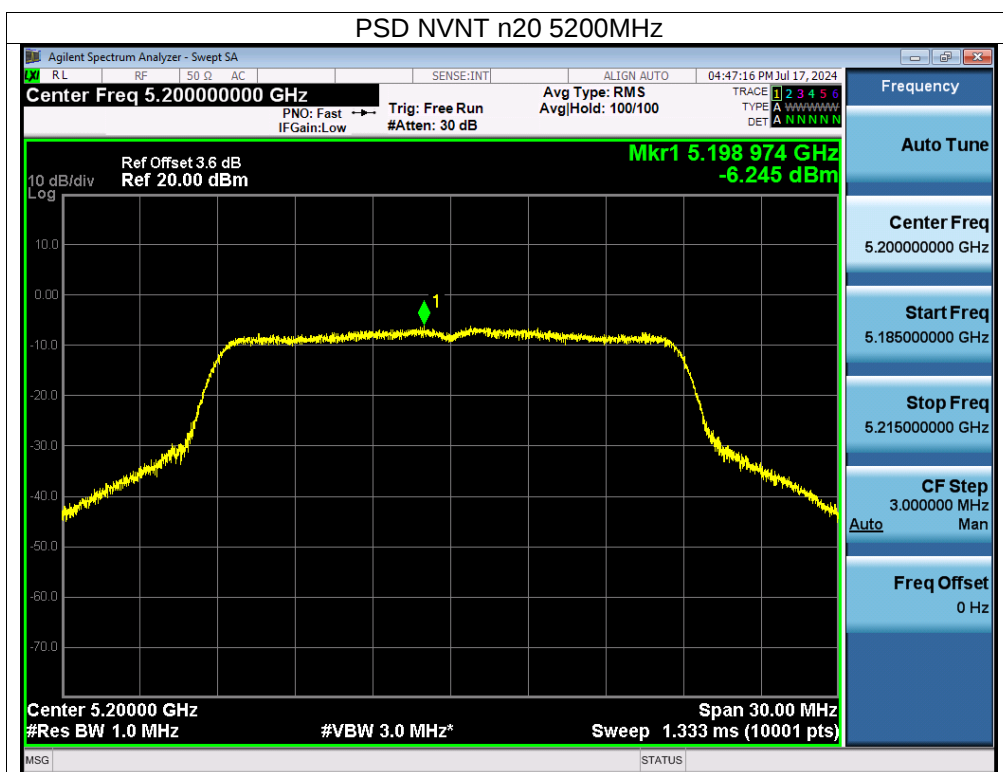

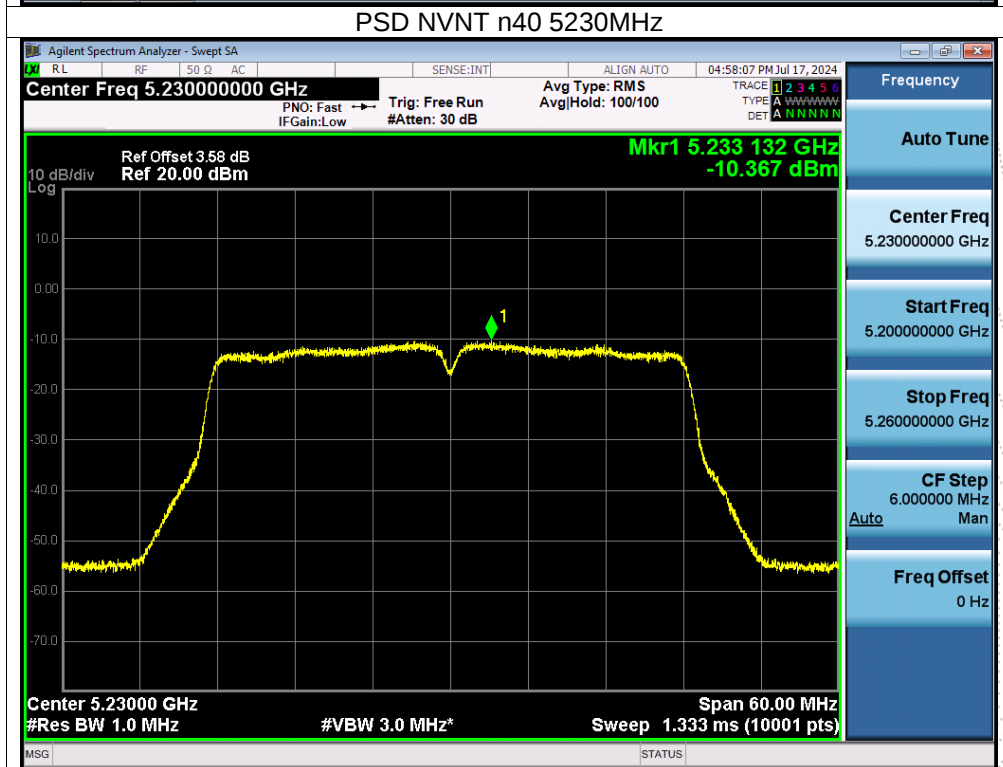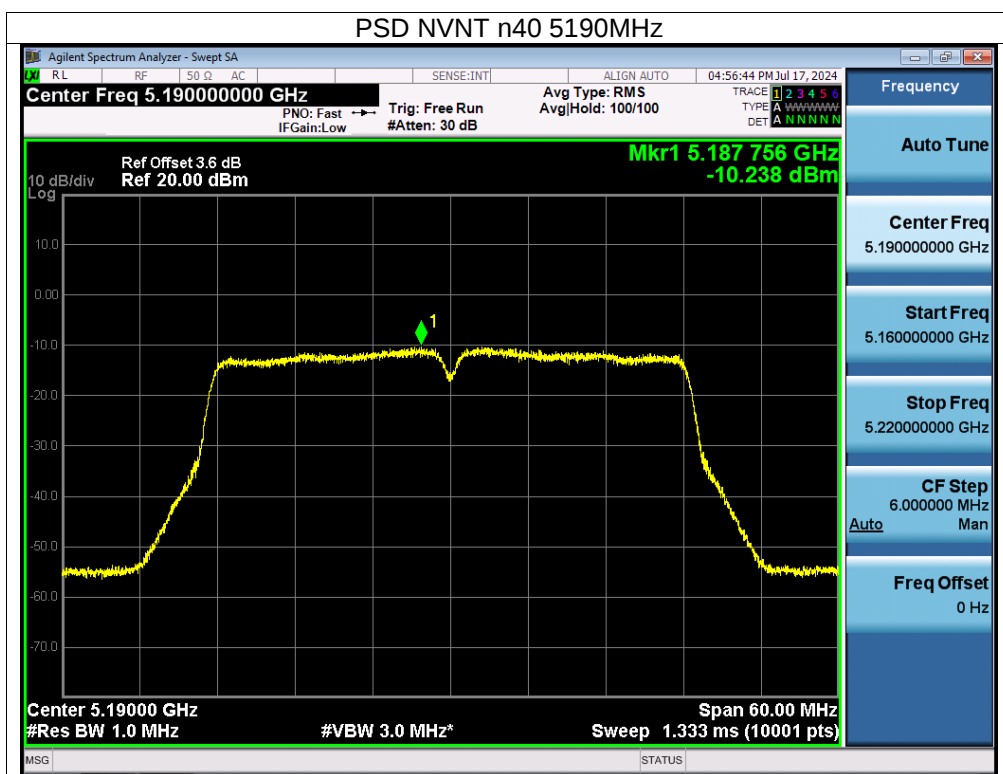

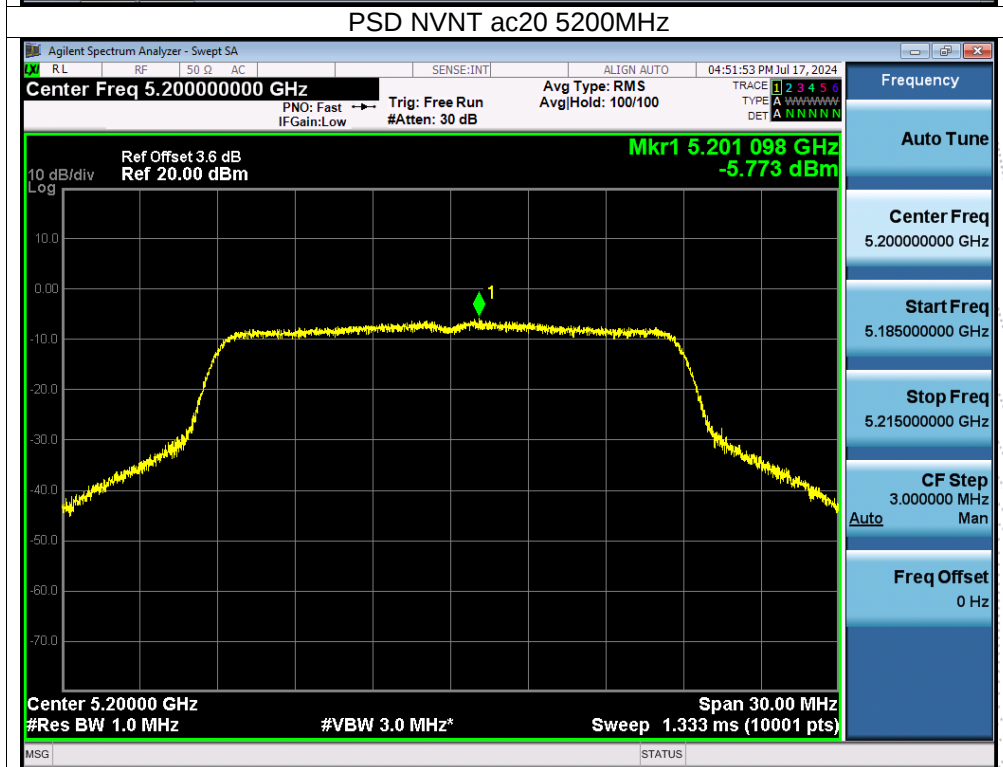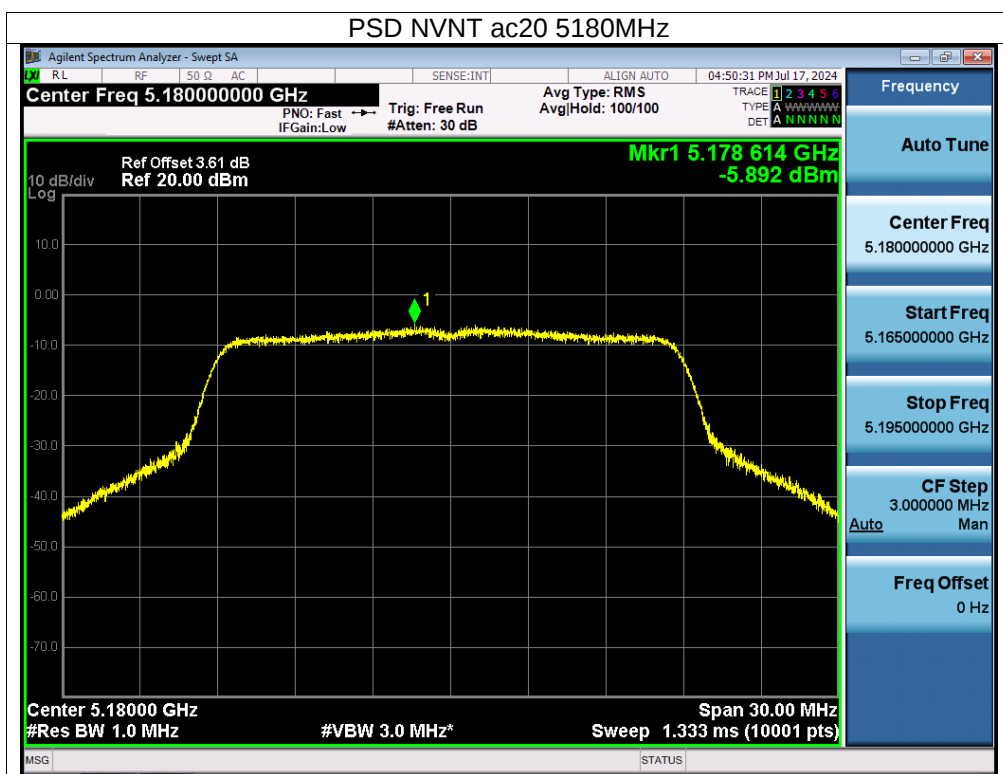


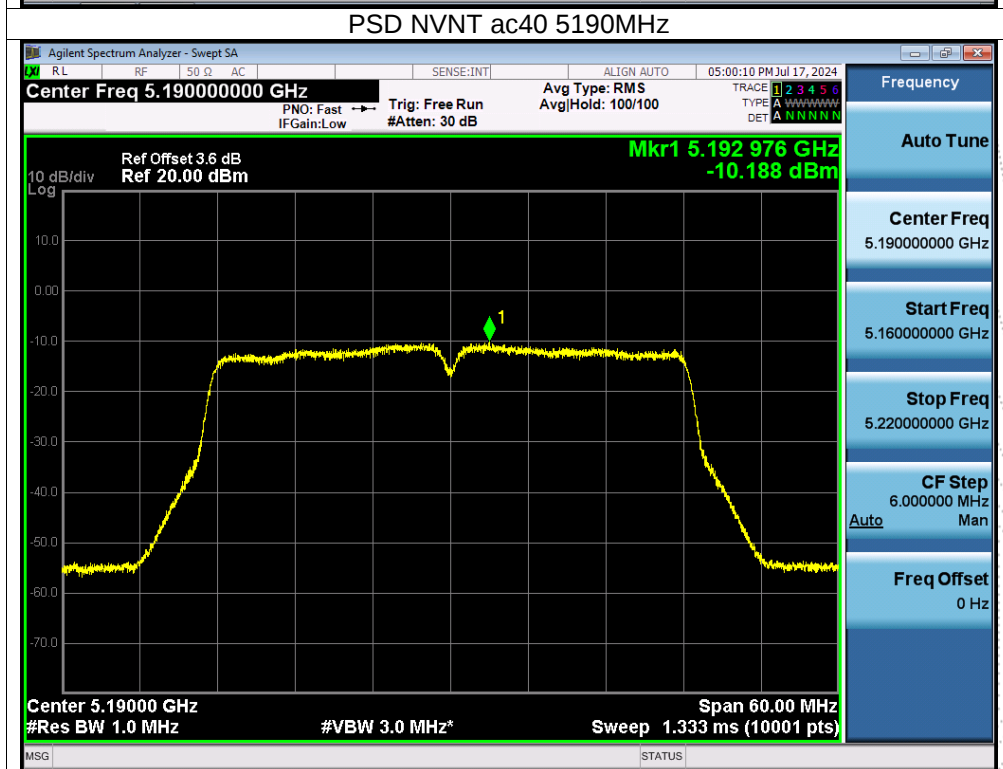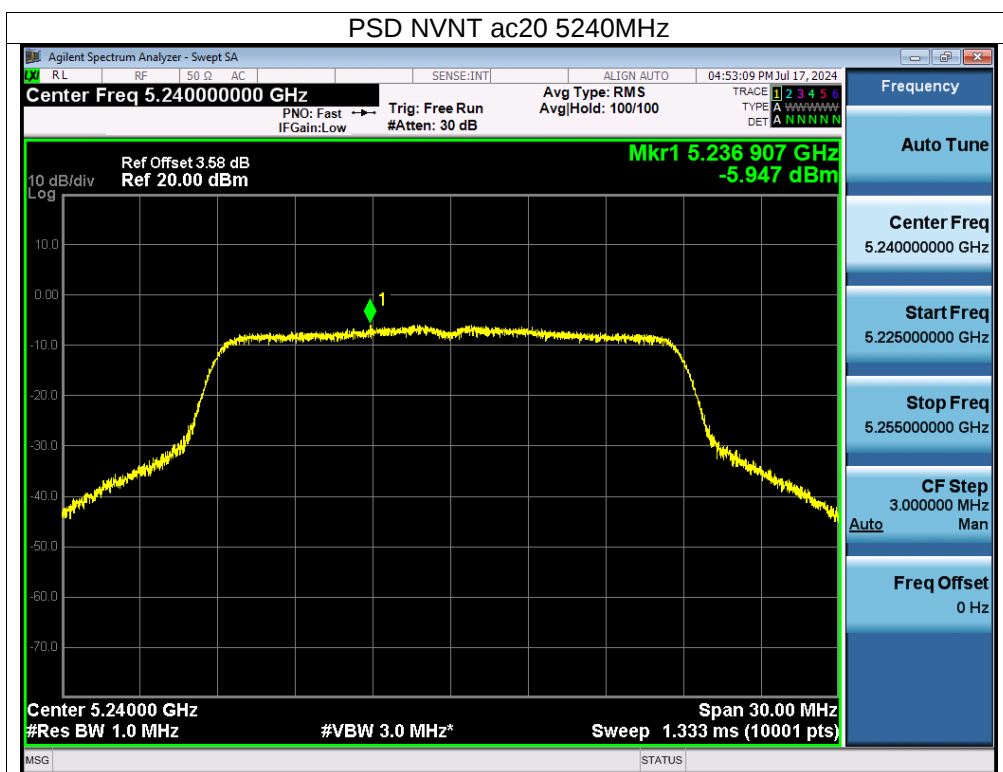

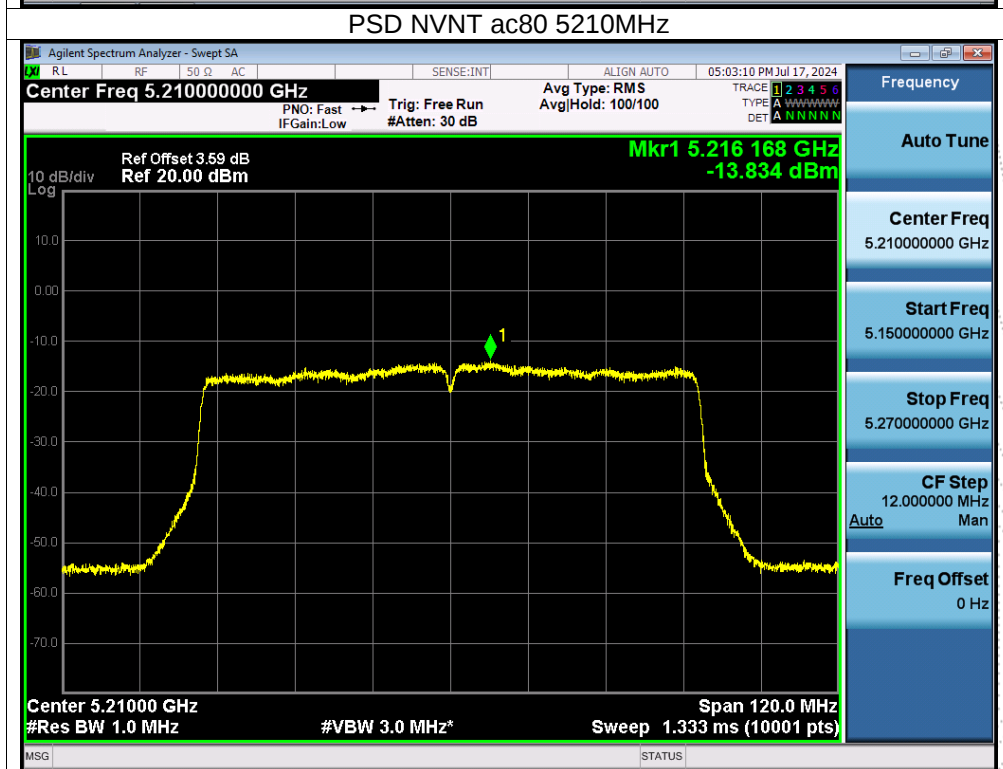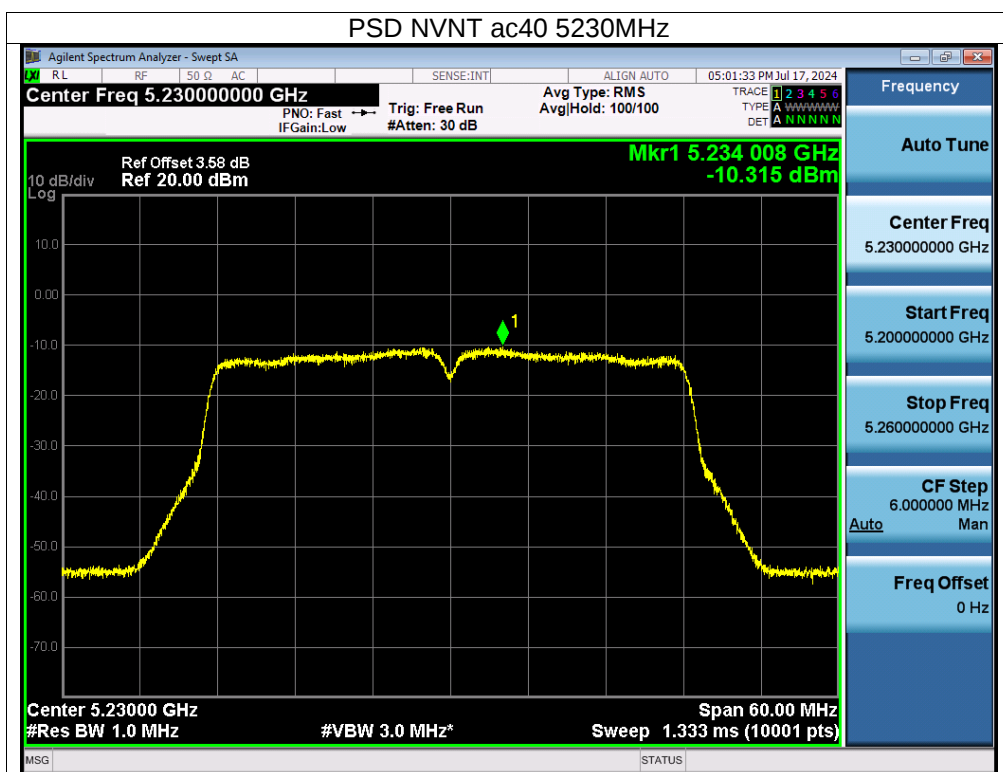

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

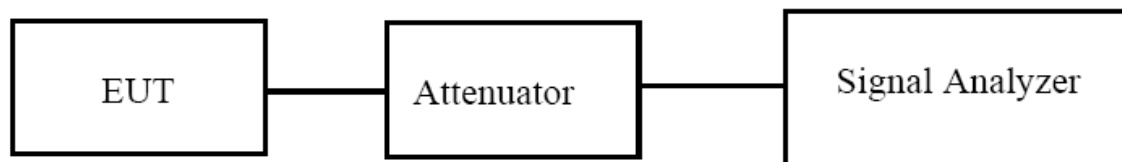

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.
(6dB bandwidth)>500kHz

9.3 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 3.8V
Test Mode:	(5180-5240MHz)		

Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
NVNT	a	5180	16.49	21.49	Pass
NVNT	a	5200	16.508	22.856	Pass
NVNT	a	5240	16.514	21.639	Pass
NVNT	n20	5180	17.71	22.278	Pass
NVNT	n20	5200	17.752	22.231	Pass
NVNT	n20	5240	17.728	23.378	Pass
NVNT	n40	5190	36.14	41.311	Pass
NVNT	n40	5230	36.173	40.7	Pass
NVNT	ac20	5180	17.716	21.867	Pass
NVNT	ac20	5200	17.736	21.882	Pass
NVNT	ac20	5240	17.723	21.927	Pass
NVNT	ac40	5190	36.202	41.504	Pass
NVNT	ac40	5230	36.112	40.909	Pass
NVNT	ac80	5210	75.598	82.4	Pass

