



FCC Part 15C Test Report

FCC ID: 2BK9QFD-008

Applicant: Kaiping Futuo Sanitary Ware Co., Ltd

Address: No. L1-1, No.3 Industrial Park, Shuikou Town, Kaiping City, Guangdong Province , China

Manufacturer: Kaiping Futuo Sanitary Ware Co., Ltd

Address: No. L1-1, No.3 Industrial Park, Shuikou Town, Kaiping City, Guangdong Province , China

EUT: ELECTRIC TOWEL WARMER

Trade Mark: SAILAINUO

Model Number: FD-008, FK-015,FK-035,FK-001,FK002,FK-007,FK-008,FK-004

Date of Receipt: August. 26, 2024

Test Date: August. 26, 2024 – September. 10, 2024

Date of Report: September. 10, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-240708045EA

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.205	Band Edge Emission	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	ELECTRIC TOWEL WARMER
Trademark	SAILAINUO
Model No.:	FD-008, FK-015, FK-035, FK-001, FK-002, FK-007, FK-008, FK-004
Model Difference	PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
BT Version:	4.2
Operation Frequency:	2402~2480MHz
Channel numbers:	40 Channels
Channel separation:	2M
Modulation technology:	GFSK
Operation Frequency:	2412MHz~2462MHz
Channel numbers:	11 Channels for 20MHz bandwidth 7 Channels for 20MHz bandwidth
Channel separation:	5M
Modulation technology:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK); IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK); IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	Input 100V~250V~, 50/60Hz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. The EUT's all information provided by client.

2. Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	23	2444
02	2404	12	2424	24	2446
~	~	~	~		
9	2418	20	2440	39	2478
10	2420	21	2442	40	2480



2.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40
Mode 4	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode
For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note

Item	Shielded Type	Ferrite Core	Length	Note

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	cmd		
Frequency	2402 MHz	2440MHz	2480 MHz
Power Setting of Softwave	10	10	10



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Dec. 06, 2023	Dec. 07, 2024
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Dec. 06, 2023	Dec. 07, 2024
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Dec. 06, 2023	Dec. 07, 2024
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Dec. 06, 2023	Dec. 07, 2024
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Dec. 06, 2023	Dec. 07, 2024
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Dec. 06, 2023	Dec. 07, 2024
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Dec. 06, 2023	Dec. 07, 2024
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Dec. 06, 2023	Dec. 07, 2024
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Dec. 06, 2023	Dec. 07, 2024
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Dec. 06, 2023	Dec. 07, 2024
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Dec. 06, 2023	Dec. 07, 2024
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Dec. 06, 2023	Dec. 07, 2024
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Dec. 06, 2023	Dec. 07, 2024
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Dec. 06, 2023	Dec. 07, 2024
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Dec. 06, 2023	Dec. 07, 2024
16	D.C. Power Supply	LongWei	PS-305D	010964729	Dec. 06, 2023	Dec. 07, 2024
17	Antenna Mast	HaiYue	TPAM-4A	4265214	Dec. 06, 2023	Dec. 07, 2024

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 24, 2022	Nov. 23, 2025
2	EMI Receiver	R&S	ESR	101421	Dec. 07, 2023	Dec. 06, 2024
3	LISN	R&S	ENV216	102417	Dec. 07, 2023	Dec. 06, 2024
4	843 Cable 1#	ChengYu	CE Cable	001	Dec. 07, 2023	Dec. 06, 2024
5	Pulse Limiter	R&S	VTSD 9561F	12561	Dec. 07, 2023	Dec. 06, 2024

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

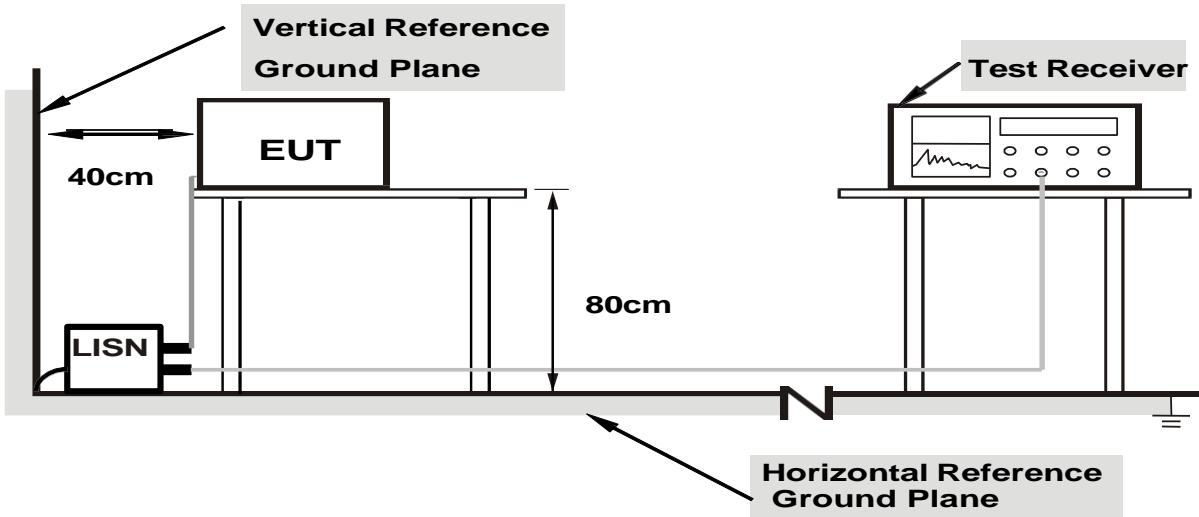

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$CD (\text{dBuV}) = RA (\text{dBuV}) + PL (\text{dB}) + CL (\text{dB})$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

3.1.6 TEST RESULTS




Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

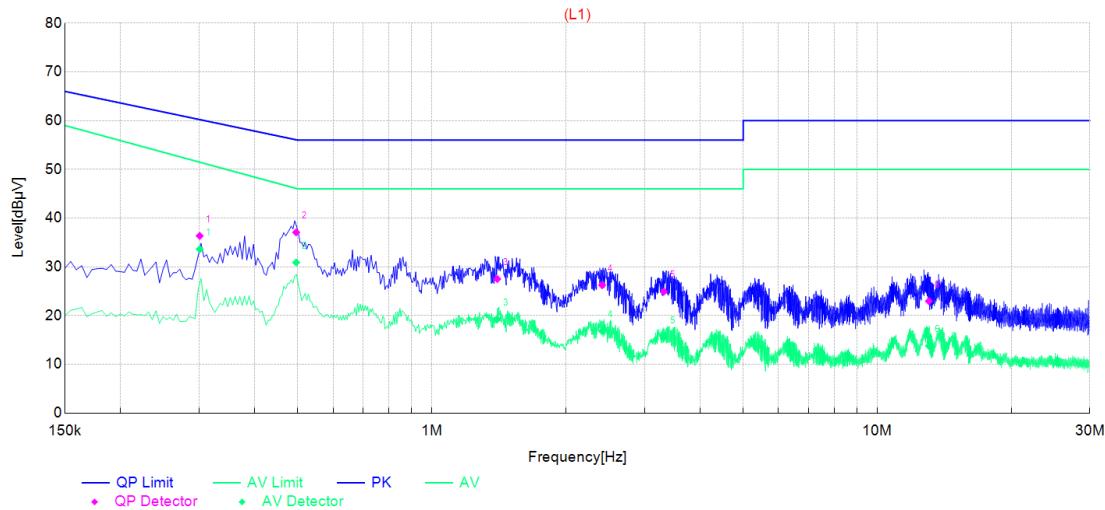

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line
1 ^o	0.3010 ^o	26.25 ^o	23.52 ^o	10.10 ^o	36.35 ^o	33.62 ^o	60.21 ^o	51.48 ^o	23.86 ^o	17.86 ^o	L1 ^o
2 ^o	0.4957 ^o	26.82 ^o	20.64 ^o	10.26 ^o	37.08 ^o	30.90 ^o	56.07 ^o	46.09 ^o	18.99 ^o	15.19 ^o	L1 ^o
3 ^o	1.4017 ^o	17.29 ^o	9.03 ^o	10.23 ^o	27.52 ^o	19.26 ^o	56.00 ^o	46.00 ^o	28.48 ^o	26.74 ^o	L1 ^o
4 ^o	2.4110 ^o	15.95 ^o	6.54 ^o	10.30 ^o	26.25 ^o	16.84 ^o	56.00 ^o	46.00 ^o	29.75 ^o	29.16 ^o	L1 ^o
5 ^o	3.3175 ^o	14.57 ^o	5.27 ^o	10.35 ^o	24.92 ^o	15.62 ^o	56.00 ^o	46.00 ^o	31.08 ^o	30.38 ^o	L1 ^o
6 ^o	13.0632 ^o	12.05 ^o	2.88 ^o	10.91 ^o	22.96 ^o	13.79 ^o	60.00 ^o	50.00 ^o	37.04 ^o	36.21 ^o	L1 ^o



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

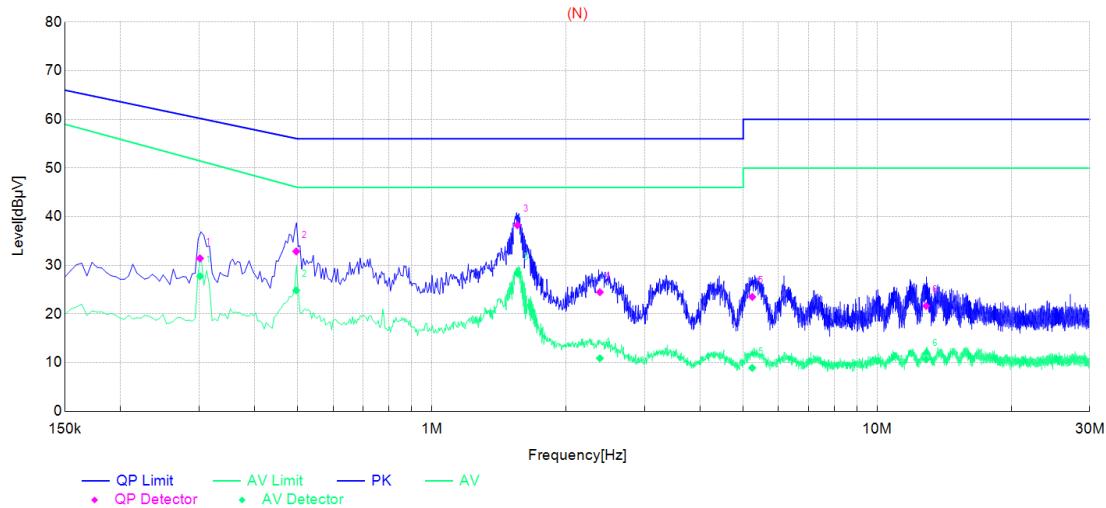

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line
1 ^o	0.3015 ^o	21.33 ^o	17.67 ^o	10.10 ^o	31.43 ^o	27.77 ^o	60.20 ^o	51.46 ^o	28.77 ^o	23.69 ^o	N ^o
2 ^o	0.4958 ^o	22.60 ^o	14.58 ^o	10.26 ^o	32.86 ^o	24.84 ^o	56.07 ^o	46.09 ^o	23.21 ^o	21.25 ^o	N ^o
3 ^o	1.5557 ^o	28.00 ^o	18.12 ^o	10.24 ^o	38.24 ^o	28.36 ^o	56.00 ^o	46.00 ^o	17.76 ^o	17.64 ^o	N ^o
4 ^o	2.3828 ^o	14.19 ^o	0.60 ^o	10.30 ^o	24.49 ^o	10.90 ^o	56.00 ^o	46.00 ^o	31.51 ^o	35.10 ^o	N ^o
5 ^o	5.2391 ^o	13.13 ^o	-1.45 ^o	10.38 ^o	23.51 ^o	8.93 ^o	60.00 ^o	50.00 ^o	36.49 ^o	41.07 ^o	N ^o
6 ^o	12.8763 ^o	10.74 ^o	-0.23 ^o	10.90 ^o	21.64 ^o	10.67 ^o	60.00 ^o	50.00 ^o	38.36 ^o	39.33 ^o	N ^o

Remark:

1. Result (dB μ V) = Reading (dB μ V) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

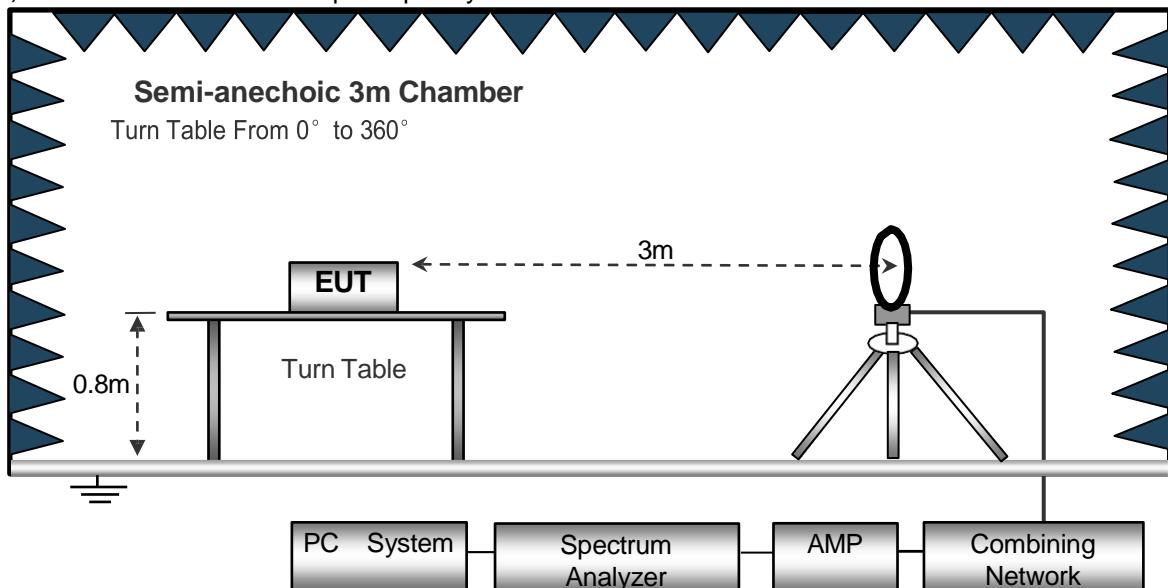

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

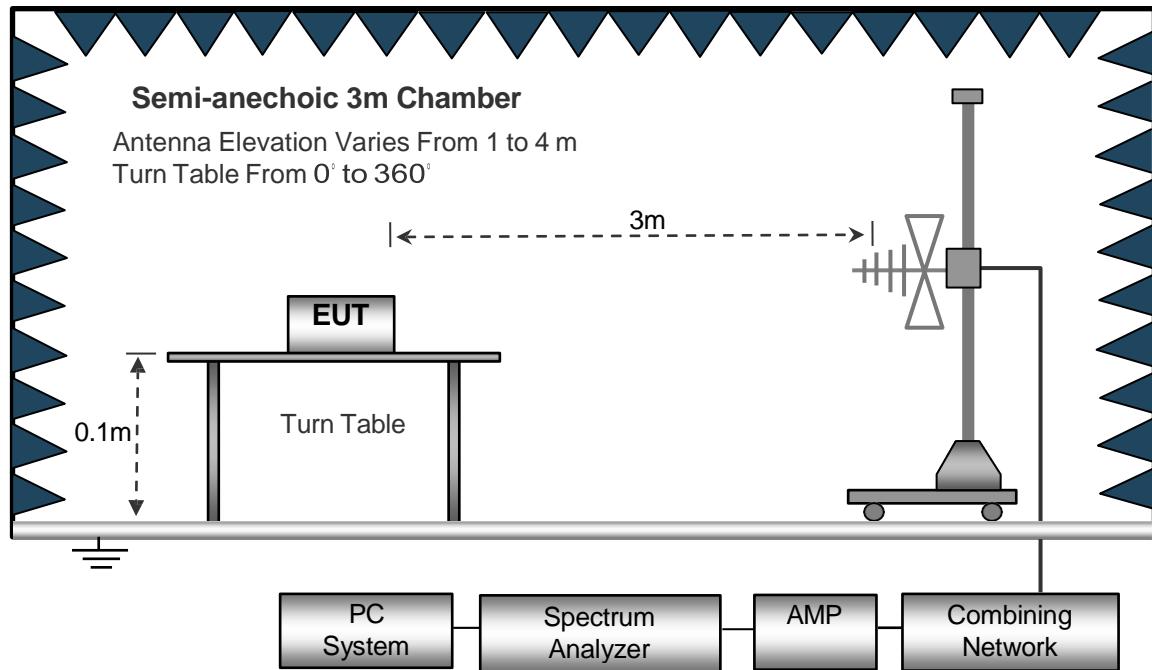

(C) Radiated Emission Test-Up Frequency Above 1GHz

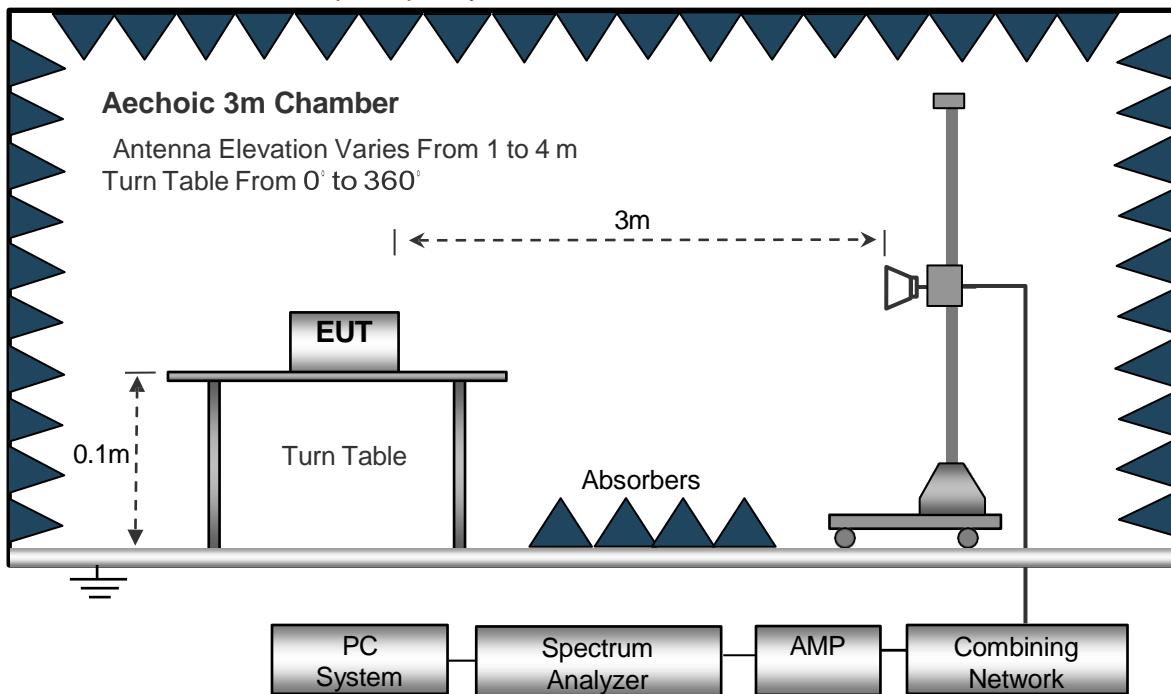

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log \left(\frac{\text{specific distance}}{\text{test distance}} \right) \text{ (dB)}$;

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$\text{FS (dBuV/m)} = \text{RA (dBuV)} + \text{AF (dB/m)} + \text{CL (dB)} - \text{AG (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

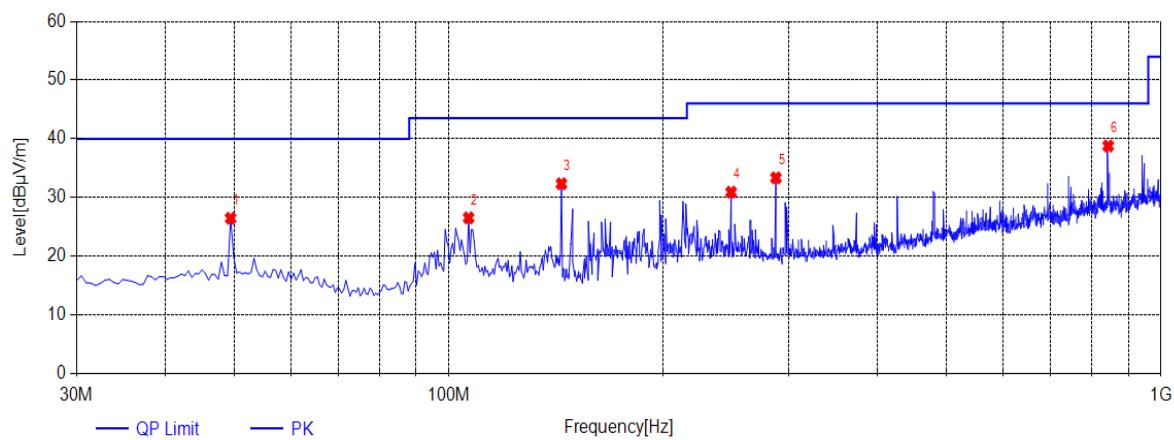


● QP Detector

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Remark
1 ^①	49.4 ^①	37.35 ^①	-10.91 ^①	26.44 ^①	40.00 ^①	13.56 ^①	QP ^①	Horizonta	PASS ^①
2 ^①	106.63 ^①	37.80 ^①	-11.29 ^①	26.51 ^①	43.50 ^①	16.99 ^①	QP ^①	Horizonta	PASS ^①
3 ^①	143.975 ^①	46.59 ^①	-14.27 ^①	32.32 ^①	43.50 ^①	11.18 ^①	QP ^①	Horizonta	PASS ^①
4 ^①	249.22 ^①	39.63 ^①	-8.74 ^①	30.89 ^①	46.00 ^①	15.11 ^①	QP ^①	Horizonta	PASS ^①
5 ^①	288.02 ^①	41.02 ^①	-7.69 ^①	33.33 ^①	46.00 ^①	12.67 ^①	QP ^①	Horizonta	PASS ^①
6 ^①	843.345 ^①	37.04 ^①	1.73 ^①	38.77 ^①	46.00 ^①	7.23 ^①	QP ^①	Horizonta	PASS ^①



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

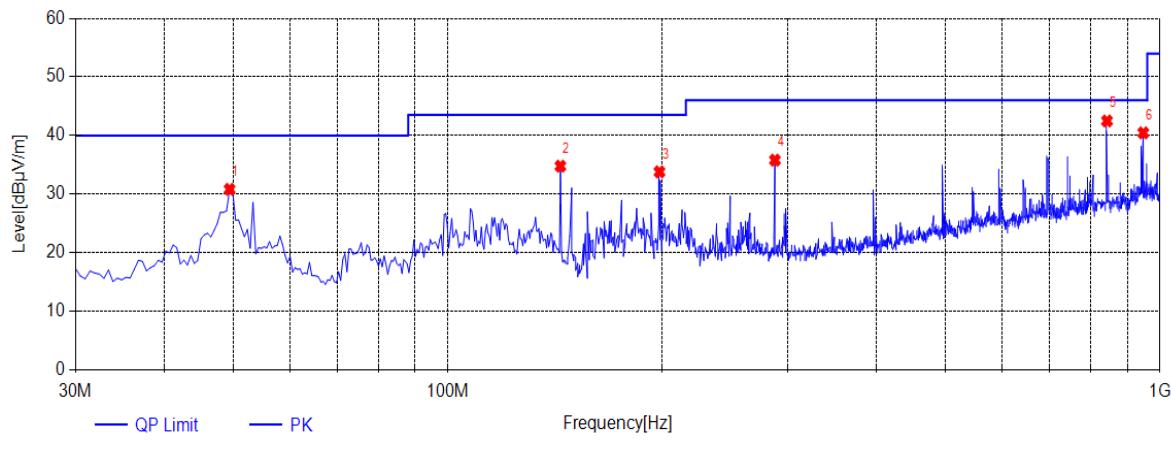

- QP Detector

NO.	Frequency [MHz]	Reading [dB μ V/m]	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity	Remark
1 ⁺	49.4 ⁺	41.71 ⁺	-10.91 ⁺	30.80 ⁺	40.00 ⁺	9.20 ⁺	QP ⁺	Vertical ⁺	PASS ⁺
2 ⁺	143.975 ⁺	49.03 ⁺	-14.27 ⁺	34.76 ⁺	43.50 ⁺	8.74 ⁺	QP ⁺	Vertical ⁺	PASS ⁺
3 ⁺	198.295 ⁺	44.12 ⁺	-10.34 ⁺	33.78 ⁺	43.50 ⁺	9.72 ⁺	QP ⁺	Vertical ⁺	PASS ⁺
4 ⁺	288.02 ⁺	43.48 ⁺	-7.69 ⁺	35.79 ⁺	46.00 ⁺	10.21 ⁺	QP ⁺	Vertical ⁺	PASS ⁺
5 ⁺	842.86 ⁺	40.73 ⁺	1.75 ⁺	42.48 ⁺	46.00 ⁺	3.52 ⁺	QP ⁺	Vertical ⁺	PASS ⁺
6 ⁺	947.62 ⁺	38.09 ⁺	2.36 ⁺	40.45 ⁺	46.00 ⁺	5.55 ⁺	QP ⁺	Vertical ⁺	PASS ⁺

Remark:

- Result (dB μ V/m) = Reading(dB μ V/m) + Factor (dB) .
- Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) – Pre Amplifier gain (dB).

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	4804.00	67.37	51.74	3.08	31.25	49.96	74	-24.04	PK
V	4804.00	52.61	51.74	3.08	31.25	35.20	54	-18.80	AV
V	7206.00	68.04	49.98	7.16	36.63	61.85	74	-12.15	PK
V	7206.00	55.78	49.98	7.16	36.63	49.59	54	-4.41	AV
V	16087.00	42.13	51.53	11.34	41.52	43.46	74	-30.54	PK
H	4804.00	64.63	51.74	3.08	31.25	47.22	74	-26.78	PK
H	4804.00	55.71	51.74	3.08	31.25	38.30	54	-15.70	AV
H	7206.00	65.99	49.98	7.16	36.63	59.80	74	-14.20	PK
H	7206.00	54.00	49.98	7.16	36.63	47.81	54	-6.19	AV
H	16087.00	43.64	51.53	11.34	41.52	44.97	74	-29.03	PK
operation frequency:2440									
V	4880.00	66.42	51.77	3.03	31.34	49.02	74	-24.98	PK
V	4880.00	54.35	51.77	3.03	31.34	36.95	54	-17.05	AV
V	7320.00	65.78	50.02	7.24	36.63	59.63	74	-14.37	PK
V	7320.00	56.22	50.02	7.24	36.63	50.07	54	-3.93	AV
V	16087.00	43.87	51.53	11.34	41.52	45.20	74	-28.80	PK
H	4880.00	64.90	51.77	3.03	31.34	47.50	74	-26.50	PK
H	4880.00	54.18	51.77	3.03	31.34	36.78	54	-17.22	AV
H	7320.00	67.14	50.02	7.24	36.63	60.99	74	-13.01	PK
H	7320.00	51.35	50.02	7.24	36.63	45.20	54	-8.80	AV
H	16087.00	42.60	51.53	11.34	41.52	43.93	74	-30.07	PK
operation frequency:2480									
V	4960.00	67.75	51.69	3.05	31.39	50.50	74	-23.50	PK
V	4960.00	57.98	51.69	3.05	31.39	40.73	54	-13.27	AV
V	7440.00	62.91	50.11	7.25	36.58	56.63	74	-17.37	PK
V	7440.00	53.40	50.11	7.25	36.58	47.12	54	-6.88	AV
V	16087.00	47.40	51.53	11.34	41.52	48.73	74	-25.27	PK
H	4960.00	63.28	51.69	3.05	31.39	46.03	74	-27.97	PK
H	4960.00	51.60	51.69	3.05	31.39	34.35	54	-19.65	AV
H	7440.00	65.44	50.11	7.25	36.58	59.16	74	-14.84	PK
H	7440.00	55.49	50.11	7.25	36.58	49.21	54	-4.79	AV
H	16087.00	44.51	51.53	11.34	41.52	45.84	74	-28.16	PK


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



For Conducted

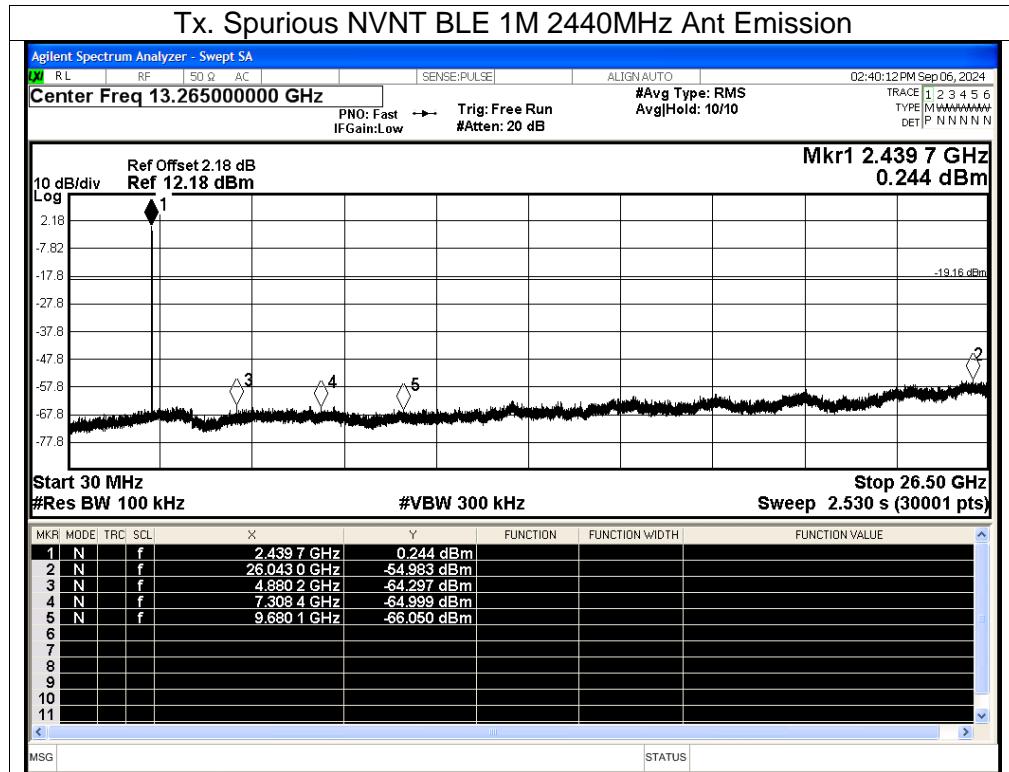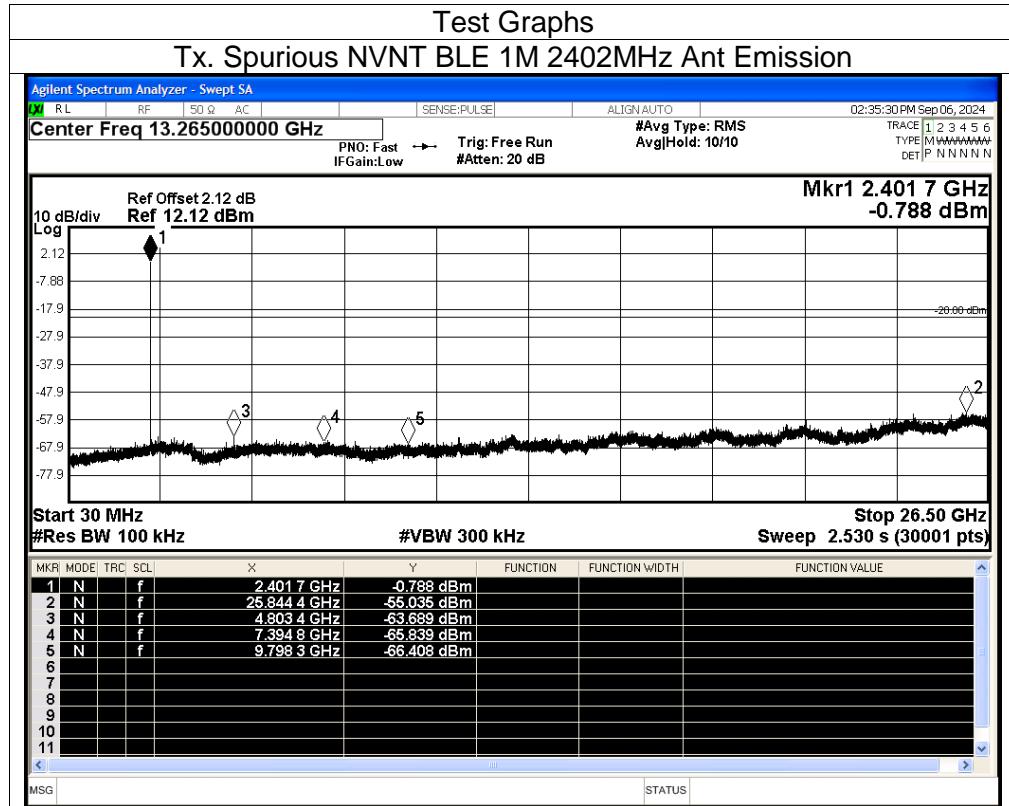

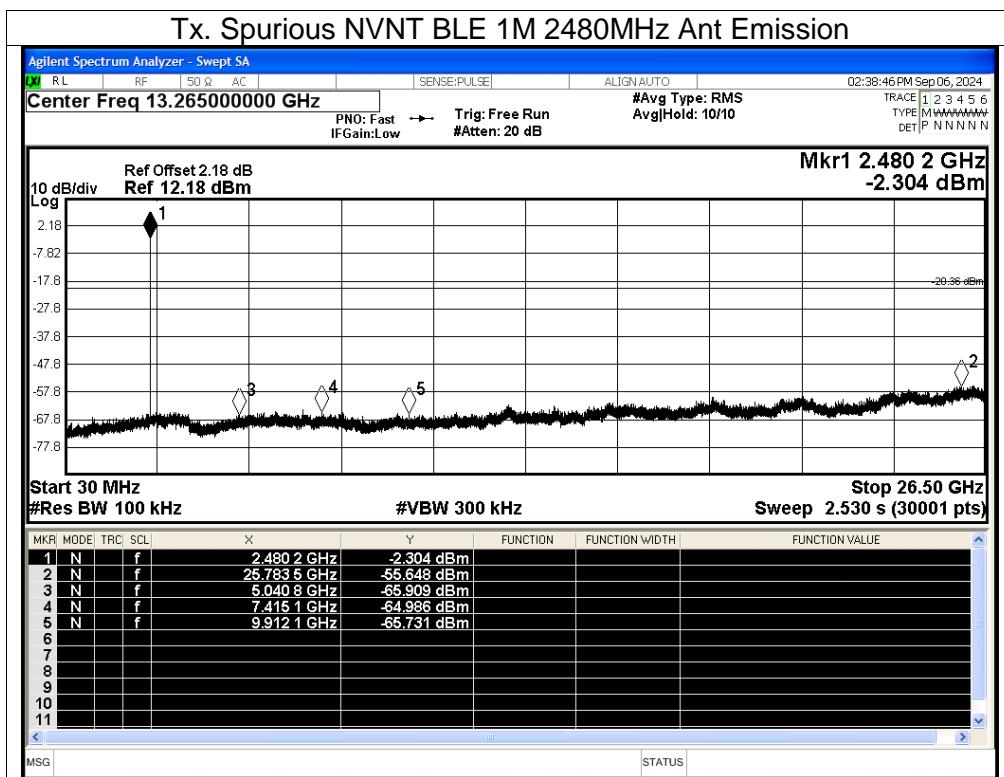



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dB _u V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB_uV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

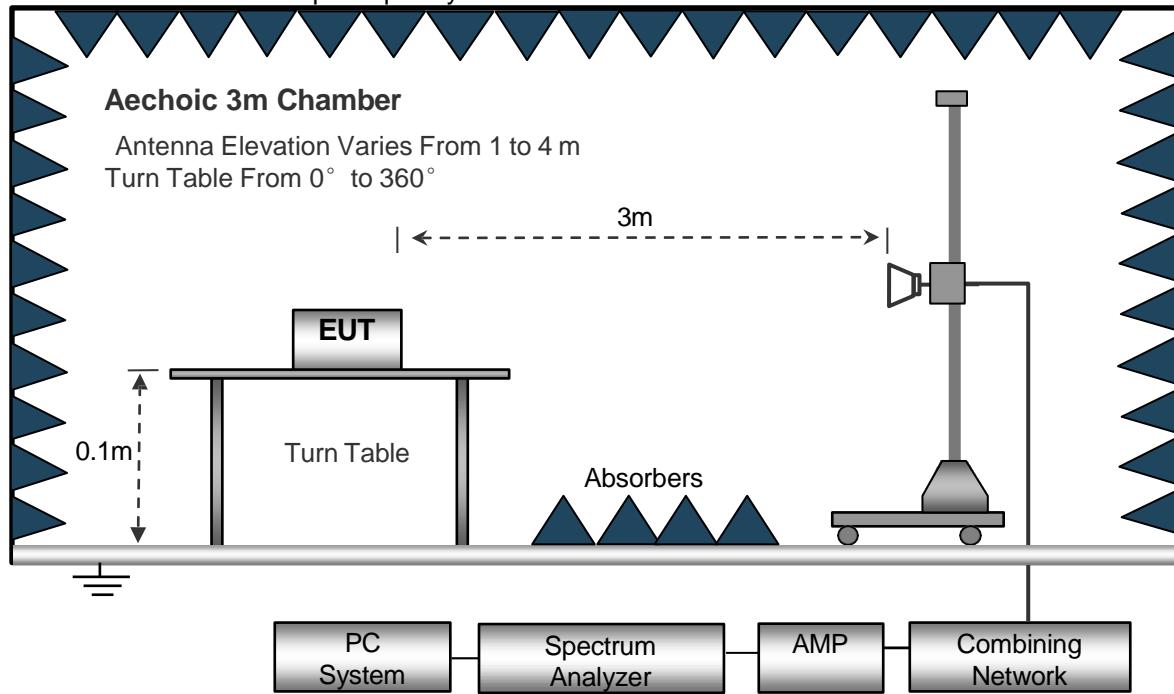

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	74.30	52.12	2.73	27.38	52.29	74	-21.71	PK
V	2390.00	64.01	52.12	2.73	27.38	42.00	54	-12.00	AV
V	2400.00	76.42	52.16	2.78	27.41	54.45	74	-19.55	PK
V	2400.00	64.16	52.16	2.78	27.41	42.19	54	-11.81	AV
H	2390.00	76.05	52.12	2.73	27.38	54.04	74	-19.96	PK
H	2390.00	65.08	52.12	2.73	27.38	43.07	54	-10.93	AV
H	2400.00	74.95	52.16	2.78	27.41	52.98	74	-21.02	PK
H	2400.00	63.10	52.16	2.78	27.41	41.13	54	-12.87	AV


Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.05	52.12	2.73	27.38	54.04	74	-19.96	PK
V	2483.50	65.13	52.12	2.73	27.38	43.12	54	-10.88	AV
V	2500.00	75.39	52.16	2.78	27.41	53.42	74	-20.58	PK
V	2500.00	64.83	52.16	2.78	27.41	42.86	54	-11.14	AV
H	2483.50	74.61	52.12	2.73	27.38	52.60	74	-21.40	PK
H	2483.50	67.49	52.12	2.73	27.38	45.48	54	-8.52	AV
H	2500.00	77.00	52.16	2.78	27.41	55.03	74	-18.97	PK
H	2500.00	63.51	52.16	2.78	27.41	41.54	54	-12.46	AV



Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



For Conducted

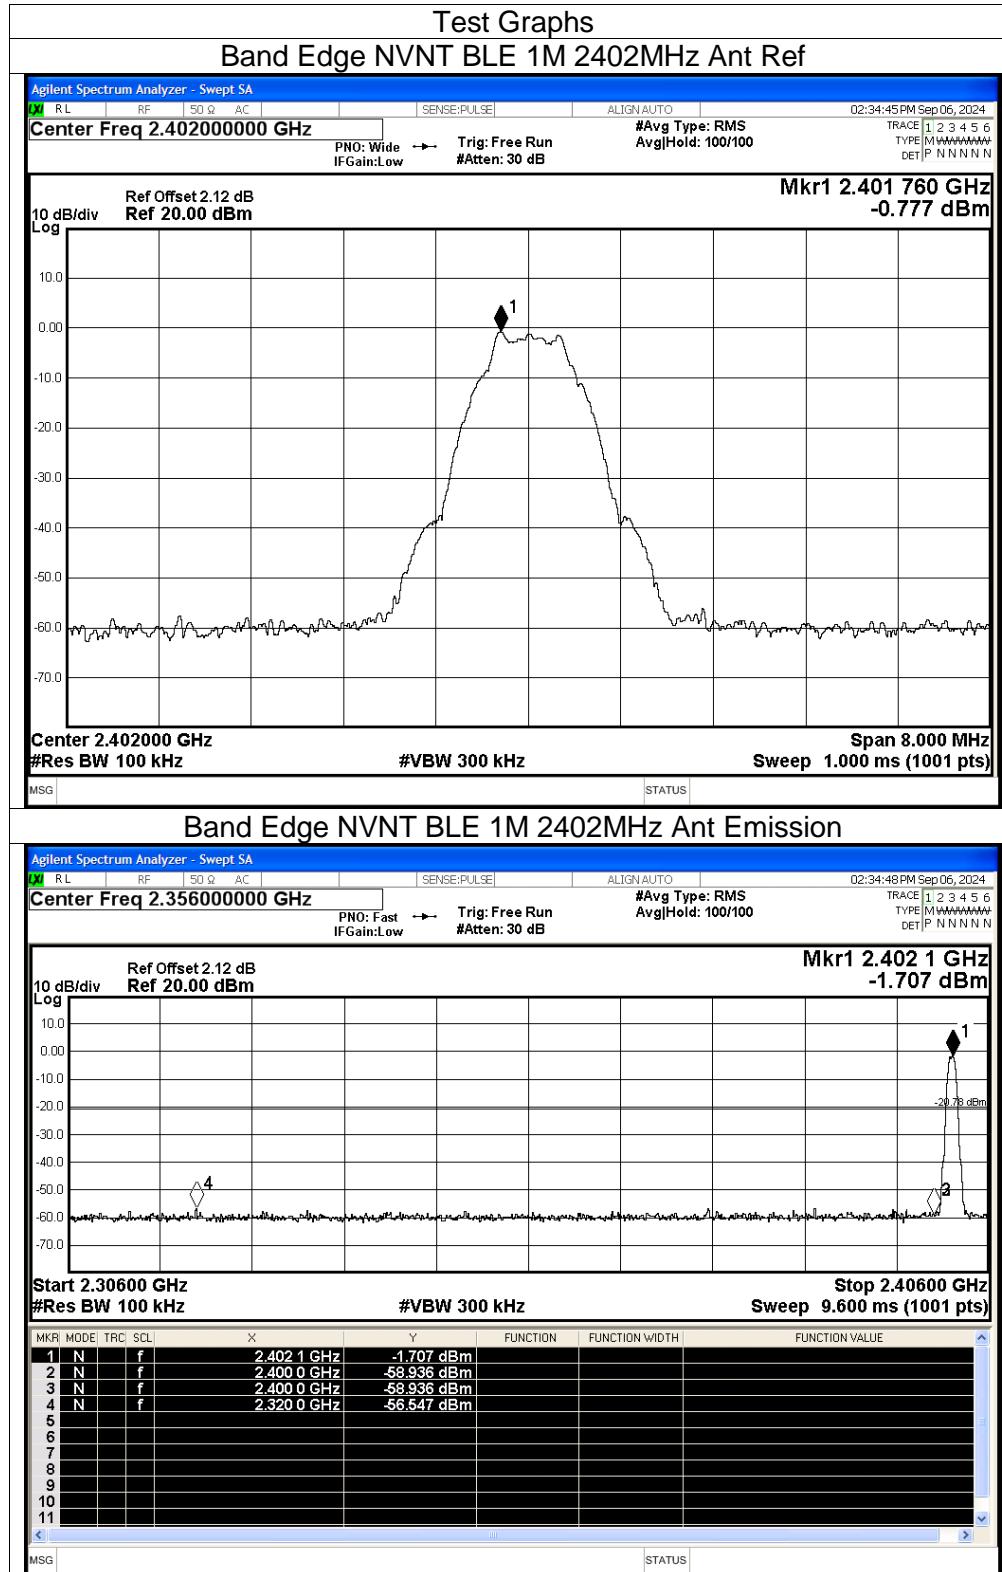

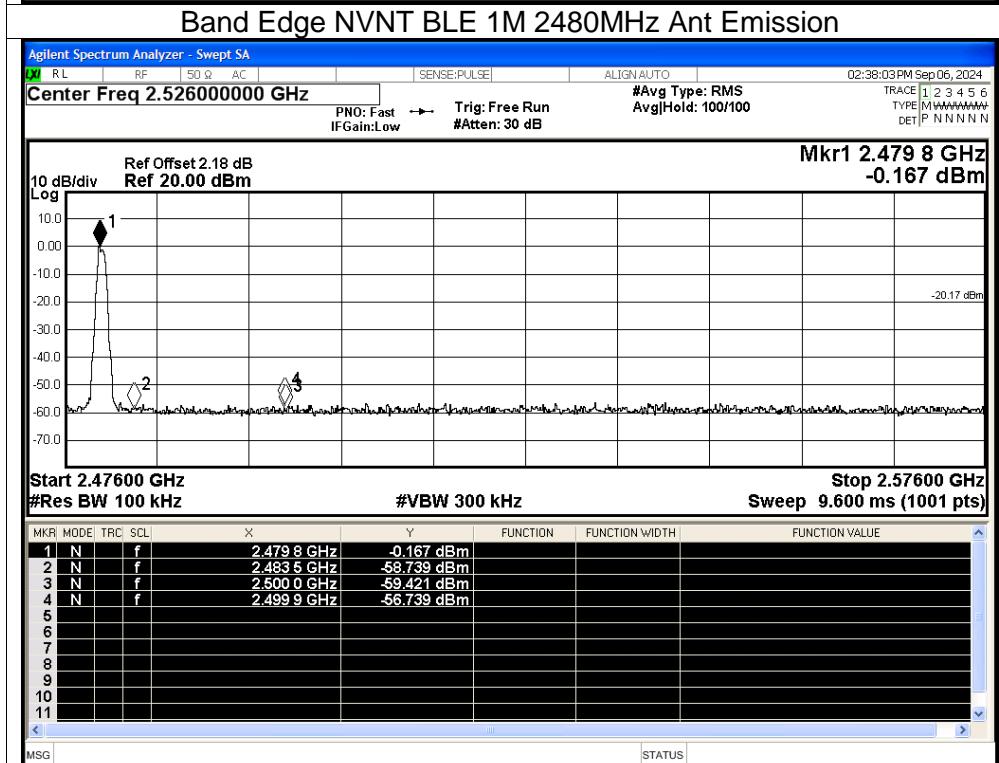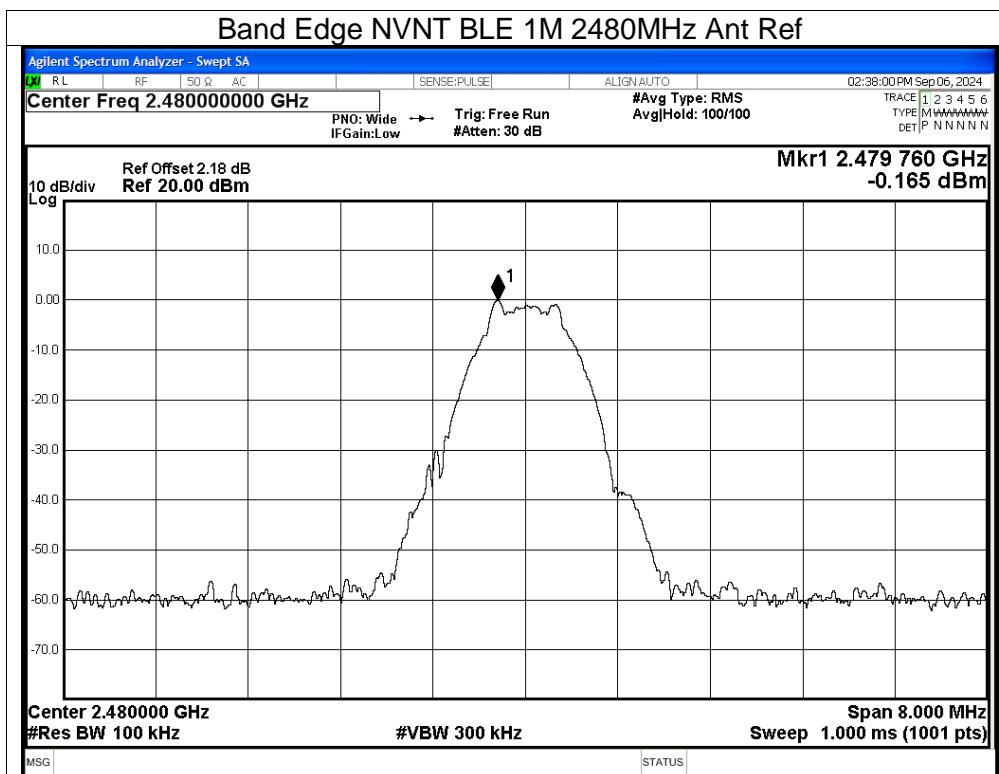



4. PEAK OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V

Test Channel	Peak Output Power (dBm)	LIMIT (dBm)
Low	-0.38	30.00
Moddle	0.88	30.00
High	0.18	30.00

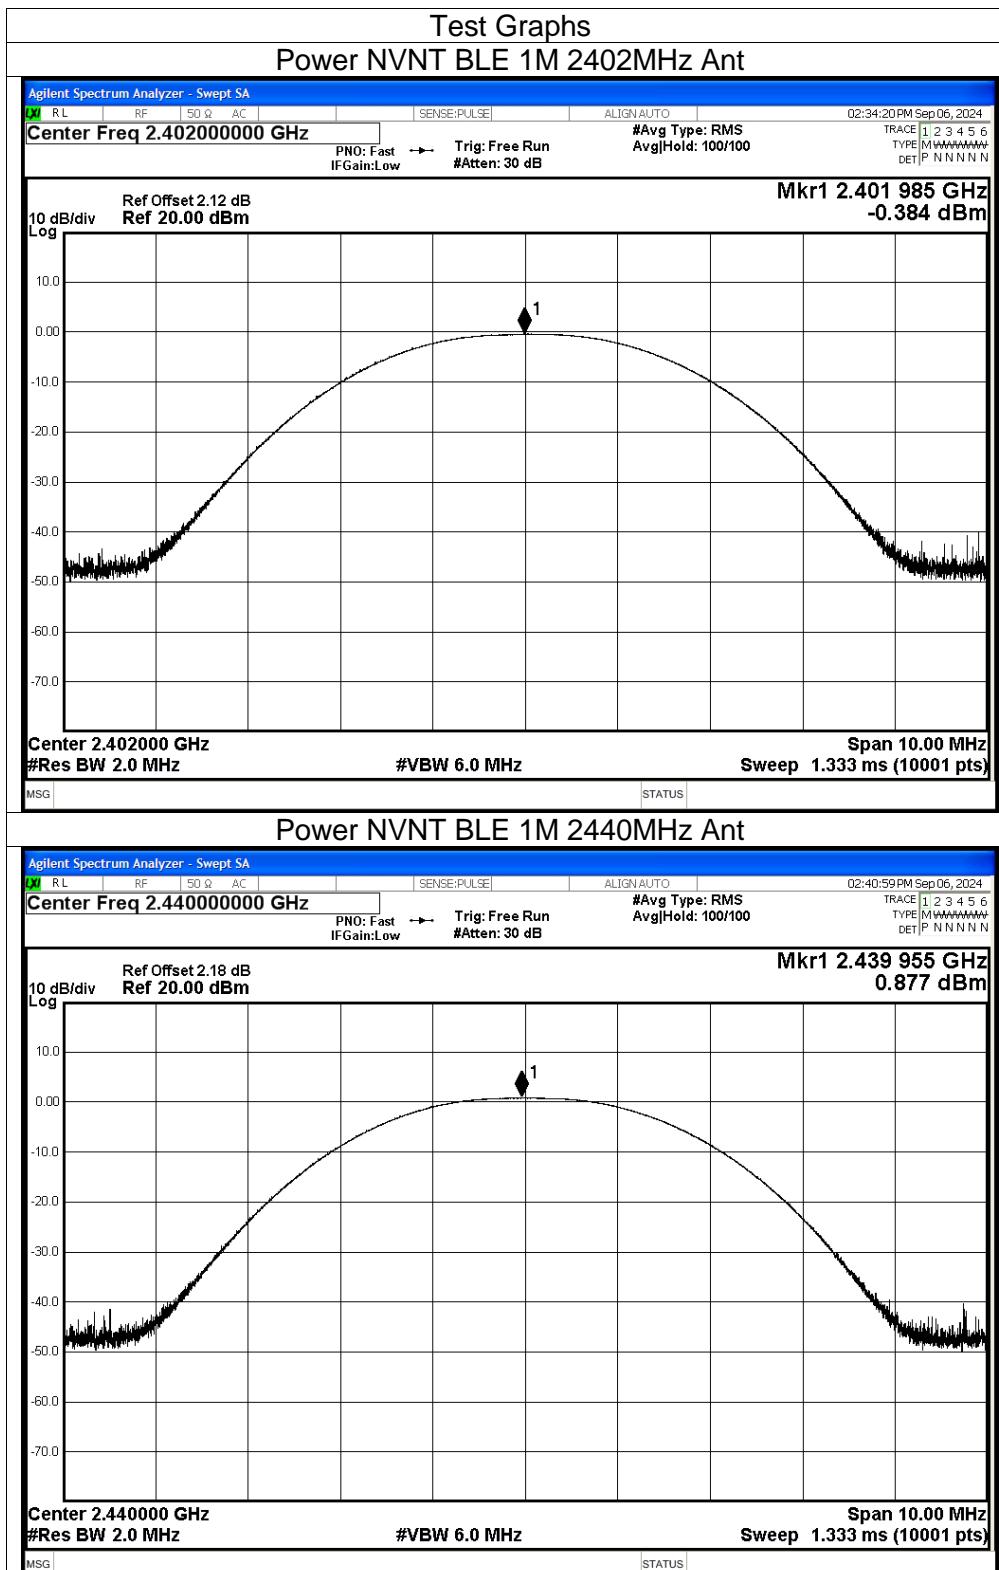

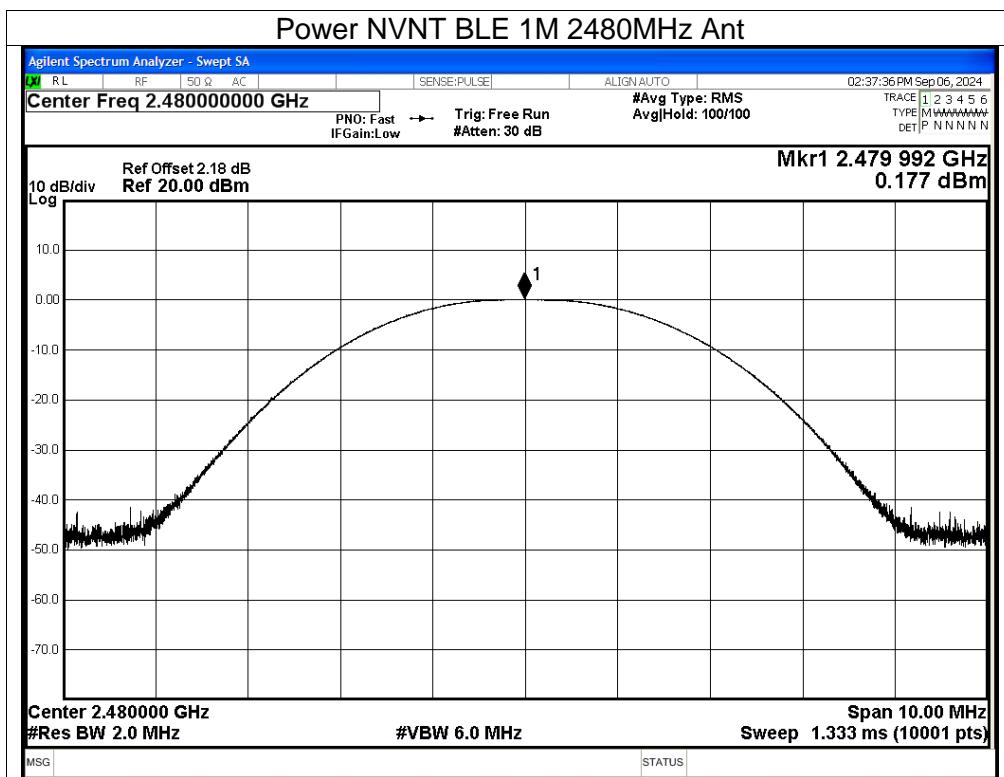



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3\text{kHz}$
VB	$VBW \geq 3RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP





5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Test Channel	Reading Level (dBm)	Limit(dBm)	Result
Low	-16.91	8	PASS
Middle	-15.75	8	PASS
High	-16.47	8	PASS

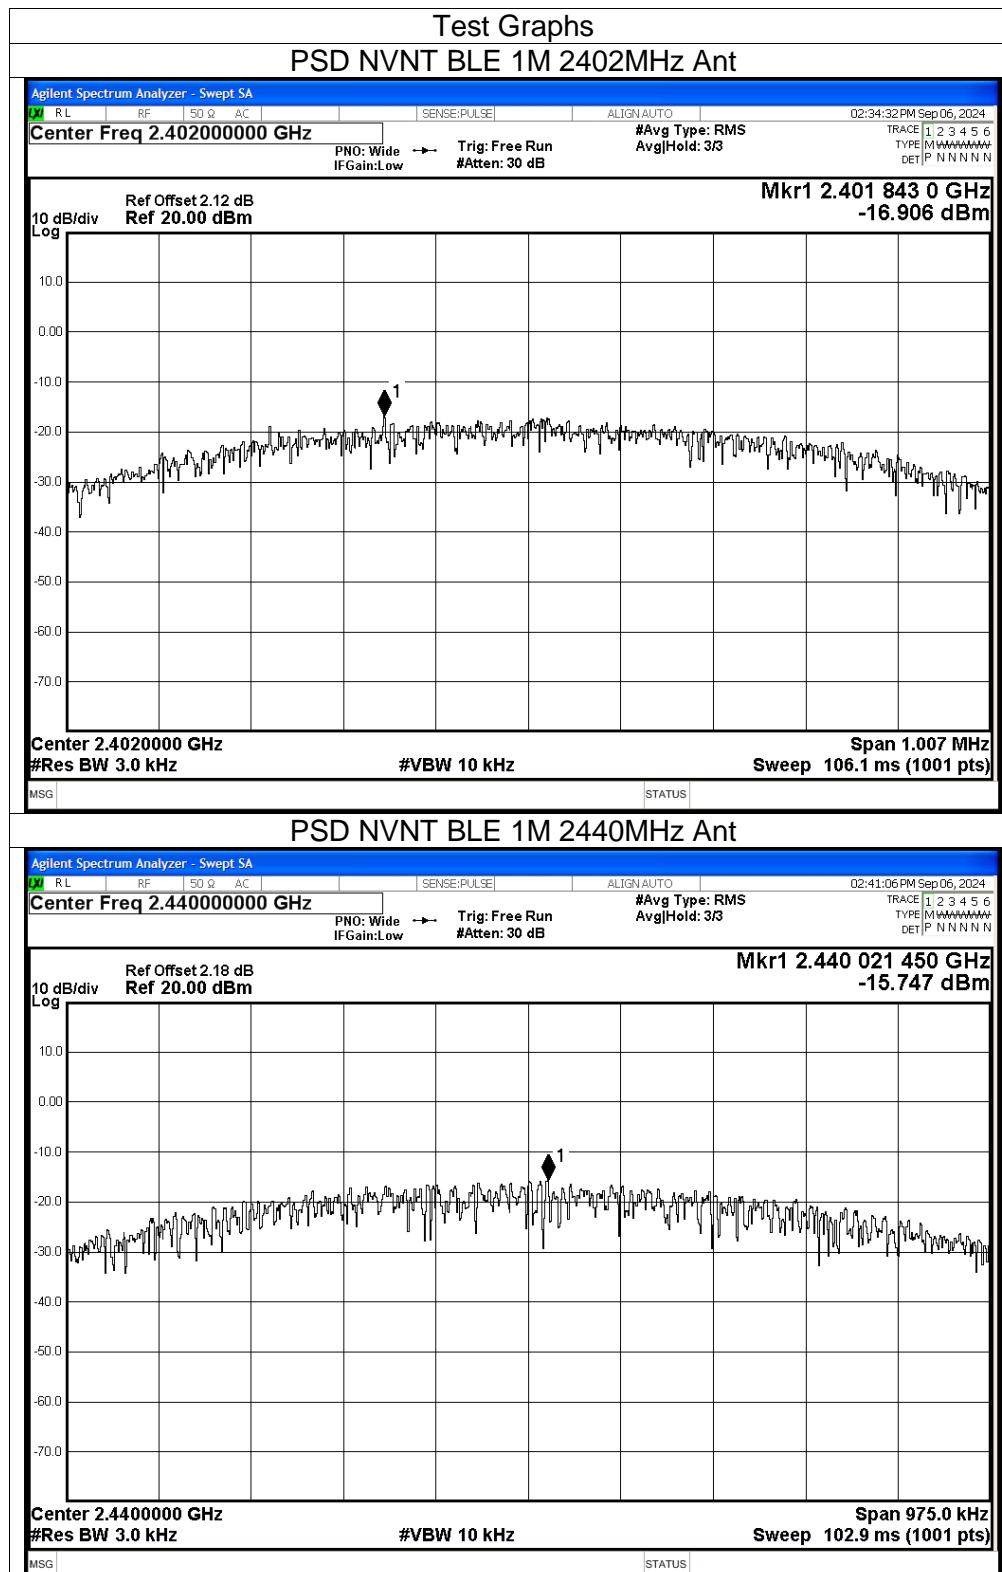

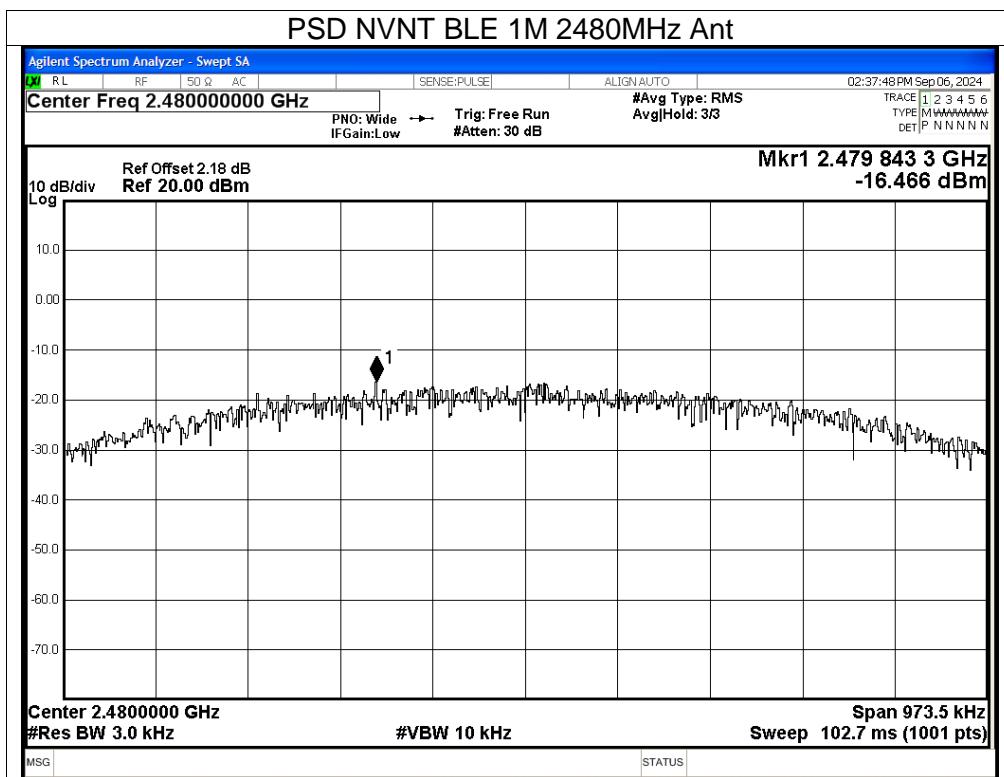



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) \geq RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP





6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Test Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
Low	0.654	0.5	Pass
Middle	0.65	0.5	Pass
High	0.64	0.5	Pass

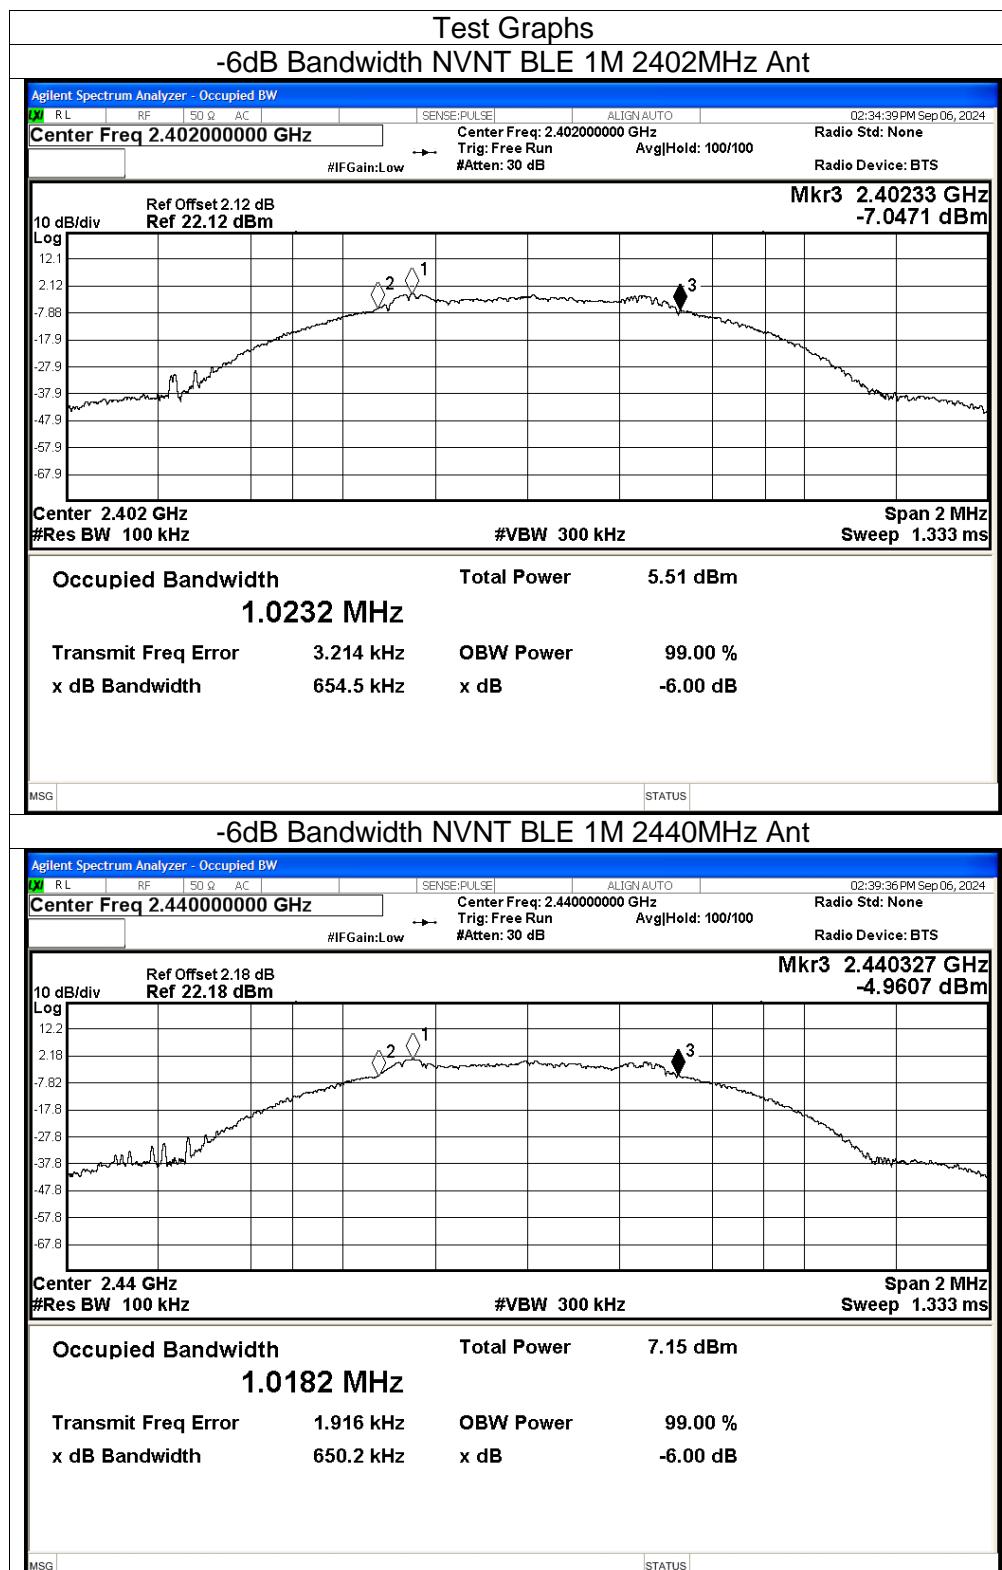

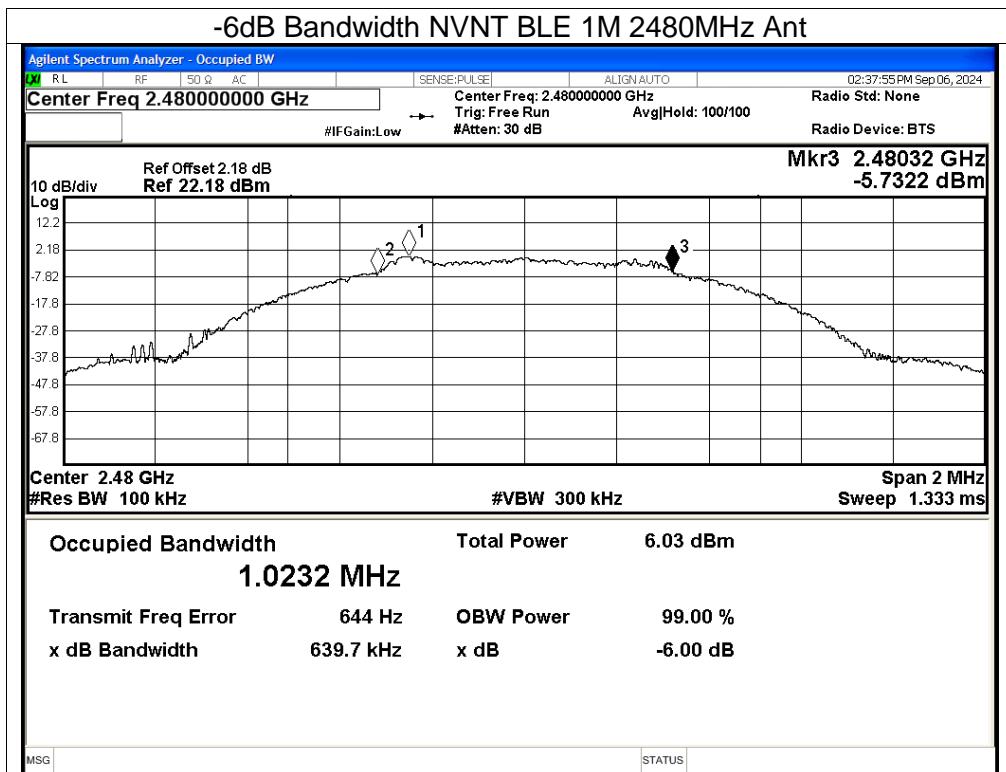



6.1.6. ANTENNA REQUIREMENT

6.2 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.3 EUT ANTENNA

The EUT antenna is internal antenna,. It comply with the standard requirement.



7. TEST SEUUP PHOTO

Please refer to the Test setup Photos



8. EUT PHOTO

Please refer to the External Photos and Internal Photos

※※※※※ END OF REPORT ※※※※※