

# TEST REPORT

Applicant Name: Senbiosys SA  
Address: Route des Gouttes-d'Or 40, 2000 Neuchâtel, Switzerland  
Report Number: 2501W72800E-RF  
FCC ID: 2BKU5-SBDV0108  
IC: 33088-SBDV0108

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;  
RSS-247 ISSUE 3, AUGUST 2023


## Sample Description

Product Type: VELIA ring  
Model No.: US8  
Multiple Model(s) No.: N/A  
Trade Mark: VELIA  
Date Received: 2025/08/05  
Issue Date: 2025/09/18

|              |                   |
|--------------|-------------------|
| Test Result: | Pass <sup>▲</sup> |
|--------------|-------------------|


▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:



Ruby Huang  
RF Engineer

## Approved By:



Nancy Wang  
RF Supervisor

Note: The information marked\* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018 Fax: +86-755-33320008 [www.baclcorp.com.cn](http://www.baclcorp.com.cn)

## **TABLE OF CONTENTS**

|  |           |
|--|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                   | <b>3</b>  |
| <b>GENERAL INFORMATION .....</b>                         | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....  | 4         |
| OBJECTIVE .....  | 4         |
| TEST METHODOLOGY.....                                    | 4         |
| MEASUREMENT UNCERTAINTY .....                            | 5         |
| TEST FACILITY .....                                      | 5         |
| <b>SYSTEM TEST CONFIGURATION .....</b>                   | <b>6</b>  |
| <b>SUMMARY OF TEST RESULTS .....</b>                     | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                         | <b>9</b>  |
| <b>REQUIREMENTS AND TEST PROCEDURES .....</b>            | <b>10</b> |
| UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS ..... | 10        |
| 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH .....   | 13        |
| PEAK OUTPUT POWER MEASUREMENT .....                      | 16        |
| POWER SPECTRAL DENSITY .....                             | 18        |
| 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....            | 20        |
| CONDUCTED SPURIOUS EMISSION.....                         | 22        |
| DUTY CYCLE.....  | 24        |
| <b>ANTENNA REQUIREMENT .....</b>                         | <b>25</b> |
| <b>TEST DATA AND RESULTS .....</b>                       | <b>26</b> |
| UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS ..... | 26        |
| 6dB EMISSION BANDWIDTH.....                              | 56        |
| 99% OCCUPIED BANDWIDTH .....                             | 58        |
| MAXIMUM CONDUCTED OUTPUT POWER .....                     | 60        |
| POWER SPECTRAL DENSITY .....                             | 62        |
| 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....            | 64        |
| DUTY CYCLE .....   | 65        |
| CONDUCTED SPURIOUS EMISSION.....                         | 66        |
| <b>RF EXPOSURE EVALUATION .....</b>                      | <b>68</b> |
| <b>EUT PHOTOGRAPHS .....</b>                             | <b>73</b> |
| <b>TEST SETUP PHOTOGRAPHS .....</b>                      | <b>74</b> |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number  | Description of Revision | Date of Revision |
|-----------------|----------------|-------------------------|------------------|
| 0               | 2501W72800E-RF | Original Report         | 2025/09/18       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|  |   |
|--|---|
| <b>HVIN</b>                                | US8   |
| <b>FVIN</b>                                | RING_01_0.9   |
| <b>Frequency Range</b>                     | 2402~2480MHz  |
| <b>Maximum Conducted Output Peak Power</b> | -3.02dBm  |
| <b>Modulation Technique</b>                | GFSK  |
| <b>Antenna Specification<sup>#</sup></b>   | -4.19dBi (provided by the applicant)  |
| <b>Voltage Range</b>                       | DC 3.68V from battery or DC 12V from Charging Station   |
| <b>Sample serial number</b>                | 37Y4-3 for Radiated Emissions Test<br>37Y4-2 for RF Conducted Test (Assigned by BACL, Shenzhen) |
| <b>Sample/EUT Status</b>                   | Good condition  |
| <b>Adapter Information</b>                 | N/A   |

### Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.247 rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

| Parameter                          |                             | Uncertainty                            |
|------------------------------------|-----------------------------|--|
| Occupied Channel Bandwidth         |                             | 109.2kHz(k=2, 95% level of confidence) |
| RF output power, conducted         |                             | 0.86dB(k=2, 95% level of confidence)   |
| Power Spectral Density             |                             | 0.90dB(k=2, 95% level of confidence)   |
| AC Power Lines Conducted Emissions | 9kHz~150 kHz                | 3.63dB(k=2, 95% level of confidence)   |
|                                    | 150 kHz~30MHz               | 3.66dB(k=2, 95% level of confidence)   |
| Radiated Emissions                 | 0.009MHz~30MHz              | 3.60dB(k=2, 95% level of confidence)   |
|                                    | 30MHz~200MHz (Horizontal)   | 5.32dB(k=2, 95% level of confidence)   |
|                                    | 30MHz~200MHz (Vertical)     | 5.43dB(k=2, 95% level of confidence)   |
|                                    | 200MHz~1000MHz (Horizontal) | 5.77dB(k=2, 95% level of confidence)   |
|                                    | 200MHz~1000MHz (Vertical)   | 5.73dB(k=2, 95% level of confidence)   |
|                                    | 1GHz - 6GHz                 | 5.34dB(k=2, 95% level of confidence)   |
|                                    | 6GHz - 18GHz                | 5.40dB(k=2, 95% level of confidence)   |
|                                    | 18GHz - 40GHz               | 5.64dB(k=2, 95% level of confidence)   |
| Temperature                        |                             | ±1°C                                   |
| Humidity                           |                             | ±1%                                    |
| Supply voltages                    |                             | ±0.4%                                  |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | 21      | 2444            |
| 2       | 2406            | 22      | 2446            |
| 3       | 2408            | 23      | 2448            |
| 4       | 2410            | 24      | 2450            |
| 5       | 2412            | 25      | 2452            |
| 6       | 2414            | 26      | 2454            |
| 7       | 2416            | 27      | 2456            |
| 8       | 2418            | 28      | 2458            |
| 9       | 2420            | 29      | 2460            |
| 10      | 2422            | 30      | 2462            |
| 11      | 2424            | 31      | 2464            |
| 12      | 2426            | 32      | 2466            |
| 13      | 2428            | 33      | 2468            |
| 14      | 2430            | 34      | 2470            |
| 15      | 2432            | 35      | 2472            |
| 16      | 2434            | 36      | 2474            |
| 17      | 2436            | 37      | 2476            |
| 18      | 2438            | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with Channel 0, 19 and 39.

### EUT Exercise Software

| Exercise Software <sup>#</sup> | AIROC Bluetooth Test and Debug |                |              |
|--------------------------------|--------------------------------|----------------|--------------|
| Power Level <sup>#</sup>       |                                |                |              |
| Mode                           | Low Channel                    | Middle Channel | High Channel |
| BLE 1M                         | default                        | default        | default      |
| BLE 2M                         | default                        | default        | default      |

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

**External I/O Cable**


| Cable Description | Length (m) | From Port | To |
|-------------------|------------|-----------|----|
| /                 | /          | /         | /  |

**Block Diagram of Test Setup**

For Radiated Emissions below 1GHz:

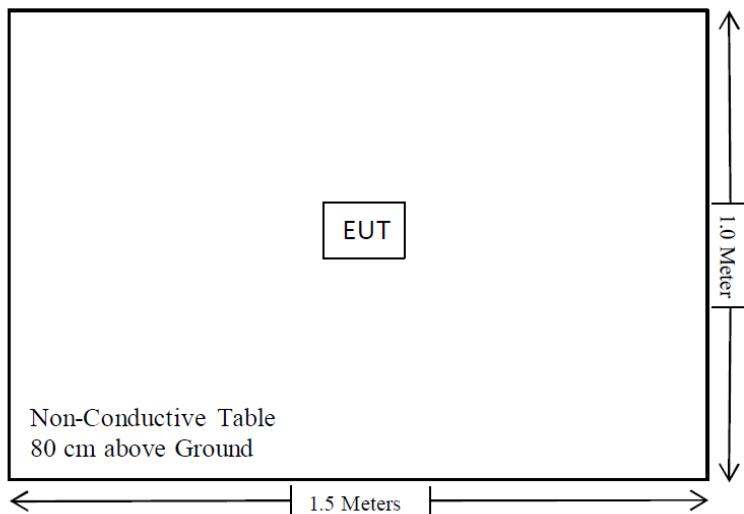

For Radiated Emissions above 1GHz:

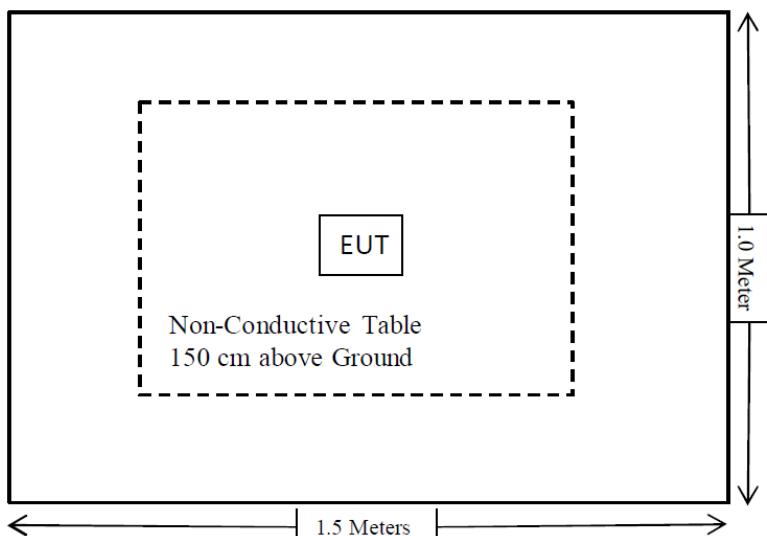

## SUMMARY OF TEST RESULTS

| Test Rules                               | Test Rules                     | Description of Test                              | Result         |
|--|--------------------------------|--|----------------|
| FCC §15.203                              | RSS-Gen §6.8                   | Antenna Requirement                              | Compliant      |
| FCC §15.207 (a)                          | RSS-Gen §8.8                   | AC Line Conducted Emissions                      | Not Applicable |
| FCC §15.205, §15.209, §15.247(d)         | RSS-GEN § 8.10 & RSS-247 § 5.5 | Spurious Emissions                               | Compliant      |
| FCC §15.247 (a)(2)                       | RSS- Gen§6.7 RSS-247 § 5.2 (a) | 99% Occupied Bandwidth & 6 dB Emission Bandwidth | Compliant      |
| FCC §15.247(b)(3)                        | RSS-247 § 5.4(d)               | Maximum Conducted Output Power                   | Compliant      |
| FCC §15.247(e)                           | RSS-247 § 5.2 (b)              | Power Spectral Density                           | Compliant      |
| FCC §15.247(d)                           | RSS-247 § 5.5                  | 100 kHz Bandwidth of Frequency Band Edge         | Compliant      |
| FCC §15.247(d)                           | RSS-247 § 5.5                  | Conducted Spurious Emission                      | Compliant      |
| C63.10 §11.6                             | C63.10 §11.6                   | Duty Cycle                                       | /              |
| §15.247 (i), §1.1307(b)(3)(i)(B) §2.1093 | /                              | SAR-Based Exemption                              | Compliant      |
| /  | RSS-102 § 6.3                  | SAR EXEMPTION LIMITS                             | Compliant      |

Not Applicable: The EUT is only powered by the battery when working

## TEST EQUIPMENT LIST

| Manufacturer                  | Description                       | Model           | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|-----------------------------------|-----------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                                   |                 |               |                  |                      |
| Rohde & Schwarz               | EMI Test Receiver                 | ESR3            | 102455        | 2024/12/04       | 2025/12/03           |
| Sonoma instrument             | Pre-amplifier                     | 310N            | 186238        | 2025/04/29       | 2026/04/28           |
| Sunol Sciences                | Broadband Antenna                 | JB1             | A040904-1     | 2023/07/20       | 2026/07/19           |
| Unknown                       | Cable                             | Chamber Cable 1 | F-03-EM236    | 2025/04/29       | 2026/04/28           |
| Unknown                       | Cable                             | XH500C          | J-10M-A       | 2025/04/29       | 2026/04/28           |
| BACL                          | Active Loop Antenna               | 1313-1A         | 4031911       | 2024/05/14       | 2027/05/13           |
| unknown                       | Cable                             | PNG214          | 1354          | 2024/12/04       | 2025/12/03           |
| Unknown                       | Cable                             | 2Y194           | 0735          | 2024/12/04       | 2025/12/03           |
| Audix                         | EMI Test software                 | E3              | 19821b(V9)    | NCR              | NCR                  |
| Rohde&Schwarz                 | Spectrum Analyzer                 | FSV40           | 101605        | 2025/03/26       | 2026/03/25           |
| A.H.System                    | Preamplifier                      | PAM-0118P       | 489           | 2024/11/15       | 2025/11/14           |
| Schwarzbeck                   | Horn Antenna                      | BBHA9120D(1201) | 1143          | 2023/07/26       | 2026/07/25           |
| Unknown                       | RF Cable                          | KMSE            | 0735          | 2024/12/06       | 2025/12/05           |
| Unknown                       | RF Cable                          | UFA147          | 219661        | 2024/12/06       | 2025/12/05           |
| JD                            | Filter Switch Unit                | DT7220FSU       | DS79906       | 2024/09/09       | 2025/09/08           |
| JD                            | Multiplex Switch Test Control Set | DT7220SCU       | DS79903       | 2024/09/09       | 2025/09/08           |
| A.H.System                    | Pre-amplifier                     | PAM-1840VH      | 190           | 2025/04/29       | 2026/04/28           |
| Electro-Mechanics Co          | Horn Antenna                      | 3116            | 9510-2270     | 2023/09/18       | 2026/09/17           |
| UTIFLEX                       | RF Cable                          | NO. 13          | 232308-001    | 2024/12/18       | 2025/12/17           |
| Audix                         | EMI Test software                 | E3              | 191218(V9)    | NCR              | NCR                  |
| <b>RF Conducted Test</b>      |                                   |                 |               |                  |                      |
| Unknown                       | 10dB Attenuator                   | Unknown         | F-03-EM122    | 2025/06/26       | 2026/06/25           |
| Unknown                       | RF Cable                          | 65475           | 01670515      | 2025/06/26       | 2026/06/25           |
| R&S                           | Spectrum Analyzer                 | FSU26           | 200120        | 2024/12/04       | 2025/12/03           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## REQUIREMENTS AND TEST PROCEDURES


### Unwanted Emission Frequencies and Restricted Bands

#### Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.


#### EUT Setup

##### 9 kHz-30MHz:

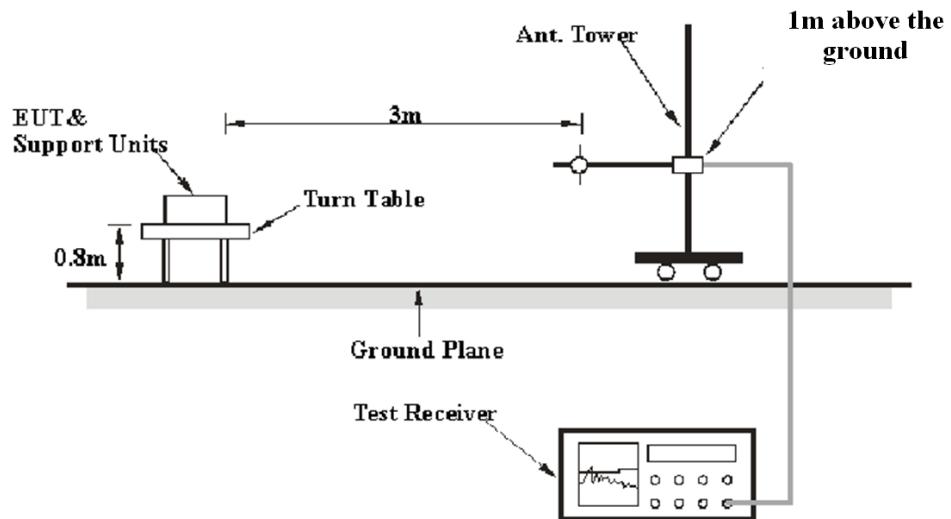

##### 30MHz-1GHz:

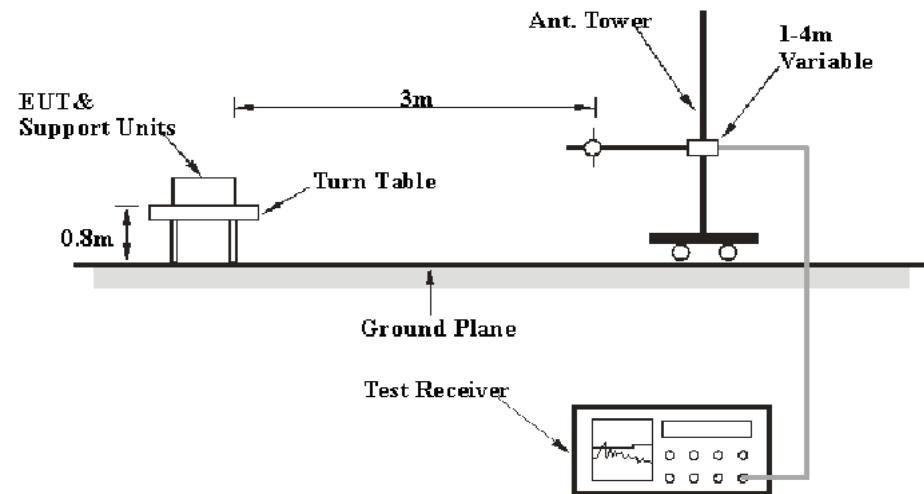

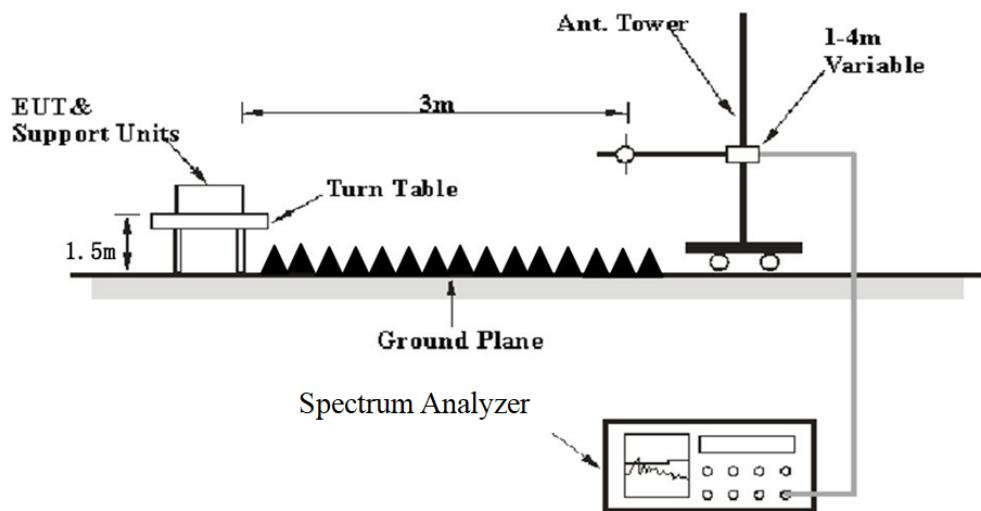**Above 1GHz:**

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247, RSS-Gen and RSS-247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement | Detector |
|-------------------|---------|-----------|---------|-------------|----------|
| 9 kHz – 150 kHz   | /       | /         | 200 Hz  | QP          | QP       |
|                   | 300 Hz  | 1 kHz     | /       | PK          | Peak     |
| 150 kHz – 30 MHz  | /       | /         | 9 kHz   | QP          | QP       |
|                   | 10 kHz  | 30 kHz    | /       | PK          | Peak     |
| 30 MHz – 1000 MHz | /       | /         | 120 kHz | QP          | QP       |
|                   | 100 kHz | 300 kHz   | /       | PK          | Peak     |

1-25GHz:  
Pre-scan

| Measurement | Duty cycle | RBW  | Video B/W | Detector |
|-------------|------------|------|-----------|----------|
| PK          | Any        | 1MHz | 3 MHz     | Peak     |
| AV          | >98%       | 1MHz | 1 kHz     | Peak     |
|             | <98%       | 1MHz | ≥1/Ton    | Peak     |

Final measurement for emission identified during pre-scan

| Measurement | Duty cycle | RBW  | Video B/W | Detector |
|-------------|------------|------|-----------|----------|
| PK          | Any        | 1MHz | 3 MHz     | Peak     |
| AV          | >98%       | 1MHz | 10 Hz     | Peak     |
|             | <98%       | 1MHz | ≥1/Ton    | Peak     |

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## 99% Occupied Bandwidth & 6 dB Emission Bandwidth

### Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

## Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.8.1 & Clause 6.9.3


The steps for the first option are as follows:

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

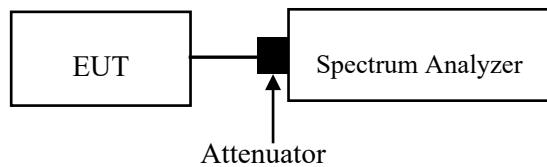

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

## Peak Output Power Measurement

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.


As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set span  $\geq [3 \times \text{RBW}]$ .
- d) Sweep time = No faster than coupled (auto) time.
- e) Detector = peak.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

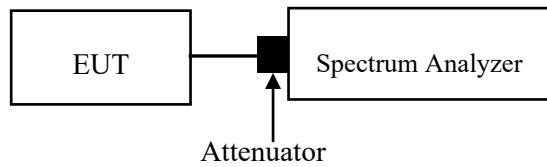

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

## Power Spectral Density

### Applicable Standard

According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power)

### Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span  $>1.5$  times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

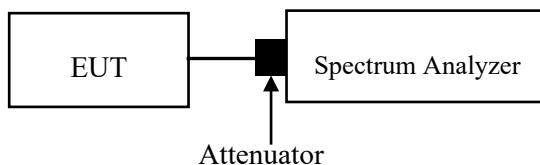

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

## 100 kHz Bandwidth of Frequency Band Edge

### Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 §5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

### Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

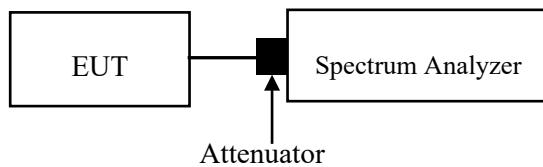

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

## Conducted Spurious Emission

### Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 §5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

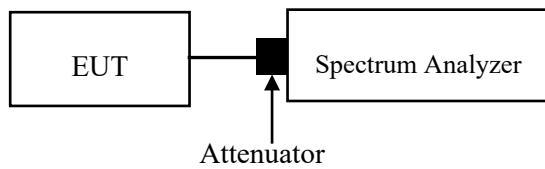

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)


## Duty Cycle

### Test Procedure

According to ANSI C63.10-2020 Section 11.6

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set  $RBW$  to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

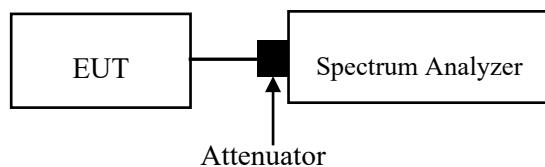

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

## ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain<sup>#</sup> is -4.19dBi, fulfill the requirement of this section. Please refer to the EUT photos.

| Antenna type | Antenna Gain <sup>#</sup> | Impedance | Frequency Range |
|--------------|---------------------------|-----------|-----------------|
| Metal        | -4.19dBi                  | 50Ω       | 2.4~2.5GHz      |

### Result: Compliant

## TEST DATA AND RESULTS


### Unwanted Emission Frequencies and Restricted Bands

#### Environmental Conditions

|                            |   |                              |                     |
|----------------------------|---|------------------------------|---------------------|
| <b>Temperature (°C)</b>    | 25.4&21.0   | <b>Relative Humidity (%)</b> | 50&52               |
| <b>ATM Pressure (kPa):</b> | 100.2&100.8   | <b>Test engineer:</b>        | Alex Yan & Iye Wang |
| <b>Test date:</b>          | 2025.8.11&2025.8.12   |                              |                     |
| <b>EUT operation mode:</b> | Below 1GHz: Transmitting (Maximum output power mode, BLE 1M High Channel)<br>Above 1GHz: Transmitting   |                              |                     |
| <b>Note:</b>               | <ol style="list-style-type: none"><li>1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded.</li><li>2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value was recorded.</li><li>3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.</li><li>4. The spurious emission from 9 kHz-30MHz of IC RSS-GEN standard, the unit of final result on the test plots are dB<math>\mu</math>V/m, so the limit should be added by 51,5 dB from dB<math>\mu</math>A/m to dB<math>\mu</math>V/m.</li></ol> |                              |                     |

**Below 1GHz:**


9kHz-150kHz

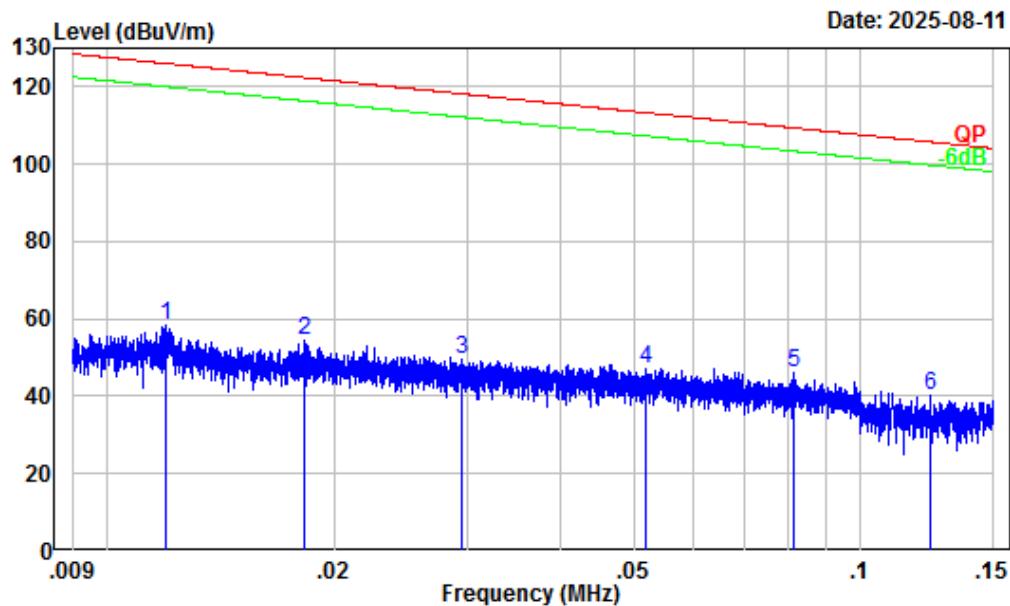

Site : Chamber A  
Condition : 3m  
Project Number : 2501W72800E-RF  
Test Mode : BLE Transmitting  
Detector: Peak RBW/VBW: 0.3/1kHz  
Tester : Alex Yan

|   | Freq  | Factor | Read Level | Limit Level | Line   | Over Limit | Remark |
|---|-------|--------|------------|-------------|--------|------------|--------|
|   | MHz   | dB/m   | dBuV       | dBuV/m      | dBuV/m | dB         |        |
| 1 | 0.012 | 31.92  | 26.51      | 58.43       | 126.03 | -67.60     | Peak   |
| 2 | 0.018 | 30.73  | 23.90      | 54.63       | 122.38 | -67.75     | Peak   |
| 3 | 0.030 | 28.57  | 20.98      | 49.55       | 118.18 | -68.63     | Peak   |
| 4 | 0.052 | 26.21  | 21.12      | 47.33       | 113.30 | -65.97     | Peak   |
| 5 | 0.081 | 23.31  | 22.77      | 46.08       | 109.40 | -63.32     | Peak   |
| 6 | 0.124 | 20.61  | 19.60      | 40.21       | 105.77 | -65.56     | Peak   |


150kHz-30MHz

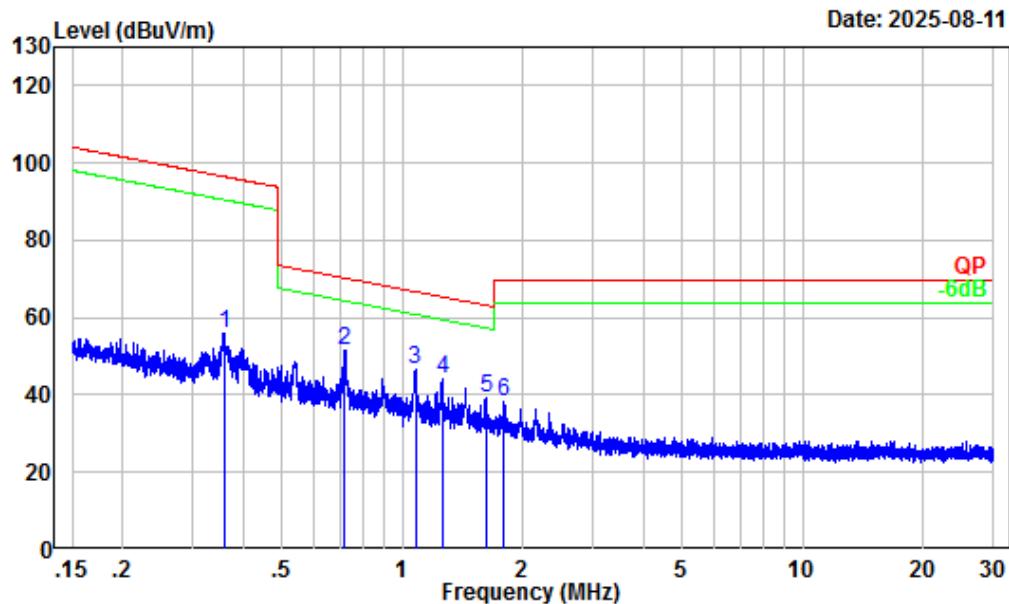

Site : Chamber A  
Condition : 3m  
Project Number : 2501W72800E-RF  
Test Mode : BLE Transmitting  
Detector: Peak RBW/VBW: 10/30kHz  
Tester : Alex Yan

| Freq | Factor | Read  | Limit | Over  | Remark |             |
|------|--------|-------|-------|-------|--------|-------------|
|      |        | Level | Level | Line  |        |             |
|      |        | MHz   | dB/m  | dBuV  | dBuV/m | dB          |
| 1    | 0.360  | 9.06  | 47.07 | 56.13 | 96.48  | -40.35 Peak |
| 2    | 0.719  | 3.70  | 47.88 | 51.58 | 70.40  | -18.82 Peak |
| 3    | 1.079  | 0.98  | 45.38 | 46.36 | 66.80  | -20.44 Peak |
| 4    | 1.258  | 0.48  | 43.62 | 44.10 | 65.44  | -21.34 Peak |
| 5    | 1.616  | -0.52 | 39.86 | 39.34 | 63.22  | -23.88 Peak |
| 6    | 1.798  | -1.03 | 39.39 | 38.36 | 69.54  | -31.18 Peak |


## 30MHz-1GHz\_Horizontal

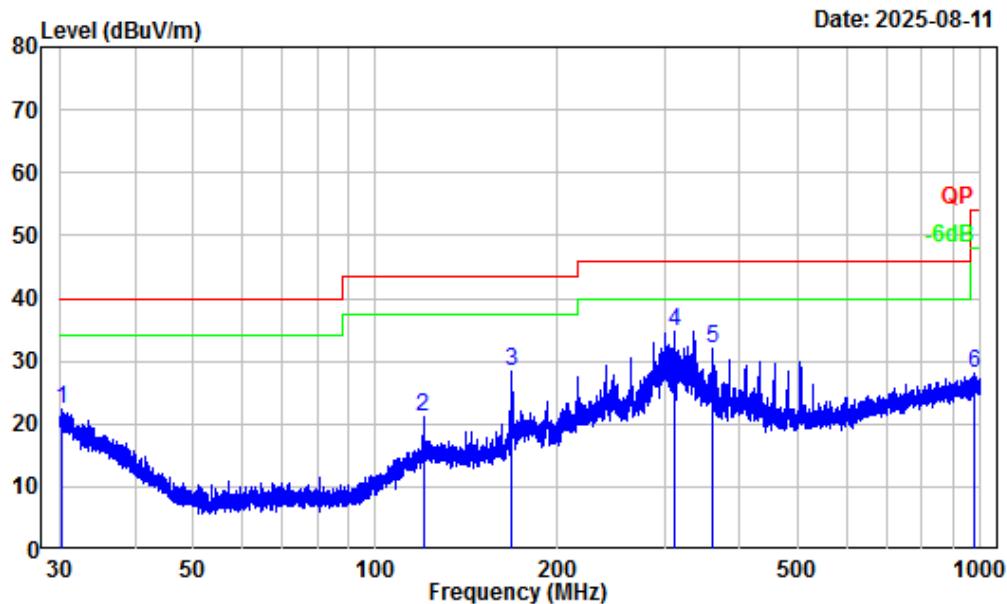

Site : Chamber A  
Condition : 3m Horizontal  
Project Number : 2501W72800E-RF  
Test Mode : BLE Transmitting  
Detector: Peak RBW/VBW: 100/300kHz  
Tester : Alex Yan

| Freq | Factor | Read   | Limit | Over  | Remark |             |
|------|--------|--------|-------|-------|--------|-------------|
|      |        | Level  | Level | Line  |        |             |
|      |        | MHz    | dB/m  | dBuV  | dBuV/m | dB          |
| 1    | 30.24  | -6.08  | 28.41 | 22.33 | 40.00  | -17.67 Peak |
| 2    | 119.86 | -11.46 | 32.49 | 21.03 | 43.50  | -22.47 Peak |
| 3    | 168.19 | -13.02 | 41.28 | 28.26 | 43.50  | -15.24 Peak |
| 4    | 312.04 | -11.00 | 45.69 | 34.69 | 46.00  | -11.31 Peak |
| 5    | 359.82 | -9.89  | 41.86 | 31.97 | 46.00  | -14.03 Peak |
| 6    | 973.62 | -0.81  | 28.86 | 28.05 | 54.00  | -25.95 Peak |

## 30MHz-1GHz\_Verical

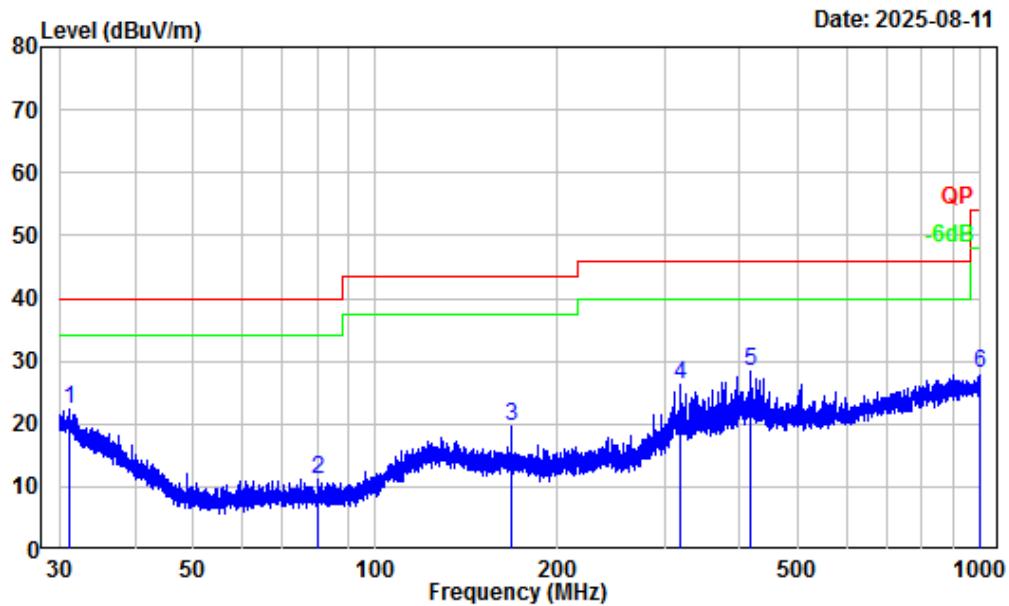

Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2501W72800E-RF  
Test Mode : BLE Transmitting  
Detector: Peak RBW/VBW: 100/300kHz  
Tester : Alex Yan

| Freq | Factor  | Read   | Limit | Over  | Remark |             |
|------|---------|--------|-------|-------|--------|-------------|
|      |         | Level  | Level | Line  |        |             |
|      |         | MHz    | dB/m  | dBuV  | dBuV/m | dB          |
| 1    | 31.17   | -6.57  | 28.78 | 22.21 | 40.00  | -17.79 Peak |
| 2    | 80.33   | -17.93 | 29.11 | 11.18 | 40.00  | -28.82 Peak |
| 3    | 167.90  | -13.00 | 32.71 | 19.71 | 43.50  | -23.79 Peak |
| 4    | 319.24  | -10.83 | 37.03 | 26.20 | 46.00  | -19.80 Peak |
| 5    | 417.64  | -7.98  | 36.26 | 28.28 | 46.00  | -17.72 Peak |
| 6    | 1000.00 | -0.40  | 28.48 | 28.08 | 54.00  | -25.92 Peak |

**Above 1GHz:**

| Frequency (MHz) | Reading (dB $\mu$ V) | PK/Ave | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|----------------------|--------|-------------|---------------|------------------------------------|----------------------|-------------|
| <b>BLE 1M</b>   |                      |        |             |               |                                    |                      |             |
| Low Channel     |                      |        |             |               |                                    |                      |             |
| 4804            | 53.04                | PK     | H           | -7.79         | 45.25                              | 74                   | -28.75      |
| 4804            | 52.69                | PK     | V           | -7.79         | 44.9                               | 74                   | -29.1       |
| Middle Channel  |                      |        |             |               |                                    |                      |             |
| 4880            | 54.03                | PK     | H           | -7.59         | 46.44                              | 74                   | -27.56      |
| 4880            | 53.34                | PK     | V           | -7.59         | 45.75                              | 74                   | -28.25      |
| High Channel    |                      |        |             |               |                                    |                      |             |
| 4960            | 53.55                | PK     | H           | -7.56         | 45.99                              | 74                   | -28.01      |
| 4960            | 52.78                | PK     | V           | -7.56         | 45.22                              | 74                   | -28.78      |
| <b>BLE 2M</b>   |                      |        |             |               |                                    |                      |             |
| Low Channel     |                      |        |             |               |                                    |                      |             |
| 4804            | 52.81                | PK     | H           | -7.79         | 45.02                              | 74                   | -28.98      |
| 4804            | 52.29                | PK     | V           | -7.79         | 44.5                               | 74                   | -29.5       |
| Middle Channel  |                      |        |             |               |                                    |                      |             |
| 4880            | 52.8                 | PK     | H           | -7.59         | 45.21                              | 74                   | -28.79      |
| 4880            | 52.5                 | PK     | V           | -7.59         | 44.91                              | 74                   | -29.09      |
| High Channel    |                      |        |             |               |                                    |                      |             |
| 4960            | 52.27                | PK     | H           | -7.56         | 44.71                              | 74                   | -29.29      |
| 4960            | 52.56                | PK     | V           | -7.56         | 45                                 | 74                   | -29         |

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

**Test plots:****Band Edge**

Left Band edge Horizontal BLE 1M

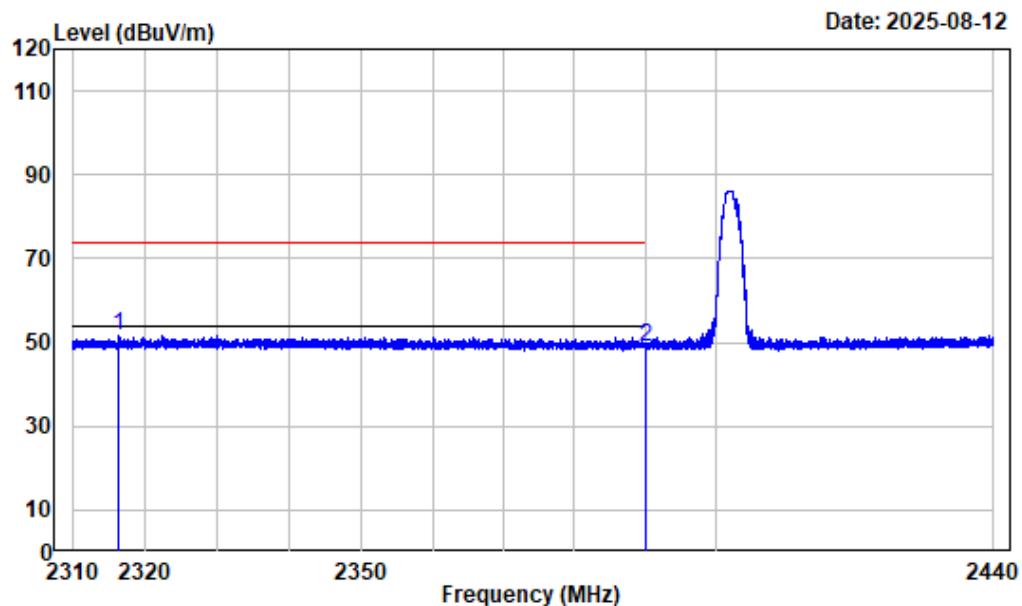


## Left Band edge\_Vertical\_BLE 1M

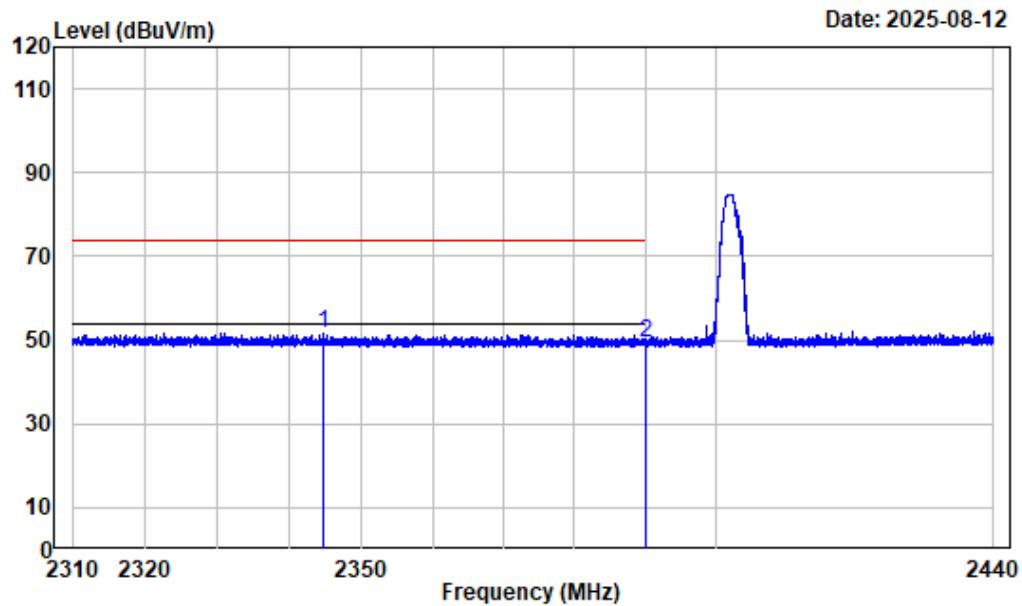

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2402

| Freq Factor | MHz      | dB/m   | Read  | Limit | Over  | Remark      |
|-------------|----------|--------|-------|-------|-------|-------------|
|             |          |        | Level | Level | Line  |             |
| 1           | 2344.682 | -10.88 | 62.60 | 51.72 | 74.00 | -22.28 Peak |
| 2           | 2390.000 | -10.98 | 60.40 | 49.42 | 74.00 | -24.58 Peak |


## Right Band edge\_Horizontal\_BLE 1M

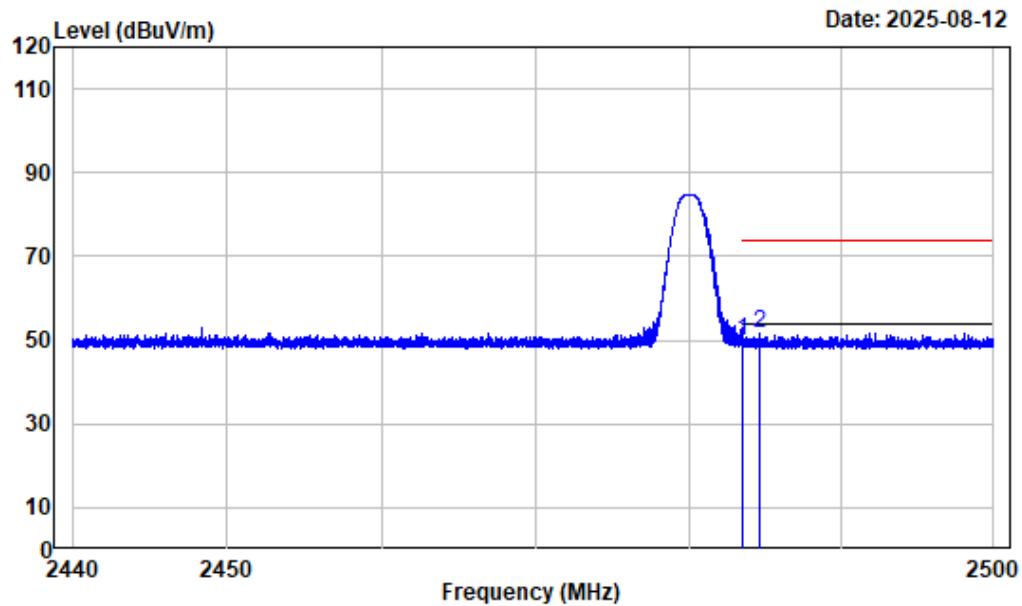

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2480

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 2483.500 | -10.97 | 60.66 | 49.69 | 74.00  | -24.31 | Peak   |
| 2    | 2484.676 | -10.97 | 62.78 | 51.81 | 74.00  | -22.19 | Peak   |


## Right Band edge\_Vertical\_BLE 1M

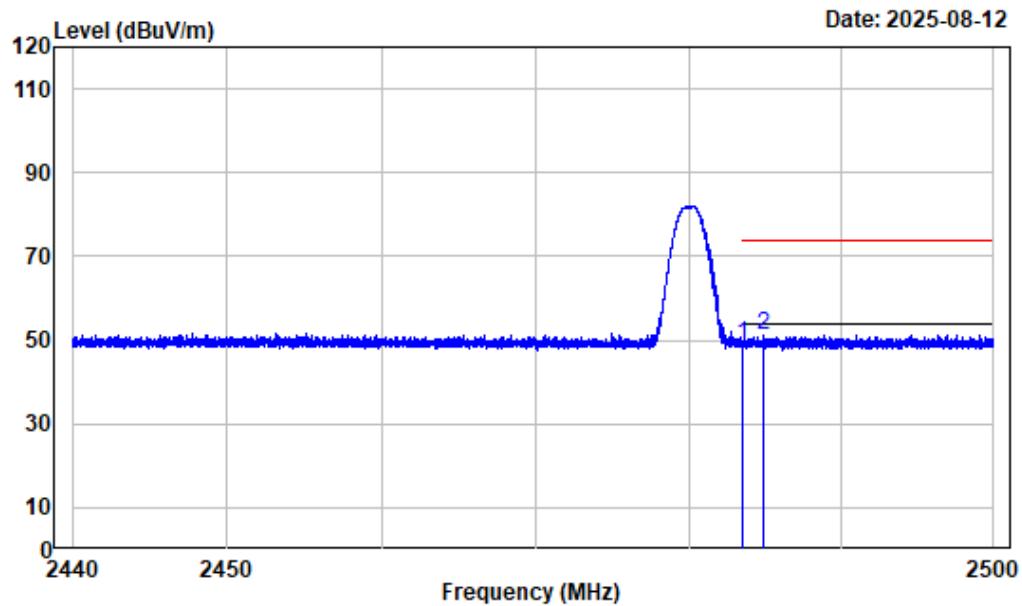

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2480

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 2483.500 | -10.97 | 59.80 | 48.83 | 74.00  | -25.17 | Peak   |
| 2    | 2484.938 | -10.97 | 62.24 | 51.27 | 74.00  | -22.73 | Peak   |


## Left Band edge\_Horizontal\_BLE 2M

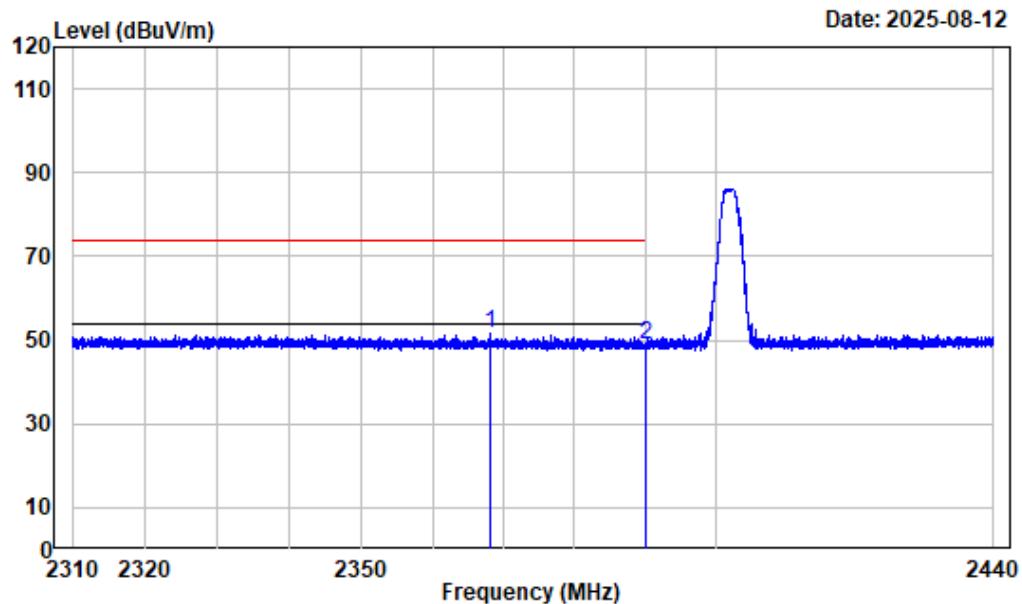

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : Ivey Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2402

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 2368.069 | -10.94 | 62.72 | 51.78 | 74.00  | -22.22 | Peak   |
| 2    | 2390.000 | -10.98 | 59.82 | 48.84 | 74.00  | -25.16 | Peak   |


## Left Band edge\_Vertical\_BLE 2M

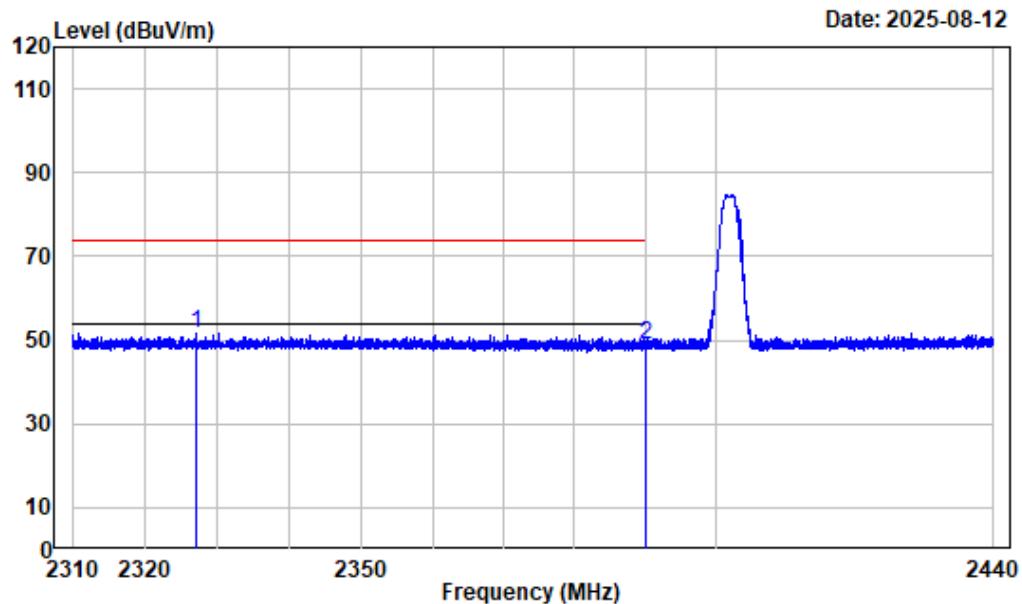

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : Ivey Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2402

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m | Line   |        |
| 1    | 2326.951 | -10.83 | 62.52 | 51.69 | 74.00  | -22.31 | Peak   |
| 2    | 2390.000 | -10.98 | 59.69 | 48.71 | 74.00  | -25.29 | Peak   |


## Right Band edge\_Horizontal\_BLE 2M

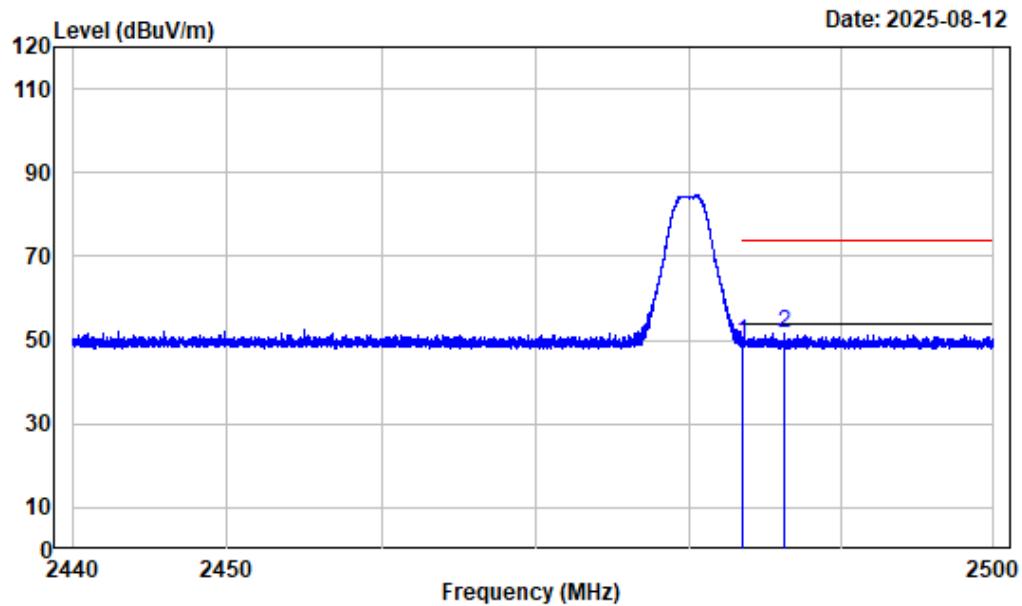

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : Ivey Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2480

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 2483.500 | -10.97 | 60.17 | 49.20 | 74.00  | -24.80 | Peak   |
| 2    | 2486.221 | -10.97 | 62.45 | 51.48 | 74.00  | -22.52 | Peak   |

## Right Band edge\_Vertical\_BLE 2M

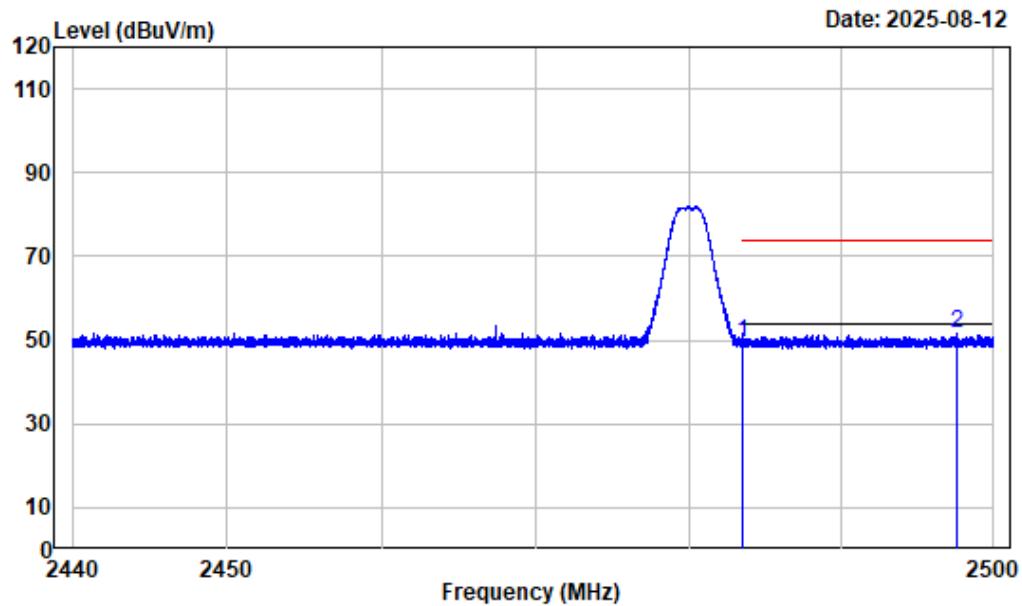


Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2480

| Freq | Factor   | Read   |       | Limit |        | Over   | Remark |
|------|----------|--------|-------|-------|--------|--------|--------|
|      |          | MHz    | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 2483.500 | -10.97 | 60.19 | 49.22 | 74.00  | -24.78 | Peak   |
| 2    | 2497.585 | -11.00 | 62.43 | 51.43 | 74.00  | -22.57 | Peak   |

**1-25GHz (Listed with the worst harmonic margin test plot)**


1-4GHz Horizontal BLE 1M 2440MHz

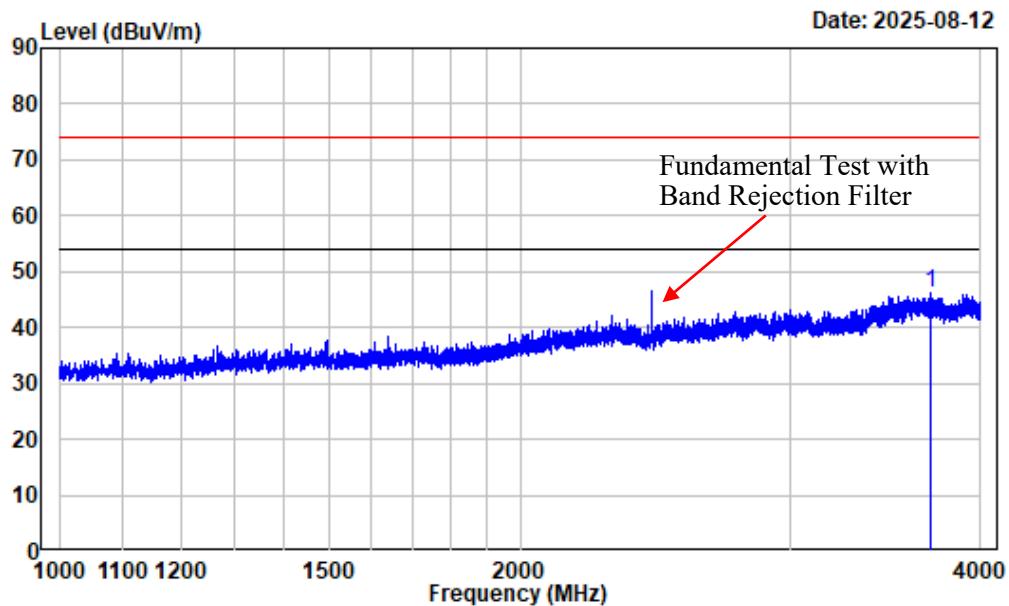

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq Factor | MHz      | Read  | Limit | Over  | Remark            |
|-------------|----------|-------|-------|-------|-------------------|
|             |          | Level | Level | Line  |                   |
| 1           | 3708.964 | -9.50 | 55.60 | 46.10 | 74.00 -27.90 Peak |


## 1-4GHz\_Verical\_\_BLE 1M\_2440MHz

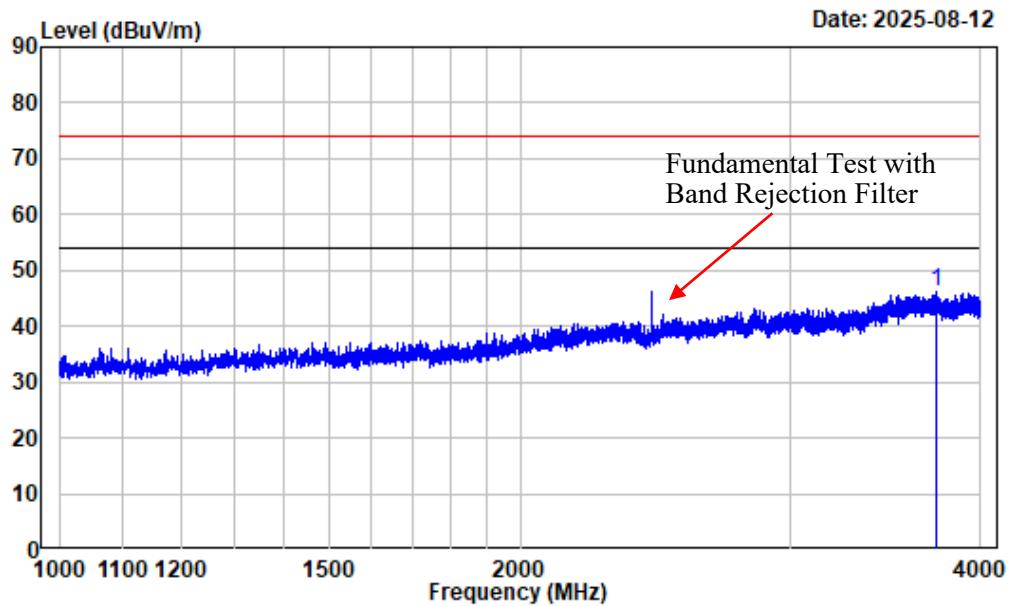

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor   | Read  |       | Limit |        | Over   | Remark |
|------|----------|-------|-------|-------|--------|--------|--------|
|      |          | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 3744.968 | -9.59 | 55.91 | 46.32 | 74.00  | -27.68 | Peak   |


## 4-18GHz\_Horizontal\_Peak\_\_BLE 1M\_2440MHz

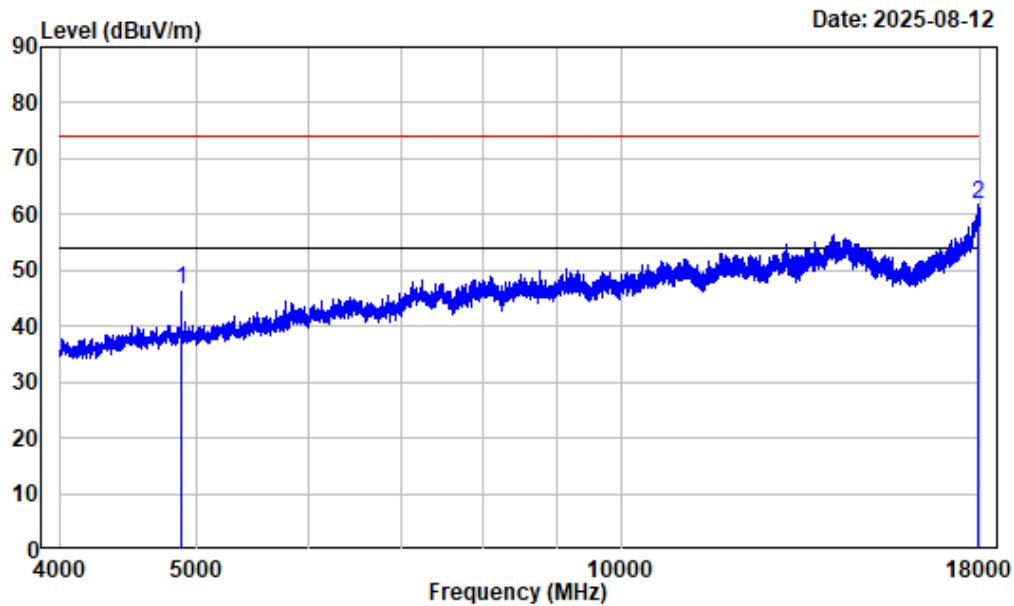

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor    | Read  |       | Limit |        | Over   | Remark |
|------|-----------|-------|-------|-------|--------|--------|--------|
|      |           | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 4880.000  | -7.59 | 54.03 | 46.44 | 74.00  | -27.56 | Peak   |
| 2    | 17919.490 | 12.80 | 49.00 | 61.80 | 74.00  | -12.20 | Peak   |


## 4-18GHz\_Horizontal\_Average\_BLE1M\_2440MHz

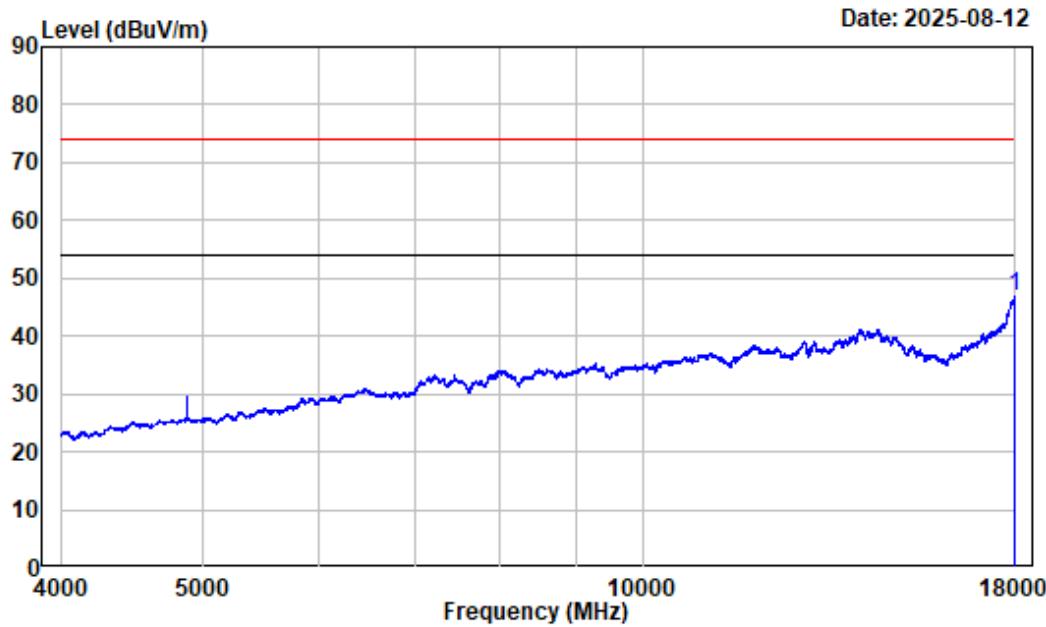

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Average reading: RBW:1MHz VBW:3kHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor    | Read  |       | Limit |       | Over  | Remark  |
|------|-----------|-------|-------|-------|-------|-------|---------|
|      |           | Level | Level | Line  | Line  |       |         |
| 1    | 17994.750 | 13.17 | 33.57 | 46.74 | 54.00 | -7.26 | Average |


## 4-18GHz\_Vertical\_Peak\_BLE 1M\_2440MHz

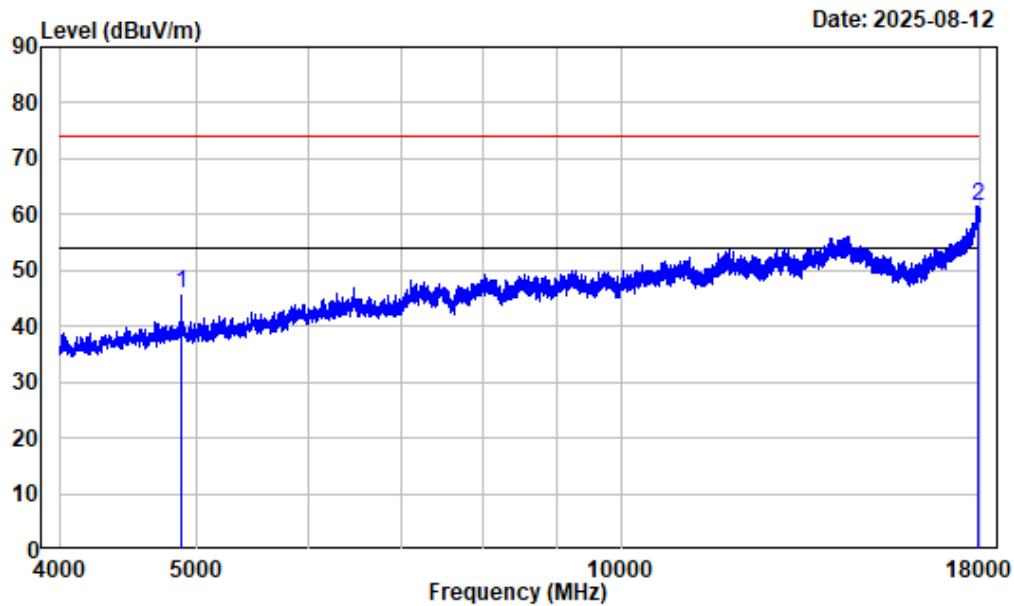

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor    | Read  |       | Limit |        | Over   | Remark |
|------|-----------|-------|-------|-------|--------|--------|--------|
|      |           | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 4880.000  | -7.59 | 53.34 | 45.75 | 74.00  | -28.25 | Peak   |
| 2    | 17952.740 | 12.97 | 48.41 | 61.38 | 74.00  | -12.62 | Peak   |


## 4-18GHz\_Vertical\_Average\_\_BLE 1M\_2440MHz

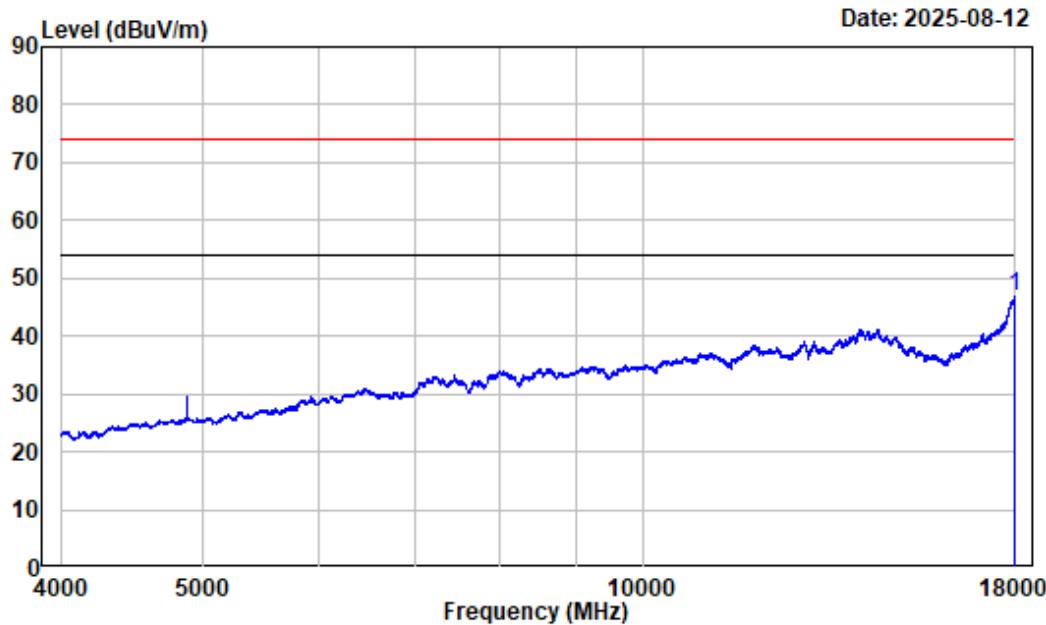

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Average reading: RBW:1MHz VBW:3kHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor    | Read  |       | Limit |       | Over  | Remark  |
|------|-----------|-------|-------|-------|-------|-------|---------|
|      |           | Level | Level | Line  | Limit |       |         |
| 1    | 17987.750 | 13.13 | 33.61 | 46.74 | 54.00 | -7.26 | Average |


## 18-25GHz\_Horizontal\_BLE 1M\_2440MHz

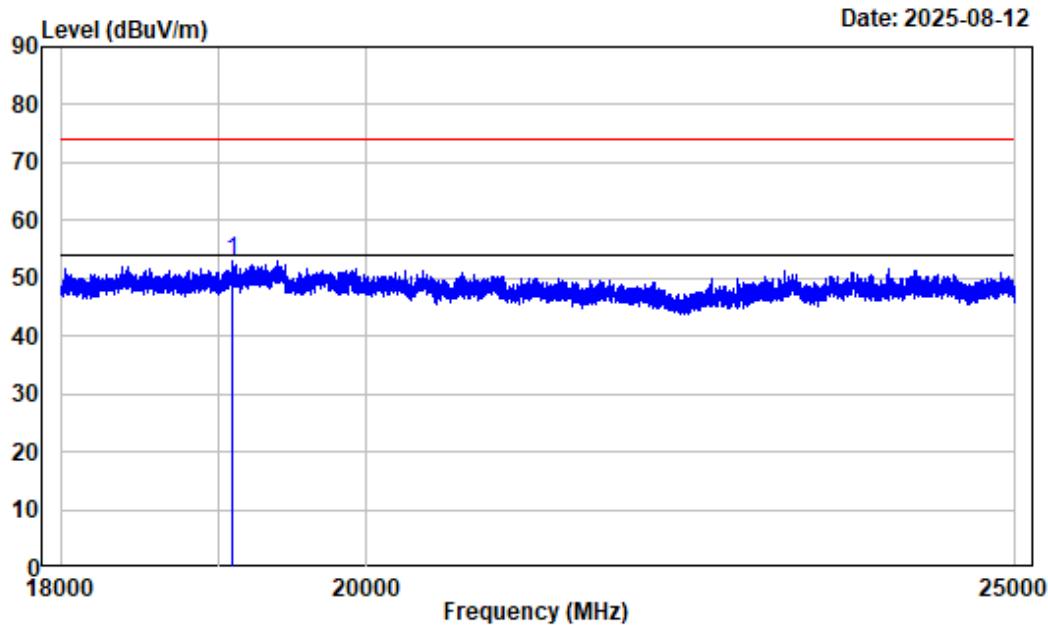

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq | Factor    | Read  | Limit | Over  | Remark            |
|------|-----------|-------|-------|-------|-------------------|
|      |           | Level | Level | Line  |                   |
| 1    | 19093.890 | 15.31 | 37.54 | 52.85 | 74.00 -21.15 peak |


## 18-25GHz\_Vertical\_BLE 1M\_2440MHz

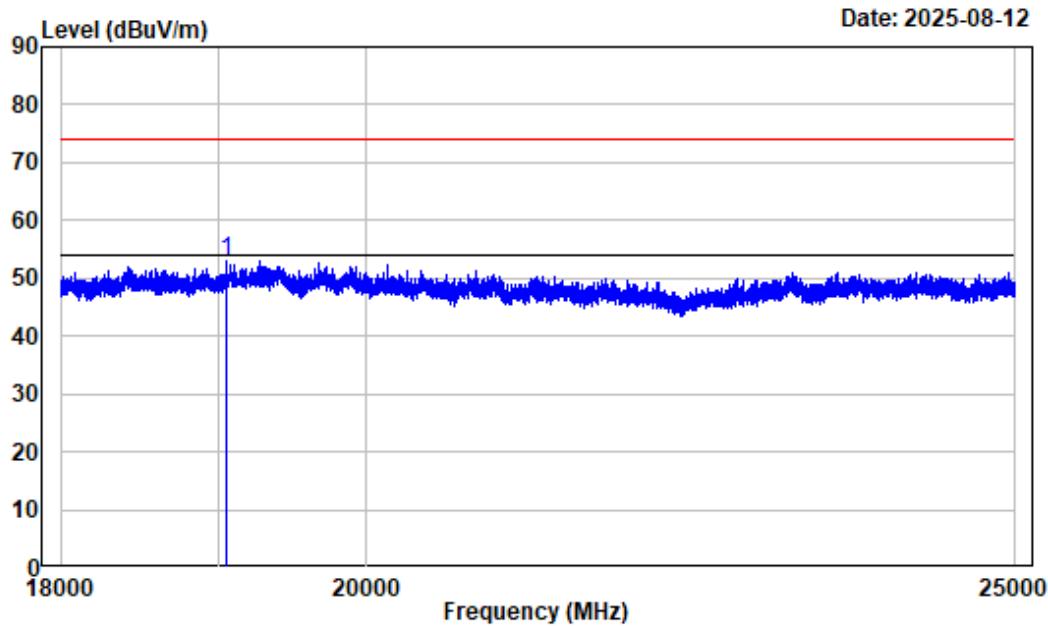

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_1M\_2440

| Freq      | Factor | Read  | Limit | Over  | Remark      |
|-----------|--------|-------|-------|-------|-------------|
|           |        | Level | Level | Line  |             |
| 19058.010 | 15.28  | 37.72 | 53.00 | 74.00 | -21.00 peak |


## 1-4GHz\_Horizontal\_\_BLE 2M\_2440MHz

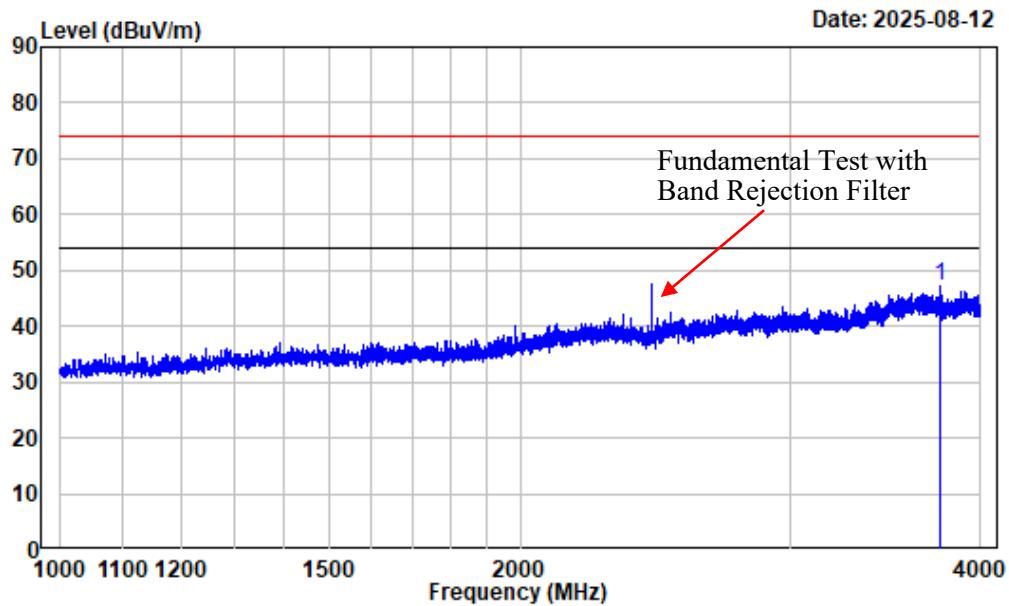

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor   | Read  |       | Limit            |                    | Over   | Remark |
|------|----------|-------|-------|------------------|--------------------|--------|--------|
|      |          | MHz   | dB/m  | dB <sub>uV</sub> | dB <sub>uV/m</sub> |        |        |
| 1    | 3765.971 | -9.67 | 56.82 | 47.15            | 74.00              | -26.85 | Peak   |


## 1-4GHz\_Verical\_\_BLE 2M\_2440MHz

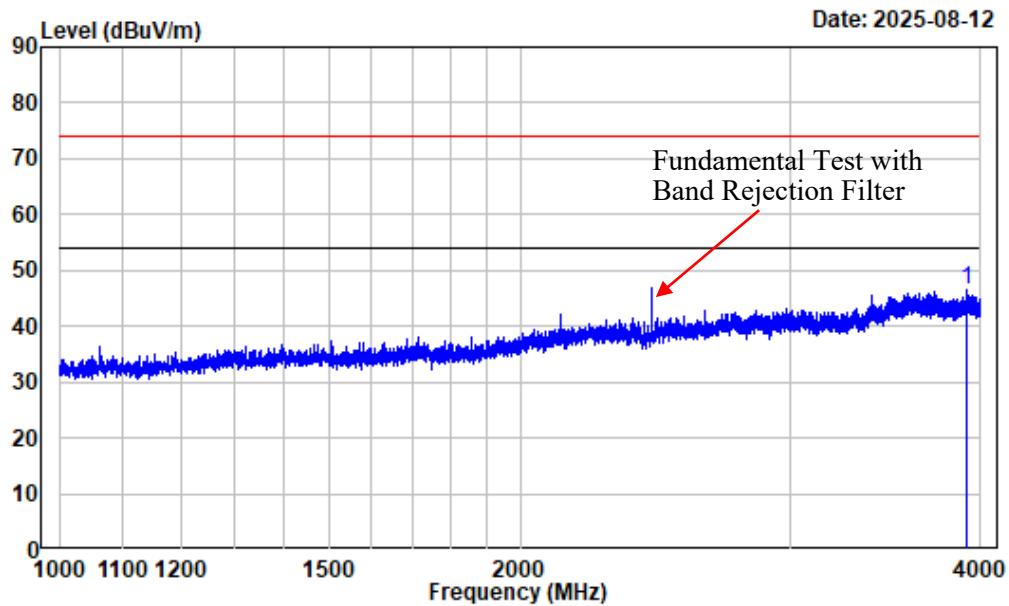

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor   | Read  |       | Limit            |                    | Over   | Remark |
|------|----------|-------|-------|------------------|--------------------|--------|--------|
|      |          | MHz   | dB/m  | dB <sub>uV</sub> | dB <sub>uV/m</sub> |        |        |
| 1    | 3916.365 | -9.66 | 56.26 | 46.60            | 74.00              | -27.40 | Peak   |


## 4-18GHz\_Horizontal\_Peak\_\_BLE 2M\_2440MHz

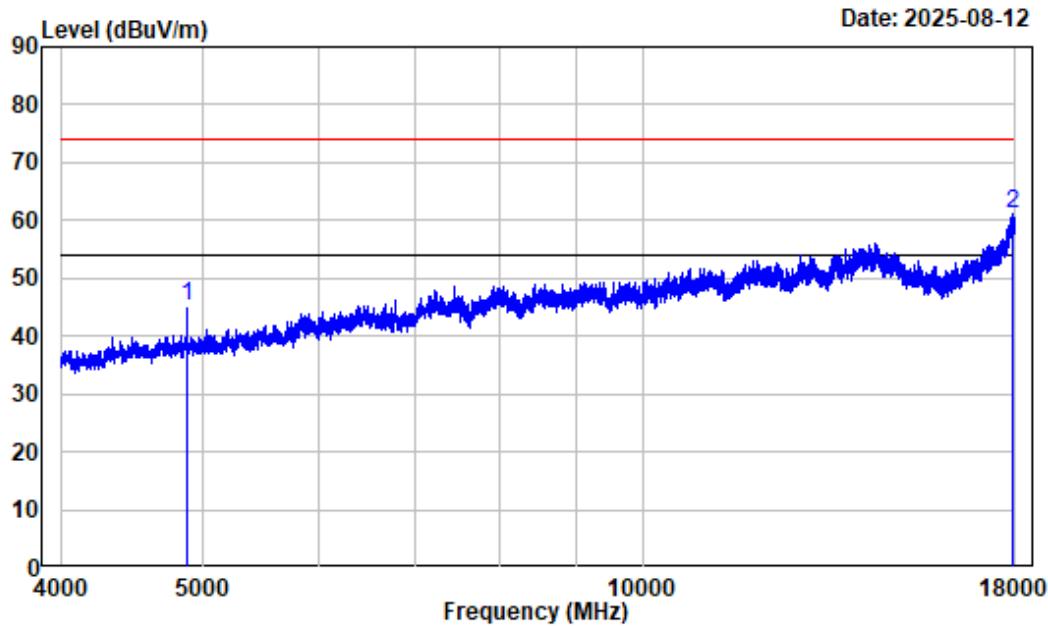

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor    | Read  |       | Limit |       | Over   | Remark |
|------|-----------|-------|-------|-------|-------|--------|--------|
|      |           | Level | Level | Line  | Limit |        |        |
| 1    | 4880.000  | -7.59 | 52.80 | 45.21 | 74.00 | -28.79 | Peak   |
| 2    | 17947.490 | 12.94 | 48.25 | 61.19 | 74.00 | -12.81 | Peak   |


## 4-18GHz\_Horizontal\_Average\_BLE2M\_2440MHz

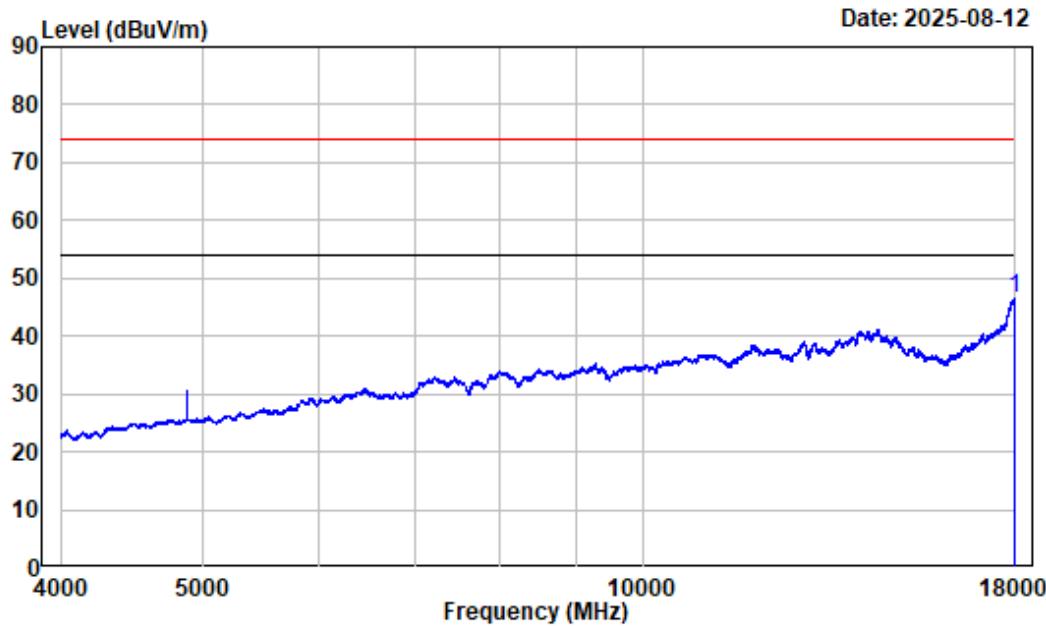

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor    | Read  |       | Limit |       | Over  | Remark  |
|------|-----------|-------|-------|-------|-------|-------|---------|
|      |           | Level | Level | Line  | Line  |       |         |
| 1    | 17987.750 | 13.13 | 33.43 | 46.56 | 54.00 | -7.44 | Average |


## 4-18GHz\_Vertical\_Peak\_BLE 2M\_2440MHz

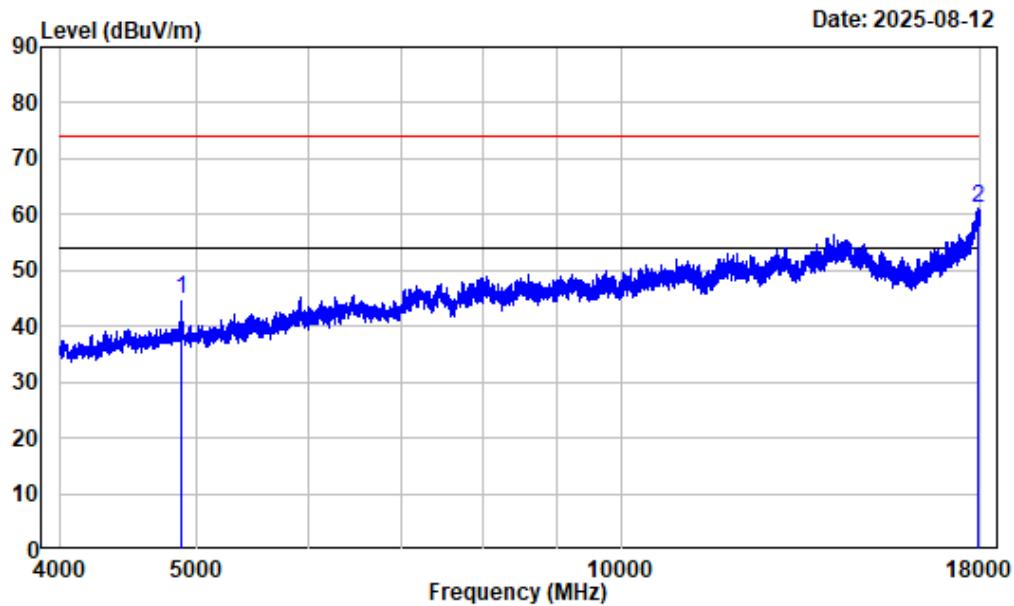

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor    | Read  |       | Limit |        | Over   | Remark |
|------|-----------|-------|-------|-------|--------|--------|--------|
|      |           | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 4880.000  | -7.59 | 52.50 | 44.91 | 74.00  | -29.09 | Peak   |
| 2    | 17933.490 | 12.87 | 48.21 | 61.08 | 74.00  | -12.92 | Peak   |


## 4-18GHz\_Vertical\_Average\_\_BLE 2M\_2440MHz

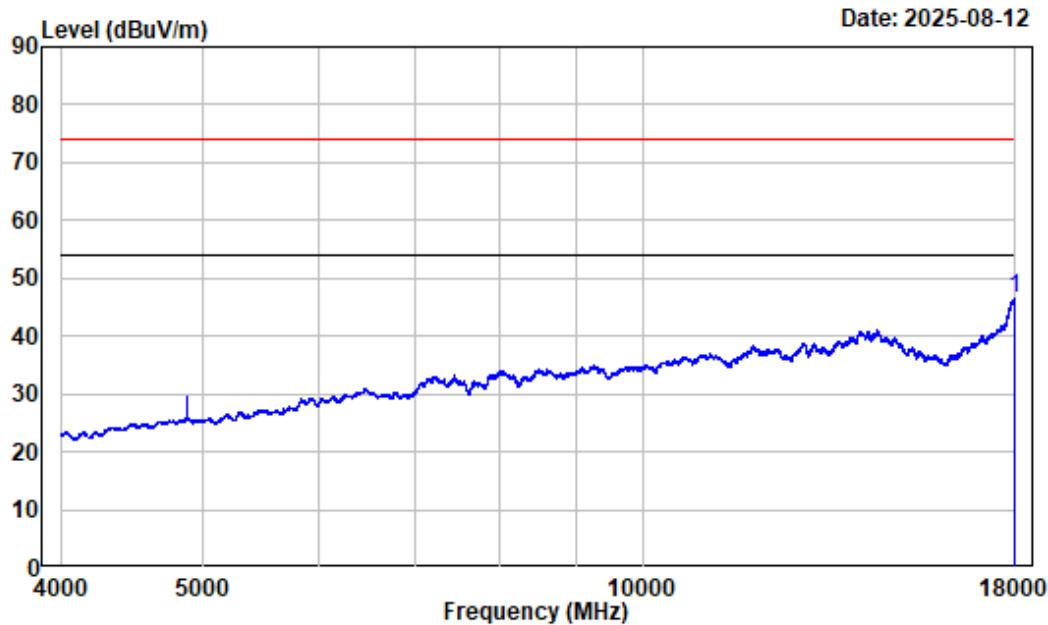

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Average reading: RBW:1MHz VBW:5kHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq        | Factor | Read  |        | Limit  |       | Over    | Remark |
|-------------|--------|-------|--------|--------|-------|---------|--------|
|             |        | Level | Level  | Line   | Line  |         |        |
| MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB    |         |        |
| 1 17989.500 | 13.16  | 33.51 | 46.67  | 54.00  | -7.33 | Average |        |


## 18-25GHz\_Horizontal\_BLE 2M\_2440MHz

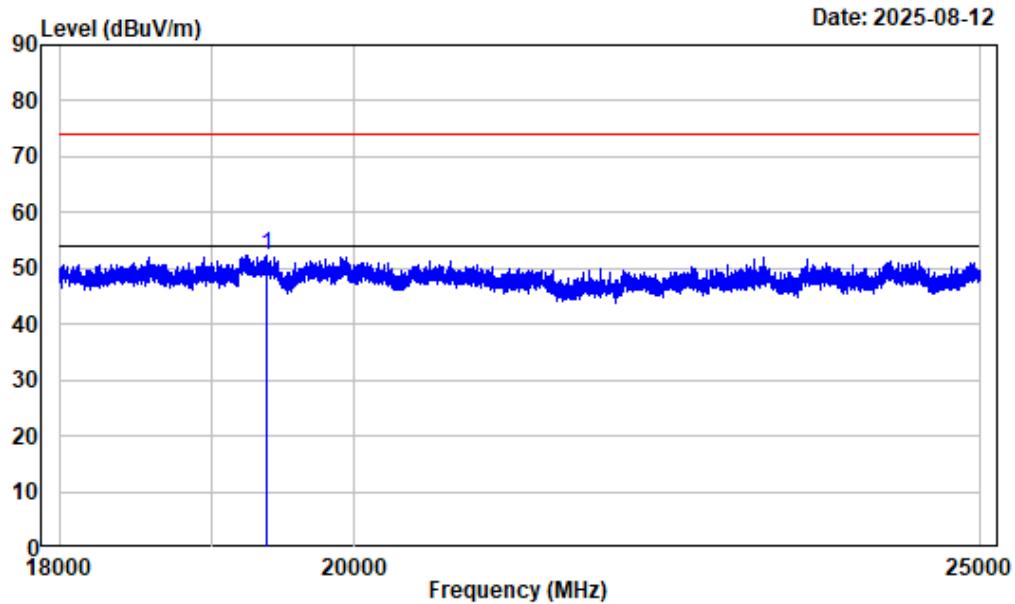

Condition : Horizontal  
Project No. : 2501W72800E-RF  
Tester : Iye Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor    | Read  |       | Limit |        | Over   | Remark |
|------|-----------|-------|-------|-------|--------|--------|--------|
|      |           | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 19380.920 | 15.11 | 37.26 | 52.37 | 74.00  | -21.63 | Peak   |

## 18-25GHz\_Vertical\_BLE 2M\_2440MHz

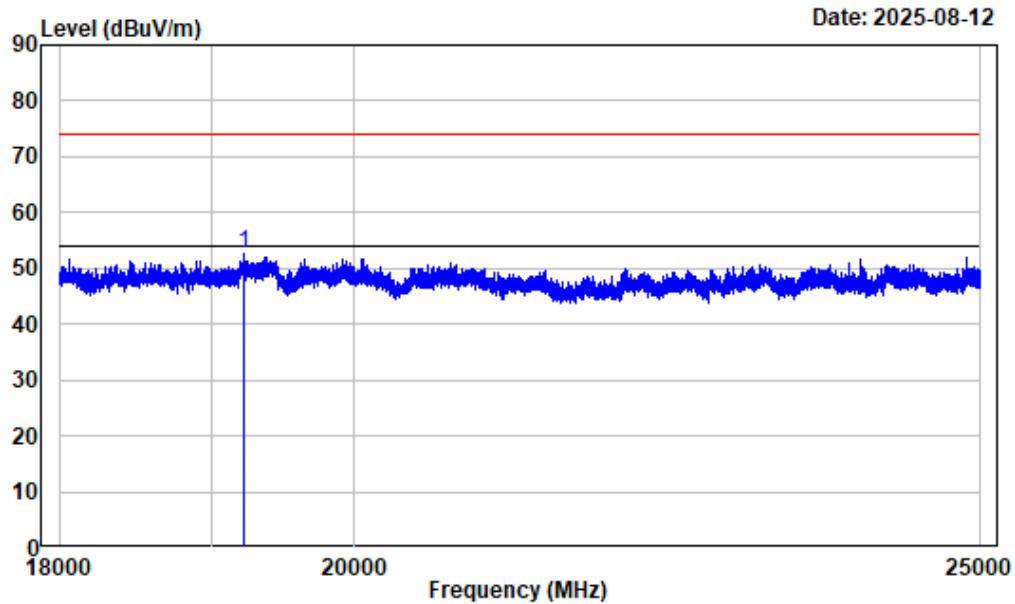

Condition : Vertical  
Project No. : 2501W72800E-RF  
Tester : IVE Wang  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : BLE\_2M\_2440

| Freq | Factor    | Read  |       | Limit |        | Over   | Remark |
|------|-----------|-------|-------|-------|--------|--------|--------|
|      |           | MHz   | dB/m  | dBuV  | dBuV/m |        |        |
| 1    | 19225.150 | 15.42 | 37.37 | 52.79 | 74.00  | -21.21 | peak   |

**6dB Emission Bandwidth****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                             |    |                                  |    |                               |       |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|

**Test Data:****BLE 1M**


| <b>Channel</b> | <b>Result (MHz)</b> | <b>Limit (MHz)</b> | <b>Verdict</b> |
|----------------|---------------------|--------------------|----------------|
| Low Channel    | 0.755               | ≥0.5               | Pass           |
| Middle Channel | 0.875               | ≥0.5               | Pass           |
| High Channel   | <b>1.000</b>        | ≥0.5               | Pass           |

**BLE 2M**


| <b>Channel</b> | <b>Result (MHz)</b> | <b>Limit (MHz)</b> | <b>Verdict</b> |
|----------------|---------------------|--------------------|----------------|
| Low Channel    | 1.170               | ≥0.5               | Pass           |
| Middle Channel | 1.178               | ≥0.5               | Pass           |
| High Channel   | <b>1.230</b>        | ≥0.5               | Pass           |

## BLE 1M


## BLE\_1M\_Low\_Channel

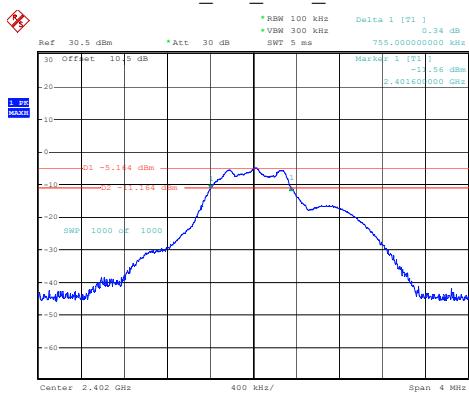


## BLE\_1M\_Middle\_Channel

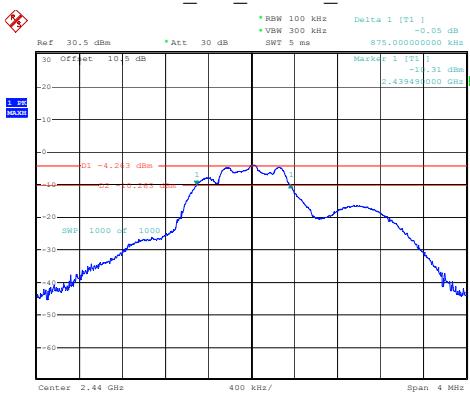


## BLE\_1M\_High\_Channel

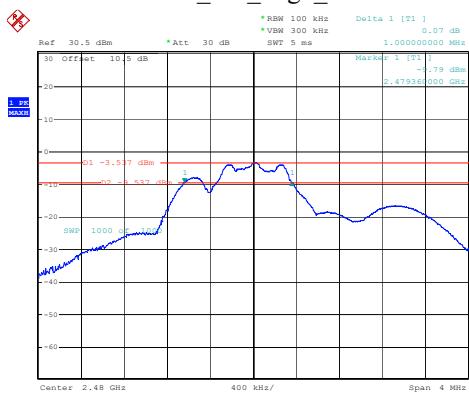


## BLE\_2M\_Low\_Channel

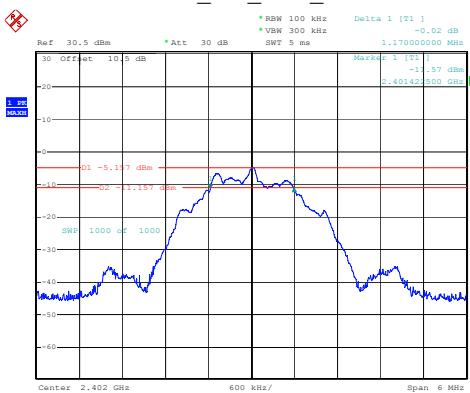

## BLE\_2M\_Middle\_Channel

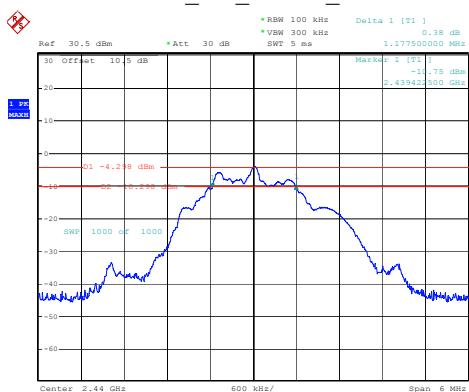

## BLE\_2M\_High\_Channel

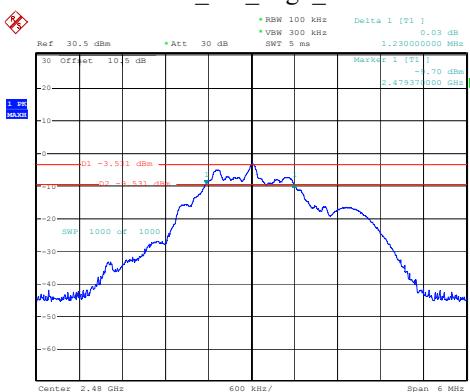

**99% Occupied Bandwidth****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | N/A          |

**Environmental Conditions:**

|                             |    |                                      |    |                               |       |
|-----------------------------|----|--------------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative<br/>Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|--------------------------------------|----|-------------------------------|-------|

**Test Data:****BLE 1M**


| <b>Channel</b> | <b>99% OBW<br/>(MHz)</b> |
|----------------|--------------------------|
| Low Channel    | 1.360                    |
| Middle Channel | 1.715                    |
| High Channel   | <b>2.200</b>             |

**BLE 2M**


| <b>Channel</b> | <b>99% OBW<br/>(MHz)</b> |
|----------------|--------------------------|
| Low Channel    | 2.055                    |
| Middle Channel | 2.168                    |
| High Channel   | <b>2.505</b>             |

## BLE 1M


## BLE\_1M\_Low\_Channel

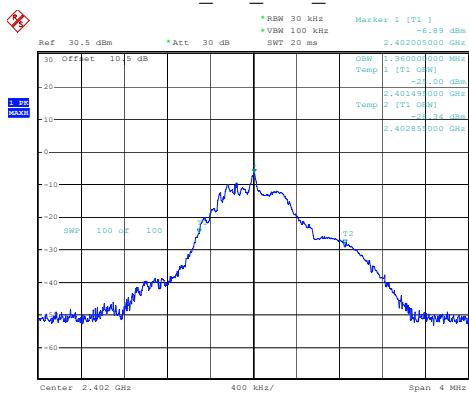


## BLE\_1M\_Middle\_Channel

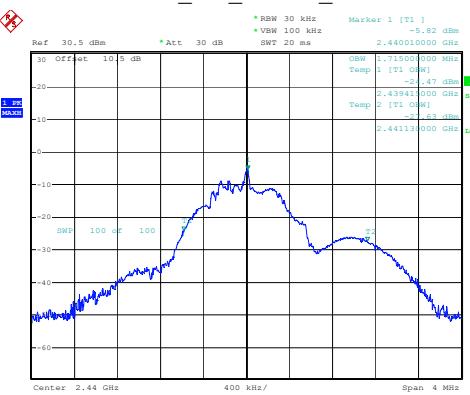


## BLE\_1M\_High\_Channel

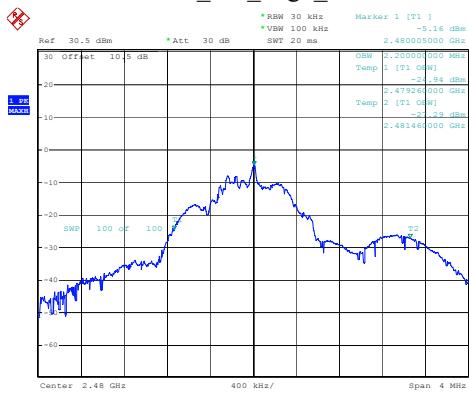


## BLE\_2M\_Low\_Channel

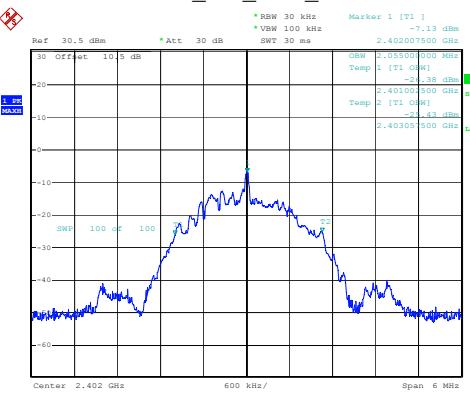

## BLE\_2M\_Middle\_Channel

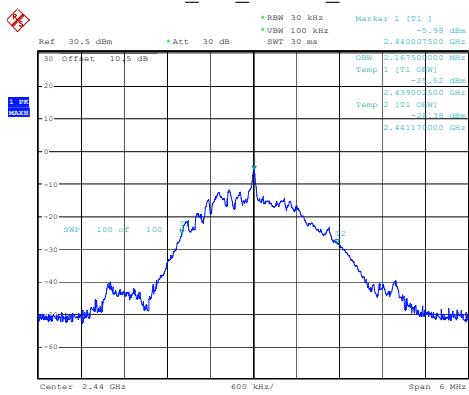

## BLE\_2M\_High\_Channel

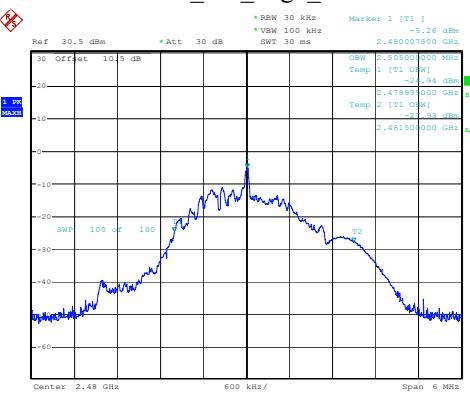

**Maximum Conducted Output Power****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                             |    |                                  |    |                               |       |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|

**Test Data:****BLE 1M**


| Channel        | Peak Output Power (dBm) | Limit (dBm) | EIRP (dBm) | EIRP Limit_IC (dBm) | Verdict |
|----------------|-------------------------|-------------|------------|---------------------|---------|
| Low Channel    | -4.61                   | 30.00       | -8.80      | 36                  | Pass    |
| Middle Channel | -3.74                   | 30.00       | -7.93      | 36                  | Pass    |
| High Channel   | <b>-3.02</b>            | 30.00       | -7.21      | 36                  | Pass    |

**BLE 2M**

| Channel        | Peak Output Power (dBm) | Limit (dBm) | EIRP (dBm) | EIRP Limit_IC (dBm) | Verdict |
|----------------|-------------------------|-------------|------------|---------------------|---------|
| Low Channel    | -4.68                   | 30.00       | -8.87      | 36                  | Pass    |
| Middle Channel | -3.76                   | 30.00       | -7.95      | 36                  | Pass    |
| High Channel   | <b>-3.03</b>            | 30.00       | -7.22      | 36                  | Pass    |

## BLE 1M


## BLE\_1M\_Low\_Channel

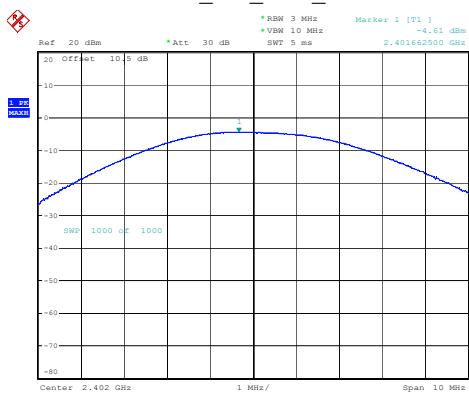


## BLE\_1M\_Middle\_Channel




## BLE\_1M\_High\_Channel

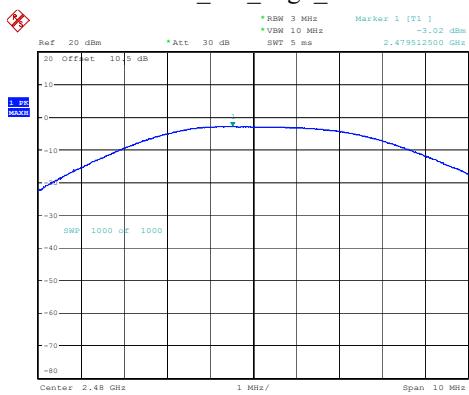

## BLE\_2M\_Low\_Channel

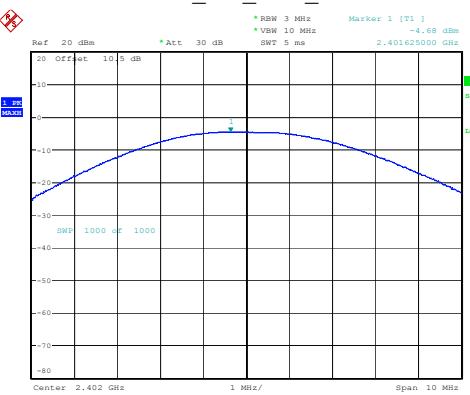

## BLE\_2M\_Middle\_Channel

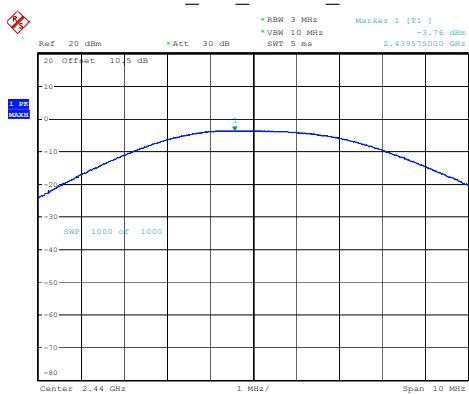

## BLE\_2M\_High\_Channel



**Power Spectral Density****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                             |    |                                  |    |                               |       |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|



**Test Data:****BLE 1M**

| <b>Channel</b> | <b>Result</b><br>(dBm/3kHz) | <b>Limit</b><br>(dBm/3kHz) | <b>Verdict</b> |
|----------------|-----------------------------|----------------------------|----------------|
| Low Channel    | -18.83                      | 8                          | Pass           |
| Middle Channel | -17.84                      | 8                          | Pass           |
| High Channel   | <b>-17.53</b>               | 8                          | Pass           |

**BLE 2M**


| <b>Channel</b> | <b>Result</b><br>(dBm/3kHz) | <b>Limit</b><br>(dBm/3kHz) | <b>Verdict</b> |
|----------------|-----------------------------|----------------------------|----------------|
| Low Channel    | -21.68                      | 8                          | Pass           |
| Middle Channel | -20.35                      | 8                          | Pass           |
| High Channel   | <b>-20.13</b>               | 8                          | Pass           |

## BLE 1M

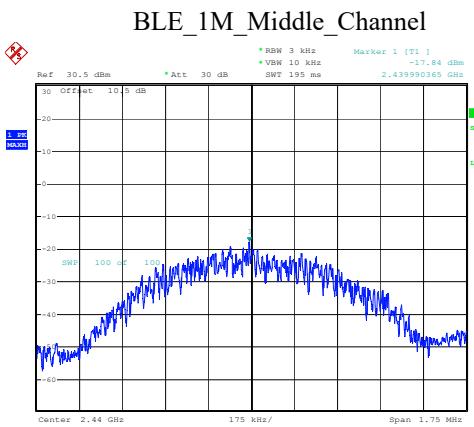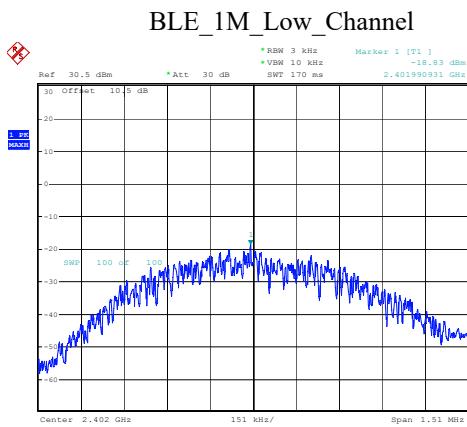


ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:03:31



## BLE 2M

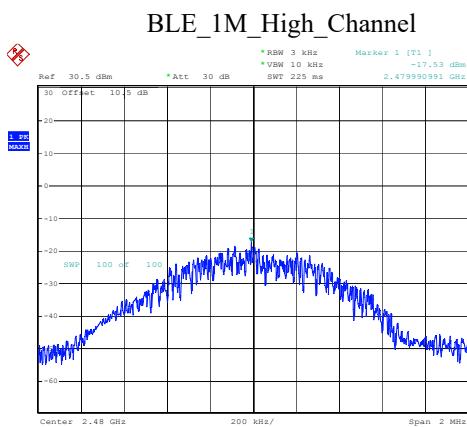

## BLE\_2M\_Low\_Channel

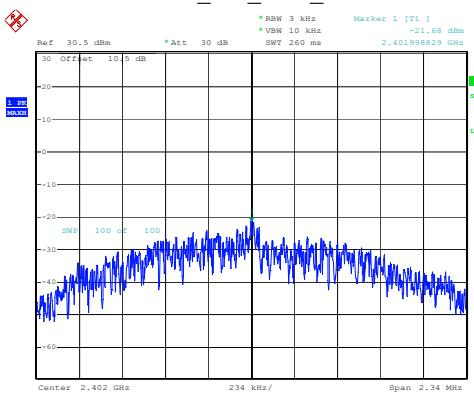

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:09:01



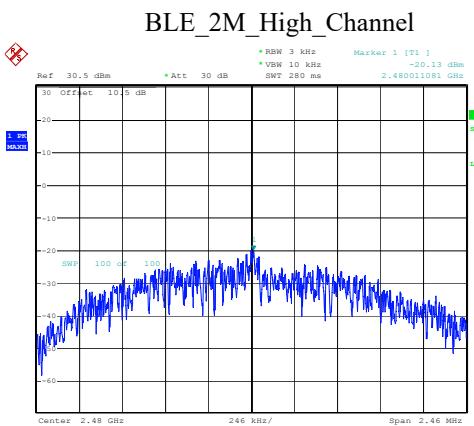
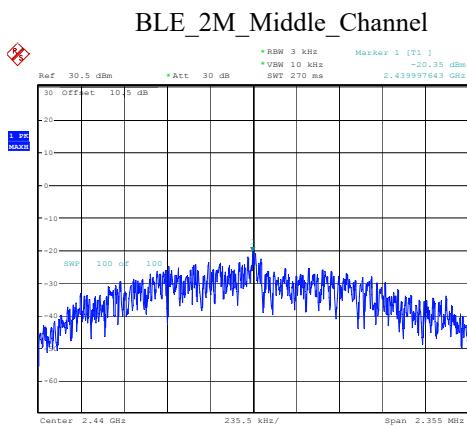


**100 kHz Bandwidth of Frequency Band Edge****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                             |    |                                  |    |                               |       |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|

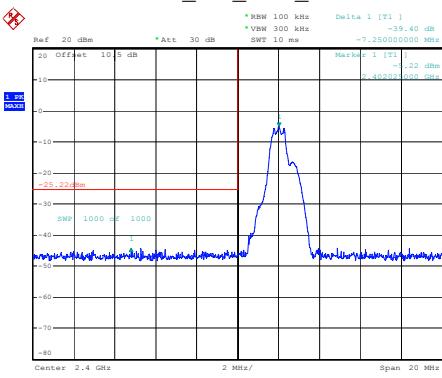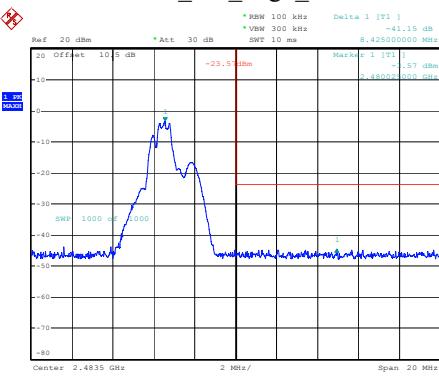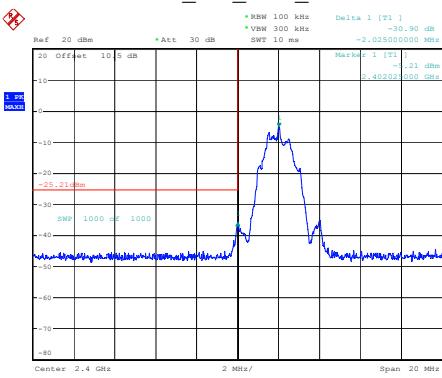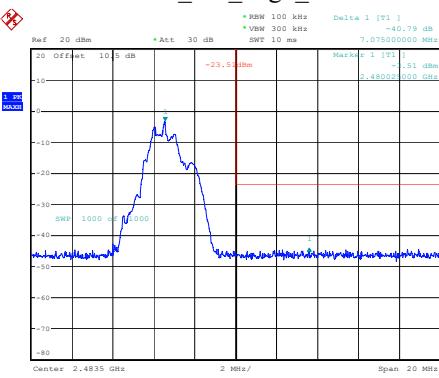**Test Data:****BLE 1M****BLE\_1M\_Low\_Channel****BLE\_1M\_High\_Channel****BLE 2M****BLE\_2M\_Low\_Channel****BLE\_2M\_High\_Channel**

**Duty Cycle****Test Information:**

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| <b>Sample No.:</b> | 37Y4-2      | <b>Test Date:</b>   | 2025/08/13   |
| <b>Test Site:</b>  | RF          | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Cheeb Huang | <b>Test Result:</b> | N/A          |

**Environmental Conditions:**

|                             |    |                                  |    |                               |       |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 27 | <b>Relative Humidity:</b><br>(%) | 60 | <b>ATM Pressure:</b><br>(kPa) | 101.5 |
|-----------------------------|----|----------------------------------|----|-------------------------------|-------|

**Test Data:****BLE 1M**


| Channel        | Ton<br>(ms)  | Ton+Toff<br>(ms) | Duty Cycle<br>(%) | Duty Cycle Factor(dB) | 1/Ton<br>(Hz) | VBW Setting<br>(kHz) |
|----------------|--------------|------------------|-------------------|-----------------------|---------------|----------------------|
| Middle Channel | <b>0.409</b> | 0.625            | 65.44             | 1.84                  | 2445          | 3                    |

**BLE 2M**


| Channel        | Ton<br>(ms)  | Ton+Toff<br>(ms) | Duty Cycle<br>(%) | Duty Cycle Factor(dB) | 1/Ton<br>(Hz) | VBW Setting<br>(kHz) |
|----------------|--------------|------------------|-------------------|-----------------------|---------------|----------------------|
| Middle Channel | <b>0.226</b> | 0.625            | 36.16             | 4.42                  | 4425          | 5                    |

**BLE 1M**

BLE\_1M\_Middle\_Channel

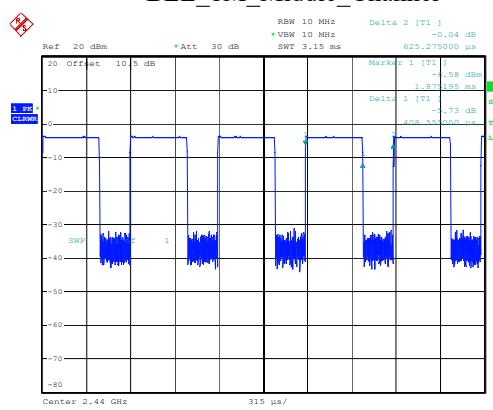**BLE 2M**

BLE\_2M\_Middle\_Channel

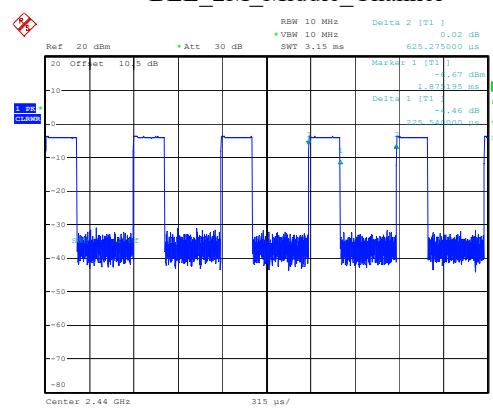

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:23:48

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:23:16

## Conducted Spurious Emission

### Test Information:


|             |             |              |              |
|-------------|-------------|--------------|--------------|
| Sample No.: | 37Y4-2      | Test Date:   | 2025/08/13   |
| Test Site:  | RF          | Test Mode:   | Transmitting |
| Tester:     | Cheeb Huang | Test Result: | Pass         |

### Environmental Conditions:


|                   |    |                        |    |                     |       |
|-------------------|----|------------------------|----|---------------------|-------|
| Temperature: (°C) | 27 | Relative Humidity: (%) | 60 | ATM Pressure: (kPa) | 101.5 |
|-------------------|----|------------------------|----|---------------------|-------|

### BLE 1M

#### BLE\_1M\_Low\_Channel

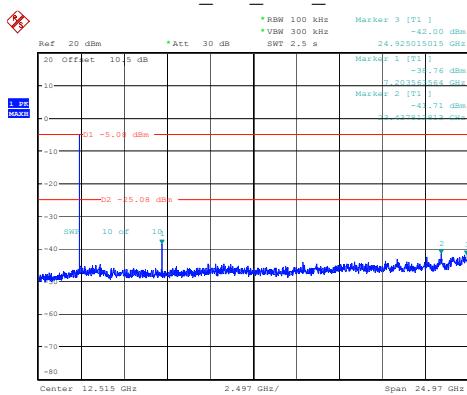


#### BLE\_1M\_Middle\_Channel

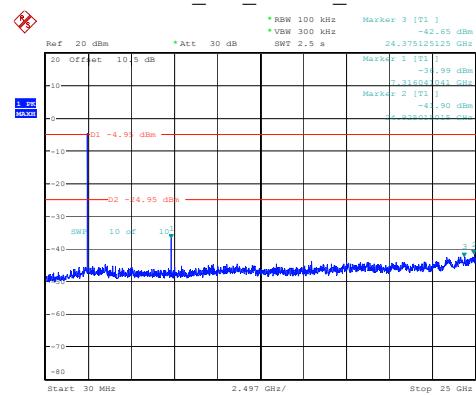


ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:20:36

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:05:32

#### BLE\_1M\_High\_Channel

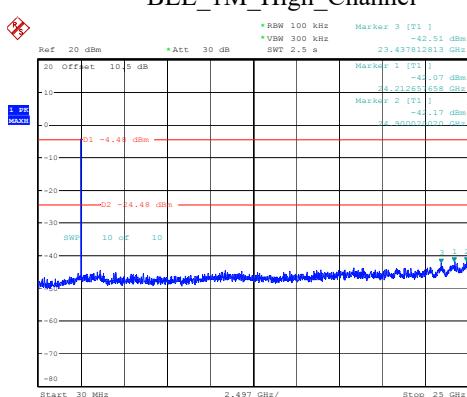


#### BLE\_2M\_Low\_Channel

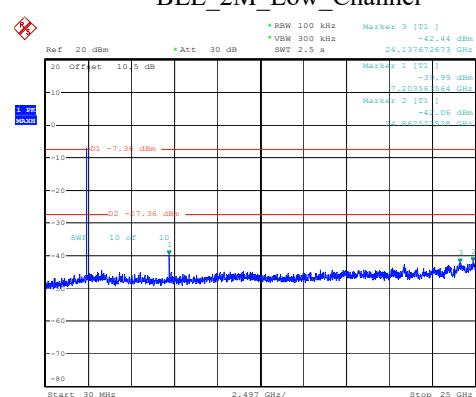


ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:08:34

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:21:40

## BLE\_2M\_Middle\_Channel

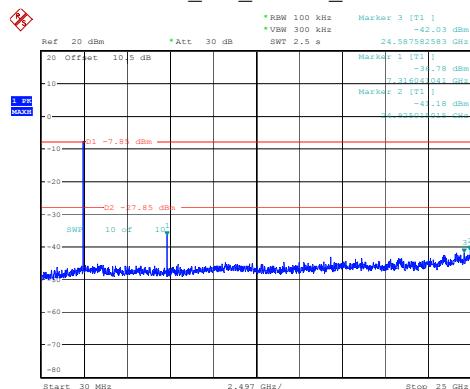

## BLE\_2M\_High\_Channel

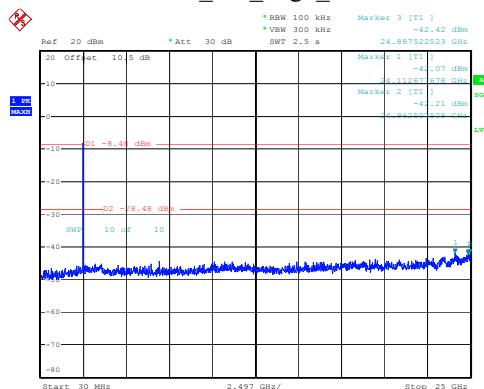

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:22:33

ProjectNo.:2501W72800E-RF Tester:Cheeb Huang  
Date: 13.AUG.2025 11:17:33

## RF EXPOSURE EVALUATION

### SAR-BASED EXEMPTION

#### Applicable Standard

According to FCC §2.1093 and §1.1307(b)(3)(i)(B)

According to KDB 447498 D04 Interim General RF Exposure Guidance v01

This exemption is applicable to the frequency range between 300 MHz and 6 GHz, with test separation distances between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

Accordingly, a RF source is considered an RF exempt device if its available maximum time averaged (matched conducted) power or its effective radiated power (ERP), whichever is greater, are below a specified threshold. This exemption threshold was derived based on general population 1-g SAR requirements and is detailed in Appendix C.

Either SAR-based or MPE-based exemption may be considered for test exemption for fixed, mobile, or portable device exposure conditions; therefore, the contributions from each exemption in conjunction with the measured SAR (Evaluated term) shall be used to determine exemption for simultaneous transmission according to Formula (C.1) [repeated from § 1.1307(b)(3)(ii)(B)].

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of  $\lambda/4$ .

As for devices with antennas of length greater than  $\lambda/4$  where the gain is not well defined, but always less than that of a half-wave dipole (length  $\lambda/2$ ), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold  $P_{th}$  (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by Formula (B.2).

$$P_{th} (\text{mW}) = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20\text{cm}}$  is per Formula (B.1). The example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

| Frequency (MHz) | Distance (mm) |    |    |     |     |     |     |     |     |     |
|-----------------|---------------|----|----|-----|-----|-----|-----|-----|-----|-----|
|                 | 5             | 10 | 15 | 20  | 25  | 30  | 35  | 40  | 45  | 50  |
| 300             | 39            | 65 | 88 | 110 | 129 | 148 | 166 | 184 | 201 | 217 |
| 450             | 22            | 44 | 67 | 89  | 112 | 135 | 158 | 180 | 203 | 226 |
| 835             | 9             | 25 | 44 | 66  | 90  | 116 | 145 | 175 | 207 | 240 |
| 1900            | 3             | 12 | 26 | 44  | 66  | 92  | 122 | 157 | 195 | 236 |
| 2450            | 3             | 10 | 22 | 38  | 59  | 83  | 111 | 143 | 179 | 219 |
| 3600            | 2             | 8  | 18 | 32  | 49  | 71  | 96  | 125 | 158 | 195 |
| 5800            | 1             | 6  | 14 | 25  | 40  | 58  | 80  | 106 | 136 | 169 |

$$P_{th} (\text{mW}) = ERP_{20 \text{ cm}} (\text{mW}) = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure\ Limit_k} \leq 1 \quad (\text{C.1})$$

*a* number of fixed, mobile, or portable RF sources claiming exemption using the § 1.1307(b)(3)(i)(B) formula for  $P_{th}$ , including existing exempt transmitters and those being added.

*b* number of fixed, mobile, or portable RF sources claiming exemption using the applicable § 1.1307(b)(3)(i)(C) Table 1 formula for Threshold ERP, including existing exempt transmitters and those being added.

*c* number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance.

$P_i$  the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source  $i$  at a distance between 0.5 cm and 40 cm (inclusive).

$P_{th,i}$  the exemption threshold power ( $P_{th}$ ) according to the § 1.1307(b)(3)(i)(B) formula for fixed, mobile, or portable RF source  $i$ .

$ERP_j$  the available maximum time-averaged power or the ERP, whichever is greater, of fixed, mobile, or portable RF source  $j$ .

$ERP_{th,j}$  exemption threshold ERP for fixed, mobile, or portable RF source  $j$ , at a distance of at least  $\lambda/2\pi$ , according to the applicable § 1.1307(b)(3)(i)(C) Table 1 formula at the location in question.

$Evaluated_k$  the maximum reported SAR or MPE of fixed, mobile, or portable RF source  $k$  either in the device or at the transmitter site from an existing evaluation.

$Exposure\ Limit_k$  either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable sources, as applicable

The sum of the ratios of the applicable terms for SAR-based, MPE-based and measured SAR or MPE shall be less than 1, to determine simultaneous transmission exposure compliance.

**Measurement Result****For worst case:**

| Radio | Frequency<br>(MHz) | Distance<br>(mm) | P <sub>th</sub><br>(mW) | Maximum<br>Conducted<br>Power including<br>Tune-up<br>Tolerance (dBm) | Antenna<br>Gain<br>(dBi) | The Greater of<br>Conducted Power |     |
|-------|--------------------|------------------|-------------------------|---|--------------------------|-----------------------------------|-----|
|       |                    |                  |                         |   |                          | dBm                               | mW  |
| BLE   | 2402-2480          | 5                | 2.72                    | -3  | -4.19                    | -3                                | 0.5 |

Note: Max tune-up conducted power<sup>#</sup> and antenna gain<sup>#</sup> was declared and provided by the applicant

**Result: Compliant**

## SAR EXEMPTION LIMITS

### Applicable Standard

According to RSS-102 Issue 6 § (6.3), Devices operating at or below the applicable output power levels (adjusted for tune-up tolerance) specified in table 11, based on the separation distance, are exempt from SAR evaluation. The separation distance, defined as the distance between the user and/or bystander and the antenna and/or radiating element of the device or the outer surface of the device, shall be less than or equal to 20 cm for these exemption limits to apply.

Table 11: Power limits for exemption from routine SAR evaluation based on the separation distance

| Frequency (MHz) | ≤ 5 mm (mW) | 10 mm (mW) | 15 mm (mW) | 20 mm (mW) | 25 mm (mW) | 30 mm (mW) | 35 mm (mW) | 40 mm (mW) | 45 mm (mW) | > 50 mm (mW) |
|-----------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|--------------|
| ≤ 300           | 45          | 116        | 139        | 163        | 189        | 216        | 246        | 280        | 319        | 362          |
| 450             | 32          | 71         | 87         | 104        | 124        | 147        | 175        | 208        | 248        | 296          |
| 835             | 21          | 32         | 41         | 54         | 72         | 96         | 129        | 172        | 228        | 298          |
| 1900            | 6           | 10         | 18         | 33         | 57         | 92         | 138        | 194        | 257        | 323          |
| 2450            | 3           | 7          | 16         | 32         | 56         | 89         | 128        | 170        | 209        | 245          |
| 3500            | 2           | 6          | 15         | 29         | 50         | 72         | 94         | 114        | 134        | 158          |
| 5800            | 1           | 5          | 13         | 23         | 32         | 41         | 54         | 74         | 102        | 128          |

The exemption limits in table 11 are based on measurements and simulations of half-wave dipole antennas at separation distances of 5 mm to 50 mm from a flat phantom, which provides a SAR value of approximately 0.4 W/kg for 1 g of tissue.

For limb-worn devices where the 10 gram of tissue applies, the exemption limits for routine evaluation in table 11 are multiplied by a factor of 2.5.

For controlled-use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in table 11 are multiplied by a factor of 5.

When the operating frequency of the device is between two frequencies located in table 11, linear interpolation shall be applied for the applicable separation distance. If the separation distance of the device is between two distances located in table 11, linear interpolation may be applied for the applicable frequency. Alternatively, the limit corresponding to the smaller distance may be employed. For example, in case of a 7 mm separation distance, either use the exception value for a 5 mm separation distance or interpolate between the limits corresponding to 5 mm and 10 mm separation distances.

For implanted medical devices, the exemption limit for routine SAR evaluation is set at an output power of 1 mW, regardless of frequency.

The SAR levels from exempted transmitters shall be included in the compliance assessment and the determination of the TER. Detailed guidance is included in sections 7.1.8 and 8.2.2.1.

**Test Result:**

For worst case:

| Mode | Frequency (MHz) | Gain <sup>#</sup> (dBi) | Max tune-up conducted power <sup>#</sup> |      | Distance (mm) | Exemption Limit (mW) | SAR Evaluation Exemption |
|------|-----------------|-------------------------|--|------|---------------|----------------------|--------------------------|
|      |                 |                         | (dBm)                                    | (mW) |               |                      |                          |
| BLE  | 2402-2480       | -4.19                   | -3                                       | 0.5  | 5             | 2.97                 | Yes                      |

Note 1: (2480-2450)/(3500-2450)=(3-P)/(3-2), the exemption limit of 2480MHz is P= 2.97 mW

Note 2: The max tune-up conducted power<sup>#</sup> and antenna gain<sup>#</sup> were declared by the applicant**Result: Compliant**

## **EUT PHOTOGRAPHS**

Please refer to the attachment 2501W72800E-RF-EXP External photo and 2501W72800E-RF-INP Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2501W72800E-RF-TSP Test Setup photo.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***