



Volume Control TEST REPORT

No.25T04Z100361-008

for

Luxshare Precision Limited

5G Mobile Phone

TMRV085G

FCC ID:2BNRMTMRV085G

with

Hardware Version: V1.0

Software Version: TMRV085G_0.02.01

Issued Date: 2025-05-19

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100361-008	Rev.0	1st edition	2025-05-19

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATA	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. AIR INTERFACES / BANDS USED FOR TESTING.....	9
6. TEST RESULTS	9
6.1. TEST SUMMARY AND CONCLUSIONS.....	9
6.2. DESCRIPTION OF TEST SETUP	10
6.3. TEST DETAIL RESULTS	11
7. TEST FACILITIES UTILIZED	18
ANNEX A: EUT PHOTOGRAPH	19
ANNEX B: EUT PARAMETERS.....	20
ANNEX C: TEST LAYOUT	21
ANNEX D: THE WORST-CASE MEASUREMENT DATA OF THE CHOSEN CODEC OF TELEPHONY CALL	22
ANNEX E: THE WORST-CASE MEASUREMENT DATA OF OTHER CODECS OF TELEPHONY CALL	28
ANNEX F: FREQUENCY RESPONSE USED DF AND 1/12 OCTAVE	29
ANNEX G: HATS CERTIFICATE.....	30
ANNEX H: ACOUSTIC CHAMBER CERTIFICATE	31
ANNEX I: ACCREDITATION CERTIFICATE.....	32

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191


1.3. Testing Environment

Normal Temperature: 18-28℃
Relative Humidity: 0-80%
Ambient noise of 14dB(A) and is compliance with requirement of standards
acoustic chamber (SEE ANNEX H)


1.4. Project data

Testing Start Date: 2025-03-13
Testing End Date: 2025-04-28

1.5. Signature



Zhu Hongye
(Prepared this test report)



Lu Yuping
(Reviewed this test report)



Zhao Xinglong
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Luxshare Precision Limited Suite 1621, 16/F., Ocean Centre, Harbour City, 5 Canton Road, Tsim Sha Tsui, Kowloon.
Address	
Contact	Ri Sa
Email	Rui.Sha@luxshare-ict.com
Tel.	+8613917939276
Fax	/

2.2. Manufacturer Information

Company Name	Luxshare Precision Limited Suite 1621, 16/F., Ocean Centre, Harbour City, 5 Canton Road, Tsim Sha Tsui, Kowloon.
Address	
Contact	Ri Sa
Email	Rui.Sha@luxshare-ict.com
Tel.	+8613917939276
Fax	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

General Information:

Description	5G Mobile Phone
Model name/HVIN	TMRV085G
Brand name	Revvl 8
FCC ID	2BNRMTMRV085G
Extreme Temperature	-10~55℃
Nominal Voltage	3.87V
Extreme High Voltage	4.45V
Extreme Low Voltage	3.6V

Supported Bands:

UMTS Frequency Band(s)	B 2/4/5
GSM Frequency Band(s)	GSM 850/900/1800/1900
E-UTRA Frequency Band(s)	B 2/4/5/7/12/25/26/28/41/48/66/71
WLAN Frequency Band(s)	2.4G/5GHz
5G Frequency Band(s)	N 25/28/41/48/66/71/78

Supported Codecs:

UMTS Audio Codec(s)	AMR NB/AMR WB
GSM Audio Codec (s)	EFR/AMR NB/AMR WB
E-UTRA Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
WLAN Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
5G Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
OTT	Google Meet

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT117a	IMEI: 866690080001283/ 866690080002471	V1.0	TMRV085G_0.02.01	2025-03-04

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN
---------------	--------------------	-----------

/

/

/

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
ANSI C63.19	American National Standard Methods of Measurement of Compatibility Between Wireless Communications Devices and Hearing Aids	2019
TIA 5050	Telecommunications Communications Products Receive Volume Control Requirements for Wireless (Mobile) Devices	2018 Edition
285076 D04 Volume Control v02	GUIDANCE FOR PERFORMING VOLUME CONTROL MEASUREMENTS ON MOBILE HANDSETS	2023.09.29
285076 D05 HAC Waiver DA 23-914 v01	HAC COMPLIANCE UNDER WAIVER DA 23-914	2023.09.29

5. Air Interfaces / Bands used for testing

The codec bit rates of the applicant's choosing are EVS-NB 24.4kbps and EVS-WB 24.4kbps.

Air-interface	Band	Tested Codec	Tested Rate(kbps)
GSM	850/1900	EFR	/
WCDMA (UMTS)	B2/4/5	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
VoLTE	B2/4/5/7/12/25/26/28/ 41/48/66/71	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
		EVS-NB	24.4
		EVS-WB	24.4
VoWiFi	802.11g/ac	AMR-NB	4.75
		EVS-NB	24.4
		EVS-WB	24.4
VoNR	N 25/28/41/48/66/ 71/78	AMR-NB	4.75
		EVS-NB	24.4

6. Test Results

6.1. Test summary and Conclusions

The volume control measurement method is in accordance with the TIA 5050-2018.

The EUT was tested in CTTL acoustics laboratory. All the detail results are showed in section 6.3.

I: Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:

- a. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing.
- b. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing.

II: For all other narrowband and wideband codecs not evaluated in I.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6

dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with I.a. shall be used for these other CMRS codec evaluations.

III. Any other codec for voice services embedded in the handset, not identified in I and II above, is not required to comply or demonstrate in the test reports for conversational gain.

Table 6.1-1: the worst-case test results of the chosen codec of telephony call

Mode	Channel	Modulation	Data Rate	Volume Level	Codec	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain (AN NEX D)	RFR (AN NEX D)	Min PN-SDNR (ANNEX D)		Verdict
			[Mbps]				[kbps]	[N]	[dB]		[Hz]	[dB]	
802.11ac	44	16-QAM	36	Max	EVS	NB	24.4	2N	19.63	PASS	630	25.03	PASS
802.11ac	44	16-QAM	36	Max	EVS	NB	24.4	8N	19.30	PASS	1250	30.28	PASS
802.11ac	44	16-QAM	36	Max	EVS	WB	24.4	2N	19.62	PASS	1250	33.17	PASS
802.11ac	44	16-QAM	36	Max	EVS	WB	24.4	8N	19.30	PASS	1250	33.01	PASS

Table 6.1-2: the worst-case test results of other codecs of telephony call

Band	Channel	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Codec	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain (AN NEX E)	FR	Min PN-SDNR		Verdict
		[MHz]							[kbps]	[N]	[dB]		[Hz]	[dB]	
LTE B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	2N	17.89	/	/	/	PASS
LTE B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	8N	18.05	/	/	/	PASS
LTE B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	2N	18.68	/	/	/	PASS
LTE B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	8N	18.50	/	/	/	PASS
GSM 850	162	/	/	/	/	Max	EFR	NB	/	2N	18.50	/	/	/	PASS
GSM 850	162	/	/	/	/	Max	EFR	NB	/	8N	18.76	/	/	/	PASS

6.2. Description of Test Setup

In order to provide the complete information about the measurement environment within this report the setup is described in this chapter. Figure 6.2.1 shows a block diagram of the test arrangement.

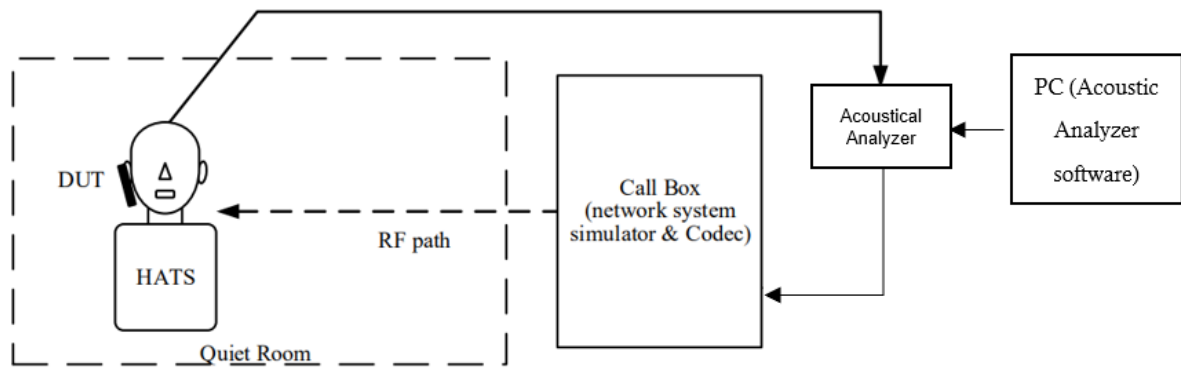


Fig. 6.2.1: Block diagram of the test setup

An artificial head measurement system according to ITU-T Recommendation P.58 equipped with artificial ears (Type3.3 acc. ITU-T Rec. P.57) are used. The artificial head is placed in the center of an anechoic test room. The measurements are implemented in the HEAD acoustics software ACQUA and can be carried out automatically. They allow signal recording at the artificial ears and feeding at the network simulator.

The network simulators (e.g. Rohde & Schwarz CMW500, CMX500) establish the call to the mobile phone via an antenna connection. The EUT was tested using EFR/AMR-NB/AMR-WB/EVS-NB/EVS-WB codecs.

ANNEX C shows the handheld Positioner with mounted EUT. The application force between the phone and the artificial ear is adjusted. A mounting force of 2N or 8 N is adjusted.

6.3. Test Detail Results

6.3.1 VoLTE IMS call investigation

Table 6.3.1-1: the **Codec** and **Bandwidth** investigating results of **VoLTE** IMS call

Band	Channel	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Codec	NB/WB	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
		[MHz]							[kbps]	[N]			[Hz]	[dB]
B2	18900	10	QPSK	50	0	Max	EVS	NB	24.4	2N	18.73	PASS	630	27.55
B2	18900	10	QPSK	50	0	Max	EVS	NB	24.4	8N	18.13	PASS	1250	32.47
B2	18900	10	QPSK	50	0	Max	EVS	WB	24.4	2N	18.84	PASS	1250	29.99
B2	18900	10	QPSK	50	0	Max	EVS	WB	24.4	8N	18.36	PASS	1250	32.35
B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	2N	17.89	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	NB	12.2	2N	18.97	/	/	/

B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	8N	18.05	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	2N	18.68	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	23.85	2N	19.40	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	8N	18.50	/	/	/

Table 6.3.1-2: the **Radio Configuration** investigating results of **VoLTE** IMS call

Band	Channel	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Code c	NB/ WB	Bit Rate	2N/ 8N	Conv Gain	FR	Min PN-SDNR	
		[MHz]							[kbps]	[N]	[dB]		[Hz]	[dB]
B2	18900	10	QPSK	1	0	Max	EVS	NB	24.4	2N	18.85	PASS	630	26.88
B2	18900	10	QPSK	1	49	Max	EVS	NB	24.4	2N	18.83	PASS	630	27.73
B2	18900	10	16QAM	1	0	Max	EVS	NB	24.4	2N	18.81	PASS	1250	33.50
B2	18900	10	16QAM	1	49	Max	EVS	NB	24.4	2N	18.85	PASS	1250	32.53
B2	18900	10	16QAM	50	0	Max	EVS	NB	24.4	2N	18.81	PASS	1250	31.92
B2	18900	20	QPSK	100	0	Max	EVS	NB	24.4	2N	18.83	PASS	500	30.35
B2	18900	20	QPSK	1	0	Max	EVS	NB	24.4	2N	18.89	PASS	1250	33.25
B2	18900	20	QPSK	1	99	Max	EVS	NB	24.4	2N	18.90	PASS	630	28.35
B2	18900	20	16QAM	1	0	Max	EVS	NB	24.4	2N	18.91	PASS	1250	32.34
B2	18900	20	16QAM	1	99	Max	EVS	NB	24.4	2N	18.89	PASS	1250	33.12
B2	18900	20	16QAM	100	0	Max	EVS	NB	24.4	2N	19.01	PASS	1250	33.10
B2	18900	15	QPSK	75	0	Max	EVS	NB	24.4	2N	19.38	PASS	1250	33.12
B2	18900	15	QPSK	1	0	Max	EVS	NB	24.4	2N	19.13	PASS	1250	34.52
B2	18900	15	QPSK	1	74	Max	EVS	NB	24.4	2N	19.15	PASS	1250	27.22
B2	18900	5	QPSK	25	0	Max	EVS	NB	24.4	2N	19.17	PASS	2000	29.95
B2	18900	5	QPSK	1	0	Max	EVS	NB	24.4	2N	19.17	PASS	1250	28.30
B2	18900	5	QPSK	1	24	Max	EVS	NB	24.4	2N	19.15	PASS	1250	32.66
B2	18900	3	QPSK	1	0	Max	EVS	NB	24.4	2N	19.19	PASS	1250	29.64
B2	18900	3	QPSK	1	14	Max	EVS	NB	24.4	2N	19.18	PASS	1250	33.73
B2	18900	1.4	QPSK	1	0	Max	EVS	NB	24.4	2N	19.21	PASS	1250	32.99
B2	18900	1.4	QPSK	1	5	Max	EVS	NB	24.4	2N	19.18	PASS	630	28.79
B2	18900	10	QPSK	1	0	Max	AMR	NB	4.75	2N	18.19	/	/	/
B2	18900	10	QPSK	1	49	Max	AMR	NB	4.75	2N	18.46	/	/	/

B2	18900	10	16QAM	1	0	Max	AMR	NB	4.75	2N	18.40	/	/	/
B2	18900	10	16QAM	1	49	Max	AMR	NB	4.75	2N	18.50	/	/	/
B2	18900	10	16QAM	50	0	Max	AMR	NB	4.75	2N	18.38	/	/	/
B2	18900	20	QPSK	100	0	Max	AMR	NB	4.75	2N	18.52	/	/	/
B2	18900	20	QPSK	1	0	Max	AMR	NB	4.75	2N	18.59	/	/	/
B2	18900	20	QPSK	1	99	Max	AMR	NB	4.75	2N	18.33	/	/	/
B2	18900	20	16QAM	1	0	Max	AMR	NB	4.75	2N	18.47	/	/	/
B2	18900	20	16QAM	1	99	Max	AMR	NB	4.75	2N	18.32	/	/	/
B2	18900	20	16QAM	100	0	Max	AMR	NB	4.75	2N	18.52	/	/	/
B2	18900	15	QPSK	75	0	Max	AMR	NB	4.75	2N	18.34	/	/	/
B2	18900	15	QPSK	1	0	Max	AMR	NB	4.75	2N	18.43	/	/	/
B2	18900	15	16QAM	1	0	Max	AMR	NB	4.75	2N	18.38	/	/	/
B2	18900	15	16QAM	75	0	Max	AMR	NB	4.75	2N	18.22	/	/	/
B2	18900	5	QPSK	25	0	Max	AMR	NB	4.75	2N	18.29	/	/	/
B2	18900	5	16QAM	25	0	Max	AMR	NB	4.75	2N	18.43	/	/	/
B2	18900	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.19	/	/	/
B2	18900	3	16QAM	15	0	Max	AMR	NB	4.75	2N	18.37	/	/	/
B2	18900	1.4	QPSK	6	0	Max	AMR	NB	4.75	2N	18.49	/	/	/
B2	18900	1.4	16QAM	6	0	Max	AMR	NB	4.75	2N	18.26	/	/	/

Table 6.3.1-3: the **LTE Band** investigating results of **VoLTE** IMS call

Band	Channel	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Code c	NB/WB	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
		[MHz]							[kbps]				[Hz]	[dB]
B4	20175	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.12	PASS	1250	33.36
B5	20525	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.10	PASS	1250	32.57
B7	21100	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.26	PASS	1250	31.74
B12	23095	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.20	PASS	630	27.64

B25	26365	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.23	PASS	1250	28.32
B26	26865	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.21	PASS	5000	28.03
B28	27435	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.14	PASS	8000	30.94
B41	40620	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.16	PASS	1250	33.93
B48	55990	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.17	PASS	1250	32.51
B66	132322	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.19	PASS	1250	29.72
B71	133297	10	QPSK	1	0	Max	EVS	NB	24.4	2N	19.54	PASS	1000	32.85
B4	20175	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.38	/	/	/
B5	20525	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.31	/	/	/
B7	21100	10	QPSK	1	0	Max	AMR	NB	4.75	2N	18.30	/	/	/
B12	23095	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.31	/	/	/
B25	26365	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.06	/	/	/
B26	26865	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.40	/	/	/
B28	27435	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.01	/	/	/
B41	40620	10	QPSK	1	0	Max	AMR	NB	4.75	2N	18.13	/	/	/
B48	55990	10	QPSK	1	0	Max	AMR	NB	4.75	2N	18.49	/	/	/
B66	132322	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.32	/	/	/
B71	133297	3	QPSK	15	0	Max	AMR	NB	4.75	2N	18.92	/	/	/

6.3.2 VoWiFi IMS call investigation

Table 6.3.2: the investigating results of **VoWiFi** IMS call

Mode	Channel	Modulation	Data Rate	Volume Level	Code c	NB/ WB	Bit Rate	2N/8 N	Conv. Gain	FR	Min PN-SDNR	
			[Mbps]				[kbps]	[N]	[dB]		[Hz]	[dB]
802.11g	6	DSSS	1	Max	EVS	NB	24.4	2N	19.64	PASS	500	27.30
802.11g	6	DSSS	2	Max	EVS	NB	24.4	2N	19.70	PASS	630	26.78
802.11g	6	CCK	5.5	Max	EVS	NB	24.4	2N	19.73	PASS	630	26.38
802.11g	6	CCK	11	Max	EVS	NB	24.4	2N	19.67	PASS	630	25.06
802.11ac	44	BPSK	6	Max	EVS	NB	24.4	2N	19.79	PASS	1250	33.22
802.11ac	44	BPSK	9	Max	EVS	NB	24.4	2N	19.88	PASS	1250	30.79
802.11ac	44	QPSK	12	Max	EVS	NB	24.4	2N	19.89	PASS	1250	32.78
802.11ac	44	QPSK	18	Max	EVS	NB	24.4	2N	19.95	PASS	1250	33.32
802.11ac	44	16-QAM	24	Max	EVS	NB	24.4	2N	19.87	PASS	1250	31.15
802.11ac	44	16-QAM	36	Max	EVS	NB	24.4	2N	19.63	PASS	630	25.03
802.11ac	44	64-QAM	48	Max	EVS	NB	24.4	2N	19.64	PASS	1250	32.16
802.11ac	44	64-QAM	54	Max	EVS	NB	24.4	2N	19.63	PASS	1250	32.69
802.11g	6	DSSS	1	Max	AMR	NB	4.75	2N	18.75	/	/	/

802.11g	6	DSSS	2	Max	AMR	NB	4.75	2N	18.80	/	/	/
802.11g	6	CCK	5.5	Max	AMR	NB	4.75	2N	18.75	/	/	/
802.11g	6	CCK	11	Max	AMR	NB	4.75	2N	18.99	/	/	/
802.11ac	44	BPSK	6	Max	AMR	NB	4.75	2N	18.44	/	/	/
802.11ac	44	BPSK	9	Max	AMR	NB	4.75	2N	18.64	/	/	/
802.11ac	44	QPSK	12	Max	AMR	NB	4.75	2N	18.96	/	/	/
802.11ac	44	QPSK	18	Max	AMR	NB	4.75	2N	18.81	/	/	/
802.11ac	44	16-QAM	24	Max	AMR	NB	4.75	2N	18.68	/	/	/
802.11ac	44	16-QAM	36	Max	AMR	NB	4.75	2N	18.65	/	/	/
802.11ac	44	64-QAM	48	Max	AMR	NB	4.75	2N	18.83	/	/	/
802.11ac	44	64-QAM	54	Max	AMR	NB	4.75	2N	18.69	/	/	/

6.3.3 GSM call investigation

Table 6.3.3: the investigating results of **GSM** call

Band	Channel	Volume Level	Codec	Voice bandwidth	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
					[kbps]		[dB]		[Hz]	[dB]
GSM850	162	Max	EFR	NB	/	2N	18.50	/	/	/
GSM850	162	Max	EFR	NB	/	8N	18.76	/	/	/
GSM1900	600	Max	EFR	NB	/	2N	18.52	/	/	/
GSM1900	600	Max	EFR	NB	/	8N	19.09	/	/	/

6.3.4 WCDMA call investigation

Table 6.3.4: the investigating results of **WCDMA** call

air interface	Band	Channel	Volume Level	Codec	Voice bandwidth	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
						[kbps]		[dB]		[Hz]	[dB]
WCDMA	Band2	9800	Max	AMR	NB	4.75	2N	18.63	/	/	/
WCDMA	Band2	9800	Max	AMR	NB	12.2	2N	19.69	/	/	/
WCDMA	Band2	9800	Max	AMR	NB	4.75	8N	18.74	/	/	/
WCDMA	Band2	9800	Max	AMR	WB	6.6	2N	19.22	/	/	/
WCDMA	Band2	9800	Max	AMR	WB	23.85	2N	20.07	/	/	/
WCDMA	Band2	9800	Max	AMR	WB	6.6	8N	18.79	/	/	/
WCDMA	Band4	1312	Max	AMR	WB	6.6	2N	18.93	/	/	/
WCDMA	Band5	4132	Max	AMR	WB	6.6	2N	19.13	/	/	/

6.3.5 VoNR call investigation

Table6.3.5: the investigating results of **VoNR** call

Band	Band width [MHz]	Modulation	SCS (kHz)	RB	Volume Level	Code c	NB/ WB	Bit Rate	2N/ 8N [N]	Conv. Gain [dB]	FR	Min PN-SDNR	
								[kbps]				[Hz]	[dB]
N41	100	QPSK	30	273	Max	EVS	NB	24.4	2N	19.16	PASS	1000	26.33
N41	100	QPSK	30	137	Max	EVS	NB	24.4	2N	19.17	PASS	1000	26.34
N41	100	16QAM	30	273	Max	EVS	NB	24.4	2N	19.17	PASS	1000	26.30
N41	100	16QAM	30	1	Max	EVS	NB	24.4	2N	19.24	PASS	1000	26.34
N41	100	64QAM	30	273	Max	EVS	NB	24.4	2N	19.22	PASS	1000	26.32
N41	100	64QAM	30	1	Max	EVS	NB	24.4	2N	19.15	PASS	1000	26.32
N41	100	256QAM	30	273	Max	EVS	NB	24.4	2N	19.23	PASS	1000	26.36
N41	100	256QAM	30	1	Max	EVS	NB	24.4	2N	19.20	PASS	1000	26.36
N41	80	QPSK	30	217	Max	EVS	NB	24.4	2N	19.70	PASS	1000	26.48
N41	80	16QAM	30	217	Max	EVS	NB	24.4	2N	19.77	PASS	1000	26.33
N41	80	64QAM	30	217	Max	EVS	NB	24.4	2N	19.85	PASS	1000	26.34
N41	80	256QAM	30	217	Max	EVS	NB	24.4	2N	19.81	PASS	1000	26.38
N41	50	16QAM	30	133	Max	EVS	NB	24.4	2N	19.91	PASS	1000	26.34
N41	50	64QAM	30	133	Max	EVS	NB	24.4	2N	19.86	PASS	1000	26.33
N41	20	16QAM	30	51	Max	EVS	NB	24.4	2N	19.66	PASS	1000	26.66
N41	20	64QAM	30	51	Max	EVS	NB	24.4	2N	20.03	PASS	1000	26.67
N41	10	16QAM	30	24	Max	EVS	NB	24.4	2N	20.13	PASS	1000	26.45
N41	10	64QAM	30	24	Max	EVS	NB	24.4	2N	19.81	PASS	1000	26.44
N25	20	16QAM	15	106	Max	EVS	NB	24.4	2N	20.18	PASS	1000	26.38
N28	20	16QAM	15	106	Max	EVS	NB	24.4	2N	20.11	PASS	1000	26.36
N48	20	16QAM	30	51	Max	EVS	NB	24.4	2N	20.06	PASS	1000	26.45
N66	20	16QAM	15	106	Max	EVS	NB	24.4	2N	20.19	PASS	1000	26.34
N71	20	16QAM	15	106	Max	EVS	NB	24.4	2N	20.04	PASS	1000	26.46
N78	100	16QAM	15	273	Max	EVS	NB	24.4	2N	20.06	PASS	1000	26.45
N41	100	QPSK	30	273	Max	AMR	NB	4.75	2N	18.52	/	/	/
N41	100	QPSK	30	137	Max	AMR	NB	4.75	2N	18.50	/	/	/
N41	100	16QAM	30	273	Max	AMR	NB	4.75	2N	18.48	/	/	/
N41	100	16QAM	30	1	Max	AMR	NB	4.75	2N	18.48	/	/	/
N41	100	64QAM	30	273	Max	AMR	NB	4.75	2N	18.80	/	/	/
N41	100	64QAM	30	1	Max	AMR	NB	4.75	2N	18.87	/	/	/

N41	100	256QAM	30	273	Max	AMR	NB	4.75	2N	18.84	/	/	/
N41	100	256QAM	30	1	Max	AMR	NB	4.75	2N	18.72	/	/	/
N41	80	QPSK	30	109	Max	AMR	NB	4.75	2N	18.32	/	/	/
N41	80	16QAM	30	1	Max	AMR	NB	4.75	2N	18.35	/	/	/
N41	80	64QAM	30	217	Max	AMR	NB	4.75	2N	18.21	/	/	/
N41	80	256QAM	30	1	Max	AMR	NB	4.75	2N	18.42	/	/	/
N41	50	QPSK	30	67	Max	AMR	NB	4.75	2N	18.50	/	/	/
N41	50	64QAM	30	133	Max	AMR	NB	4.75	2N	18.38	/	/	/
N41	20	64QAM	30	51	Max	AMR	NB	4.75	2N	18.38	/	/	/
N41	10	64QAM	30	24	Max	AMR	NB	4.75	2N	18.38	/	/	/
N25	20	64QAM	15	106	Max	AMR	NB	4.75	2N	18.58	/	/	/
N28	20	64QAM	15	106	Max	AMR	NB	4.75	2N	18.59	/	/	/
N48	20	64QAM	30	217	Max	AMR	NB	4.75	2N	18.88	/	/	/
N66	20	64QAM	15	106	Max	AMR	NB	4.75	2N	18.49	/	/	/
N71	20	64QAM	15	106	Max	AMR	NB	4.75	2N	18.66	/	/	/
N78	80	64QAM	30	217	Max	AMR	NB	4.75	2N	18.74	/	/	/

7. Test Facilities Utilized

No	Name	Type	SN	Manufacturer	Cal.Due Date
1	Measurement Frontend	Labcore	77000136	HEAD acoustics GmbH	2025-11-29
2	HEAD measurement system	HMS II.3	12306194 (torso137 40182)	HEAD acoustics GmbH	2026-09-25
3	Universal communication tester	CMW500	170430	Rohde&Schwarz	2026-08-03
4	Universal communication tester	CMX500	101626	Rohde&Schwarz	2026-08-05
5	Acoustic chamber	4.70 m×4.30 m×2.10 m	None	Ruisen	2026-10-26
Software					
Name		Version			
ACQUA		V 6.0.200			

END OF REPORT BODY

ANNEX A: EUT photograph

No phone's photos for Confidentiality requirements.

ANNEX B: EUT parameters

Disclaimer: The bands and codecs of EUT provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

General Information:

Description	5G Mobile Phone
Model name/HVIN	TMRV085G
Brand name	Revl 8
FCC ID	2BNRMTMRV085G
Extreme Temperature	-10~55℃
Nominal Voltage	3.87V
Extreme High Voltage	4.45V
Extreme Low Voltage	3.6V

Supported Bands:

UMTS Frequency Band(s)	B 2/4/5
GSM Frequency Band(s)	GSM 850/900/1800/1900
E-UTRA Frequency Band(s)	B 2/4/5/7/12/25/26/28/41/48/66/71
WLAN Frequency Band(s)	2.4G/5GHz
5G Frequency Band(s)	N 25/28/41/48/66/71/78

Supported Codecs:

UMTS Audio Codec(s)	AMR NB/AMR WB
GSM Audio Codec (s)	EFR/AMR NB/AMR WB
E-UTRA Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
WLAN Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
5G Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/ EVS SWB
OTT	Google Meet

ANNEX C: Test Layout


Artificial Ear Type		3.3
Mounting Force [N]		2 and 8
Center Fork Offset [°]		0
Volume Level		5/5 (1-5)
Angle settings		
Xe [°]	Ye [°]	Ze[°]
0	0	5


NOTE: The handset shall be placed in either the standard test position as specified in IEEE Std 269 or a recommended test position specified by the manufacturer that complies with the recommended test position requirements in IEEE Std 269.


No phone's photos for Confidentiality requirements.

ANNEX D: The Worst-case Measurement Data of The Chosen Codec of Telephony Call


SMD	Status	Single Value Description	Single Value	Object
#1, 5.1 Receive Volume Control Performance 8N	Done	Speech Level [dB[SPL]]	89.30	25T04Z100361 VoWifi EVS
#2, 5.1.1 -1 Conversation Gain 8N	Ok	Calculated Value [dB]	19.30	25T04Z100361 VoWifi EVS
#180, Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	35.34	25T04Z100361 VoWifi EVS
#181, Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	36.90	25T04Z100361 VoWifi EVS
#182, Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	37.69	25T04Z100361 VoWifi EVS
#183, Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	41.61	25T04Z100361 VoWifi EVS
#184, Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	36.57	25T04Z100361 VoWifi EVS
#185, Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	30.28	25T04Z100361 VoWifi EVS
#186, Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	31.17	25T04Z100361 VoWifi EVS
#187, Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	43.58	25T04Z100361 VoWifi EVS
#188, Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	40.70	25T04Z100361 VoWifi EVS
#189, Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	39.87	25T04Z100361 VoWifi EVS

#190, 5.2 Receive path – distortion and noise	Ok			25T04Z100361 VoWifi EVS
#22, 5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 305.9 Hz		25T04Z100361 VoWifi EVS 0.32
#46, 5.1 Receive Volume Control Performance 8N	Done	Speech Level [dB[SPL]]	89.30	25T04Z100361 VoWifi EVS
#47, 5.1.1 -1 Conversation Gain 8N	Ok	Calculated Value [dB]	19.30	25T04Z100361 VoWifi EVS
#70, Receive path - distortion and noise 250 WBonly	Done	Distortion (Noise) [dB], 0.0 dB	34.72	25T04Z100361 VoWifi EVS
#71, Receive path - distortion and noise 315Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	37.11	25T04Z100361 VoWifi EVS
#192, Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	35.51	25T04Z100361 VoWifi EVS
#193, Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	36.49	25T04Z100361 VoWifi EVS
#194, Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.99	25T04Z100361 VoWifi EVS
#195, Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	42.31	25T04Z100361 VoWifi EVS
#196, Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.68	25T04Z100361 VoWifi EVS
#197, Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.01	25T04Z100361 VoWifi EVS
#198, Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	29.48	25T04Z100361 VoWifi EVS

#199, Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	45.89	25T04Z100361 VoWifi EVS
#200, Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	41.09	25T04Z100361 VoWifi EVS
#201, Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	34.39	25T04Z100361 VoWifi EVS
#84, Receive path - distortion and noise 4000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	40.18	25T04Z100361 VoWifi EVS
#85, Receive path - distortion and noise 5000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	40.16	25T04Z100361 VoWifi EVS
#86, 5.2 Receive path – distortion and noise	Ok			25T04Z100361 VoWifi EVS
#48, 5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 205.7 Hz		25T04Z100361 VoWifi EVS
#141, 5.1 Receive Volume Control Performance 2N 16QAM, 36Mbps	Done	Speech Level [dB[SPL]]	89.63	25T04Z100361 VoWifi EVS
#142, 5.1.1 -1 Conversation Gain 2N 16QAM, 36Mbps	Ok	Calculated Value [dB]	19.63	25T04Z100361 VoWifi EVS
#144, Receive path - distortion and noise 400Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	33.52	25T04Z100361 VoWifi EVS
#145, Receive path - distortion and noise 500Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	32.14	25T04Z100361 VoWifi EVS

#146, Receive path - distortion and noise 630Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	25.03	25T04Z100361 VoWifi EVS
#147, Receive path - distortion and noise 800Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	40.91	25T04Z100361 VoWifi EVS
#148, Receive path - distortion and noise 1000Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	40.87	25T04Z100361 VoWifi EVS
#149, Receive path - distortion and noise 1250Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	30.40	25T04Z100361 VoWifi EVS
#150, Receive path - distortion and noise 1600Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	34.27	25T04Z100361 VoWifi EVS
#151, Receive path - distortion and noise 2000Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	32.26	25T04Z100361 VoWifi EVS
#152, Receive path - distortion and noise 2500Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	42.63	25T04Z100361 VoWifi EVS
#153, Receive path - distortion and noise 3150Hz WB&NB 16QAM, 36Mbps	Done	Distortion (Noise) [dB], 0.0 dB	41.18	25T04Z100361 VoWifi EVS
#177, 5.2 Receive path – distortion and noise 16QAM, 36Mbps	Ok			25T04Z100361 VoWifi EVS
#143, 5.3 Receive Acoustic Frequency response Performance 16QAM, 36Mbps	Ok	Min. dist. to tolerance scheme [dB], 305.9 Hz		25T04Z100361 VoWifi EVS
			0.43	

#157, 5.1 Receive Volume Control Performance 2N	Done	Speech Level [dB[SPL]]	89.62	25T04Z100361 VoWifi EVS
#158, 5.1.1 -1 Conversation Gain 2N	Ok	Calculated Value [dB]	19.62	25T04Z100361 VoWifi EVS
#202, Receive path - distortion and noise 250 WBonly	Done	Distortion (Noise) [dB], 0.0 dB	33.59	25T04Z100361 VoWifi EVS
#203, Receive path - distortion and noise 315Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	33.51	25T04Z100361 VoWifi EVS
#204, Receive path - distortion and noise 4000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	40.32	25T04Z100361 VoWifi EVS
#208, Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	35.10	25T04Z100361 VoWifi EVS
#209, Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.55	25T04Z100361 VoWifi EVS
#210, Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	34.61	25T04Z100361 VoWifi EVS
#211, Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	39.43	25T04Z100361 VoWifi EVS
#212, Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	41.62	25T04Z100361 VoWifi EVS
#213, Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.17	25T04Z100361 VoWifi EVS
#214, Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	44.54	25T04Z100361 VoWifi EVS
#215, Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	44.71	25T04Z100361 VoWifi EVS
#216, Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	42.37	25T04Z100361 VoWifi EVS

#217, Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	42.37	25T04Z100361 VoWifi EVS
#205, Receive path - distortion and noise 5000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	38.29	25T04Z100361 VoWifi EVS
#206, 5.2 Receive path – distortion and noise	Ok			25T04Z100361 VoWifi EVS
#159, 5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 205.7 Hz		25T04Z100361 VoWifi EVS
			0.20	

ANNEX E: The Worst-case Measurement Data of Other Codecs of Telephony Call

SMD	Status	Single Value Description	Single Value	Object
#1, 5.1 Receive Volume Control Performance 8N 4.75kbps; Table-1	Done	Speech Level [dB[SPL]]	88.05	25T04Z100361 VoLTE AMR
#2, 5.1.1 -1 Conversation Gain 8N 4.75kbps; Table-1	Ok	Calculated Value [dB]	18.05	25T04Z100361 VoLTE AMR
#46, 5.1 Receive Volume Control Performance 8N 6.6kbps; Table-1	Done	Speech Level [dB[SPL]]	88.50	25T04Z100361 VoLTE AMR
#47, 5.1.1 -1 Conversation Gain 8N 6.6kbps; Table-1	Ok	Calculated Value [dB]	18.50	25T04Z100361 VoLTE AMR
#141, 5.1 Receive Volume Control Performance 2N 4.75kbps; Table-1	Done	Speech Level [dB[SPL]]	87.89	25T04Z100361 VoLTE AMR
#142, 5.1.1 -1 Conversation Gain 2N 4.75kbps; Table-1	Ok	Calculated Value [dB]	17.89	25T04Z100361 VoLTE AMR
#157, 5.1 Receive Volume Control Performance 2N 6.6kbps; Table-1	Done	Speech Level [dB[SPL]]	88.68	25T04Z100361 VoLTE AMR
#158, 5.1.1 -1 Conversation Gain 2N 6.6kbps; Table-1	Ok	Calculated Value [dB]	18.68	25T04Z100361 VoLTE AMR
#1, 5.1 Receive Volume Control Performance 8N GSM850	Done	Speech Level [dB[SPL]]	88.76	25T04Z100361 GSM
#2, 5.1.1 -1 Conversation Gain 8N GSM850	Ok	Calculated Value [dB]	18.76	25T04Z100361 GSM
#141, 5.1 Receive Volume Control Performance 2N GSM 850	Done	Speech Level [dB[SPL]]	88.50	25T04Z100361 GSM
#142, 5.1.1 -1 Conversation Gain 2N GSM 850	Ok	Calculated Value [dB]	18.50	25T04Z100361 GSM

ANNEX F: FREQUENCY RESPONSE USED DF and 1/12 OCTAVE

Title:	5.3 Receive Acoustic Frequency response Performance		
Mode:	Do measurement	File to analyse:	
Source			
Use source file:	Yes	Source file:	ale_dual_nb.dat
Source level adj.:	Ch.1: -90.00 dB; Ch.2: -4.00 dB		
Delayed channels:	Off		
Filter (out):	Off		
Sink			
Number of channels:	2		
Record length:	10616.02	ms	Sampling freq.: 48000 Hz
Filter (in):	FIR: Ch.2, File:drp2df_ieee1652.fft		
Measurement			
Pre measure info:	No	Run time info:	No
Analysis			
Channels to analyse:	2		
Reference:	rcv_nb_ref1.fft (ext. created)		
Time range:	250.0..10450.0 ms		
Transformation:	12th octave, Hann, FFT:16384, OV:75%		
Tolerance scheme:	nb_fr_tol.tol, adj. to upper, 100..4000 Hz		
Calculate value:	No		
Result			
Check min. dist.:	> 0.0 dB, (Req.)		
Representation:	-5..5 , 100..4000 Hz, -50..50 dB		
Special features			
Special features:	Comp.delay, Store to rcv_fr.fft		

ANNEX G: HATS CERTIFICATE

中国计量科学研究院



证书编号 LSsx2024-14143

校准结果

表 2 HATS 右耳校准结果

频率/Hz	31.5	63	125	250	500	1000
REF/dB	92.42	92.45	92.47	92.55	92.92	94.02
(REF+10)/dB	102.45	102.46	102.49	102.56	102.92	104.02
差值/dB	10.03	10.01	10.02	10.01	10.00	10.00
频率/Hz	2000	4000	8000	12500	16000	/
REF/dB	98.07	103.39	116.24	115.61	94.06	/
(REF+10)/dB	108.07	113.38	126.08	125.42	103.83	/
差值/dB	10.00	9.99	9.84	9.81	9.77	/

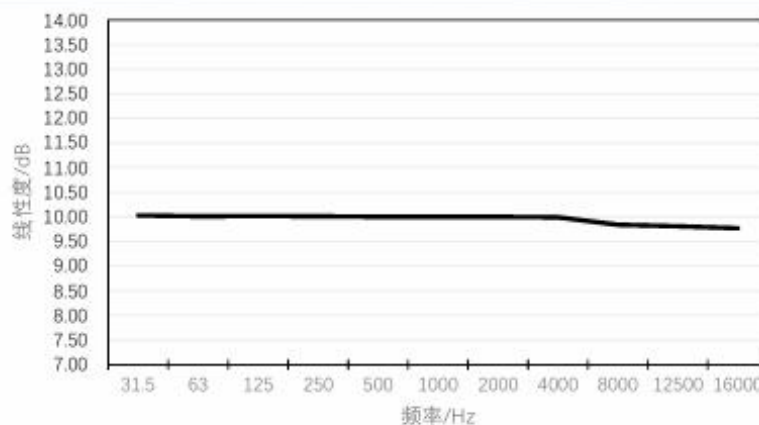


图 2 HATS 右耳线性度图

输出部分

2、频率响应

校准时用 B&K 4938 型压力场传声器在 HATS 嘴正前方，在其参考点处进行校准，测得其嘴（配 PA50 型功率放大器）的频谱如图 3 所示，100 Hz 至 10 kHz 范围内 1/3 倍频程中心频率频谱数据见表 3。

2019-jz-R0520

第4页共5页

ANNEX H: ACOUSTIC CHAMBER CERTIFICATE



中国计量科学研究院

证书编号 LSsx2021-19386


校准结果

二、背景噪声校准结果

正常情况下，消声室的 A 计权背景噪声为 14 dB，其 1/3 倍频频谱见图 2。

[dB/20.0u Pa]

Autospectrum(zb) - Input
Working : Input ; Input : CFB Analyzer

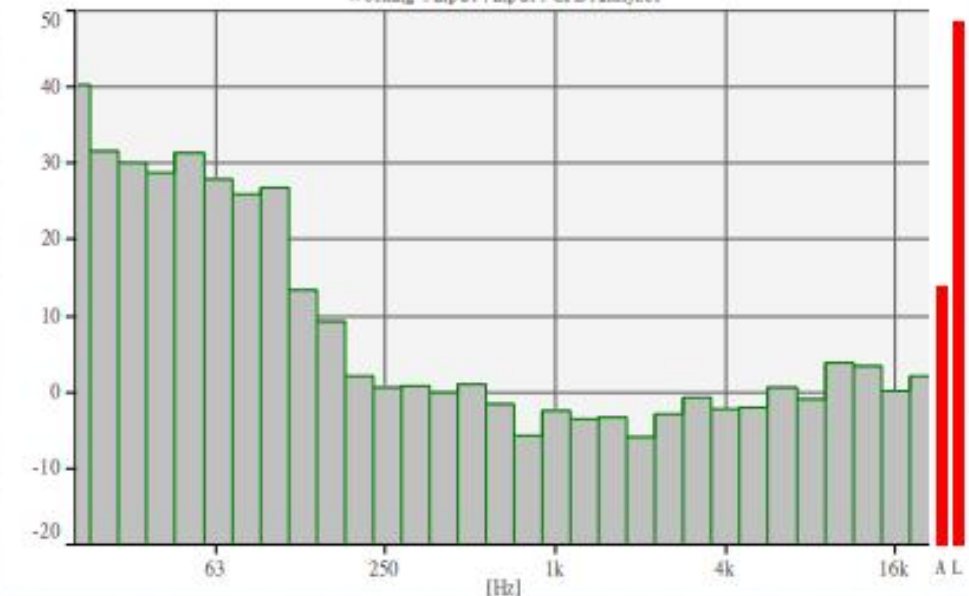

[Hz]

图 2 背景噪声频谱图

声压级校准结果不确定度：U=0.6 dB (k=2)

-----以下空白-----

说明：

根据校准规范 JJF 1147-2006 的规定，通常情况下 60 个月校准一次。

声明：

1. 我院仅对加盖“中国计量科学研究院校准专用章”的完整证书负责。
2. 本证书的校准结果仅对本次所校准的计量器具有效。

校准员： 郑云山

核验员： 牛辉

2019-jz-R0520

第15页共15页

ANNEX I: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT
Beijing, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT