

FCC TEST REPORT

FCC ID: 2BQJQ-YXG-25

On Behalf of

SHENZHEN YAOXINGGE TECHNOLOGY CO., LTD.

Bluetooth earphones

Model No.:YXG-25

YXG-15, YXG-35, YXG-45, YXG-55, YXG-65, YXG-75, YXG-85, YXG-95

Prepared for : SHENZHEN YAOXINGGE TECHNOLOGY CO., LTD.
Address : 2nd Floor, Building No. 3, West Area of Shangxue Technology City,
Xinxue Community, Bantian Street, Longgang District, Shenzhen.

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2509193-C01-R01
Date of Receipt : Sept. 11, 2025
Date of Test : Sept. 11, 2025 to Sept. 19, 2025
Date of Report : Sept. 19, 2025
Version Number : V0

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	9
2.7. Test Conditions	10
2.8. Test Facility	10
2.9. Measurement Uncertainty	10
2.10. Test Equipment List	11
3. Maximum Peak Output Power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result	12
4. Bandwidth	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	13
5. Carrier Frequency Separation	25
5.1. Limit	25
5.2. Test Procedure	25
5.3. Test Result	25
6. Number Of Hopping Channel	31
6.1. Limit	31
6.2. Test Procedure	31
6.3. Test Result	31
7. Dwell Time	34
7.1. Test limit	34
7.2. Test Procedure	34
7.3. Test Result	34
8. Out-of-band Emissions	44
8.1. Test Limits	44
8.2. Test Procedure	44
8.3. Test Setup	44
8.4. Test Results	44
9. Radiated Emissions	69
9.1. Limit	69
9.2. Block Diagram of Test setup	72

9.3. Test Procedure	73
9.4. Test Results	73
10. Band Edge Test.....	81
10.1. Block Diagram of Test Setup	81
10.2. Test Limit	81
10.3. Test Procedure	81
10.4. Test Results	82
11. Power Line Conducted Emissions	85
11.1. Block Diagram of Test Setup	85
11.2. Limit	85
11.3. Test Procedure	85
11.4. Test Results	86
12. Frequency stability	87
12.1. Test limit	87
12.2. Test Procedure	87
12.3. Test Setup	87
12.4. Test Results	87
13. Antenna Requirements	88
13.1. Limit	88
13.2. Result	88
14. Photos of test setup	89
15. Photos of EUT	89

TEST REPORT DECLARATION

Applicant : SHENZHEN YAOXINGGE TECHNOLOGY CO., LTD.
 Address : 2nd Floor, Building No. 3, West Area of Shangxue Technology City, Xinxue
 Community, Bantian Street, Longgang District, Shenzhen.
 Manufacturer : SHENZHEN YAOXINGGE TECHNOLOGY CO., LTD.
 Address : 2nd Floor, Building No. 3, West Area of Shangxue Technology City, Xinxue
 Community, Bantian Street, Longgang District, Shenzhen.
 EUT Description : Bluetooth earphones

(A) Model No. : YXG-25
 YXG-15, YXG-35, YXG-45, YXG-55, YXG-65,
 YXG-75, YXG-85, YXG-95
 (B) Trademark : /

Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247


ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
 Test Engineer 

Approved by (name + signature).....: Simple Guan
 Project Manager 

Date of issue.....: Sept. 19, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Sept. 19, 2025	Initial released Issue	Felix Pang



1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247(5.4 b), ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215, RSS-247(5.1 a), ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247(5.1 b), ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1), RSS-247(5.1 d),ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1), RSS-247(5.1 d),ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Out-of-band Emissions	FCC Part 15: 15.247(d), RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), RSS-Gen(6.13), RSS-247(5.5), ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207, RSS-GEN(8.8),ANSI C63.10 :2013	N/A
Frequency stability	RSS-GEN(6.11)	N/A
Antenna requirement	FCC Part 15: 15.203, RSS-GEN(6.8)	P

Note: 1. P is an abbreviation for Pass.
2. F is an abbreviation for Fail.
3. N/A is an abbreviation for Not Applicable.
4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.
5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.

2. General Information

2.1. Description of Device (EUT)

Product Name	:	Bluetooth earphones
Model No.	:	YXG-25
Diff	:	YXG-25 is tested model, other models are derivative models .The models are identical in circuit, only different on the model names, appearance color, charging case appearance color and charging case shape So the test data of YXG-25 can represent the remaining models.
Power supply	:	Input: DC 5 V ---0.2 A or DC 3.7 V powered by battery

Radio Technology	:	Bluetooth BR&EDR
Operation frequency	:	2402-2480MHz
Channel No.	:	79 channels
Channel Separation	:	1MHz
Modulation	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type	:	PCB antenna, maximum gain is -8.46dBi
PMN	:	N/A
HVIN	:	N/A
Software version	:	V1.0
Hardware version/FVIN	:	V1.0

Antenna information is provided by applicant.

Testing lab is not responsible for the accuracy of the information.

Note	:	Schematic diagram and layout of right and left earphone are same, we chose the left earphone to test. The detailed information can be referred to the photos and techs which were stated and guaranteed by the applicant.
------	---	---

2.2. Accessories of Device (EUT)

Accessories 1 : N/A
 Manufacturer : N/A
 Model : N/A
 Rating : N/A

2.3. Tested Supporting System Details


No.	Description	Manufacturer	Model	Serial Number
1	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	N/A
2	USB serial port board	/	/	N/A

2.4. Block Diagram of connection between EUT and simulators


Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



RF Conducted test



2.5. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Software test version and power setting information

Software testing version	BT_Tool.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4-DQPSK, 8DPSK	CH0	2402	TX level is set as defaults value.
	CH39	2441	TX level is set as defaults value.
	CH78	2480	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	26°C
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK202203290 1	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK202001080 1	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02- 1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P00 8	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ_EMG	Farad			PSI-3A1		
CE	EZ_EMG	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

3. Maximum Peak Output Power

3.1. Limit


Please refer FCC part 15.247 & RSS-247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Mode	Test channel	Peak Output Power (dBm)	Peak Output Power Limit (dBm)	Result
GFSK	Lowest	-6.06	21.00	Pass
	Middle	-3.85		
	Highest	-3.25		
$\pi/4$ DQPSK	Lowest	-5.4	21.00	Pass
	Middle	-3.02		
	Highest	-2.41		
8DPSK	Lowest	-4.9	21.00	Pass
	Middle	-2.57		
	Highest	-1.96		

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.932	Pass
NVNT	1-DH5	2441	Ant1	0.932	Pass
NVNT	1-DH5	2480	Ant1	0.944	Pass
NVNT	2-DH5	2402	Ant1	1.267	Pass
NVNT	2-DH5	2441	Ant1	1.264	Pass
NVNT	2-DH5	2480	Ant1	1.264	Pass
NVNT	3-DH5	2402	Ant1	1.255	Pass
NVNT	3-DH5	2441	Ant1	1.269	Pass
NVNT	3-DH5	2480	Ant1	1.269	Pass

Test Graphs


-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

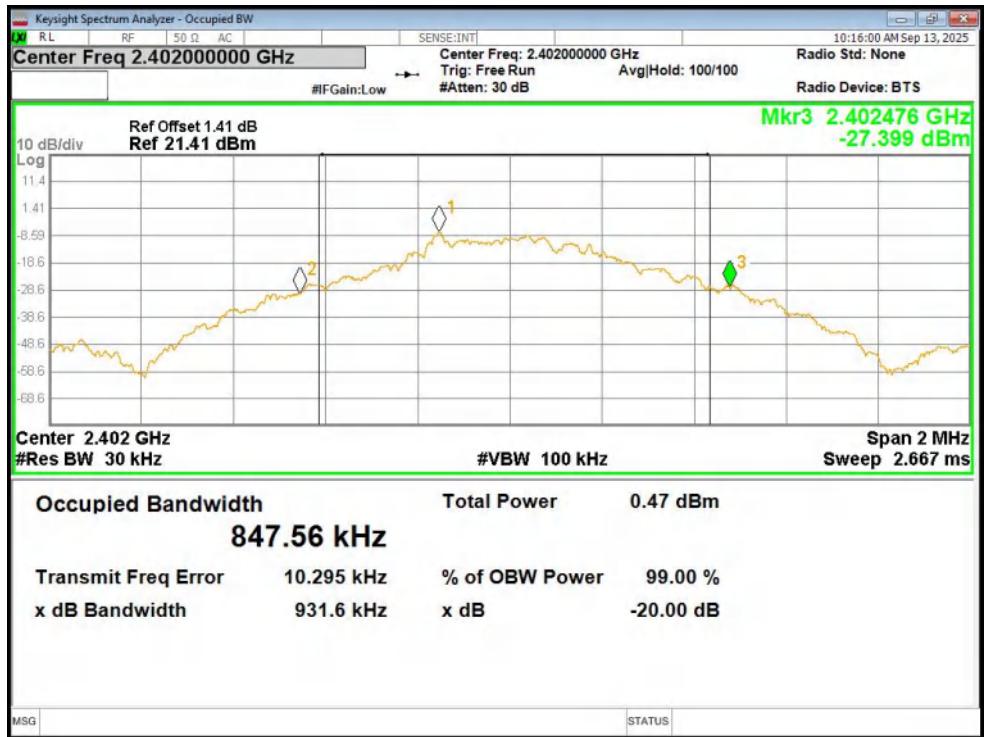


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

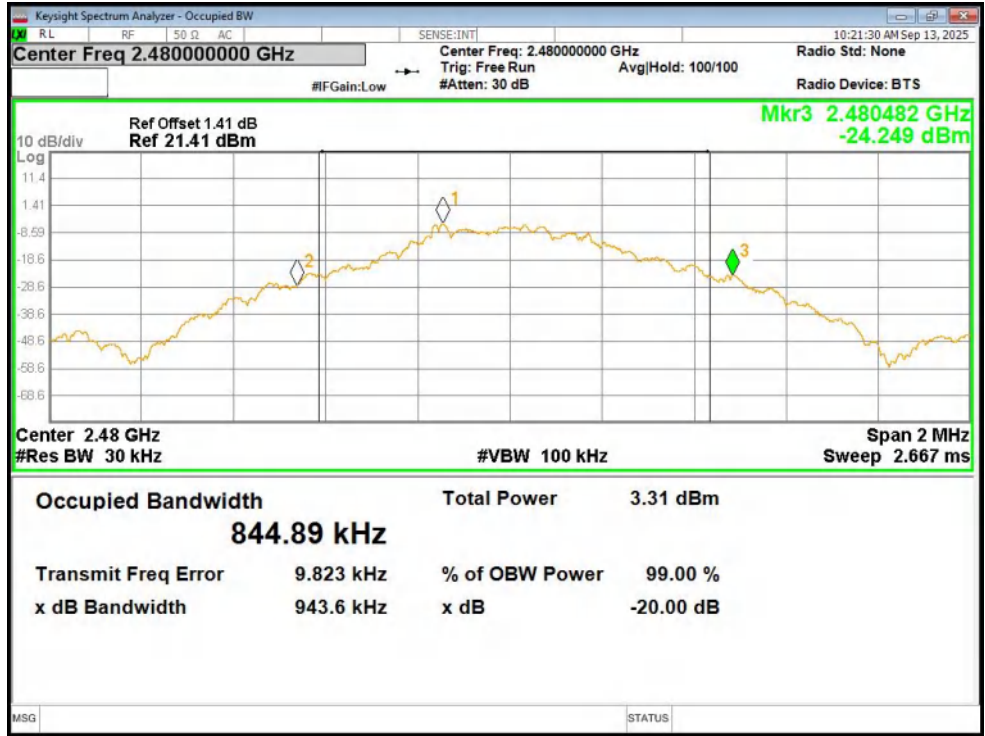


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

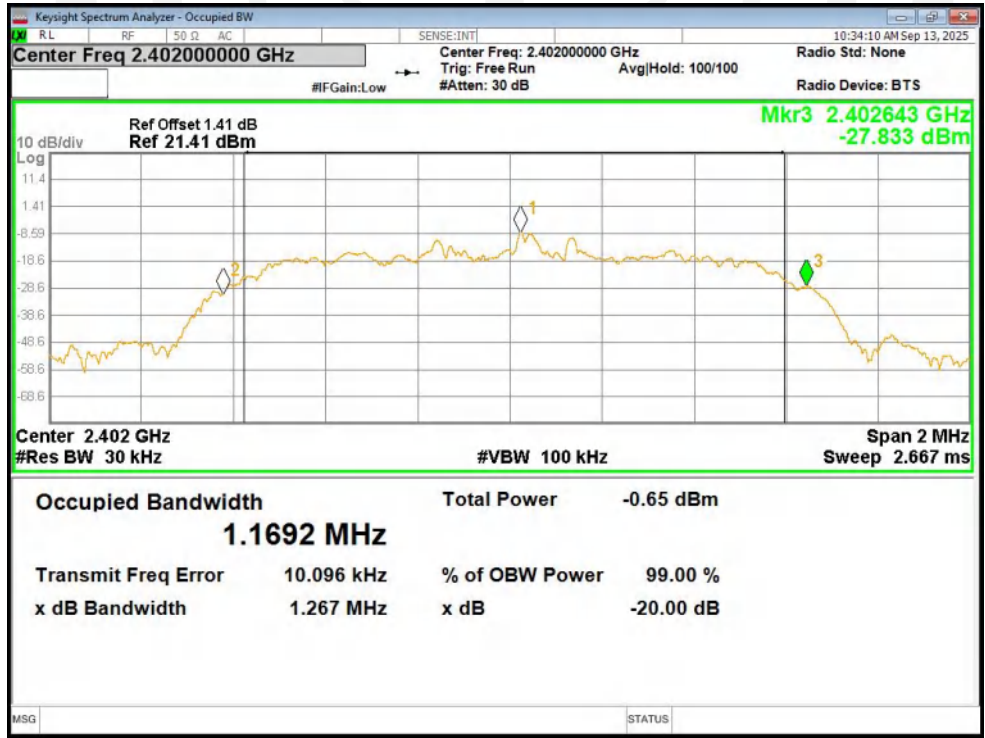


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

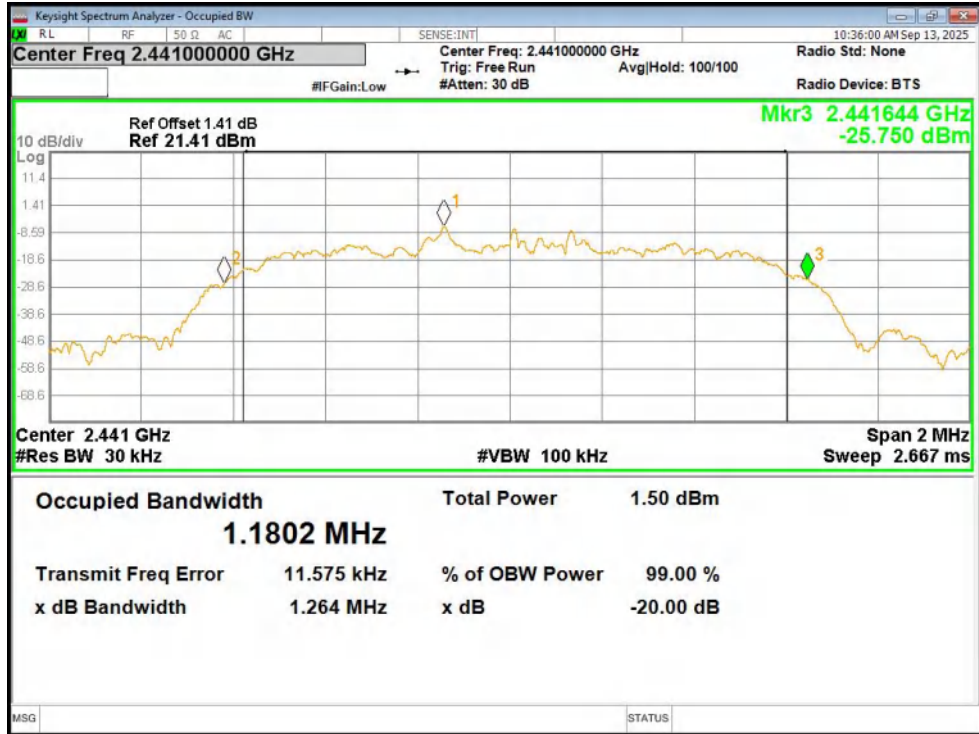


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

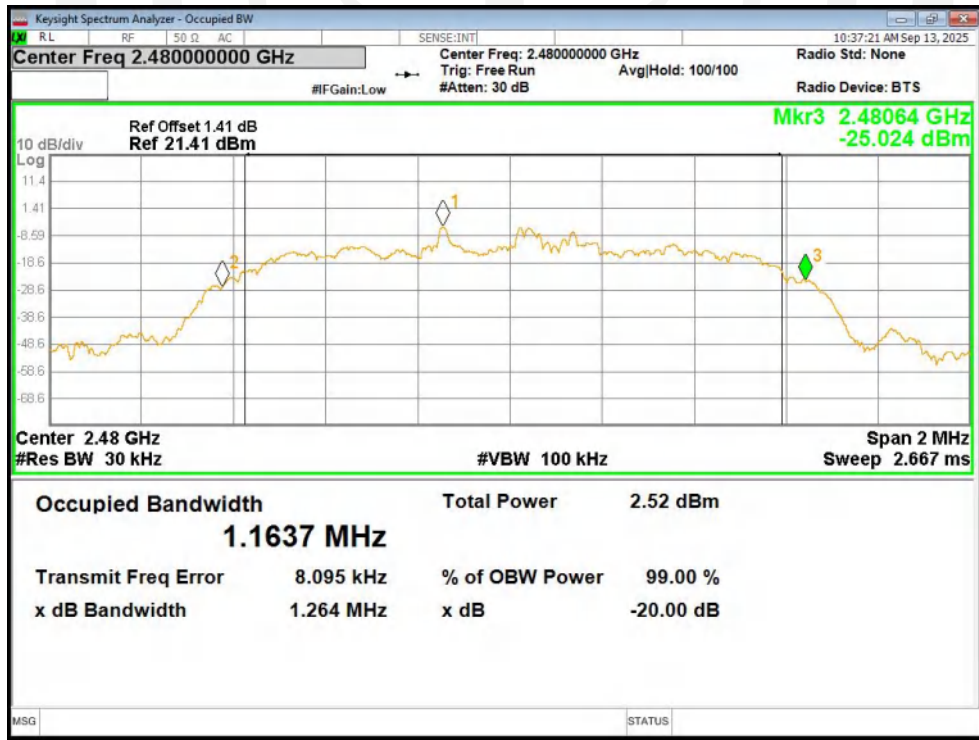


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

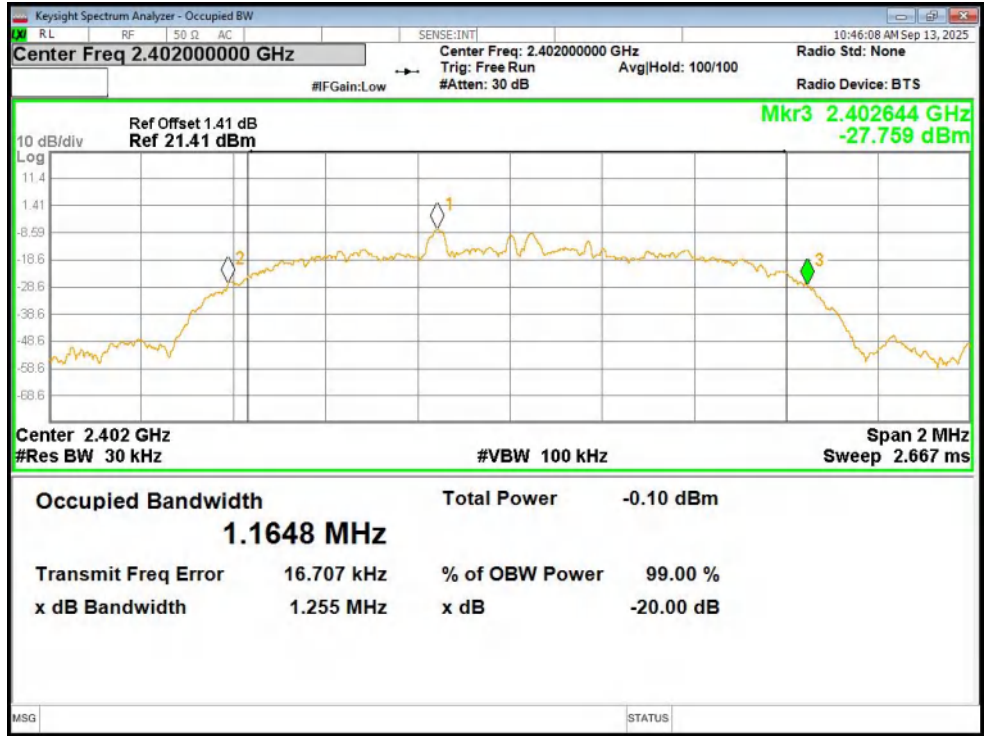

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

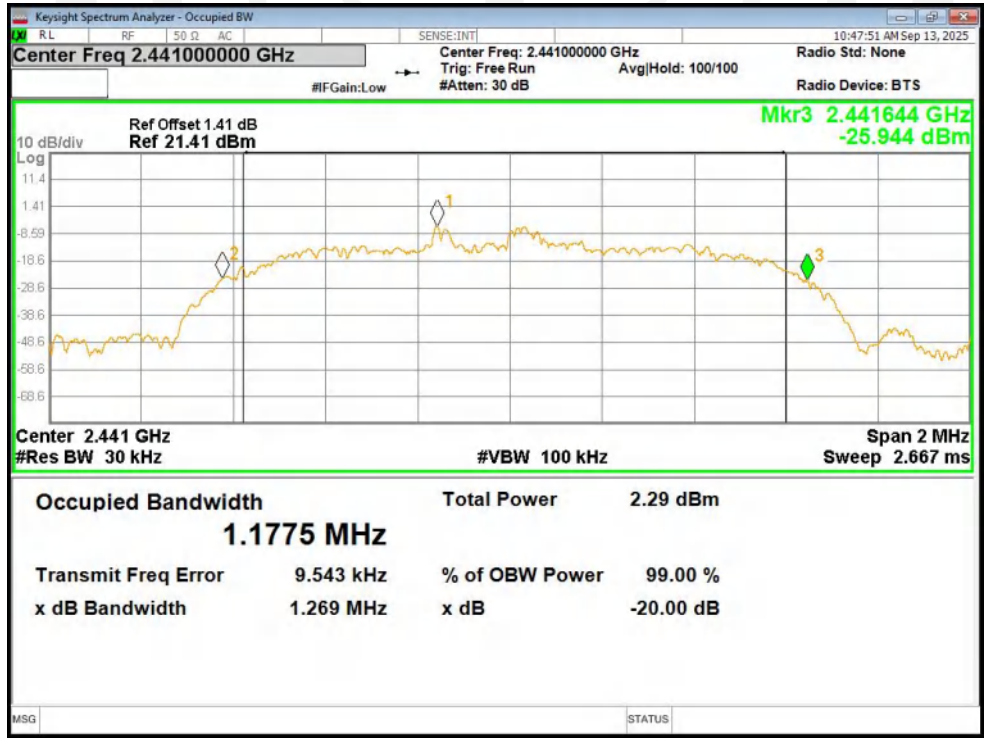

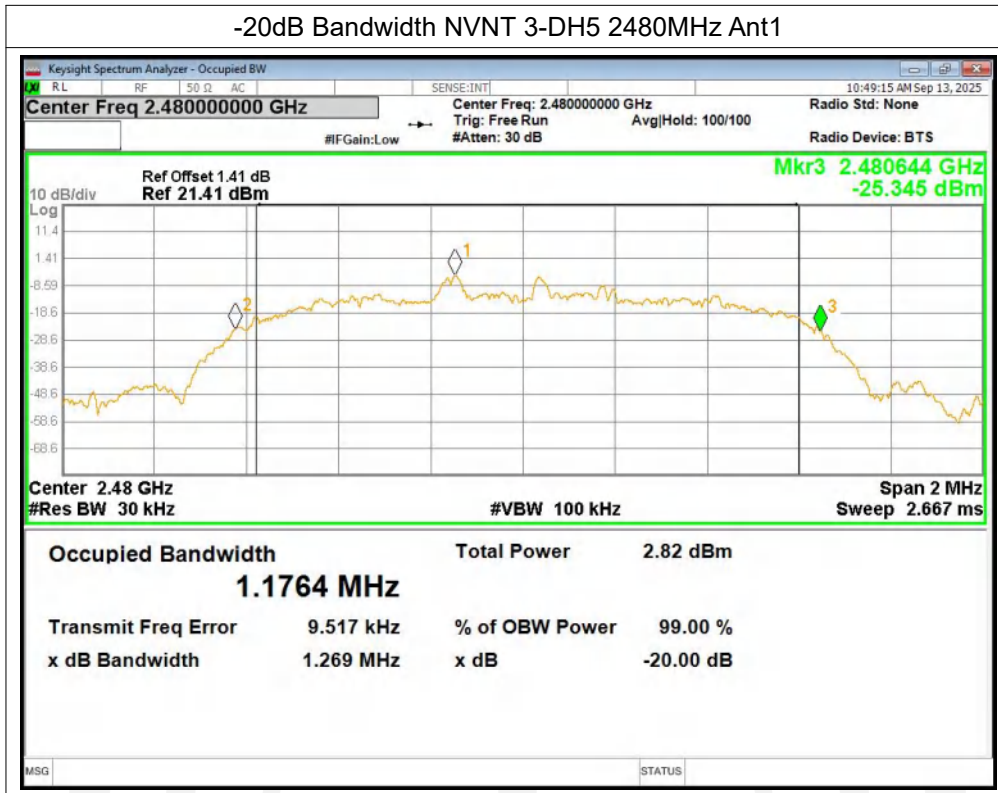


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.852
NVNT	1-DH5	2441	Ant1	0.881
NVNT	1-DH5	2480	Ant1	0.848
NVNT	2-DH5	2402	Ant1	1.164
NVNT	2-DH5	2441	Ant1	1.158
NVNT	2-DH5	2480	Ant1	1.168
NVNT	3-DH5	2402	Ant1	1.162
NVNT	3-DH5	2441	Ant1	1.169
NVNT	3-DH5	2480	Ant1	1.163




Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

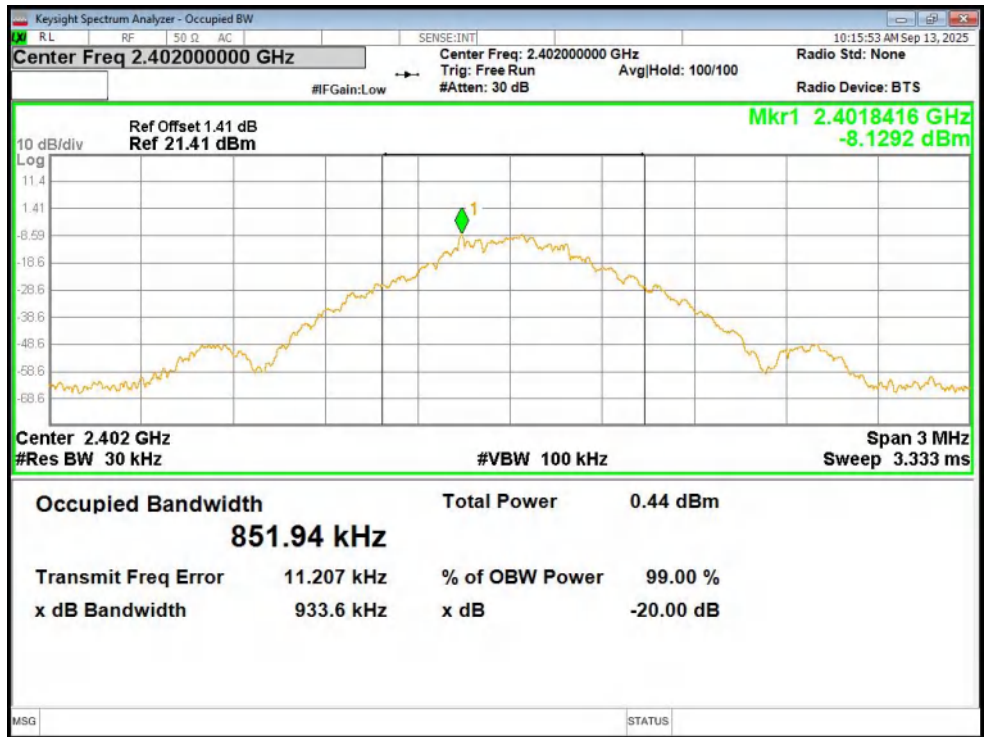


OBW NVNT 1-DH5 2441MHz Ant1

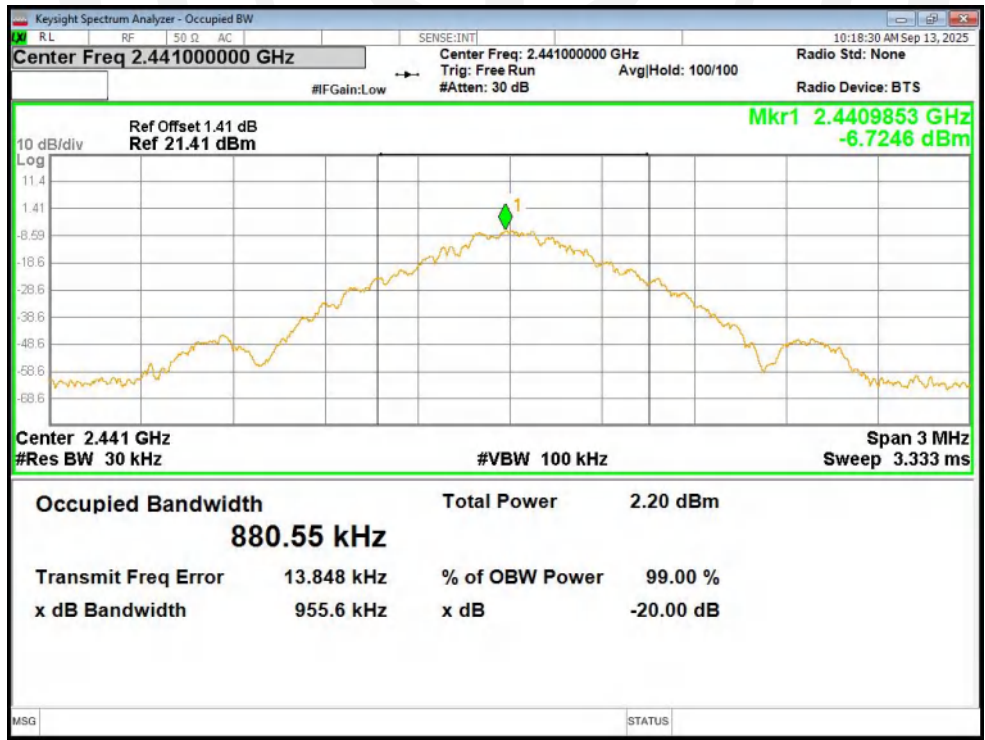


OBW NVNT 1-DH5 2480MHz Ant1

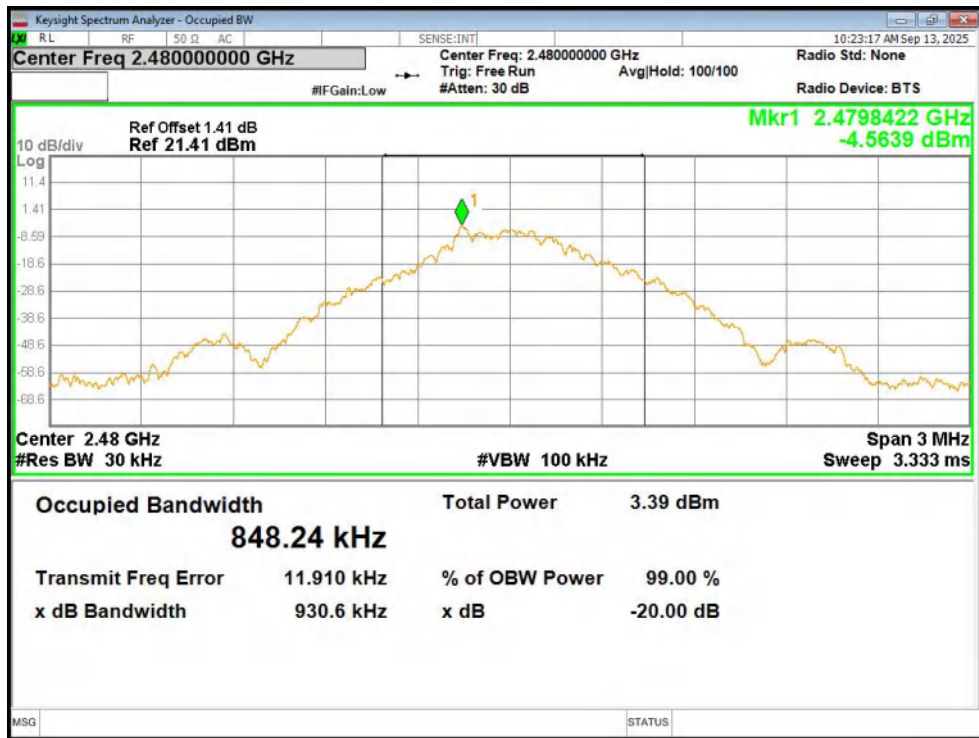


OBW NVNT 2-DH5 2402MHz Ant1

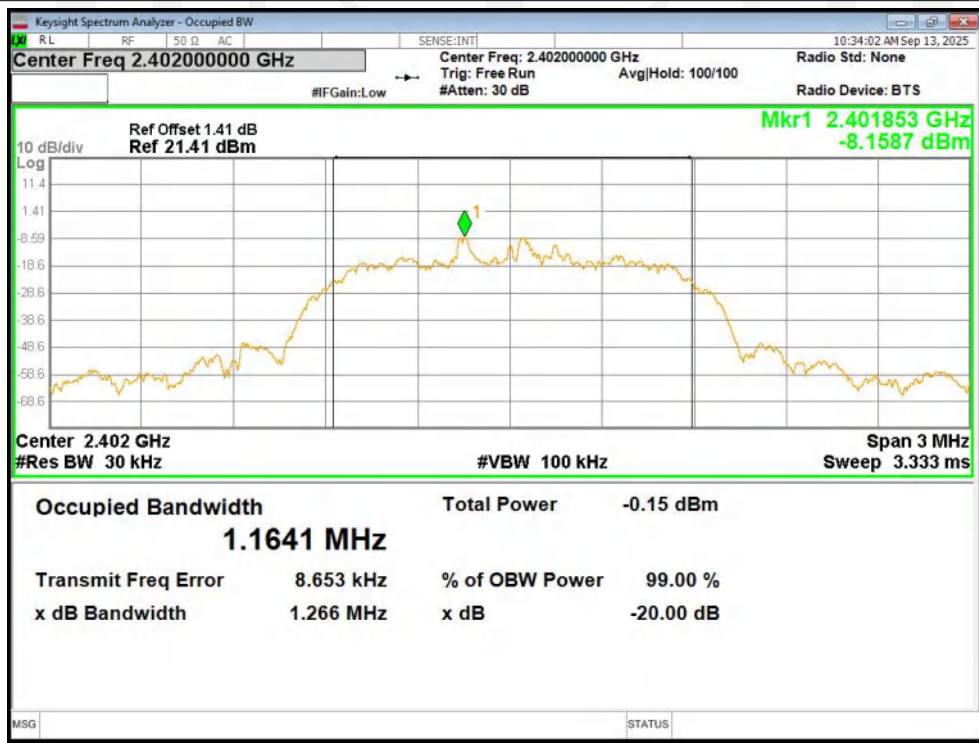


OBW NVNT 2-DH5 2441MHz Ant1

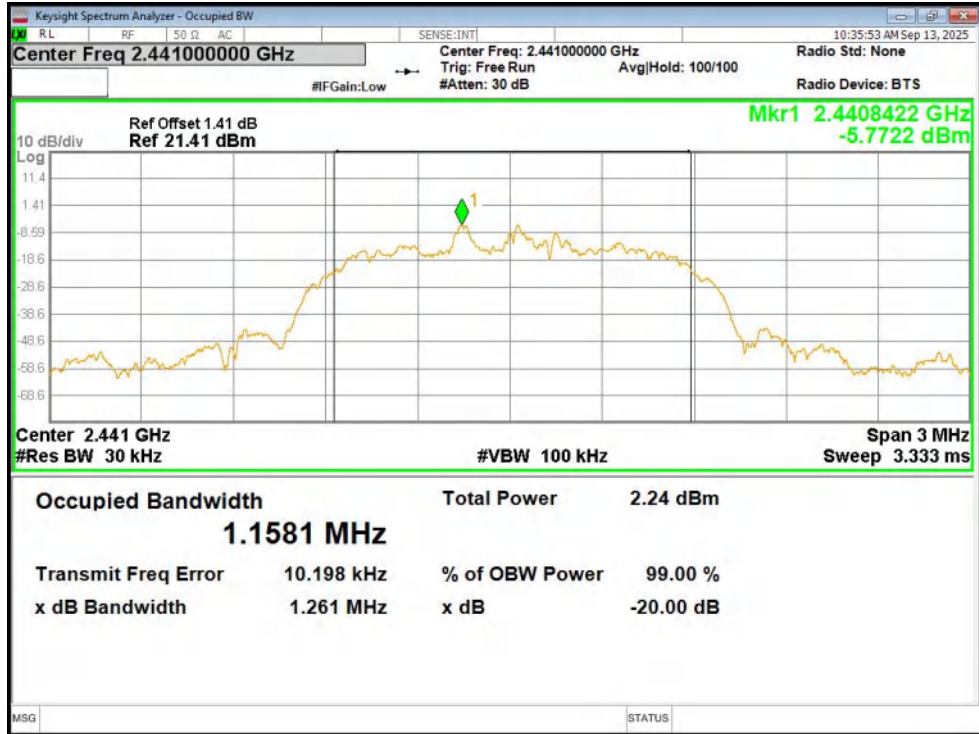


OBW NVNT 2-DH5 2480MHz Ant1

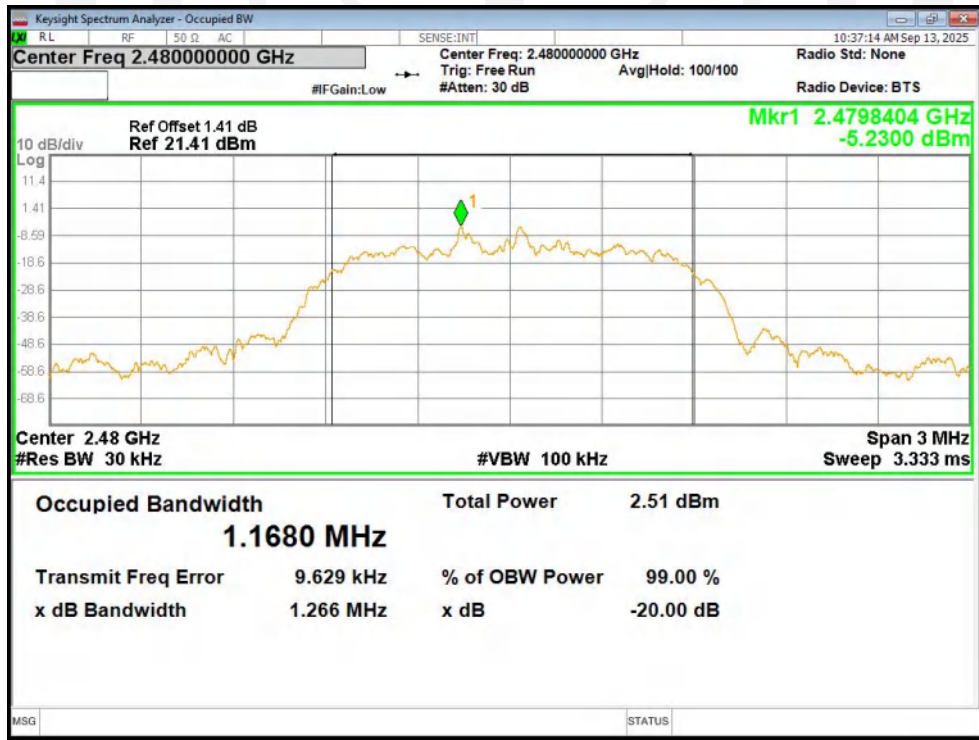


OBW NVNT 3-DH5 2402MHz Ant1

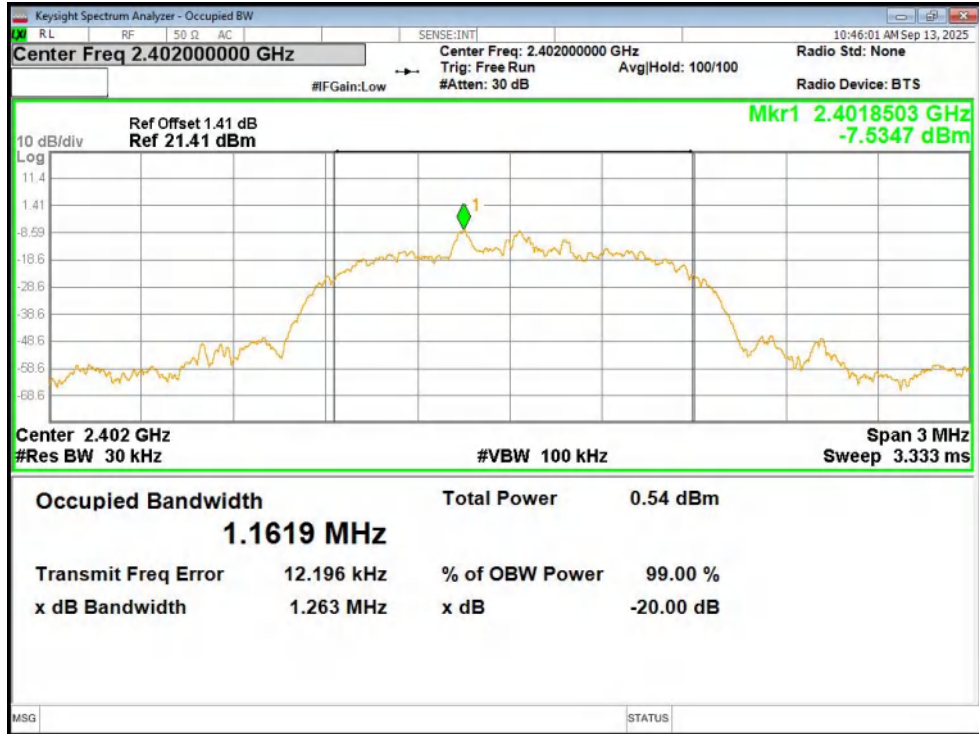

OBW NVNT 3-DH5 2441MHz Ant1

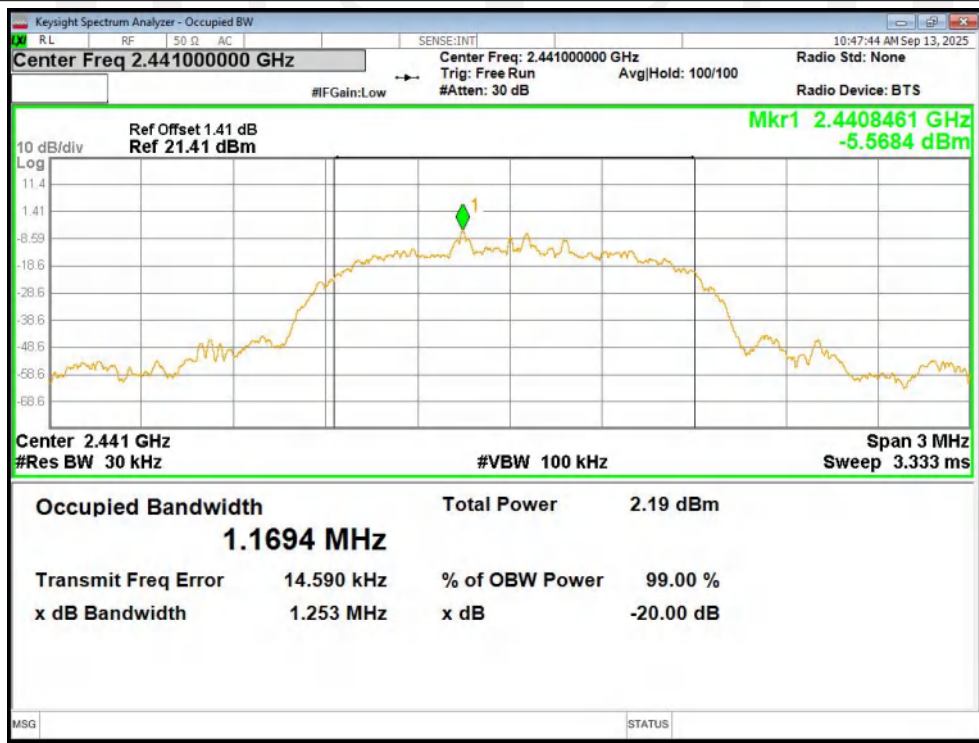

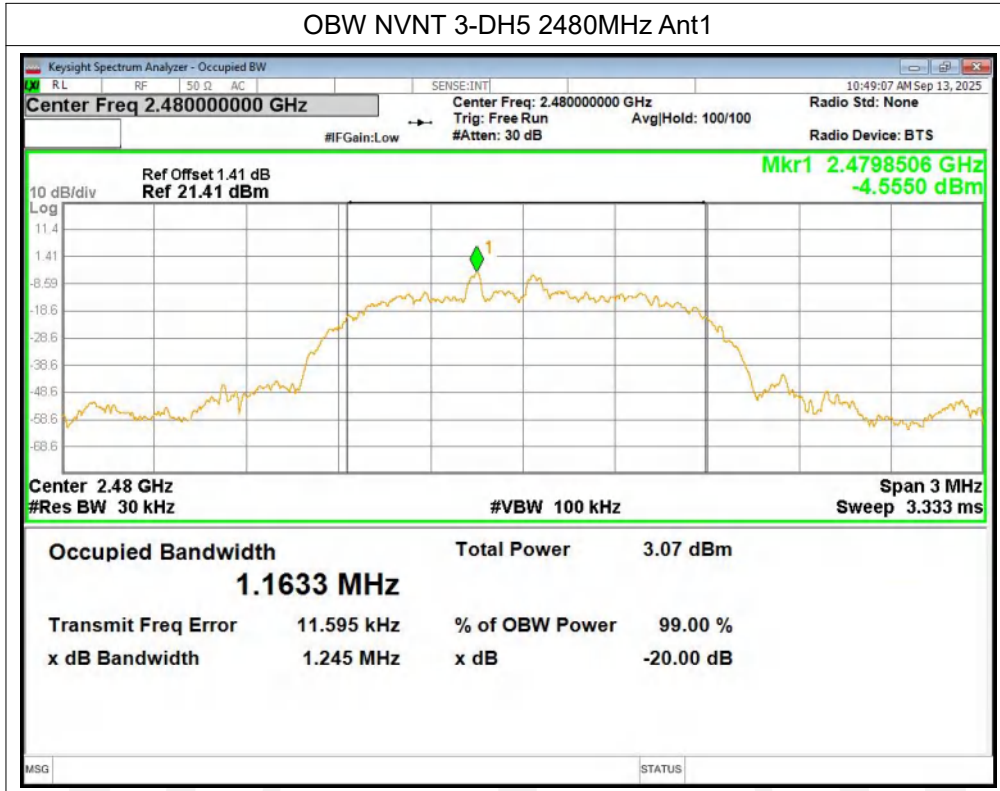

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
Please refer FCC part 15.247 & RSS-247.

5.2. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


GFSK	Set the RBW = 300 kHz. Set the VBW = 300 kHz.
$\pi/4$ -DQPSK	Set the RBW = 100 kHz. Set the VBW = 100 kHz.
8DPSK	Set the RBW = 100 kHz. Set the VBW = 100 kHz.

5.3. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.852	2403.014	1.162	0.621	Pass
NVNT	1-DH5	Ant1	2441.014	2442.01	0.996	0.621	Pass
NVNT	1-DH5	Ant1	2479	2479.998	0.998	0.629	Pass
NVNT	2-DH5	Ant1	2402.0086	2403.1864	1.1778	0.845	Pass
NVNT	2-DH5	Ant1	2440.8162	2441.8432	1.027	0.843	Pass
NVNT	2-DH5	Ant1	2478.8422	2479.838	0.9958	0.843	Pass
NVNT	3-DH5	Ant1	2401.9748	2403.0564	1.0816	0.837	Pass
NVNT	3-DH5	Ant1	2440.837	2441.8744	1.0374	0.846	Pass
NVNT	3-DH5	Ant1	2478.8084	2479.8458	1.0374	0.846	Pass

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

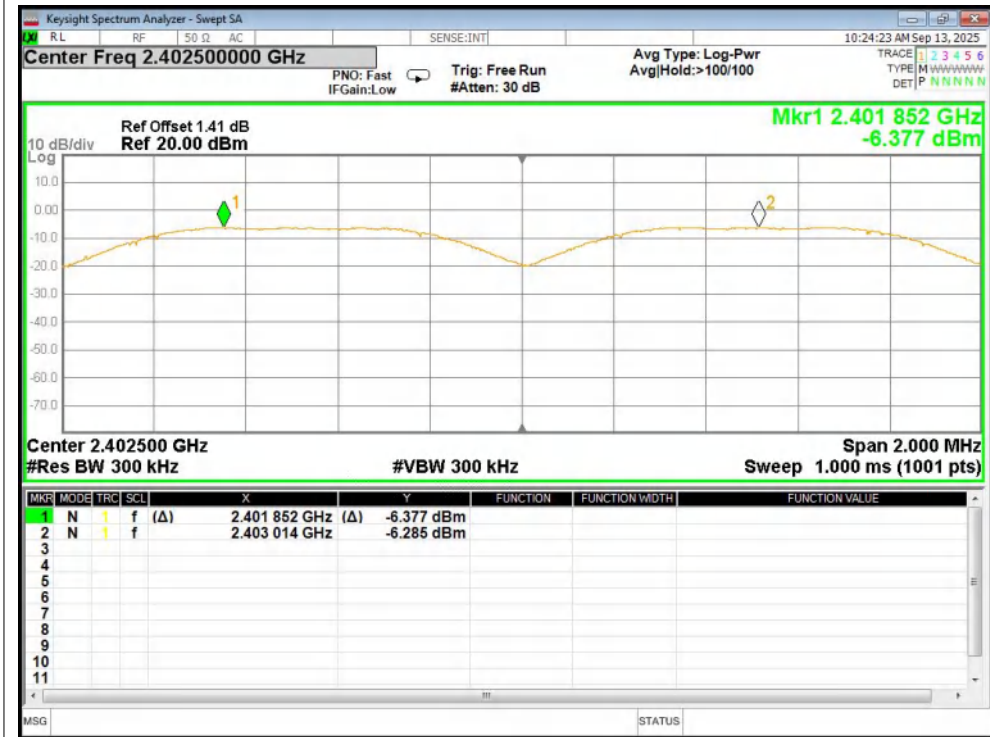


CFS NVNT 1-DH5 2441MHz Ant1

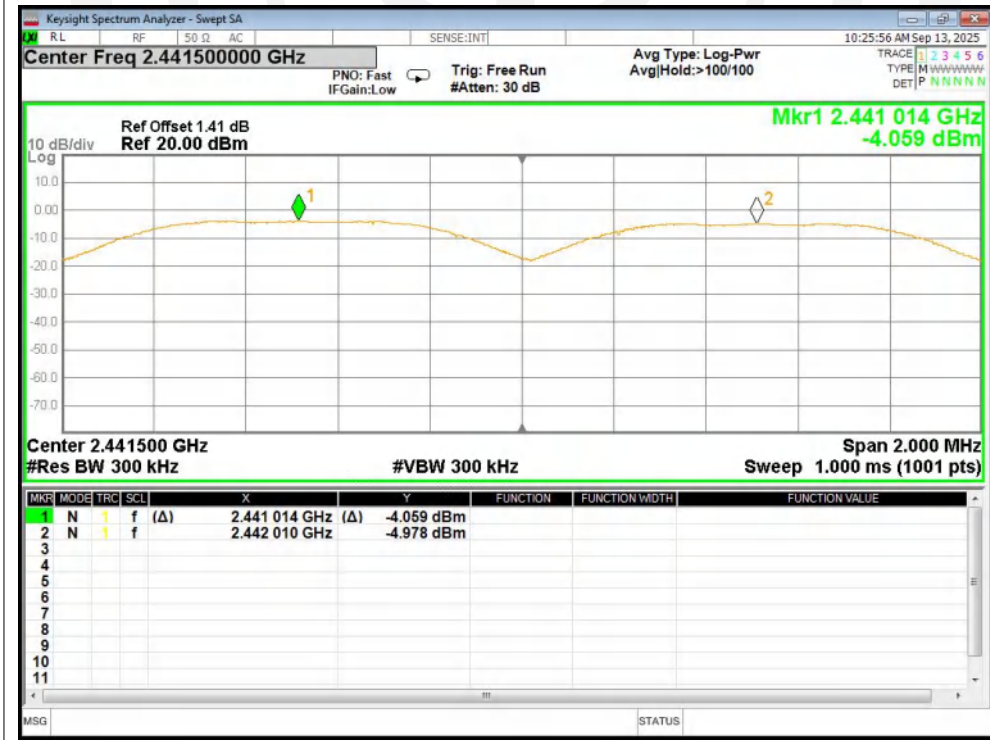

CFS NVNT 1-DH5 2480MHz Ant1




CFS NVNT 2-DH5 2402MHz Ant1

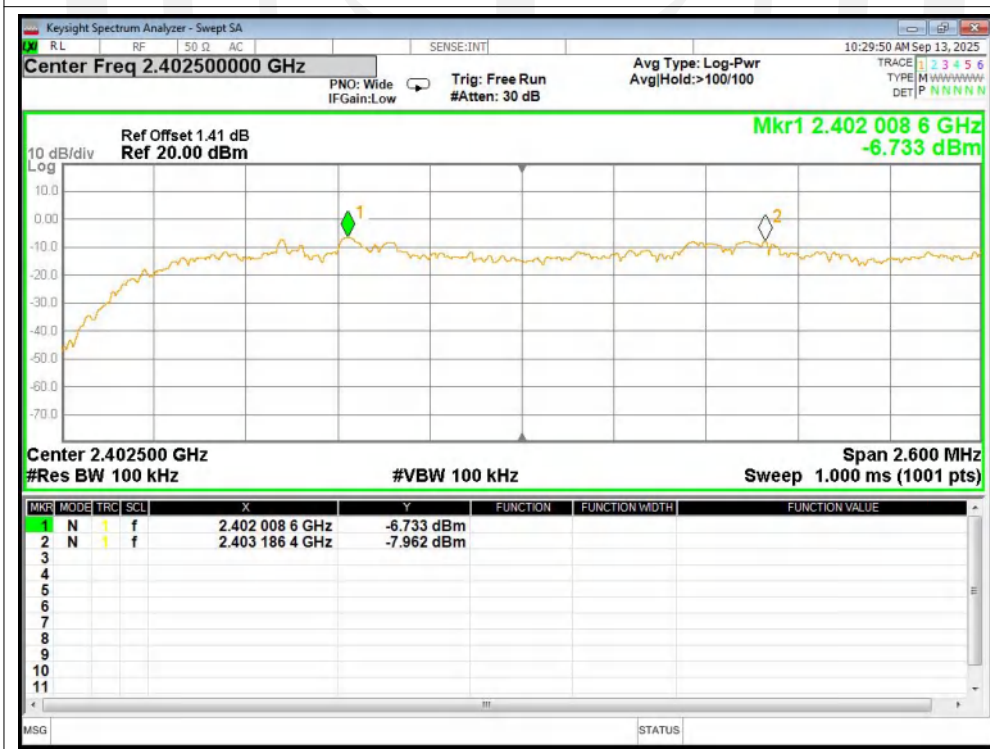

CFS NVNT 2-DH5 2441MHz Ant1




CFS NVNT 2-DH5 2480MHz Ant1

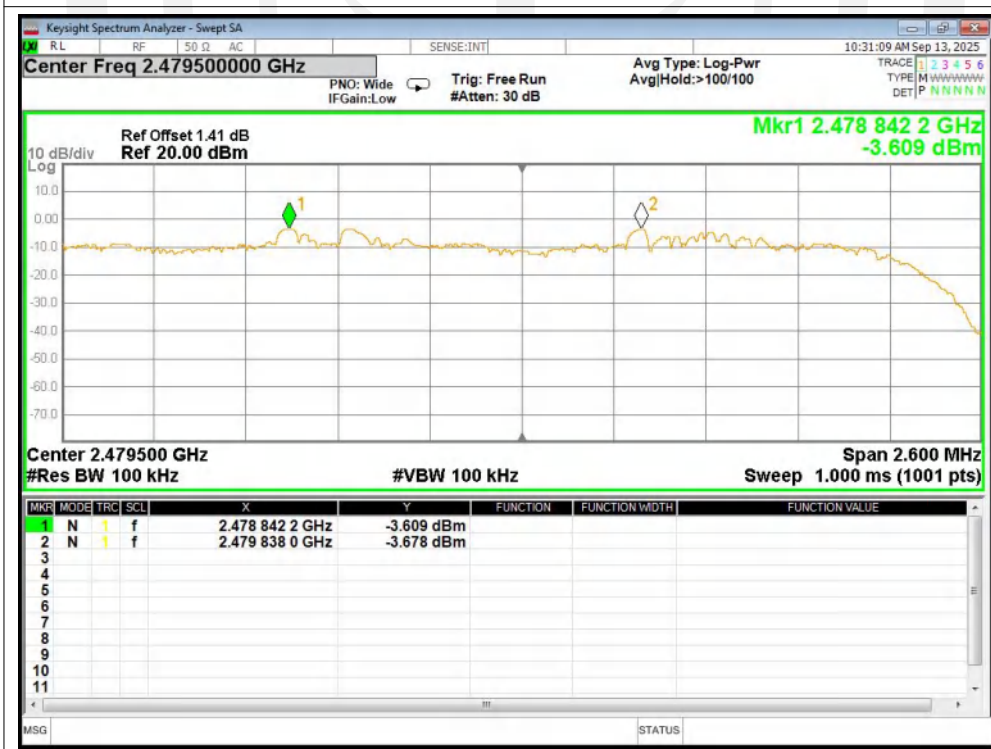


CFS NVNT 3-DH5 2402MHz Ant1



CFS NVNT 3-DH5 2441MHz Ant1

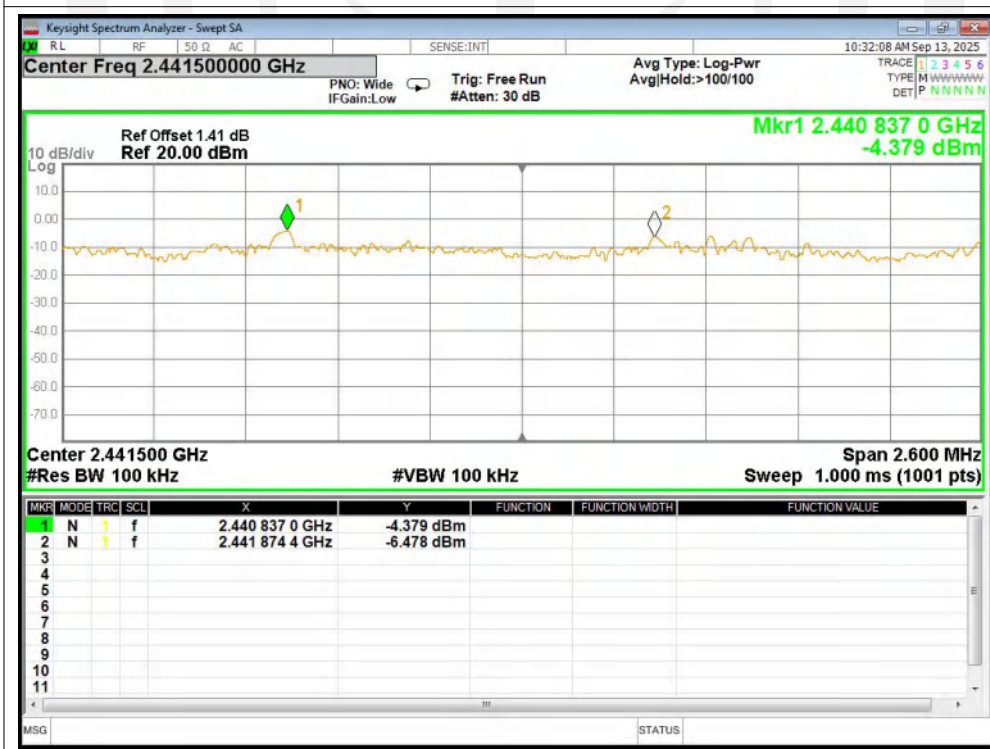

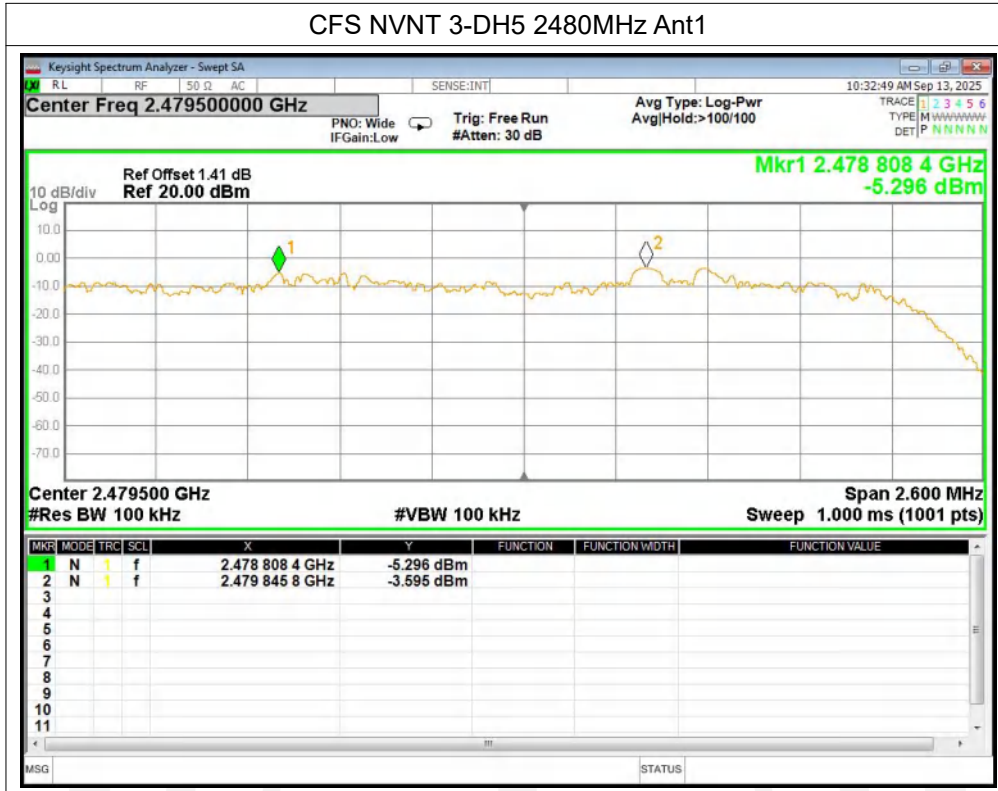

6. Number Of Hopping Channel

6.1. Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Please refer FCC part 15.247 & RSS-247.

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Mode	Antenna	Hopping Number	Limit	Verdict
1-DH5	Ant1	79	15	Pass
2-DH5	Ant1	79	15	Pass
3-DH5	Ant1	79	15	Pass

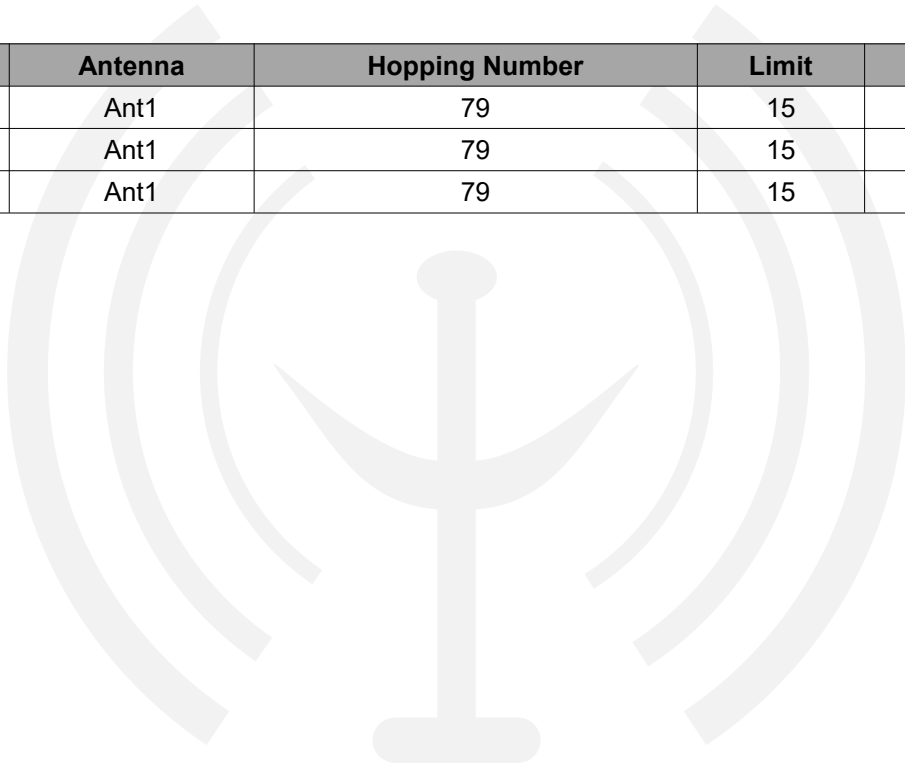



Test Graphs

Hopping No. NVNT 1-DH5 Ant1



Hopping No. NVNT 2-DH5 Ant1

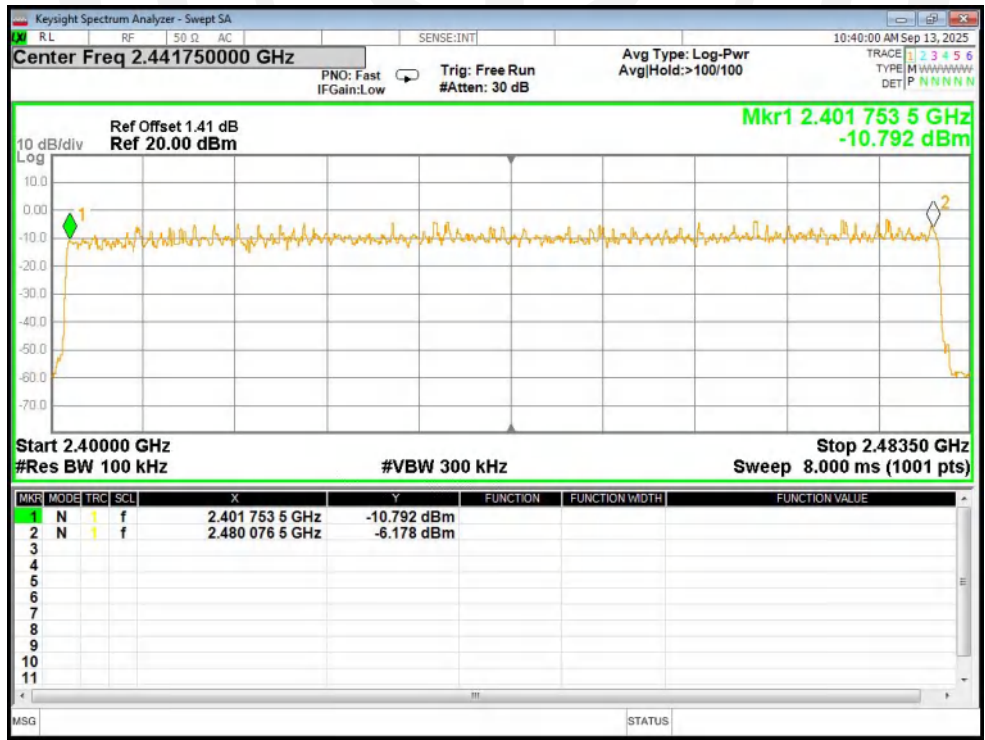

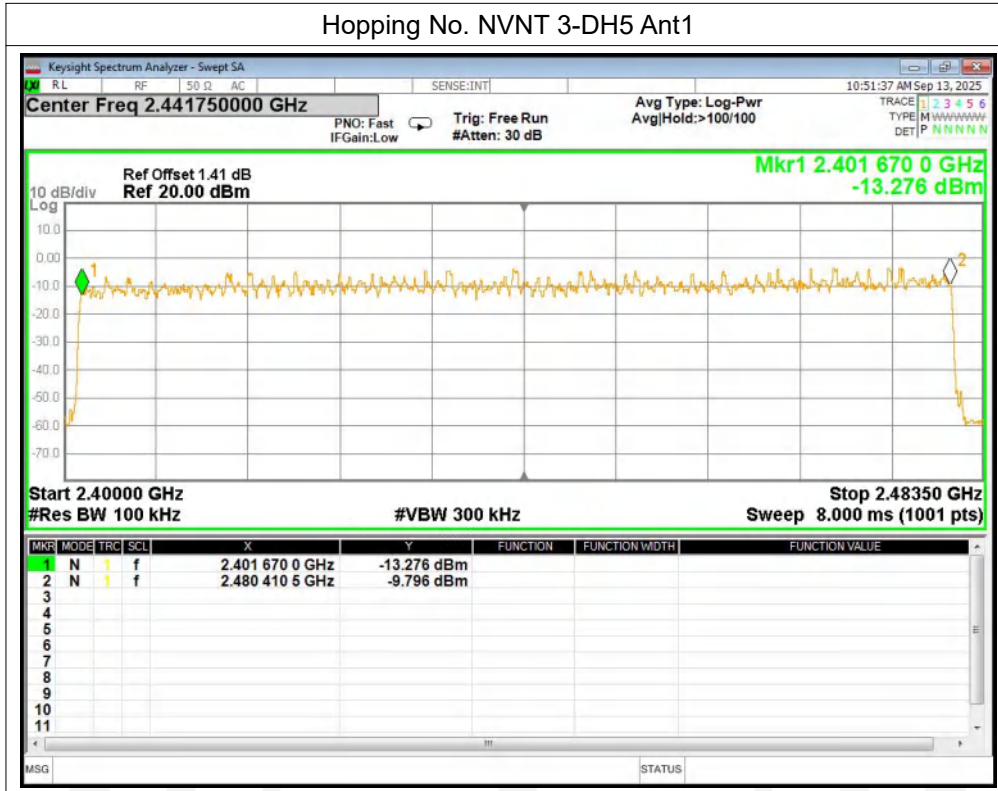

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 sec- onds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.2.6. The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

7.2.7. Dwell Time=Pulse Time* Hops Number

7.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.403	128.557	319	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.659	260.463	157	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.906	342.908	118	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.412	131.428	319	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.664	259.584	156	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.909	325.808	112	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.411	131.109	319	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.663	259.428	156	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.915	303.16	104	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

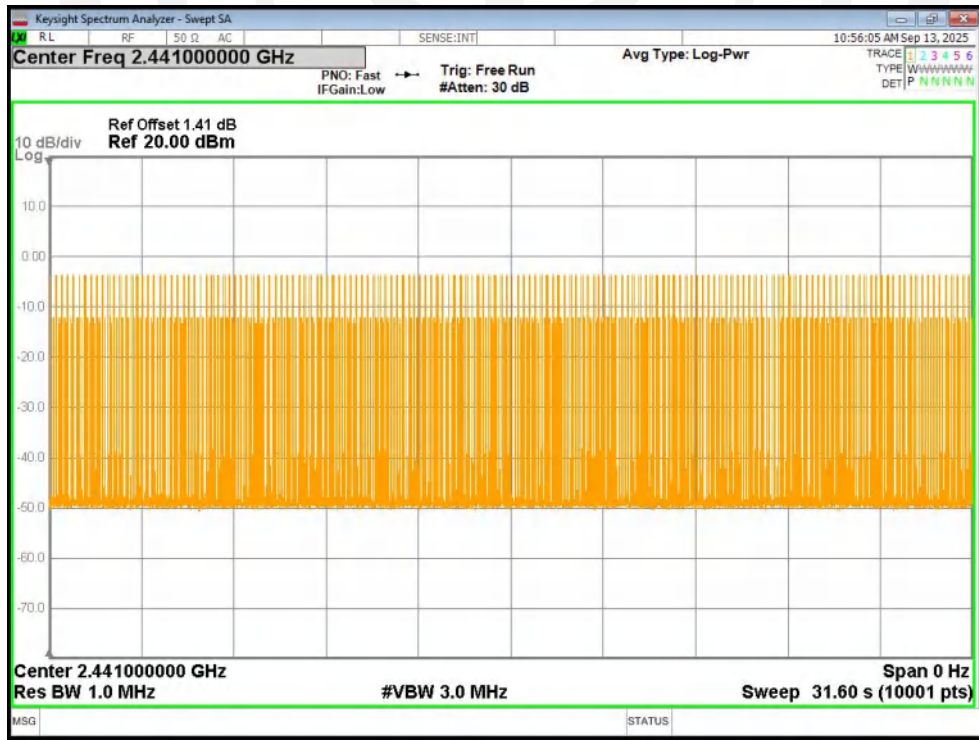


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

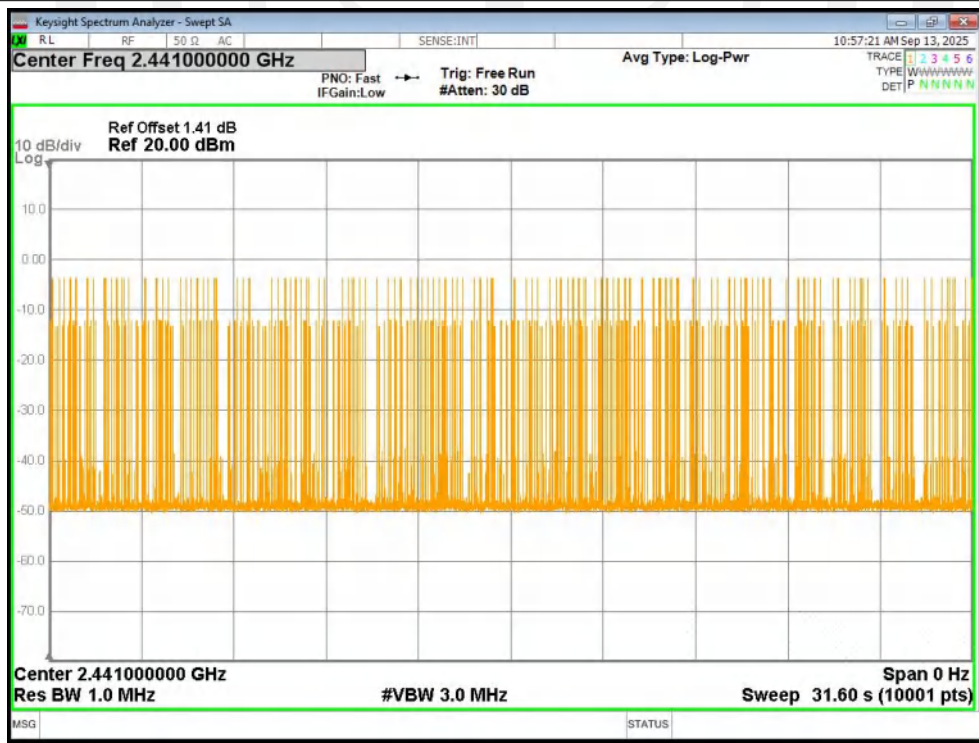


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

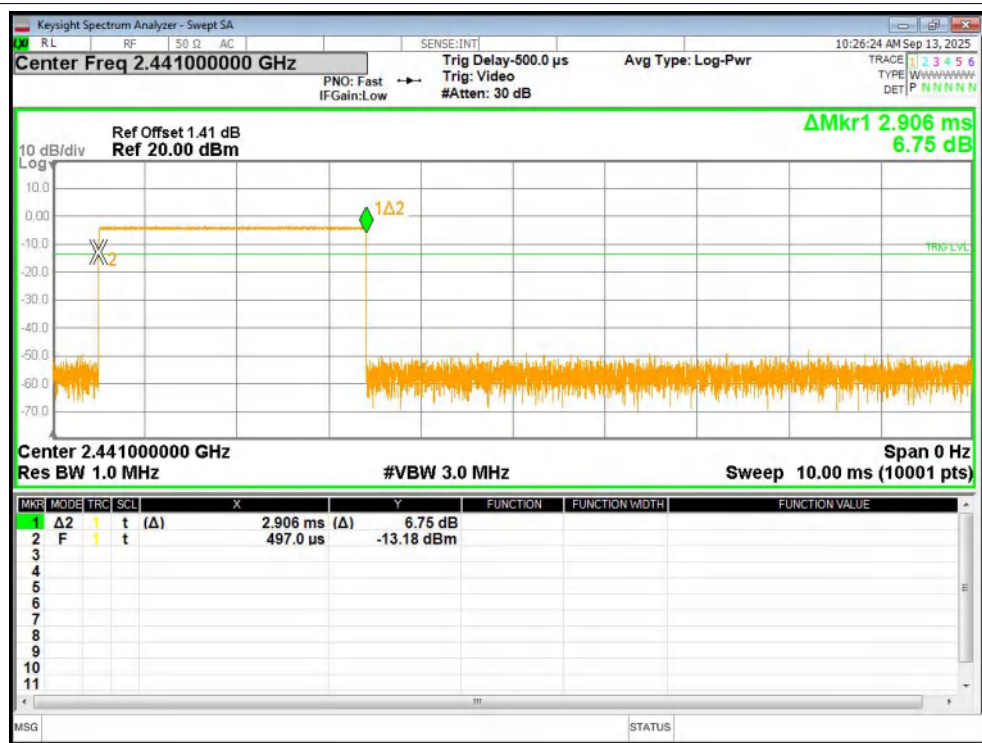


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

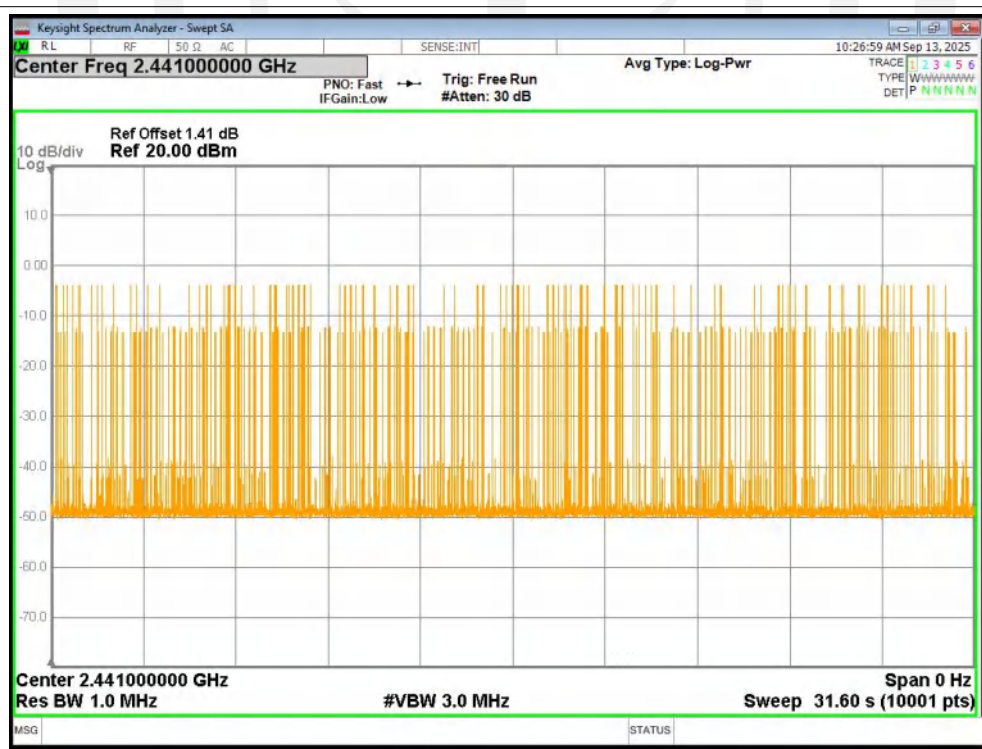

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

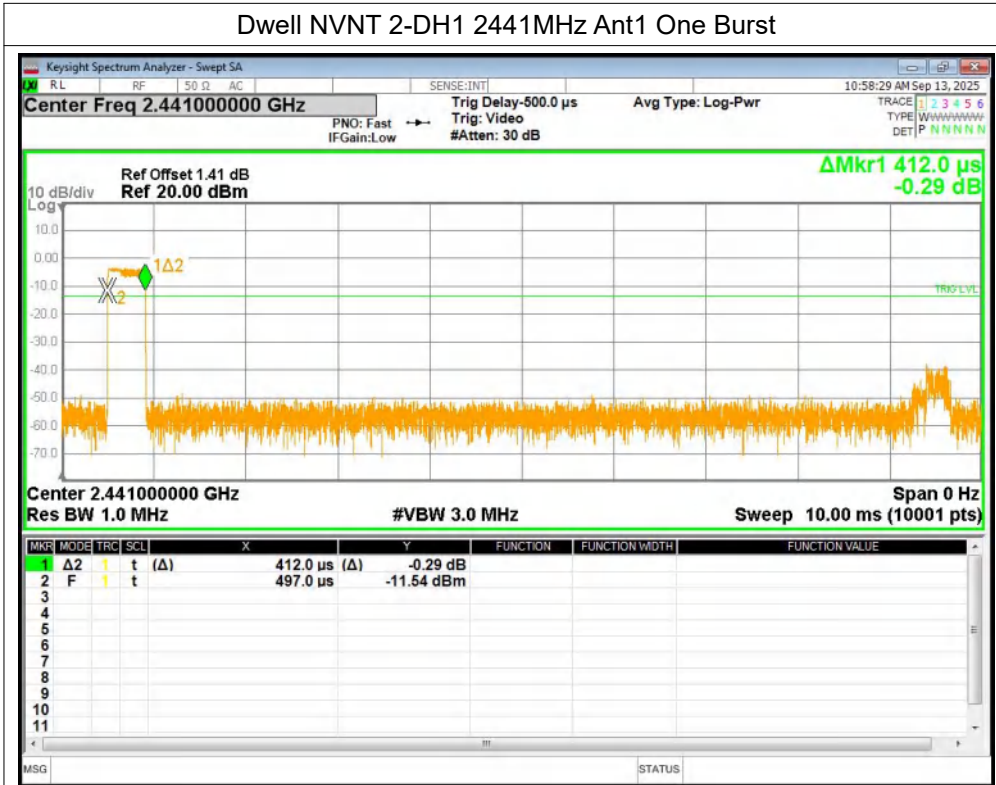


Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

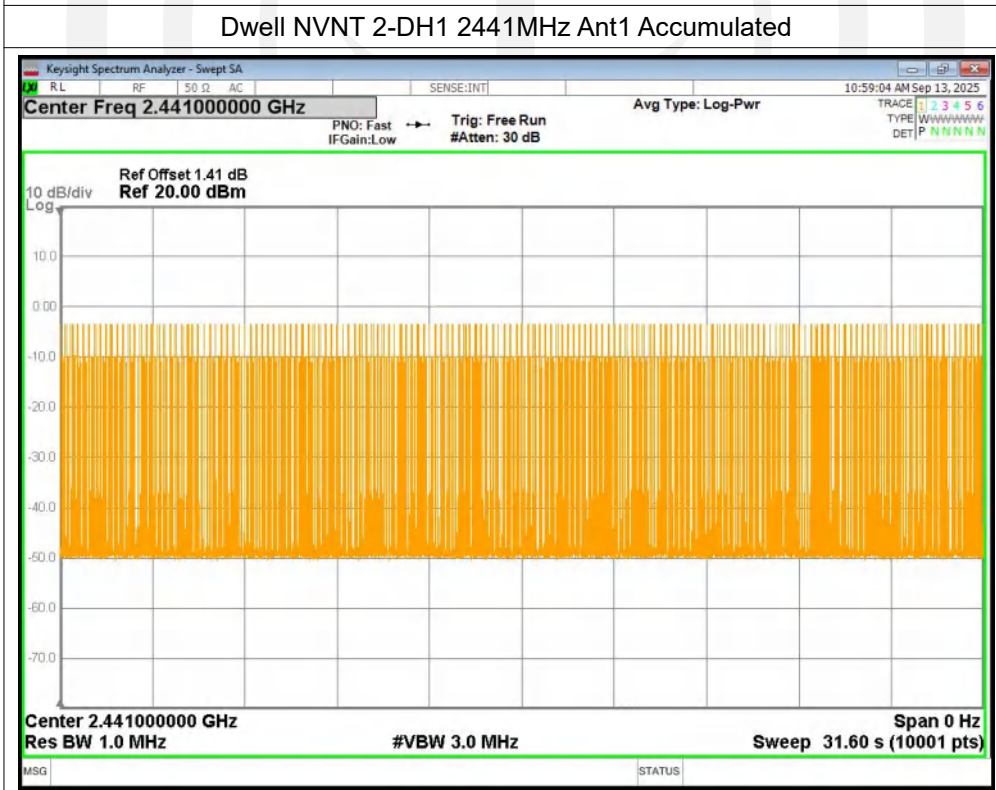


Dwell NVNT 2-DH3 2441MHz Ant1 One Burst




Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

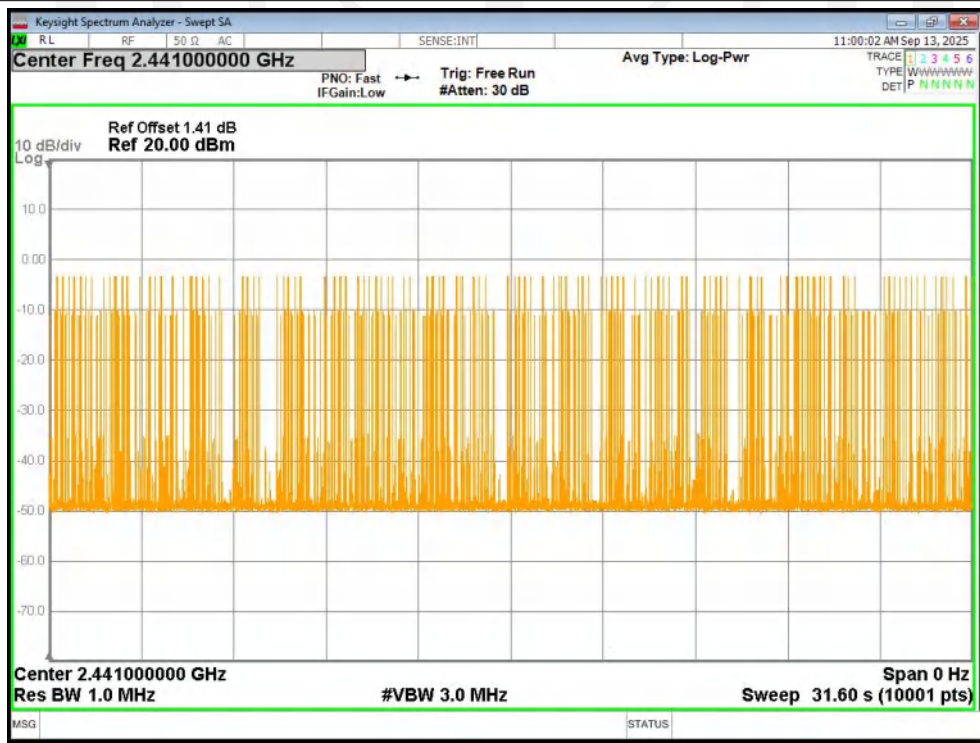

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

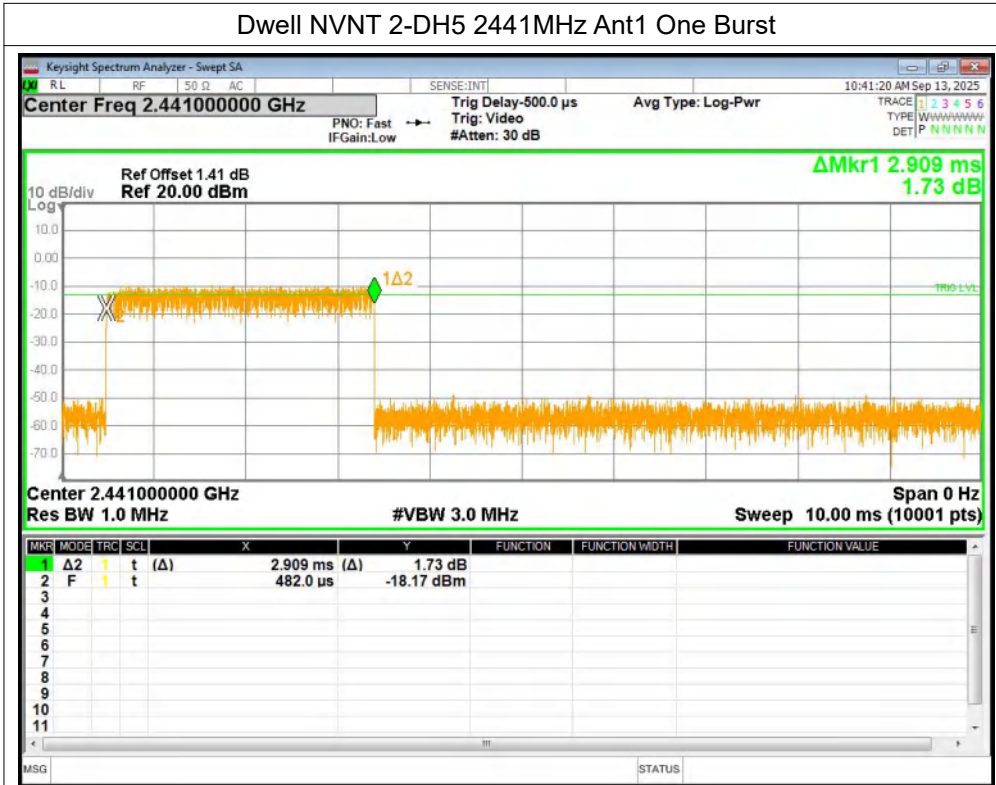


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

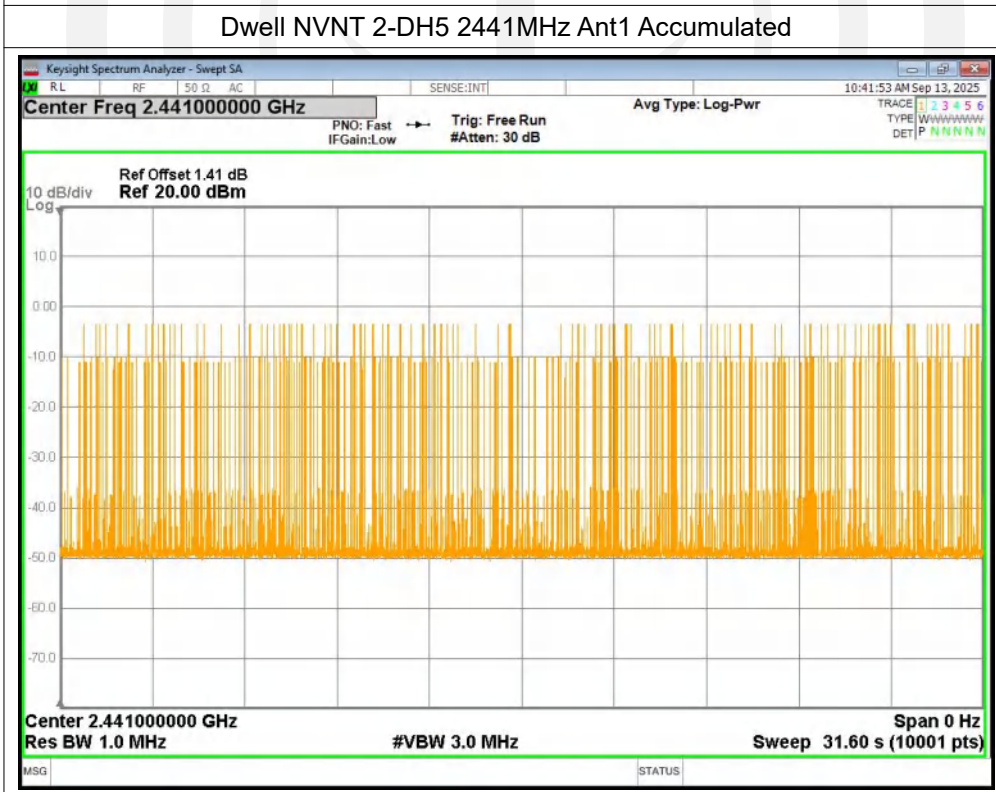

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst




Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

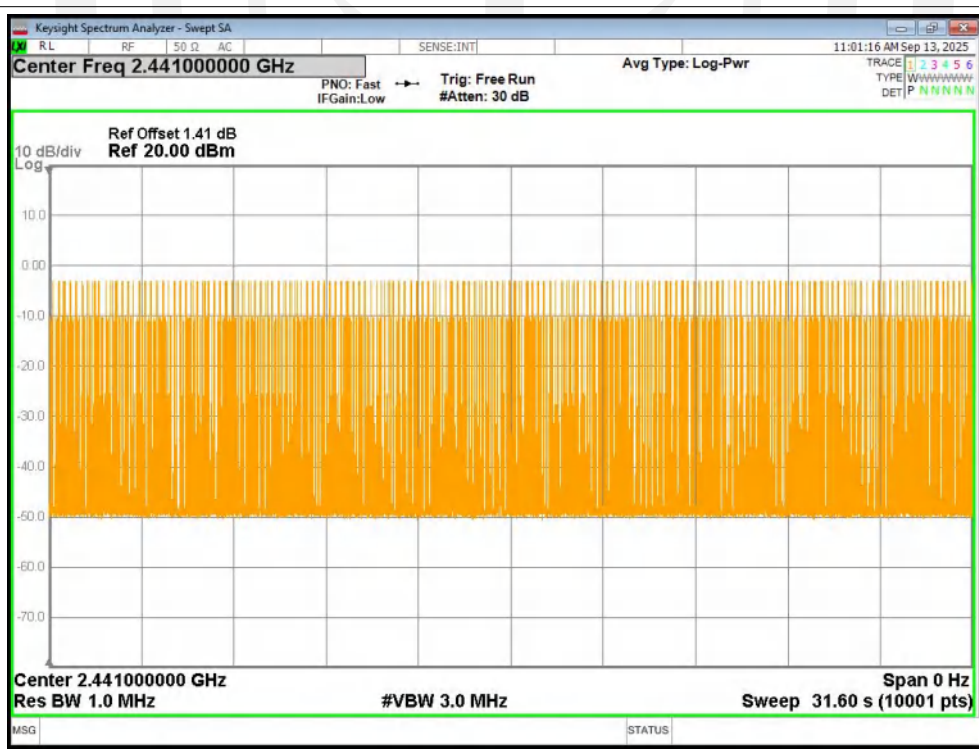

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst




Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

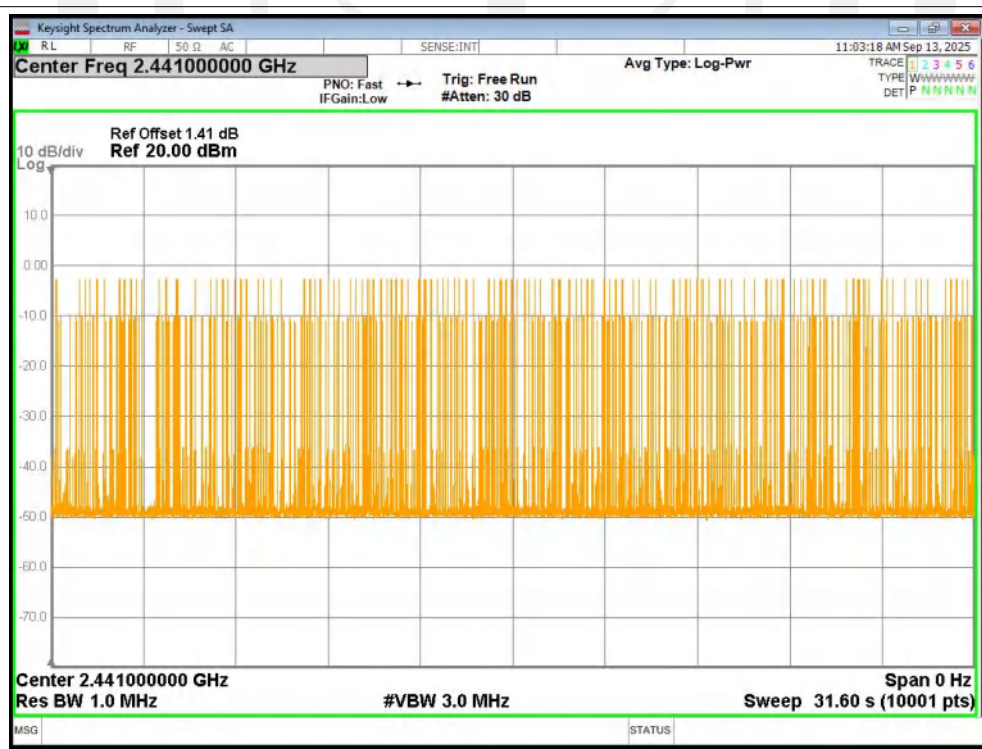

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst



Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

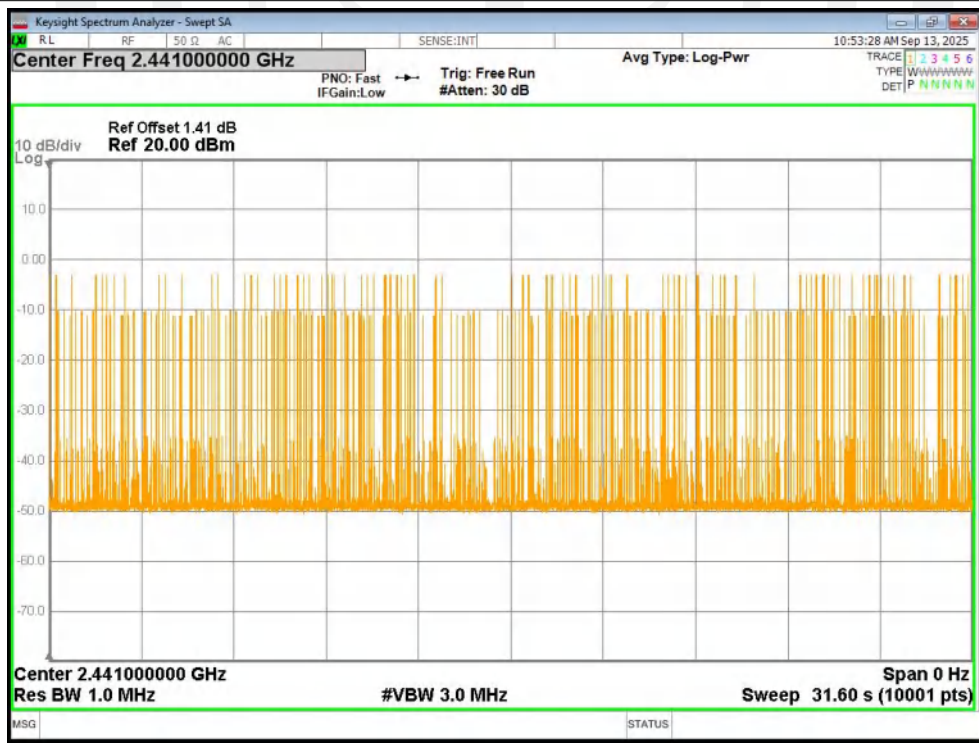

8. Out-of-band Emissions

8.1. Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required.

Please refer section 15.247.

8.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

8.3. Test Setup



8.4. Test Results

PASS.

The test results are listed in next pages.


Band Edge:pass

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-51.45	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54.2	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-51.3	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-51.71	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-50.34	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.46	-20	Pass




Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

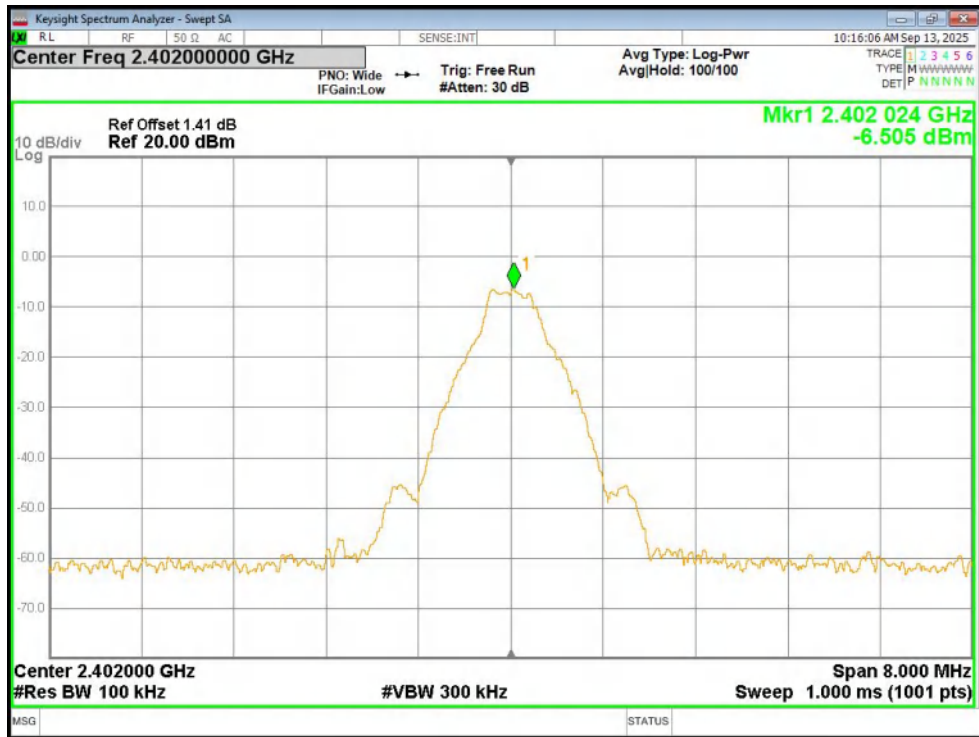


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

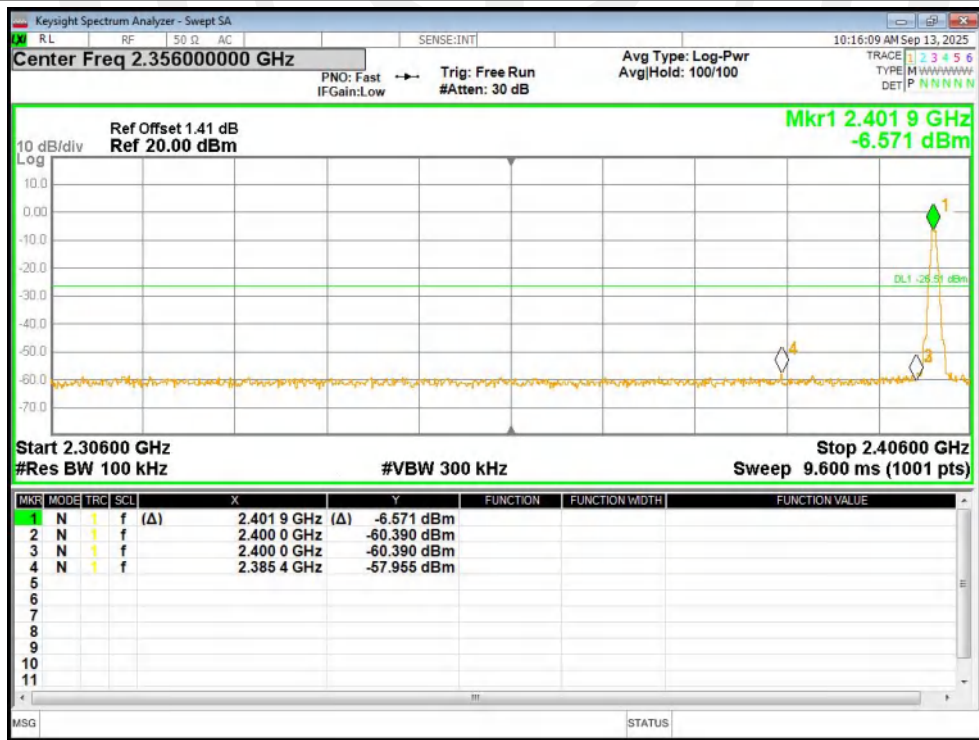


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

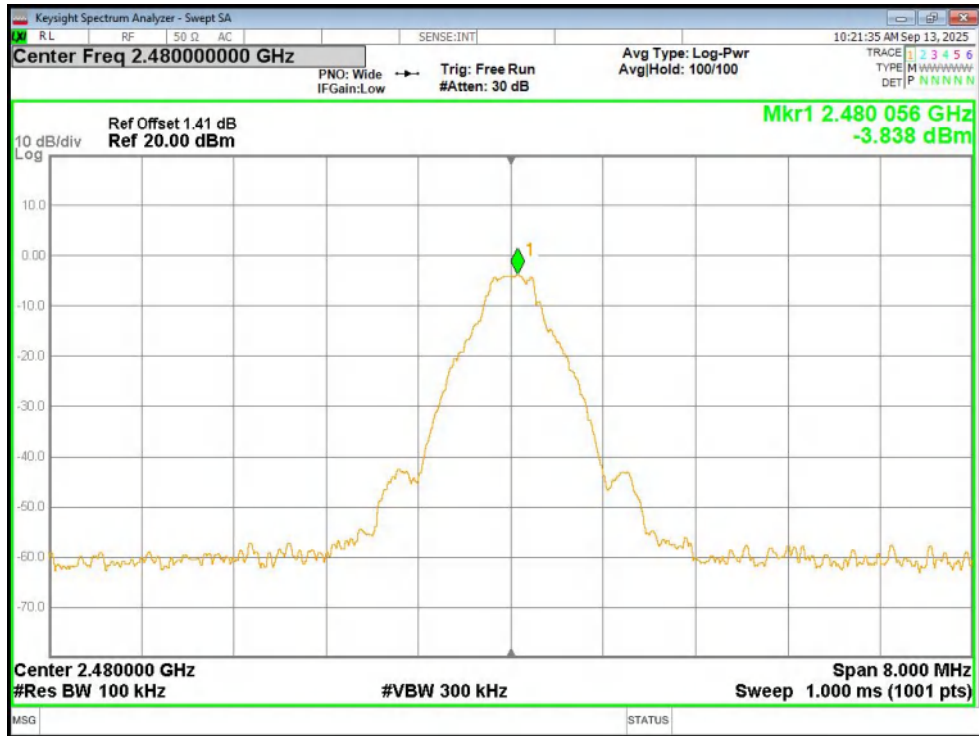


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

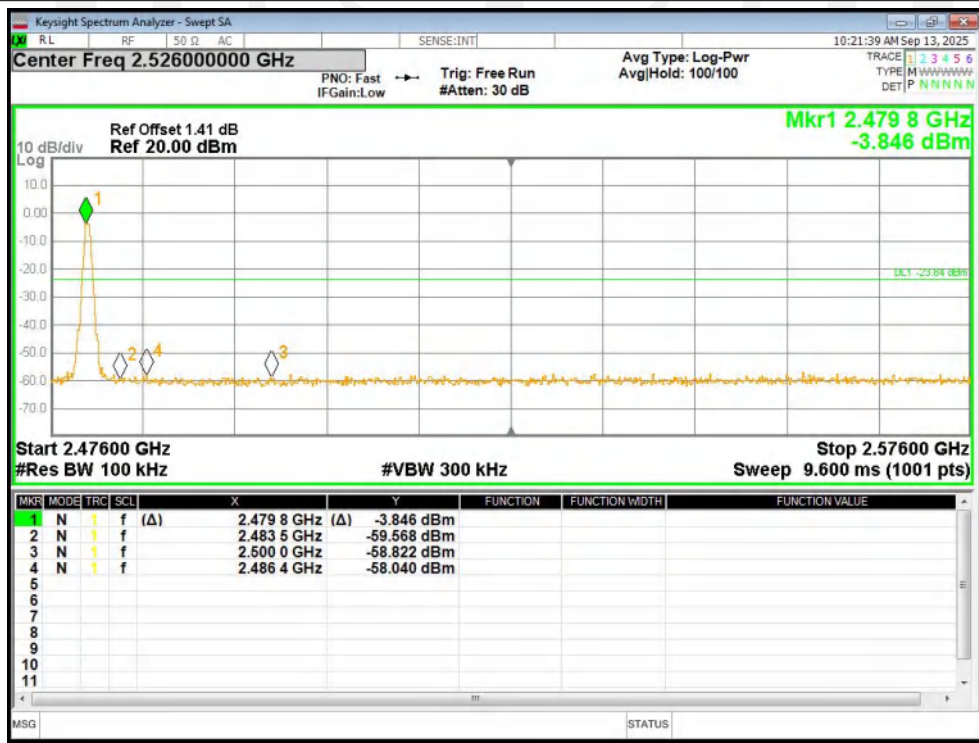


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

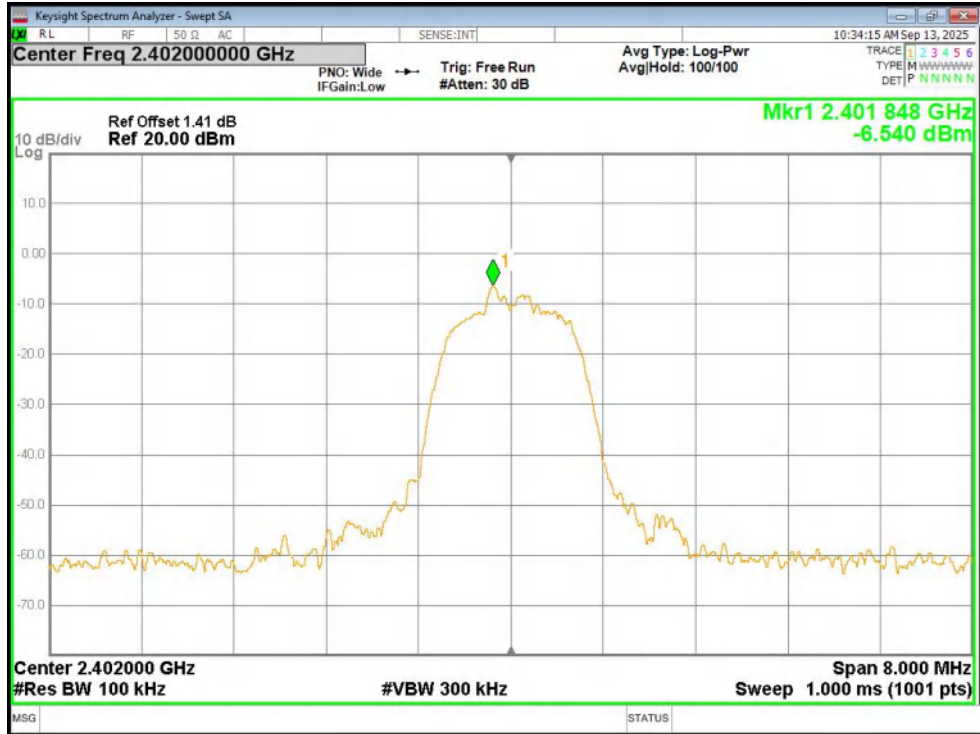

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

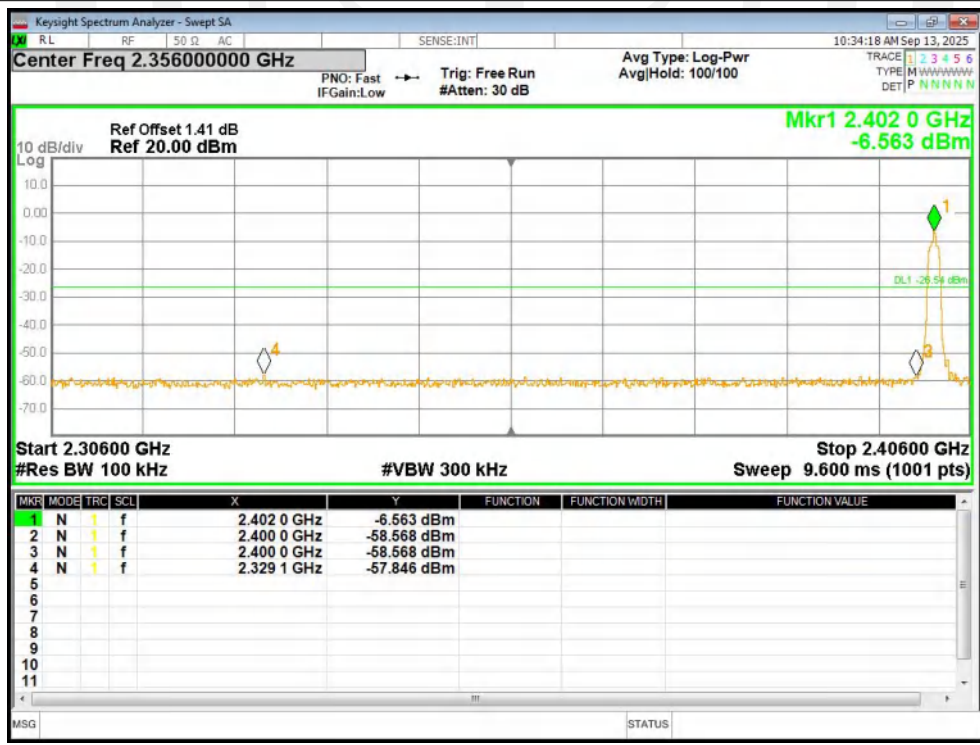


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

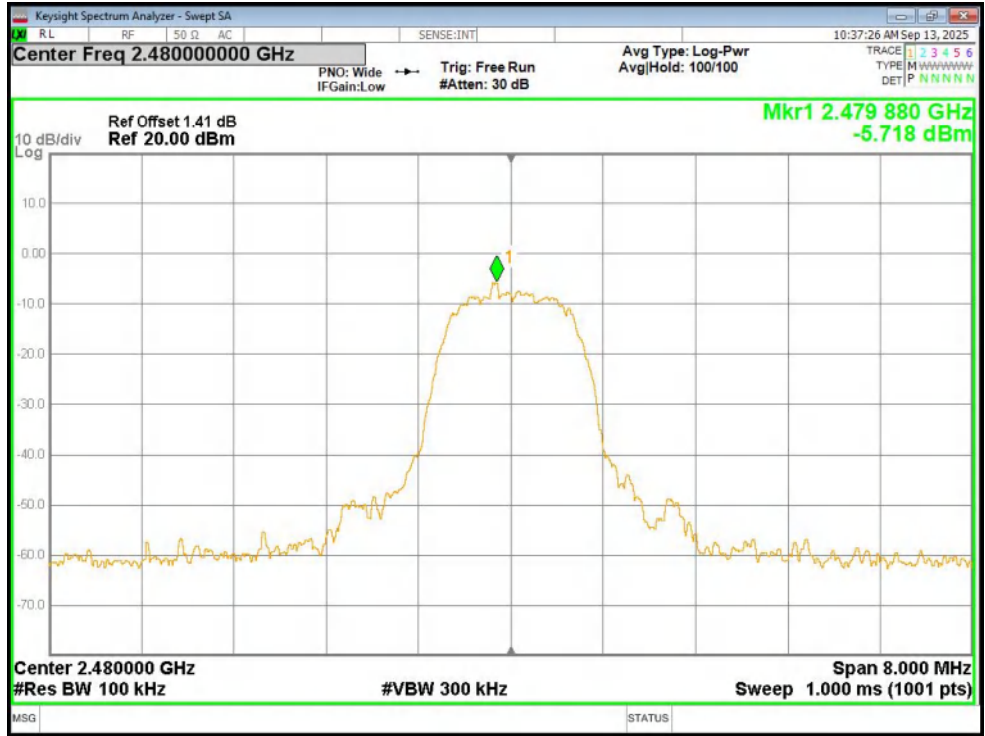


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

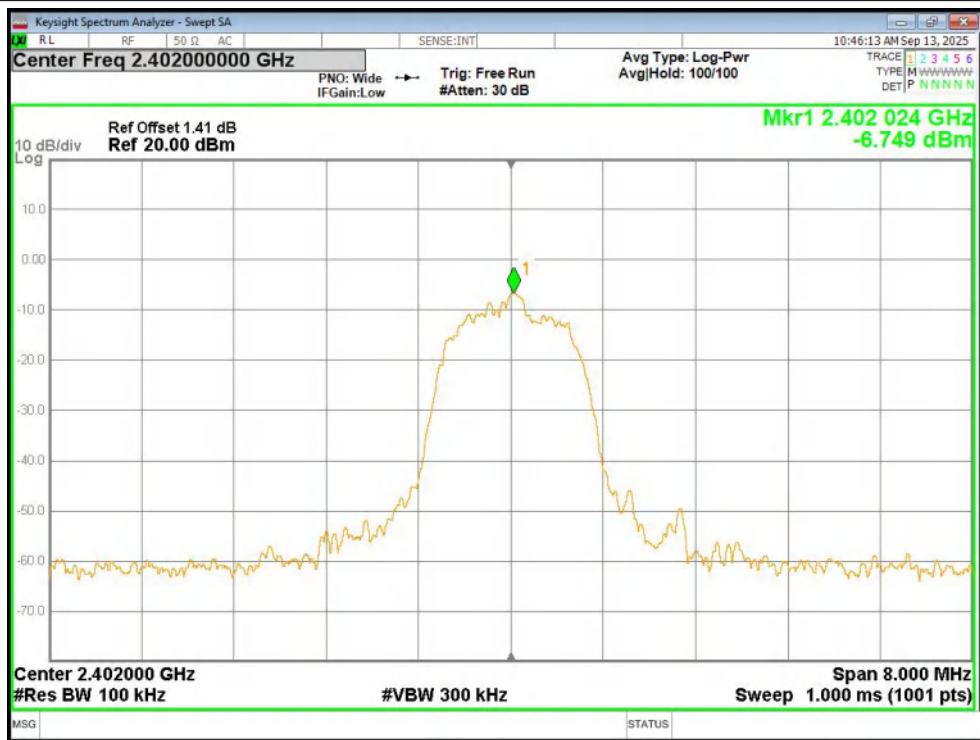


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

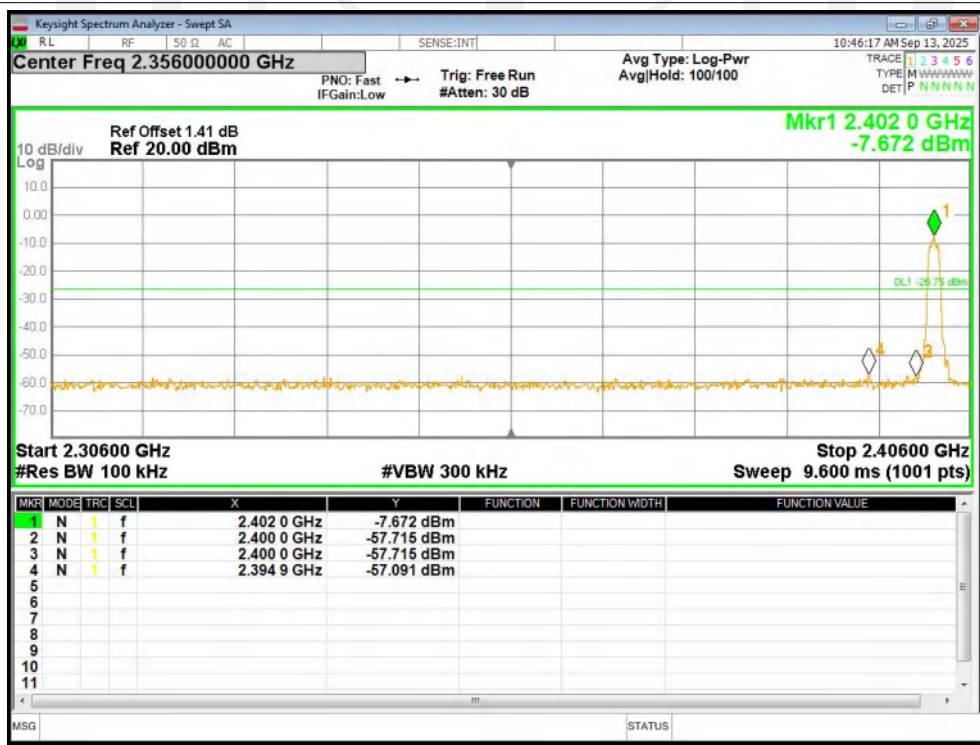

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

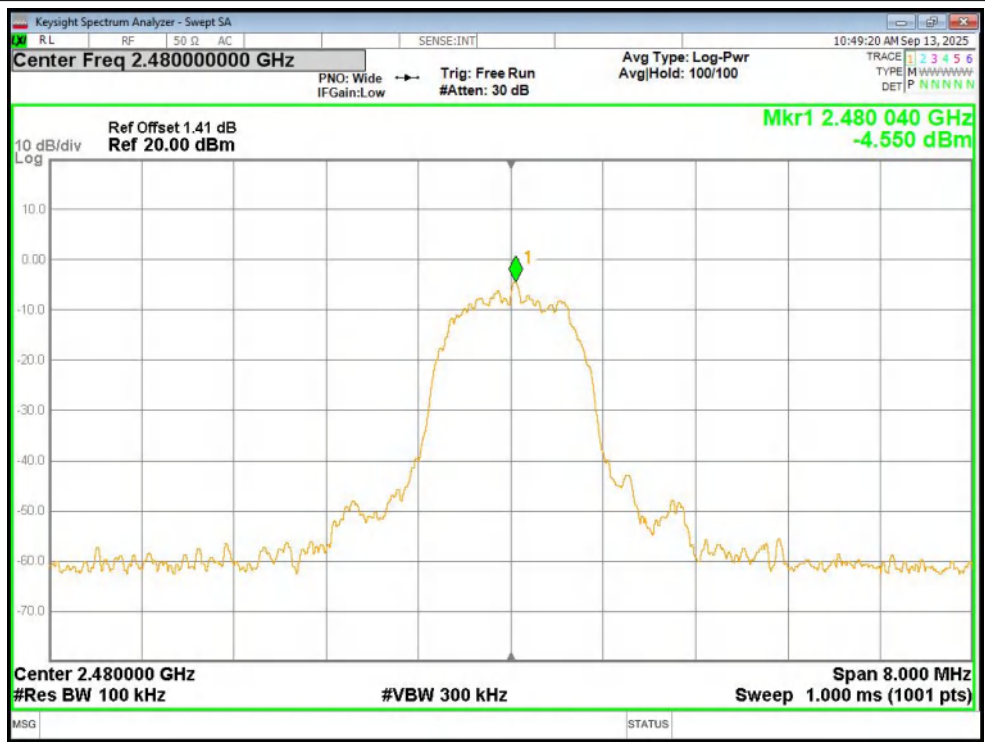

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

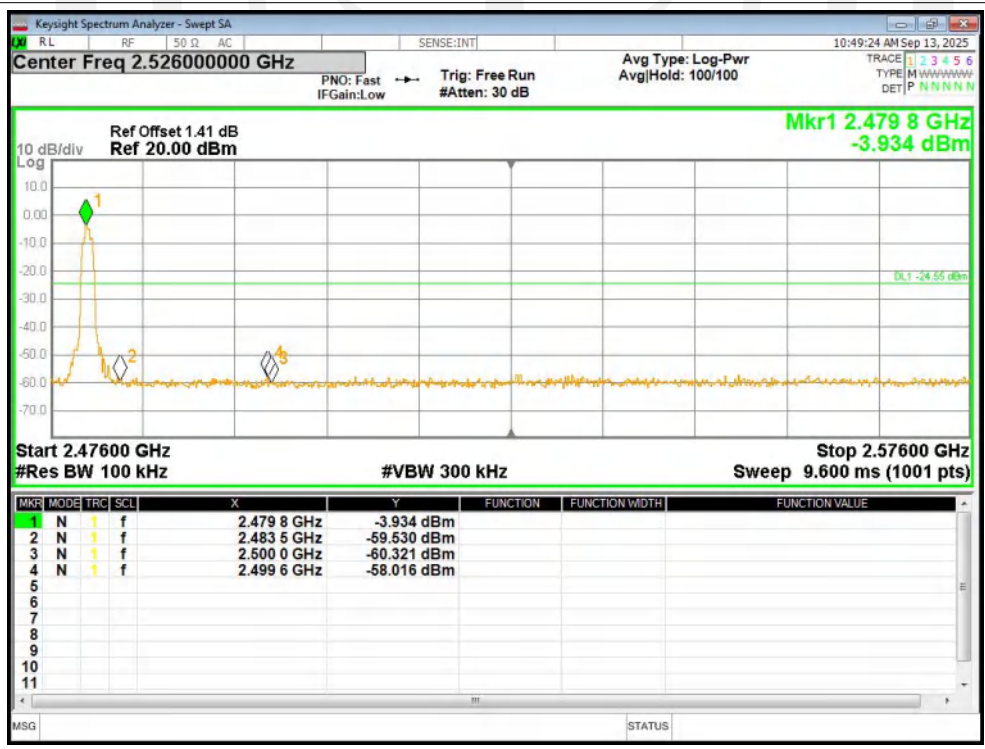

Band Edge(Hopping):pass

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-50.92	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-53.72	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.96	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-53.47	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-50.16	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-52.91	-20	Pass




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

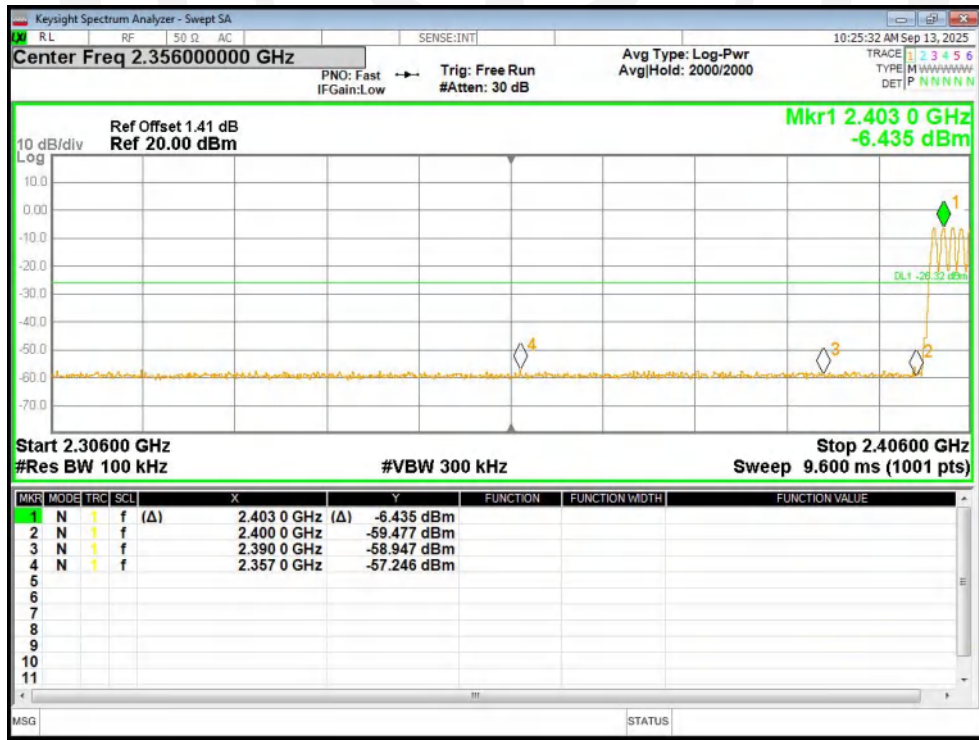


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

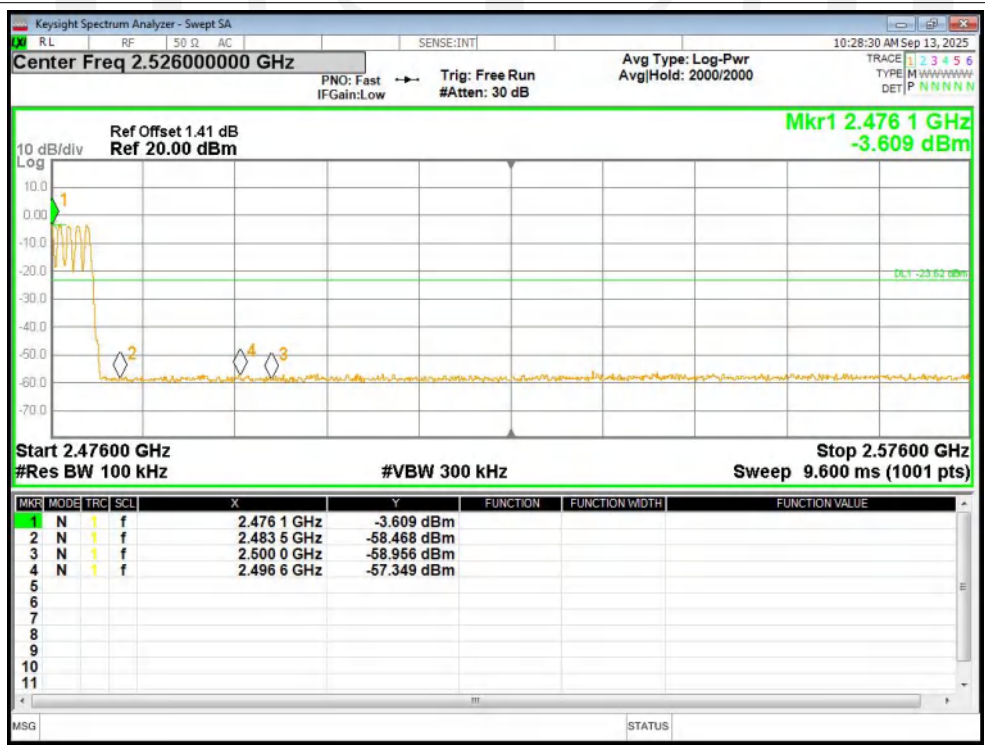

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

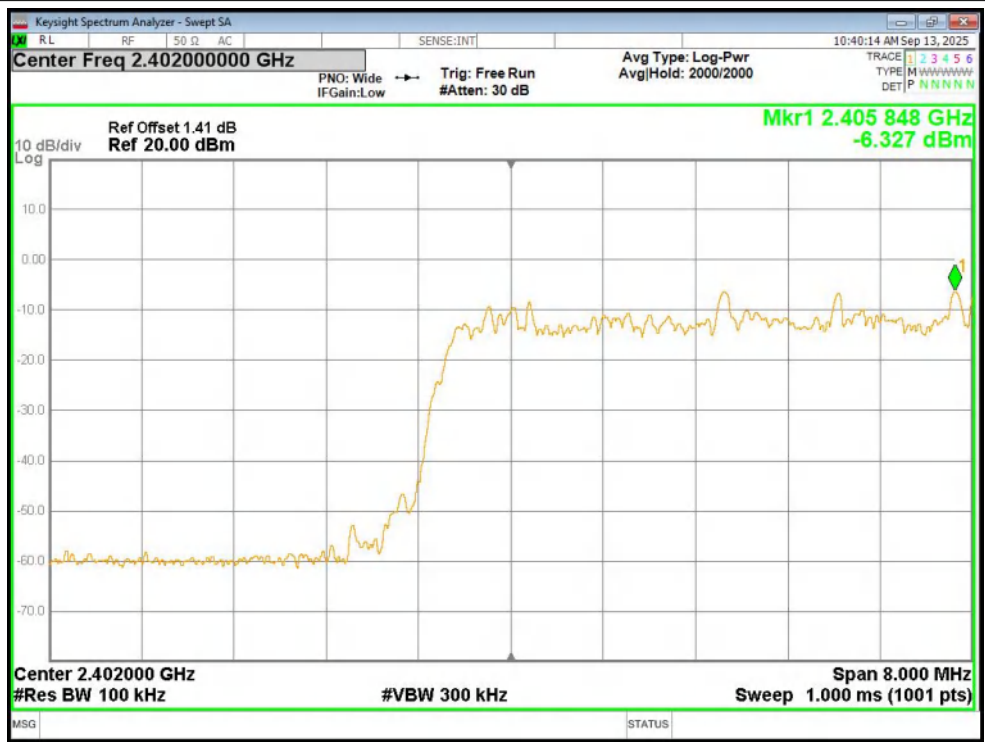


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

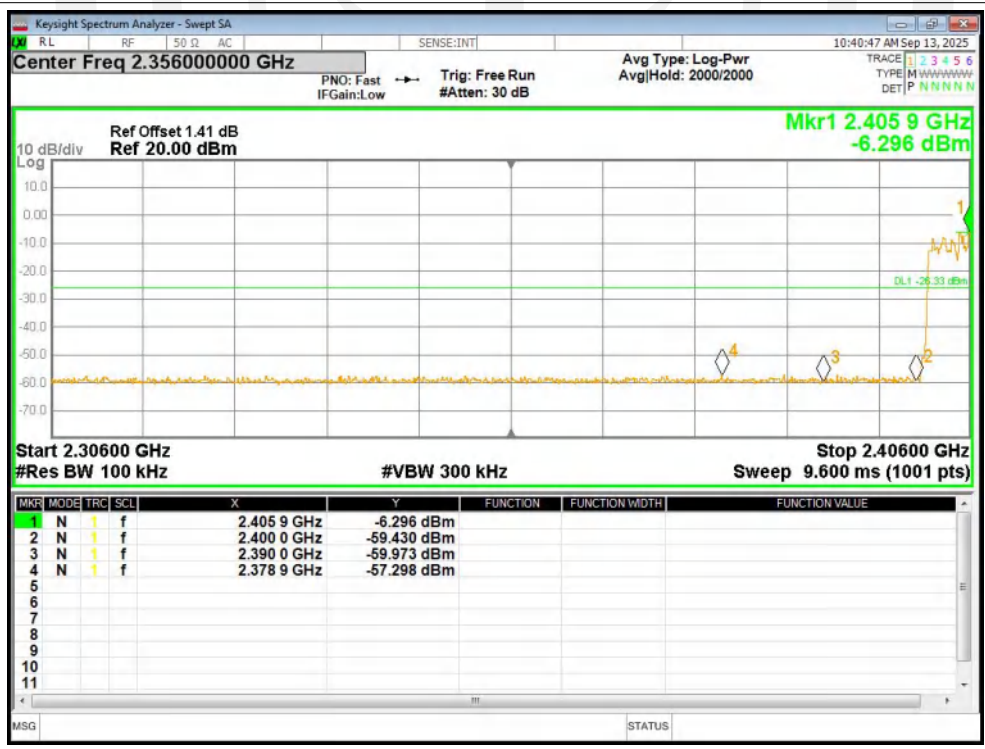


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

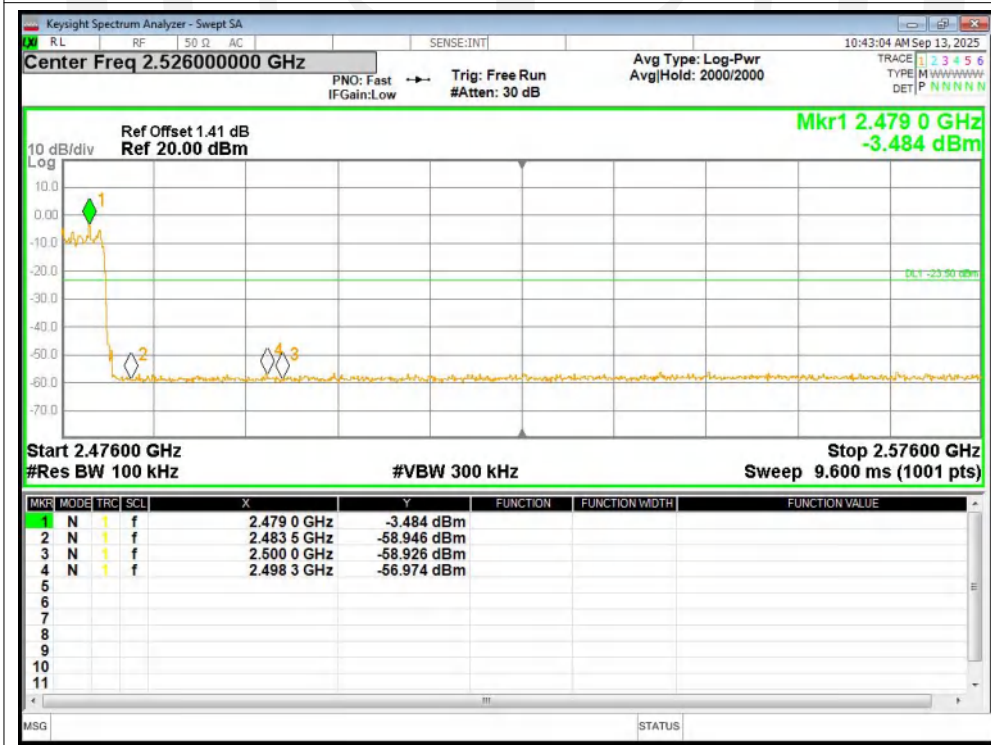

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

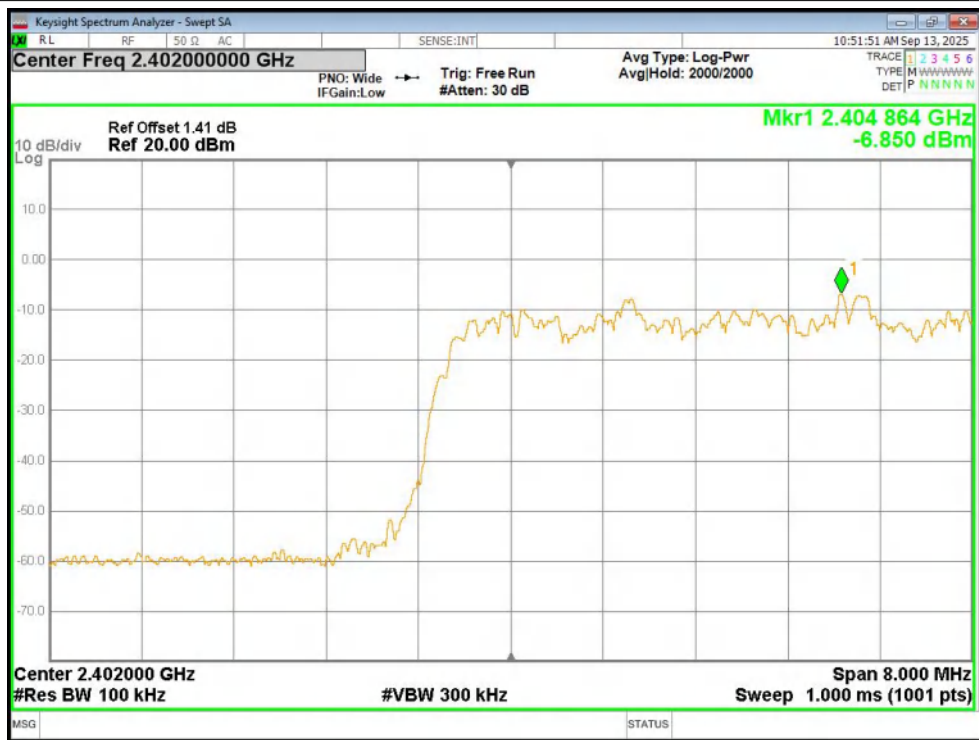

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

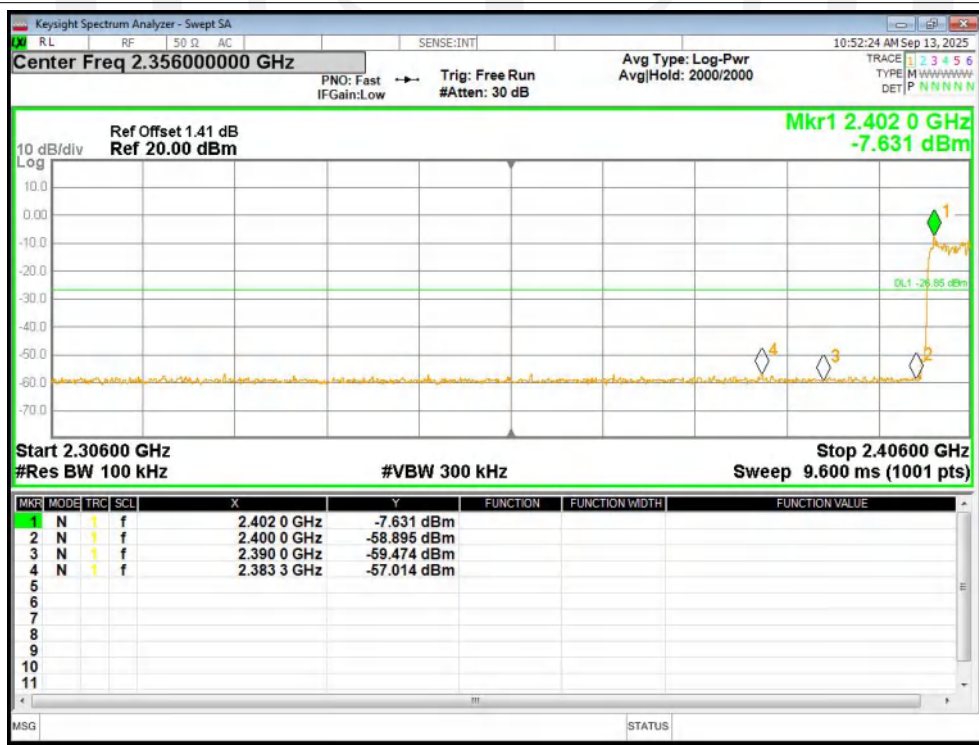

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission




Conducted RF Spurious Emission:pass

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-48.31	-20	Pass
NVNT	1-DH5	2441	Ant1	-47.48	-20	Pass
NVNT	1-DH5	2480	Ant1	-51.02	-20	Pass
NVNT	2-DH5	2402	Ant1	-50.49	-20	Pass
NVNT	2-DH5	2441	Ant1	-50.01	-20	Pass
NVNT	2-DH5	2480	Ant1	-53.22	-20	Pass
NVNT	3-DH5	2402	Ant1	-50.44	-20	Pass
NVNT	3-DH5	2441	Ant1	-51.13	-20	Pass
NVNT	3-DH5	2480	Ant1	-53.18	-20	Pass




Test Graphs


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

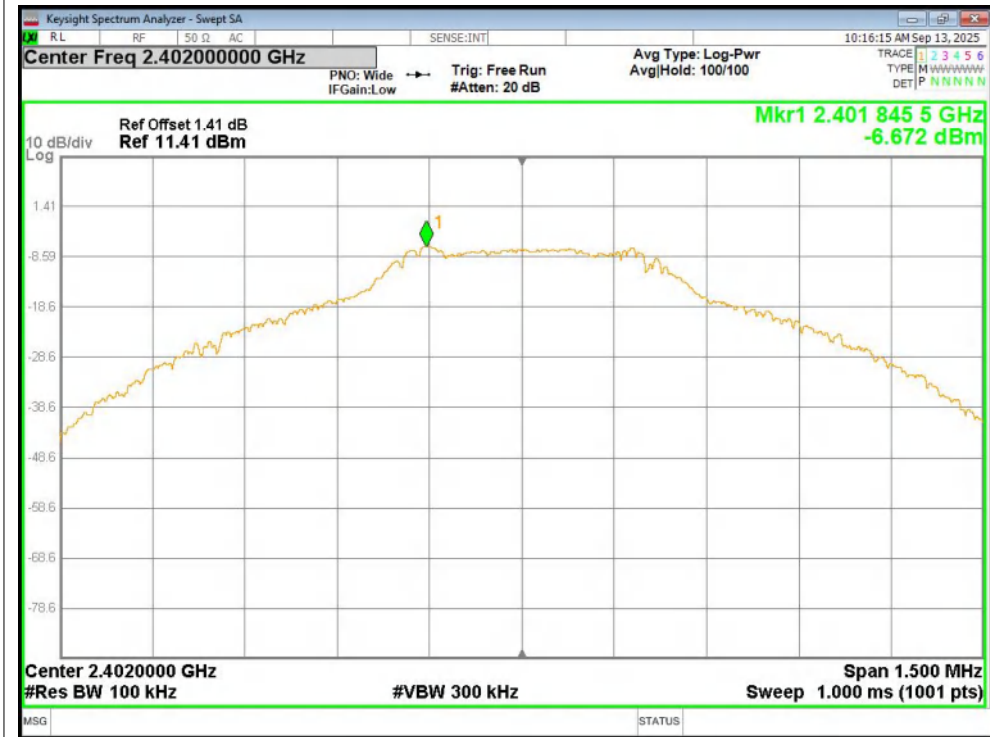


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

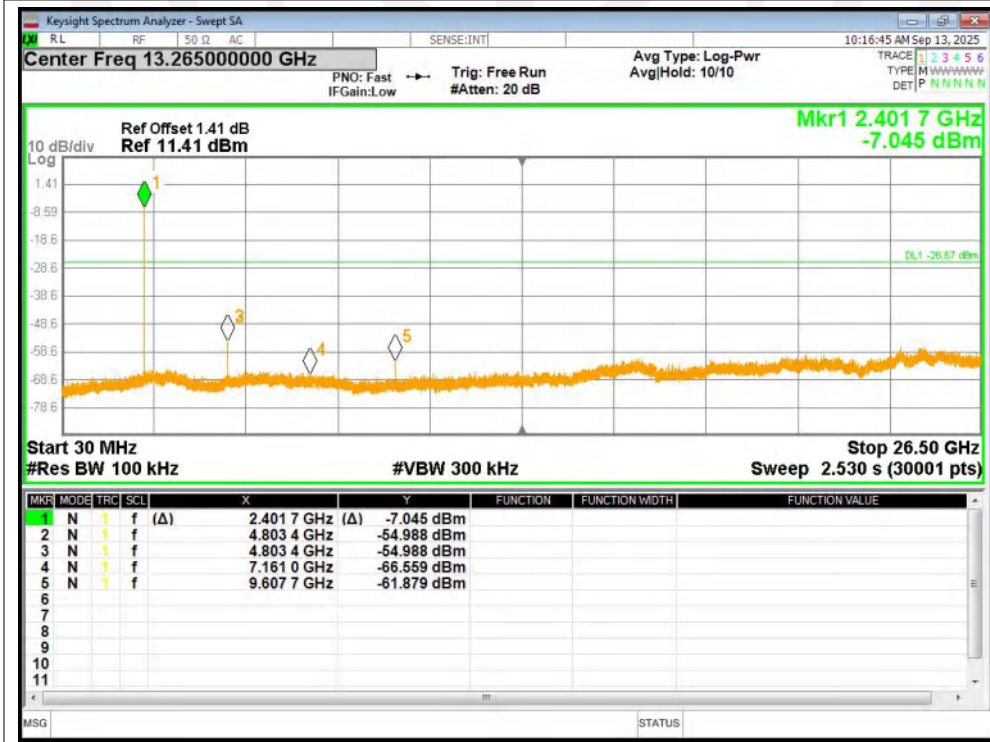


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

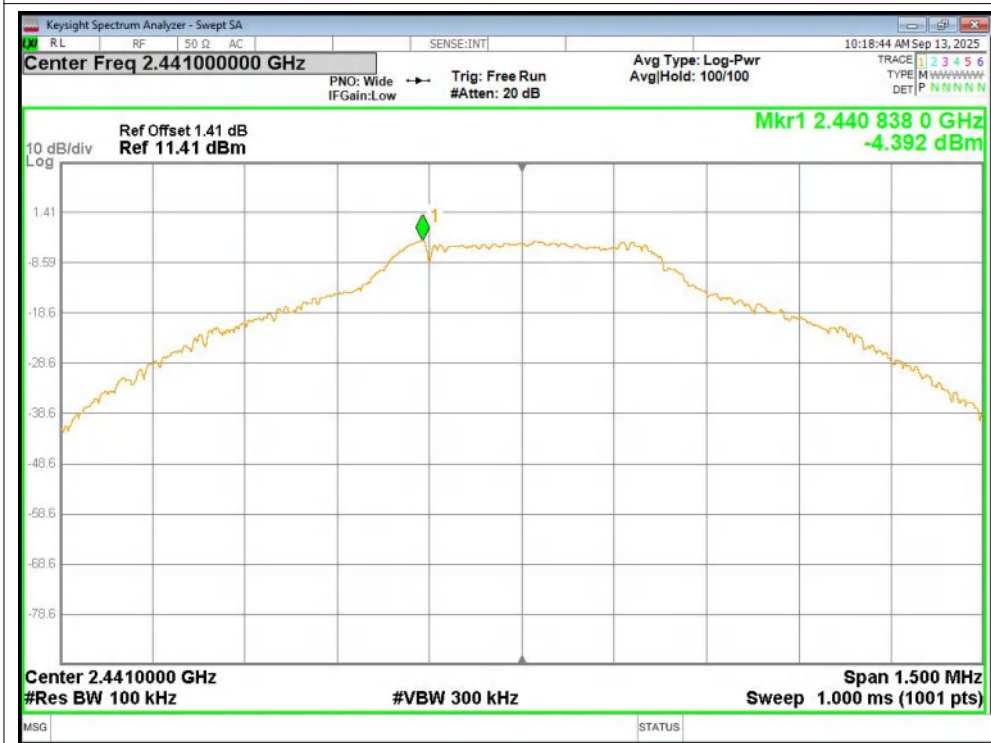


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

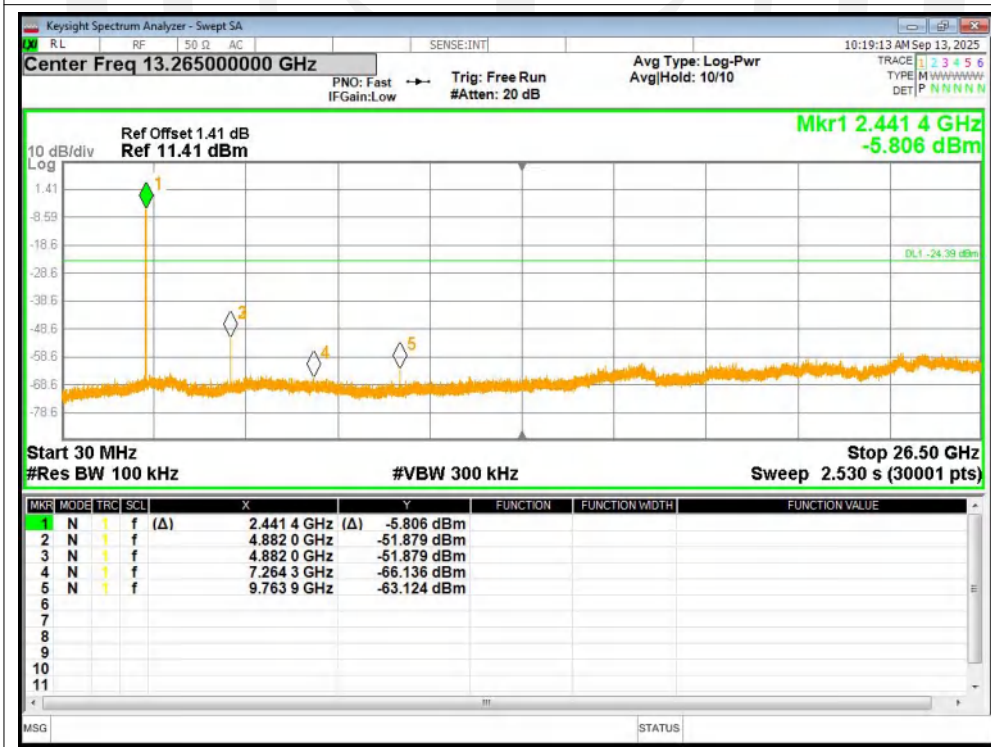


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

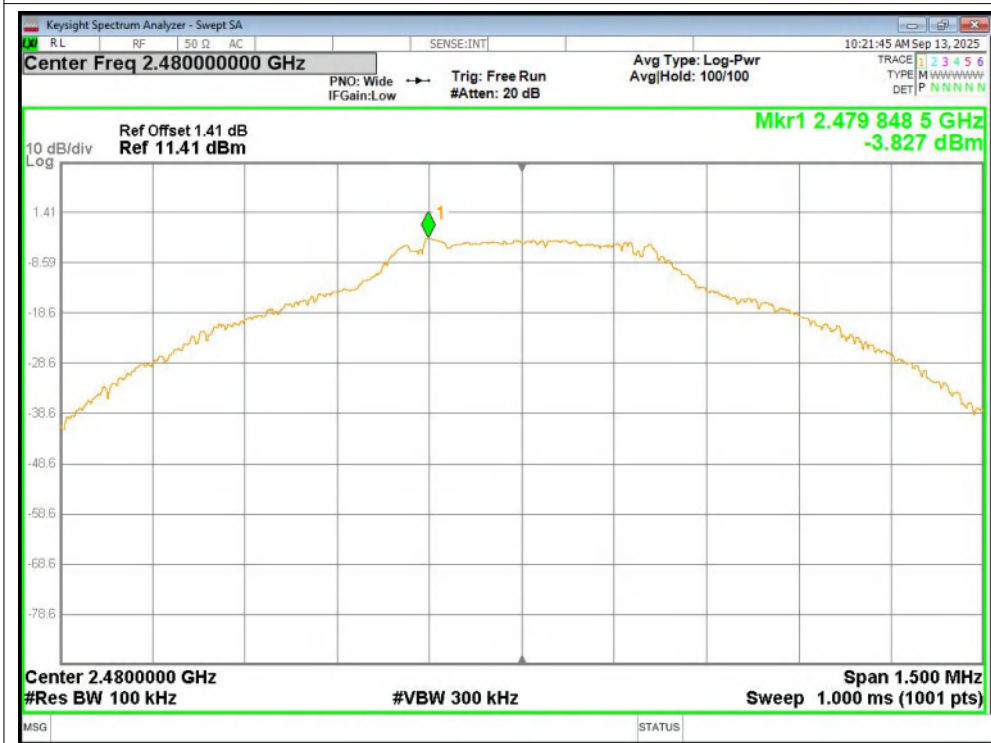


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

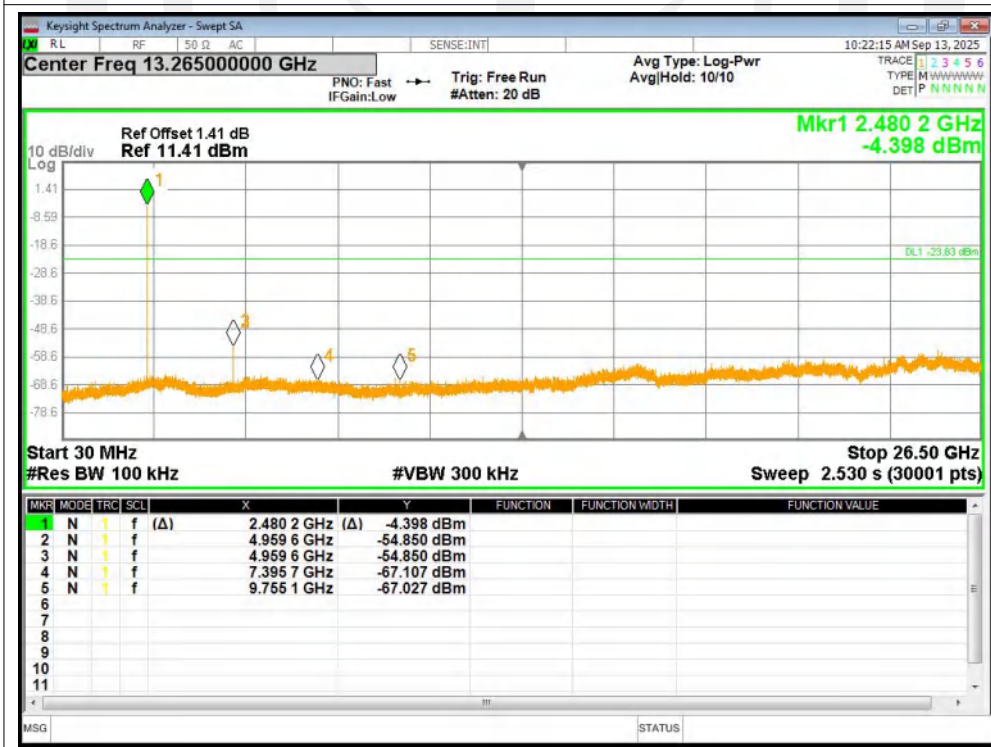


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

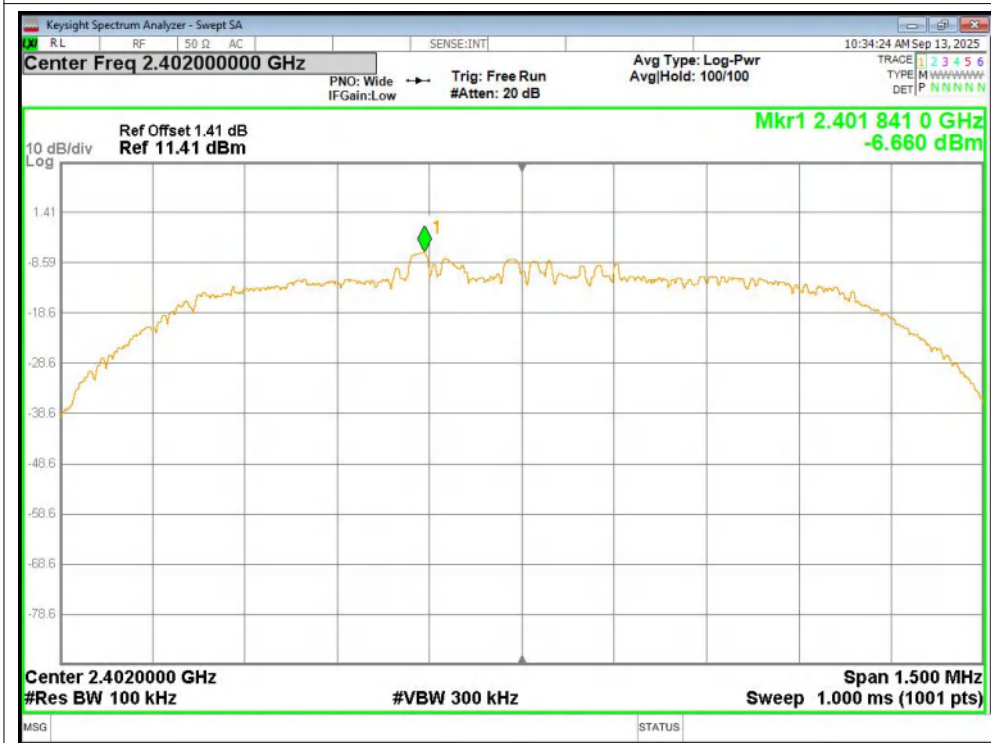


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

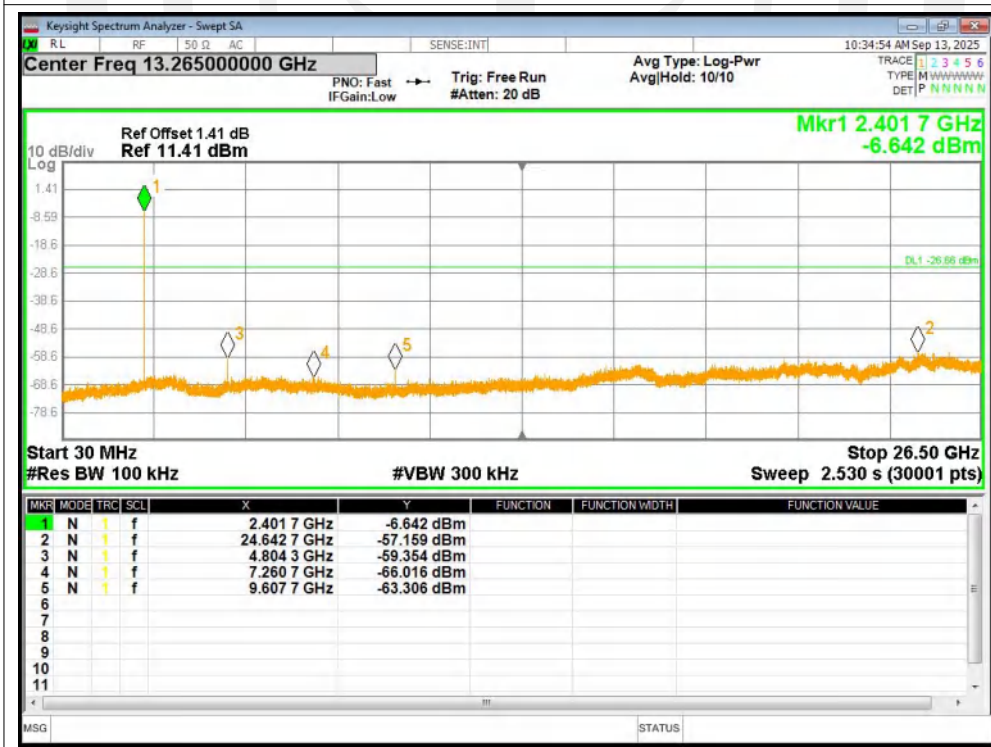


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

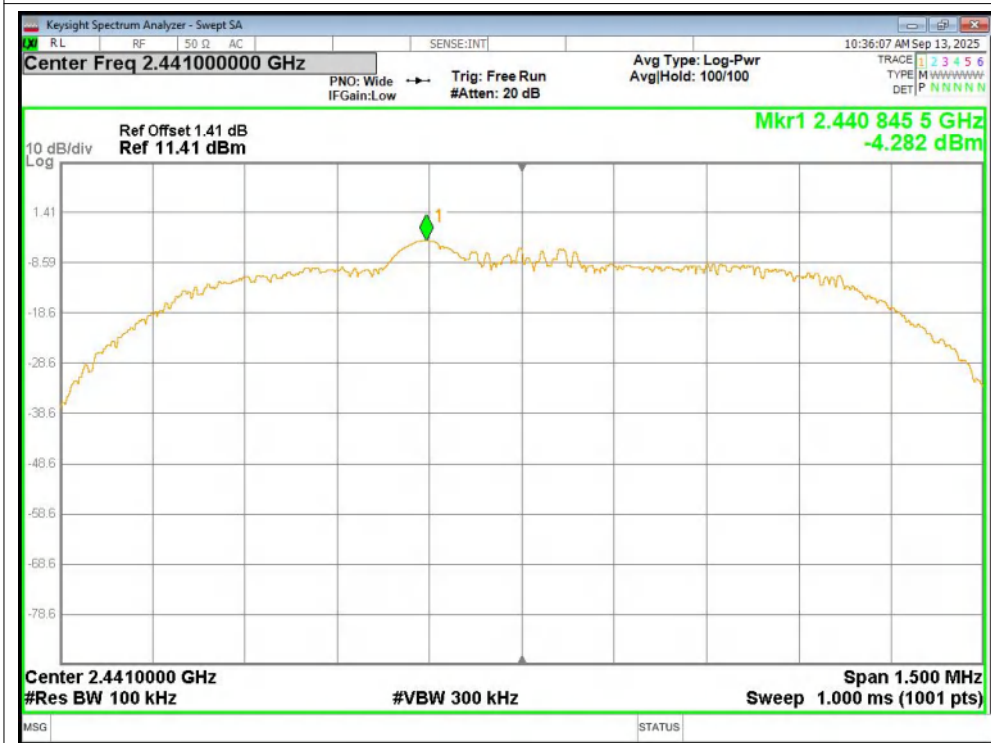


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

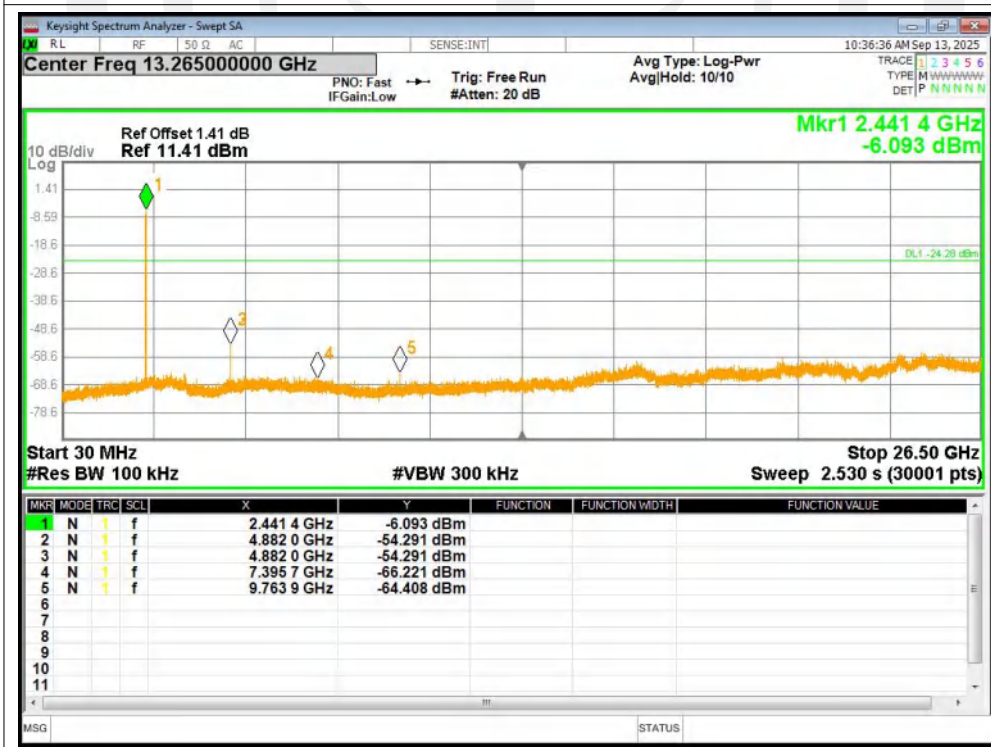


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

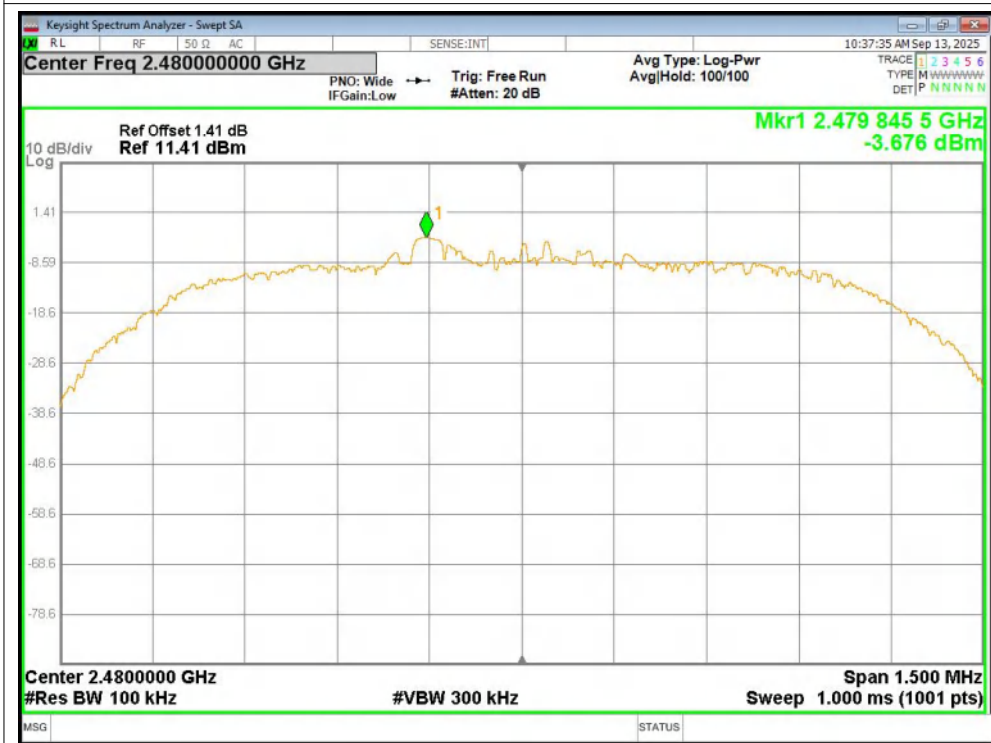


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

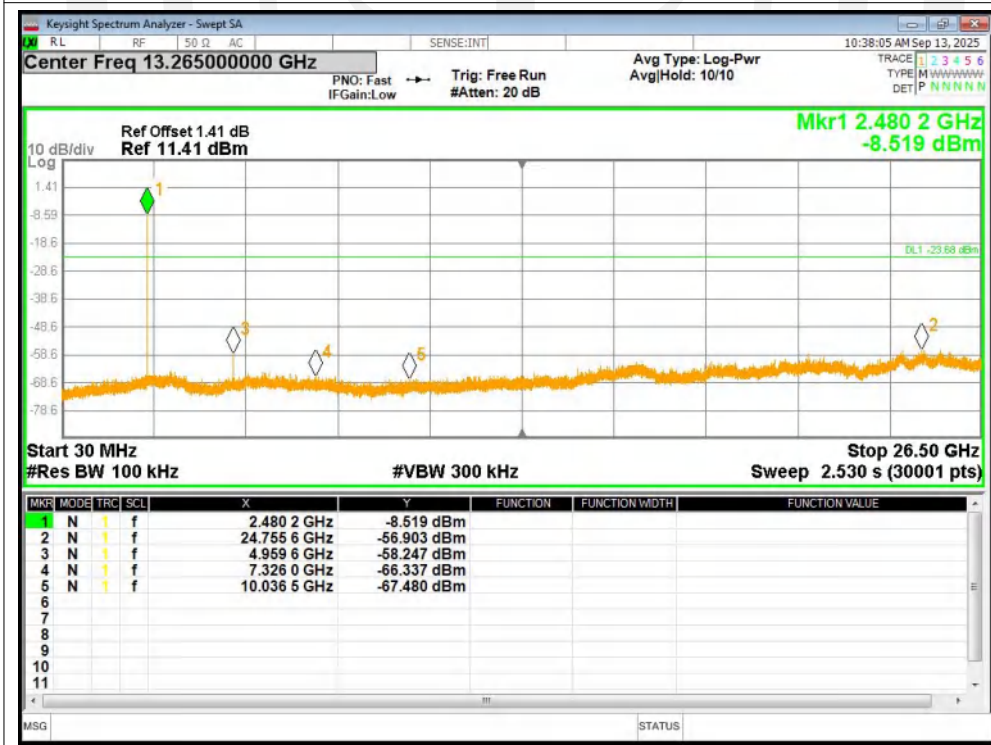


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

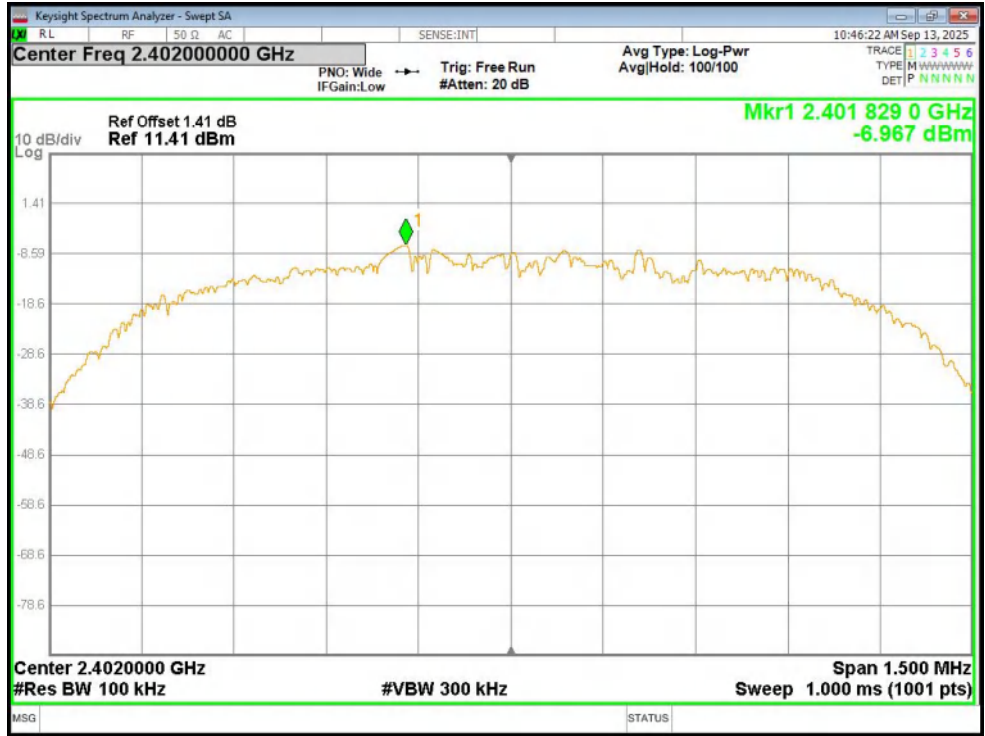


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

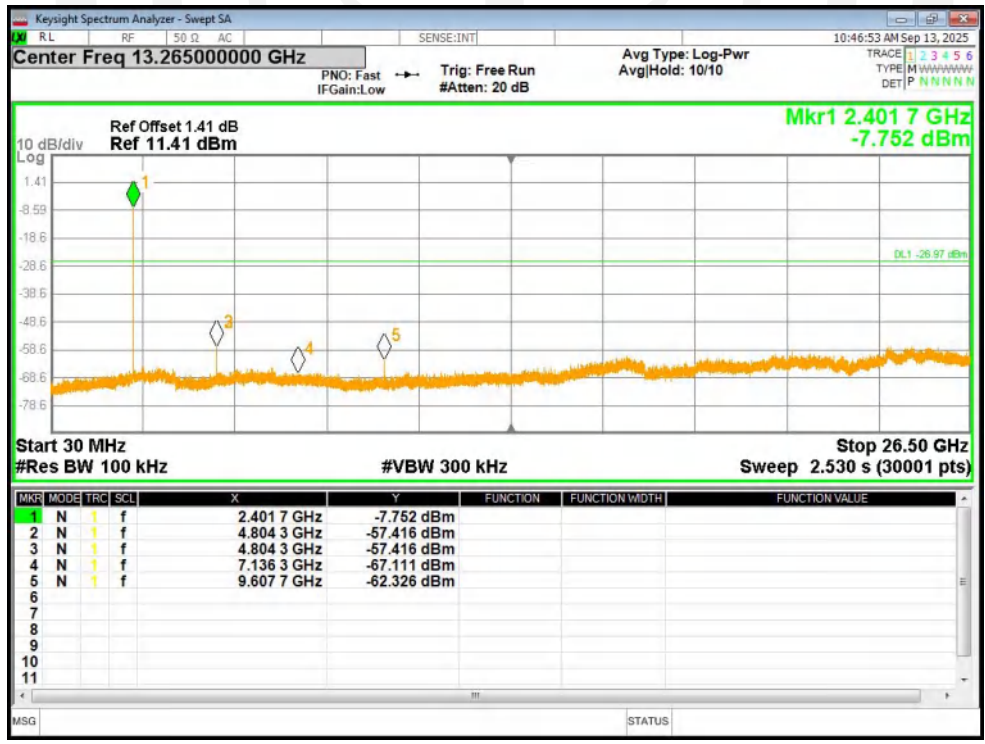


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

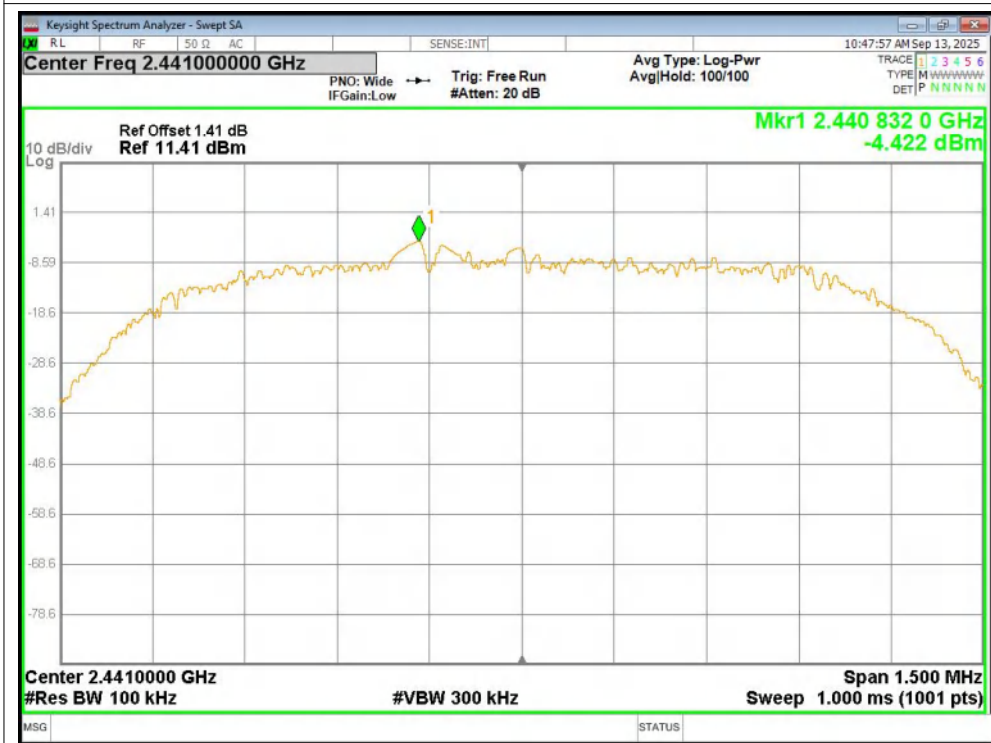


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

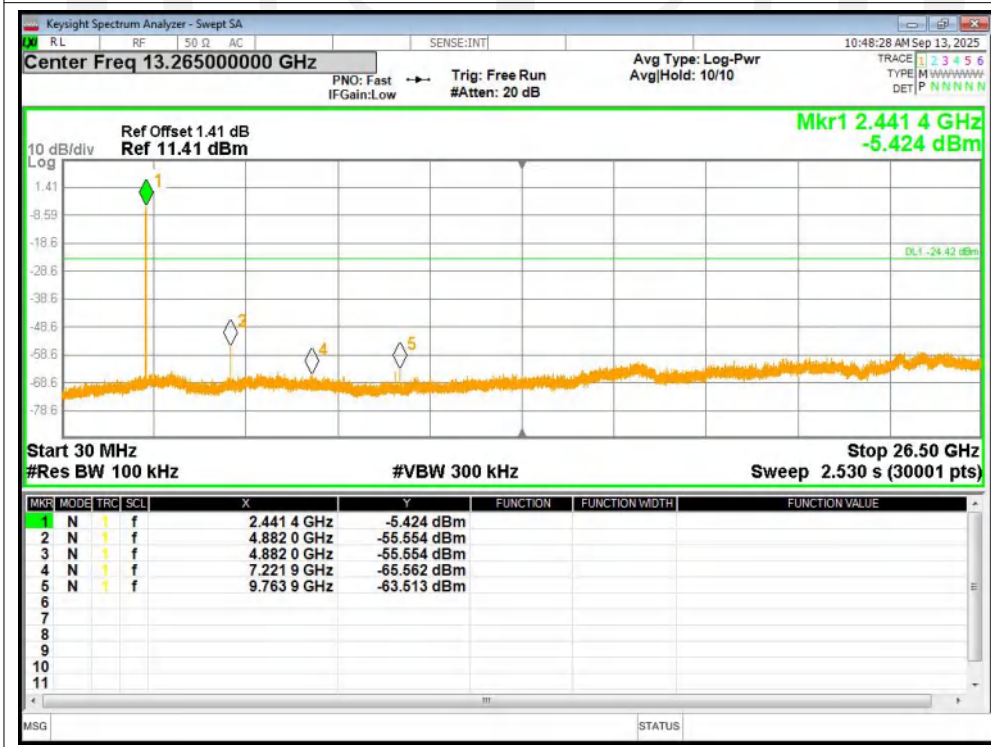

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

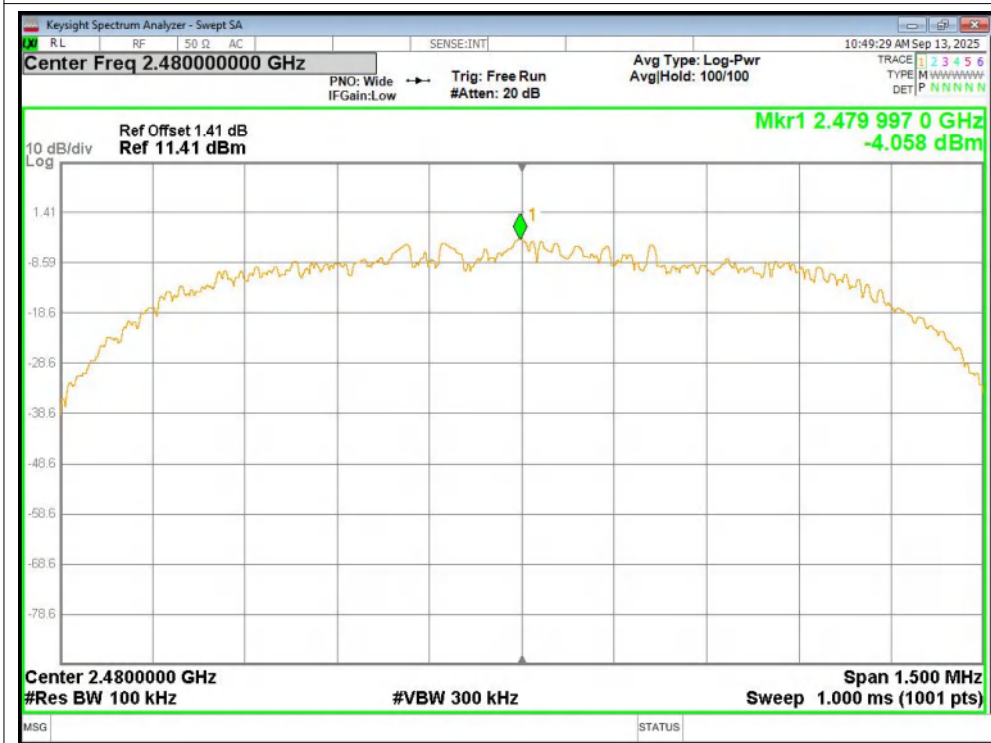

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

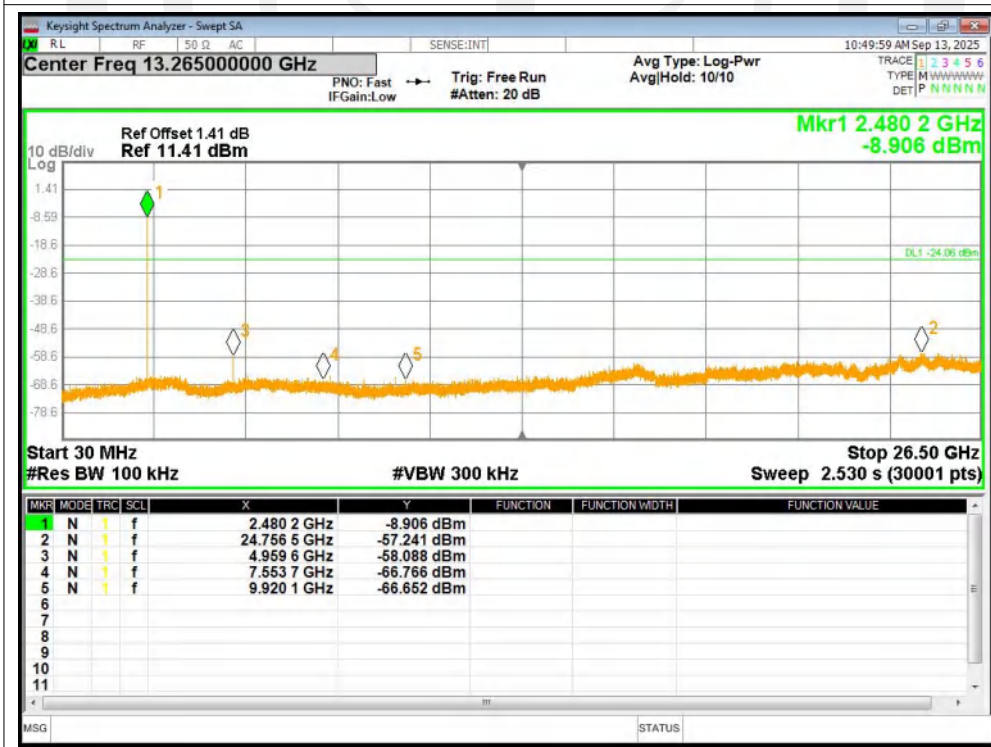

9. Radiated Emissions

9.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5

8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSS.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/F(\text{KHz})$	/
0.490-1.705	30	$24000/F(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

9.2. Block Diagram of Test setup


9.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

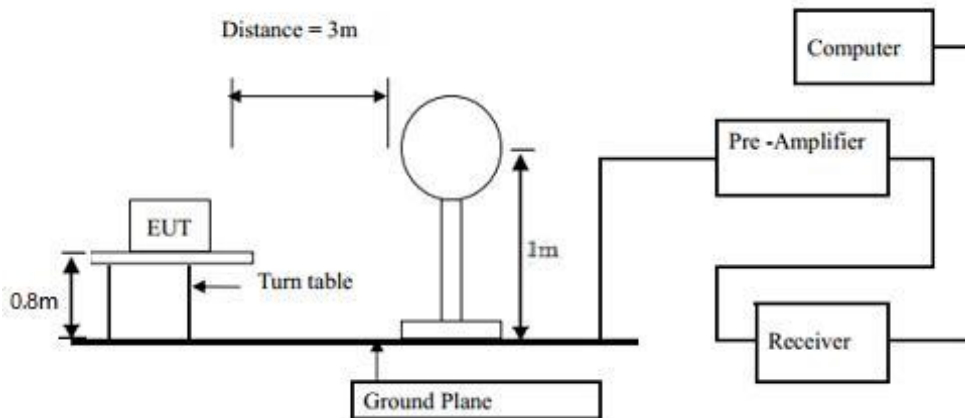

9.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

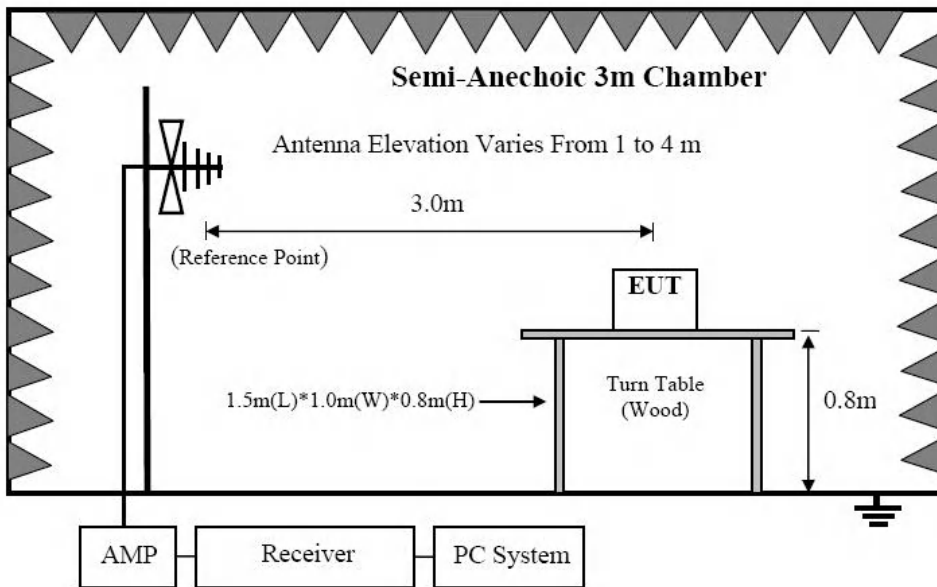

9.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

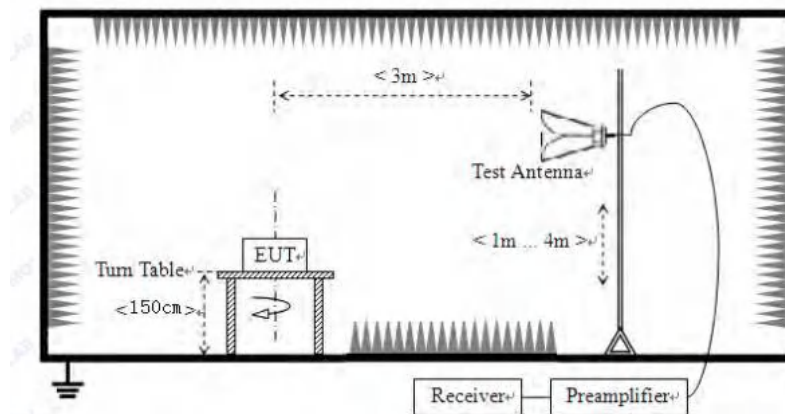

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

9.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.


9.4. Test Results

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz:	
Test Date : 2025.9.15	Temperature : 24.5°C
Test Engineer : Felix Pang	Humidity : 53.9%
Test Mode : 8DPSK mode	
Test Results : PASS	
Note:	<ol style="list-style-type: none">1. The test results are listed in next pages.2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.3. All modes have been tested, and only worst data of 8DPSK mode, High Channel 2480MHz (DC 3.7 V) was listed in this report.



Polarization: Vertical

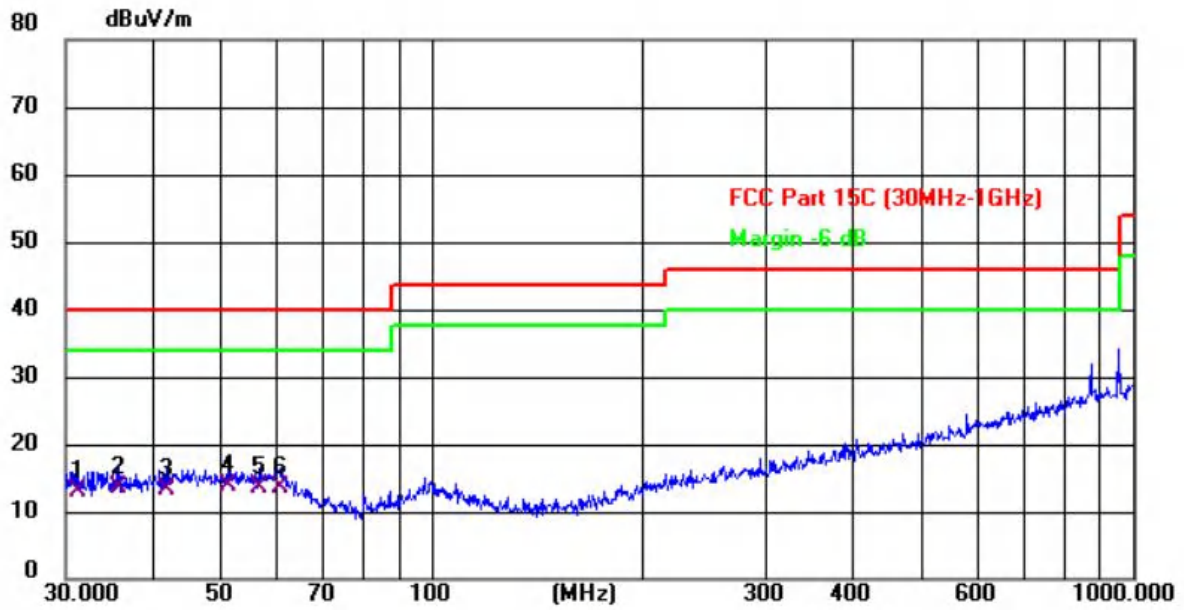


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	31.1797	24.22	-11.15	13.07	40.00	-26.93	QP	-	-	P
2	35.7490	23.93	-10.48	13.45	40.00	-26.55	QP	-	-	P
3	41.7129	23.08	-9.67	13.41	40.00	-26.59	QP	-	-	P
4 *	51.3004	22.79	-9.01	13.78	40.00	-26.22	QP	-	-	P
5	56.7916	23.27	-9.70	13.57	40.00	-26.43	QP	-	-	P
6	60.9174	23.92	-10.37	13.55	40.00	-26.45	QP	-	-	P

Note: 1.Level = Reading + Factor Margin = Level - Limit

2.'-'Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Polarization: Horizontal

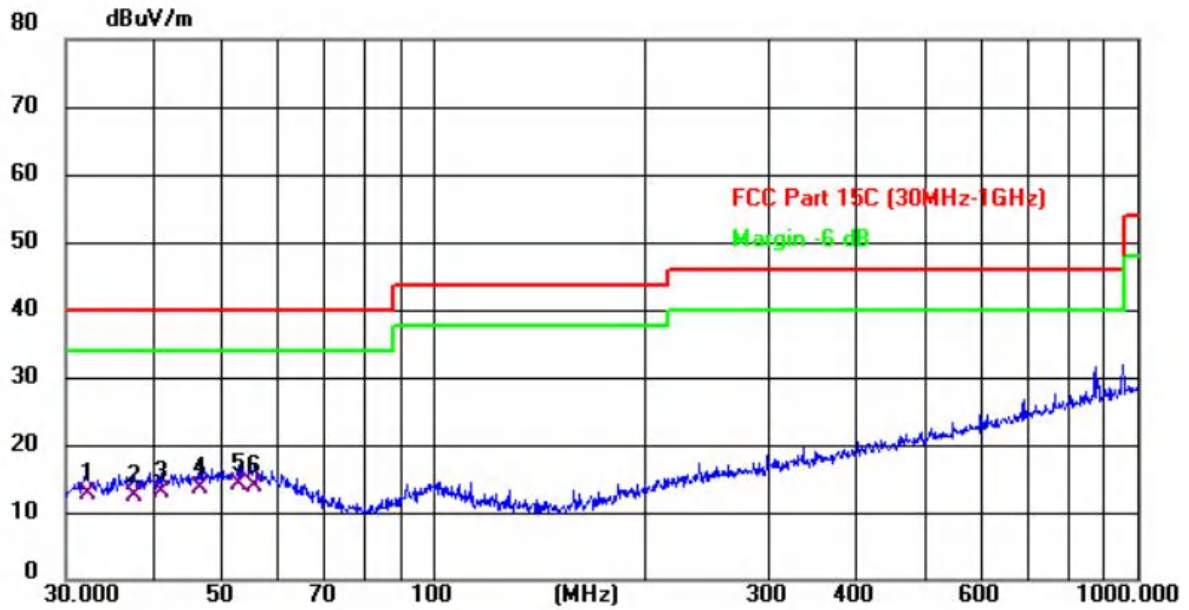

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	32.1794	23.82	-11.01	12.81	40.00	-27.19	QP	-	-	P
2	37.5478	22.73	-10.21	12.52	40.00	-27.48	QP	-	-	P
3	41.1320	22.69	-9.73	12.96	40.00	-27.04	QP	-	-	P
4	46.5030	22.87	-9.20	13.67	40.00	-26.33	QP	-	-	P
5 *	52.7600	23.21	-9.20	14.01	40.00	-25.99	QP	-	-	P
6	55.6093	23.55	-9.56	13.99	40.00	-26.01	QP	-	-	P

Note: 1.Level = Reading + Factor Margin = Level - Limit

2.'-'Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

From 1GHz to 25GHz:	
Test Date : 2025.9.15	Temperature : 24.5°C
Test Engineer : Felix Pang	Humidity : 53.9%
Test Mode : GFSK, $\pi/4$ DQPSK, 8DPSK mode	
Test Results : PASS	
Note:	<ol style="list-style-type: none"> 1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.




Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	58.73	-13.25	45.48	74	-28.52	Peak
2	4804	V	48.38	-13.25	35.13	54	-18.87	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	58	-13.25	44.75	74	-29.25	Peak
6	4804	H	48.71	-13.25	35.46	54	-18.54	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4882	V	59.99	-12.98	47.01	74	-26.99	Peak
2	4882	V	48.22	-12.98	35.24	54	-18.76	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	58.31	-12.98	45.33	74	-28.67	Peak
6	4882	H	48.39	-12.98	35.41	54	-18.59	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	57.08	-12.7	44.38	74	-29.62	Peak
2	4960	V	48.44	-12.7	35.74	54	-18.26	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	57.97	-12.7	45.27	74	-28.73	Peak
6	4960	H	48.02	-12.7	35.32	54	-18.68	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.</p> <p>Result=Reading + Correct Factor. Margin= Result-Limit.</p>							

Test Mode : $\pi/4$ DQPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	58.99	-13.25	45.74	74	-28.26	Peak
2	4804	V	48.84	-13.25	35.59	54	-18.41	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	58.4	-13.25	45.15	74	-28.85	Peak
6	4804	H	48.48	-13.25	35.23	54	-18.77	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX Mid								
1	4882	V	59.03	-12.98	46.05	74	-27.95	Peak
2	4882	V	47.76	-12.98	34.78	54	-19.22	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	59.9	-12.98	46.92	74	-27.08	Peak
6	4882	H	48.67	-12.98	35.69	54	-18.31	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX High								
1	4960	V	57.87	-12.7	45.17	74	-28.83	Peak
2	4960	V	47.39	-12.7	34.69	54	-19.31	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	57.06	-12.7	44.36	74	-29.64	Peak
6	4960	H	48.03	-12.7	35.33	54	-18.67	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.							

Test Mode : 8DPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	57.4	-13.25	44.15	74	-29.85	Peak
2	4804	V	48.87	-13.25	35.62	54	-18.38	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	58.74	-13.25	45.49	74	-28.51	Peak
6	4804	H	48.93	-13.25	35.68	54	-18.32	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : 8DPSK TX Mid								
1	4882	V	57.79	-12.98	44.81	74	-29.19	Peak
2	4882	V	47.45	-12.98	34.47	54	-19.53	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	59.7	-12.98	46.72	74	-27.28	Peak
6	4882	H	48.56	-12.98	35.58	54	-18.42	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : 8D PSK TX High								
1	4960	V	58.61	-12.7	45.91	74	-28.09	Peak
2	4960	V	47.13	-12.7	34.43	54	-19.57	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	58.07	-12.7	45.37	74	-28.63	Peak
6	4960	H	47.45	-12.7	34.75	54	-19.25	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.</p> <p>Result=Reading + Correct Factor. Margin= Result-Limit.</p>							

10. Band Edge Test

10.1. Block Diagram of Test Setup

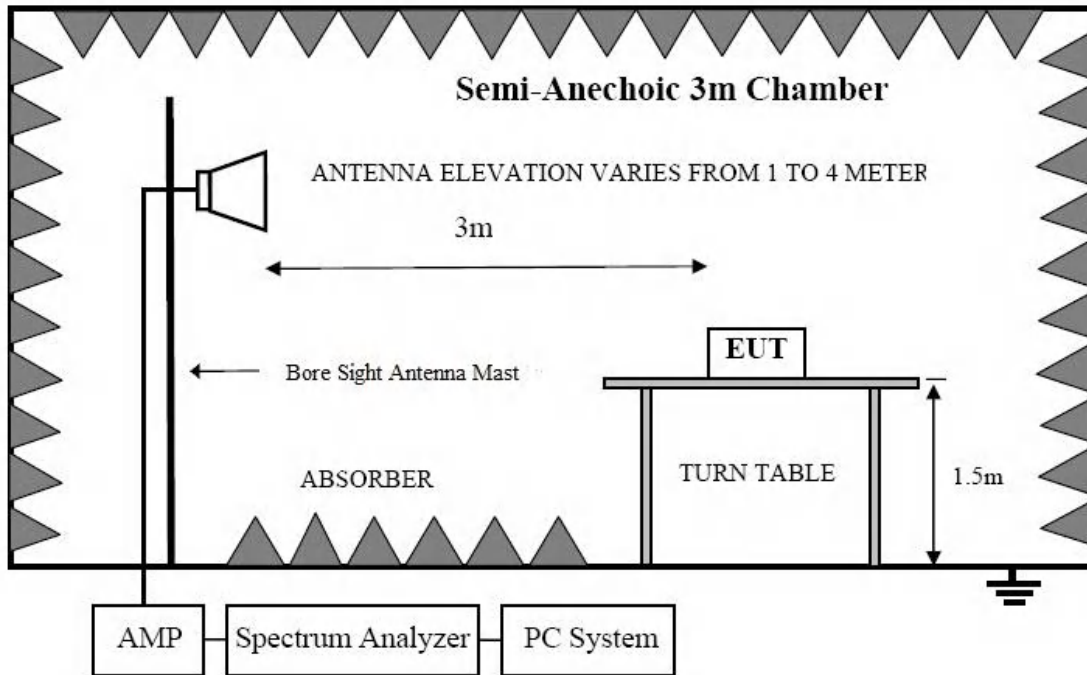

10.2. Test Limit

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Please refer section RSS-GEN&15.247.

10.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.

10.4. Test Results

Test Date	: 2025.9.16	Temperature	: 24.5°C
Test Engineer	: Felix Pang	Humidity	: 53.9%
Test Results	: PASS		


Frequency Range : 2310MHz~2410MHz								
Test Mode : GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.49	-20.45	42.04	74	-31.96	Peak
2	2390	H	--	-20.45	--	54	-11.96	Avg
3	2400	H	62.35	-20.41	41.94	74	-32.06	Peak
4	2400	H	--	-20.41	--	54	-12.06	Avg
1	2390	V	62.51	-20.45	42.06	74	-31.94	Peak
2	2390	V	--	-20.45	--	54	-11.94	Avg
3	2400	V	62.17	-20.41	41.76	74	-32.24	Peak
4	2400	V	--	-20.41	--	54	-12.24	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : GFSK TX 2480MHz								
1	2483.5	H	62.22	-20.15	42.07	74	-31.93	Peak
2	2483.5	H	--	-20.15	--	54	-11.93	Avg
1	2483.5	V	62.85	-20.15	42.7	74	-31.3	Peak
2	2483.5	V	--	-20.15	--	54	-11.3	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

Frequency Range : 2310MHz~2410MHz								
Test Mode : $\pi/4$ DQPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.63	-20.45	42.18	74	-31.82	Peak
2	2390	H	--	-20.45	--	54	-11.82	Avg
3	2400	H	62.28	-20.41	41.87	74	-32.13	Peak
4	2400	H	--	-20.41	--	54	-12.13	Avg
1	2390	V	62.24	-20.45	41.79	74	-32.21	Peak
2	2390	V	--	-20.45	--	54	-12.21	Avg
3	2400	V	62.98	-20.41	42.57	74	-31.43	Peak
4	2400	V	--	-20.41	--	54	-11.43	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : $\pi/4$ DQPSK TX 2480MHz								
1	2483.5	H	62.85	-20.15	42.7	74	-31.3	Peak
2	2483.5	H	--	-20.15	--	54	-11.3	Avg
1	2483.5	V	62.32	-20.15	42.17	74	-31.83	Peak
2	2483.5	V	--	-20.15	--	54	-11.83	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

Frequency Range : 2310MHz~2410MHz								
Test Mode : 8DPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.36	-20.45	41.91	74	-32.09	Peak
2	2390	H	--	-20.45	--	54	-12.09	Avg
3	2400	H	62.07	-20.41	41.66	74	-32.34	Peak
4	2400	H	--	-20.41	--	54	-12.34	Avg
1	2390	V	62.94	-20.45	42.49	74	-31.51	Peak
2	2390	V	--	-20.45	--	54	-11.51	Avg
3	2400	V	62.14	-20.41	41.73	74	-32.27	Peak
4	2400	V	--	-20.41	--	54	-12.27	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 8DPSK TX 2480MHz								
1	2483.5	H	62.86	-20.15	42.71	74	-31.29	Peak
2	2483.5	H	--	-20.15	--	54	-11.29	Avg
1	2483.5	V	62.96	-20.15	42.81	74	-31.19	Peak
2	2483.5	V	--	-20.15	--	54	-11.19	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

11. Power Line Conducted Emissions

11.1. Block Diagram of Test Setup

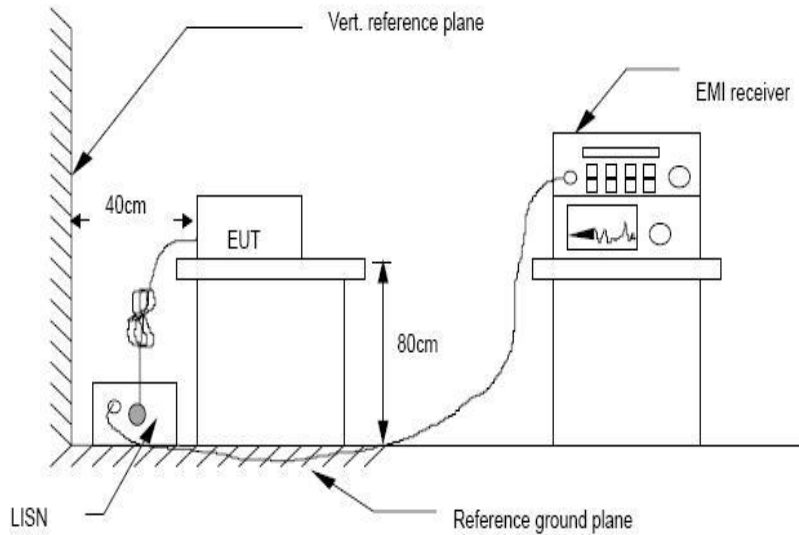

11.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

11.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

11.4. Test Results

Test Date	: 2025.9.12	Temperature	: 24.5°C
Test Engineer	: Felix Pang	Humidity	: 53.9%
Test Mode	: /		
Test Results	: N/A This product charging and Bluetooth cannot be used at the same time.		



12. Frequency stability

12.1. Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

12.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.3. Test Setup

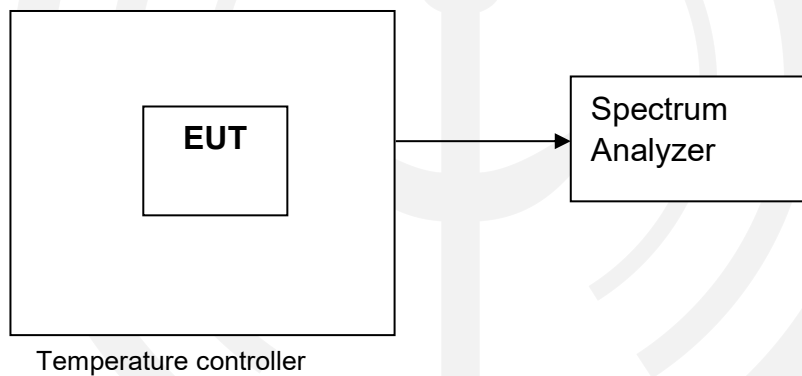

12.4. Test Results

Not Applicable.

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Result

The EUT antenna is PCB antenna. It complies with the standard requirement.



14. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

15. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

