



BUREAU
VERITAS

Test Report No.: PSU-QSU2506090109RF02



Certificate #6613.01

FCC TEST REPORT (PART 24)

Applicant:	Jiangyin Xinxinzhihuo Technology Co., Ltd.
Address:	Room 302, Building 1, No.2, Binjiang West Road, Jiangyin City, China

Manufacturer or Supplier:	Jiangyin Xinxinzhihuo Technology Co., Ltd.
Address:	Room 302, Building 1, No.2, Binjiang West Road, Jiangyin City, China
Product:	LTE Module
Brand Name:	芯芯之火
Model Name:	FX095-G1
FCC ID	2BQML2025FX095G1
Date of tests	Jun. 10, 2025 ~ Jul. 11, 2025

The tests have been carried out according to the requirements of the following standard:

- | | |
|---|---|
| <input checked="" type="checkbox"/> FCC PART 24, Subpart E | <input checked="" type="checkbox"/> ANSI/TIA/EIA-603-E |
| <input checked="" type="checkbox"/> FCC PART 2 | <input checked="" type="checkbox"/> ANSI C63.26-2015 |
| <input checked="" type="checkbox"/> ANSI/TIA/EIA-603-D | |

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
Date: Jul. 11, 2025	Date: Jul. 11, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech
District, Suzhou City, Anhui Province, China

Tel: +86 (0557) 368 1008



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 CONFIGURATION OF SYSTEM UNDER TEST	12
2.3 DESCRIPTION OF SUPPORT UNITS	13
2.4 TEST ITEM AND TEST CONFIGURATION	13
2.5 EUT OPERATING CONDITIONS	16
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
3 TEST TYPES AND RESULTS	17
3.1 OUTPUT POWER MEASUREMENT	17
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	17
3.1.2 TEST PROCEDURES	17
3.1.3 TEST SETUP	18
3.1.4 TEST RESULTS	18
3.2 FREQUENCY STABILITY MEASUREMENT	27
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	27
3.2.2 TEST PROCEDURE	27
3.2.3 TEST SETUP	27
3.2.4 TEST RESULTS	27
3.3 OCCUPIED BANDWIDTH MEASUREMENT	28
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	28
3.3.2 TEST SETUP	28
3.3.3 TEST PROCEDURES	28
3.3.4 TEST RESULTS	28
3.4 BAND EDGE MEASUREMENT	29
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	29
3.4.2 TEST SETUP	29
3.4.3 TEST PROCEDURES	30
3.4.4 TEST RESULTS	30
3.5 CONDUCTED SPURIOUS EMISSIONS	31
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	31
3.5.2 TEST PROCEDURE	31
3.5.3 TEST SETUP	31
3.5.4 TEST RESULTS	31
3.6 RADIATED EMISSION MEASUREMENT	32
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	32
3.6.2 TEST PROCEDURES	32
3.6.3 DEVIATION FROM TEST STANDARD	32
3.6.4 TEST SETUP	33
3.6.5 TEST RESULTS	35



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

3.7	PEAK TO AVERAGE RATIO	53
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	53
3.7.2	TEST SETUP	53
3.7.3	TEST PROCEDURES	53
3.7.4	TEST RESULTS	53
4	INFORMATION ON THE TESTING LABORATORIES	54
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	55
6	APPENDIX.....	56
	LTE BAND25 (INCLUDING LTE BAND 2)	56
	PEAK-TO-AVERAGE RATIO(CCDF).....	56
	TEST RESULT	56
	TEST GRAPHS	58
	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	76
	TEST RESULT	76
	TEST GRAPHS	76
	BAND EDGE	86
	TEST RESULT	86
	TEST GRAPHS	87
	CONDUCTED SPURIOUS EMISSION	99
	TEST RESULT	99
	TEST GRAPHS	100
	FREQUENCY STABILITY	114
	TEST RESULT	114



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSU2506090109RF02	Original release	Jul. 11, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Conducted Output Power	Compliance	A
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance	A
§2.1055 §24.235	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§24.232(d)	Peak to average ratio*	Compliance	A
§24.238(a)(b)	Band Edge Measurements	Compliance	A
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance	A
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

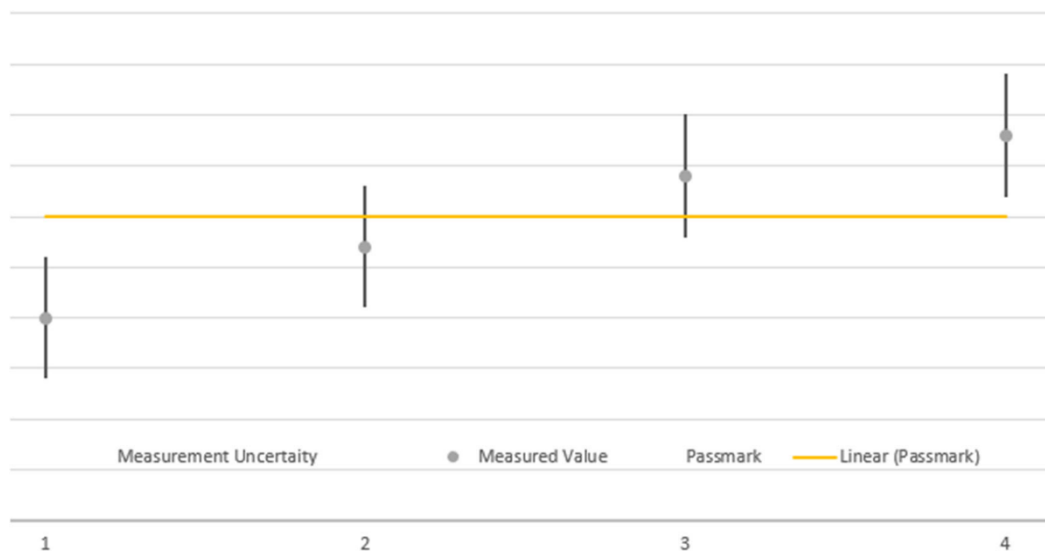

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Vector Signal Generator	R&S	SMBV100B	102176	Mar.29,24	Mar.28,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Mar.28,24	Mar.27,26
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Jul.05,23	Jul.04,25
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Jul.04,25	Jul.03,27
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Mar.22,25	Mar.21,27
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Mar.18,25	Mar.17,27
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W12.14	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.26,25	Apr.25,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.26,25	Apr.25,26
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26



NOTE:

1. The calibration interval of the above test instruments is 12/24/36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	LTE Module		
BRAND NAME*	芯芯之火		
MODEL NAME*	FX095-G1		
NOMINAL VOLTAGE*	3.8Vdc		
MODULATION TYPE*	LTE Band 2/25: QPSK, 16QAM		
FREQUENCY RANGE	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz	
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz	
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz	
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz	
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz	
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz	
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz	
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz	
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz	
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz	
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz	
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz	
	MAX. EIRP POWER	LTE Band 2 Channel Bandwidth: 1.4MHz	208.93mW
		LTE Band 2 Channel Bandwidth: 3MHz	207.01mW
LTE Band 2 Channel Bandwidth: 5MHz		206.54mW	
LTE Band 2 Channel Bandwidth: 10MHz		207.97mW	
LTE Band 2 Channel Bandwidth: 15MHz		208.45mW	
LTE Band 2 Channel Bandwidth: 20MHz		219.79mW	



	LTE Band 25 Channel Bandwidth: 1.4MHz	198.61mW
	LTE Band 25 Channel Bandwidth: 3MHz	196.79mW
	LTE Band 25 Channel Bandwidth: 5MHz	195.88mW
	LTE Band 25 Channel Bandwidth: 10MHz	199.53mW
	LTE Band 25 Channel Bandwidth: 15MHz	194.98mW
	LTE Band 25 Channel Bandwidth: 20MHz	222.33mW
EMISSION DESIGNATOR	LTE Band 25 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 25 Channel Bandwidth: 3MHz	QPSK: 2M69G7D
		16QAM: 2M69W7D
	LTE Band 25 Channel Bandwidth: 5MHz	QPSK: 4M50G7D
		16QAM: 4M50W7D
	LTE Band 25 Channel Bandwidth: 10MHz	QPSK: 8M97G7D
		16QAM: 4M94W7D
	LTE Band 25 Channel Bandwidth: 15MHz	QPSK: 13M5G7D
		16QAM: 4M99W7D
	LTE Band 25 Channel Bandwidth: 20MHz	QPSK: 17M9G7D
		16QAM: 5M01W7D
ANTENNA GAIN*	LTE B2	-0.2dBi
	LTE B25	-0.2dBi
ANTENNA TYPE*	Fixed External Antenna	
HW VERSION*	FX095-G1_GLOBAL_V1.0	
SW VERSION*	V4100LCB10004R00C0008	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
EXTREME TEMPERATURE*	-35 ~75°C	
EXTREME VOLTAGE*	3.4~4.5V	

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receivers.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech
District, Suzhou City, Anhui Province, China

Tel: +86 (0557) 368 1008







MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

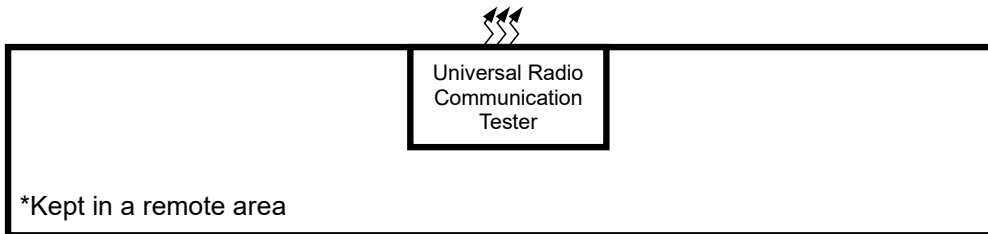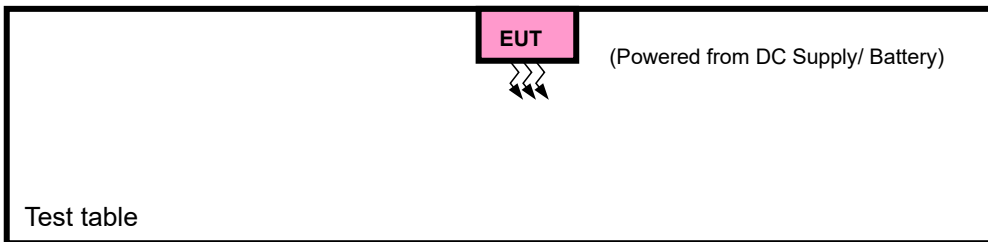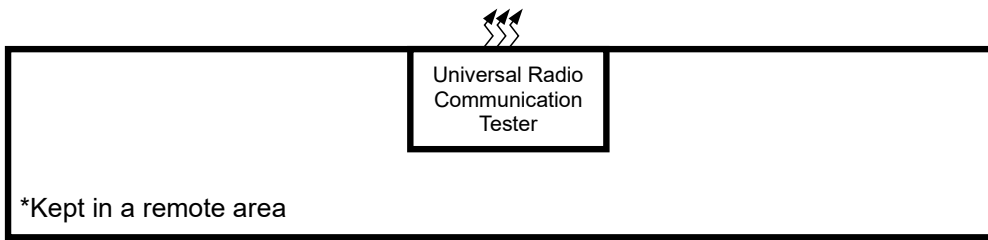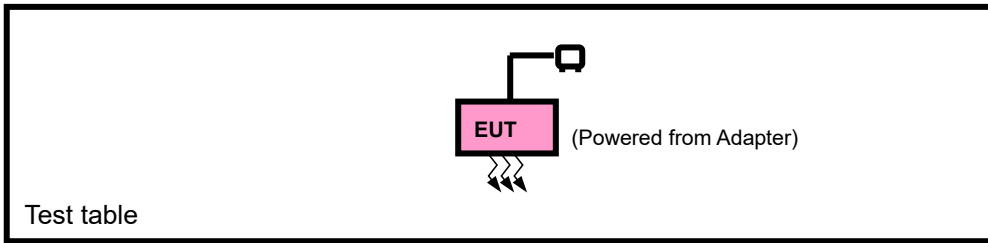



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link
B	EUT + DC Supply with LTE link

LTE BAND 2 MODE						
EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 2 are covered by LTE Band 25, Because it is a subset of LTE Band 25 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 25



LTE BAND 25 MODE						
EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK,16QAM	1 RB / 0 RB offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB offset
B	FREQUENCY STABILITY	26140 to 26590	26140, 26365, 26590	20MHz	QPSK	100 RB / 0 RB offset
A	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	15 RB / 0 RB offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	25 RB / 0 RB offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK,16QAM	50 RB / 0 RB offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	75 RB / 0 RB offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	100 RB / 0 RB offset
A	PEAK TO AVERAGE RATIO	26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB offset 100 RB / 0 RB offset
A	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK,16QAM	1 RB / 0 RB offset 6 RB / 0 RB offset
			26683	1.4MHz	QPSK,16QAM	1 RB / 5 RB offset 6 RB / 0 RB offset
		26055 to 26675	26055	3MHz	QPSK,16QAM	1 RB / 0 RB offset 15 RB / 0 RB offset
			26675	3MHz	QPSK,16QAM	1 RB / 14 RB offset 15 RB / 0 RB offset
		26065 to 26665	26065	5MHz	QPSK,16QAM	1 RB / 0 RB offset 25 RB / 0 RB offset
			26665	5MHz	QPSK,16QAM	1 RB / 24 RB offset 25 RB / 0 RB offset
		26090 to 26640	26090	10MHz	QPSK,16QAM	1 RB / 0 RB offset 50 RB / 0 RB offset
			26640	10MHz	QPSK,16QAM	1 RB / 49 RB offset 50 RB / 0 RB offset
		26115 to 26615	26115	15MHz	QPSK,16QAM	1 RB / 0 RB offset 75 RB / 0 RB offset
			26615	15MHz	QPSK,16QAM	1 RB / 74 RB offset 75 RB / 0 RB offset
		26140 to 26590	26140	20MHz	QPSK,16QAM	1 RB / 0 RB offset 100 RB / 0 RB offset
			26590	20MHz	QPSK,16QAM	1 RB / 99 RB offset



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

						100 RB / 0 RB offset
A	CONDCUDED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK	1 RB / 0 RB offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK	1 RB / 0 RB offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK	1 RB / 0 RB offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK	1 RB / 0 RB offset
A	RADIATED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB offset
		26065 to 26665	26365	5MHz	QPSK	1 RB / 0 RB offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION			
TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 3.8Vdc By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.4V/ 3.8V/ 4.5V By Source	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 3.8Vdc By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 3.8Vdc By Adapter	Hanwen Xu
CONDCUDED EMISSION	23deg. C, 70%RH	DC 3.8Vdc By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	AC 120V/60Hz	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 3.8Vdc By Adapter	Hanwen Xu



2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

**EIRP / ERP Measurement:
CONDUCTED POWER MEASUREMENT:**



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm) :

LTE BAND 2						
Band/BW	Modulation	RB Size	RB offset	Low CH	Mid CH	High CH
				18607	18900	19193
				Frequency	Frequency	Frequency
				1850.7 MHz	1880 MHz	1909.3 MHz
2/ 1.4	QPSK	1	0	22.98	23.40	23.22
		1	2	22.76	22.65	22.78
		1	5	22.43	22.48	22.74
		3	0	22.98	22.98	22.92
		3	1	22.99	22.96	22.84
		3	3	22.90	22.97	22.73
		6	0	22.66	22.90	22.69
	16QAM	1	0	22.47	22.67	22.93
		1	2	22.46	22.17	22.33
		1	5	22.67	22.15	22.27
		3	0	22.89	22.82	22.84
		3	1	22.61	22.92	22.85
		3	3	22.44	23.00	22.92
		6	0	22.19	23.01	22.56
Band/BW	Modulation	RB Size	RB offset	Low CH	Mid CH	High CH
				18615	18900	19185
				Frequency	Frequency	Frequency
				1851.5 MHz	1880 MHz	1908.5 MHz
2/ 3	QPSK	1	0	22.97	23.36	23.19
		1	7	22.73	22.66	22.78
		1	14	22.45	22.55	22.76
		8	0	22.94	22.73	22.59
		8	3	22.74	22.91	22.52
		8	7	22.70	22.81	22.56
		15	0	22.68	22.92	22.64
	16QAM	1	0	22.52	22.66	23.05
		1	7	22.35	22.19	22.33
		1	14	21.85	22.26	22.22
		8	0	22.58	23.24	22.54
		8	3	22.37	23.11	22.59
		8	7	22.35	23.32	22.69



		15	0	22.05	23.08	22.56
LTE BAND 2						
Band/BW	Modulation	RB Size	RB offset	Low CH18625	Mid CH18900	High CH19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2/ 5	QPSK	1	0	22.88	23.35	23.20
		1	12	22.82	22.63	22.70
		1	24	22.50	22.52	22.70
		12	0	22.91	22.76	22.66
		12	6	22.79	22.86	22.60
		12	13	22.73	22.87	22.58
		25	0	22.69	22.90	22.60
	16QAM	1	0	22.55	22.70	22.97
		1	12	22.43	22.10	22.35
		1	24	21.87	22.16	22.34
		12	0	22.68	23.24	22.61
		12	6	22.35	23.08	22.55
		12	13	22.27	23.35	22.63
		25	0	22.13	23.02	22.67
Band/BW	Modulation	RB Size	RB offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	22.97	23.38	23.25
		1	24	22.86	22.62	22.71
		1	49	22.46	22.51	22.72
		25	0	22.96	22.76	22.65
		25	12	22.81	22.83	22.61
		25	25	22.74	22.81	22.56
		50	0	22.64	22.90	22.71
	16QAM	1	0	22.48	22.77	22.92
		1	24	22.37	22.17	22.24
		1	49	21.86	22.24	22.29
		25	0	22.58	23.10	22.56
		25	12	22.43	23.13	22.59
		25	25	22.23	23.28	22.66
		50	0	22.08	22.95	22.63
LTE BAND 2						
Band/BW	Modulation	RB Size	RB offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	22.99	23.39	23.28
		1	37	22.78	22.74	22.77
		1	74	22.54	22.46	22.73
		36	0	22.82	22.87	22.58
		36	19	22.73	22.87	22.48
		36	39	22.63	22.88	22.62
		75	0	22.69	22.94	22.63



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

Band/BW	Modulation	RB Size	RB offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	16QAM	1	0	22.42	22.67	23.05
		1	37	22.39	22.22	22.24
		1	74	21.94	22.16	22.27
		36	0	22.58	23.23	22.61
		36	19	22.35	23.11	22.61
		36	39	22.30	23.30	22.67
		75	0	22.06	23.03	22.62
2/ 20	QPSK	1	0	23.04	23.62	23.46
		1	50	23.00	22.77	22.90
		1	99	22.56	22.71	22.84
		50	0	23.00	22.98	22.76
		50	25	23.01	23.02	22.77
		50	50	22.78	22.97	22.74
		100	0	22.85	23.15	22.75
	16QAM	1	0	22.61	22.90	23.08
		1	50	22.57	22.35	22.50
		1	99	22.12	22.30	22.38
		50	0	22.80	23.40	22.80
		50	25	22.53	23.31	22.78
		50	50	22.47	23.45	22.79
		100	0	22.26	23.20	22.77

LTE BAND 25

Band/BW	Modulation	RB Size	RB offset	Low CH 26047	Mid CH 26365	High CH 26683
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz
25/ 1.4	QPSK	1	0	22.80	23.18	22.97
		1	2	23.01	22.69	22.76
		1	5	22.20	22.54	22.16
		3	0	22.64	23.06	22.48
		3	1	22.75	23.08	22.56
		3	3	22.74	23.16	22.50
		6	0	22.34	22.86	22.25
	16QAM	1	0	22.43	22.75	22.79
		1	2	22.59	22.38	22.31
		1	5	21.82	22.14	21.93
		3	0	22.62	23.11	22.43
		3	1	22.68	23.11	22.48
		3	3	22.62	23.12	22.46
		6	0	22.40	22.80	22.20
Band/BW	Modulation	RB Size	RB offset	Low CH 26055	Mid CH 26365	High CH 26675
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz
25/ 3	QPSK	1	0	22.84	23.14	22.98
		1	7	22.99	22.77	22.68
		1	14	22.23	22.52	22.24



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

		8	0	22.29	22.98	22.14
		8	3	22.39	22.91	22.30
		8	7	22.33	22.83	22.20
		15	0	22.35	22.82	22.16
	16QAM	1	0	22.36	22.81	22.68
		1	7	22.59	22.37	22.39
		1	14	21.86	22.03	21.98
		8	0	22.35	22.84	22.14
		8	3	22.31	22.86	22.13
		8	7	22.22	22.69	22.09
		15	0	22.34	22.84	22.23

LTE BAND 25

Band/BW	Modulation	RB Size	RB offset	Low CH 26065	Mid CH 26365	High CH 26665
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz
25/ 5	QPSK	1	0	22.88	23.12	23.04
		1	12	22.97	22.73	22.72
		1	24	22.24	22.48	22.12
		12	0	22.38	22.93	22.20
		12	6	22.41	22.97	22.26
		12	13	22.37	22.91	22.11
	16QAM	25	0	22.30	22.78	22.29
		1	0	22.47	22.78	22.78
		1	12	22.54	22.32	22.31
		1	24	21.87	22.10	21.93
		12	0	22.25	22.87	22.10
		12	6	22.24	22.76	22.07
		12	13	22.23	22.76	22.07
		25	0	22.33	22.91	22.15

Band/BW	Modulation	RB Size	RB offset	Low CH 26090	Mid CH 26365	High CH 26640
				Frequency 1855 MHz	Frequency 1882.5 MHz	Frequency 1910 MHz
25/ 10	QPSK	1	0	22.80	23.20	23.03
		1	24	22.97	22.67	22.74
		1	49	22.26	22.42	22.25
		25	0	22.36	22.91	22.12
		25	12	22.39	22.86	22.24
		25	25	22.34	22.88	22.11
	16QAM	50	0	22.34	22.79	22.22
		1	0	22.42	22.73	22.78
		1	24	22.57	22.43	22.39
		1	49	21.84	22.04	21.86
		25	0	22.24	22.86	22.11
		25	12	22.32	22.78	22.13
		25	25	22.34	22.67	22.11
		50	0	22.30	22.78	22.18

LTE BAND 25



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

Band/BW	Modulation	RB Size	RB offset	Low CH 26115	Mid CH 26365	High CH 26615
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz
25/ 15	QPSK	1	0	22.79	23.10	23.06
		1	37	22.95	22.66	22.65
		1	74	22.24	22.47	22.24
		36	0	22.37	22.93	22.17
		36	19	22.32	22.86	22.22
		36	39	22.42	22.85	22.24
		75	0	22.38	22.91	22.18
	16QAM	1	0	22.46	22.77	22.78
		1	37	22.54	22.30	22.31
		1	74	21.87	22.14	21.86
		36	0	22.24	22.88	22.12
		36	19	22.29	22.81	22.17
		36	39	22.20	22.76	22.17
		75	0	22.31	22.78	22.28
Band/BW	Modulation	RB Size	RB offset	Low CH 26140	Mid CH 26365	High CH 26590
				Frequency 1860 MHz	Frequency 1882.5 MHz	Frequency 1905 MHz
25/ 20	QPSK	1	0	22.90	23.67	23.12
		1	50	23.08	22.80	22.80
		1	99	22.31	22.55	22.27
		50	0	22.42	23.01	22.26
		50	25	22.44	23.00	22.33
		50	50	22.43	22.98	22.26
		100	0	22.40	22.93	22.31
	16QAM	1	0	22.48	22.88	22.82
		1	50	22.63	22.45	22.44
		1	99	21.92	22.18	22.01
		50	0	22.38	22.91	22.21
		50	25	22.37	22.90	22.18
		50	50	22.35	22.82	22.19
		100	0	22.42	22.92	22.30



EIRP POWER (dBm)

LTE BAND 2						
1.4MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.99	-0.2	22.79	190.11	2
18900	1880.0	23.40	-0.2	23.20	208.93	2
19193	1909.3	23.22	-0.2	23.02	200.45	2

1.4MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.89	-0.2	22.69	185.78	2
18900	1880.0	23.01	-0.2	22.81	190.99	2
19193	1909.3	22.93	-0.2	22.73	187.50	2

3MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.97	-0.2	22.77	189.23	2
18900	1880	23.36	-0.2	23.16	207.01	2
19185	1908.5	23.19	-0.2	22.99	199.07	2

3MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.58	-0.2	22.38	172.98	2
18900	1880	23.32	-0.2	23.12	205.12	2
19185	1908.5	23.05	-0.2	22.85	192.75	2

5MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.91	-0.2	22.71	186.64	2
18900	1880	23.35	-0.2	23.15	206.54	2
19175	1907.5	23.20	-0.2	23.00	199.53	2

5MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.68	-0.2	22.48	177.01	2
18900	1880	23.35	-0.2	23.15	206.54	2
19175	1907.5	22.97	-0.2	22.77	189.23	2



10MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	22.97	-0.2	22.77	189.23	2
18900	1880	23.38	-0.2	23.18	207.97	2
19150	1905	23.25	-0.2	23.05	201.84	2

10MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	22.58	-0.2	22.38	172.98	2
18900	1880	23.28	-0.2	23.08	203.24	2
19150	1905	22.92	-0.2	22.72	187.07	2

15MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.99	-0.2	22.79	190.11	2
18900	1880	23.39	-0.2	23.19	208.45	2
19125	1902.5	23.28	-0.2	23.08	203.24	2

15MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.58	-0.2	22.38	172.98	2
18900	1880	23.30	-0.2	23.10	204.17	2
19125	1902.5	23.05	-0.2	22.85	192.75	2

20MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.04	-0.2	22.84	192.31	2
18900	1880	23.62	-0.2	23.42	219.79	2
19100	1900	23.46	-0.2	23.26	211.84	2

20MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.80	-0.2	22.60	181.97	2
18900	1880	23.45	-0.2	23.25	211.35	2
19100	1900	23.08	-0.2	22.88	194.09	2



LTE BAND 25						
1.4MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	23.01	-0.2	22.81	190.99	2
26340	1880	23.18	-0.2	22.98	198.61	2
26683	1914.3	22.97	-0.2	22.77	189.23	2

1.4MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.68	-0.2	22.48	177.01	2
26340	1880	23.12	-0.2	22.92	195.88	2
26683	1914.3	22.79	-0.2	22.59	181.55	2

3MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.99	-0.2	22.79	190.11	2
26340	1880	23.14	-0.2	22.94	196.79	2
26675	1913.5	22.98	-0.2	22.78	189.67	2

3MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.59	-0.2	22.39	173.38	2
26340	1880	22.86	-0.2	22.66	184.50	2
26675	1913.5	22.68	-0.2	22.48	177.01	2

5MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.97	-0.2	22.77	189.23	2
26340	1880	23.12	-0.2	22.92	195.88	2
26665	1912.5	23.04	-0.2	22.84	192.31	2

5MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.54	-0.2	22.34	171.40	2
26340	1880	22.91	-0.2	22.71	186.64	2
26665	1912.5	22.78	-0.2	22.58	181.13	2



10MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.97	-0.2	22.77	189.23	2
26340	1880	23.20	-0.2	23.00	199.53	2
26640	1910	23.03	-0.2	22.83	191.87	2

10MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.57	-0.2	22.37	172.58	2
26340	1880	22.86	-0.2	22.66	184.50	2
26640	1910	22.78	-0.2	22.58	181.13	2

15MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.95	-0.2	22.75	188.36	2
26340	1880	23.10	-0.2	22.90	194.98	2
26615	1907.5	23.06	-0.2	22.86	193.20	2

15MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.54	-0.2	22.34	171.40	2
26340	1880	22.88	-0.2	22.68	185.35	2
26615	1907.5	22.78	-0.2	22.58	181.13	2

20MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	23.08	-0.2	22.88	194.09	2
26340	1880	23.67	-0.2	23.47	222.33	2
26590	1905	23.12	-0.2	22.92	195.88	2

20MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	22.63	-0.2	22.43	174.98	2
26340	1880	22.92	-0.2	22.72	187.07	2
26590	1905	22.82	-0.2	22.62	182.81	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

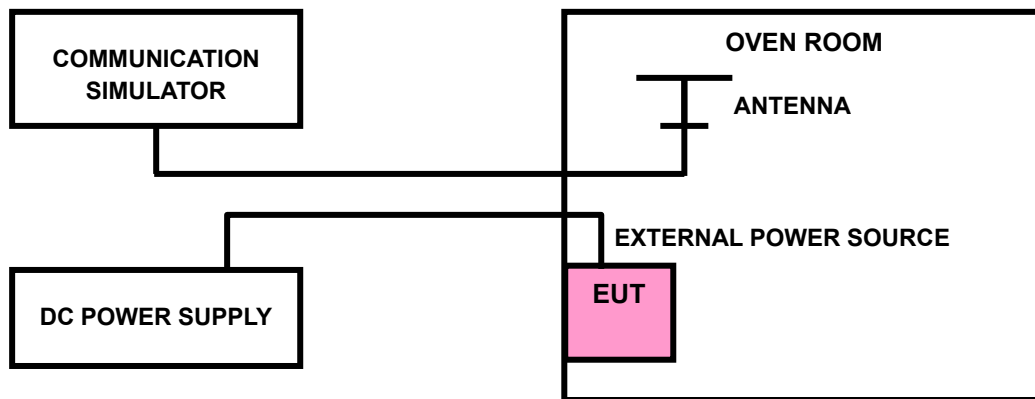

3.2.4 TEST RESULTS

Please Refer to Appendix of this test report.

Note: VL = Low voltage(3.4V); VN/NV = Normal voltage(3.8V); VH = High voltage(4.5V); NT = Normal temperature (25°C)




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

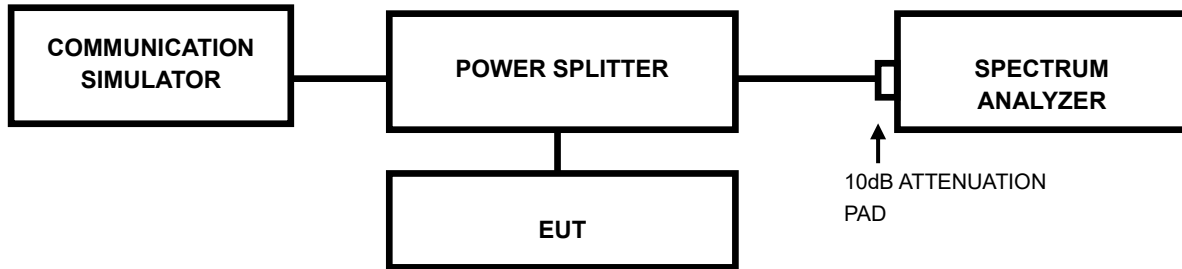

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.4 TEST RESULTS

Please Refer to Appendix of this test report.




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

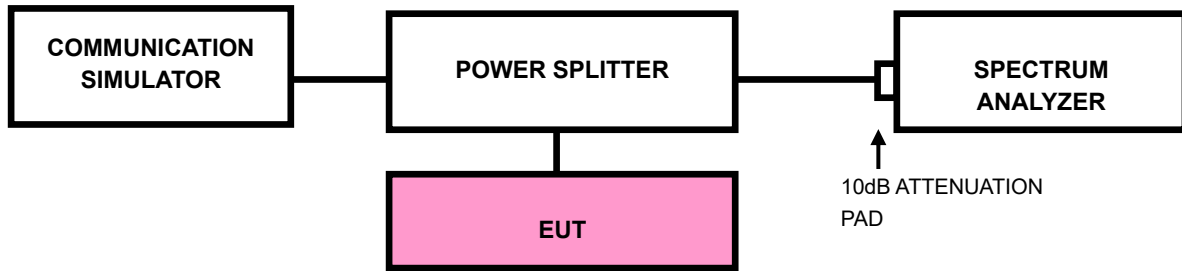



3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth

(EBW)

- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.

3.4.4 TEST RESULTS

Please Refer to Appendix of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

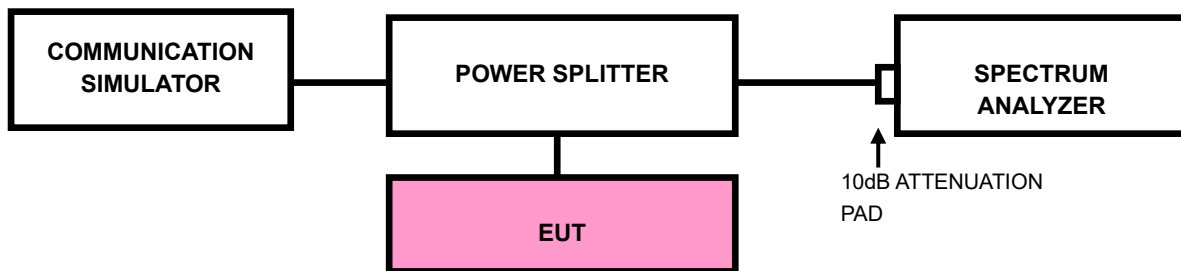

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix of this test report.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation





3.6.4 TEST SETUP

< Frequency Range below 30MHz >

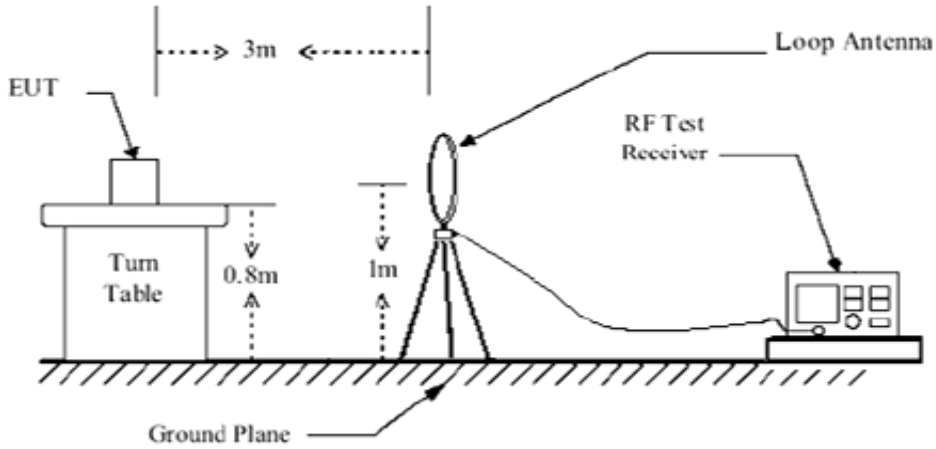

< Frequency Range 30MHz~1GHz >

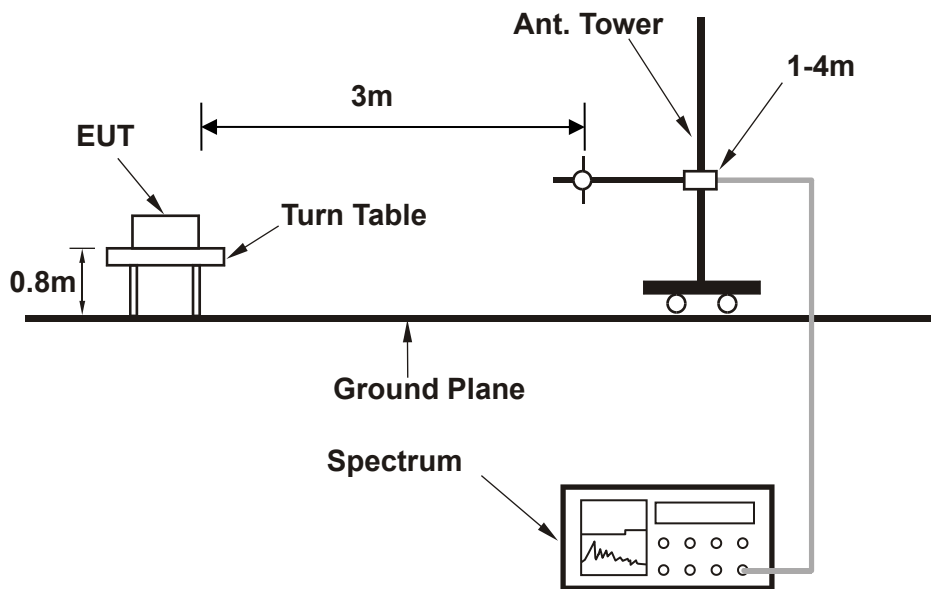

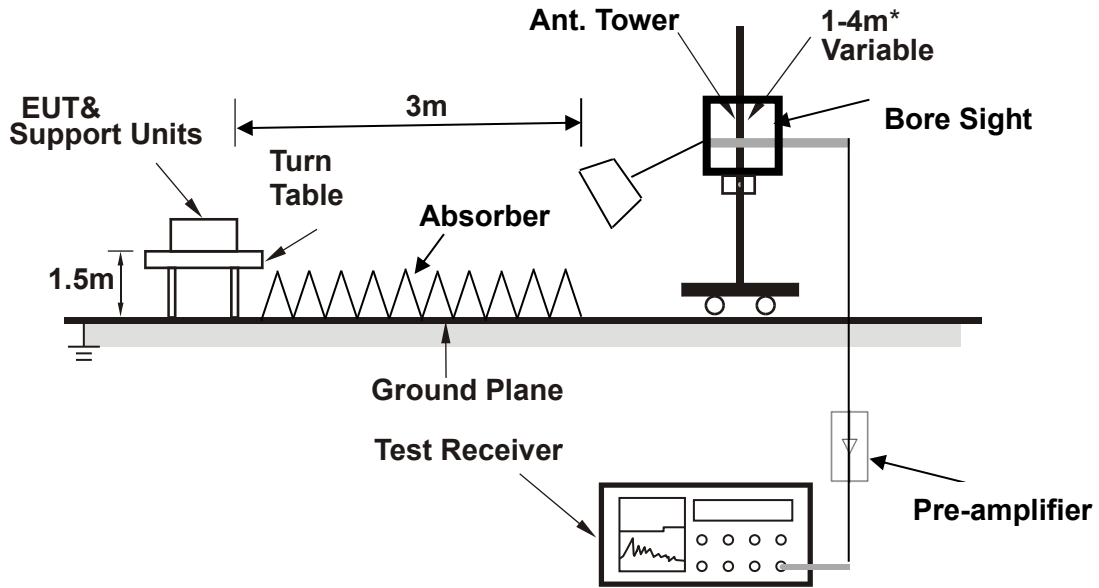

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS


NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA

LTE Band 25 CHANNEL BANDWIDTH :20MHz			
MODE	TX channel 26590	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	33.000	-68.37	-13.00	55.37	-2.09	H	155.1	2.00
1	64.900	-79.49	-13.00	66.49	-5.96	H	212.6	2.00
1	152.950	-66.29	-13.00	53.29	-14.54	H	269.9	2.00
1	225.300	-71.59	-13.00	58.59	-0.74	H	264.6	1.00
1	430.950	-76.19	-13.00	63.19	2.04	H	359	2.00
2	656.663	-75.35	-13.00	62.35	1.53	H	51.8	1.00

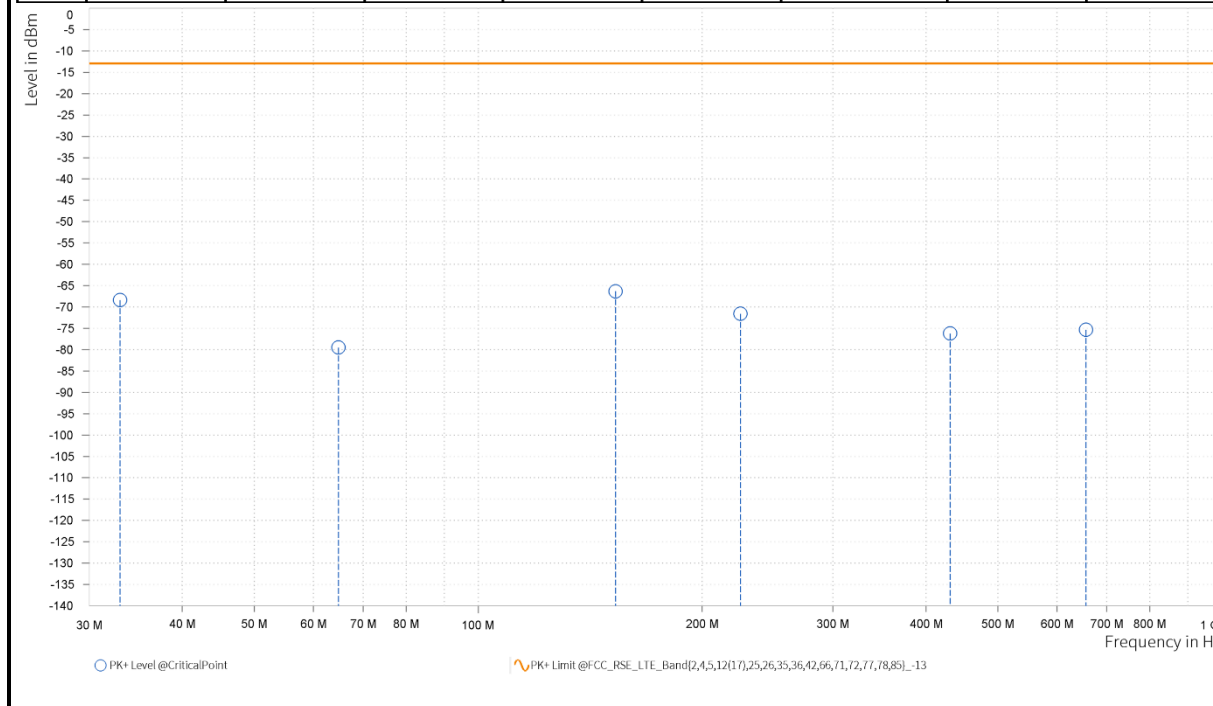




MODE	TX channel 26590	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.500	-70.70	-13.00	57.70	-8.10	V	209.5	1.00
1	58.150	-71.73	-13.00	58.73	-3.47	V	359	2.00
1	105.150	-66.25	-13.00	53.25	4.07	V	151	1.00
1	283.100	-79.07	-13.00	66.07	-1.36	V	151	1.00
1	444.350	-78.69	-13.00	65.69	0.42	V	359.1	1.00
2	642.683	-77.53	-13.00	64.53	-0.47	V	359	2.00

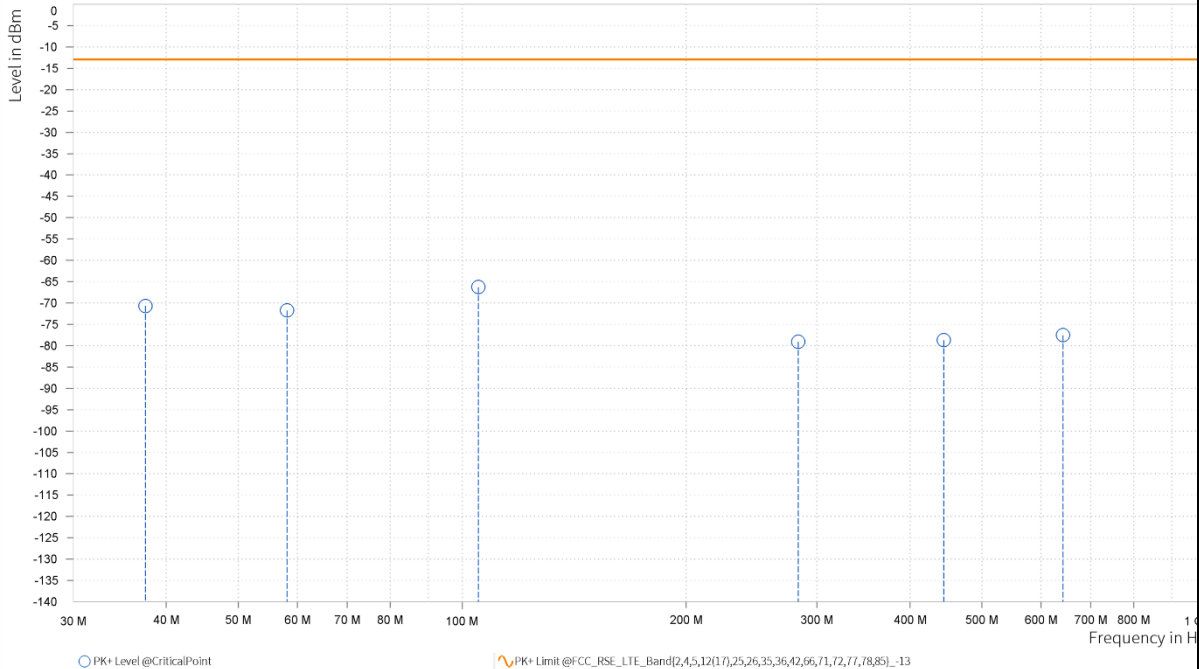




ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.

LTE Band 25			
CHANNEL BANDWIDTH	1.4MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,764.500	-47.74	-13.00	34.74	21.73	H	359.1	1.00
4	5,645.610	-48.49	-13.00	35.49	24.81	H	342.4	1.00

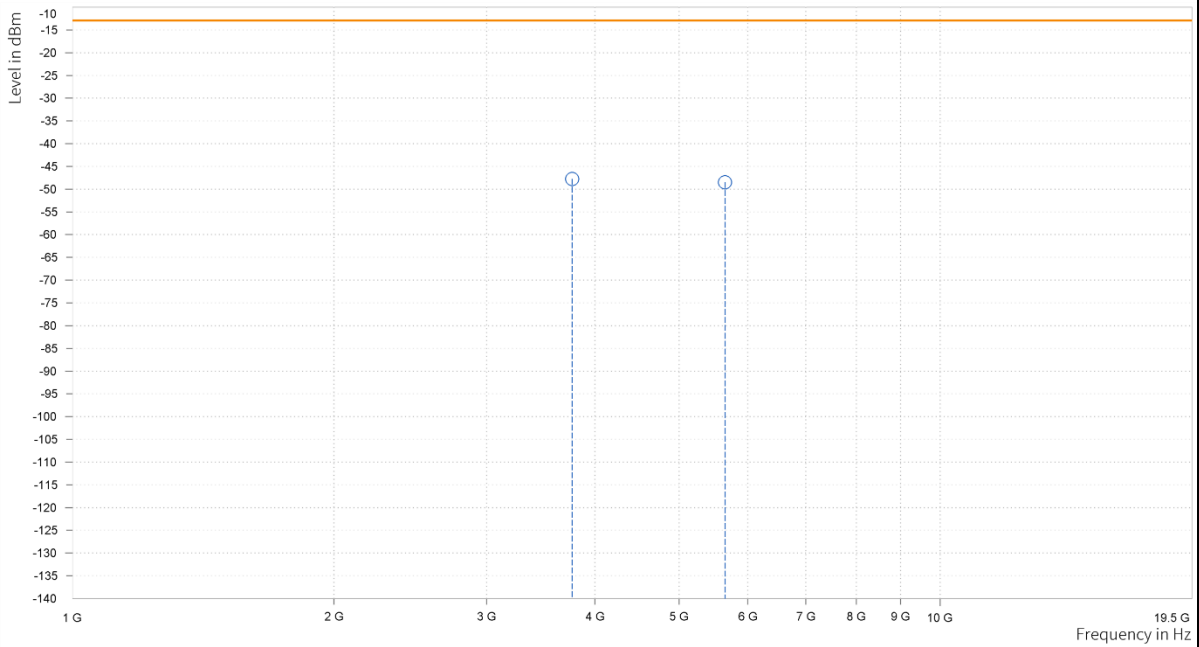




CHANNEL BANDWIDTH	1.4MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,764.000	-43.26	-13.00	30.26	22.16	V	207.9	1.00
4	5,646.500	-44.09	-13.00	31.09	25.17	V	359	2.00

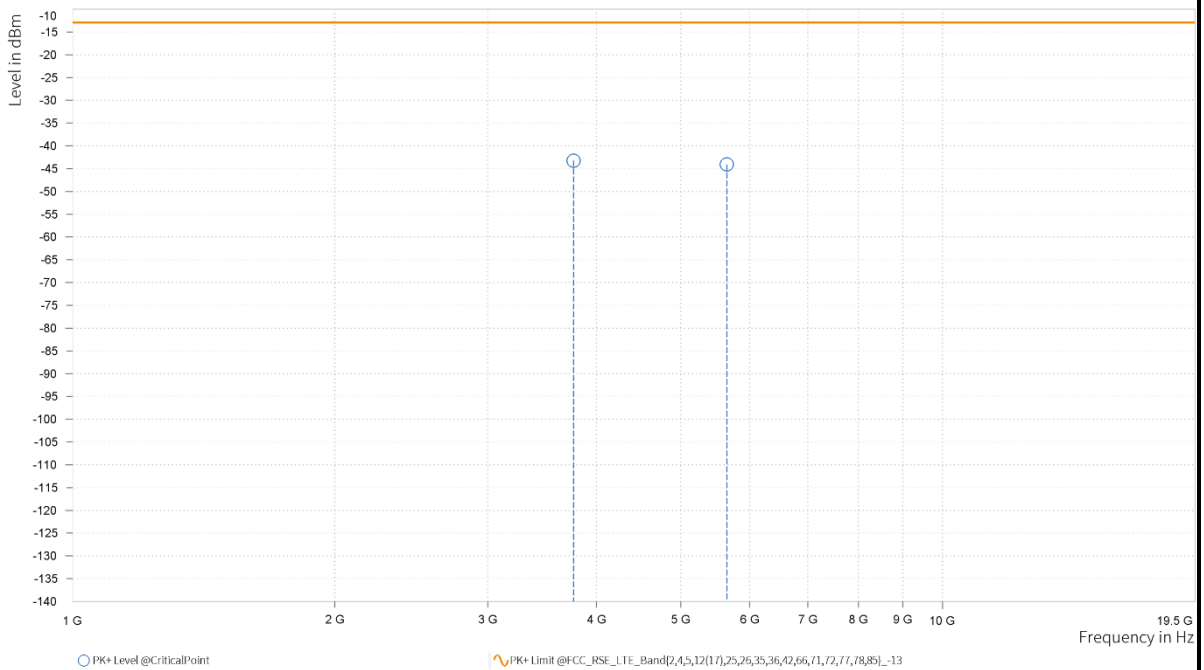




CHANNEL BANDWIDTH	3MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,762.000	-48.92	-13.00	35.92	21.68	H	351.8	1.00
4	5,643.450	-48.47	-13.00	35.47	24.80	H	259.7	2.00

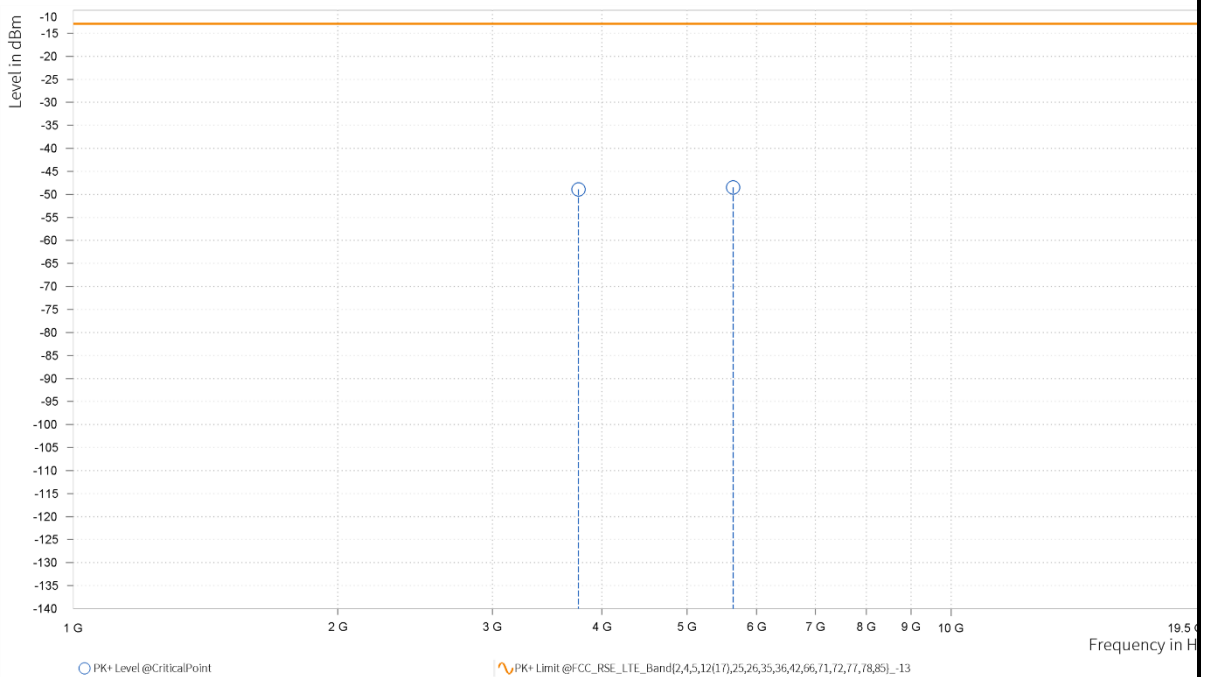




CHANNEL BANDWIDTH	3MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,762.500	-43.20	-13.00	30.20	22.15	V	218.6	2.00
4	5,643.500	-43.12	-13.00	30.12	25.15	V	218.6	2.00

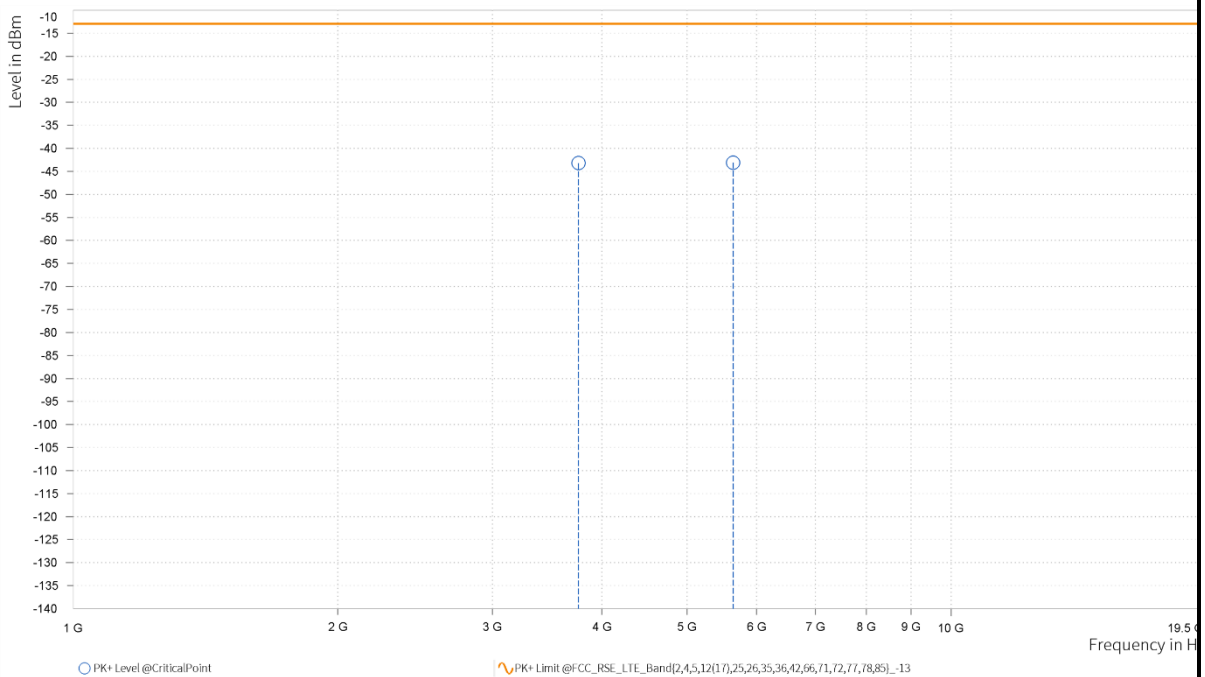




CHANNEL BANDWIDTH	5MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.500	-49.86	-13.00	36.86	21.65	H	350.1	1.00
4	5,640.750	-49.86	-13.00	36.86	24.79	H	359	2.00

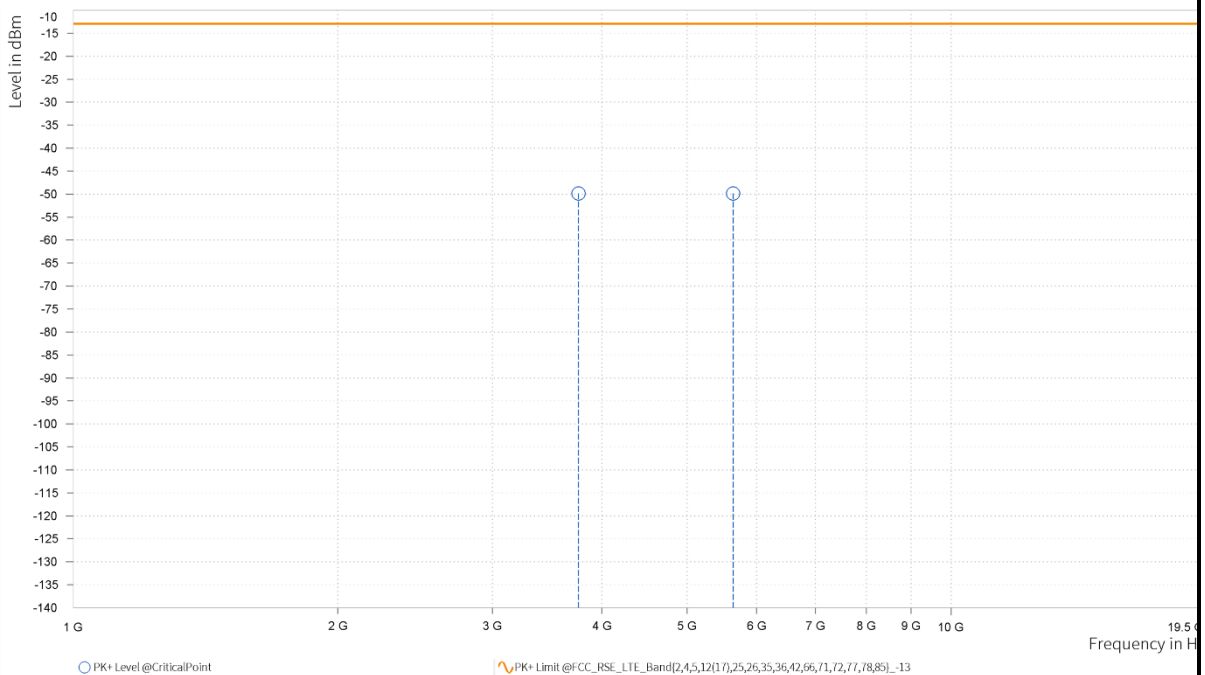




CHANNEL BANDWIDTH	5MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.500	-41.80	-13.00	28.80	22.13	V	259	2.00
4	5,640.750	-48.00	-13.00	35.00	25.14	V	259	2.00

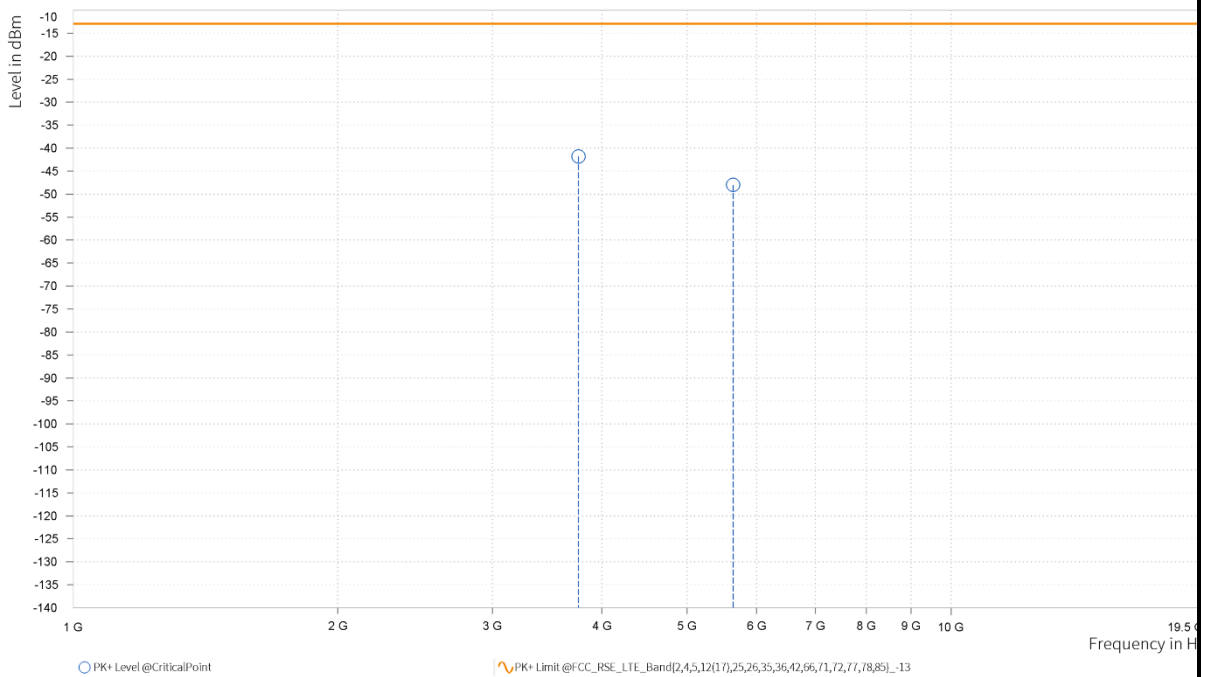




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,756.000	-47.10	-13.00	34.10	21.56	H	261.1	2.00
4	5,634.000	-49.79	-13.00	36.79	24.76	H	91.9	2.00

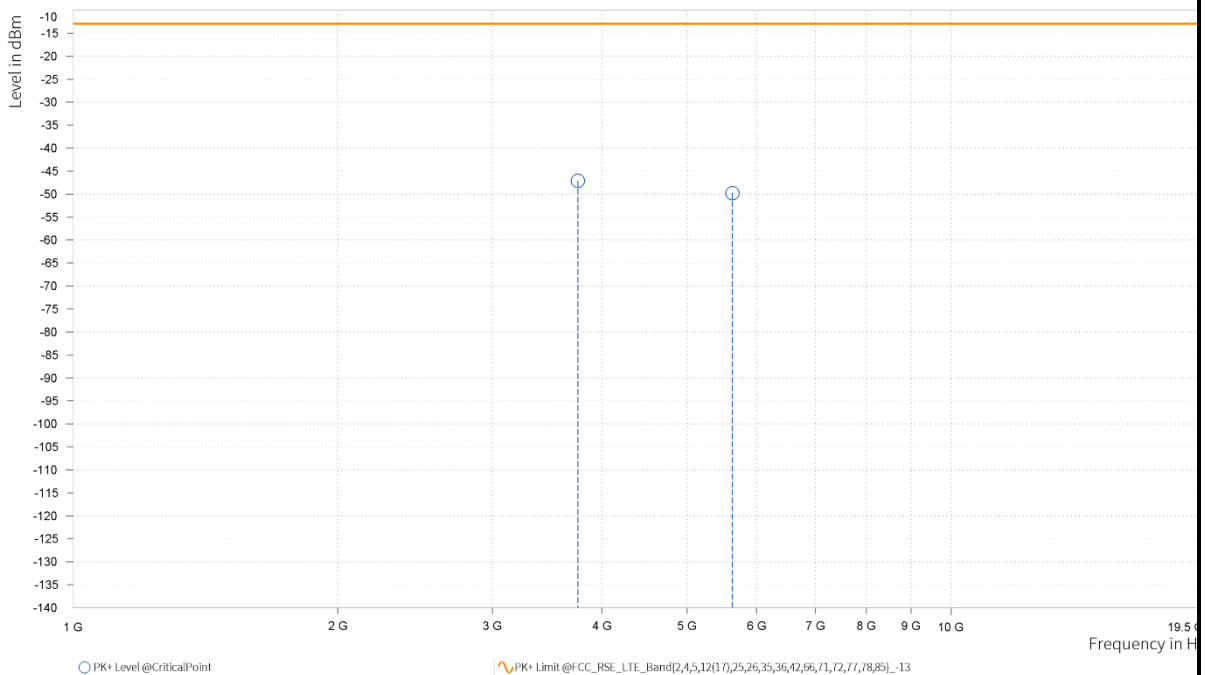




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,756.000	-40.80	-13.00	27.80	22.10	V	259.7	2.00
4	5,634.000	-47.32	-13.00	34.32	25.09	V	154.2	2.00

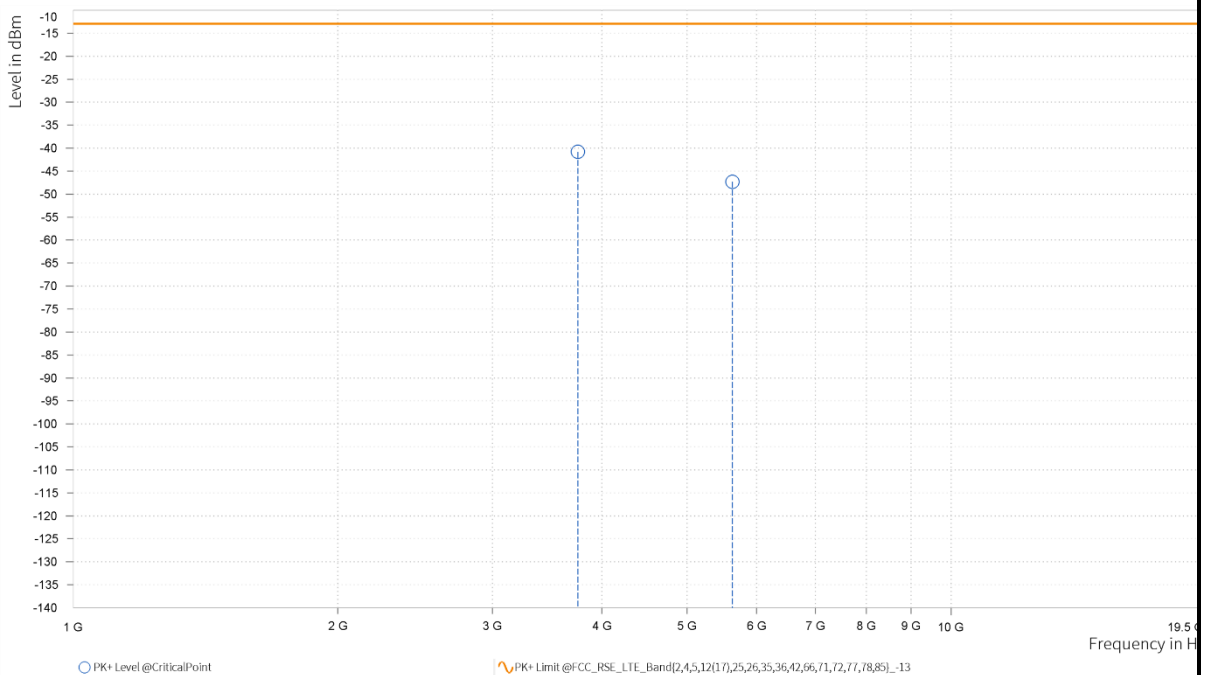




CHANNEL BANDWIDTH	15MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.500	-49.69	-13.00	36.69	21.47	H	356.6	1.00
4	5,627.250	-48.92	-13.00	35.92	24.71	H	150.6	2.00

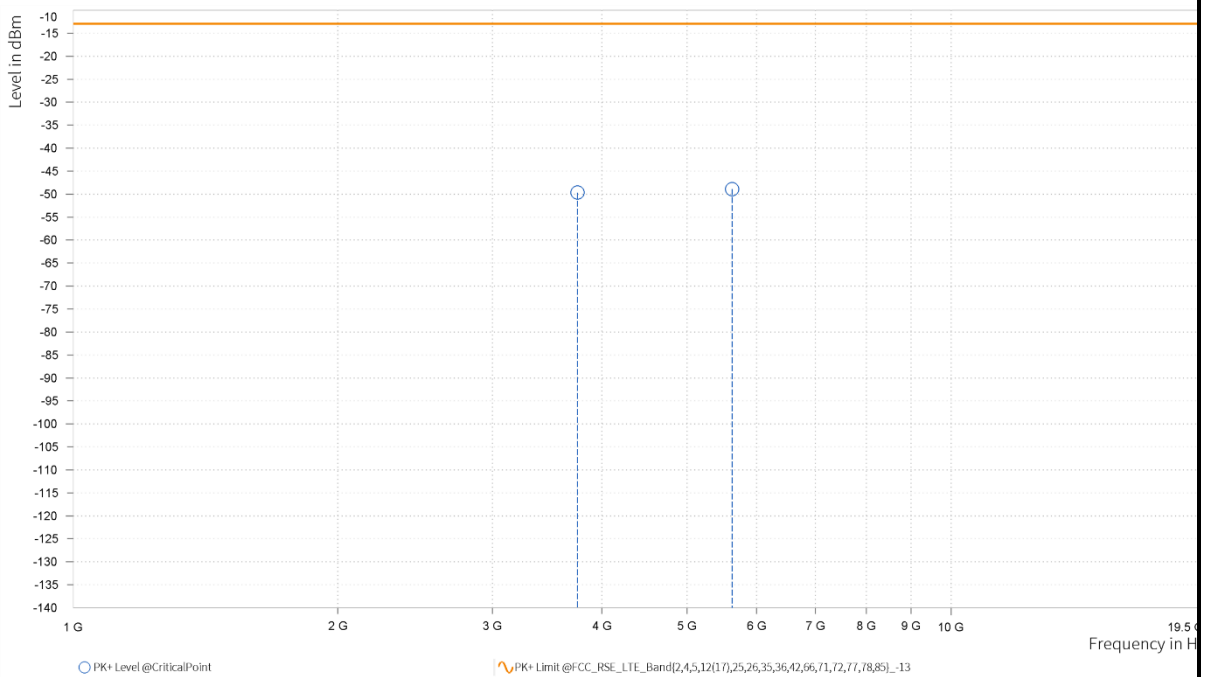




CHANNEL BANDWIDTH	15MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.500	-40.98	-13.00	27.98	22.07	V	259.6	2.00
4	5,627.500	-41.48	-13.00	28.48	25.07	V	352.3	1.00

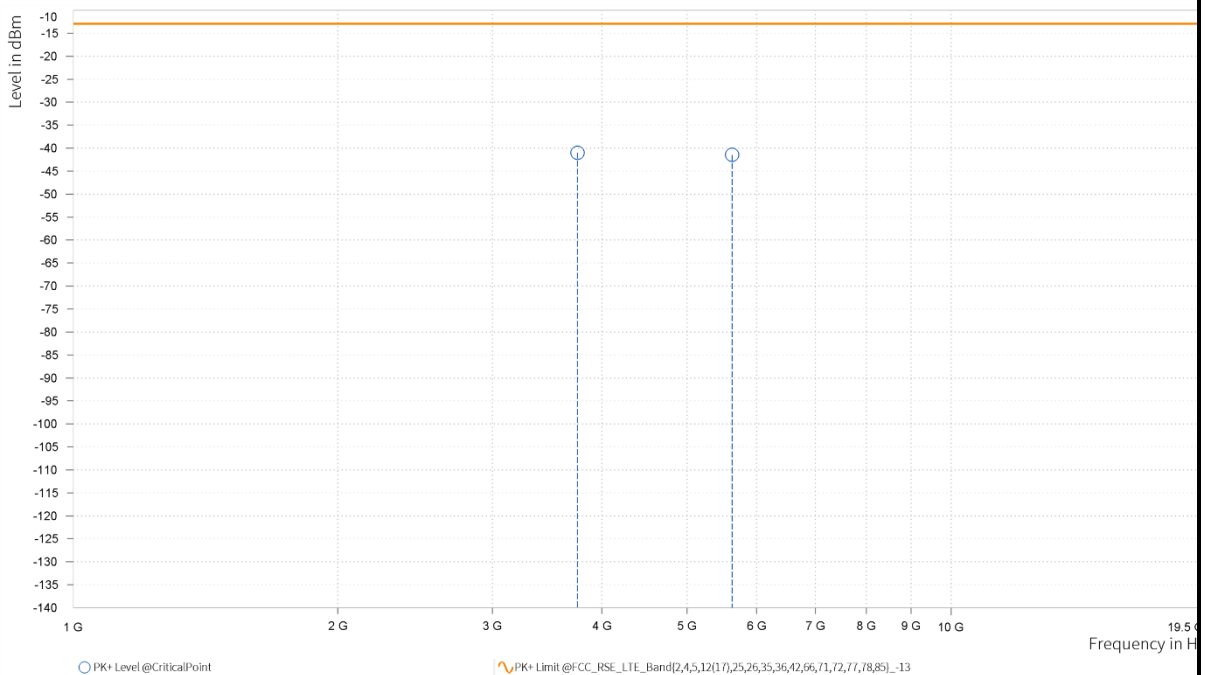




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26140
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,702.000	-46.70	-13.00	33.70	21.12	H	258.2	2.00
4	5,553.000	-49.32	-13.00	36.32	24.26	H	110.2	1.00

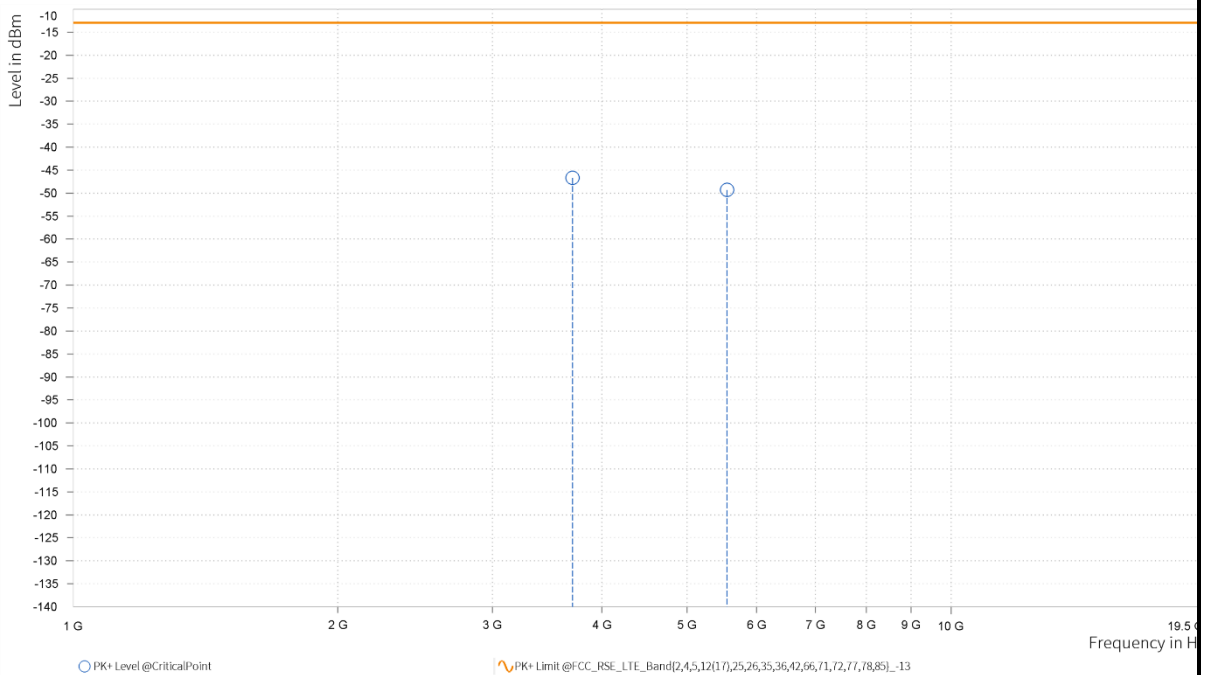




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26140
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,701.500	-43.35	-13.00	30.35	21.71	V	257.4	2.00
4	5,553.500	-42.81	-13.00	29.81	24.96	V	79.1	2.00

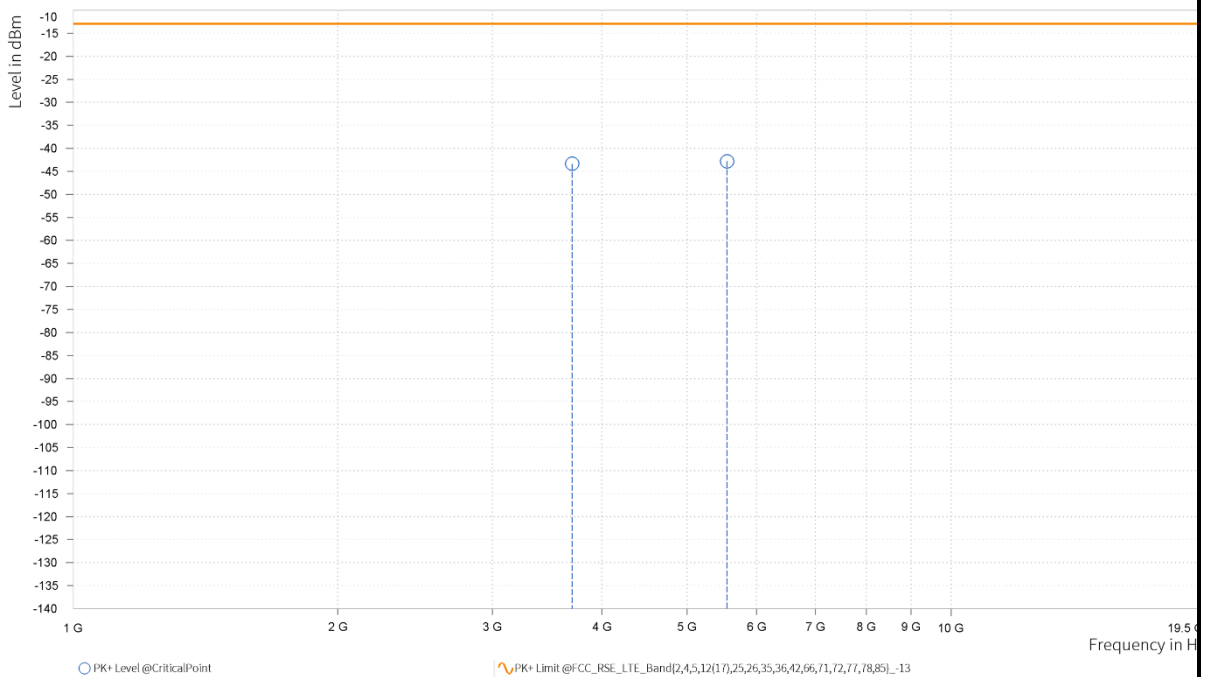




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,747.000	-47.90	-13.00	34.90	21.39	H	258.9	2.00
4	5,620.500	-49.36	-13.00	36.36	24.66	H	213.5	1.00

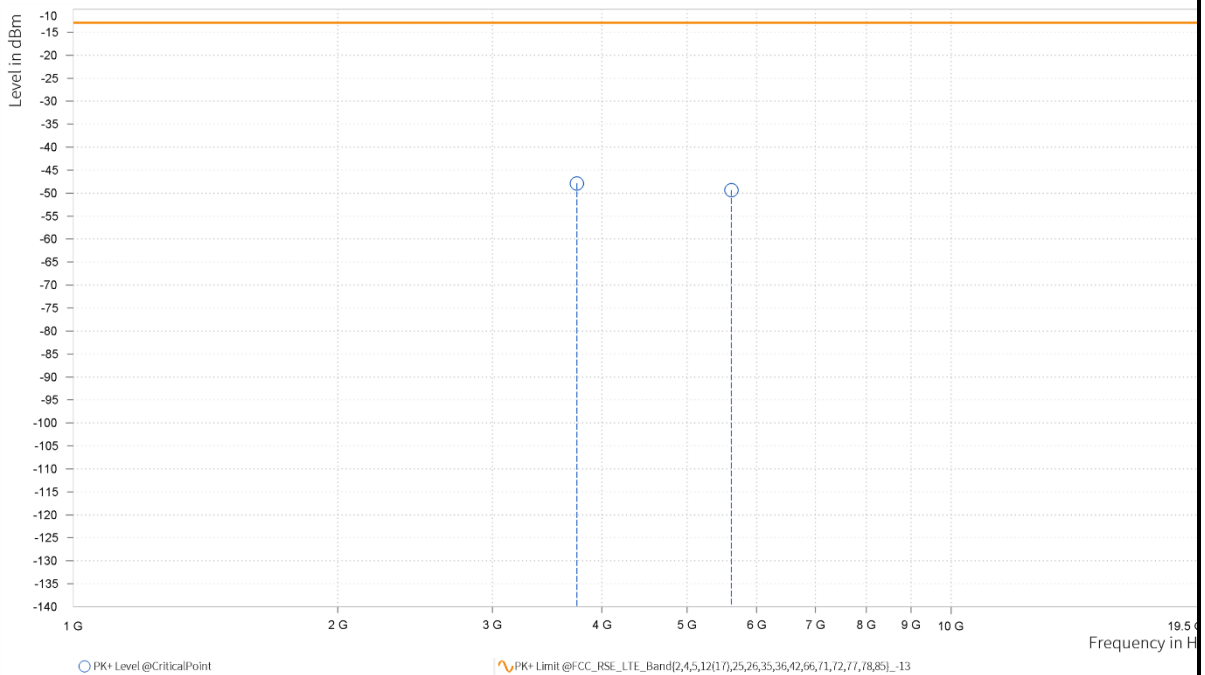




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26365
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,747.500	-40.52	-13.00	27.52	22.04	V	258.2	2.00
4	5,620.500	-45.12	-13.00	32.12	25.06	V	1	1.00

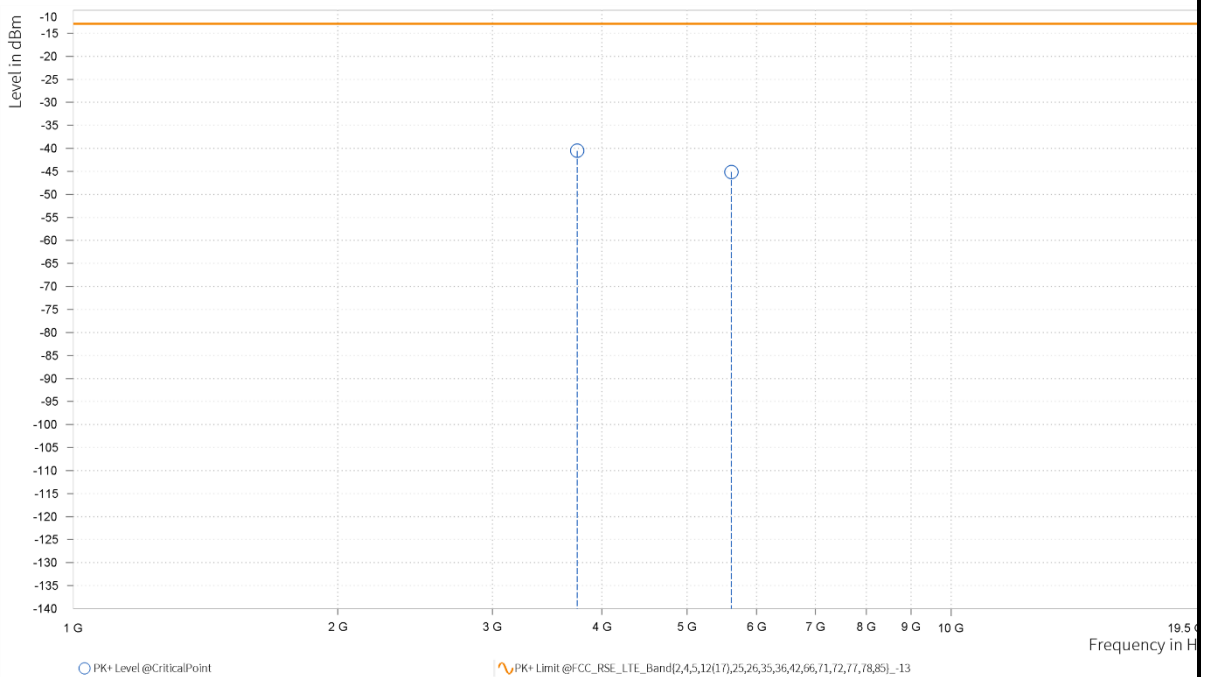




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26590
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,792.000	-46.83	-13.00	33.83	22.18	H	145.7	2.00
4	5,688.000	-48.23	-13.00	35.23	25.02	H	113.1	1.00

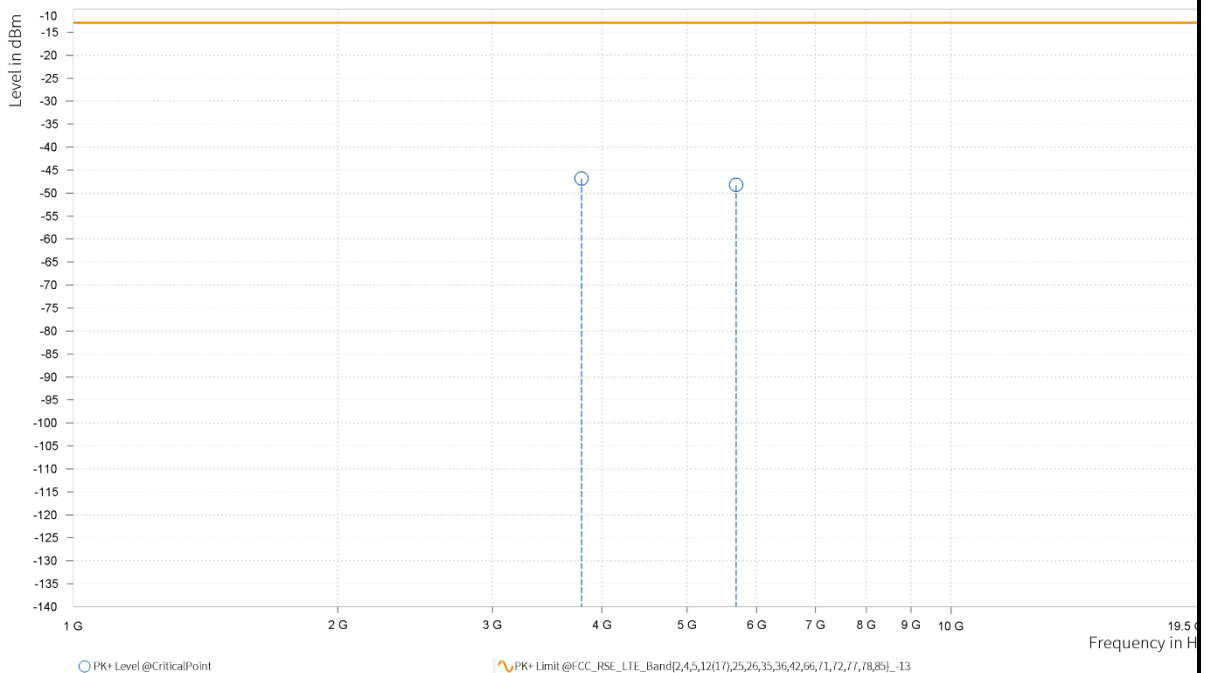




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 26590
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,792.000	-38.67	-13.00	25.67	22.39	V	2.3	2.00
4	5,688.000	-45.35	-13.00	32.35	25.44	V	344.5	1.00

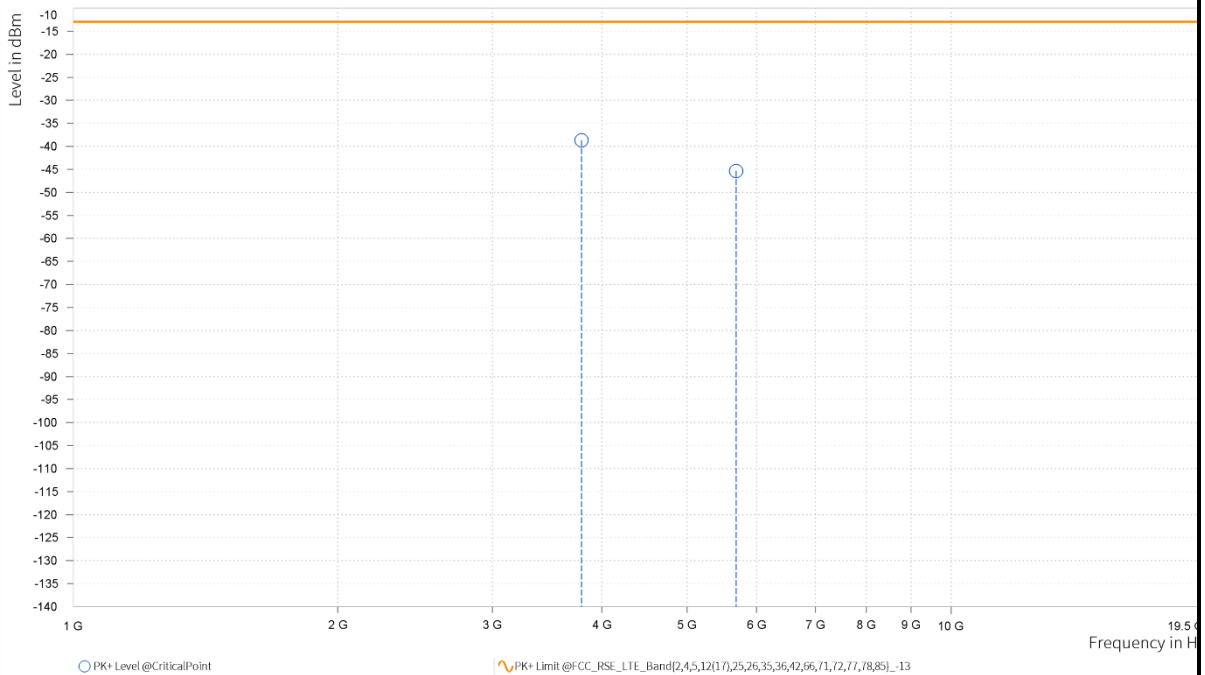




3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

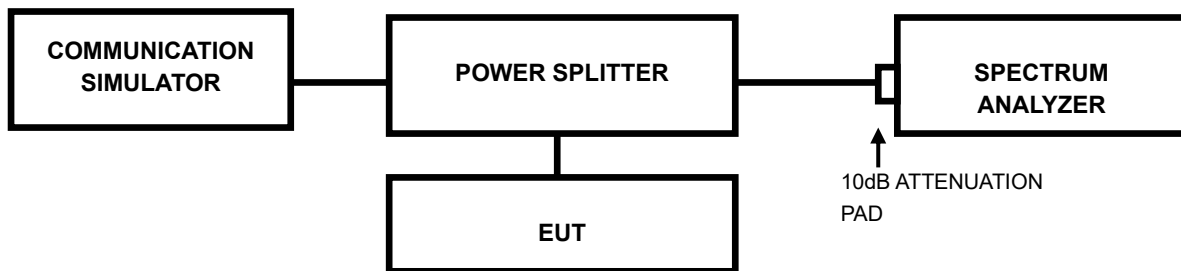

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

Please Refer to Appendix of this test report.



4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China
Accredited Test Lab Cert 6613.01

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 Appendix

LTE BAND25 (INCLUDING LTE BAND 2)

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	5.35	13	PASS
Band25	1.4MHz	QPSK	26047	25RB#0	5.57	13	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	5.45	13	PASS
Band25	1.4MHz	QPSK	26365	25RB#0	5.60	13	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	4.84	13	PASS
Band25	1.4MHz	QPSK	26683	25RB#0	5.28	13	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	6.27	13	PASS
Band25	1.4MHz	16QAM	26047	25RB#0	5.57	13	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	6.41	13	PASS
Band25	1.4MHz	16QAM	26365	25RB#0	5.60	13	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	5.78	13	PASS
Band25	1.4MHz	16QAM	26683	25RB#0	5.29	13	PASS
Band25	3MHz	QPSK	26055	1RB#0	5.45	13	PASS
Band25	3MHz	QPSK	26055	15RB#0	5.54	13	PASS
Band25	3MHz	QPSK	26365	1RB#0	5.65	13	PASS
Band25	3MHz	QPSK	26365	15RB#0	5.61	13	PASS
Band25	3MHz	QPSK	26675	1RB#0	4.88	13	PASS
Band25	3MHz	QPSK	26675	15RB#0	5.28	13	PASS
Band25	3MHz	16QAM	26055	1RB#0	6.00	13	PASS
Band25	3MHz	16QAM	26055	15RB#0	6.24	13	PASS
Band25	3MHz	16QAM	26365	1RB#0	6.46	13	PASS
Band25	3MHz	16QAM	26365	15RB#0	6.34	13	PASS
Band25	3MHz	16QAM	26675	1RB#0	5.80	13	PASS
Band25	3MHz	16QAM	26675	15RB#0	6.05	13	PASS
Band25	5MHz	QPSK	26065	1RB#0	5.43	13	PASS
Band25	5MHz	QPSK	26065	25RB#0	5.49	13	PASS
Band25	5MHz	QPSK	26365	1RB#0	5.84	13	PASS
Band25	5MHz	QPSK	26365	25RB#0	5.64	13	PASS
Band25	5MHz	QPSK	26665	1RB#0	5.18	13	PASS
Band25	5MHz	QPSK	26665	25RB#0	5.38	13	PASS
Band25	5MHz	16QAM	26065	1RB#0	6.08	13	PASS
Band25	5MHz	16QAM	26065	25RB#0	6.16	13	PASS
Band25	5MHz	16QAM	26365	1RB#0	6.11	13	PASS
Band25	5MHz	16QAM	26365	25RB#0	6.27	13	PASS
Band25	5MHz	16QAM	26665	1RB#0	5.66	13	PASS
Band25	5MHz	16QAM	26665	25RB#0	6.02	13	PASS
Band25	10MHz	QPSK	26090	1RB#0	5.43	13	PASS
Band25	10MHz	QPSK	26090	50RB#0	5.35	13	PASS
Band25	10MHz	QPSK	26365	1RB#0	5.77	13	PASS

**BUREAU VERITAS** Test Report No.: PSU-QSU2506090109RF02

Band25	10MHz	QPSK	26365	50RB#0	5.54	13	PASS
Band25	10MHz	QPSK	26640	1RB#0	5.69	13	PASS
Band25	10MHz	QPSK	26640	50RB#0	5.43	13	PASS
Band25	10MHz	16QAM	26090	1RB#0	6.23	13	PASS
Band25	10MHz	16QAM	26090	27RB#0	6.08	13	PASS
Band25	10MHz	16QAM	26365	1RB#0	6.62	13	PASS
Band25	10MHz	16QAM	26365	27RB#0	6.29	13	PASS
Band25	10MHz	16QAM	26640	1RB#0	6.60	13	PASS
Band25	10MHz	16QAM	26640	27RB#0	6.23	13	PASS
Band25	15MHz	QPSK	26115	1RB#0	5.35	13	PASS
Band25	15MHz	QPSK	26115	75RB#0	5.79	13	PASS
Band25	15MHz	QPSK	26365	1RB#0	5.84	13	PASS
Band25	15MHz	QPSK	26365	75RB#0	5.98	13	PASS
Band25	15MHz	QPSK	26615	1RB#0	5.64	13	PASS
Band25	15MHz	QPSK	26615	75RB#0	5.95	13	PASS
Band25	15MHz	16QAM	26115	1RB#0	6.27	13	PASS
Band25	15MHz	16QAM	26115	27RB#0	6.03	13	PASS
Band25	15MHz	16QAM	26365	1RB#0	6.77	13	PASS
Band25	15MHz	16QAM	26365	27RB#0	6.32	13	PASS
Band25	15MHz	16QAM	26615	1RB#0	6.51	13	PASS
Band25	15MHz	16QAM	26615	27RB#0	6.37	13	PASS
Band25	20MHz	QPSK	26140	1RB#0	5.13	13	PASS
Band25	20MHz	QPSK	26140	100RB#0	5.47	13	PASS
Band25	20MHz	QPSK	26365	1RB#0	5.58	13	PASS
Band25	20MHz	QPSK	26365	100RB#0	5.50	13	PASS
Band25	20MHz	QPSK	26590	1RB#0	5.26	13	PASS
Band25	20MHz	QPSK	26590	100RB#0	5.54	13	PASS
Band25	20MHz	16QAM	26140	1RB#0	5.73	13	PASS
Band25	20MHz	16QAM	26140	27RB#0	6.09	13	PASS
Band25	20MHz	16QAM	26365	1RB#0	6.04	13	PASS
Band25	20MHz	16QAM	26365	27RB#0	6.51	13	PASS
Band25	20MHz	16QAM	26590	1RB#0	5.83	13	PASS
Band25	20MHz	16QAM	26590	27RB#0	6.38	13	PASS




Test Graphs

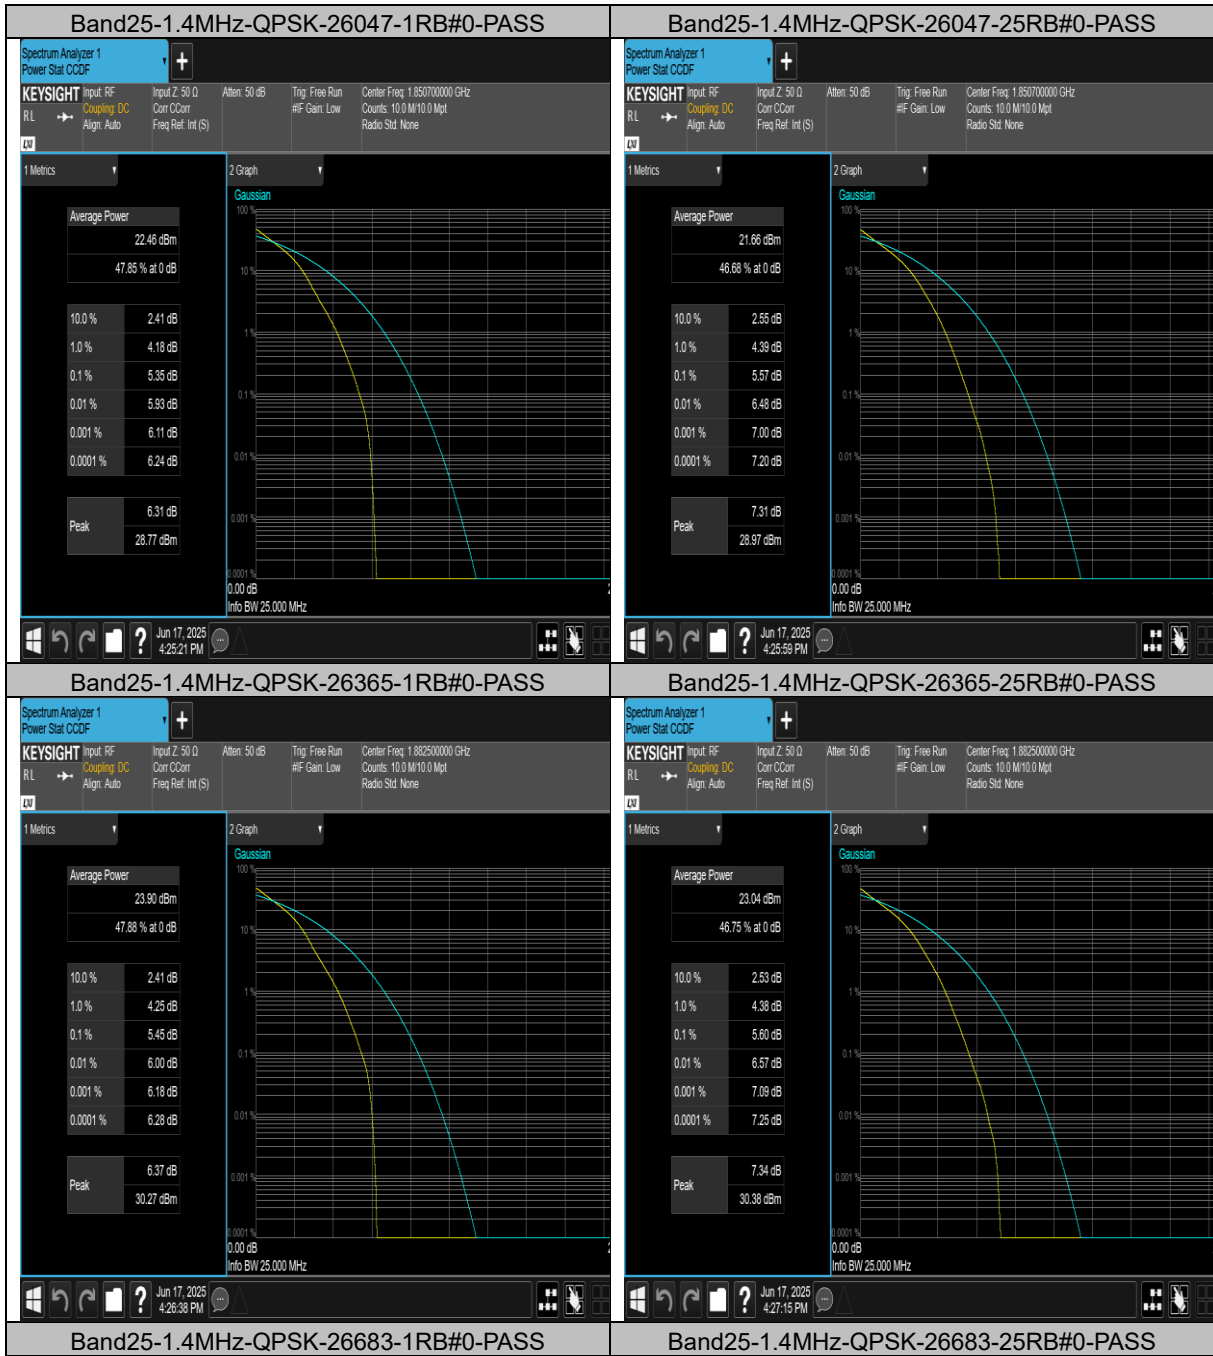



BUREAU VERITAS Test Report No.: PSU-QSU2506090109RF02

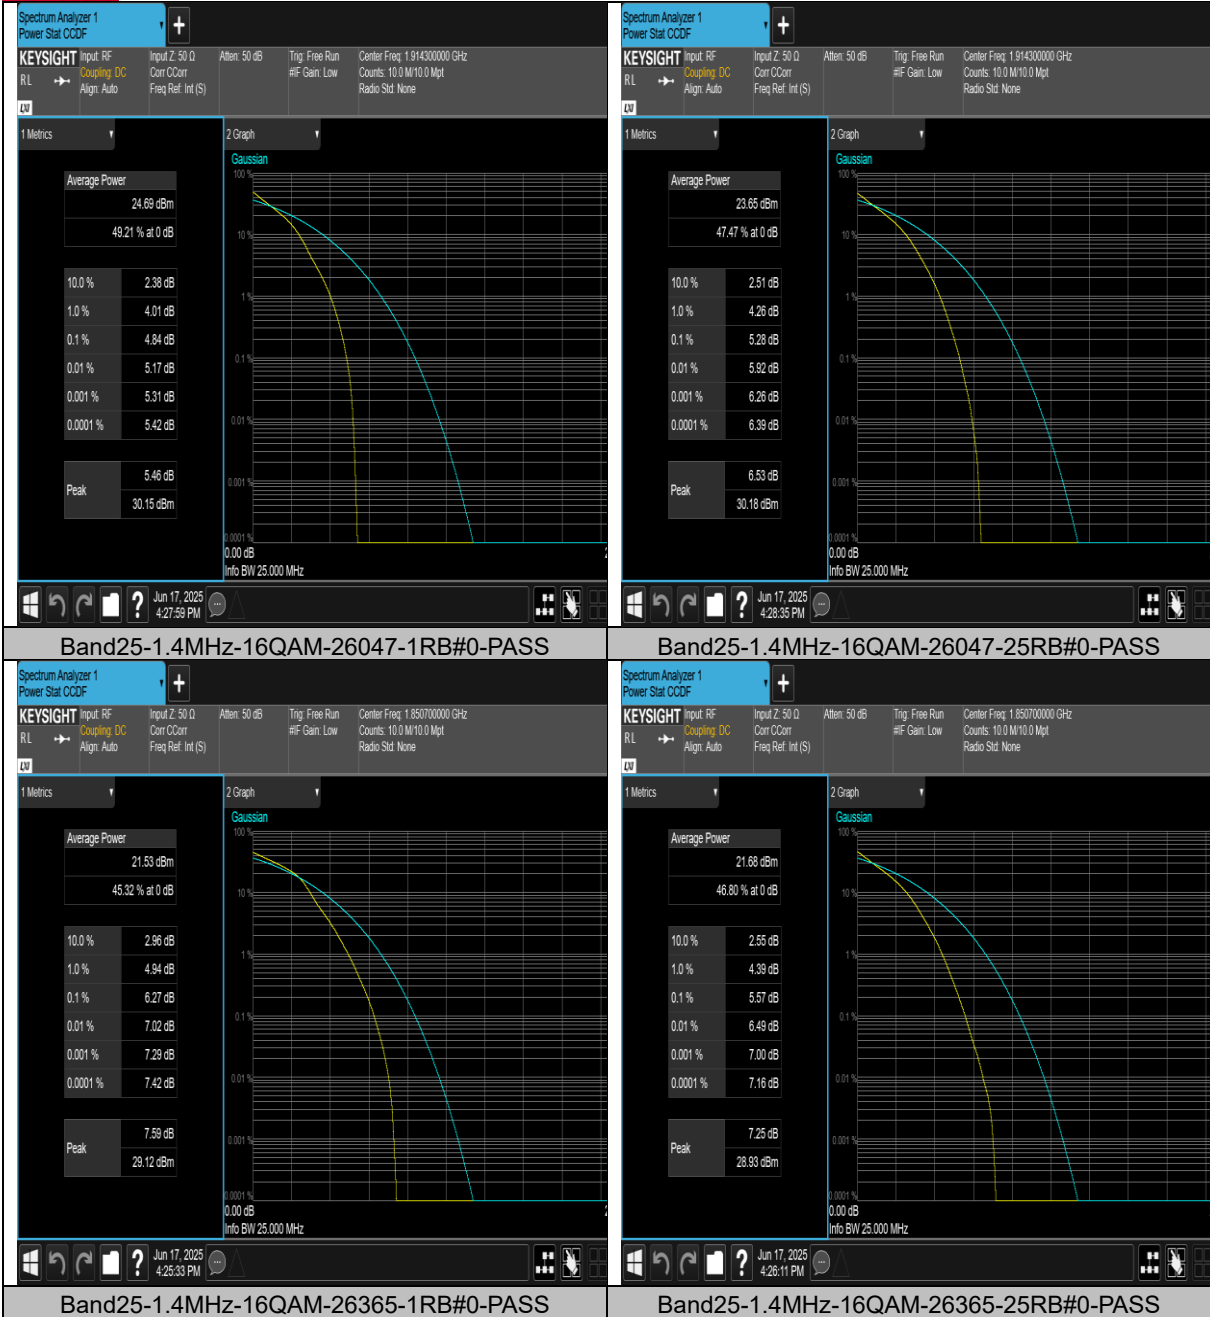

Huarui 7layers High Technology (Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Tel: +86 (0557) 368 1008