

FCC Test Report

Report No.: RF160912C07

FCC ID: A8J-EWS1025CAM

Test Model: EWS1025CAM

Received Date: Sep. 12, 2016

Test Date: Sep. 21 ~ Oct. 03, 2016

Issued Date: Oct. 12, 2016

Applicant: EnGenius Technologies

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Set Up	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures.....	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Conditions.....	34
4.2.7 Test Results	35
4.3 6dB Bandwidth Measurement.....	39
4.3.1 Limits of 6dB Bandwidth Measurement.....	39
4.3.2 Test Setup.....	39
4.3.3 Test Instruments	39
4.3.4 Test Procedure	39
4.3.5 Deviation from Test Standard	39
4.3.6 EUT Operating Conditions.....	39
4.3.7 Test Result.....	40
4.4 Conducted Output Power Measurement.....	42
4.4.1 Limits of Conducted Output Power Measurement	42
4.4.2 Test Setup.....	42
4.4.3 Test Instruments	42
4.4.4 Test Procedures.....	42
4.4.5 Deviation from Test Standard	42
4.4.6 EUT Operating Conditions.....	42
4.4.7 Test Results	43
4.5 Power Spectral Density Measurement.....	44
4.5.1 Limits of Power Spectral Density Measurement	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments	44
4.5.4 Test Procedure	44
4.5.5 Deviation from Test Standard	45
4.5.6 EUT Operating Condition	45

4.5.7 Test Results	46
4.6 Conducted Out of Band Emission Measurement.....	49
4.6.1 Limits of Conducted Out of Band Emission Measurement	49
4.6.2 Test Setup.....	49
4.6.3 Test Instruments	49
4.6.4 Test Procedure	49
4.6.5 Deviation from Test Standard	49
4.6.6 EUT Operating Condition	49
4.6.7 Test Results	49
5 Pictures of Test Arrangements.....	58
Appendix – Information on the Testing Laboratories	59

Release Control Record

Issue No.	Description	Date Issued
RF160912C07	Original release	Oct. 12, 2016

1 Certificate of Conformity

Product: 2MP Managed Wireless Mesh AP Camera

Brand: EnGenius®

Test Model: EWS1025CAM

Sample Status: Engineering Sample

Applicant: EnGenius Technologies

Test Date: Sep. 21 ~ Oct. 03, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Oct. 12, 2016
Pettie Chen / Senior Specialist

Approved by :  , **Date:** Oct. 12, 2016
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -3.27dB at 12.10938MHz
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 500.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	2MP Managed Wireless Mesh AP Camera
Brand	EnGenius®
Test Model	EWS1025CAM
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter 48-54Vdc from PoE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	390.476mW
Antenna Type	Refer to note 2
Antenna Connector	Refer to note 2
Accessory Device	Adapter
Data Cable Supplied	0.5m RJ45 non-shielded cable

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

- The EUT with follow antennas gain is listed as table below.

Antenna Type	PCB			
Connector	IPEX			
Antenna	1	2	3	4
Frequency (MHz)	2400-2500		5150-5850	
Gain (dBi)	4.17	4.51	6.36	5.99

- The EUT consumes power from the following adapter and PoE.

Adapter	
Brand	Powertron Electronics Corp.
Model	PA1015-120DUB150
Input Power	100-240Vac~50-60Hz 0.4A
Output Power	12Vdc / 1.5A 18W Max
Power Line	1.5m cable without core

PoE (support unit only)	
Brand	EnGenius
Model	EPA5006GP
Input Power	100-240VAC~0.8A, 50-60Hz
Output Power	54V / 0.6A
Power Line	0.6m non-shielded cable without core

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen
RE<1G	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen
PLC	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Leo Tsai

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98%, duty factor is not required.


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = $12.163/12.238 = 0.994$

802.11g: Duty cycle = $2.023/2.093 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.15$

802.11n (HT20): Duty cycle = $1.877/1.947 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11n (HT40): Duty cycle = $0.922/0.985 = 0.936$, Duty factor = $10 * \log(1/0.936) = 0.29$

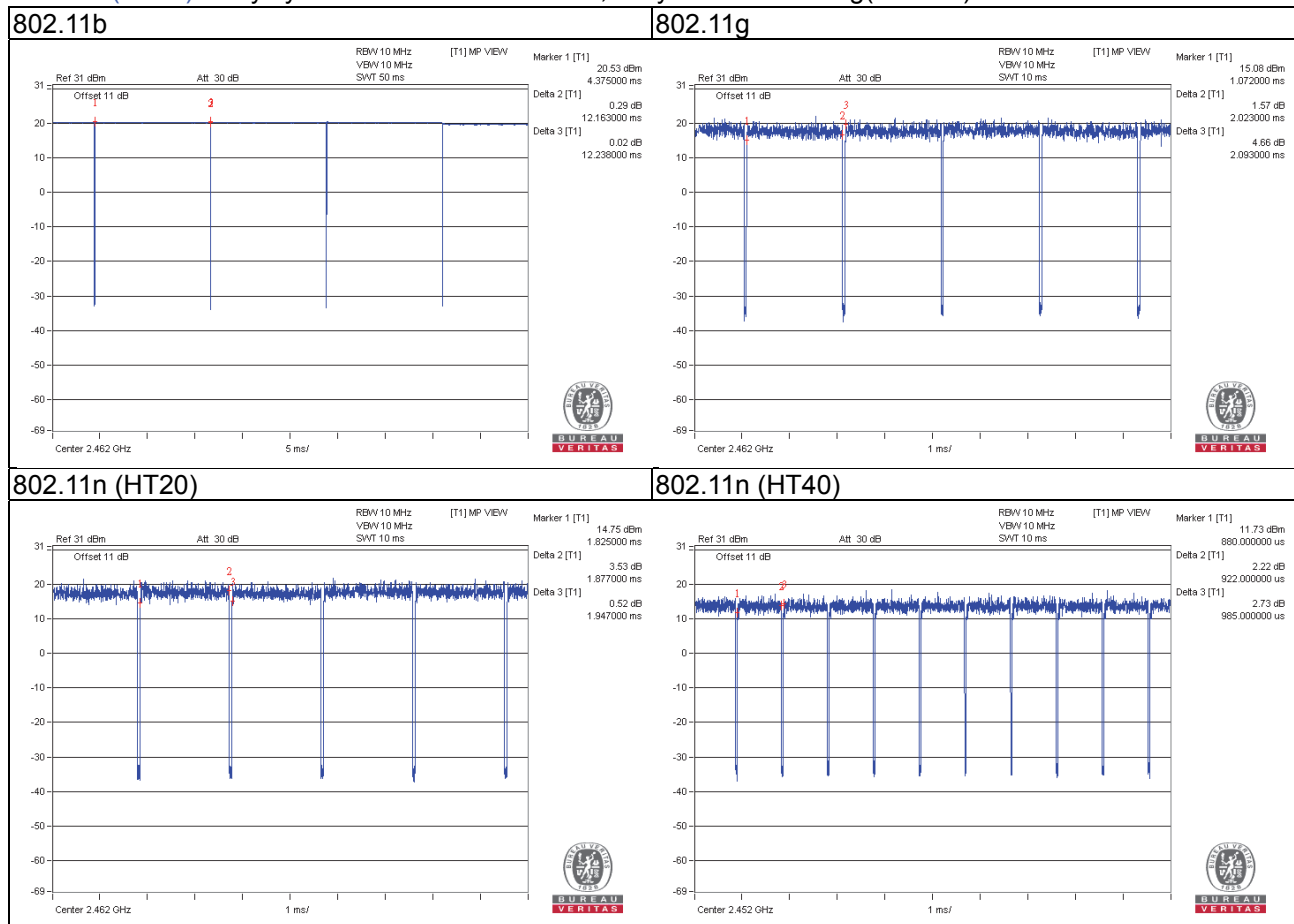

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	D531	CN-0XM006-48643-81 U-2973	QDS-BRCM1020	-
B.	POE	EnGenius	EPA5006GP	N/A	N/A	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	1	1.8	N	0	-

3.4.1 Configuration of System under Test

Test Mode A

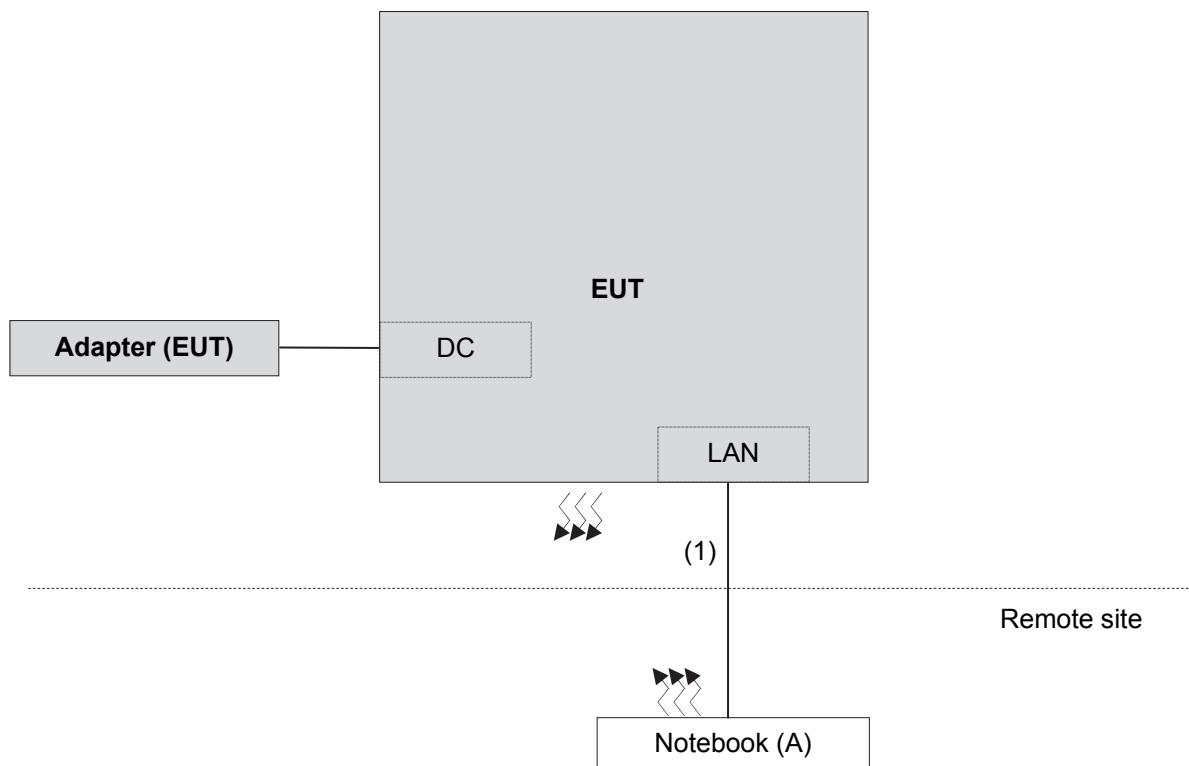

Test Mode B

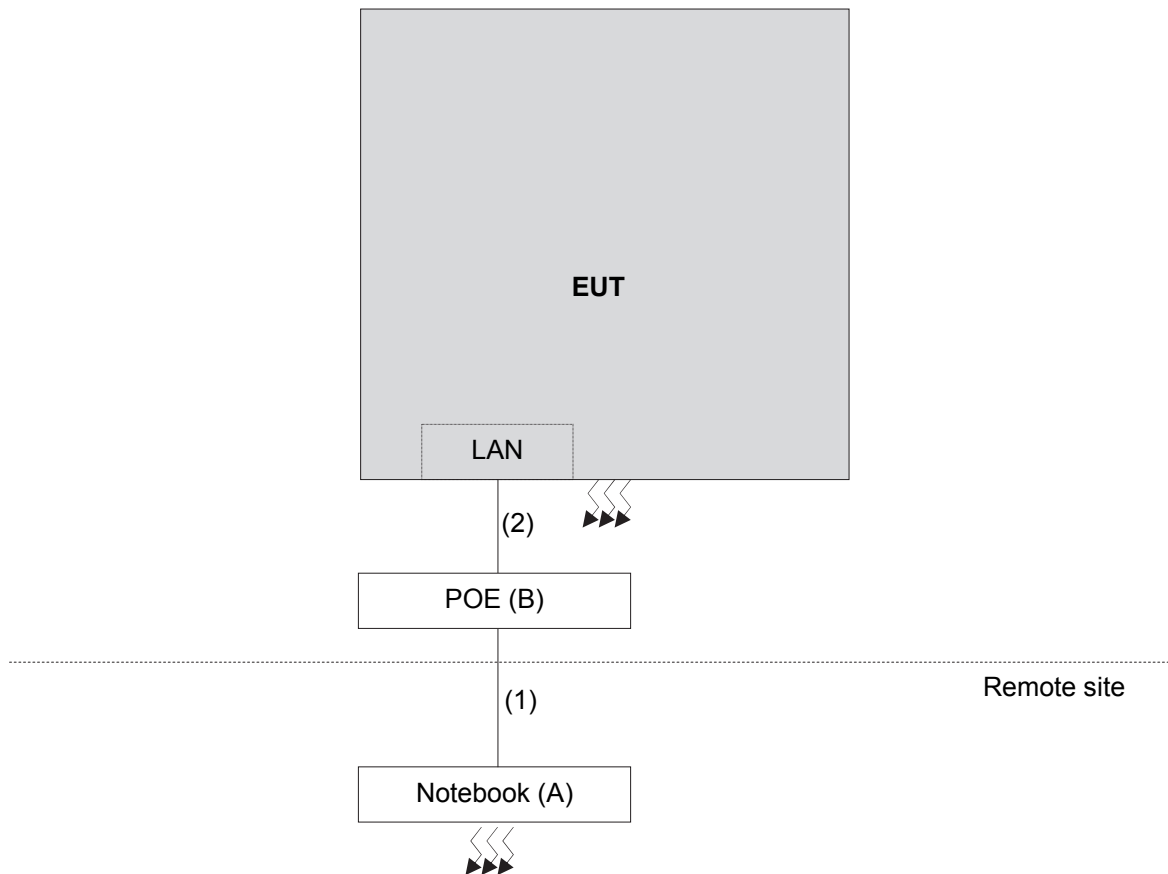

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v03r05

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 23, 2015	Dec. 22, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Apr. 19, 2016	Apr. 18, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Jan. 18, 2016	Jan. 17, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Jan. 08, 2016	Jan. 07, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier Agilent	8449B	3008A01911	Aug. 09, 2016	Aug. 08, 2017
Preamplifier Agilent	8447D	2944A10638	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-02 (309222 +248780)	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-03 (274092)	Aug. 09, 2016	Aug. 08, 2017
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 09, 2016	Aug. 08, 2017
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 11, 2016	Aug. 10, 2017
Power Sensor	MA2411B	0738171	Aug. 11, 2016	Aug. 10, 2017

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 215374.
5. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

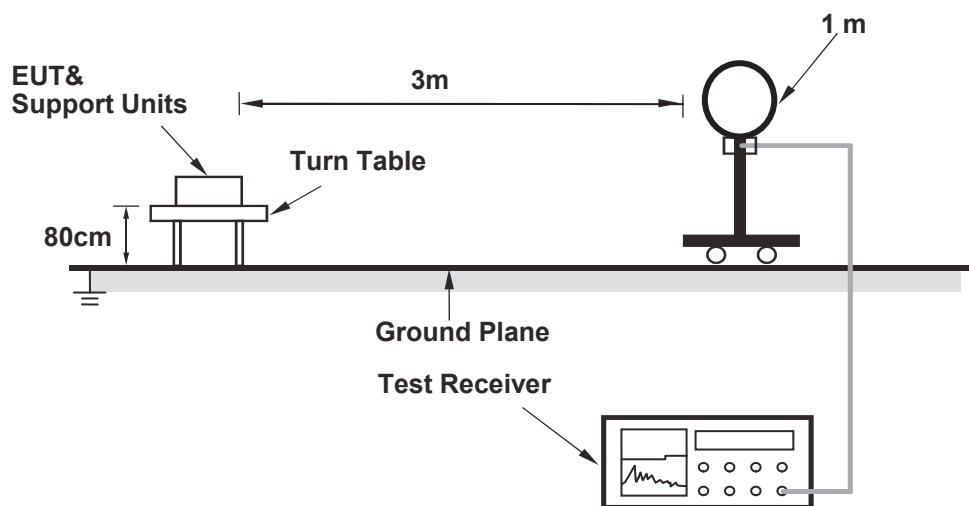

For Radiated emission 30MHz to 1GHz

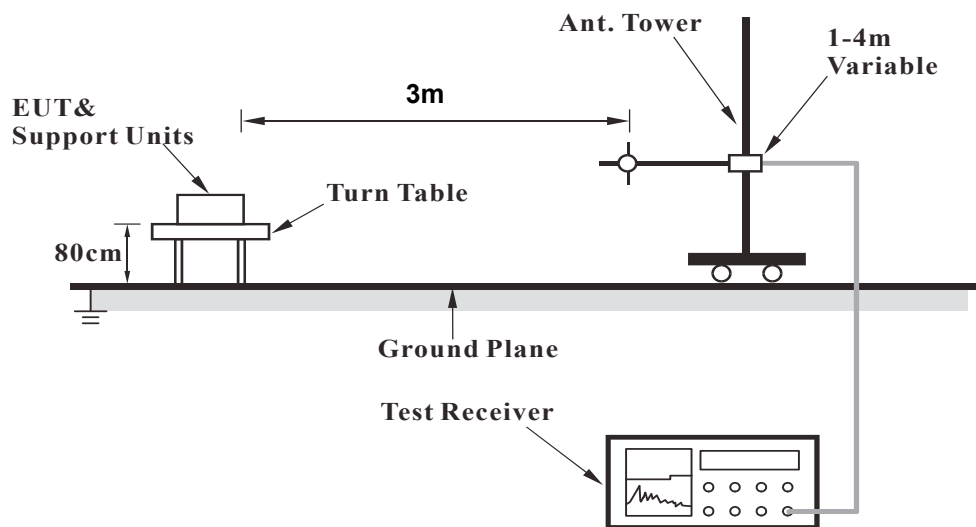

For Radiated emission above 1GHz

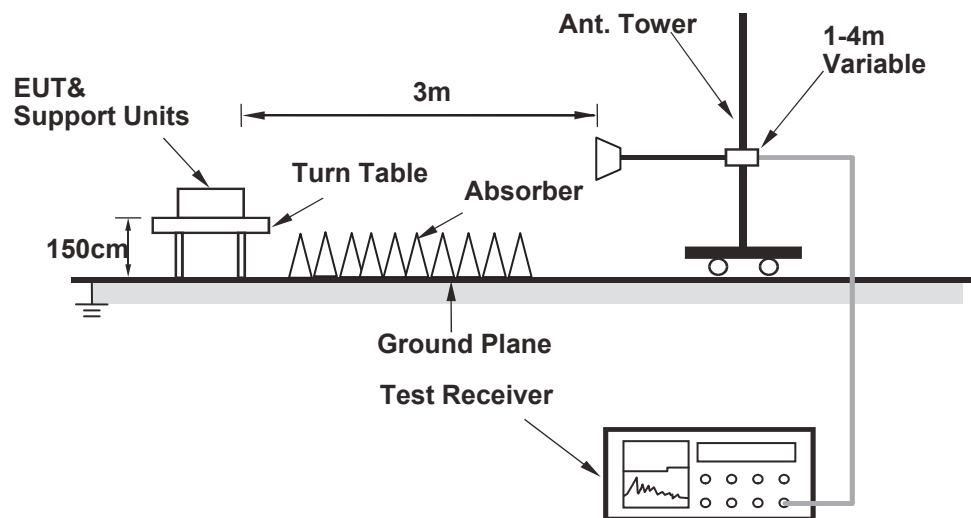

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz worst-Case data:

802.11b

CHANNEL	TX Channel 1	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.8 PK	74.0	-11.2	3.69 H	131	27.8	35.0
2	2390.00	52.6 AV	54.0	-1.4	3.69 H	131	17.6	35.0
3	*2412.00	114.3 PK			3.66 H	150	79.3	35.0
4	*2412.00	110.6 AV			3.66 H	150	75.6	35.0
5	4824.00	53.2 PK	74.0	-20.8	1.60 H	222	49.0	4.2
6	4824.00	46.5 AV	54.0	-7.5	1.60 H	222	42.3	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	3.19 V	68	27.1	35.0
2	2390.00	52.2 AV	54.0	-1.8	3.19 V	68	17.2	35.0
3	*2412.00	111.6 PK			3.76 V	57	76.6	35.0
4	*2412.00	107.8 AV			3.76 V	57	72.8	35.0
5	4824.00	49.8 PK	74.0	-24.2	2.35 V	176	45.6	4.2
6	4824.00	43.5 AV	54.0	-10.5	2.35 V	176	39.3	4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.8 PK			4.00 H	162	80.6	35.2
2	*2437.00	112.6 AV			4.00 H	162	77.4	35.2
3	2483.50	62.2 PK	74.0	-11.8	3.76 H	73	26.8	35.4
4	2483.50	51.8 AV	54.0	-2.2	3.76 H	73	16.4	35.4
5	4874.00	56.7 PK	74.0	-17.3	1.69 H	228	52.3	4.4
6	4874.00	52.6 AV	54.0	-1.4	1.69 H	228	48.2	4.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.2 PK			3.66 V	72	78.0	35.2
2	*2437.00	109.8 AV			3.66 V	72	74.6	35.2
3	2483.50	62.5 PK	74.0	-11.5	2.98 V	112	27.1	35.4
4	2483.50	49.3 AV	54.0	-4.7	2.98 V	112	13.9	35.4
5	4874.00	53.2 PK	74.0	-20.8	2.27 V	169	48.8	4.4
6	4874.00	46.3 AV	54.0	-7.7	2.27 V	169	41.9	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.9 PK			1.98 H	327	72.6	35.3
2	*2462.00	104.0 AV			1.98 H	327	68.7	35.3
3	2483.50	63.5 PK	74.0	-10.5	3.27 H	311	28.1	35.4
4	2483.50	52.4 AV	54.0	-1.6	3.27 H	311	17.0	35.4
5	4924.00	53.2 PK	74.0	-20.8	1.53 H	238	48.6	4.6
6	4924.00	46.6 AV	54.0	-7.4	1.53 H	238	42.0	4.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.6 PK			3.28 V	73	70.3	35.3
2	*2462.00	101.8 AV			3.28 V	73	66.5	35.3
3	2483.50	62.7 PK	74.0	-11.3	2.98 V	115	27.3	35.4
4	2483.50	51.6 AV	54.0	-2.4	2.98 V	115	16.2	35.4
5	4924.00	49.9 PK	74.0	-24.1	2.26 V	185	45.3	4.6
6	4924.00	43.6 AV	54.0	-10.4	2.26 V	185	39.0	4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	3.73 H	157	36.6	35.0
2	2390.00	52.4 AV	54.0	-1.6	3.73 H	157	17.4	35.0
3	*2412.00	109.2 PK			4.00 H	153	74.2	35.0
4	*2412.00	99.2 AV			4.00 H	153	64.2	35.0
5	4824.00	51.5 PK	74.0	-22.5	1.79 H	225	47.3	4.2
6	4824.00	37.7 AV	54.0	-16.3	1.79 H	225	33.5	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	3.92 V	83	34.8	35.0
2	2390.00	50.6 AV	54.0	-3.4	3.92 V	83	15.6	35.0
3	*2412.00	107.0 PK			3.83 V	59	72.0	35.0
4	*2412.00	97.1 AV			3.83 V	59	62.1	35.0
5	4824.00	50.9 PK	74.0	-23.1	2.16 V	177	46.7	4.2
6	4824.00	37.4 AV	54.0	-16.6	2.16 V	177	33.2	4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	4.00 H	161	34.8	35.0
2	2390.00	52.6 AV	54.0	-1.4	4.00 H	161	17.6	35.0
3	*2437.00	116.6 PK			4.00 H	162	81.4	35.2
4	*2437.00	107.0 AV			4.00 H	162	71.8	35.2
5	2483.50	68.0 PK	74.0	-6.0	3.95 H	160	32.6	35.4
6	2483.50	52.4 AV	54.0	-1.6	3.95 H	160	17.0	35.4
7	4874.00	52.8 PK	74.0	-21.2	1.82 H	219	48.4	4.4
8	4874.00	39.4 AV	54.0	-14.6	1.82 H	219	35.0	4.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	3.86 V	82	31.3	35.0
2	2390.00	50.9 AV	54.0	-3.1	3.86 V	82	15.9	35.0
3	*2437.00	112.5 PK			4.00 V	49	77.3	35.2
4	*2437.00	102.3 AV			4.00 V	49	67.1	35.2
5	2483.50	67.2 PK	74.0	-6.8	3.91 V	38	31.8	35.4
6	2483.50	52.0 AV	54.0	-2.0	3.91 V	38	16.6	35.4
7	4874.00	51.6 PK	74.0	-22.4	2.26 V	182	47.2	4.4
8	4874.00	37.7 AV	54.0	-16.3	2.26 V	182	33.3	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.0 PK			3.63 H	159	74.7	35.3
2	*2462.00	100.3 AV			3.63 H	159	65.0	35.3
3	2483.50	72.0 PK	74.0	-2.0	4.00 H	155	36.6	35.4
4	2483.50	52.5 AV	54.0	-1.5	4.00 H	155	17.1	35.4
5	4924.00	52.1 PK	74.0	-21.9	1.92 H	238	47.5	4.6
6	4924.00	38.4 AV	54.0	-15.6	1.92 H	238	33.8	4.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.3 PK			3.86 V	76	73.0	35.3
2	*2462.00	97.6 AV			3.86 V	76	62.3	35.3
3	2483.50	70.7 PK	74.0	-3.3	4.00 V	111	35.3	35.4
4	2483.50	51.2 AV	54.0	-2.8	4.00 V	111	15.8	35.4
5	4924.00	51.4 PK	74.0	-22.6	2.24 V	185	46.8	4.6
6	4924.00	37.5 AV	54.0	-16.5	2.24 V	185	32.9	4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	3.75 H	182	30.9	35.0
2	2390.00	52.6 AV	54.0	-1.4	3.75 H	182	17.6	35.0
3	*2412.00	108.2 PK			3.89 H	171	73.2	35.0
4	*2412.00	97.7 AV			3.89 H	171	62.7	35.0
5	4824.00	49.5 PK	74.0	-24.5	1.75 H	251	45.3	4.2
6	4824.00	37.1 AV	54.0	-16.9	1.75 H	251	32.9	4.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	3.81 V	44	29.4	35.0
2	2390.00	50.2 AV	54.0	-3.8	3.81 V	44	15.2	35.0
3	*2412.00	106.1 PK			3.68 V	69	71.1	35.0
4	*2412.00	95.7 AV			3.68 V	69	60.7	35.0
5	4824.00	49.4 PK	74.0	-24.6	2.11 V	181	45.2	4.2
6	4824.00	36.9 AV	54.0	-17.1	2.11 V	181	32.7	4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	3.28 H	164	32.8	35.0
2	2390.00	52.8 AV	54.0	-1.2	3.28 H	164	17.8	35.0
3	*2437.00	117.4 PK			4.00 H	170	82.2	35.2
4	*2437.00	107.2 AV			4.00 H	170	72.0	35.2
5	2483.50	66.2 PK	74.0	-7.8	3.77 H	114	30.8	35.4
6	2483.50	51.8 AV	54.0	-2.2	3.77 H	114	16.4	35.4
7	4874.00	52.5 PK	74.0	-21.5	1.77 H	235	48.1	4.4
8	4874.00	38.6 AV	54.0	-15.4	1.77 H	235	34.2	4.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	3.72 V	51	30.8	35.0
2	2390.00	51.0 AV	54.0	-3.0	3.72 V	51	16.0	35.0
3	*2437.00	114.3 PK			4.00 V	65	79.1	35.2
4	*2437.00	104.3 AV			4.00 V	65	69.1	35.2
5	2483.50	63.8 PK	74.0	-10.2	4.00 V	81	28.4	35.4
6	2483.50	50.5 AV	54.0	-3.5	4.00 V	81	15.1	35.4
7	4874.00	49.9 PK	74.0	-24.1	2.20 V	173	45.5	4.4
8	4874.00	37.1 AV	54.0	-16.9	2.20 V	173	32.7	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.1 PK			4.00 H	171	73.8	35.3
2	*2462.00	98.7 AV			4.00 H	171	63.4	35.3
3	2483.50	72.8 PK	74.0	-1.2	3.76 H	176	37.4	35.4
4	2483.50	52.5 AV	54.0	-1.5	3.76 H	176	17.1	35.4
5	4924.00	51.8 PK	74.0	-22.2	1.99 H	240	47.2	4.6
6	4924.00	38.1 AV	54.0	-15.9	1.99 H	240	33.5	4.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.3 PK			4.00 V	73	72.0	35.3
2	*2462.00	97.2 AV			4.00 V	73	61.9	35.3
3	2483.50	70.1 PK	74.0	-3.9	3.91 V	68	34.7	35.4
4	2483.50	50.3 AV	54.0	-3.7	3.91 V	68	14.9	35.4
5	4924.00	50.7 PK	74.0	-23.3	1.96 V	188	46.1	4.6
6	4924.00	37.4 AV	54.0	-16.6	1.96 V	188	32.8	4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	3.28 H	108	31.4	35.0
2	2390.00	52.9 AV	54.0	-1.1	3.28 H	108	17.9	35.0
3	*2422.00	103.5 PK			4.00 H	175	68.4	35.1
4	*2422.00	94.0 AV			4.00 H	175	58.9	35.1
5	4844.00	50.2 PK	74.0	-23.8	1.77 H	249	45.9	4.3
6	4844.00	36.8 AV	54.0	-17.2	1.77 H	249	32.5	4.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	3.84 V	32	31.0	35.0
2	2390.00	51.7 AV	54.0	-2.3	3.84 V	32	16.7	35.0
3	*2422.00	100.6 PK			4.00 V	71	65.5	35.1
4	*2422.00	90.9 AV			4.00 V	71	55.8	35.1
5	4844.00	49.5 PK	74.0	-24.5	1.99 V	182	45.2	4.3
6	4844.00	36.4 AV	54.0	-17.6	1.99 V	182	32.1	4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	3.73 H	324	33.9	35.0
2	2390.00	52.8 AV	54.0	-1.2	3.73 H	324	17.8	35.0
3	*2437.00	107.2 PK			4.00 H	162	72.0	35.2
4	*2437.00	96.3 AV			4.00 H	162	61.1	35.2
5	2483.50	68.3 PK	74.0	-5.7	3.85 H	159	32.9	35.4
6	2483.50	51.3 AV	54.0	-2.7	3.85 H	159	15.9	35.4
7	4874.00	50.0 PK	74.0	-24.0	1.81 H	247	45.6	4.4
8	4874.00	36.2 AV	54.0	-17.8	1.81 H	247	31.8	4.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	3.76 V	68	33.3	35.0
2	2390.00	52.0 AV	54.0	-2.0	3.76 V	68	17.0	35.0
3	*2437.00	105.3 PK			3.67 V	69	70.1	35.2
4	*2437.00	95.2 AV			3.67 V	69	60.0	35.2
5	2483.50	67.6 PK	74.0	-6.4	3.81 V	59	32.2	35.4
6	2483.50	50.7 AV	54.0	-3.3	3.81 V	59	15.3	35.4
7	4874.00	49.4 PK	74.0	-24.6	2.01 V	178	45.0	4.4
8	4874.00	35.8 AV	54.0	-18.2	2.01 V	178	31.4	4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.4 PK			3.91 H	169	72.2	35.2
2	*2452.00	96.7 AV			3.91 H	169	61.5	35.2
3	2483.50	69.9 PK	74.0	-4.1	3.39 H	140	34.5	35.4
4	2483.50	52.7 AV	54.0	-1.3	3.39 H	140	17.3	35.4
5	4904.00	50.1 PK	74.0	-23.9	1.88 H	251	45.6	4.5
6	4904.00	36.3 AV	54.0	-17.7	1.88 H	251	31.8	4.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.9 PK			4.00 V	155	70.7	35.2
2	*2452.00	95.2 AV			4.00 V	155	60.0	35.2
3	2483.50	69.4 PK	74.0	-4.6	3.34 V	133	34.0	35.4
4	2483.50	51.0 AV	54.0	-3.0	3.34 V	133	15.6	35.4
5	4904.00	49.7 PK	74.0	-24.3	2.10 V	179	45.2	4.5
6	4904.00	35.8 AV	54.0	-18.2	2.10 V	179	31.3	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz worst-case data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	26.1 QP	40.0	-13.9	1.24 H	350	42.0	-15.9
2	125.06	30.7 QP	43.5	-12.8	1.49 H	282	46.3	-15.6
3	177.44	28.3 QP	43.5	-15.2	1.49 H	269	42.3	-14.0
4	249.22	35.7 QP	46.0	-10.3	1.00 H	118	49.1	-13.4
5	575.14	38.1 QP	46.0	-7.9	1.24 H	239	42.8	-4.7
6	650.80	38.3 QP	46.0	-7.7	1.24 H	219	41.2	-2.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.10	29.8 QP	40.0	-10.2	1.00 V	184	45.2	-15.4
2	99.84	30.0 QP	43.5	-13.5	1.24 V	245	48.5	-18.5
3	179.38	30.2 QP	43.5	-13.3	1.00 V	279	44.5	-14.3
4	375.32	33.9 QP	46.0	-12.1	1.24 V	202	43.2	-9.3
5	500.17	38.7 QP	46.0	-7.3	1.24 V	352	45.2	-6.5
6	625.58	35.3 QP	46.0	-10.7	1.00 V	131	38.4	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.4 QP	40.0	-9.6	2.00 H	40	46.0	-15.6
2	95.96	33.2 QP	43.5	-10.3	2.00 H	112	52.1	-18.9
3	125.06	32.5 QP	43.5	-11.0	2.00 H	285	48.1	-15.6
4	249.22	33.8 QP	46.0	-12.2	1.00 H	97	47.2	-13.4
5	524.70	35.6 QP	46.0	-10.4	2.00 H	154	41.6	-6.0
6	650.80	36.5 QP	46.0	-9.5	1.24 H	15	39.4	-2.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.16	34.4 QP	40.0	-5.6	1.00 V	22	48.5	-14.1
2	97.90	32.5 QP	43.5	-11.0	1.24 V	234	51.2	-18.7
3	144.46	32.5 QP	43.5	-11.0	1.00 V	235	46.2	-13.7
4	500.00	45.0 QP	46.0	-1.0	1.00 V	24	51.5	-6.5
5	532.46	35.9 QP	46.0	-10.1	1.00 V	125	41.7	-5.8
6	901.06	36.0 QP	46.0	-10.0	1.00 V	181	33.0	3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 23, 2015	Dec. 22, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 11, 2016	Jan. 10, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 26, 2016	Jul. 25, 2017
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

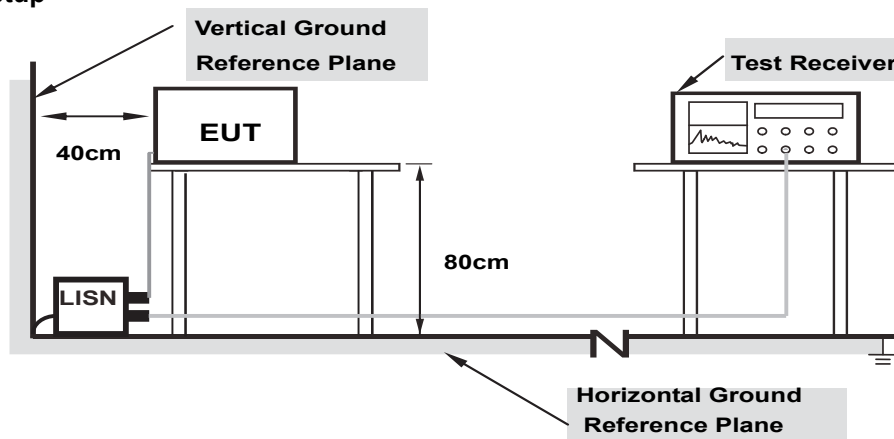

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23594	10.22	36.15	29.97	46.37	40.19	62.24	52.24	-15.87	-12.05
2	0.42734	10.24	24.22	19.44	34.46	29.68	57.30	47.30	-22.84	-17.62
3	0.95078	10.30	24.87	14.94	35.17	25.24	56.00	46.00	-20.83	-20.76
4	2.48047	10.39	24.55	15.87	34.94	26.26	56.00	46.00	-21.06	-19.74
5	6.84375	10.47	20.38	11.65	30.85	22.12	60.00	50.00	-29.15	-27.88
6	12.08984	10.55	17.06	9.50	27.61	20.05	60.00	50.00	-32.39	-29.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

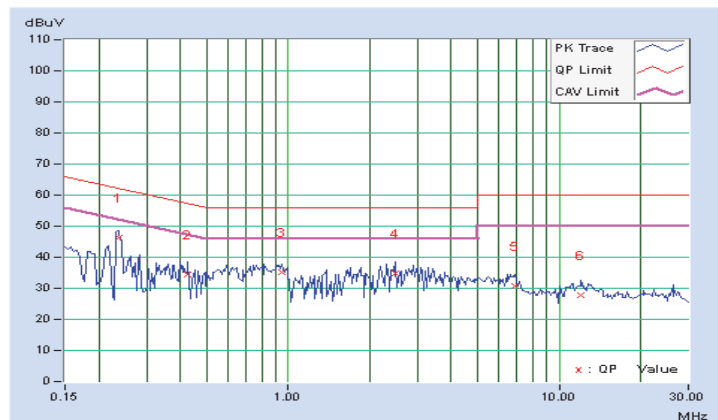


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.19	31.20	19.85	41.39	30.04	65.58	55.58	-24.19	-25.54
2	0.23984	10.22	32.90	29.11	43.12	39.33	62.10	52.10	-18.98	-12.77
3	1.14453	10.31	22.31	13.50	32.62	23.81	56.00	46.00	-23.38	-22.19
4	2.81250	10.47	20.60	11.55	31.07	22.02	56.00	46.00	-24.93	-23.98
5	6.51172	10.58	17.91	9.05	28.49	19.63	60.00	50.00	-31.51	-30.37
6	12.24219	10.66	14.74	6.41	25.40	17.07	60.00	50.00	-34.60	-32.93

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

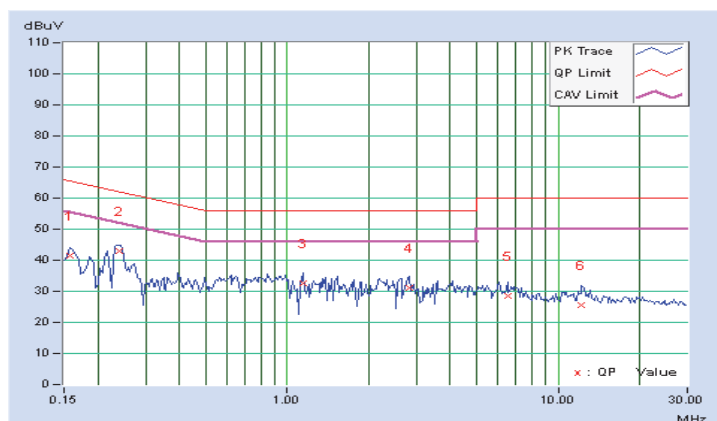


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.18	37.46	23.36	47.64	33.54	65.58	55.58	-17.94	-22.04
2	0.49375	10.25	34.08	28.96	44.33	39.21	56.10	46.10	-11.77	-6.89
3	0.75547	10.28	23.38	19.26	33.66	29.54	56.00	46.00	-22.34	-16.46
4	1.26172	10.33	24.36	20.17	34.69	30.50	56.00	46.00	-21.31	-15.50
5	9.62109	10.52	27.79	22.64	38.31	33.16	60.00	50.00	-21.69	-16.84
6	12.10938	10.55	36.78	35.65	47.33	46.20	60.00	50.00	-12.67	-3.80

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

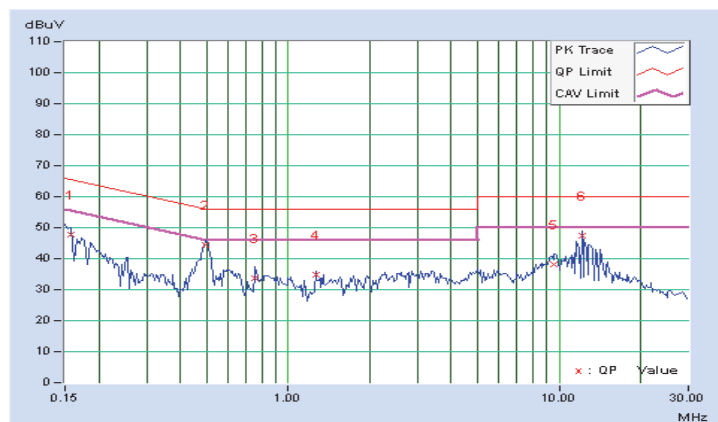


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.19	35.24	19.14	45.43	29.33	65.18	55.18	-19.75	-25.85
2	0.49375	10.30	33.51	28.39	43.81	38.69	56.10	46.10	-12.29	-7.41
3	0.75938	10.29	21.01	17.64	31.30	27.93	56.00	46.00	-24.70	-18.07
4	1.26172	10.32	22.68	18.71	33.00	29.03	56.00	46.00	-23.00	-16.97
5	10.59766	10.62	28.83	25.77	39.45	36.39	60.00	50.00	-20.55	-13.61
6	12.10938	10.66	37.16	36.07	47.82	46.73	60.00	50.00	-12.18	-3.27

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

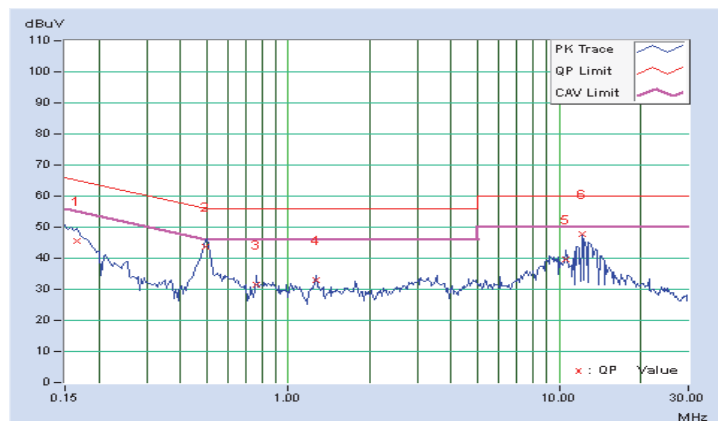


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = average.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.12	10.12	0.5	Pass
6	2437	10.12	10.13	0.5	Pass
11	2462	10.10	10.11	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.41	16.46	0.5	Pass
6	2437	16.37	16.40	0.5	Pass
11	2462	16.39	16.41	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.64	17.65	0.5	Pass
6	2437	17.62	17.60	0.5	Pass
11	2462	17.62	17.62	0.5	Pass



802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.24	36.44	0.5	Pass
6	2437	36.11	36.45	0.5	Pass
9	2452	36.37	35.98	0.5	Pass

Spectrum Plot of Worst Value



802.11b

802.11g

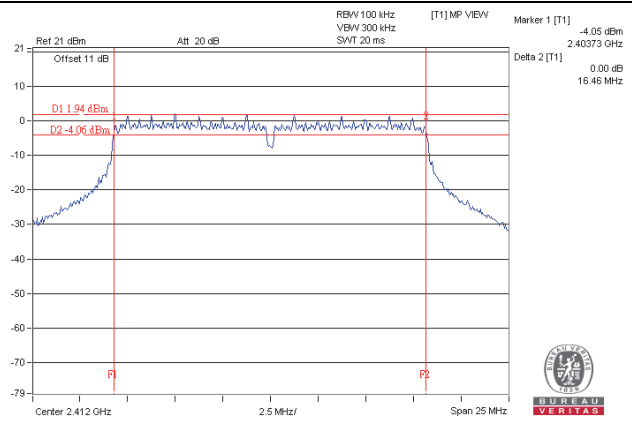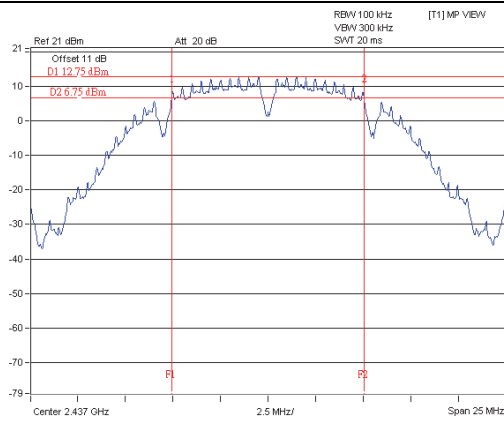

802.11n (HT20)

802.11n (HT40)

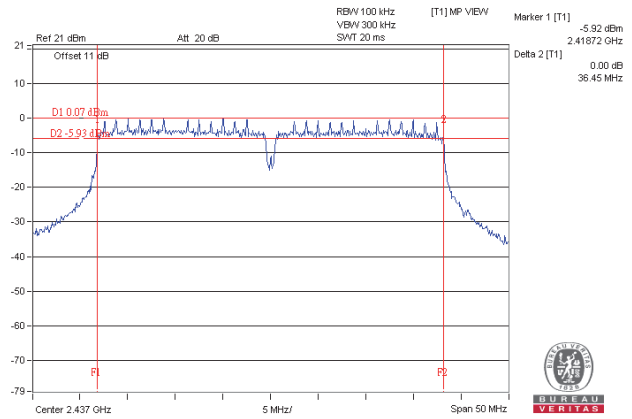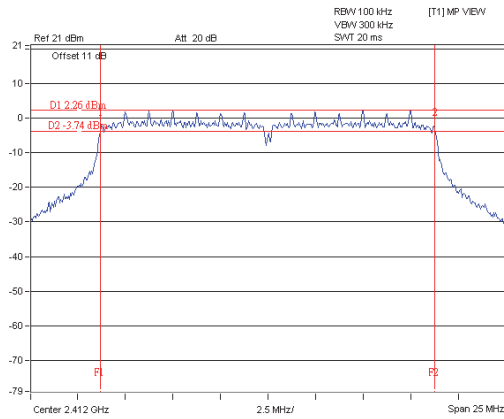

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.50	19.00	150.228	21.77	30	Pass
6	2437	22.83	22.98	390.476	25.92	30	Pass
11	2462	19.15	19.54	172.174	22.36	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	13.97	13.96	49.835	16.98	30	Pass
6	2437	21.94	22.04	316.271	25.00	30	Pass
11	2462	14.92	15.24	64.466	18.09	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	13.81	13.99	49.105	16.91	30	Pass
6	2437	21.64	21.84	298.638	24.75	30	Pass
11	2462	14.33	15.10	59.461	17.74	30	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	11.11	10.91	25.243	14.02	30	Pass
6	2437	14.58	14.41	56.314	17.51	30	Pass
9	2452	13.80	13.14	44.594	16.49	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For duty cycle $\geq 98\%$

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For duty cycle $< 98\%$

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Frequency (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass / Fail
0	1	2412	-17.14	3.01	-14.13	6.65	Pass
	6	2437	-12.05	3.01	-9.04	6.65	Pass
	11	2462	-16.28	3.01	-13.27	6.65	Pass
1	1	2412	-16.35	3.01	-13.34	6.65	Pass
	6	2437	-12.05	3.01	-9.04	6.65	Pass
	11	2462	-15.30	3.01	-12.29	6.65	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 7.35\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.35-6) = 6.65\text{dBm}$

802.11g

TX chain	Channel	Frequency (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass / Fail
0	1	2412	-22.65	3.01	0.15	-19.49	6.65	Pass
	6	2437	-15.27	3.01	0.15	-12.11	6.65	Pass
	11	2462	-22.13	3.01	0.15	-18.97	6.65	Pass
1	1	2412	-23.01	3.01	0.15	-19.85	6.65	Pass
	6	2437	-15.07	3.01	0.15	-11.91	6.65	Pass
	11	2462	-21.78	3.01	0.15	-18.62	6.65	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 7.35\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.35-6) = 6.65\text{dBm}$
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Frequency (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass / Fail
0	1	2412	-23.72	3.01	0.16	-20.55	6.65	Pass
	6	2437	-15.28	3.01	0.16	-12.11	6.65	Pass
	11	2462	-22.77	3.01	0.16	-19.60	6.65	Pass
1	1	2412	-23.11	3.01	0.16	-19.94	6.65	Pass
	6	2437	-15.67	3.01	0.16	-12.50	6.65	Pass
	11	2462	-22.27	3.01	0.16	-19.10	6.65	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 7.35\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.35-6) = 6.65\text{dBm}$
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Channel	Frequency (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass / Fail
0	3	2422	-29.48	3.01	0.29	-26.18	6.65	Pass
	6	2437	-26.01	3.01	0.29	-22.71	6.65	Pass
	9	2452	-26.88	3.01	0.29	-23.58	6.65	Pass
1	3	2422	-29.81	3.01	0.29	-26.51	6.65	Pass
	6	2437	-25.51	3.01	0.29	-22.21	6.65	Pass
	9	2452	-27.43	3.01	0.29	-24.13	6.65	Pass



Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 7.35\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.35-6) = 6.65\text{dBm}$
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11b

802.11g

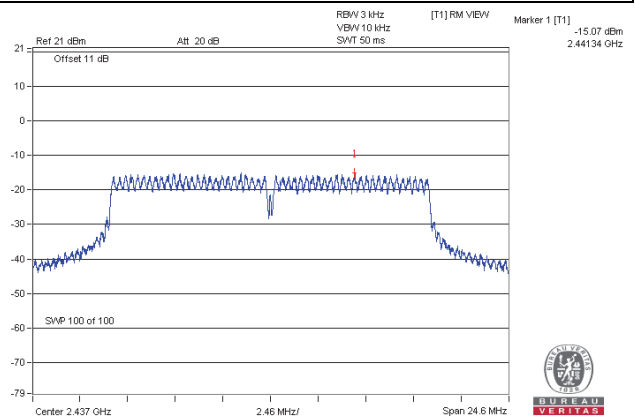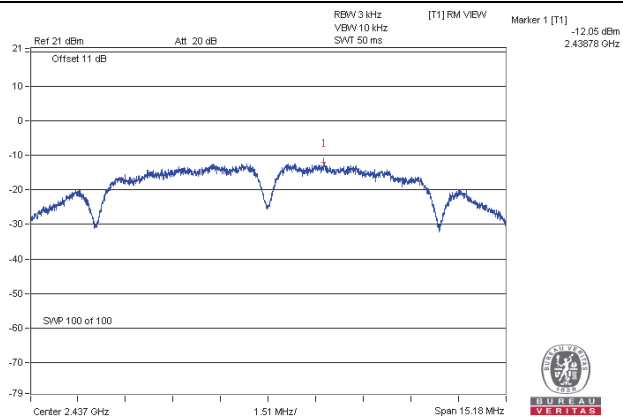

802.11n (HT20)

802.11n (HT40)

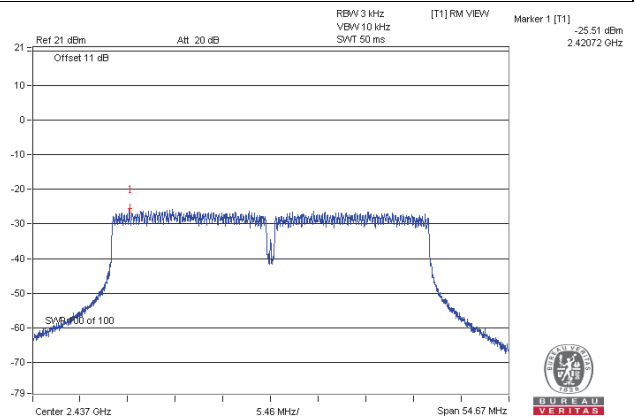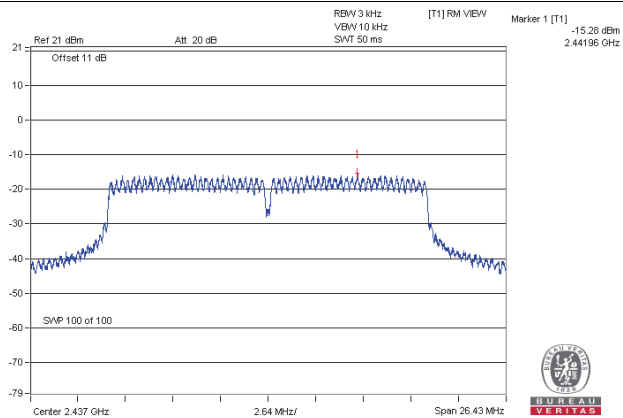


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = average.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Ensure that the number of measurement points $\geq$ span/RBW
- According to measurement points to set differ measurement span.
- Detector = average.
- Trace Mode = max hold.
- Sweep = auto couple.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b_Chain 0


CH 1

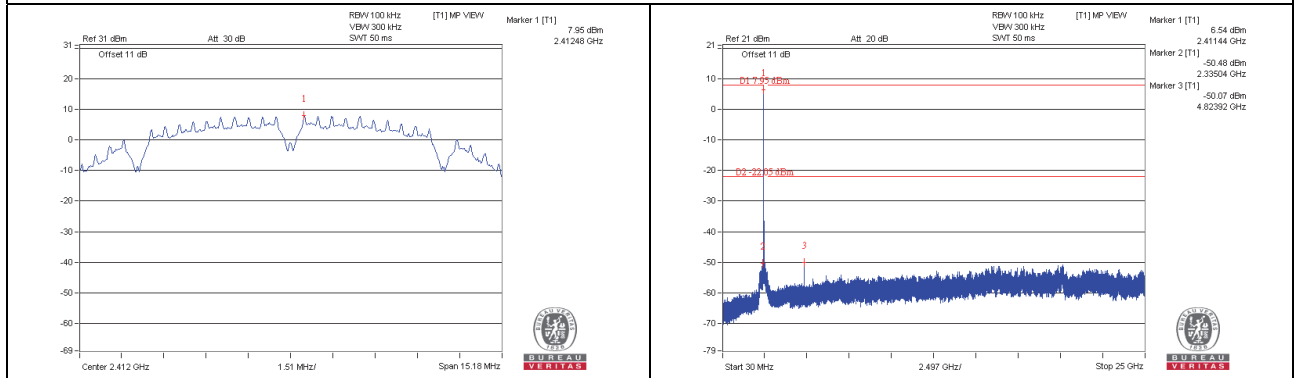


CH 6

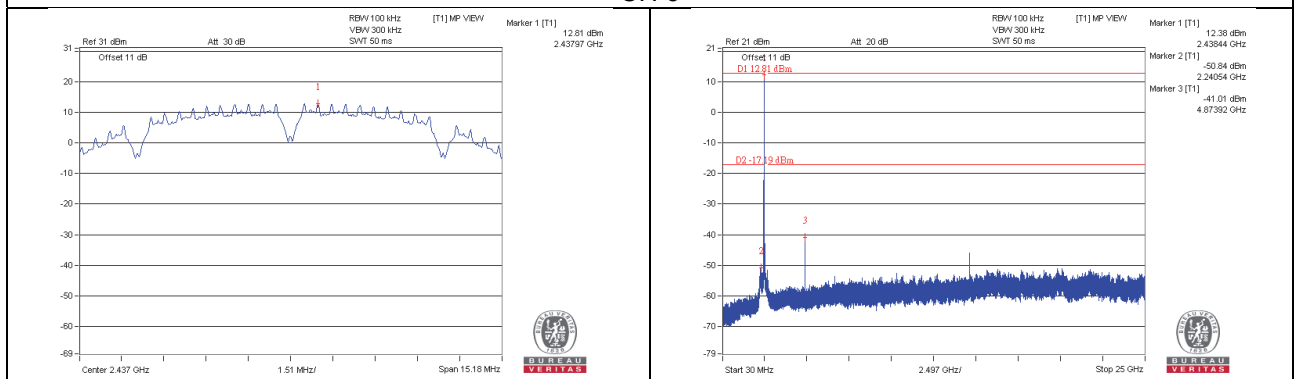

CH 11

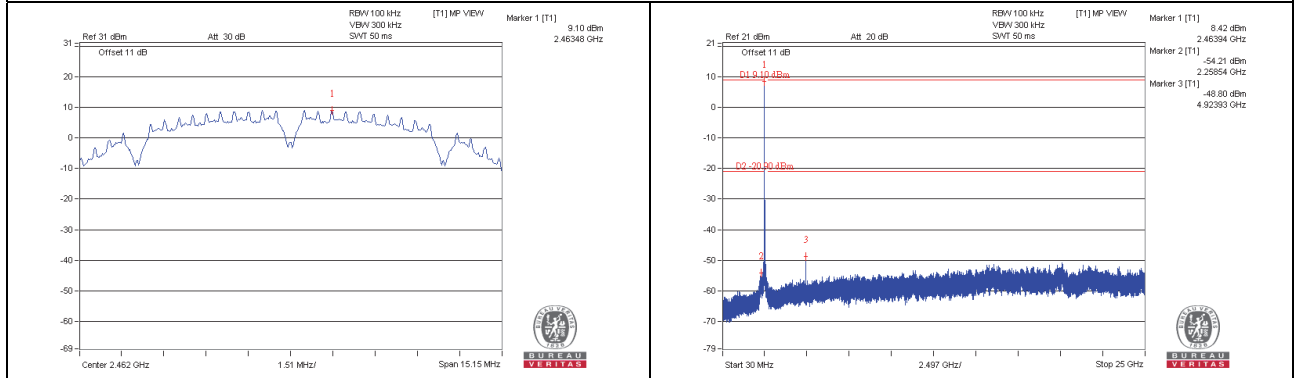


CH 1 Band edge

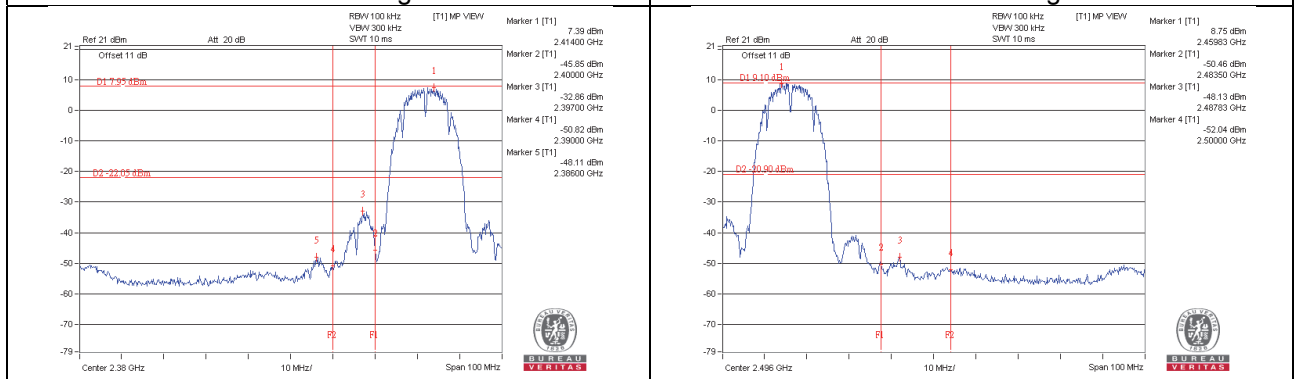


802.11b_Chain 1


CH 1

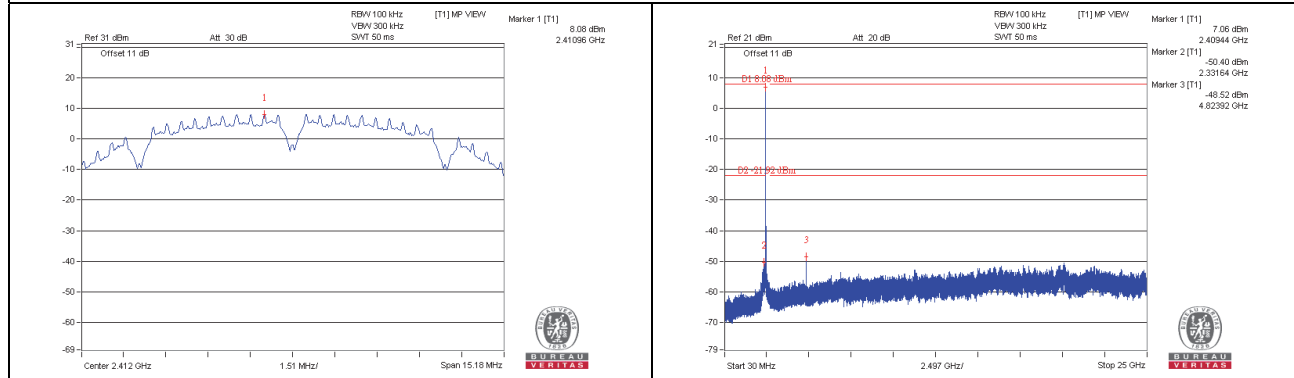


CH 6

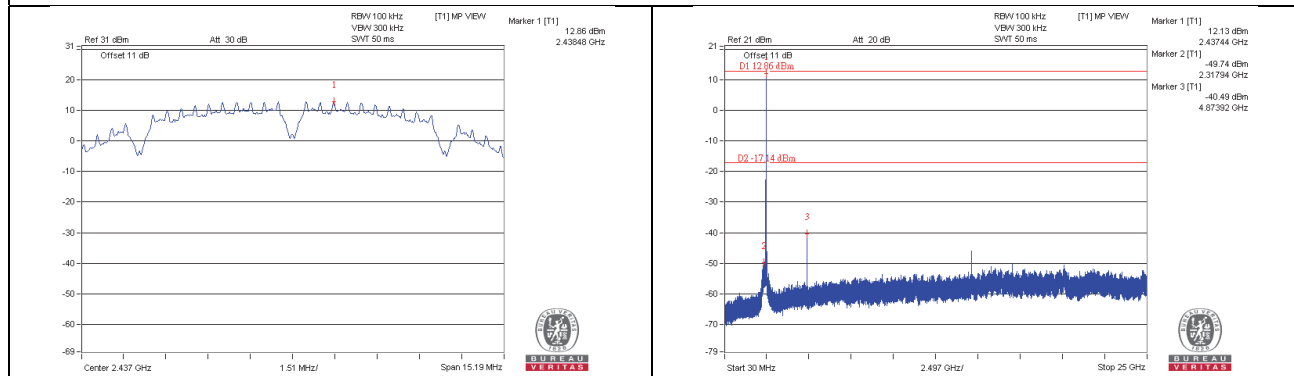


CH 11

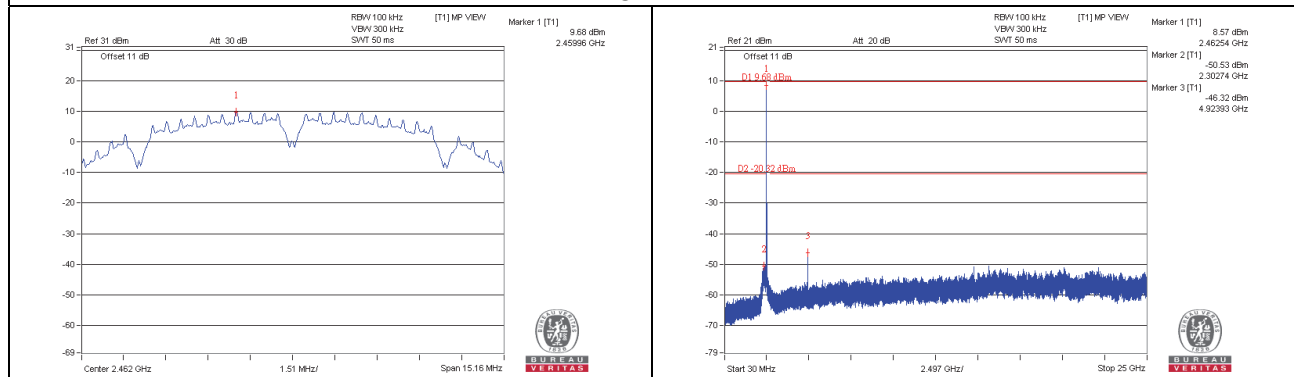

CH 1 Band edge


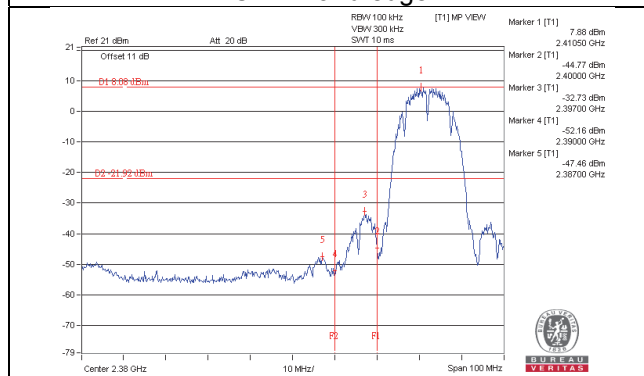


CH 11 Band edge


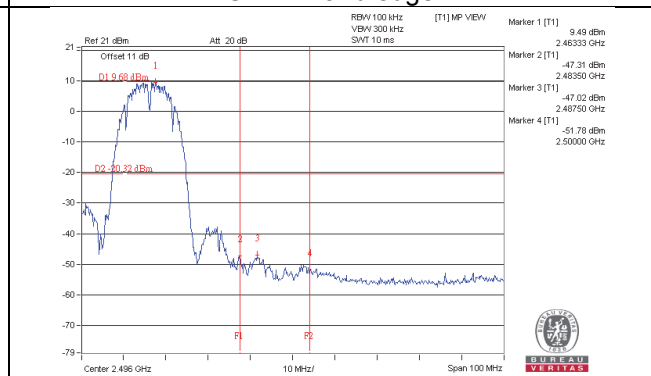


802.11g_Chain 0



CH 1

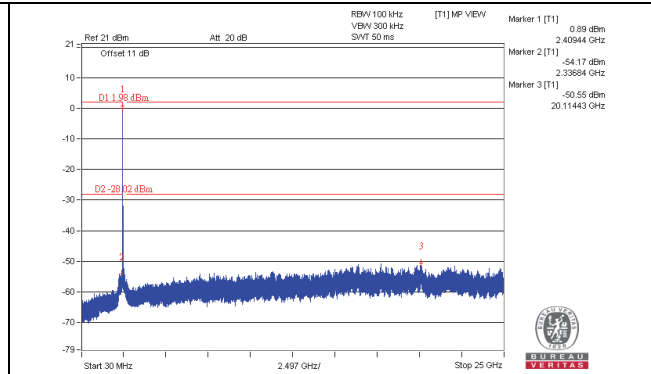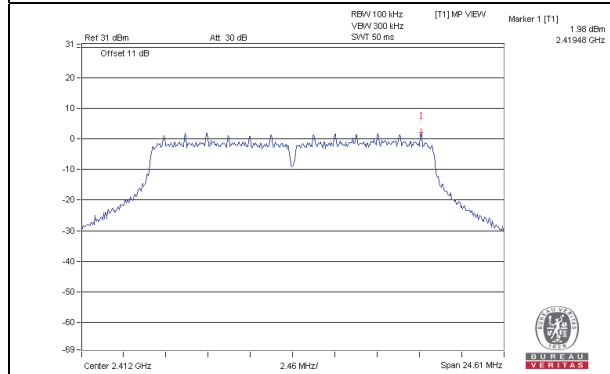


CH 6

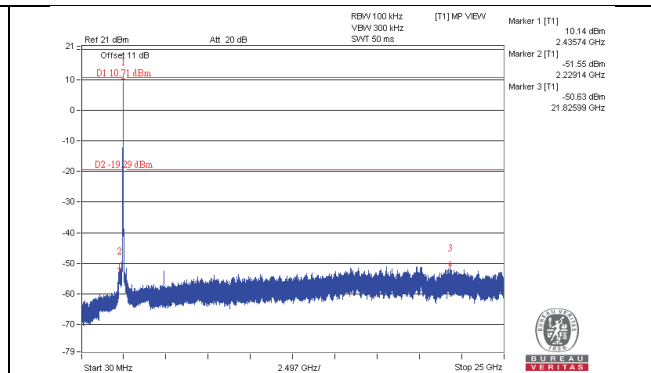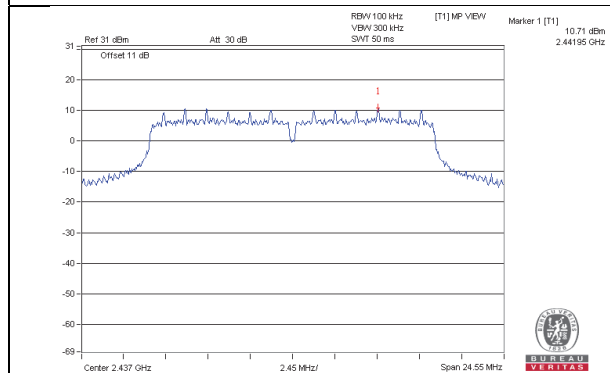


CH 11

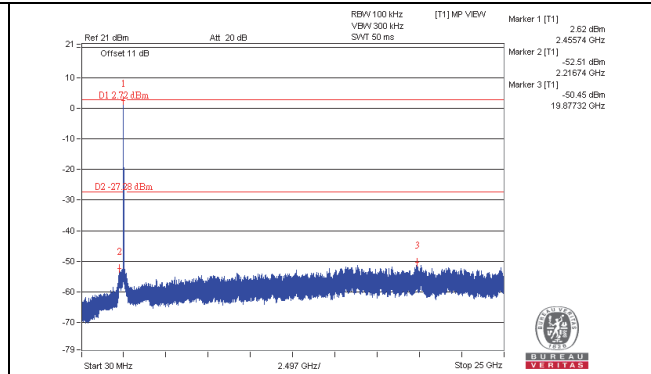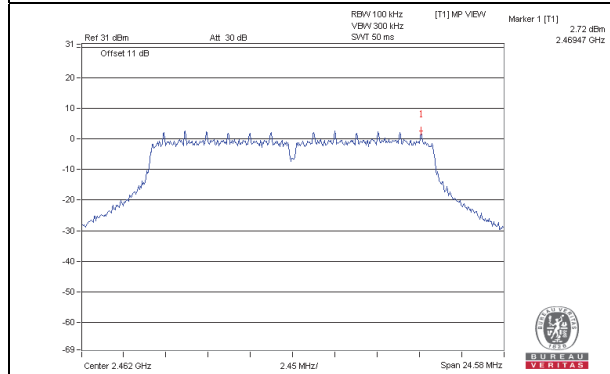

CH 1 Band edge


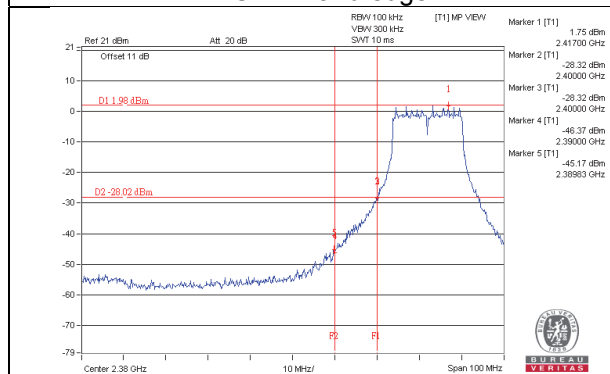


CH 11 Band edge


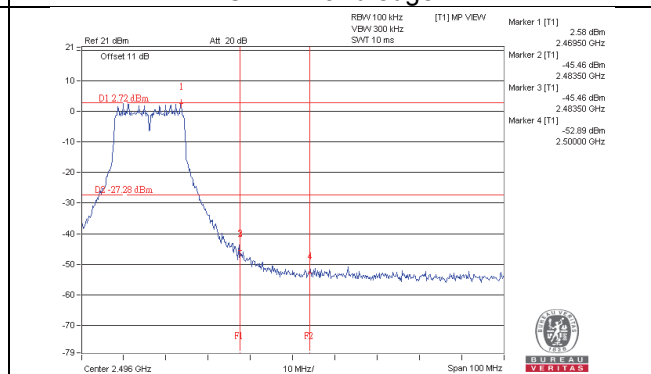


802.11g_Chain 1



CH 1

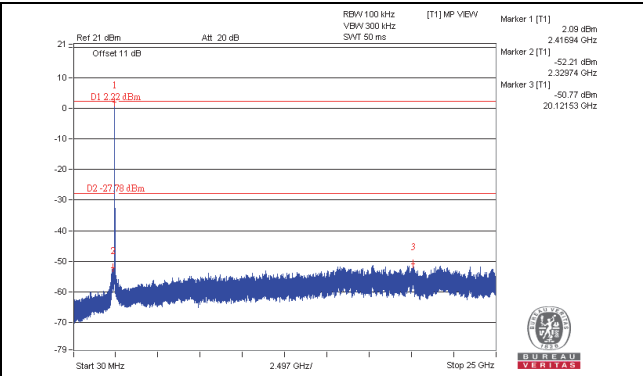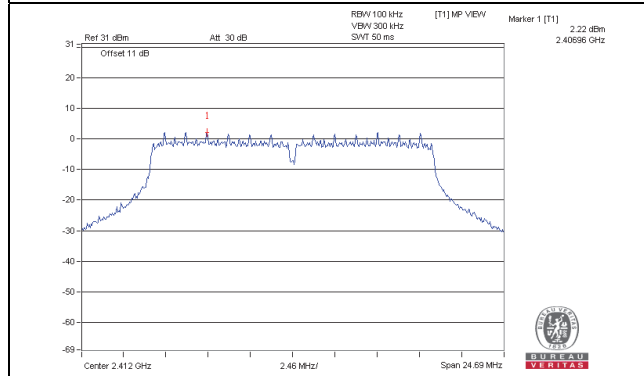


CH 6

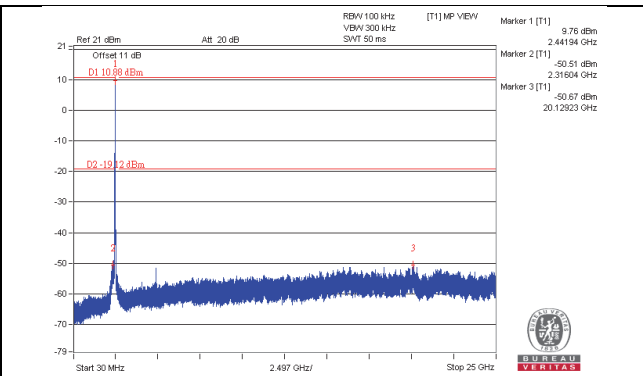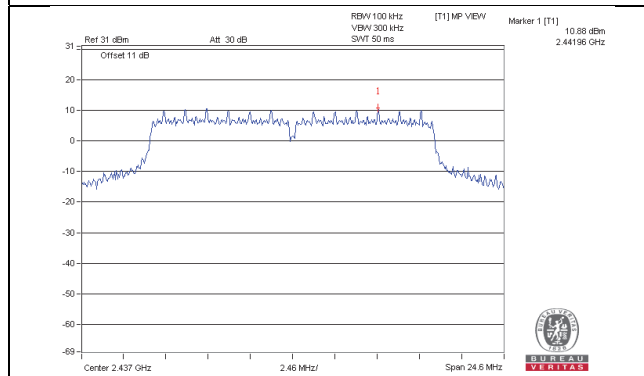


CH 11

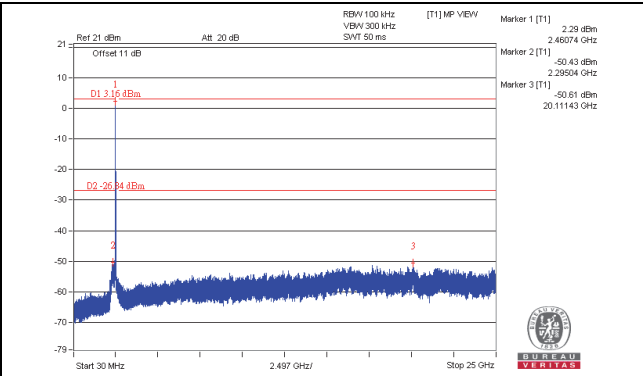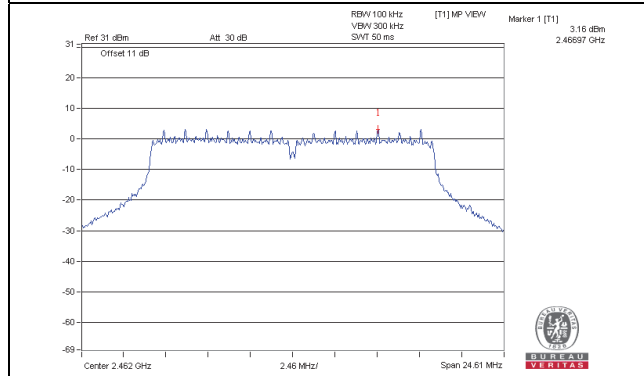

CH 1 Band edge


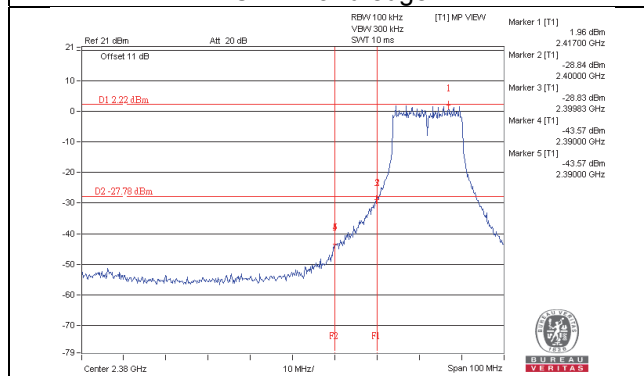


CH 11 Band edge


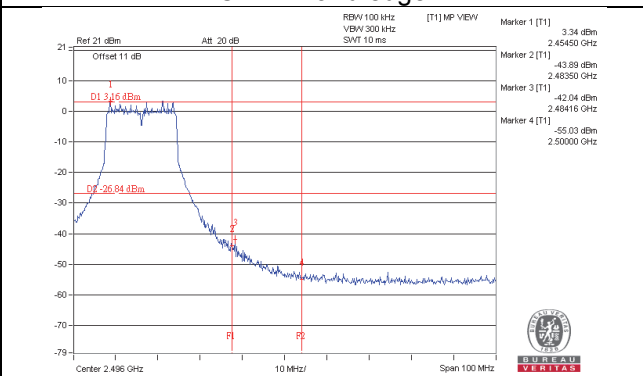


802.11n (HT20)_Chain 0



CH 1

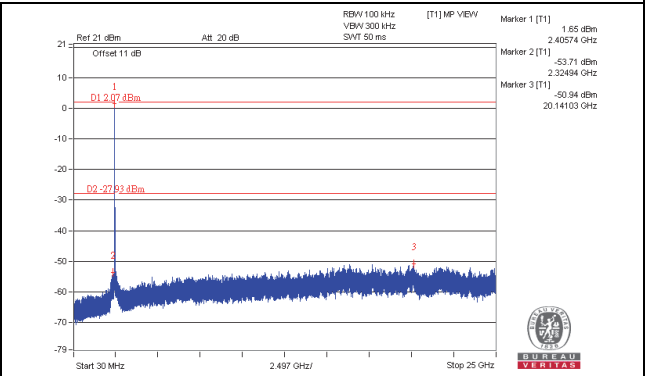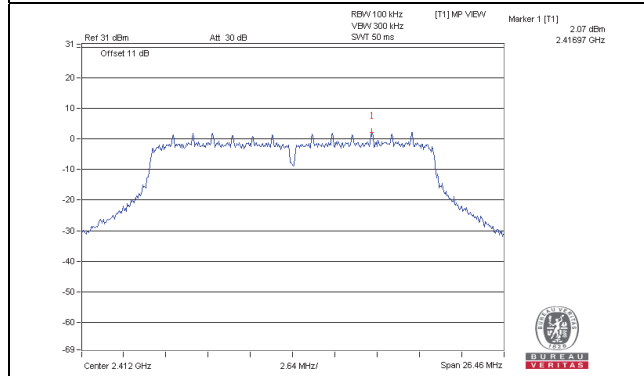


CH 6

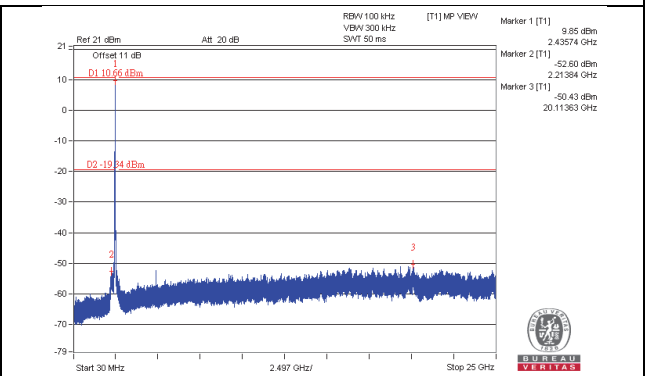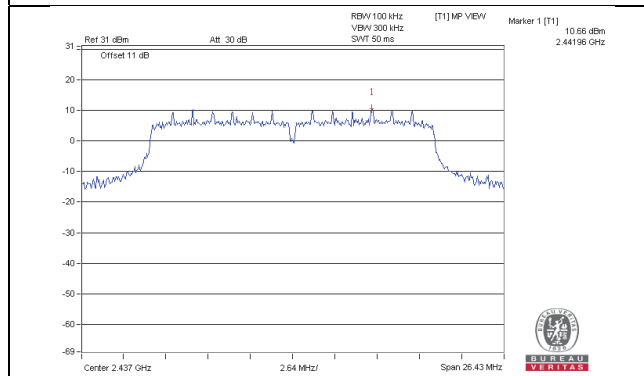


CH 11

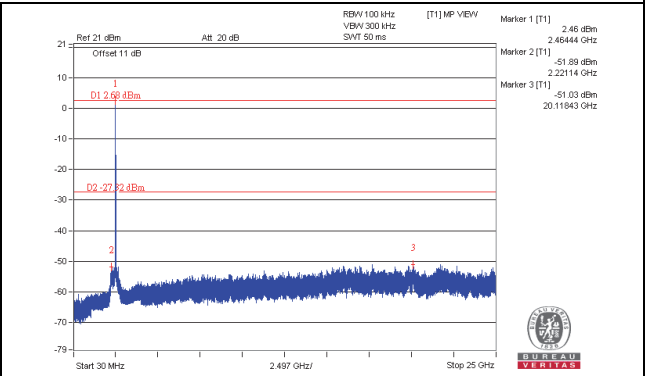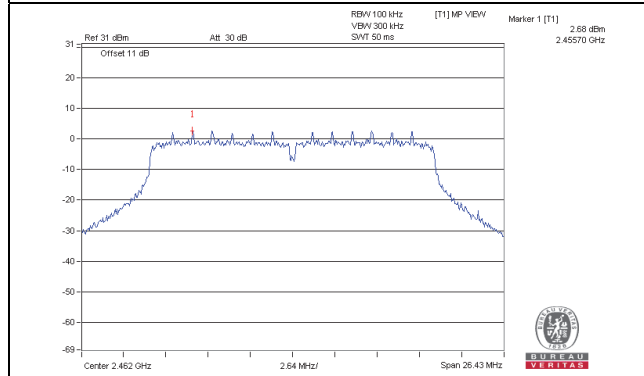

CH 1 Band edge


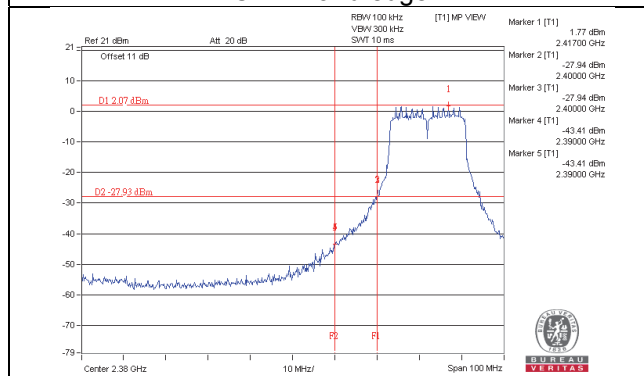


CH 11 Band edge


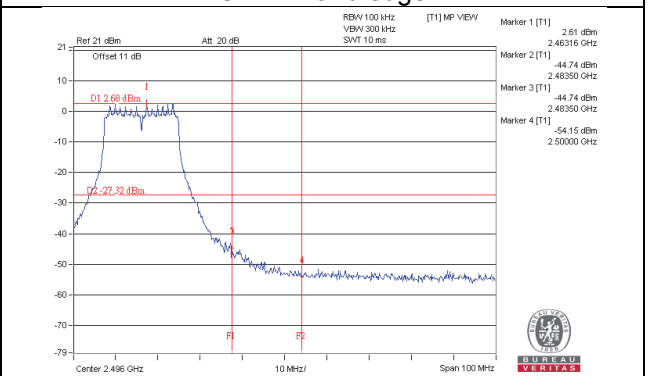


802.11n (HT20)_Chain 1



CH 1

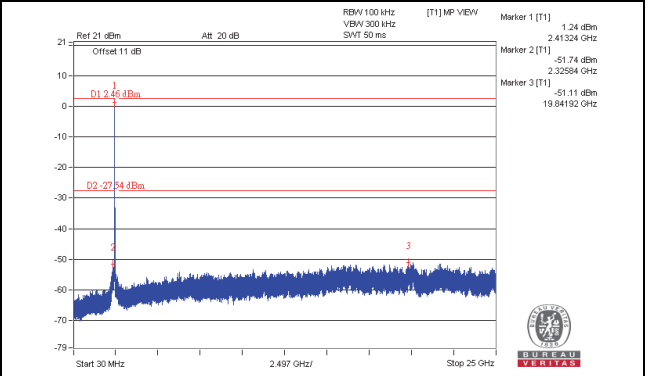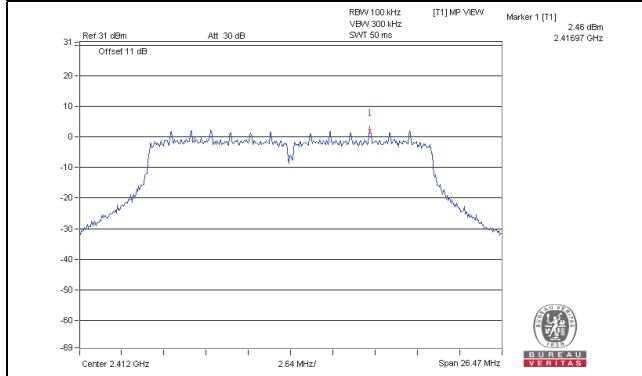


CH 6

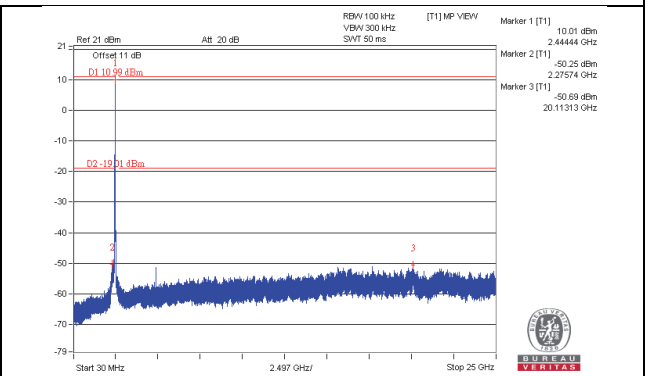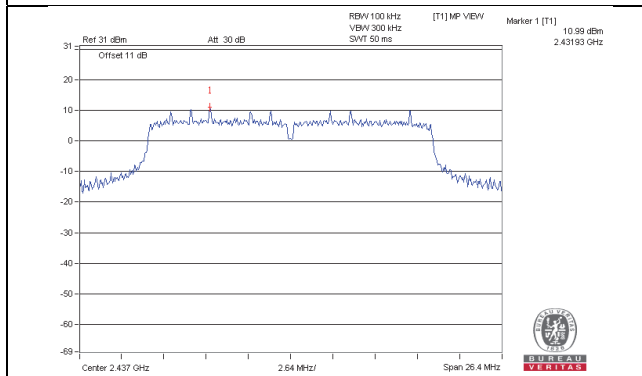


CH 11

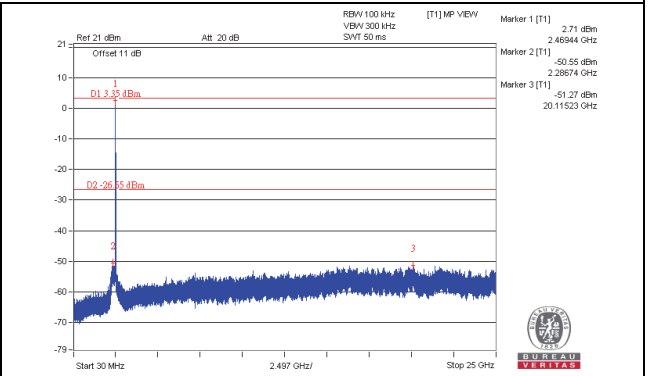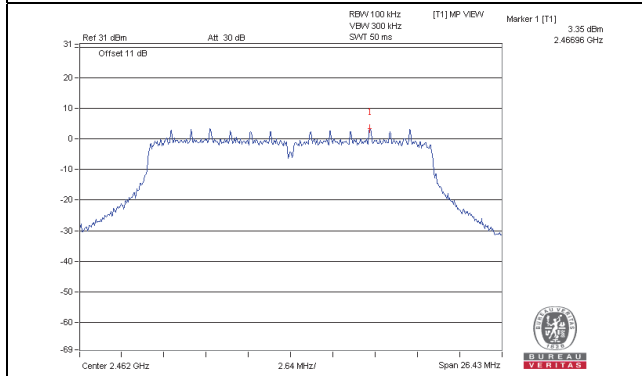

CH 1 Band edge


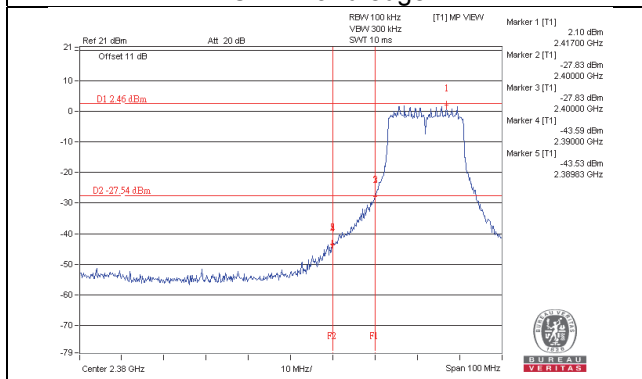


CH 11 Band edge


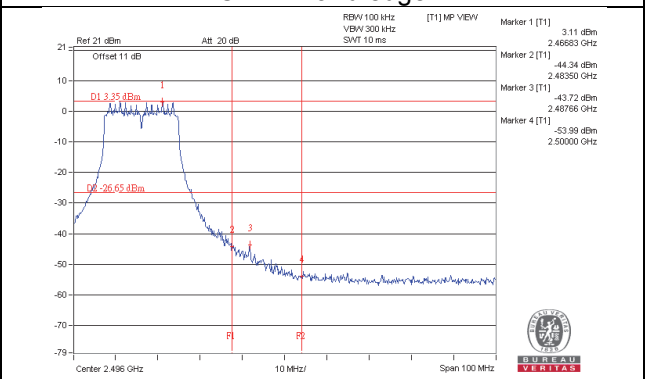


802.11n (HT40)_Chain 0



CH 3

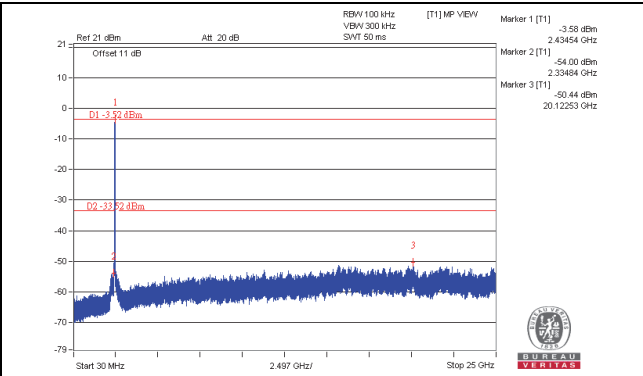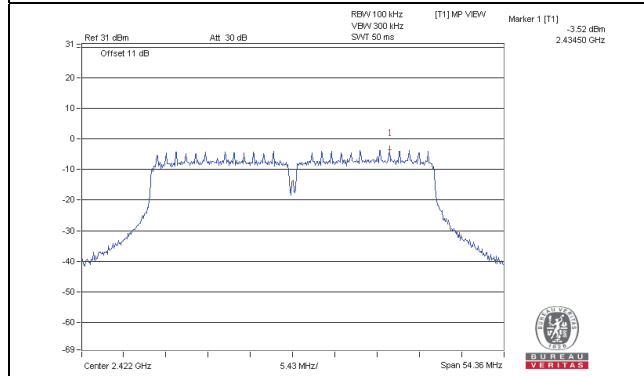


CH 6

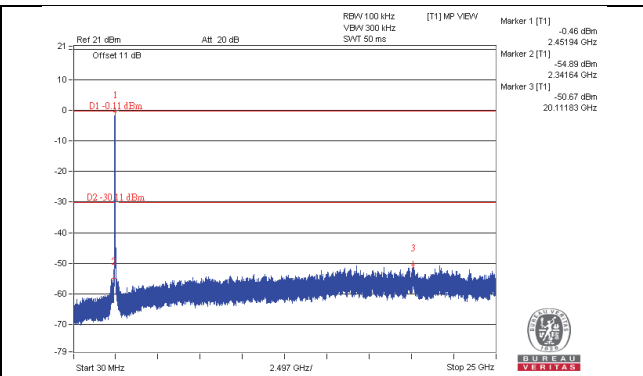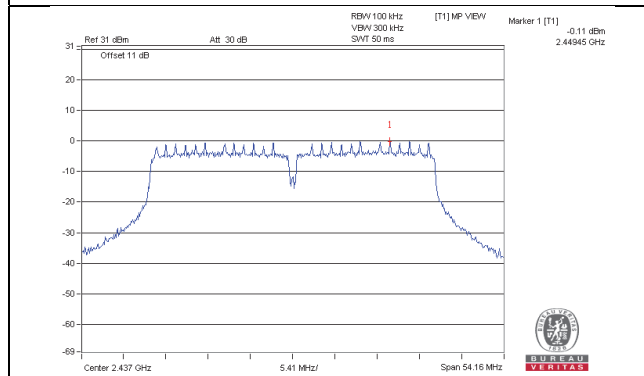


CH 9

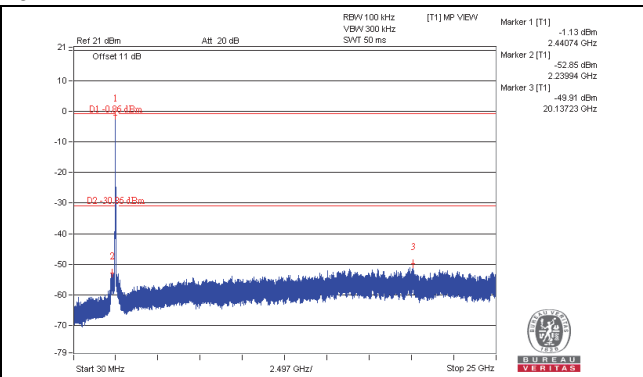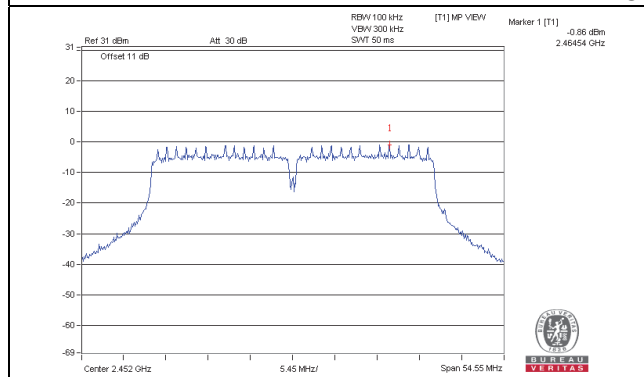

CH 3 Band edge

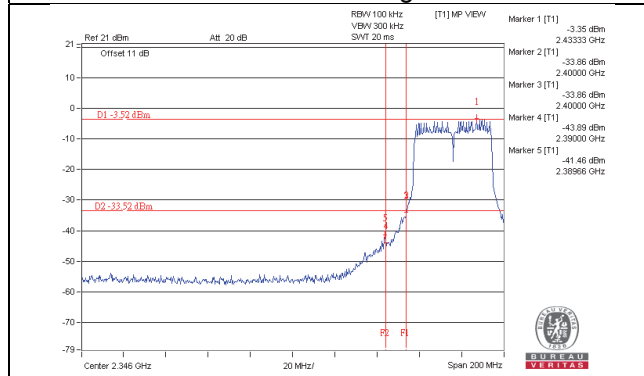


CH 3 Band edge

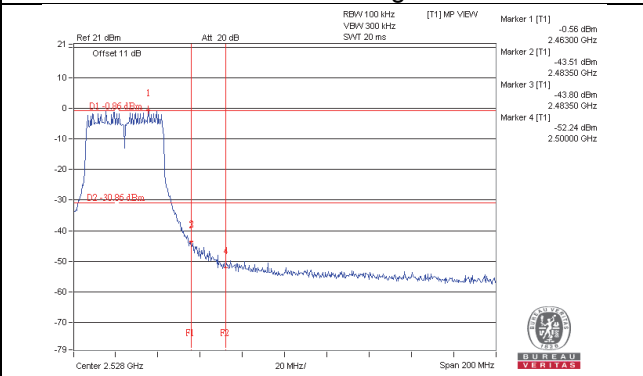


802.11n (HT40)_Chain 1


CH 3

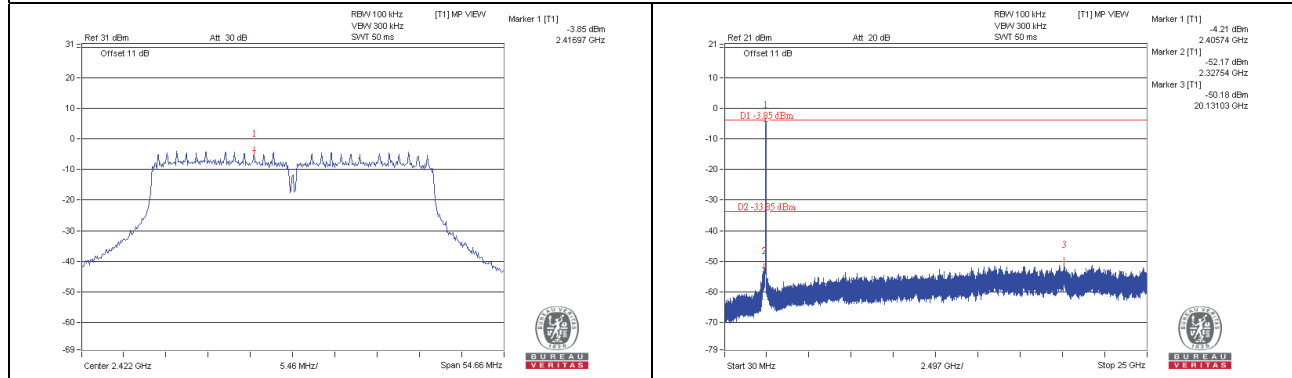


CH 6

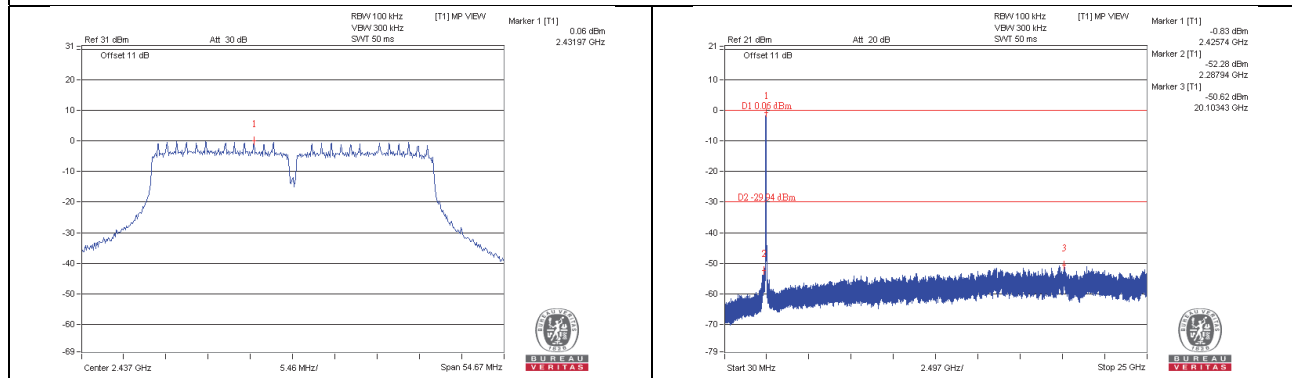


CH 9

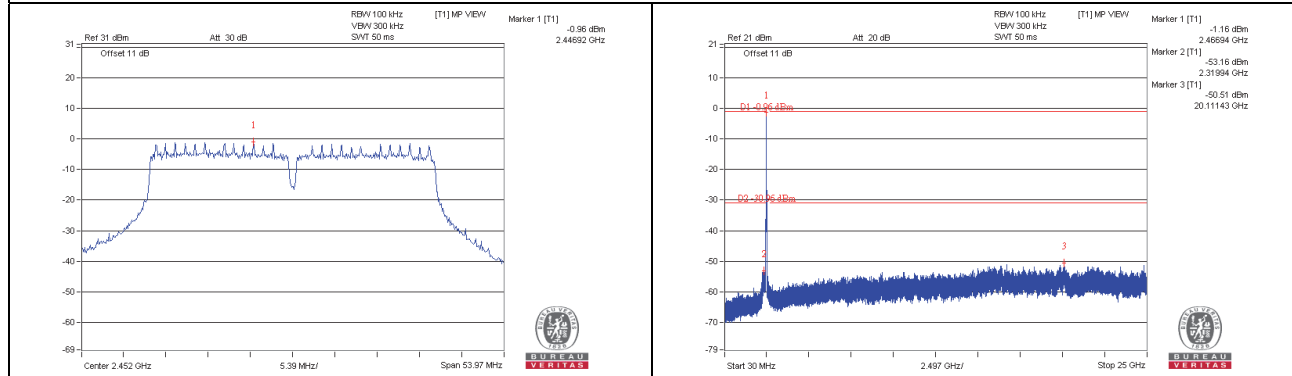

CH 3 Band edge

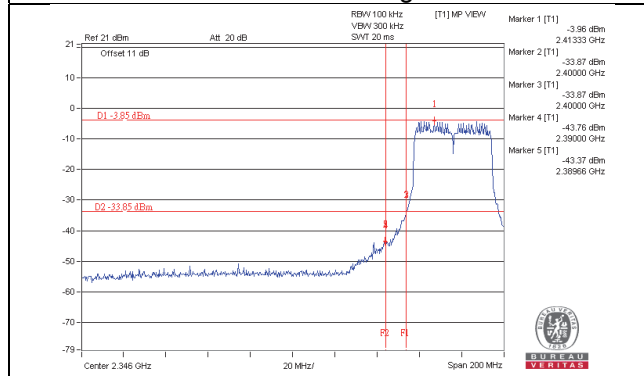

CH 3 Band edge

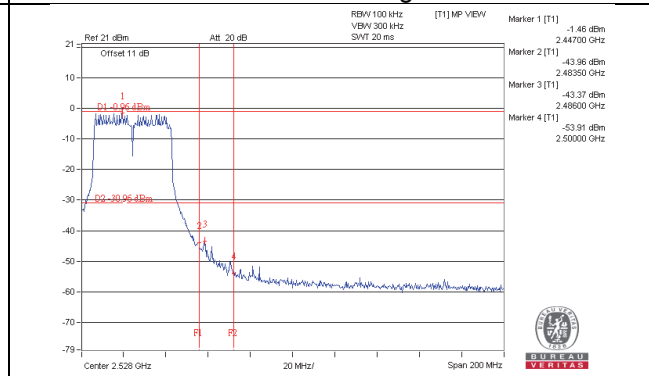

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---