



MOTOROLA

COMMERCIAL, GOVERNMENT, AND INDUSTRIAL
SOLUTION SECTOR (CGISS)

ELECTROMAGNETIC EXPOSURE (EME)
TESTING LABORATORY

8000 West Sunrise Blvd.
Fort Lauderdale, Florida

M.P.E. TEST REPORT
GTX 900 MHz, M11WRD4CB1AN, FCC ID # ABZ99FT3004

Date: June 29, 2000
August 18, 2000 (Rev. A)

Tested/Prepared By:

Jim Fortier
Lead Engineer

Reviewed/Approved By:

Ken Enger
Senior Resource Manager
Product Safety and EME Director

Environmental Evaluation for General Population/Uncontrolled RF Exposure Limits - Pursuant 47 CFR 2.1091 (b)

1.0 FCC Limits Per 47 CFR 2.1091 (b) for General Population/Uncontrolled RF Exposure

MPE (Maximum Permissible Exposure) in Uncontrolled Environments. For human exposure in uncontrolled environments to electromagnetic energy at radio frequencies from 896 - 941 MHz, the MPE, in terms of rms electric/magnetic (E/H) field strengths, the equivalent plane wave free-space power density that can be associated with exposure to such fields is 0.6 mW/cm^2 .

1.1 GENERAL INFORMATION

FCC ID: ABZ99FT3004

Device category: Mobile radio

RF exposure environment: Uncontrolled

Test method: Power Density Measurement

1.2 ANTENNA DECSRIPTION

Antenna Kit #	Antenna Desc.	Antenna Gain	Antenna Length (cm)
RRA4935	Trunk Mount, Gain	3dB	31

2.0 Data Collection Consideration

Power density testing was performed with unit installed in a 1991 Ford Taurus (4-door). Measurement data was taken with vehicle running at idle and vehicle battery measuring 14.0 volts.

3.0 Test Results

Measurements were taken with the antenna located in three areas: the roof center, center trunk, and top center trunk. A summary of results (highest level in each area) is in the following table.

<u>Antenna Location</u>	<u>Antenna</u>	<u>External/Internal</u>	<u>Highest Result</u>
Roof Center	RRA4935	External	0.07 mW/cm ²
Center Trunk	RRA4935	External	0.08 mW/cm ²
Roof Center	RRA4935	Internal	0.017 mW/cm ²
Top Center Trunk	RRA4935	Internal	0.05 mW/cm ²

Although the measured RF power of this radio was 30 watts, under any condition of permissible tuning, frequency, voltage, and temperature, the maximum RF power delivered to the antenna connector of this radio can be as high as 40 watts. As a result, the calculated power density (mW/cm²) for the maximum power condition using the highest power density in the above table could be is 0.11 mW/cm².

4.0 Measurement System Uncertainty Levels

Table 1.4 below lists an estimate of the possible errors that are associated with the measurement system.

<u>Description</u>	<u>Error</u>
NARDA Survey Meter	± 3%
Repeatability Accuracy	± 5%

5.0 Method of Measurement

5.1 EME MEASUREMENTS MADE ON CENTER ROOF MOUNTED ANTENNAS (for reference, see Antenna Location Layout drawings in Appendix)

5.1.1 EXTERNAL VEHICLE EME MEASUREMENT

With the survey meter and probe, take ten (10) measurements, at the standard test distance of 20 cm from the side of the vehicle, in a vertical line and then average the results. These measurements are taken and recorded at every twenty (20) centimeters over a range starting at twenty (20) centimeters above ground and ending at 2.0 meters; this would be representative of a person standing next to a vehicle during a mobile radio transmission.

5.1.2 INTERNAL VEHICLE EME MEASUREMENT

While rotating survey meter probe through 180 degrees to ensure that the highest level is found, scan the inside of the vehicle, both front and back seating areas, for the highest level in each location. After the highest level is found, scan vertically making two (2) additional measurements within an area approximately 40 cm wide (representing the width of a person) so as to have a total of three (3) measured points as indicated below that will be averaged.

- a) Head area
- b) Chest area
- c) Lower Trunk area

5.2 EME MEASUREMENTS MADE ON TRUNK MOUNTED ANTENNAS (for reference, see Antenna Location Layout drawings in Appendix)

5.2.1 EXTERNAL VEHICLE EME MEASUREMENT (Antenna mounted in trunk center)

With the survey meter and probe take ten (10) measurements, at the standard test distance of 60 cm to antenna, from the back of the vehicle in a vertical line and then average the results. These measurements are taken and recorded at every twenty (20) centimeters over a range starting at twenty (20) centimeters above ground and ending at 2.0 meters; this would be representative of a person standing behind a vehicle during a mobile radio transmission.

5.2.2 INTERNAL VEHICLE EME MEASUREMENT (Antenna mounted at top center trunk)

While rotating survey meter probe through 180 degrees to ensure that the highest level is found, scan the inside of the vehicle, both front and back seating areas, for the highest level in each location. After the highest level is found, scan vertically making two (2) additional measurements within an area approximately 40 cm wide (representing the width of a person) so as to have a total of three (3) measured points as indicated below that will be averaged.

- a) Head area
- b) Chest area
- c) Lower Trunk area

6.0 Test Site

The test site is the Motorola Commercial, Government, Industrial Solution Sector (CGISS) world wide electromagnetic exposure (EME) open area test site located at 8000 W. Sunrise Blvd., Plantation, Fl. 33322.

7.0 Measurement System/Equipment

The minimum equipment required will mainly consist of a test vehicle, radio frequency radiation test set consisting of a Electromagnetic Radiation Survey Meter, E-Field Test Probe, and typical antenna configurations.

Below is the specific equipment currently in use by CGISS:

- a) Automobile: 1991 Ford Taurus, 4-Door
- b) Survey Meter - NARDA Model 8718
- c) E-Field (Electric Field) Probe - NARDA Model 8722B (300 kHz - 40 Ghz)
- d) H-Field (Magnetic Field) Probe – NARDA Model 8731 (10 MHz – 300 MHz)
- e) H-Field (Magnetic Field) Probe – NARDA Model 8732 (300 kHz – 200 MHz)
- f) Antennas - (Quarter wave and 3 dB Gain)

8.0 Test Unit Description

Power density measurements were performed on a GTX mobile transceiver; model number M11WRD4CB1AN and serial number PROFAL0001. The frequency band of the radio was 896 - 941 MHz; the test frequency was 899.000 MHz. The mobile antenna used was a 3 dB gain.


9.0 Test Set-Up Description

Following are the standard mobile antenna test configurations used for this product. (for reference, see Antenna Location Layout drawings in Appendix)

- a) 3 dB gain antenna, RRA4935, mounted in the center of the roof.
- b) 3 dB gain antenna, RRA4935, mounted in the center of the trunk.
- c) 3 dB gain antenna, RRA4935, mounted in the top center of the trunk for internal vehicle EME measurements only.

APPENDIX

ANTENNA LOCATION DRAWING

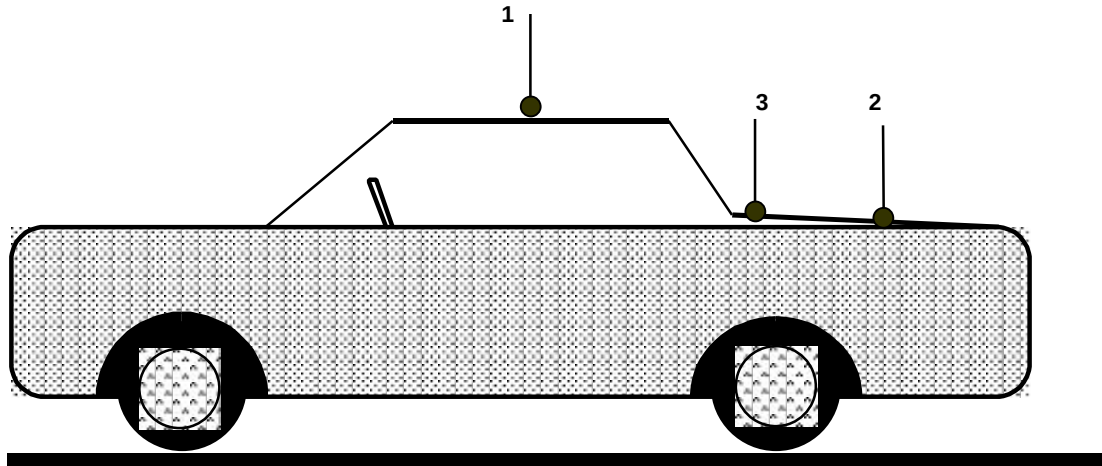

- 1 - Roof (center)
- 2 - Trunk (center)
- 3 - Trunk lip mount (top/center)

