



Measurement of RF Emissions from a Model PMLN6233A Transceiver

For	Motorola, Inc. 1301 E. Algonquin Road Schaumburg, IL 60196
P.O. Number	NP5534153
Date Tested	October 24, 2012 through November 6, 2012
Test Personnel	Mark E. Longinotti, Ian Carnegie
Test Specification	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.247 for Frequency Hopping Spread Spectrum Intentional Radiators Operating within the band 2400-2483.5MHz Industry Canada RSS-GEN Industry Canada RSS-210
Test Report By:	<i>Mark E. Longinotti</i> Mark E. Longinotti EMC Engineer
Requested By:	Larry Larsen Motorola, Inc.
Approved By:	<i>Raymond J. Klouda</i> Raymond J. Klouda Registered Professional Engineer of Illinois - 44894

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1	Introduction.....	5
1.1	Scope of Tests.....	5
1.2	Purpose	5
1.3	Deviations, Additions and Exclusions.....	5
1.4	EMC Laboratory Identification	5
1.5	Laboratory Conditions.....	5
2	Applicable Documents.....	5
3	EUT Setup and Operation.....	6
3.1	General Description	6
3.1.1	Power Input	6
3.1.2	Peripheral Equipment.....	6
3.1.3	Signal Input/Output Leads.....	6
3.1.4	Grounding.....	6
3.2	Operational Mode	6
3.3	EUT Modifications.....	6
4	Test Facility and Test Instrumentation	6
4.1	Shielded Enclosure.....	6
4.2	Test Instrumentation.....	6
4.3	Calibration Traceability	6
4.4	Measurement Uncertainty	7
5	Test Procedures	7
5.1	Receiver.....	7
5.2	Transmitter.....	7
5.2.1	Powerline Conducted Emissions.....	7
5.2.2	20dB Bandwidth	7
5.2.2.1	Requirement	7
5.2.2.2	Procedures	7
5.2.2.3	Results.....	8
5.2.3	Carrier Frequency Separation	8
5.2.3.1	Requirements	8
5.2.3.2	Procedures	8
5.2.3.3	Results.....	8
5.2.4	Number of Hopping Frequencies	8
5.2.4.1	Requirements	8
5.2.4.2	Procedures	8
5.2.4.3	Results.....	8
5.2.5	Time of Occupancy	9
5.2.5.1	Requirements	9
5.2.5.2	Procedures	9
5.2.5.3	Results.....	9
5.2.6	Peak Output Power	9
5.2.6.1	Requirements	9
5.2.6.2	Procedures	9
5.2.6.3	Results.....	9

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
5.2.7	Duty Cycle Factor Measurements	10
5.2.7.1	Requirements	10
5.2.7.2	Procedures	10
5.2.8	Radiated Spurious Emissions Measurements	10
5.2.8.1	Requirements	10
5.2.8.2	Procedures	11
5.2.8.3	Results	12
5.2.9	Band Edge Compliance	12
5.2.9.1	Requirement	12
5.2.9.2	Procedures	12
5.2.9.3	Results	13
5.2.10	Power Spectral Density	13
5.2.10.1	Requirements	13
5.2.10.2	Procedures	13
5.2.10.3	Results	14
6	Other Test Conditions	14
6.1	Test Personnel and Witnesses	14
6.2	Disposition of the EUT	14
7	Conclusions	14
8	Certification	14
9	Equipment List	16

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

Revision	Date	Description
—	November 19, 2012	Initial release

Measurement of RF Emissions from a Transceiver, Model No. PMLN6233A

1 INTRODUCTION

1.1 Scope of Tests

This report represents the results of the series of radio interference measurements performed on a Motorola, Inc. transceiver, Model No. PMLN6233A, Serial No. Sample #1, (hereinafter referred to as the EUT). The EUT is a Bluetooth hybrid frequency hopping spread spectrum transceiver. The transmitter was designed to transmit and receive in the 2400-2483.5 MHz band using an internal antenna. The EUT was manufactured and submitted for testing by Motorola, Inc. located in Schaumburg, IL.

1.2 Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, for receivers and Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 2400-2483.5MHz band.

The test series was also performed to determine if the EUT meets the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.4 and Section 6 for receivers and the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.4 and RSS-210 Annex 8 for transmitters.

Testing was performed in accordance with ANSI C63.4-2003.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by The American Association for Laboratory Accreditation (A2LA). A2LA Certificate Number: 1786.01.

1.5 Laboratory Conditions

The temperature at the time of the test was 21.5°C and the relative humidity was 33%.

2 APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subparts B and C, dated 1 October 2012
- ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- FCC Public Notice, DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems", Released March 30, 2000
- Industry Canada Radio Standards Specification, RSS-Gen, "General Requirements and Information for the Certification of Radiocommunication Equipment", Issue 3, December 2010

- Industry Canada Radio Standards Specification, RSS-210, "Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment", Issue 8, December 2010

3 EUT SETUP AND OPERATION

3.1 General Description

The EUT is a Motorola, Inc., transceiver, Model No. PMLN6233A.

A block diagram of the EUT setup is shown as Figure 1.

3.1.1 Power Input

The EUT obtained 4.7VDC from an internal rechargeable lithium ion battery.

3.1.2 Peripheral Equipment

No peripheral equipment was submitted with the EUT.

3.1.3 Signal Input/Output Leads

No interconnect cables were submitted with the EUT for testing.

3.1.4 Grounding

The EUT was not grounded during the tests.

3.2 Operational Mode

For all tests, the EUT was placed on an 80cm high non-conductive stand. The EUT was energized. The unit was programmed to operate in one of the following modes:

- Transmit at 2402 MHz
- Transmit at 2441 MHz
- Transmit at 2480 MHz
- Frequency Hopping Enabled
- Inquiry Mode

3.3 EUT Modifications

No modifications were required for compliance.

4 TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emissions Measurements			
Combined Standard Uncertainty		1.07	-1.07
Expanded Uncertainty (95% confidence)		2.1	-2.1

Radiated Emissions Measurements			
Combined Standard Uncertainty		2.26	-2.18
Expanded Uncertainty (95% confidence)		4.5	-4.4

5 TEST PROCEDURES

5.1 Receiver

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Section 15.101(b), receivers operating above 960MHz are exempt from complying with the technical provisions of part 15.

Per Industry Notice 2012-DRS0126, Regulatory Standards Notice – Changes to RSS-Gen Issue 3 and RSS-310 Issue 3, section 2.2.3 of RSS-Gen Issue 3 now states that: "Only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements, as described above. All other receivers are excluded from any Industry Canada certification, testing, labeling and reporting requirements." Since the receiver operates above 960MHz, the receiver is exempt from complying with the technical provisions of the RSS standards.

5.2 Transmitter

5.2.1 Powerline Conducted Emissions

Since the EUT was powered by internal batteries, no conducted emissions tests were performed.

5.2.2 20dB Bandwidth

5.2.2.1 Requirement

Per section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125mW.

5.2.2.2 Procedures

The EUT was setup inside the chamber. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to > to 1% of the 20 dB BW. The span was set to approximately 2 to 3 times the 20 dB bandwidth.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.2.2.3 Results

The plots on pages 22 through 24 show that the maximum 20 dB bandwidth was 753.5kHz. The 99% bandwidth was measured to be 736.7 kHz.

5.2.3 Carrier Frequency Separation

5.2.3.1 Requirements

Per section 15.247 (a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Per section 15.247(a)(1), alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125mW.

5.2.3.2 Procedures

The EUT was setup inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to > to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels.

5.2.3.3 Results

Page 25 shows the carrier frequency separation. As can be seen from this plot, the carrier frequency separation is 1MHz which is greater than the 20dB bandwidth of the hopping channel (753.5kHz).

5.2.4 Number of Hopping Frequencies

5.2.4.1 Requirements

Per section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400-2483.5MHz band that employ at least 15 hopping channels must have a maximum peak conducted output power that does not exceed 0.125W (21dBm).

Per 15.247(b)(1), frequency hopping systems operating in the 2400- 2483.5MHz band that employ at least 75 non-overlapping hopping channels must have a maximum peak conducted output power that does not exceed 1W (30dBm).

5.2.4.2 Procedures

The EUT was set up inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to > to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.

The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

5.2.4.3 Results

Page 26 shows the number of hopping frequencies. As can be seen from this plot, the number of hopping frequencies is 79 which is greater than 75 which is the minimum number of required hopping frequencies for systems operating in the 2400-2483.5MHz band that have a maximum peak conducted output power that does not exceed 1W (30dBm).

5.2.5 Time of Occupancy

5.2.5.1 Requirements

Per section 15.247(a)(1)(iii), for frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.2.5.2 Procedures

The EUT was setup inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. The analyzer's display was plotted using a 'screen dump' utility. Then, the sweep time was expanded to 0.4 seconds multiplied by the number of hopping channels employed to capture the number of hops in the appropriate sweep time. A single sweep was made. The analyzer's display was plotted using a 'screen dump' utility. The dwell time in the specified time period was then calculated from dwell time per hop multiplied by the number of hops in the specified time period.

5.2.5.3 Results

Pages 27 and 28 show the plots for the time of occupancy (dwell time). As can be seen from the plots, the time of occupancy can be determined by 408.8usec/hop multiplied by 321 hops. This calculated value is equal to 0.131 seconds which is less than the 0.4 seconds maximum allowed.

5.2.6 Peak Output Power

5.2.6.1 Requirements

Per section 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5MHz band and employing at least 75 non-overlapping hopping channels, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below 30dBm by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.6.2 Procedures

The EUT was placed on the non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a double ridged waveguide antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss and antenna gain, as required. The peak power output was calculated for low, middle, and high hopping frequencies.

5.2.6.3 Results

The results are presented on page 29. The maximum EIRP measured from the transmitter was 8.5dBm or

0.007W which is below the 4 Watt limit.

5.2.7 Duty Cycle Factor Measurements

5.2.7.1 Requirements

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

5.2.7.2 Procedures

- a. The EUT was placed on the non-conductive stand and set to transmit continuously with hopping enabled.
- b. A double ridged waveguide antenna was positioned at a 3 meter distance from the EUT. The output of the antenna was connected to the input of a spectrum analyzer.
- c. The center frequency of the spectrum analyzer was set to the transmit frequency of the EUT.
- d. The frequency span of the spectrum analyzer was set to 0Hz so that the time domain trace of the transmitted pulse of the EUT was displayed on the spectrum analyzer.
- e. The sweep time of the spectrum analyzer was adjusted so that the beginning and end of a single pulse could be seen on the display of the spectrum analyzer.
- f. The single sweep function of the spectrum analyzer was used multiple times to determine the maximum pulse width of the EUT.
- g. The maximum pulse width display of the spectrum analyzer was recorded and then plotted using a 'screen dump' utility.
- h. The sweep time of the spectrum analyzer was then adjusted to 100msec.
- i. The single sweep function of the spectrum analyzer was used multiple times to determine the maximum number of transmitted pulses that occurred in a 100msec time period.
- j. The maximum number of pulses transmitted in a 100msec time period was recorded and then plotted using a 'screen dump' utility.
- k. The duty cycle correction was calculated using the following equation:

$$\text{Duty Cycle Correction Factor (dB)} = \text{D.C. (dB)}$$
$$\text{D.C. (dB)} = 20 \times \log [(\text{pulse width (msec)}) \times (\#\text{pulses in a 100msec period}) / 100\text{msec}]$$

5.2.7.3 Results

Duty cycle plots are shown on pages 30 and 31. The EUT transmits a 408.82uS 2 times in a 100msec period. This results in a duty cycle correction factor of -41.7dB.

5.2.8 Radiated Spurious Emissions Measurements

5.2.8.1 Requirements

Per section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.2.8.2 Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All power lines and signal lines entering the enclosure pass through filters on the enclosure wall. The power line filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

For all harmonics not in the restricted bands, the following procedure was used:

- a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead the EUT was rotated through all axes to ensure the maximum readings were recorded for the EUT.
- d) All harmonics not in the restricted bands must be at least 20 dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

- 2) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution

bandwidth of 100 kHz was used on the spectrum analyzer.

- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead the EUT was rotated through all axes to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from $20 * \log(\text{dwell time}/100\text{msec})$. These readings must be no greater than the limits specified in 15.209(a).

5.2.8.3 Results

Preliminary radiated emissions plots with the EUT transmitting at 2402MHz, 2441MHz, 2480MHz are shown on pages 32 through 55. Final radiated emissions data are presented on data pages 56 through 61. As can be seen from the data, all emissions measured from the EUT were within the specification limits. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 2 through 4.

5.2.9 Band Edge Compliance

5.2.9.1 Requirement

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

In addition, the radiated emissions which fall in the restricted band beginning at 2483.5 MHz must meet the general limits of 15.209(a).

5.2.9.2 Procedures

5.2.9.2.1 Low Band Edge

- 1) The EUT was setup on a non-conductive stand.
- 2) The EUT was set to transmit continuously at the channel closest to the low band-edge (hopping function disabled).
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:

- a. Center frequency = low band-edge frequency.
- b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
- c. Resolution bandwidth (RBW) $\geq 1\%$ of the span.
- d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
- f. The analyzer's display was plotted using a 'screen dump' utility.

4) Step 3) was repeated with the frequency hopping function enabled.

5.2.9.2.2 High Band Edge

- 1) The EUT was set to transmit continuously at the channel closest to the high band-edge (hopping function disabled).
- 2) A double ridged waveguide was placed 3 meters away from the EUT. The antenna was connected to the input of a spectrum analyzer.
- 3) The center frequency of the analyzer was set to the high band edge (2483.5MHz)
- 4) The resolution bandwidth was set to 1MHz.
- 5) To ensure that the maximum or worst case emission level was measured, the following steps were taken:
 - a. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 6) The highest measured peak reading was recorded.
- 7) The highest measured average reading was recorded.
- 8) Steps 2) through 5) was repeated with the frequency hopping function enabled.

5.2.9.3 Results

Pages 62 through 63 show the radiated band-edge results at the low frequency band-edge. Pages 64 through 67 show the radiated band-edge results at the high frequency band-edge. As can be seen from these plots, the radiated emissions at the low frequency band edge are within the 20 dB down limits. The radiated emissions at the high frequency band edge are within the general limits.

5.2.10 Power Spectral Density

5.2.10.1 Requirements

Per section 15.247(d), the peak power spectral density from the intentional radiator shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2.10.2 Procedures

- 1) The EUT was placed on the non-conductive stand and set to transmit at a mid channel.
- 2) A double ridged waveguide was placed near the EUT.
- 3) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Resolution bandwidth (RBW) greater than the 20dB bandwidth.

- c. Sweep time = auto
- d. The peak detector and 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- e. The analyzer's display was plotted using a 'screen dump' utility.

- 4) This reading corresponds to the peak EIRP measured for the mid channel.
- 5) Turn on Display Line 1 and place it at the peak of the measured level. Turn on Display Line 2 and place it at the corresponding +8dBm level (e.g. if the peak output power is +18dBm then the +8dBm level will be 10dB down from the radiated level and if the peak output power is +6dBm then the +8dBm level will be 2dB above the radiated level.)
- 6) The EUT was then placed in the inquiry mode.
- 7) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Span = 1.5times the channel bandwidth
 - c. Resolution bandwidth (RBW) \geq 3kHz
 - d. Video bandwidth (VBW) \geq 3 x RBW
 - e. Sweep time = auto couple
 - f. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The peak detector and 'Max-Hold' function was engaged.
 - g. The analyzer's display was plotted using a 'screen dump' utility.
 - h. If the measured value exceeds the +8dBm limit, reduce the RBW (no less than 3kHz) and repeat step 7.

5.2.10.3 Results

Pages 68 and 69 show the power spectral density results. As can be seen from these plots, the peak power density is less than 8dBm in a 3kHz band during any time interval of continuous transmission.

6 OTHER TEST CONDITIONS

6.1 Test Personnel and Witnesses

Qualified personnel from Elite Electronic Engineering Incorporated performed all tests. The test series was witnessed by Motorola, Inc. personnel.

6.2 Disposition of the EUT

The EUT and all associated equipment were returned to Motorola, Inc. upon completion of the tests.

7 CONCLUSIONS

It was determined that the Motorola, Inc. Transceiver, Model No. PMLN6233A, Serial No. Sample #1, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, for receivers and Subpart C, Section 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz band when tested per ANSI C63-4:2003.

It was also determined that the Motorola, Inc. Transceiver, Model No. PMLN6233A, Serial No. Sample #1, did fully meet the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.4 and Section 6 for receivers and the Industry Canada Radio Standards Specification RSS-Gen Section 7.2.4 and RSS-210 Annex 8 for transmitters when tested per ANSI C63-4-2003.

8 CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this



certification.

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



9 EQUIPMENT LIST


Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW1	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G-3R0	PL2927/0646	20GHZ-26.5GHZ	8/9/2012	8/9/2013
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	8/22/2012	8/22/2013
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA3	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	2/16/2012	2/16/2013
NWI1	RIDGED WAVE GUIDE	AEL	H1498	154	2-18GHZ	1/28/2012	1/28/2013
NWP1	DOUBLE RIDGED WAVEGUIDE ANTENNA	EATON	3115	2100	1GHZ-12.4GHZ	3/6/2012	3/6/2013
PHA0	MAGNETIC FIELD PROBE	ELECTRO-METRICS	EM-6882	134	22-230MHz	NOTE 1	
RBA0	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100145	20HZ-26.5GHZ	3/8/2012	3/8/2013
RBB0	EMI TEST RECEIVER 20HZ TO 40 GHZ	ROHDE & SCHWARZ	ESIB40	100250	20 HZ TO 40GHZ	3/5/2012	3/5/2013
RBD1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU40	100009	20Hz-40GHz	1/17/2012	1/17/2013
XPR0	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000	001	4.8-20GHZ	8/22/2012	8/22/2013

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

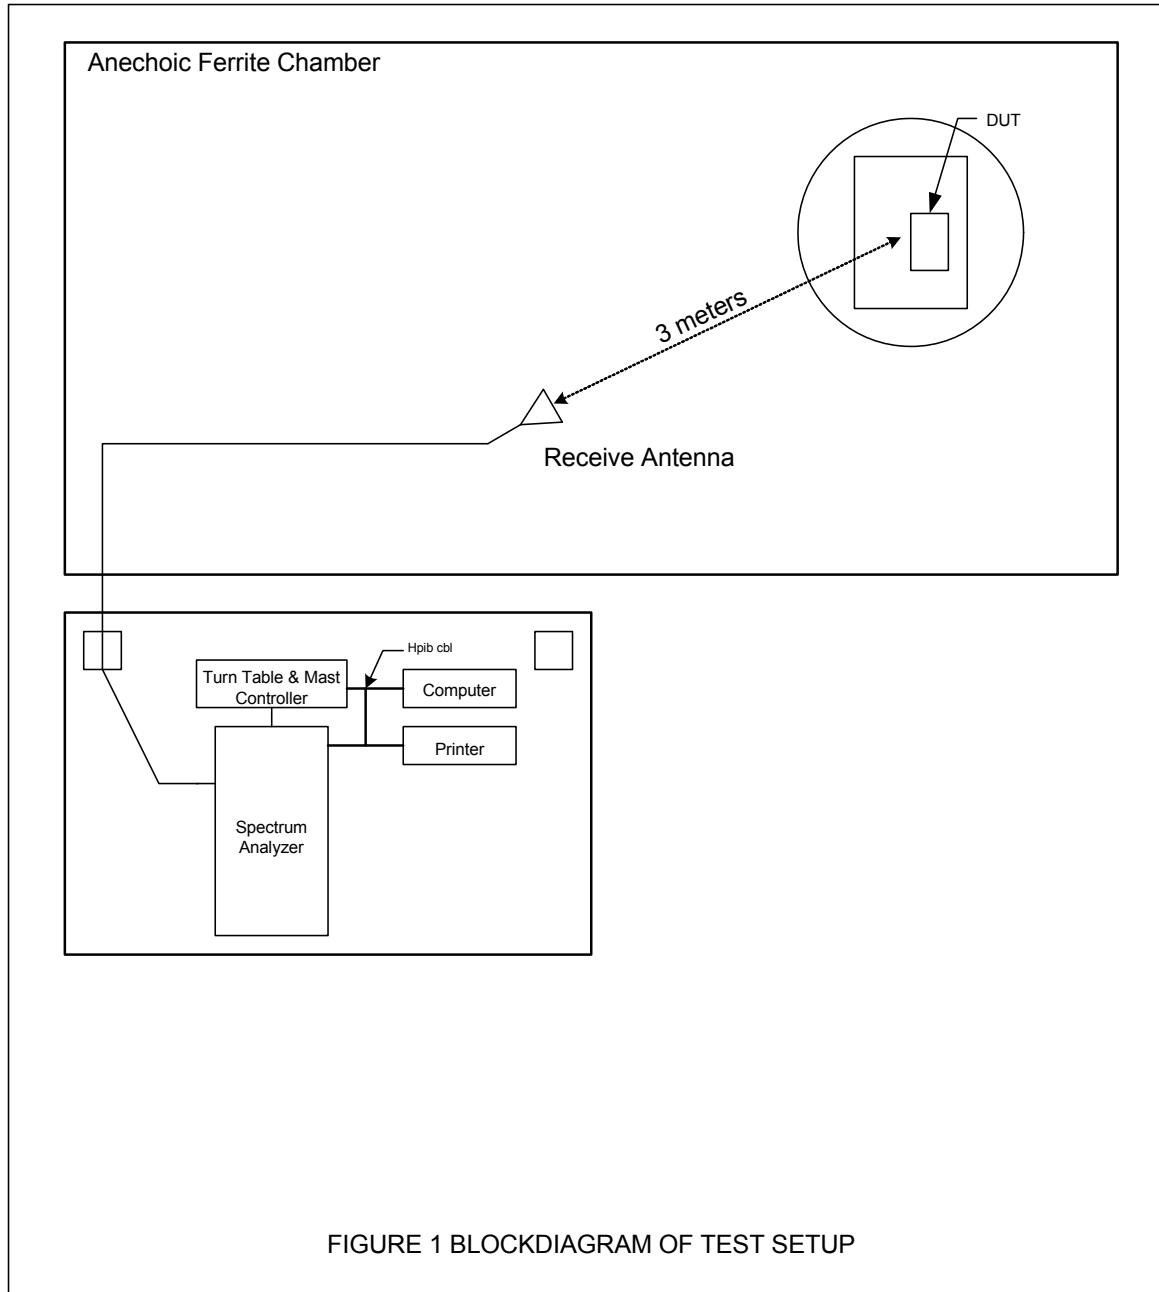


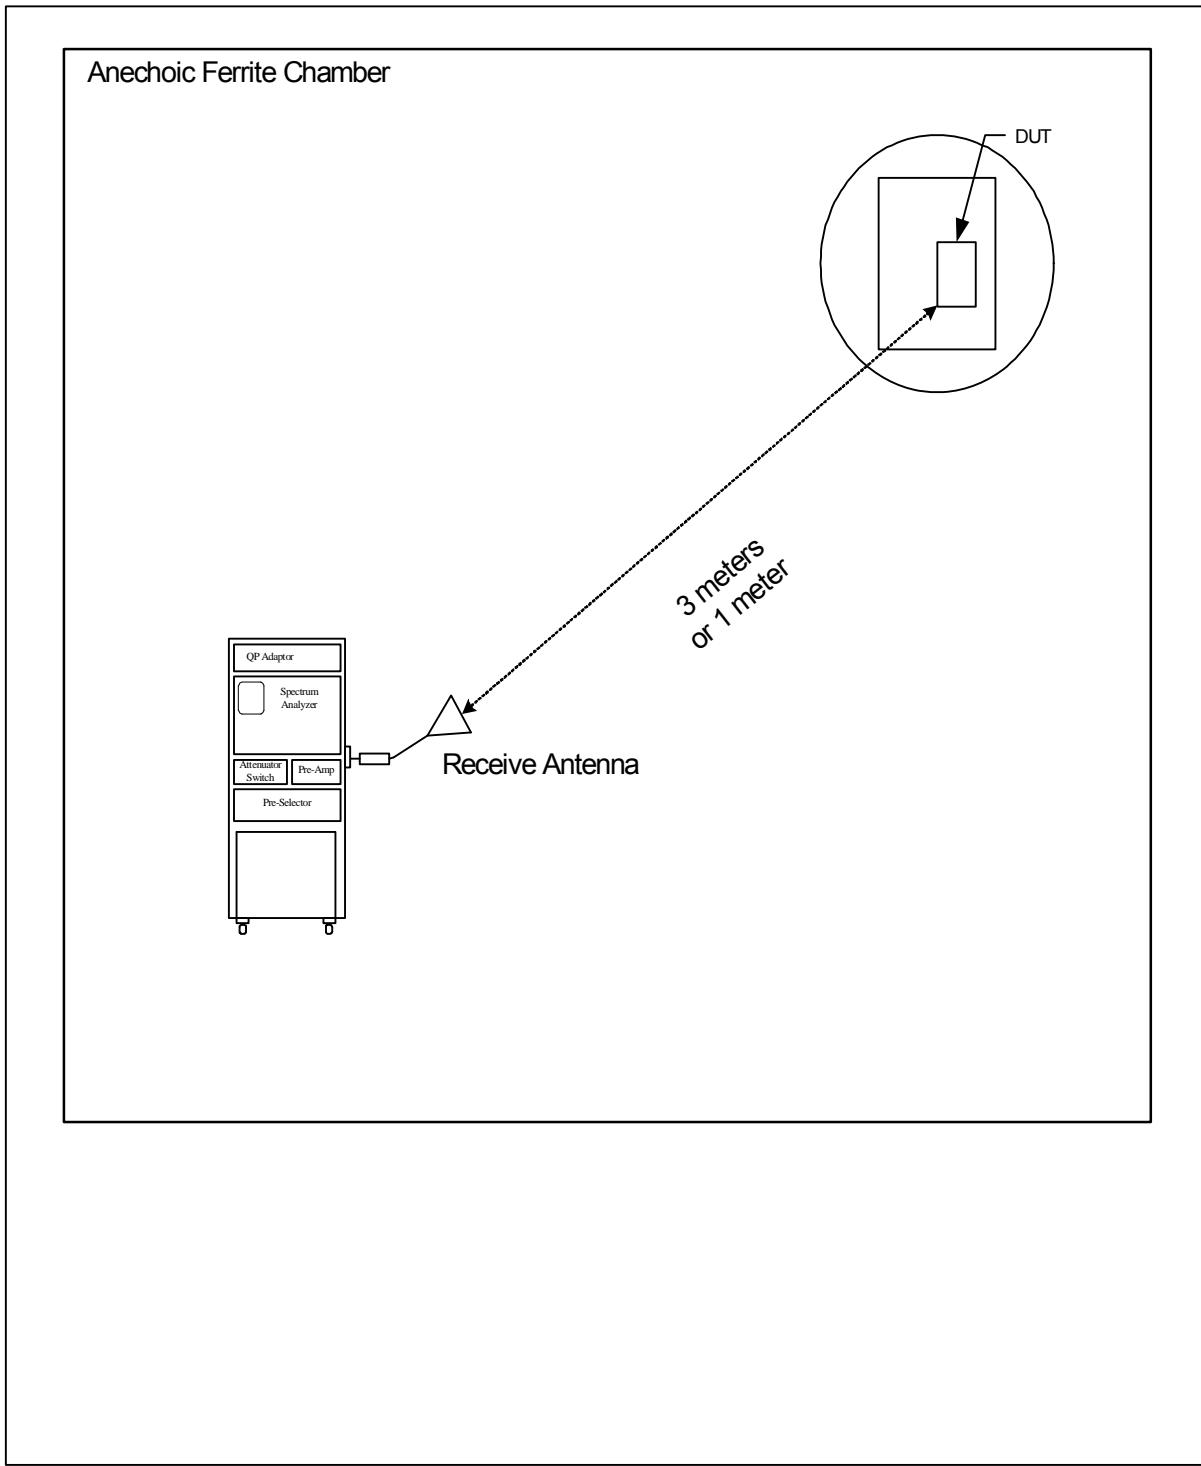


Figure 2




Test Setup for Radiated Emissions, below 2GHz – Horizontal Polarization

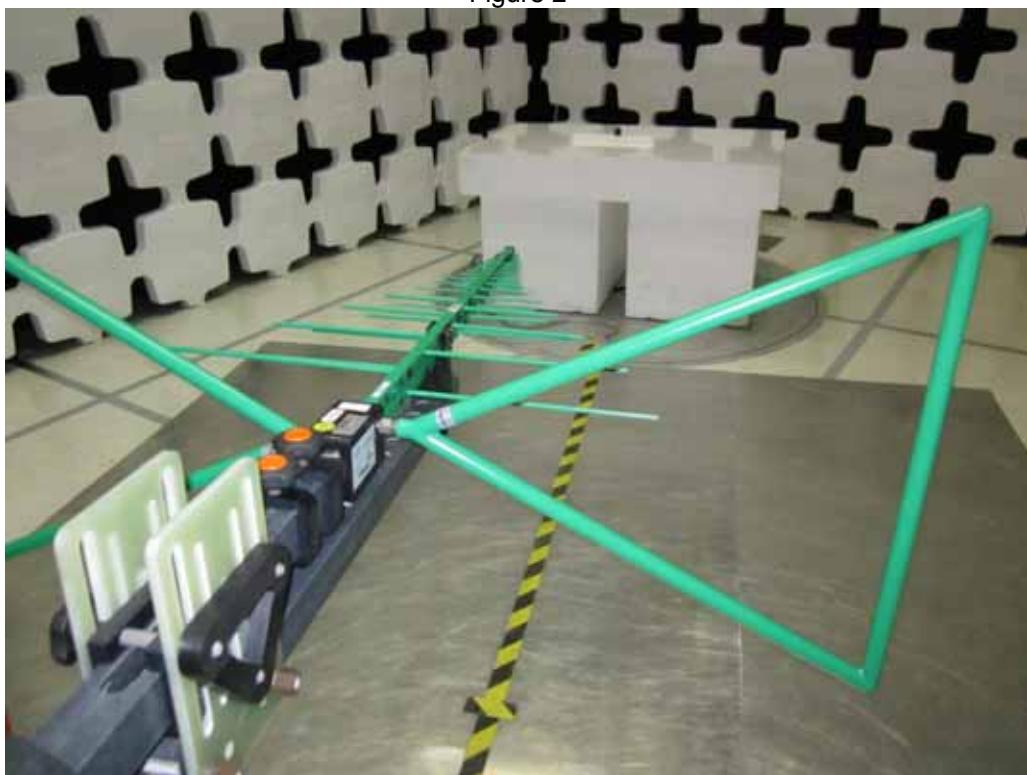


Test Setup for Radiated Emissions, below 2GHz – Vertical Polarization

Figure 3

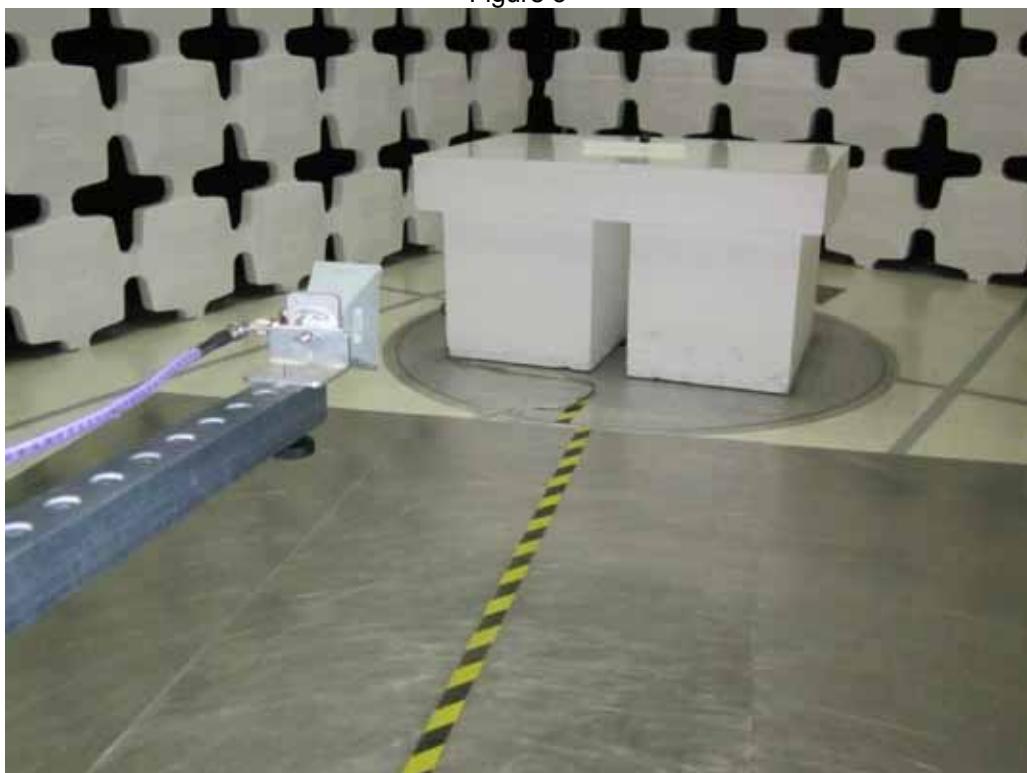

Test Setup for Radiated Emissions, 2GHz to 18GHz – Horizontal Polarization

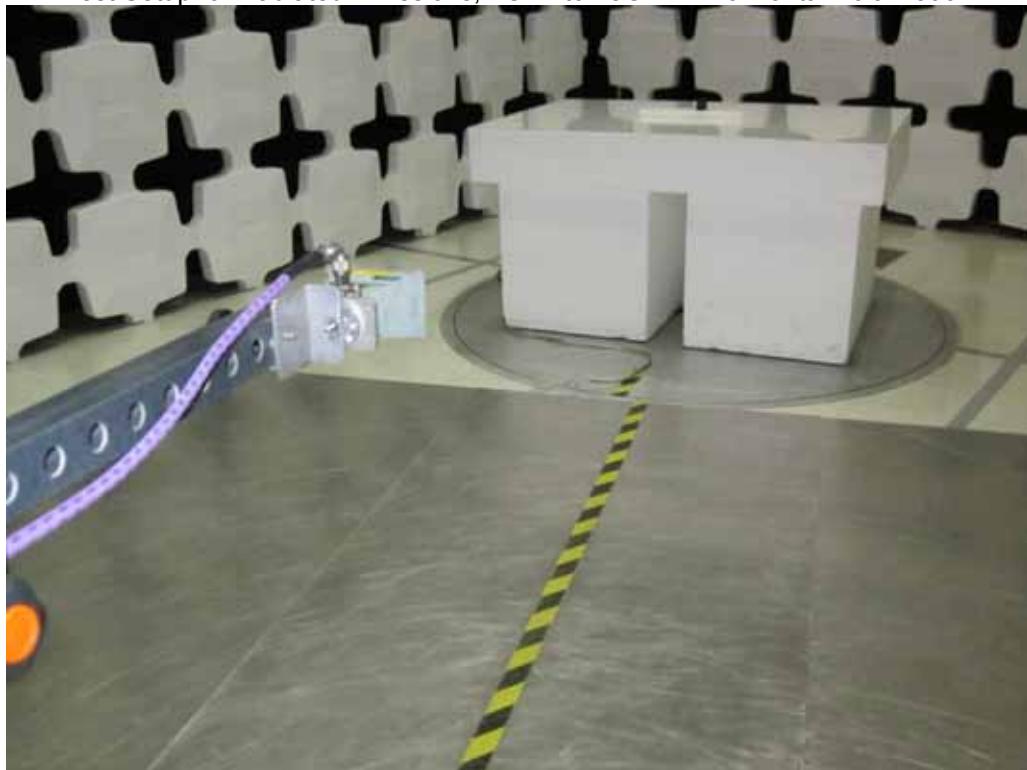

Test Setup for Radiated Emissions, 2GHz to 18GHz – Vertical Polarization


Figure 4



Test Setup for Radiated Emissions, above 18GHz – Horizontal Polarization




Test Setup for Radiated Emissions, above 18GHz – Vertical Polarization

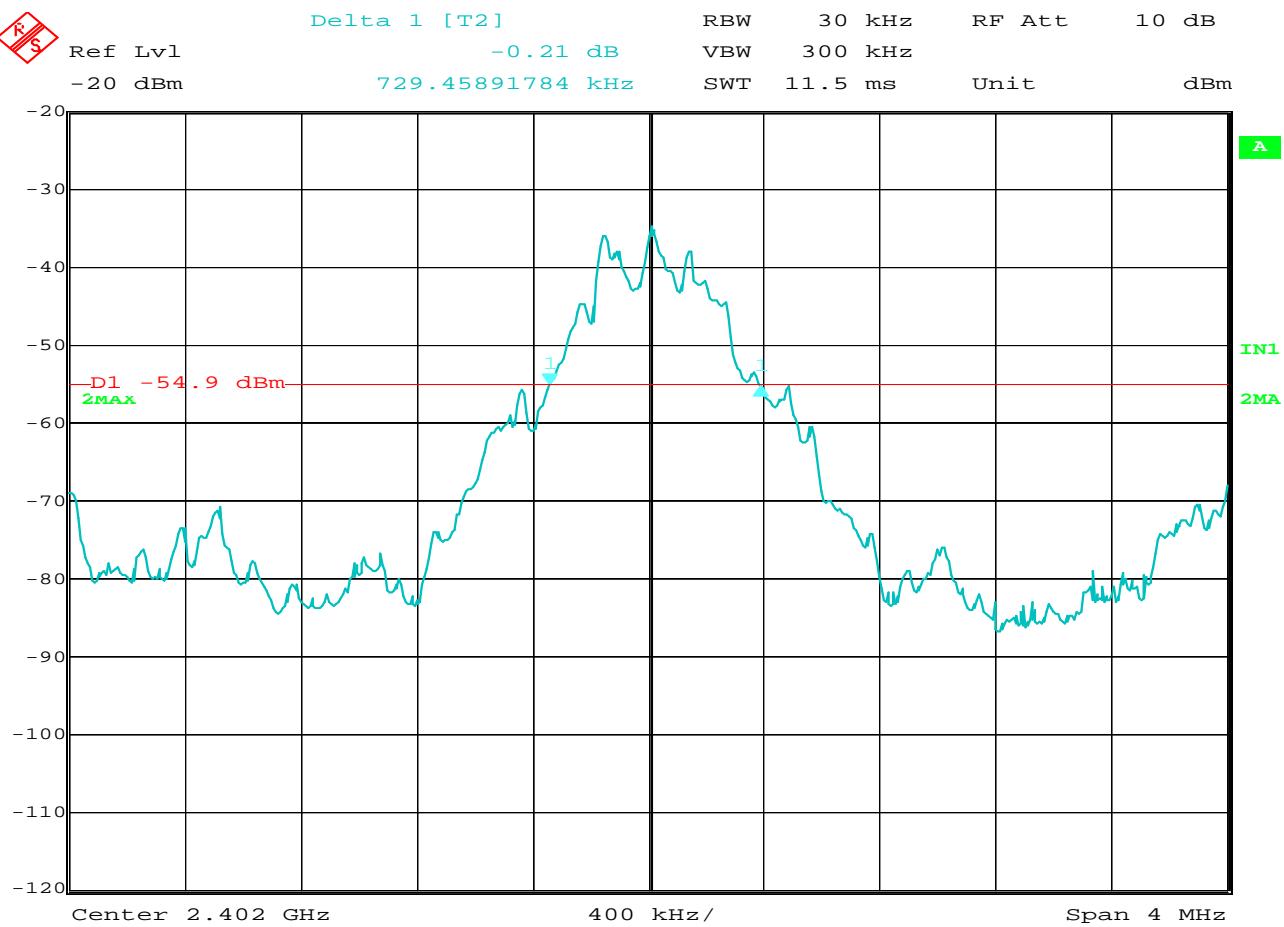

Date: 26.OCT.2012 15:31:13

20dB Bandwidth


MANUFACTURER : Motorola, Inc.
 MODEL NUMBER : PMLN6233A
 TEST SPEC. : 15.247 20dB Bandwidth
 TEST PARAMETERS : 20dBc
 EUT FREQUENCY : 2402MHz
 NOTES : 20dB BW = 729.5 kHz
 :

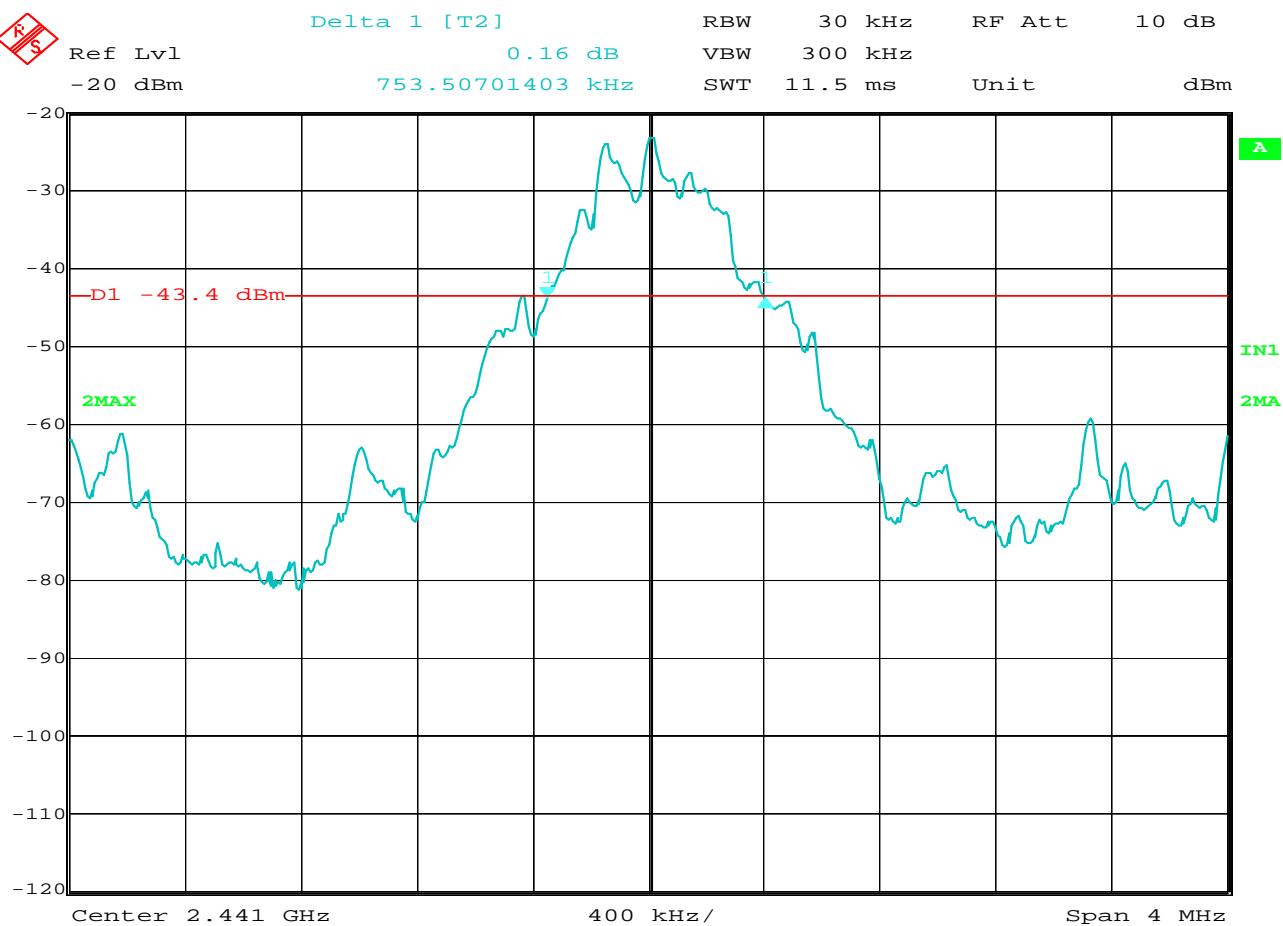

Date: 26.OCT.2012 15:59:51

20dB Bandwidth


MANUFACTURER : Motorola, Inc.
 MODEL NUMBER : PMLN6233A
 TEST SPEC. : 15.247 20dB Bandwidth
 TEST PARAMETERS : 20dBc
 EUT FREQUENCY : 2441MHz
 NOTES : 20dB BW = 753.5 kHz
 :

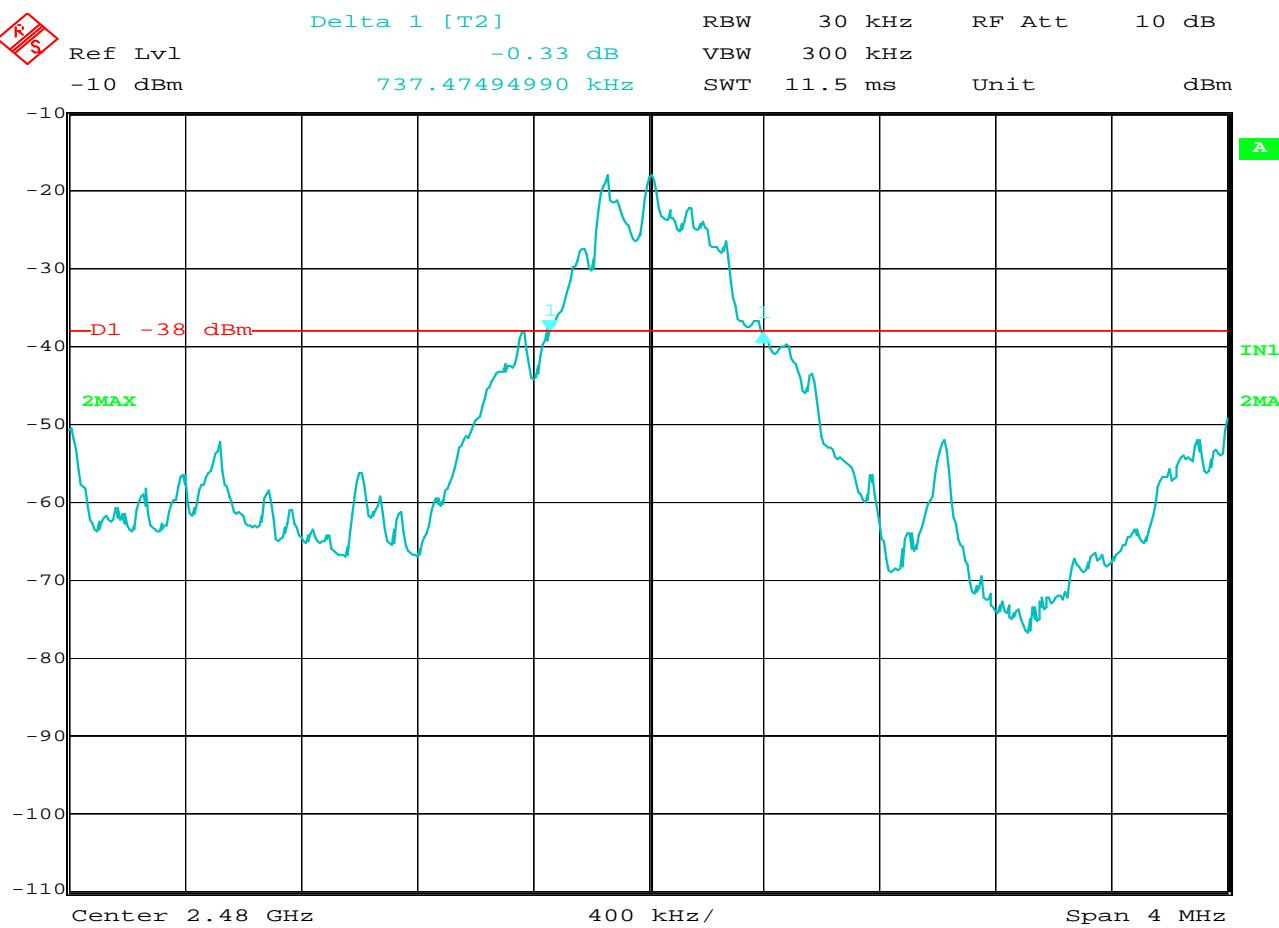

Date: 26.OCT.2012 16:07:54

20dB Bandwidth


MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST SPEC. : 15.247 20dB Bandwidth
TEST PARAMETERS : 20dBc
EUT FREQUENCY : 2480MHz
NOTES : 20dB BW = 737.5 kHz
 :

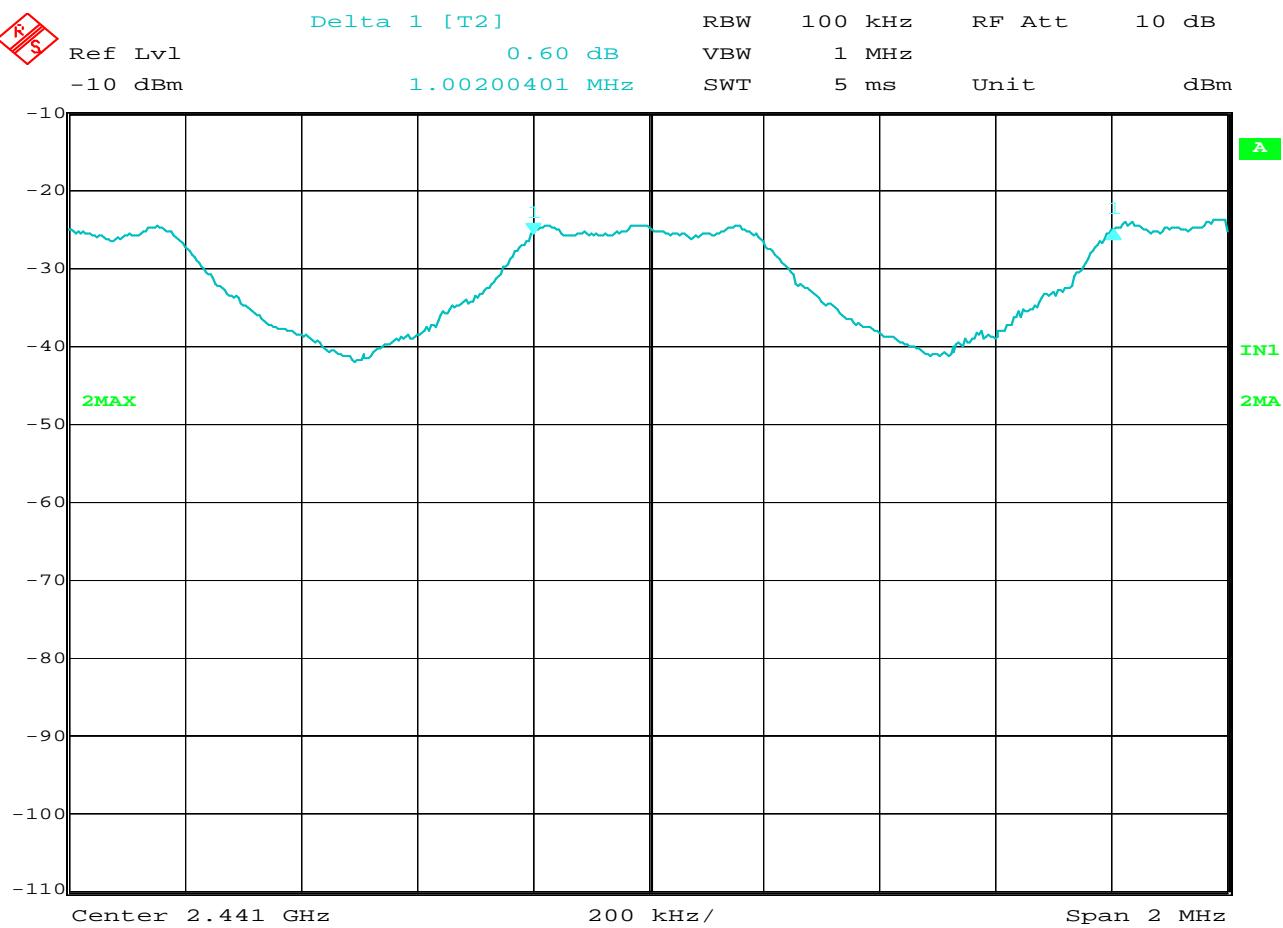

Date: 26.OCT.2012 16:51:52

Carrier Frequency Separation

MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST SPEC. : 15.247 Carrier Frequency Separation
EUT FREQUENCY : Frequency Hopping Enabled
NOTES : Carrier Frequency Separation is 1.0MHz
:

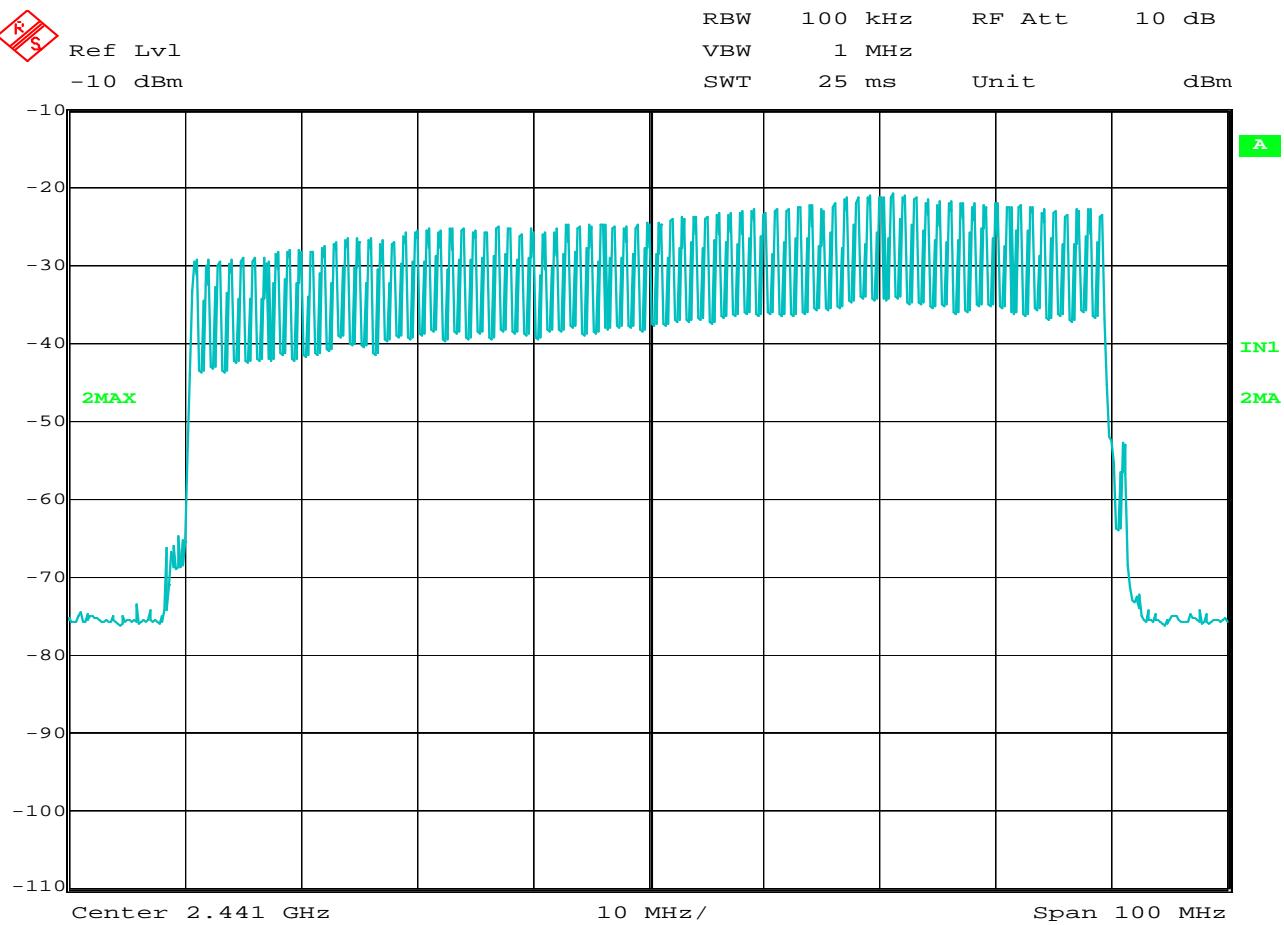


Date: 26.OCT.2012 16:25:18

Number of Hopping Frequencies

MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST MODE : Number of Hopping Frequencies
TEST PARAMETERS : Number of Hopping Frequencies = 79
:

NOTES

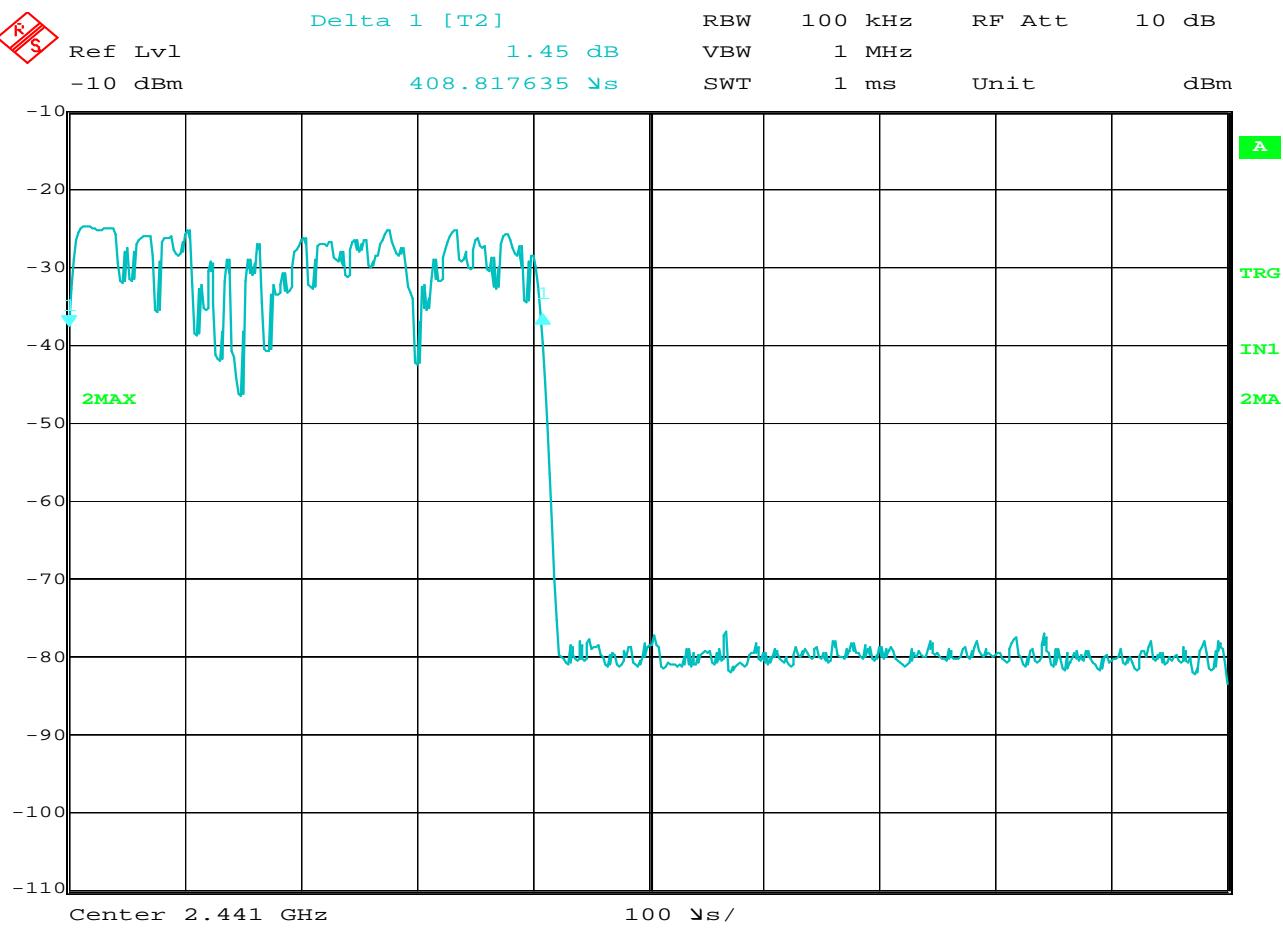


Date: 26.OCT.2012 17:12:10

Time of Occupancy

MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST MODE : Frequency Hopping Enabled
TEST PARAMETERS : Time of Occupancy
NOTES : 1 pulse = 408.82uS
:

NOTES

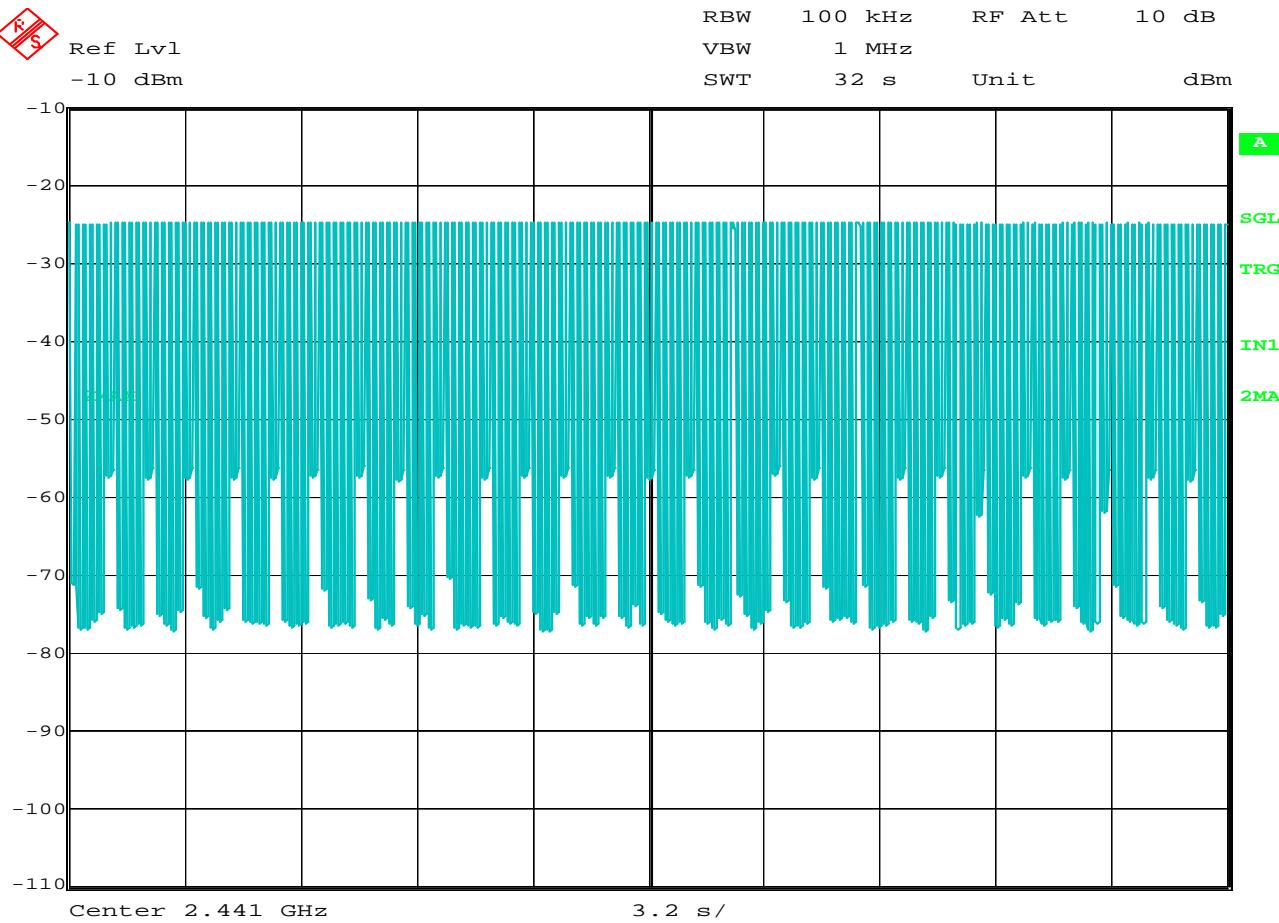

Date: 26.OCT.2012 17:20:33

Time of Occupancy


MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST SPEC. : 15.247 Time of Occupancy
TEST MODE : Frequency Hopping Enabled
TEST PARAMETERS : For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
 Number of hopping channels = 79. $79 \times 0.4 = 31.6$ sec.

NOTES : Therefore the number of pulses in 31.6 seconds = 321 pulses. Each pulse is 408.8usec. Therefore time of occupancy = $408.8\text{usec} \times 321 \text{ pulses} = 0.131\text{sec}$.



MANUFACTURER : Motorola, Inc.
EUT : Transceiver
MODEL NUMBER : PMLN6233A
TEST MODE : See Below
TEST DATE : October 25, 2012
TEST PARAMETERS : Peak EIRP
NOTES :

Freq MHz	Ant Pol	Meter Reading dBuV	Matched Signal Generator dB	Ant Gain dB	Cable Factor dB	EIRP Total dBm	Limit dBm
2402	H	73.2	3.1	8.0	2.7	8.3	36.0
2402	V	65.5	-2.8	8.0	2.7	2.5	36.0
2441	H	72.4	2.3	8.1	2.8	7.6	36.0
2441	V	65.9	-2.3	8.1	2.8	3.0	36.0
2480	H	73.2	3.2	8.1	2.8	8.5	36.0
2480	V	64.5	-3.6	8.1	2.8	1.7	36.0

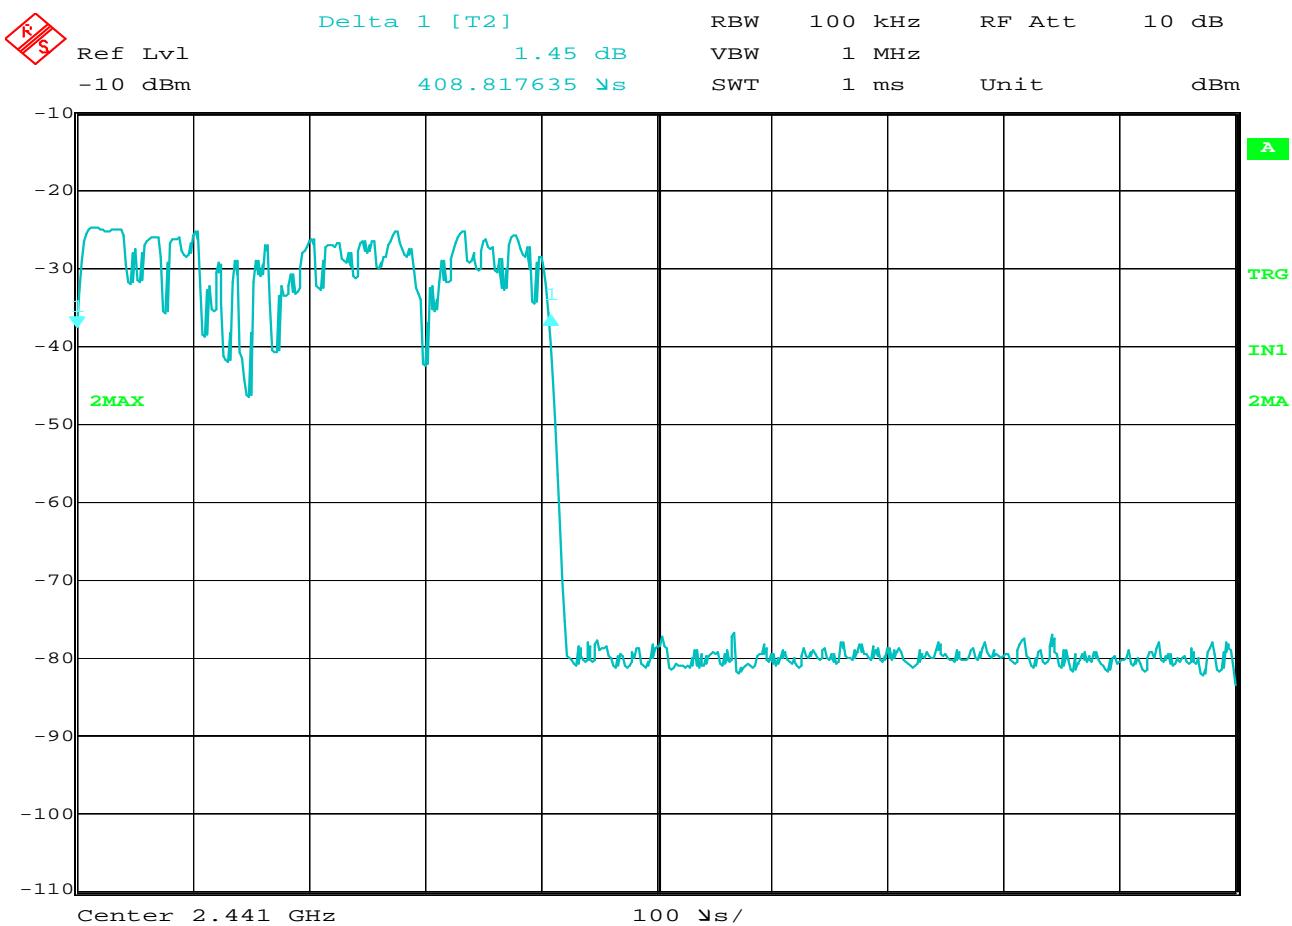


Date: 26.OCT.2012 17:12:10

FCC 15.35 Duty Cycle Factor

MANUFACTURER : Motorola, Inc.
 MODEL NUMBER : PMLN6233A
 TEST MODE : Frequency Hopping Enabled
 TEST PARAMETERS : Time of Occupancy
 NOTES : 1 pulse = 408.82uS
 :

NOTES

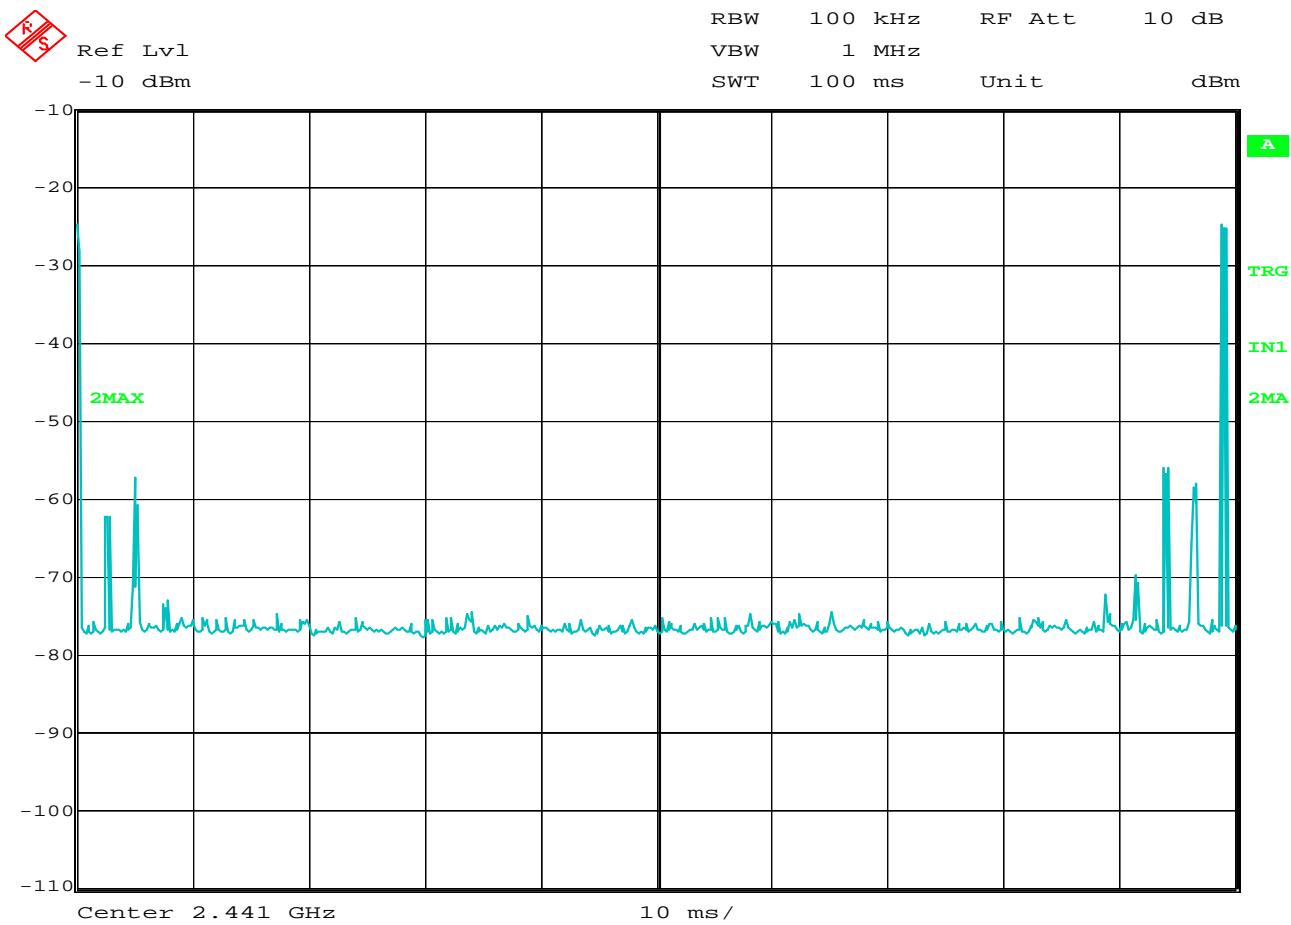



Date: 26.OCT.2012 16:54:35


FCC 15.35 Duty Cycle Factor


MANUFACTURER : Motorola, Inc.
 MODEL NUMBER : PMLN6233A
 TEST MODE : Dwell Time
 TEST PARAMETERS : Number of pulses in 100mS
 : Two pulses in 100mS. 1 pulse width equals 408.82uS.
 : Duty Cycle Factor = $20 \times \log((408.82\mu\text{s}^2)/100\text{mS}) = -41.7 \text{ dB}$


NOTES

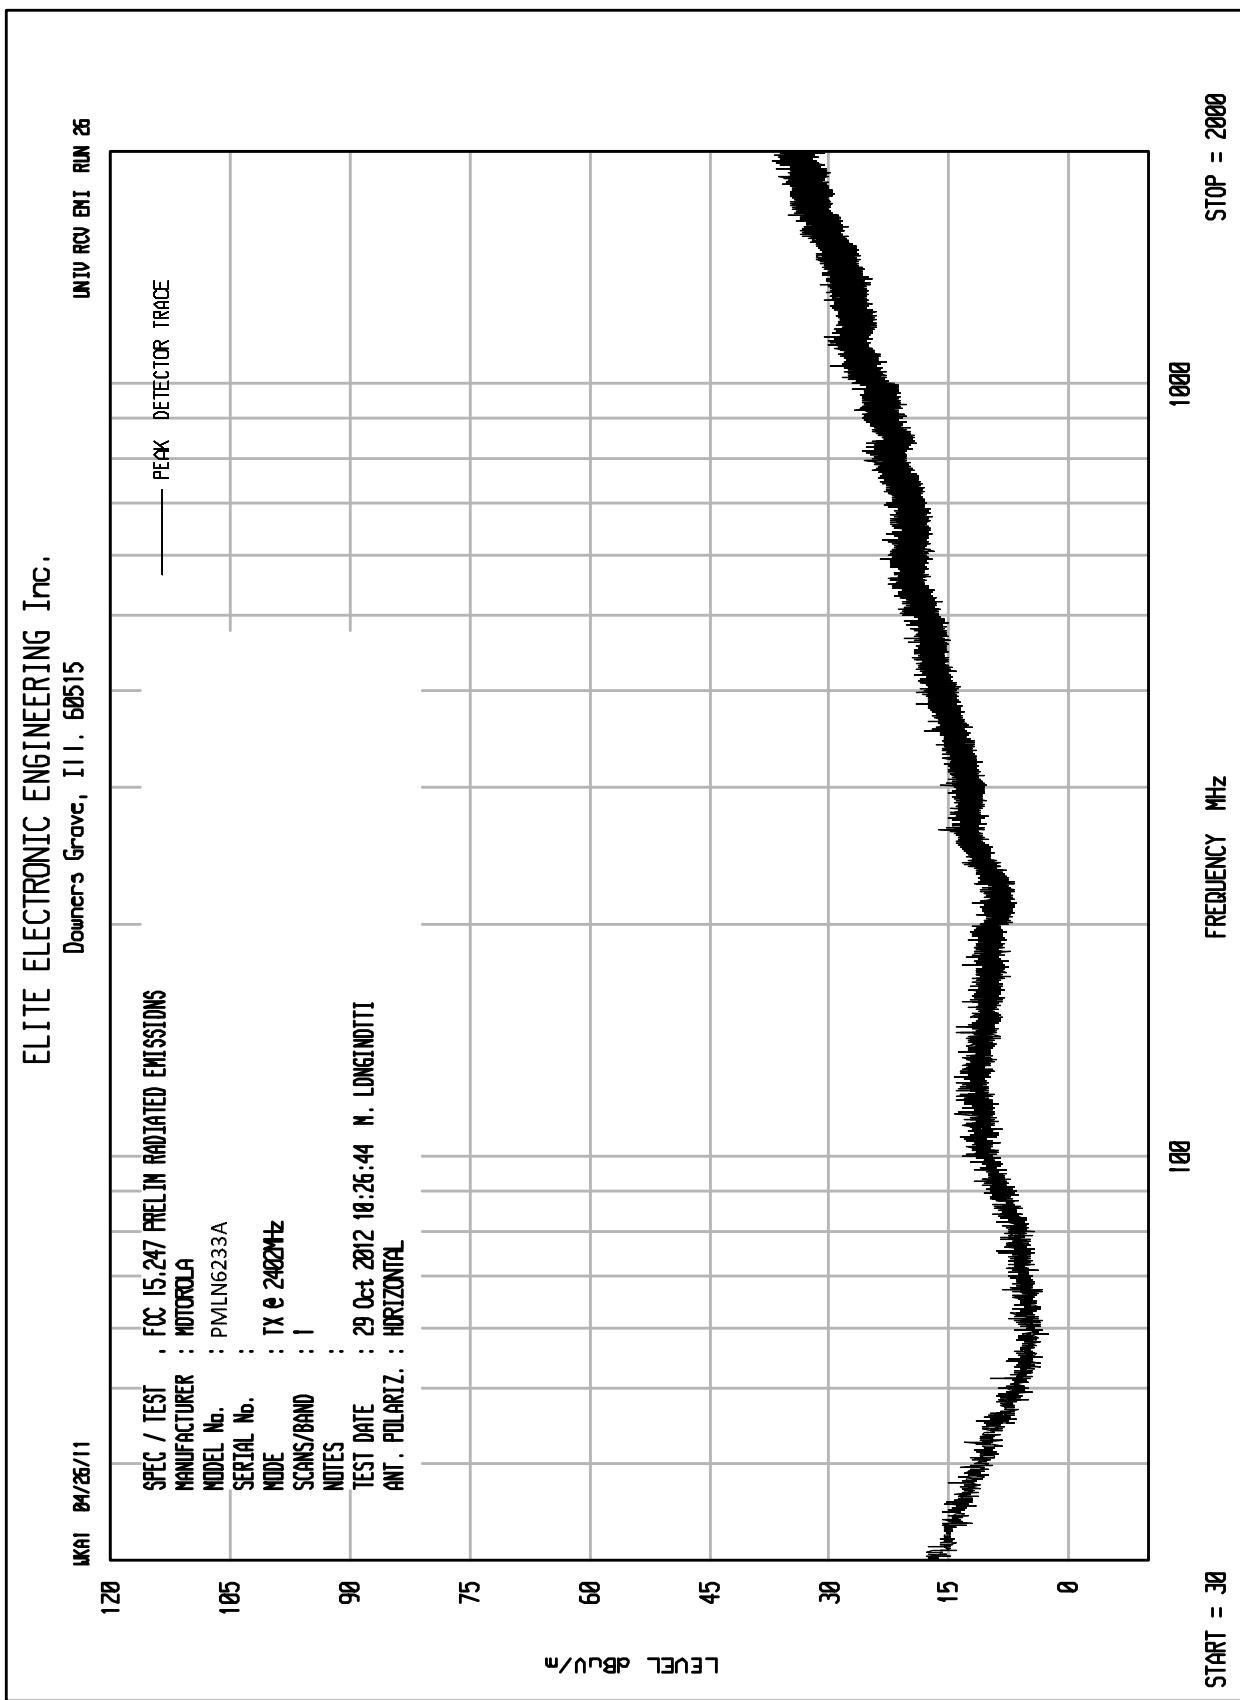


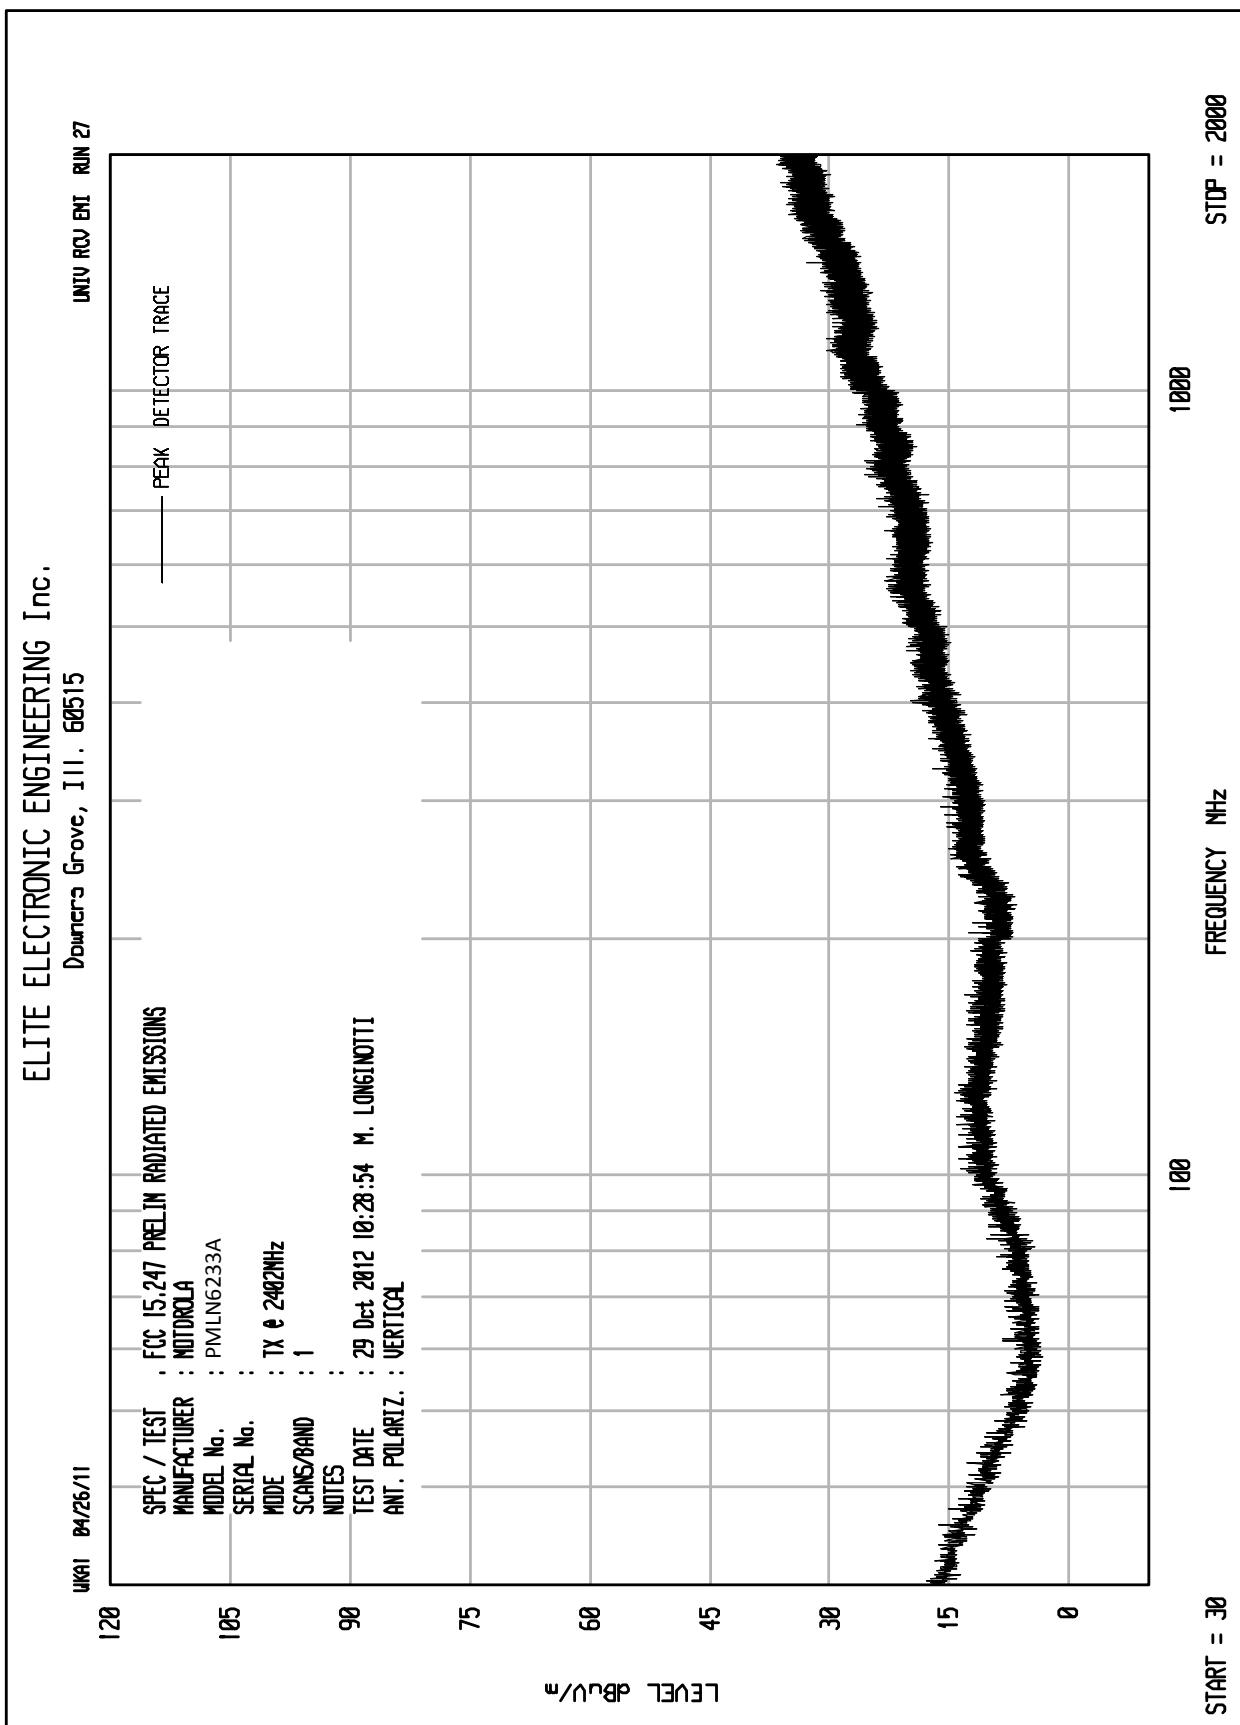

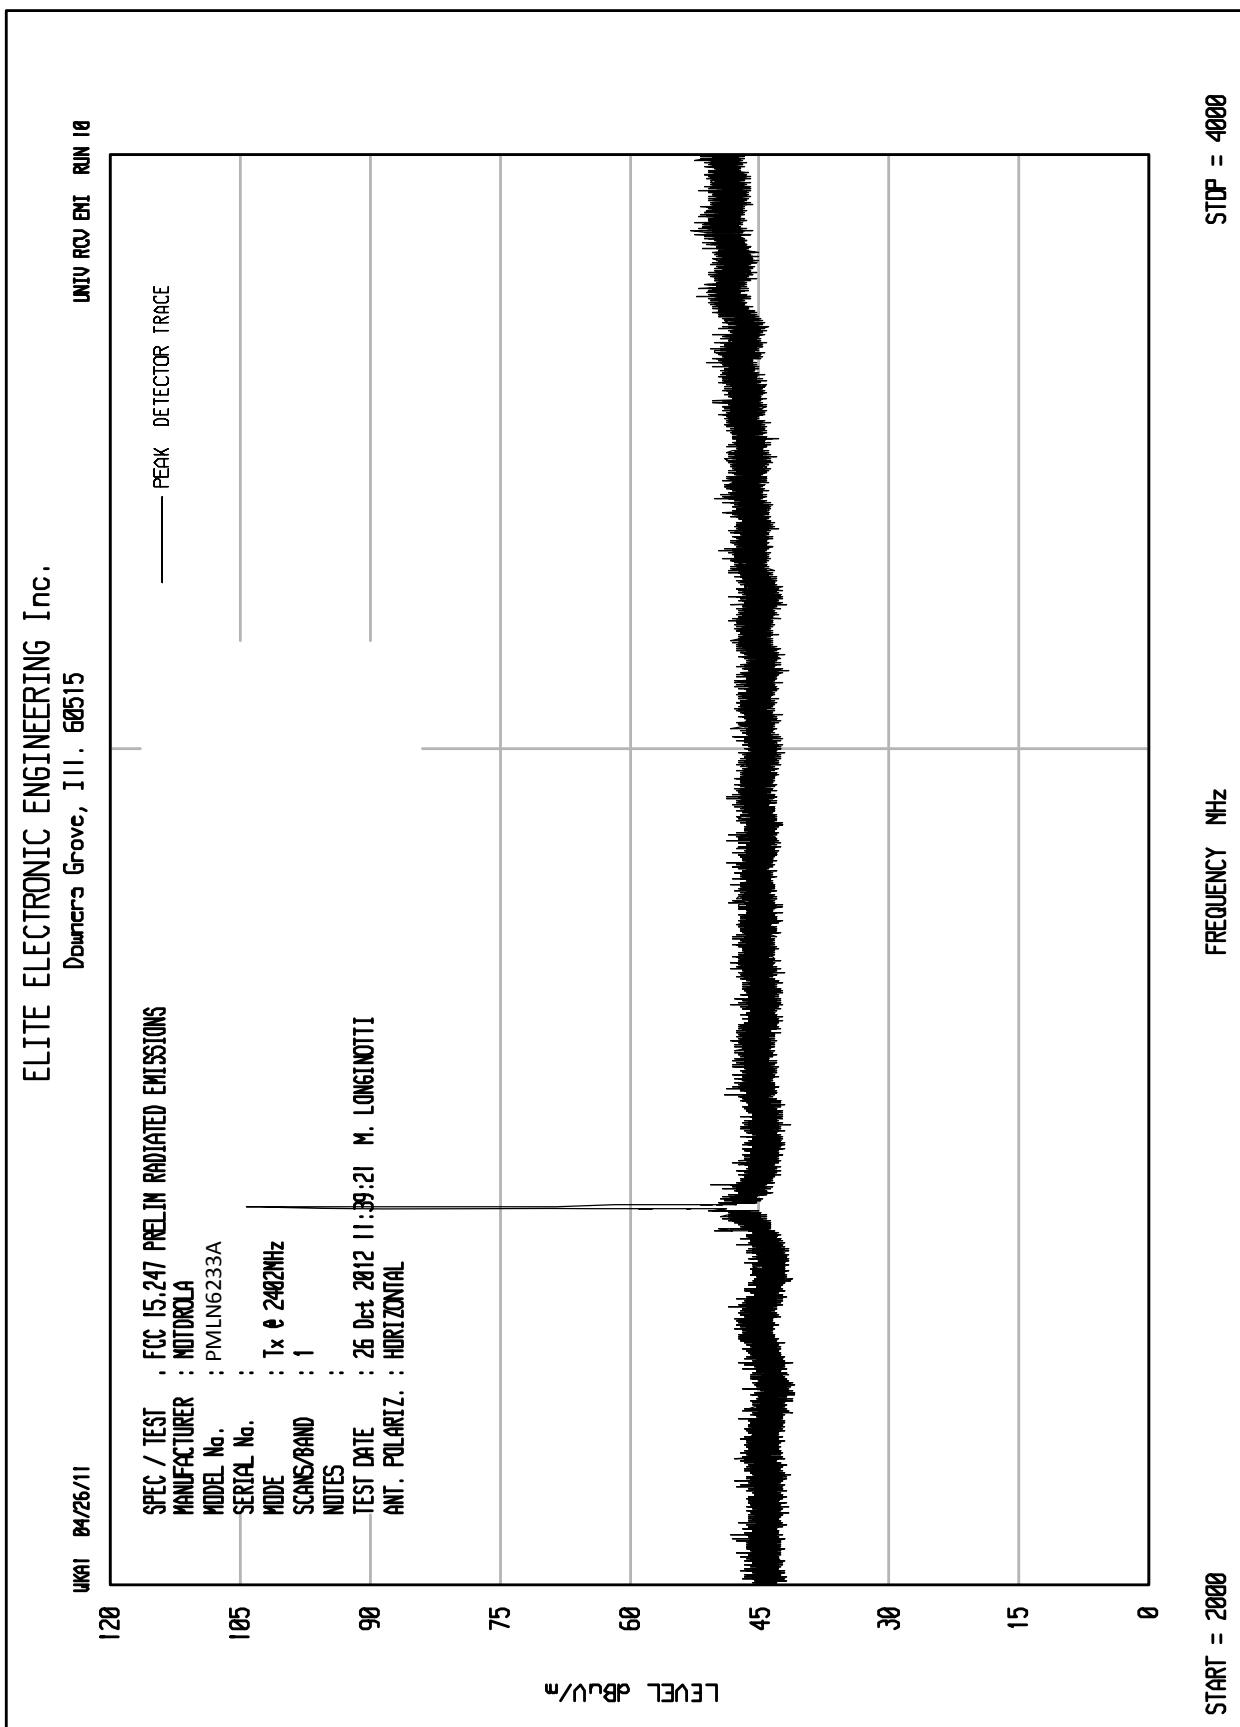

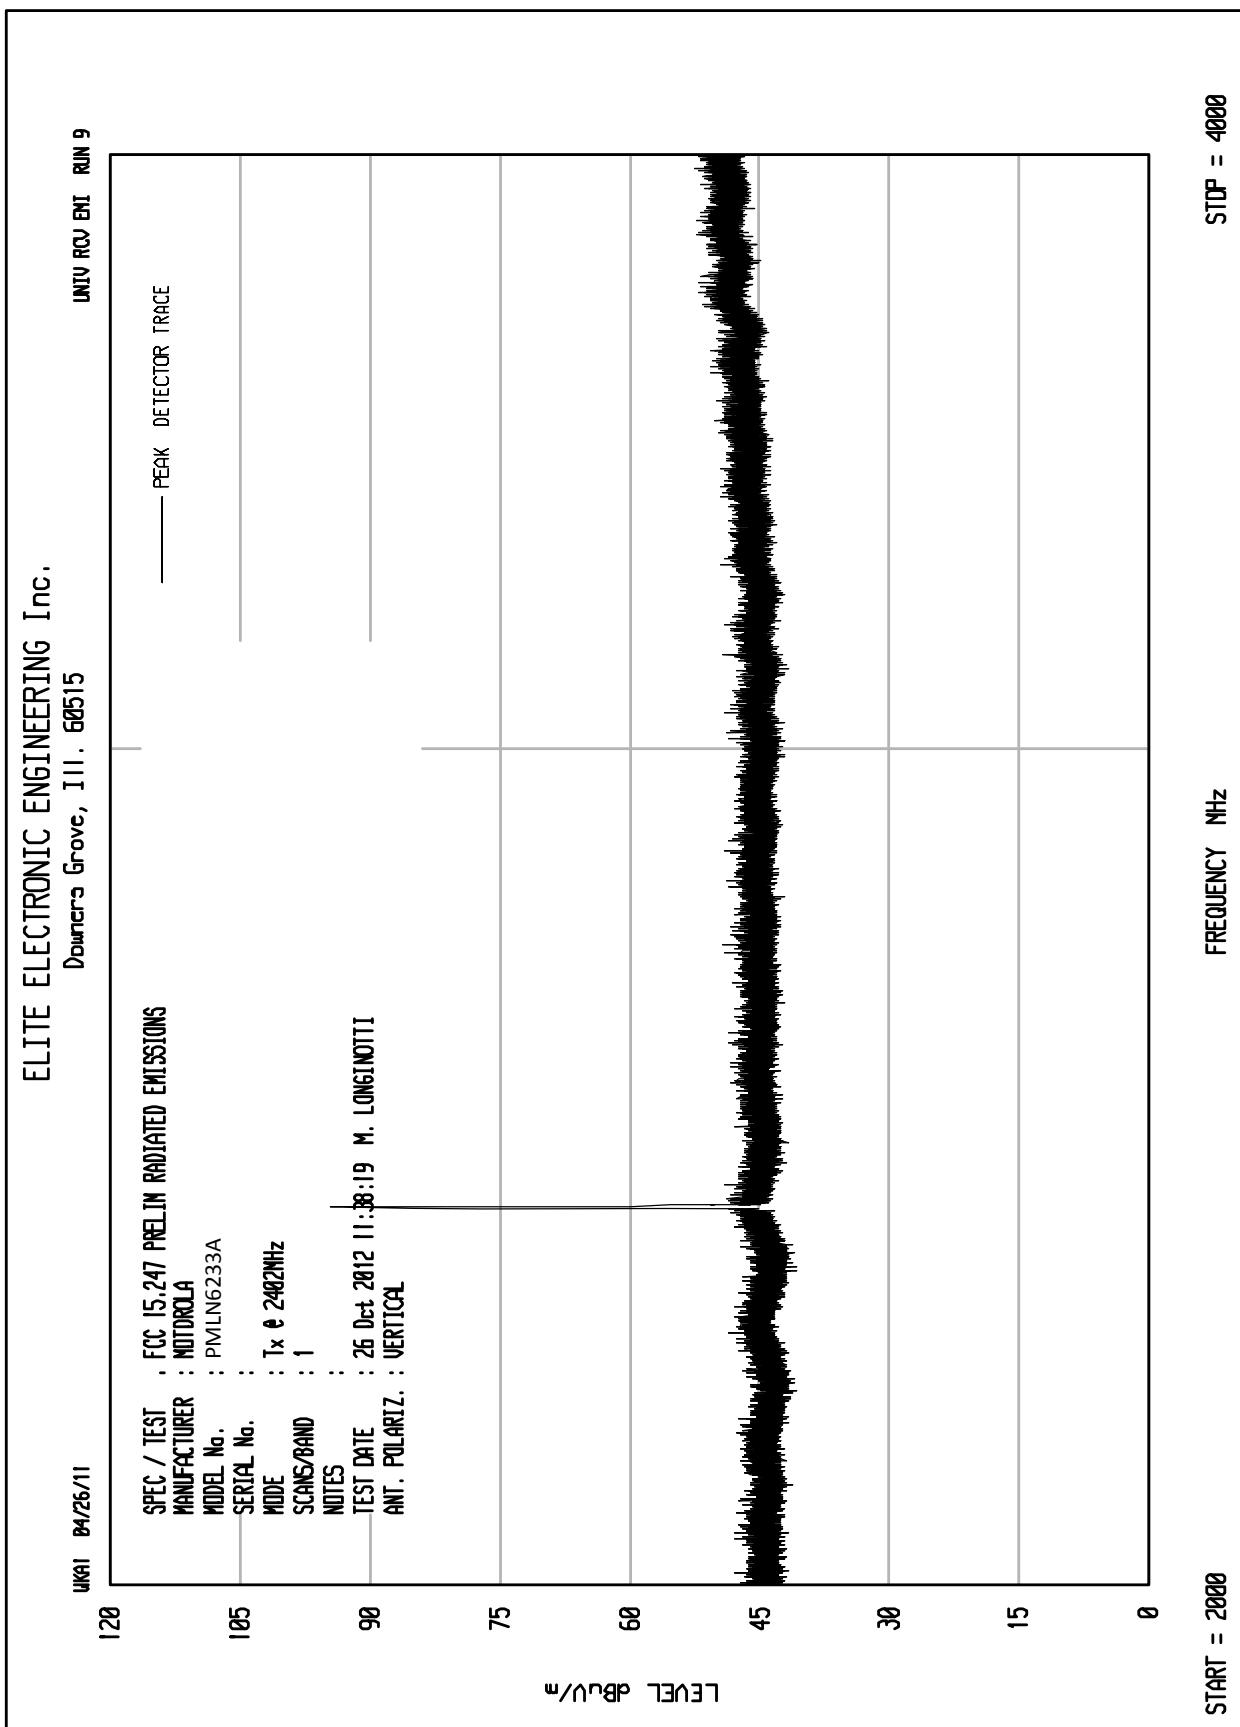

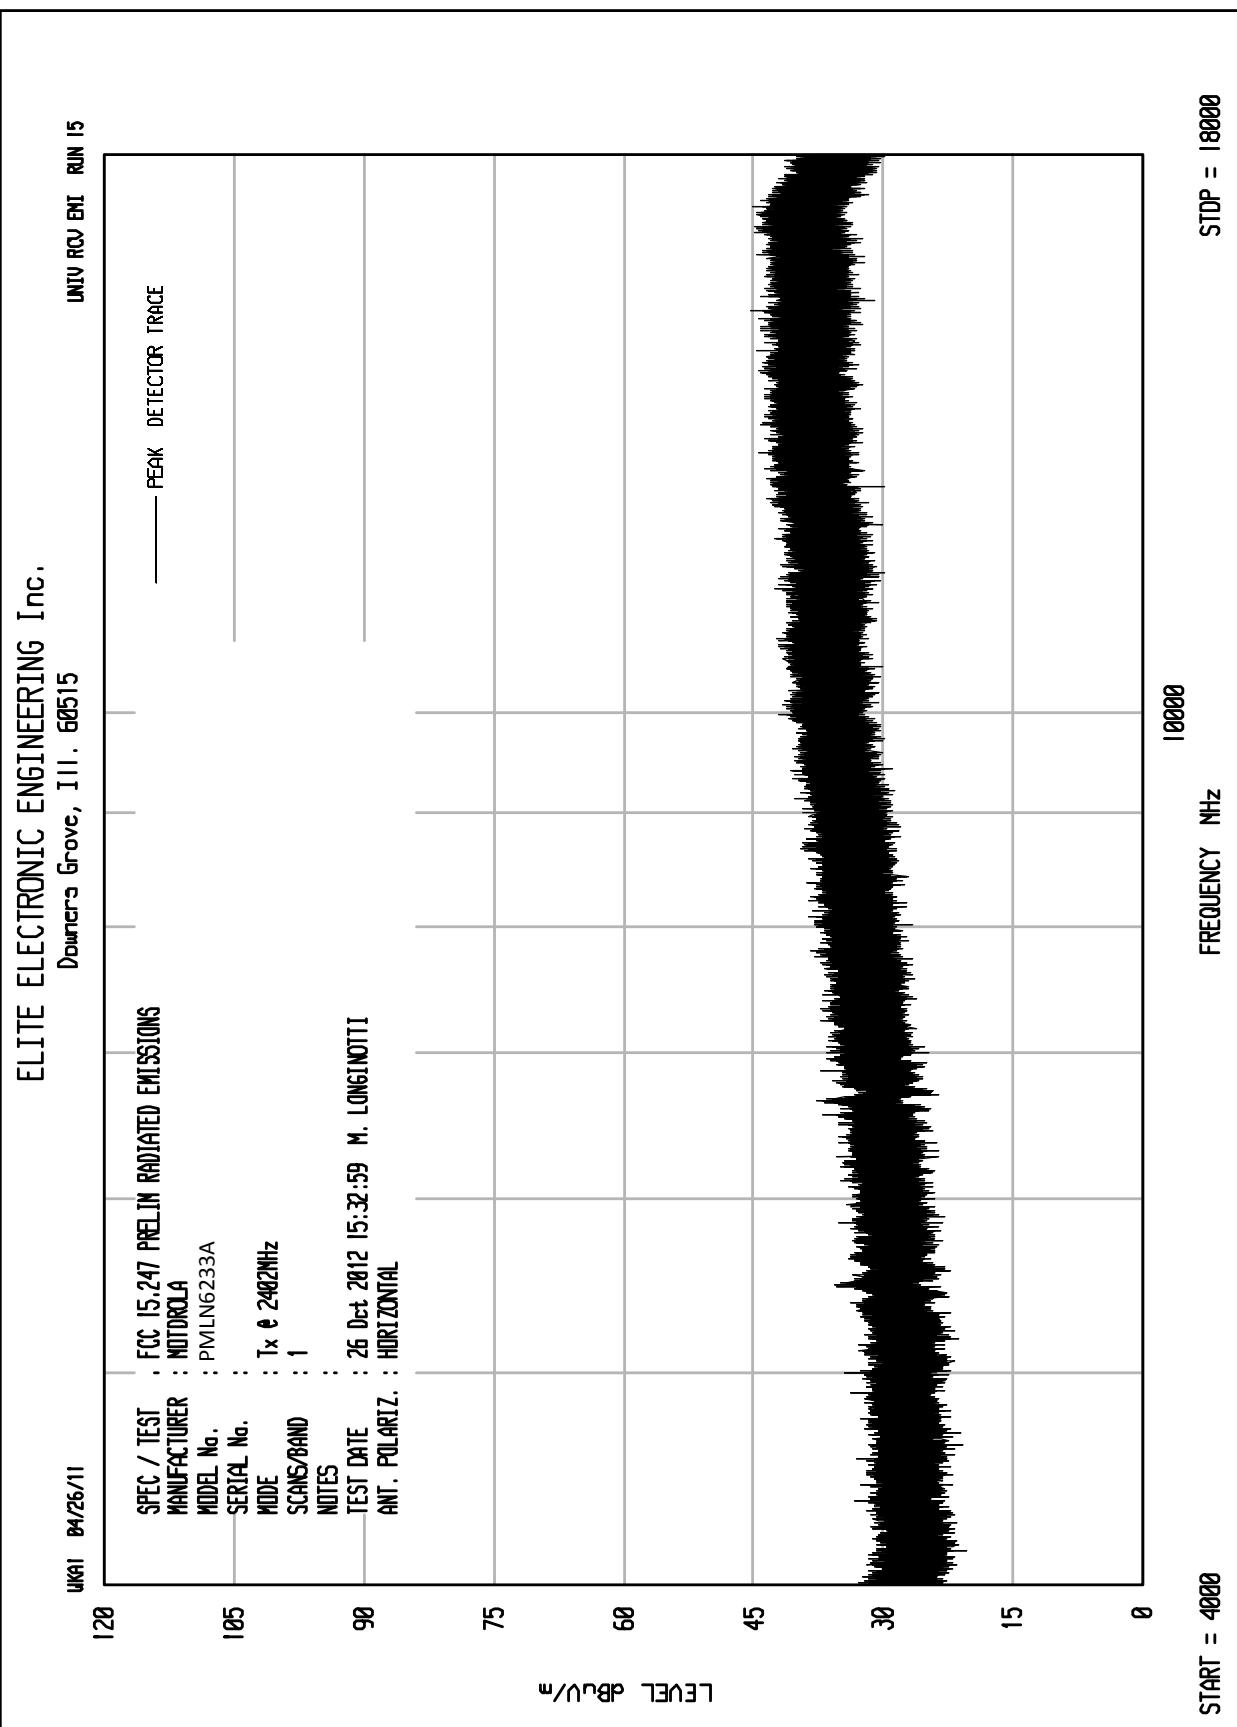

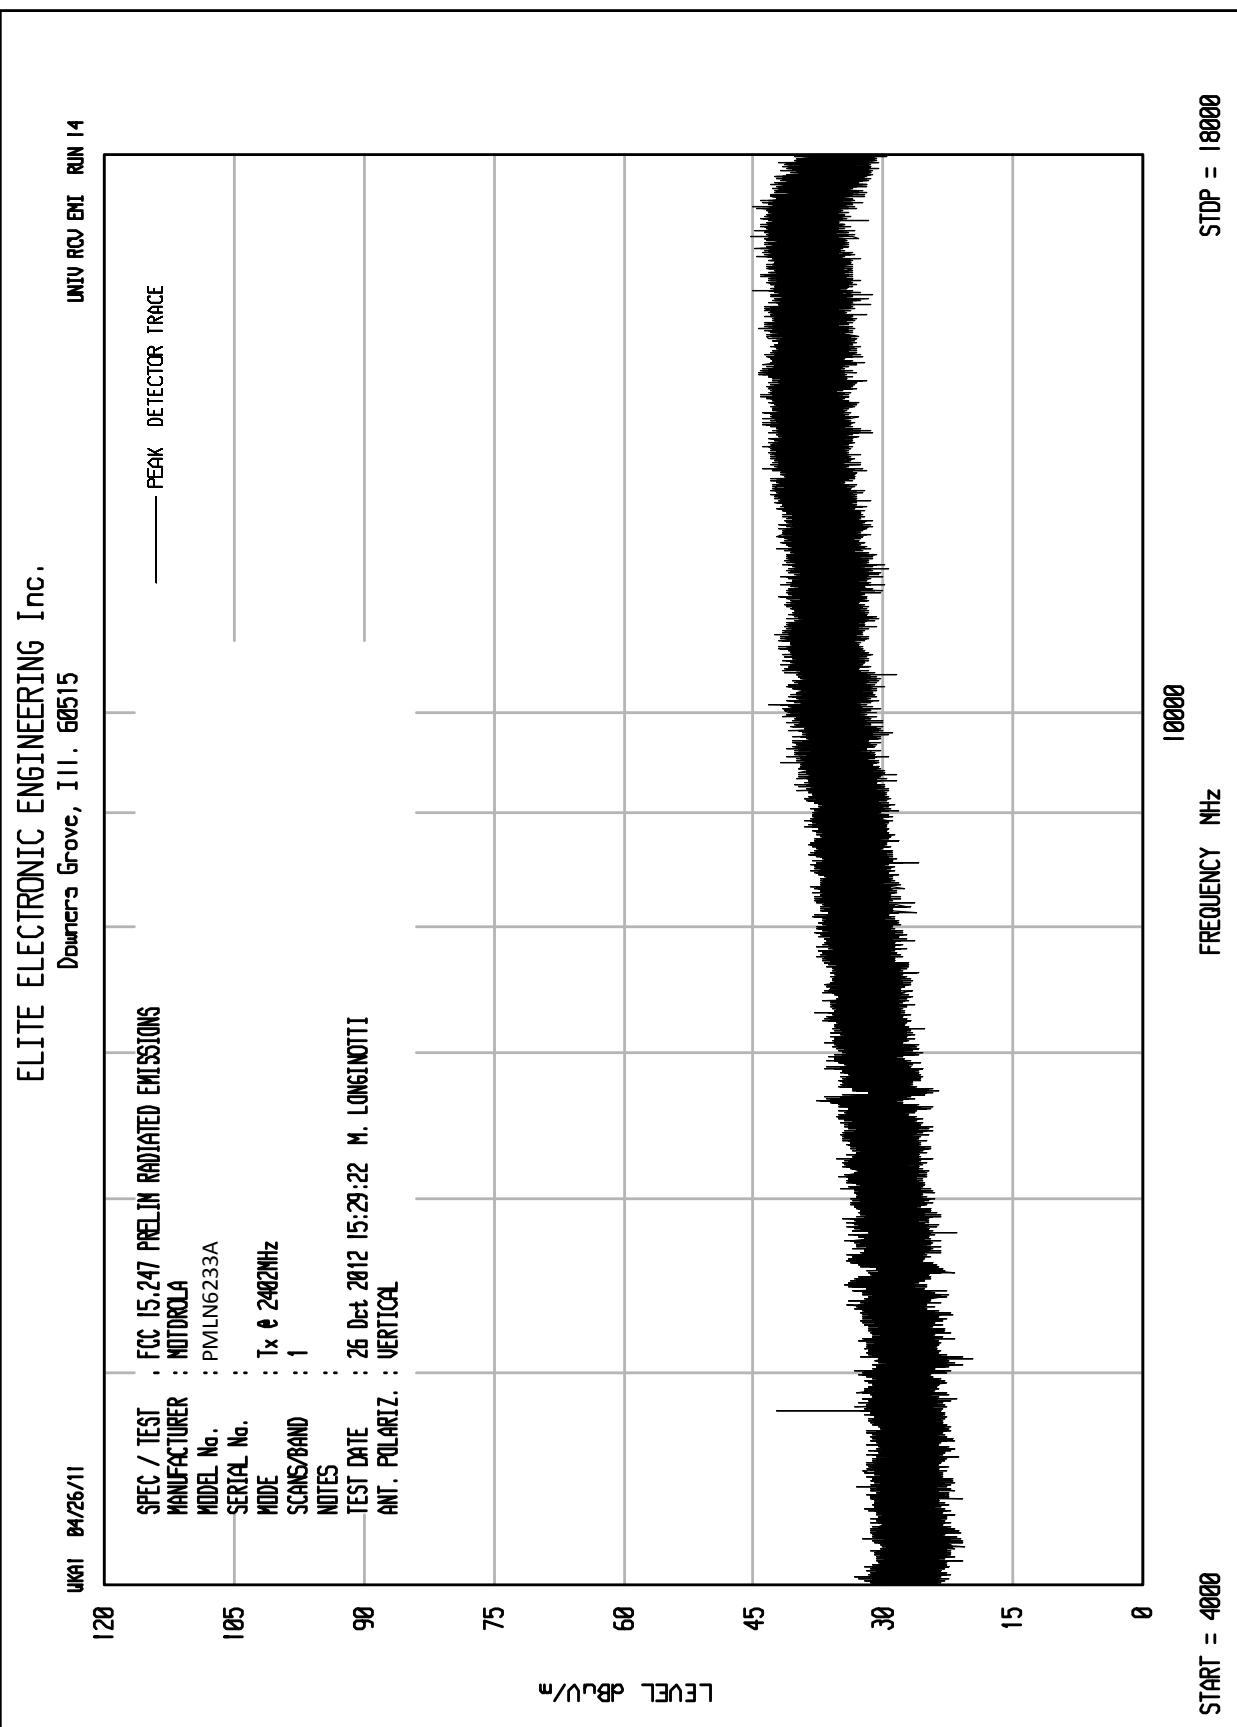


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNI 04/26/11

UNIV RCV EN1 RUN 2

SPEC / TEST	:	FCC 14.247 PRELIM RADIATED EMISSIONS
MANUFACTURER	:	MOTOROLA
MODEL No.	:	PMLN6233A
SERIAL No.	:	
MODE	:	TX @ 2402MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	29 Oct 2012 11:41:08
ANT. POLARIZ.	:	HORIZONTAL

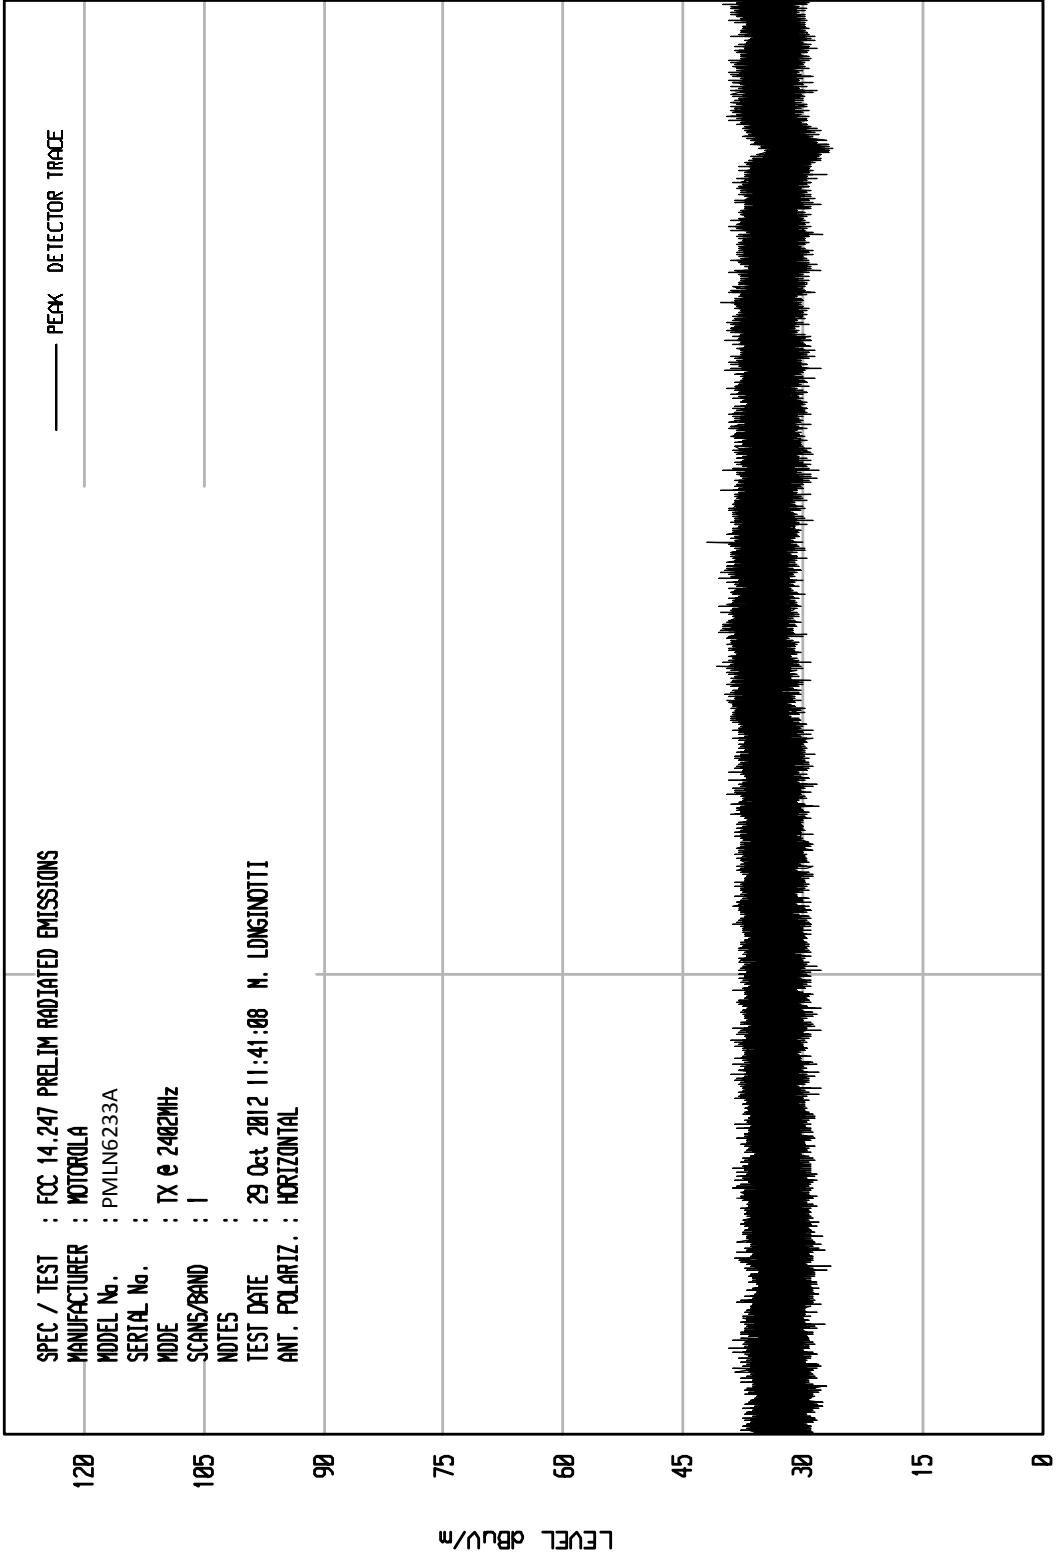



ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515


UNI 04/26/11


UNIV RCV EMI RUN 3


SPEC / TEST	:	FCC 14.247 PRELIM RADIATED EMISSIONS
MANUFACTURER	:	MOTOROLA
MODEL No.	:	PMLN6233A
SERIAL No.	:	
MODE	:	TX @ 2402MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	29 Oct 2012 11:44:04 N. LONGNOTTI
ANT. POLARIZ.	:	VERTICAL

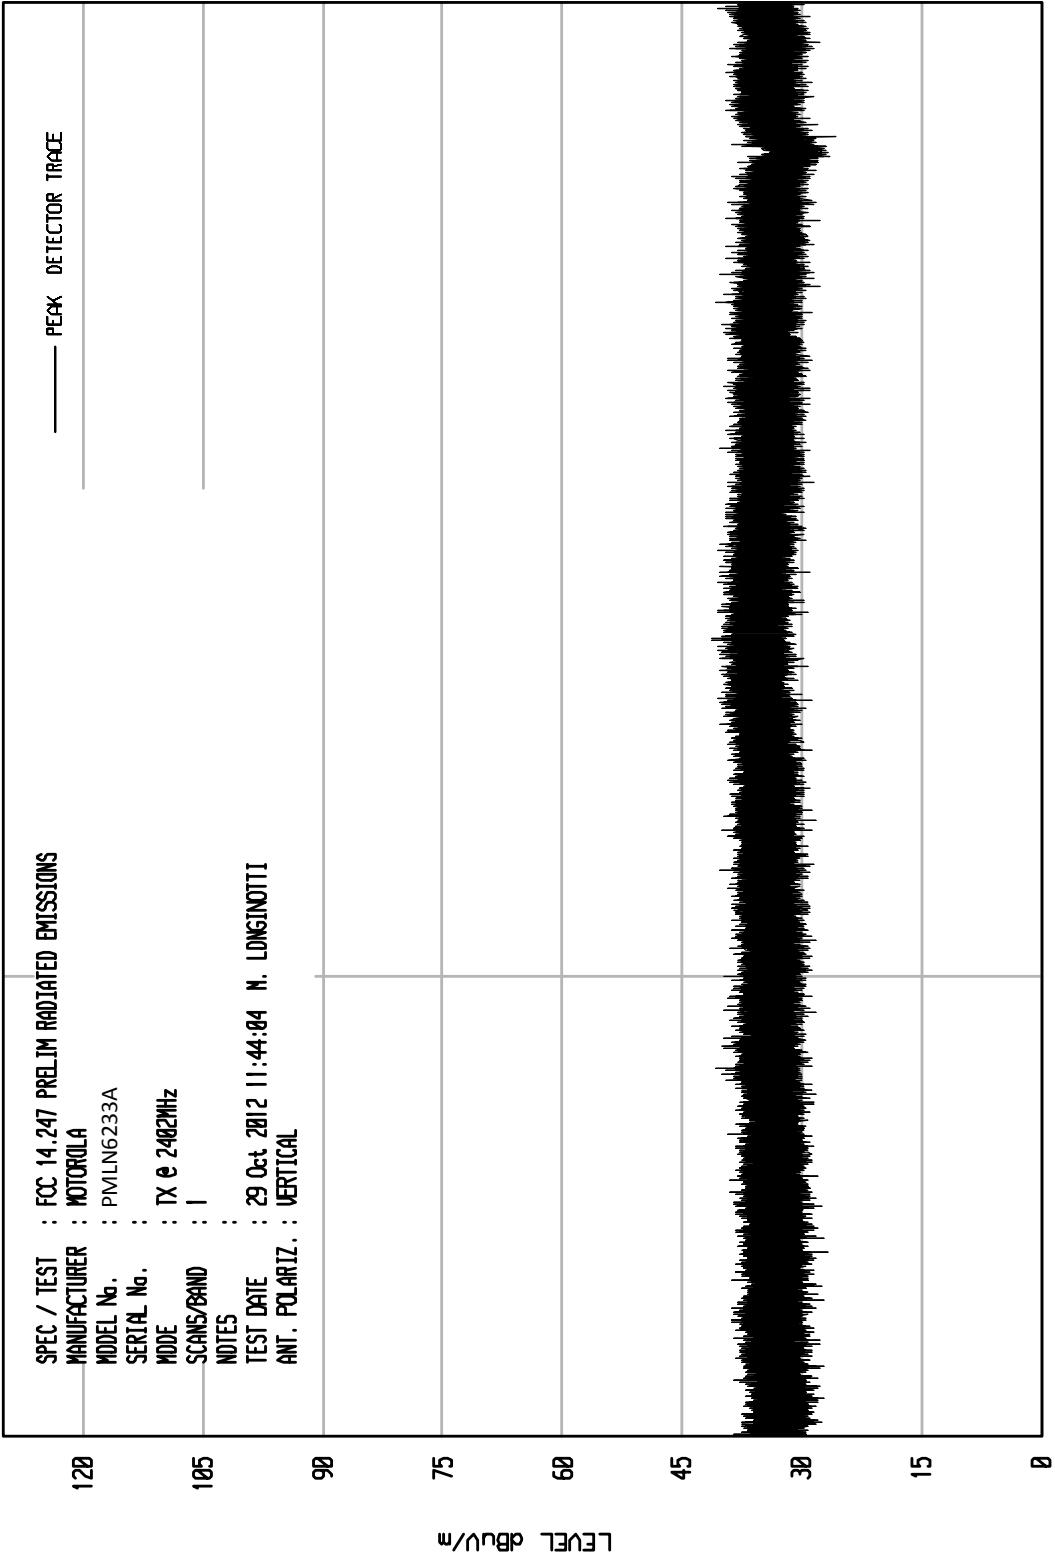


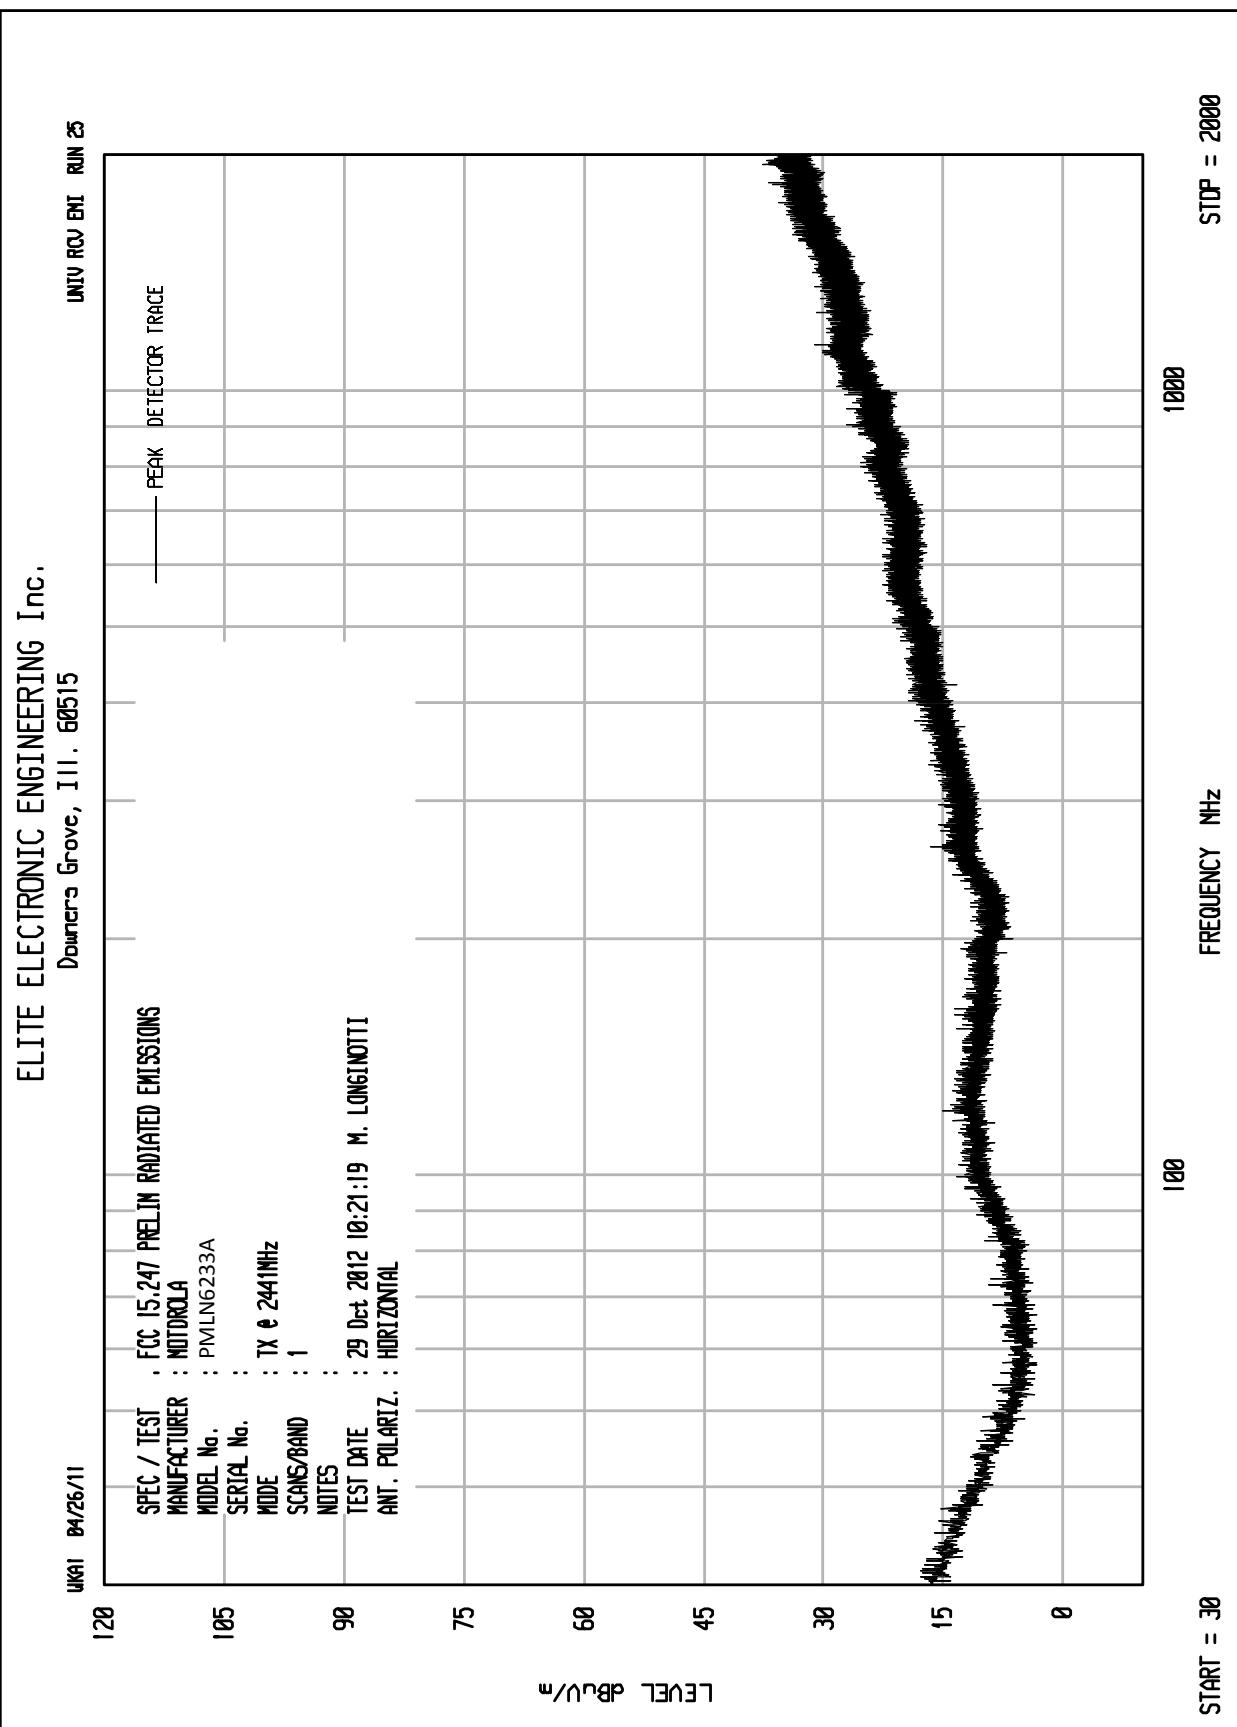


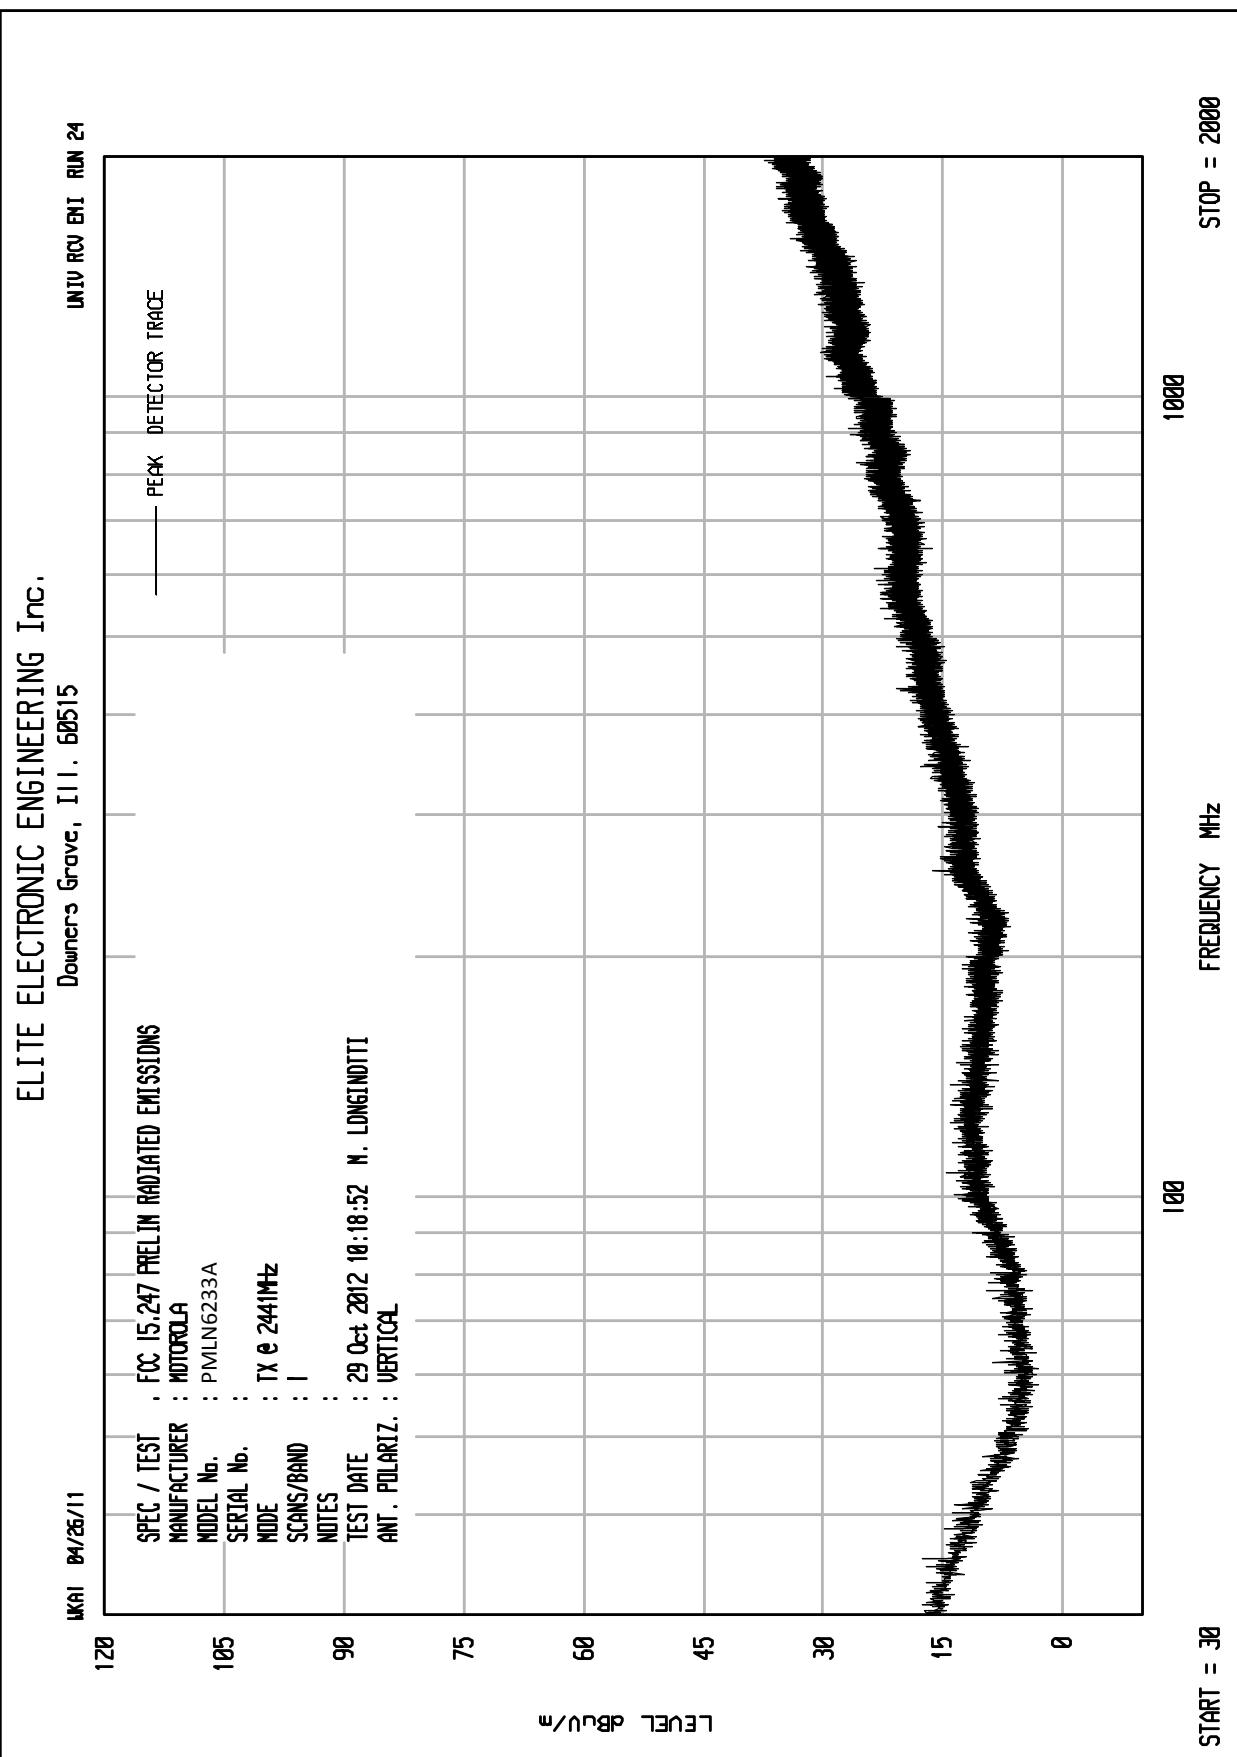

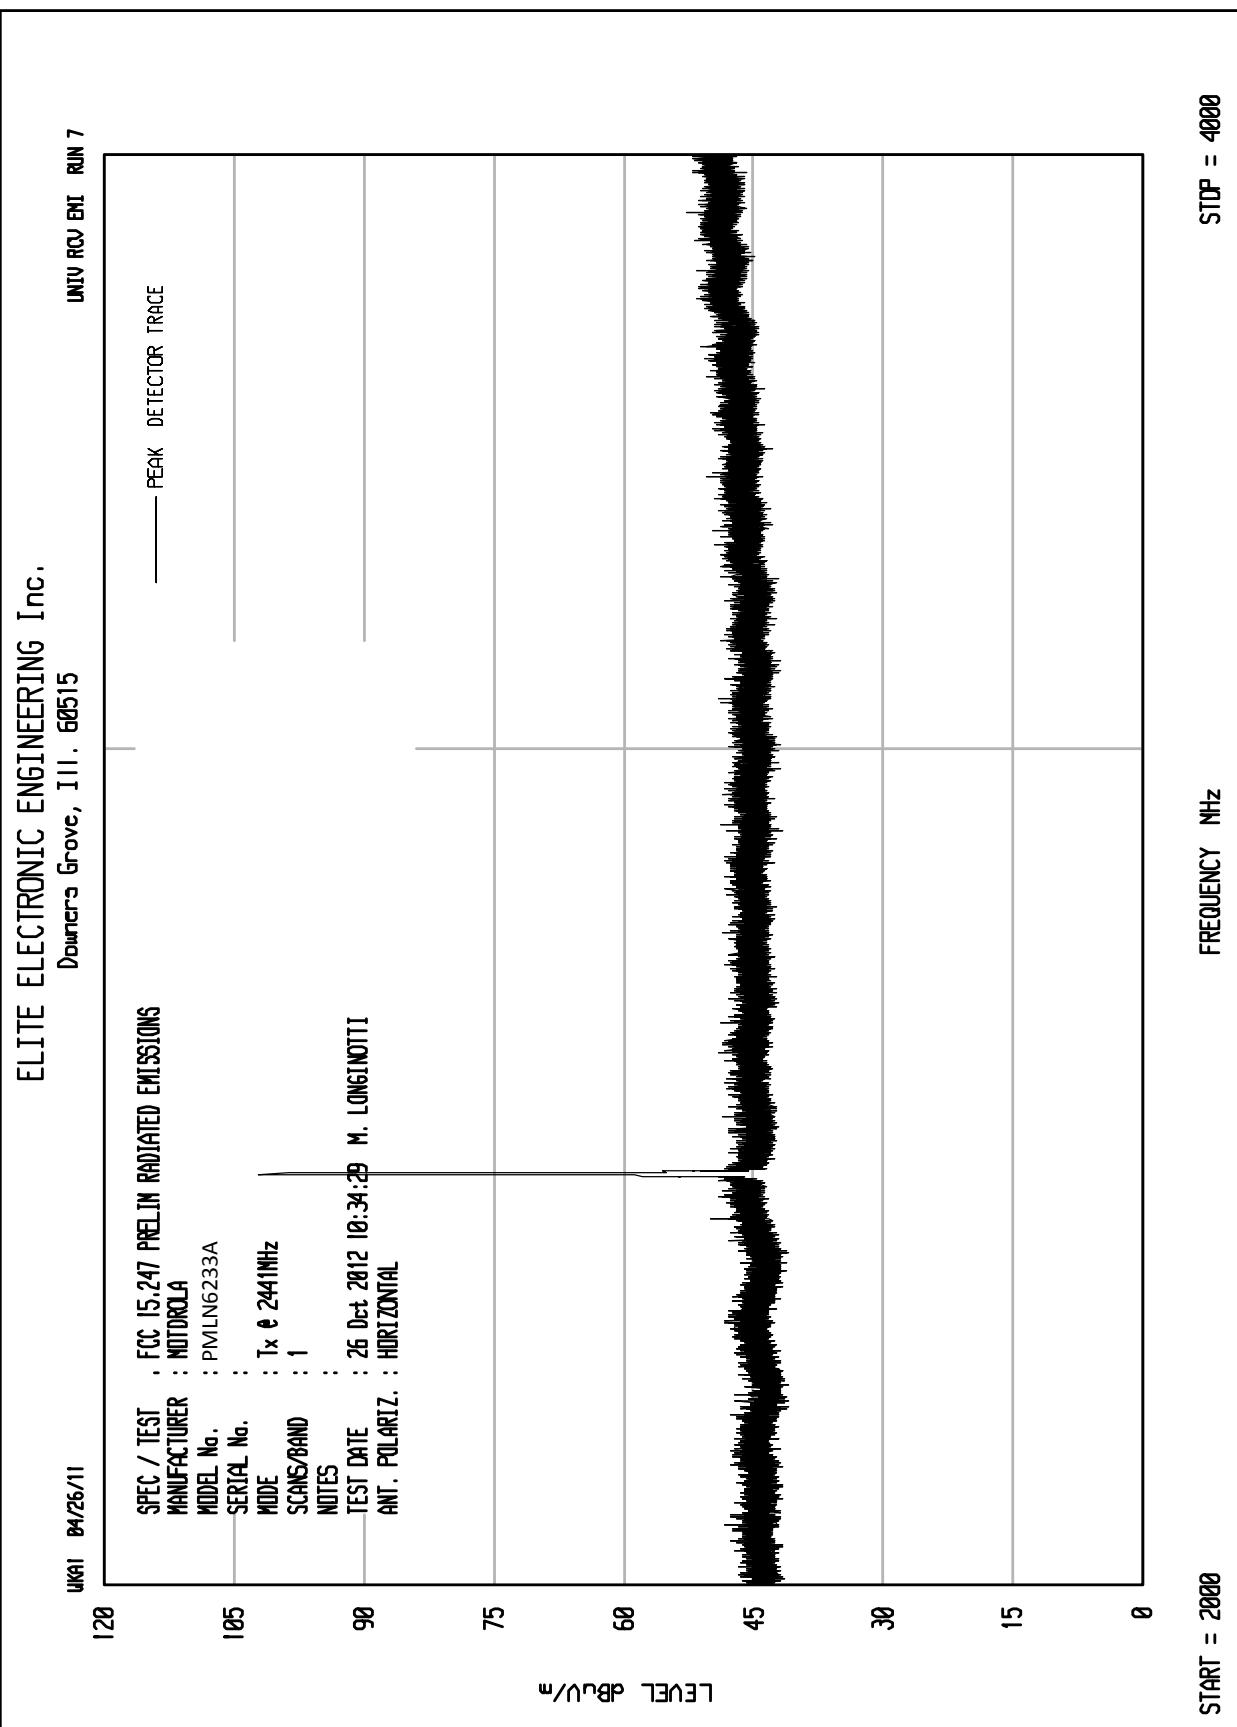

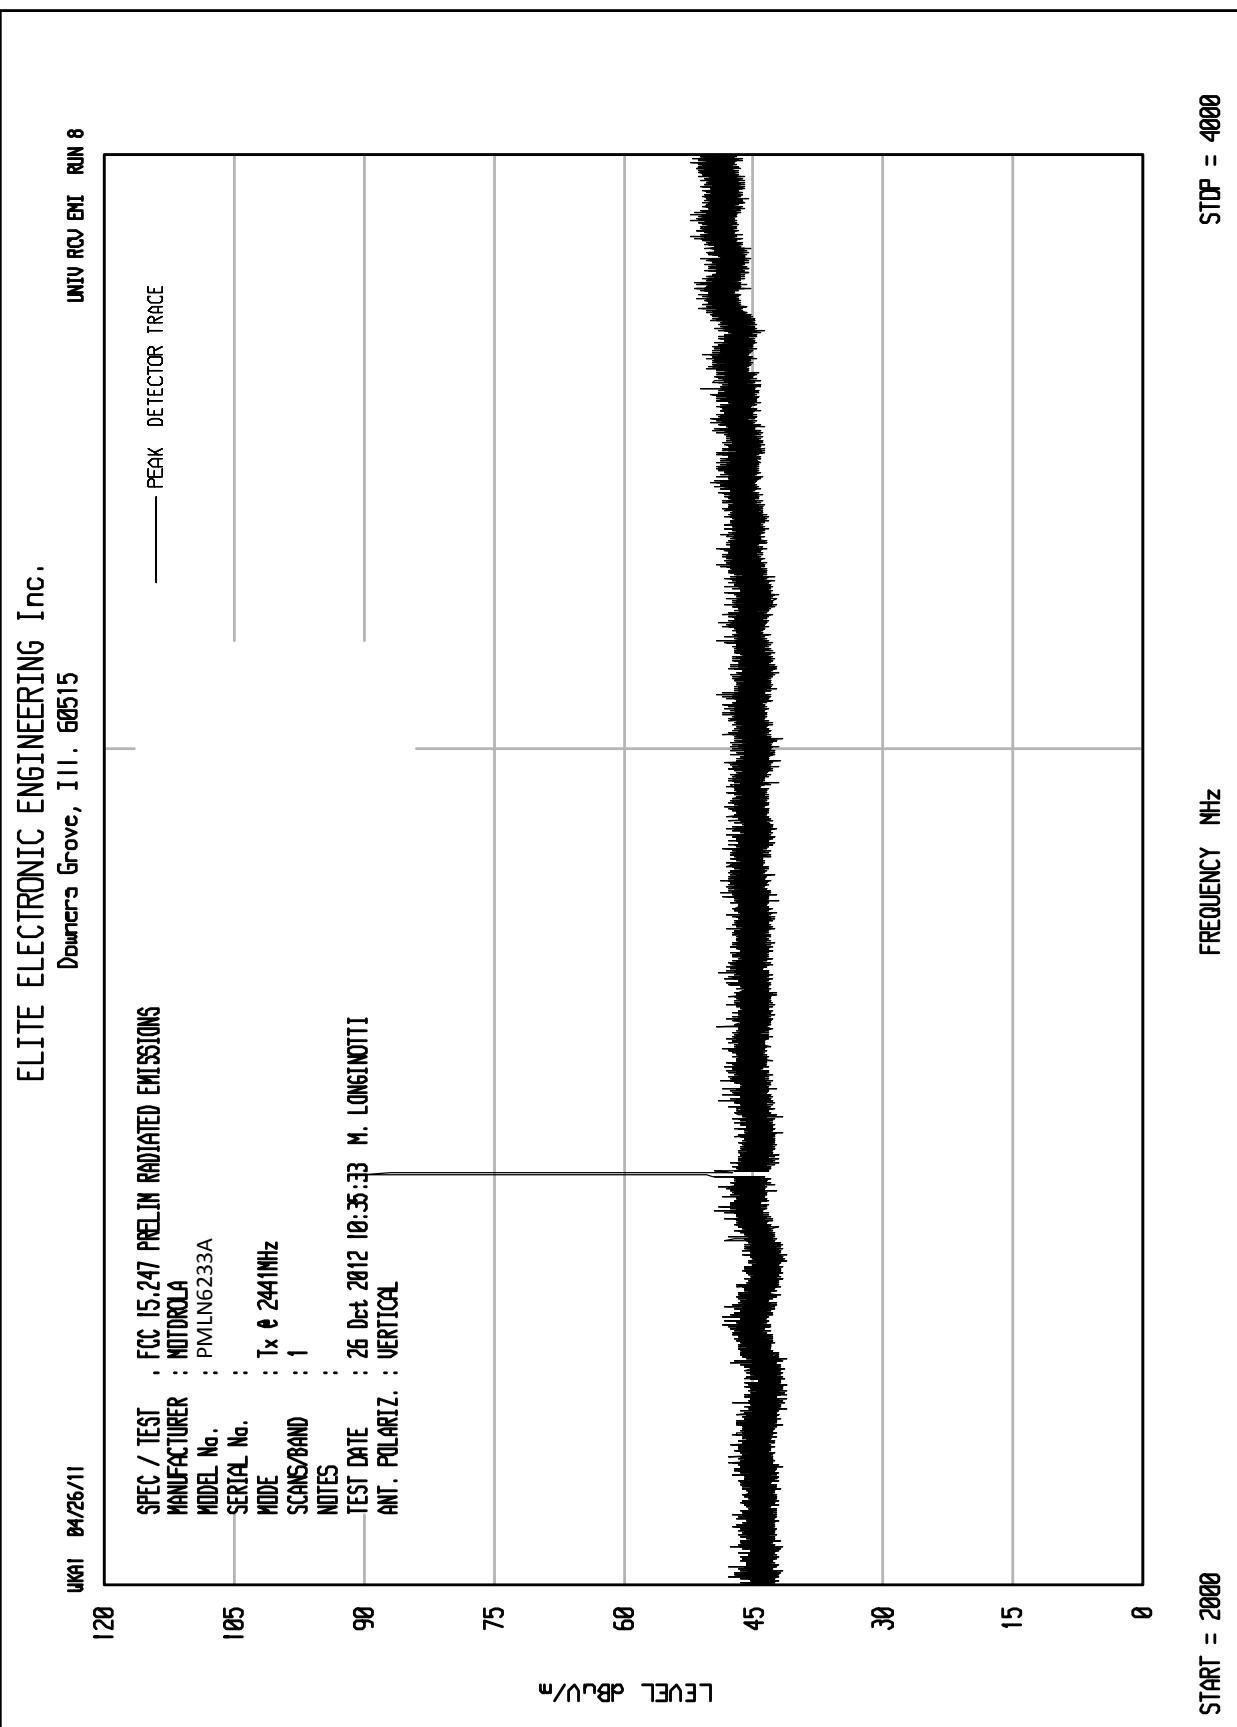

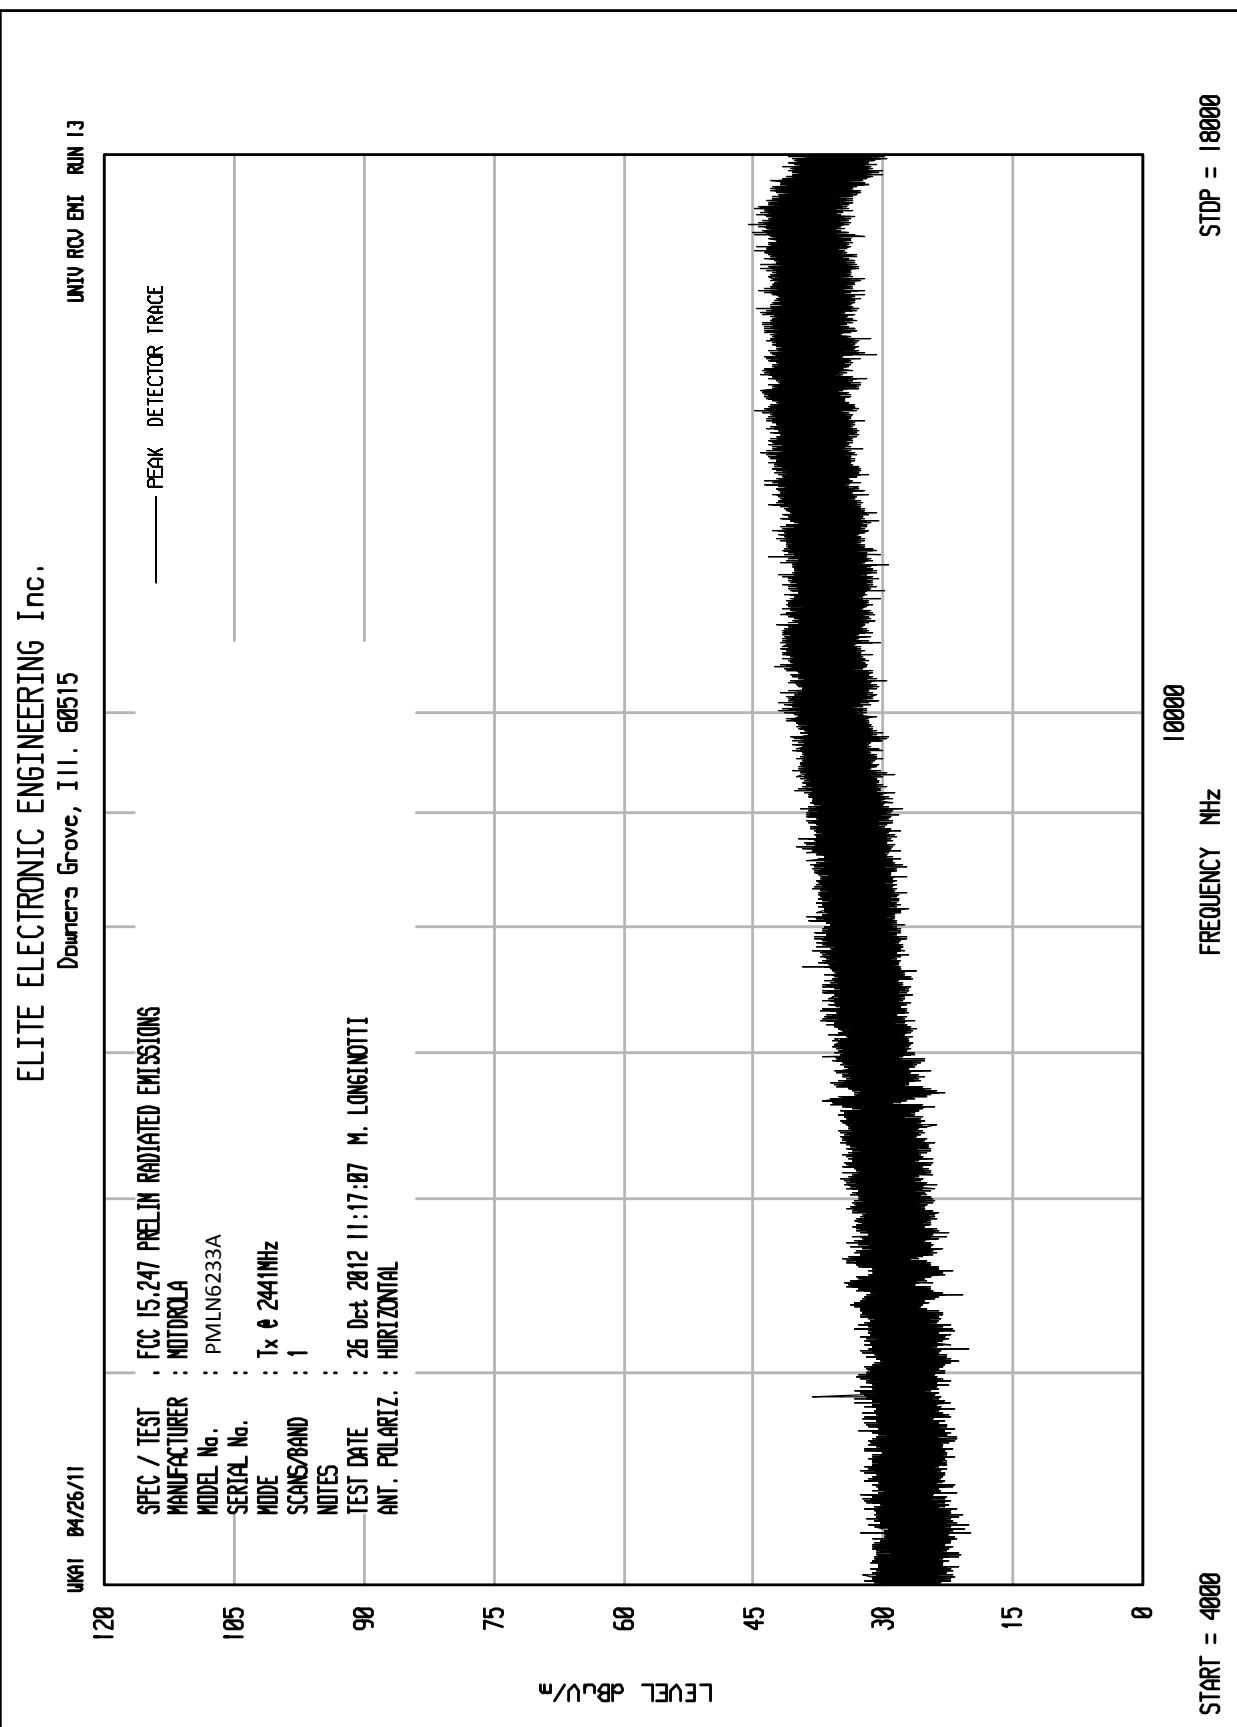

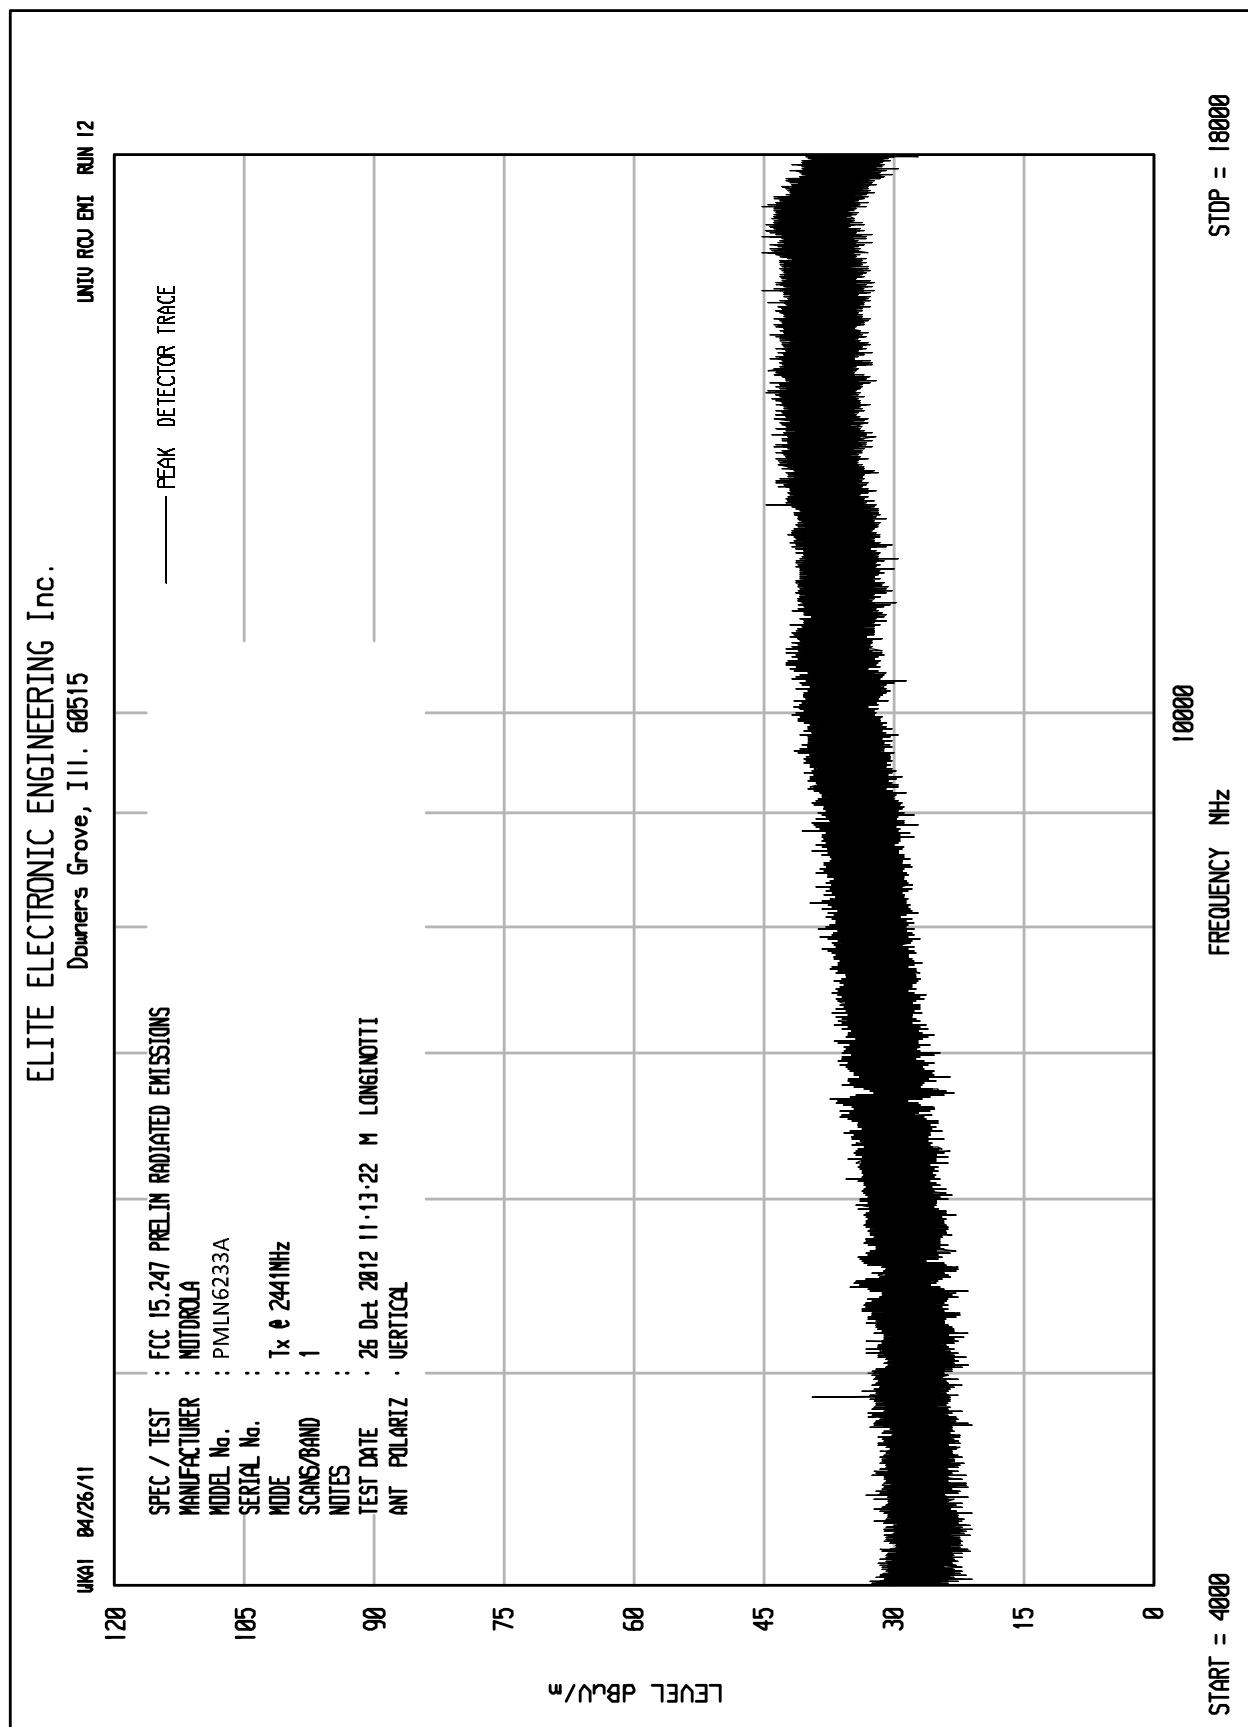


ELITE ELECTRONIC ENGINEERING Inc.
Dunvers Grove, III. 60515

UNI 04/26/11

UNIV RCV EN1 RUN 5

SPEC / TEST : FCC 14.247 PRELIM RADIATED EMISSIONS
MANUFACTURER : MOTOROLA
MODEL No. : PMLN6233A
SERIAL No. :
MODE : TX @ 2441MHz
SCANS/BAND :
NOTES :
TEST DATE : 29 Oct 2012 11:51:42 N. LONGNOTTI
ANT. POLARIZ. : HORIZONTAL

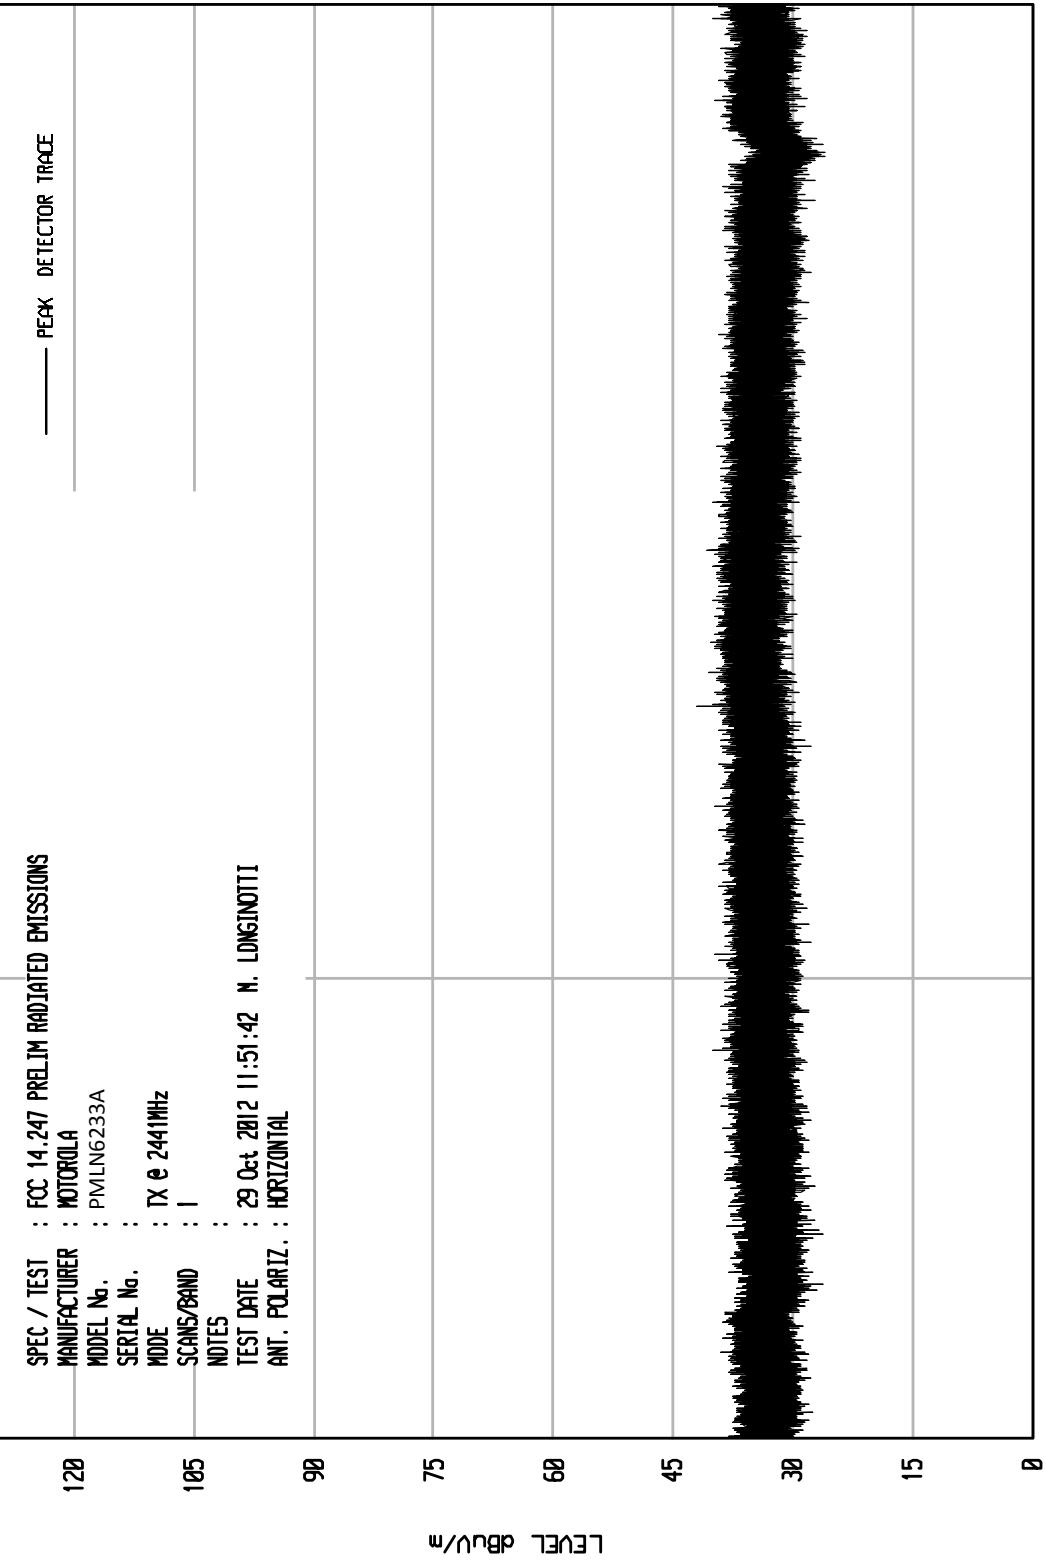



ELITE ELECTRONIC ENGINEERING Inc.
Dunvers Grove, III. 60515


UNI 04/26/11


UNIV RCV EN1 RUN 4


SPEC / TEST : FCC 14.247 PRELIM RADIATED EMISSIONS
MANUFACTURER : MOTOROLA
MODEL No. : PMLN6233A
SERIAL No. :
MODE : TX @ 2441MHz
SCANS/BAND :
NOTES :
TEST DATE : 29 Oct 2012 11:48:43 N. LONGNOTTI
ANT. POLARIZ. : VERTICAL

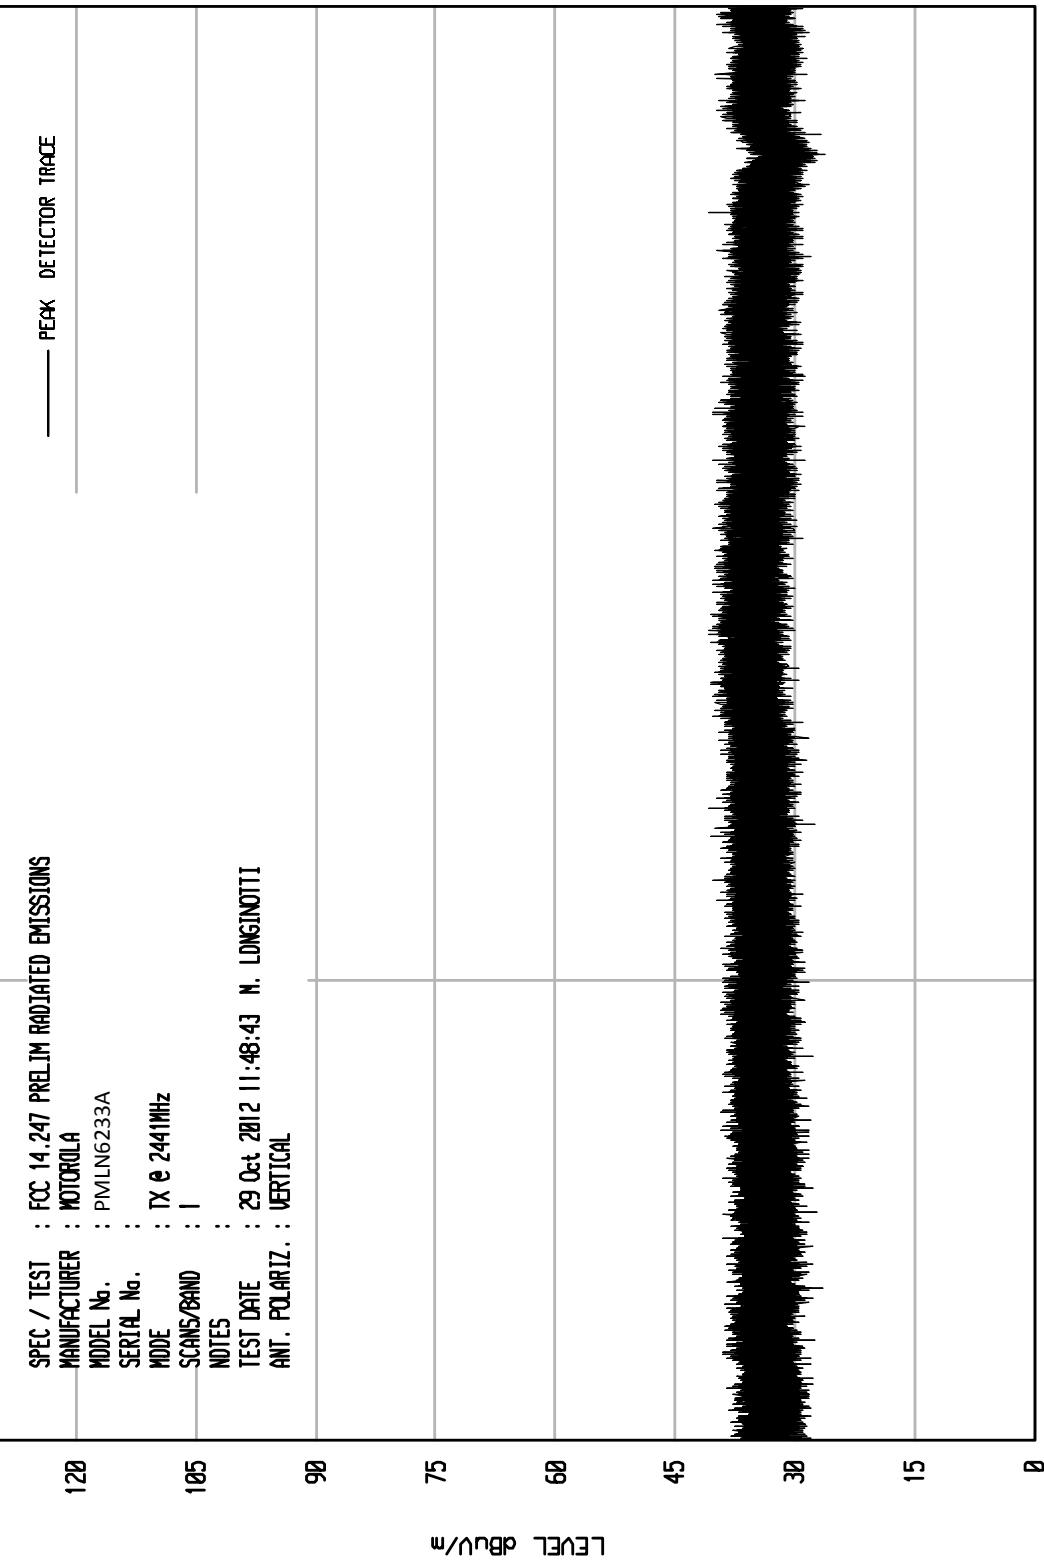


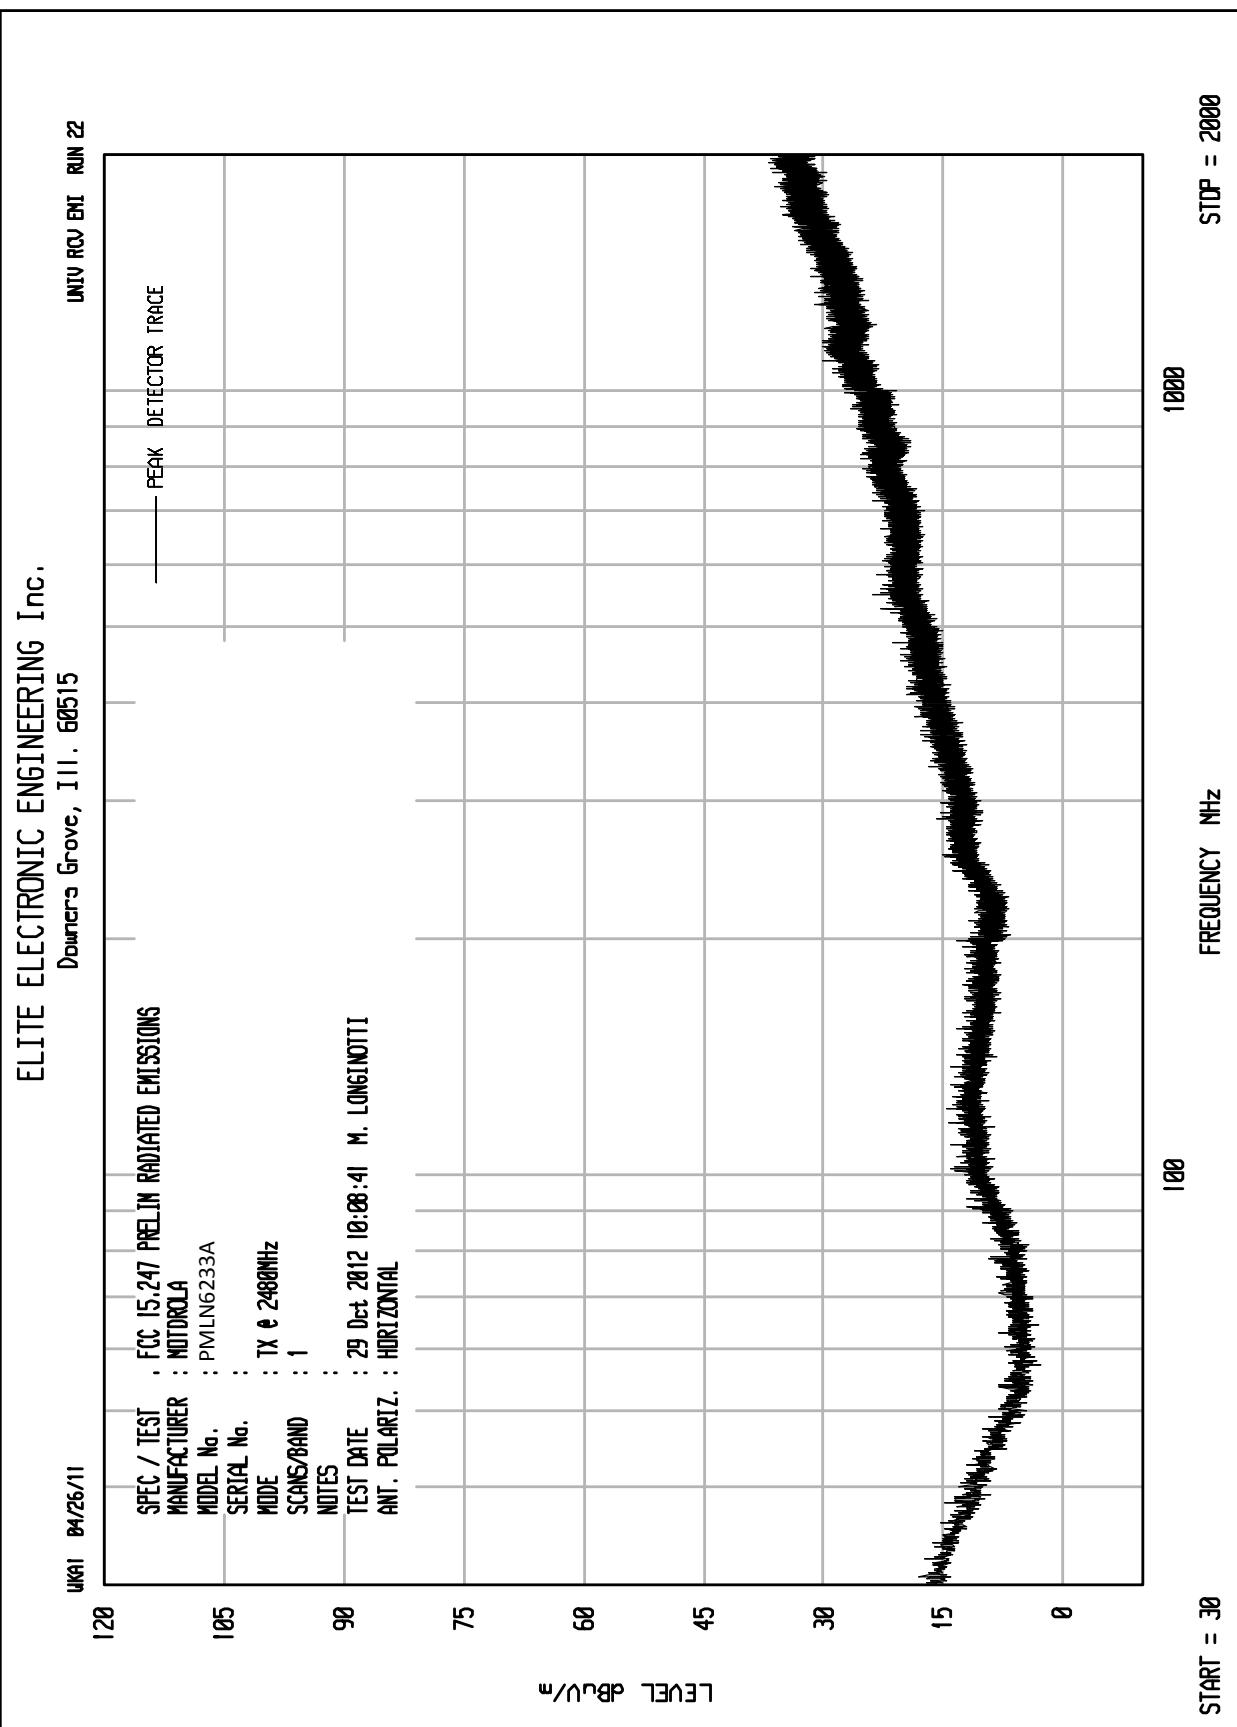


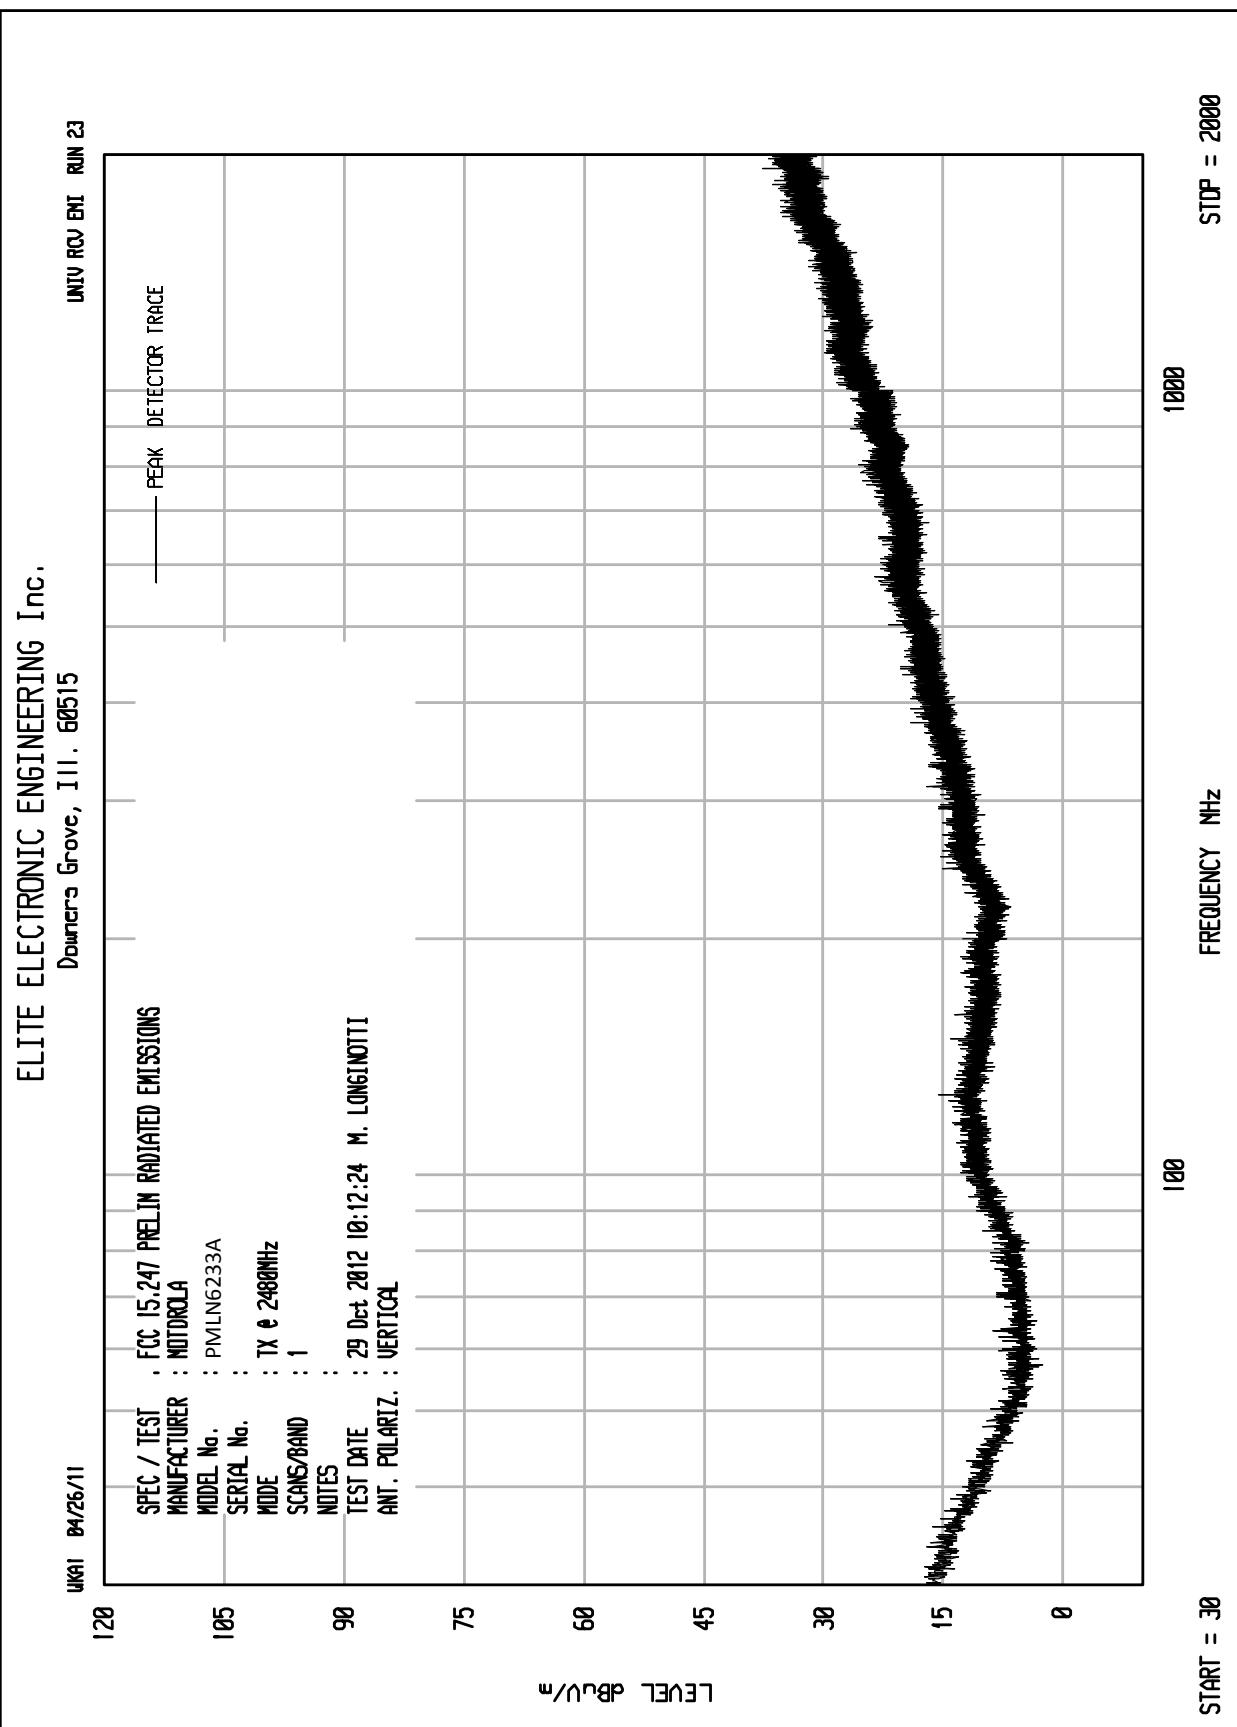

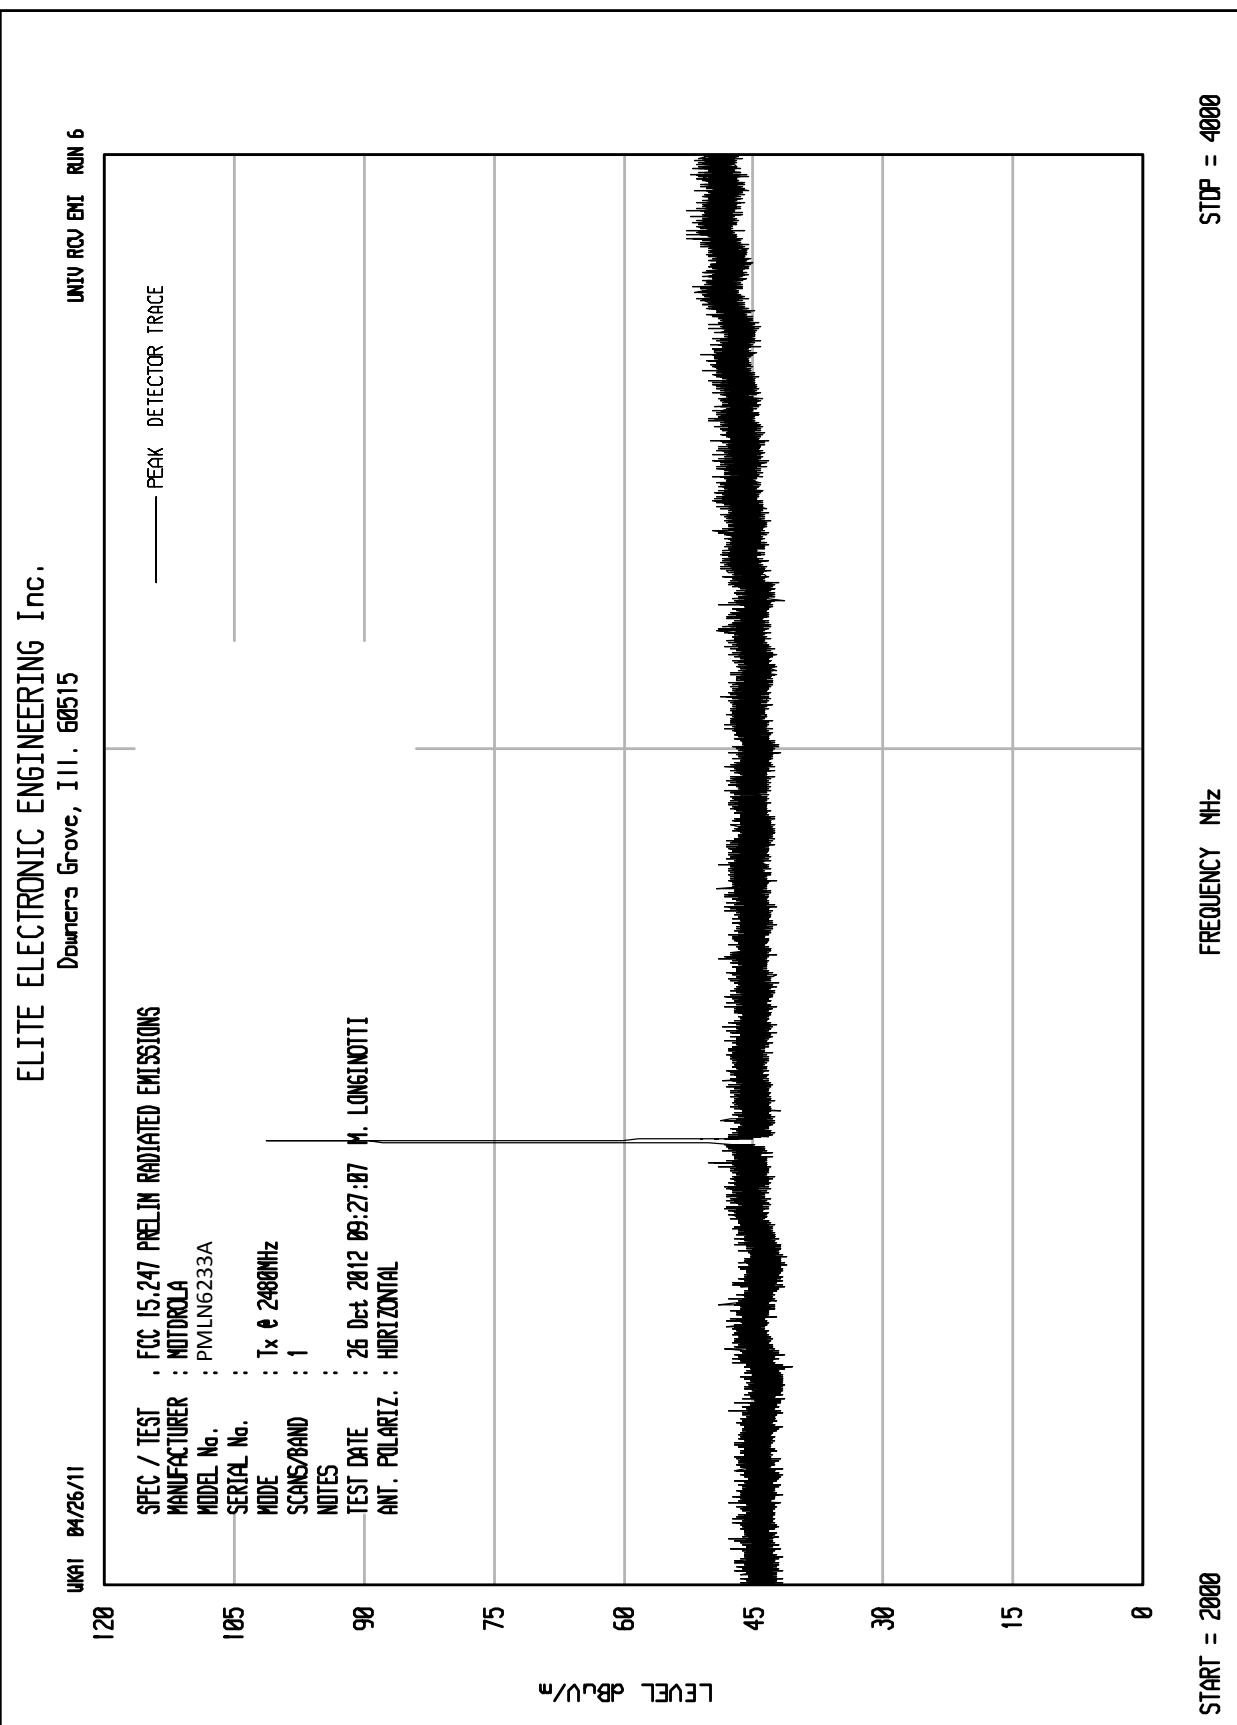

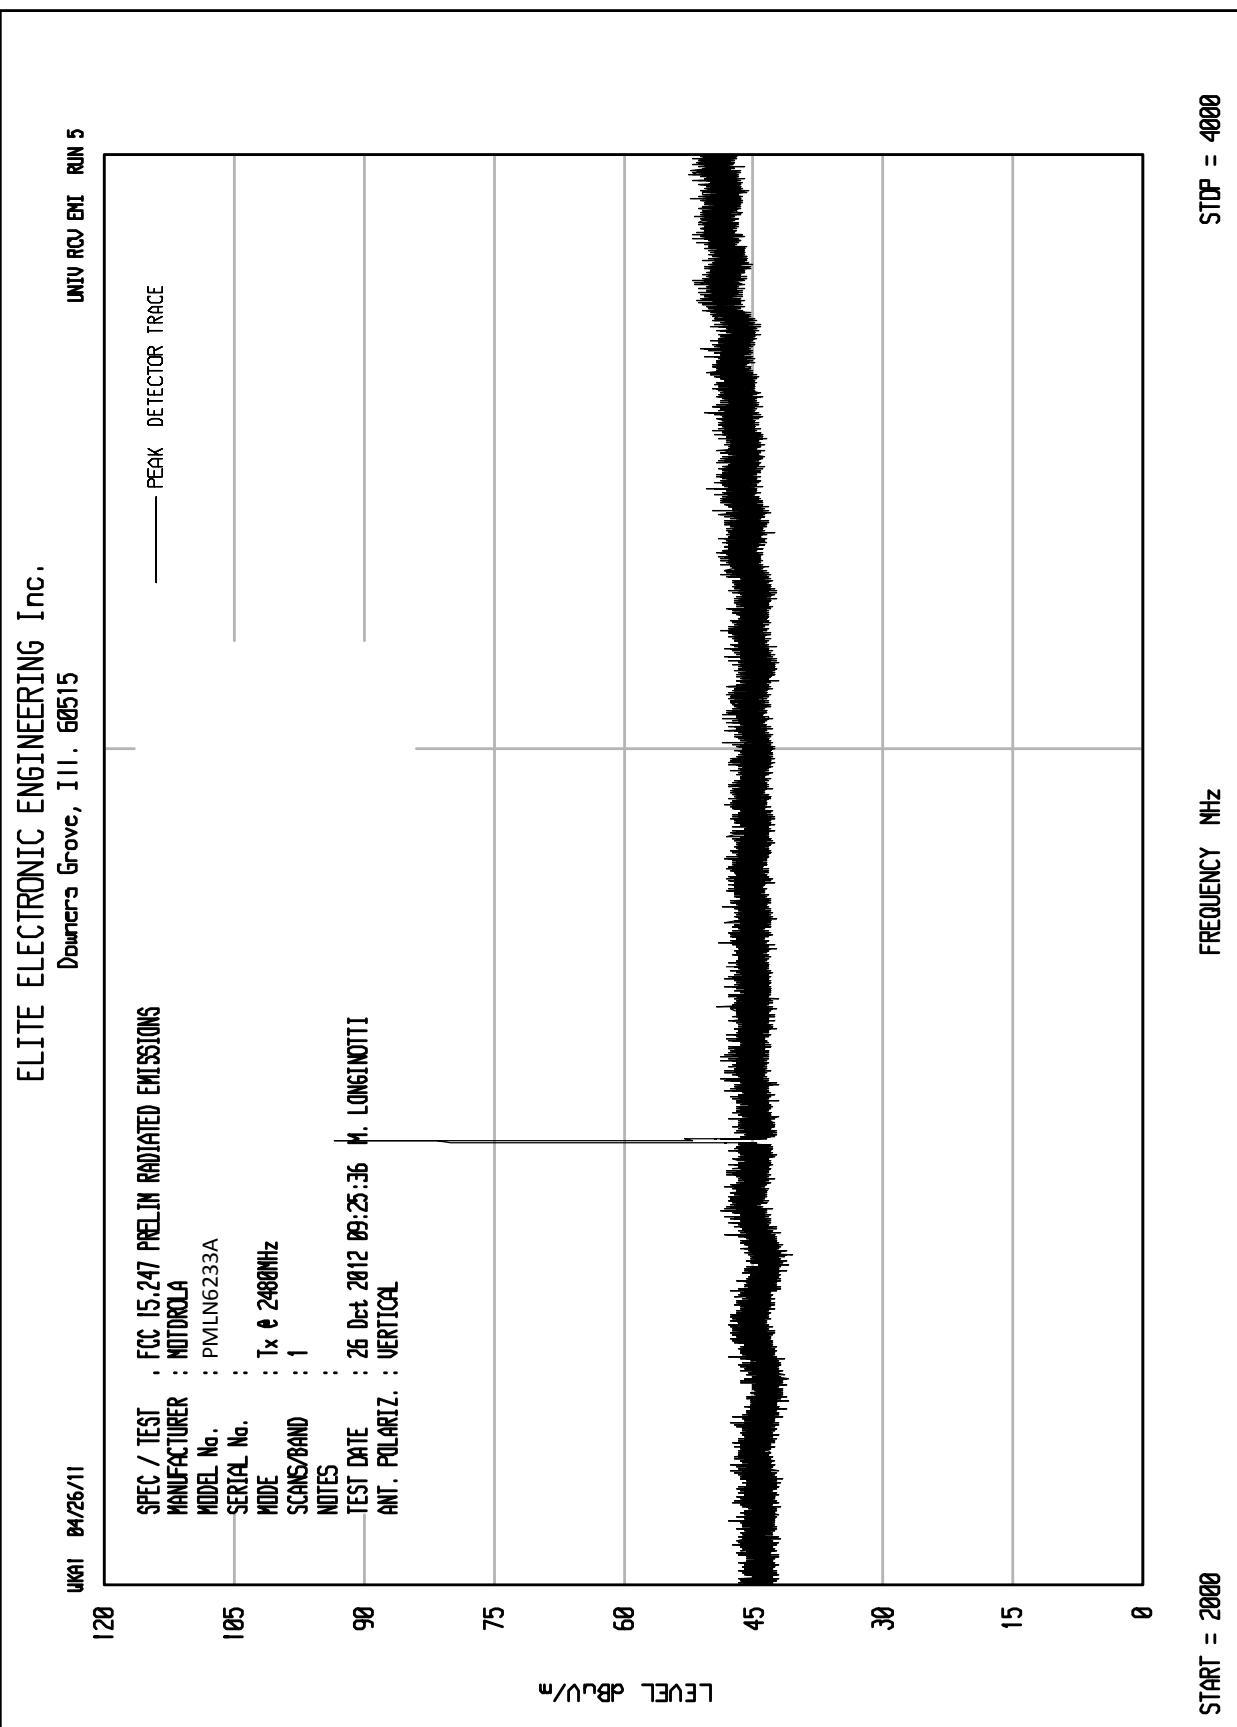

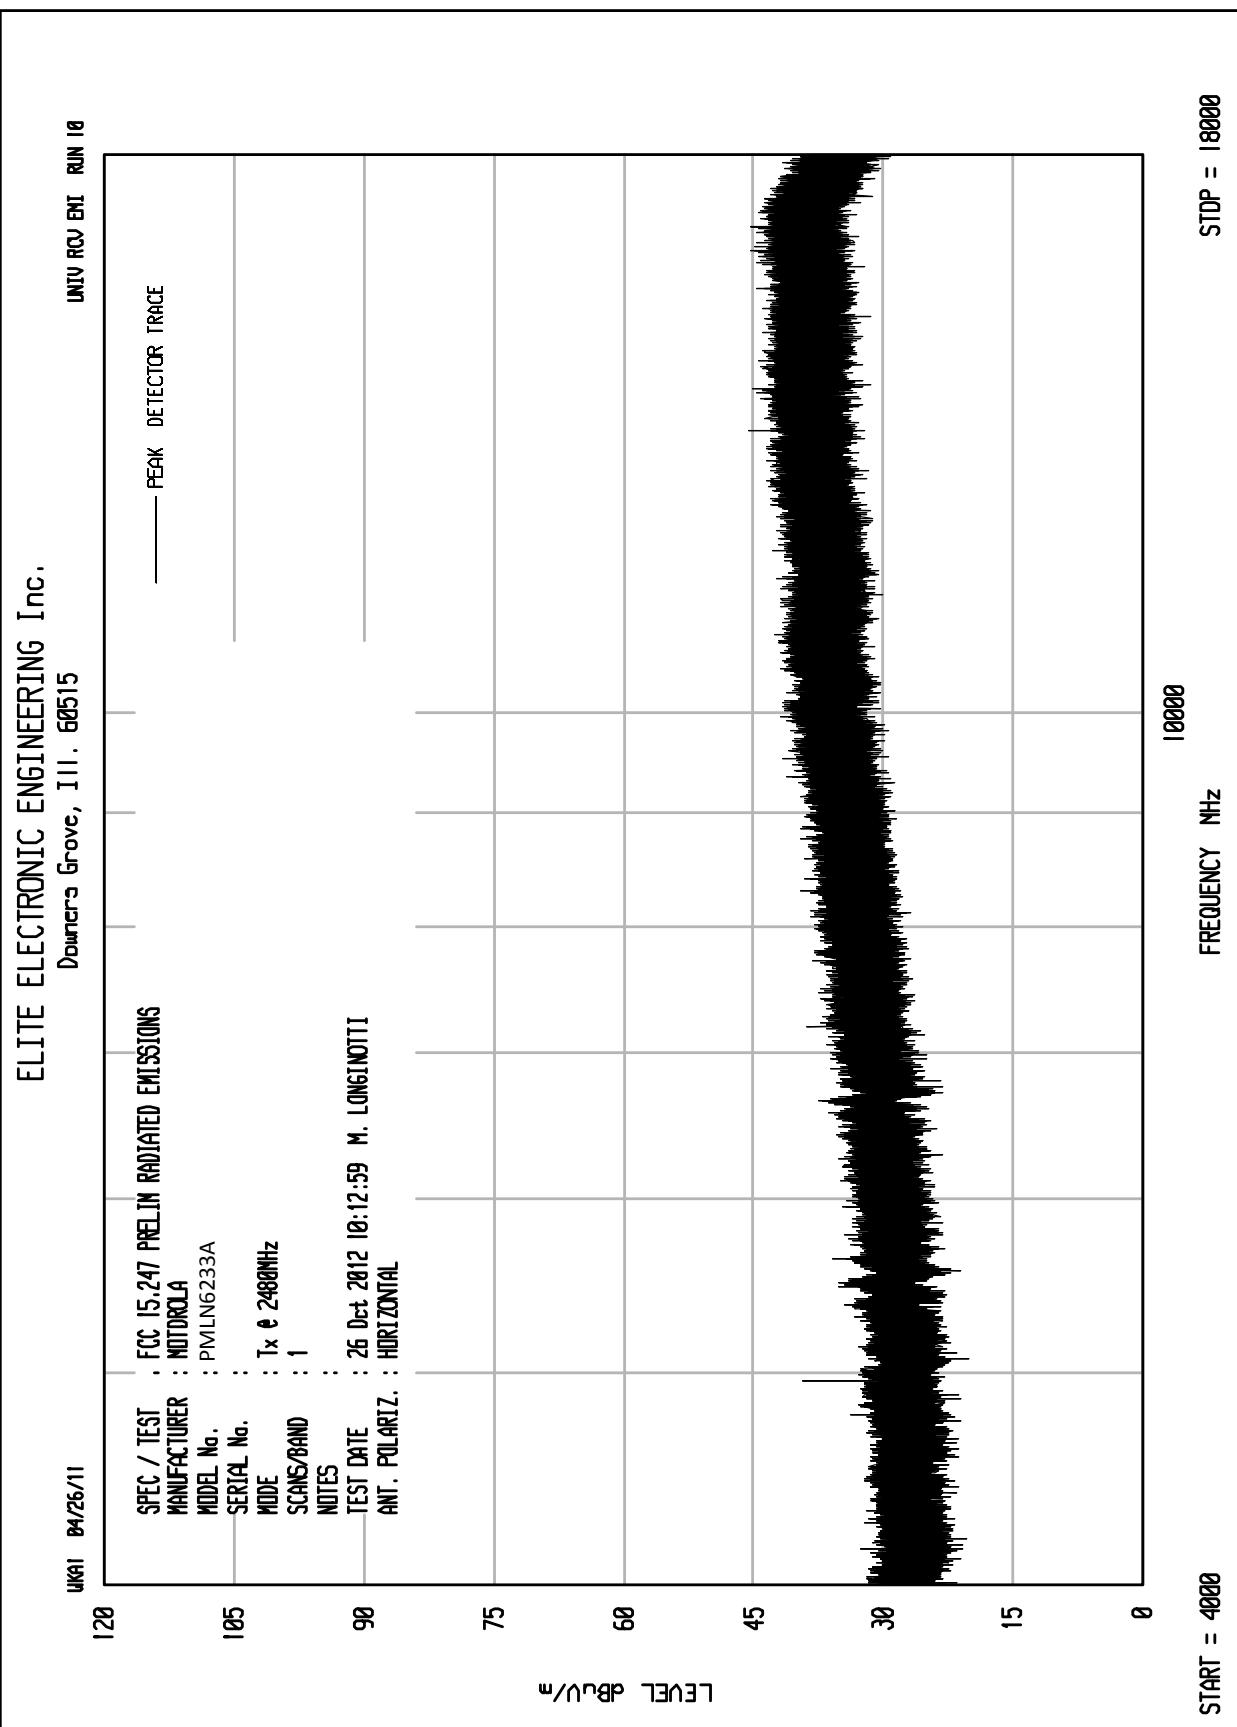


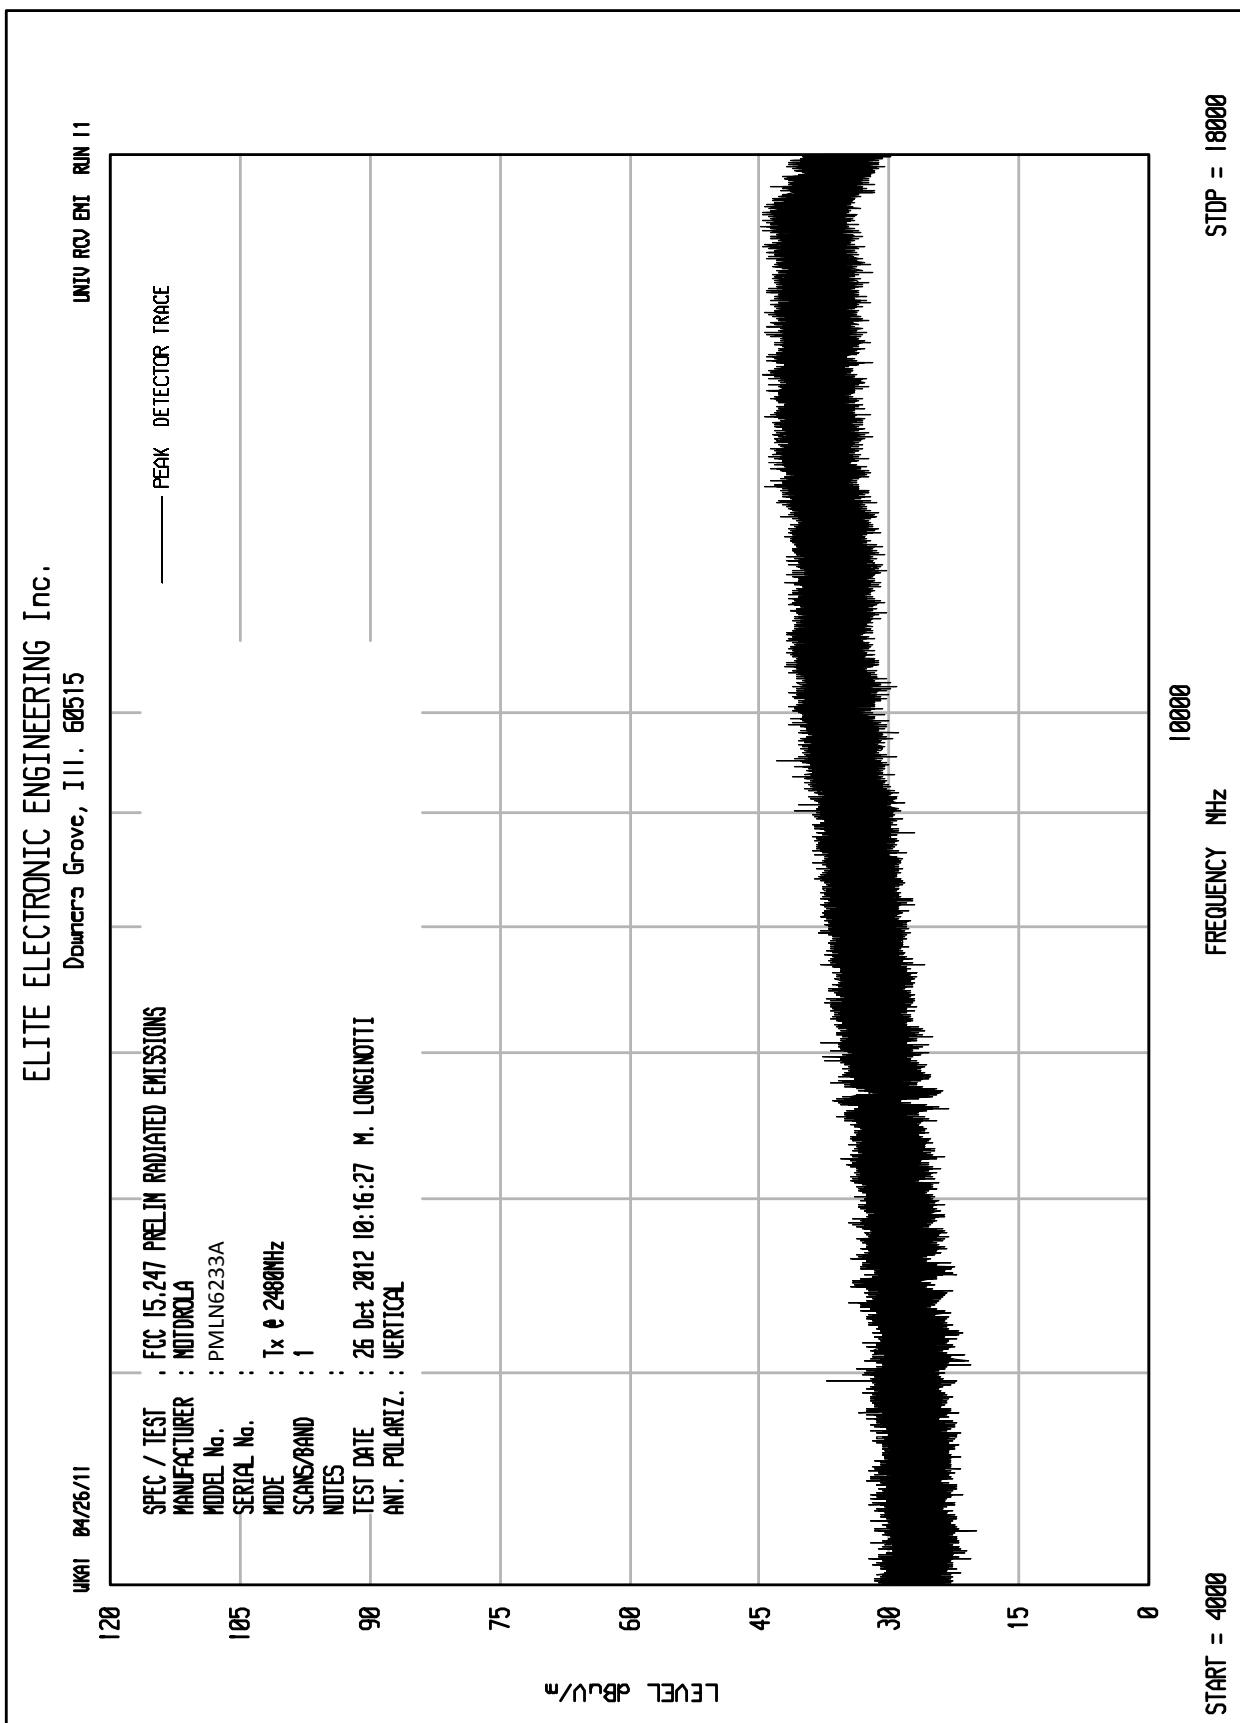

ELITE ELECTRONIC ENGINEERING Inc.
Dunvers Grove, III. 60515

UNI 04/26/11

UNIU RCU ENI RUN 6

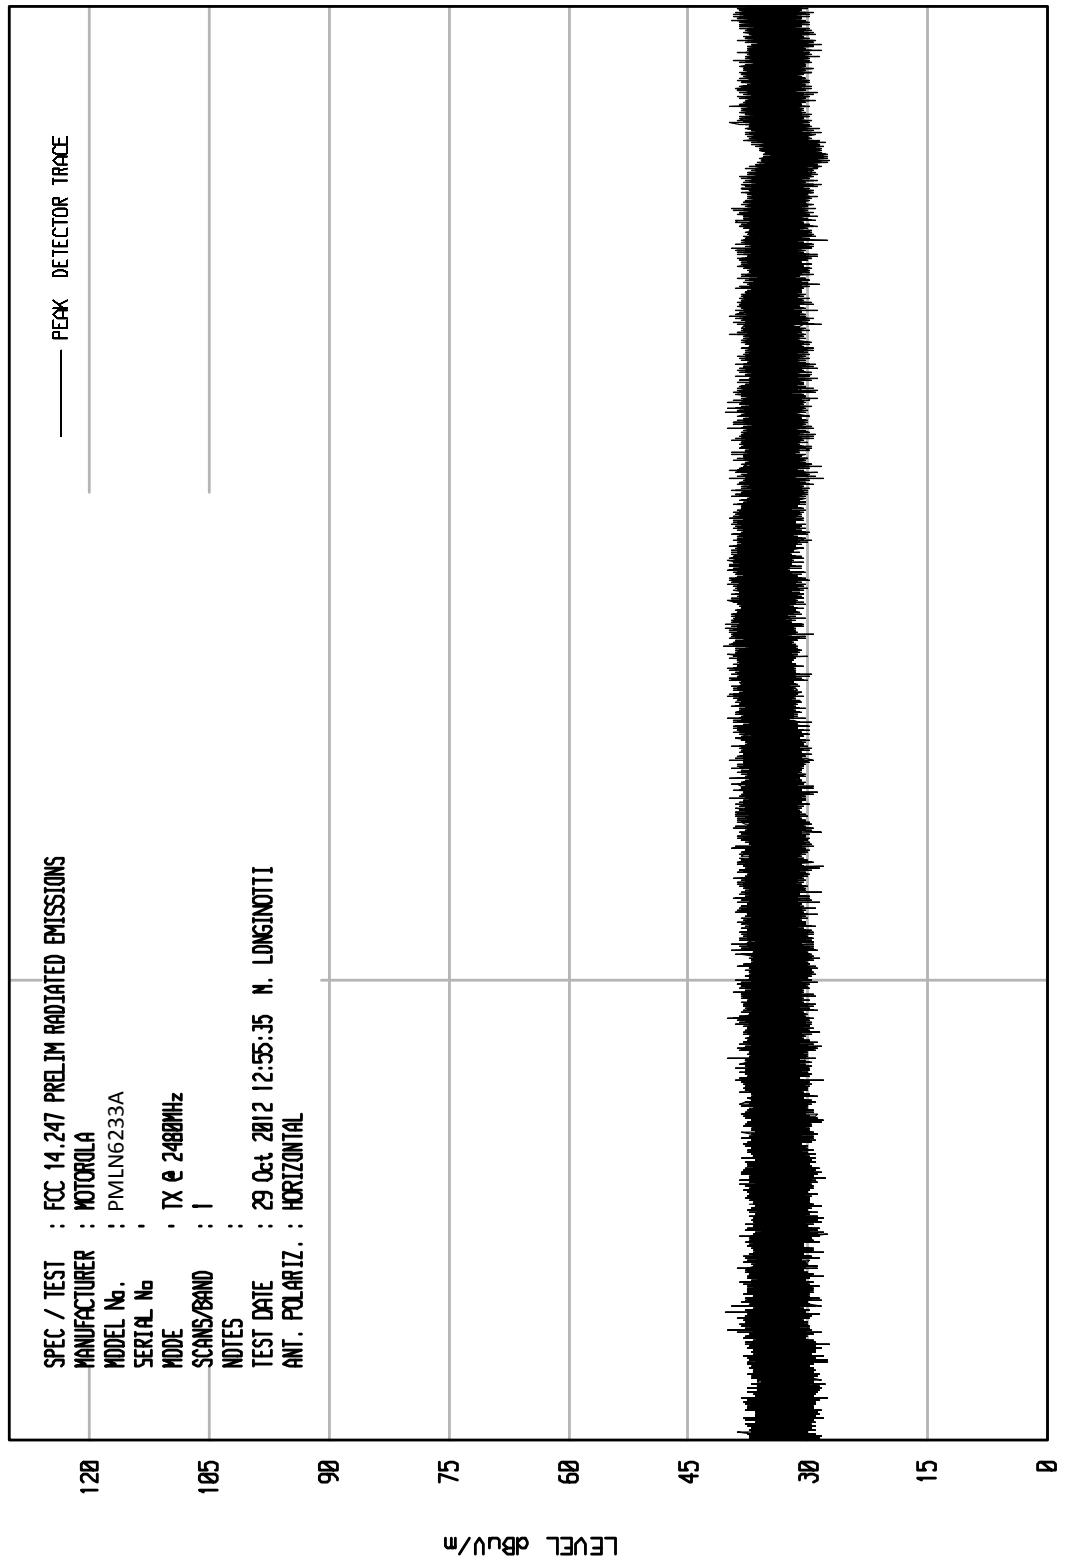

ELITE ELECTRONIC ENGINEERING Inc.
Dunvers Grove, III. 60515

UNI 04/26/11

UNIV RCV EN1 RUN 7

SPEC / TEST	:	FCC 14.247 PRELIM RADIATED EMISSIONS
MANUFACTURER	:	MOTOROLA
MODEL No.	:	PWILNG233A
SERIAL No.	:	
MODE	:	TX @ 2480MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	29 Oct 2012 12:58:02
ANT. POLARIZ.	:	VERTICAL

120
105
90

LEVEL dBm/uV/m

75
60
45
30
15
0

—— PEAK DETECTOR TRACE

START = 18000
FREQUENCY MHz

STOP = 25000



MANUFACTURER : Motorola, Inc.
EUT : Transceiver
MODEL NUMBER : PMLN6233A
TEST MODE : Transmit at 2402MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
: FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
NOTES : Peak Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2402.00	H	73.2		2.6	31.5	0.0	107.3	231002.2		
2402.00	V	65.5		2.6	31.5	0.0	99.6	95195.4		
4804.00	H	51.1		3.7	34.7	-40.1	49.4	295.2	5000.0	-24.6
4804.00	V	49.8		3.7	34.7	-40.1	48.1	254.1	5000.0	-25.9
7206.00	H	39.0		4.6	37.8	-39.8	41.7	121.1	23100.2	-45.6
7206.00	V	37.3		4.6	37.8	-39.8	40.0	99.6	23100.2	-47.3
9608.00	H	40.0		5.2	39.7	-38.8	46.1	201.1	23100.2	-41.2
9608.00	V	38.1		5.2	39.7	-38.8	44.2	161.6	23100.2	-43.1
12010.00	H	47.2	Ambient	6.1	41.2	-39.6	54.9	554.7	5000.0	-19.1
12010.00	V	48.1	Ambient	6.1	41.2	-39.6	55.8	615.3	5000.0	-18.2
14412.00	H	36.7	Ambient	6.6	42.3	-39.9	45.7	193.2	23100.2	-41.6
14412.00	V	37.2	Ambient	6.6	42.3	-39.9	46.2	204.6	23100.2	-41.1
16814.00	H	36.6	Ambient	7.2	41.2	-38.8	46.2	204.3	23100.2	-41.1
16814.00	V	36.8	Ambient	7.2	41.2	-38.8	46.4	209.0	23100.2	-40.9
19216.00	H	34.3	Ambient	4.4	40.4	-28.4	50.7	344.5	5000.0	-23.2
19216.00	V	33.9	Ambient	4.4	40.4	-28.4	50.3	329.0	5000.0	-23.6
21618.00	H	33.8	Ambient	4.5	40.6	-27.0	51.8	389.2	23100.2	-35.5
21618.00	V	33.3	Ambient	4.5	40.6	-27.0	51.3	367.4	23100.2	-36.0
24020.00	H	33.5	Ambient	4.5	40.6	-28.0	50.6	340.1	23100.2	-36.6
24020.00	V	32.9	Ambient	4.5	40.6	-28.0	50.0	317.4	23100.2	-37.2

H – Horizontal V – Vertical

Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB)



MANUFACTURER : Motorola, Inc.
EUT : Transceiver
MODEL NUMBER : PMLN6233A
TEST MODE : Transmit at 2402MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
: FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
NOTES : Average Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4804.00	H	51.1		3.7	34.7	-40.1	-41.7	7.7	2.4	500.0	-46.3
4804.00	V	49.8		3.7	34.7	-40.1	-41.7	6.4	2.1	500.0	-47.6
12010.00	H	47.2	Ambient	6.1	41.2	-39.6	-41.7	13.2	4.6	500.0	-40.8
12010.00	V	48.1	Ambient	6.1	41.2	-39.6	-41.7	14.1	5.1	500.0	-39.9
19216.00	H	34.3	Ambient	4.4	40.4	-28.4	-41.7	9.0	2.8	500.0	-44.9
19216.00	V	33.9	Ambient	4.4	40.4	-28.4	-41.7	8.6	2.7	500.0	-45.3

H – Horizontal V – Vertical

Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB) + Duty Cycle(dB)



MANUFACTURER : Motorola, Inc.
EUT : Transceiver
MODEL NUMBER : PMLN6233A
TEST MODE : Transmit at 2441MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
: FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
NOTES : Peak Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2441.00	H	72.4		2.6	31.5	0.0	106.5	211607.8		
2441.00	V	65.9		2.6	31.5	0.0	100.0	100122.5		
4882.00	H	52.5		3.7	34.7	-40.1	50.8	347.6	5000.0	-23.2
4882.00	V	51.9		3.7	34.7	-40.1	50.2	324.4	5000.0	-23.8
7323.00	H	46.4	Ambient	4.7	37.9	-39.7	49.2	289.4	5000.0	-24.7
7323.00	V	46.6	Ambient	4.7	37.9	-39.7	49.4	296.2	5000.0	-24.5
9764.00	H	37.3	Ambient	5.2	39.8	-38.7	43.6	152.1	21160.8	-42.9
9764.00	V	37.9	Ambient	5.2	39.8	-38.7	44.2	163.0	21160.8	-42.3
12205.00	H	46.3	Ambient	6.1	41.4	-39.4	54.3	518.2	5000.0	-19.7
12205.00	V	46.1	Ambient	6.1	41.4	-39.4	54.1	506.4	5000.0	-19.9
14646.00	H	36.4	Ambient	6.7	42.3	-40.1	45.3	184.5	21160.8	-41.2
14646.00	V	36.0	Ambient	6.7	42.3	-40.1	44.9	176.2	21160.8	-41.6
17087.00	H	36.9	Ambient	7.3	40.8	-38.7	46.3	205.9	21160.8	-40.2
17087.00	V	36.4	Ambient	7.3	40.8	-38.7	45.8	194.3	21160.8	-40.7
19528.00	H	34.1	Ambient	4.4	40.4	-27.9	51.1	357.8	5000.0	-22.9
19528.00	V	34.1	Ambient	4.4	40.4	-27.9	51.1	357.8	5000.0	-22.9
21969.00	H	33.9	Ambient	4.4	40.6	-27.1	51.7	386.3	21160.8	-34.8
21969.00	V	34.1	Ambient	4.4	40.6	-27.1	51.9	395.3	21160.8	-34.6
24410.00	H	33.6	Ambient	4.4	40.6	-28.6	50.1	320.0	21160.8	-36.4
24410.00	V	33.5	Ambient	4.4	40.6	-28.6	50.0	316.4	21160.8	-36.5

H – Horizontal V – Vertical

Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB)

MANUFACTURER : Motorola, Inc.
 EUT : Keyfob
 MODEL NUMBER : PMLN6233A
 TEST MODE : Transmit at 2441MHz
 TEST DATE : October 29, 2012
 TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
 : FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
 NOTES : Average Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4882.00	H	52.5		3.7	34.7	-40.1	-41.7	9.1	2.9	500.0	-44.9
4882.00	V	51.9		3.7	34.7	-40.1	-41.7	8.5	2.7	500.0	-45.5
7323.00	H	46.4	Ambient	4.7	37.9	-39.7	-41.7	7.5	2.4	500.0	-46.4
7323.00	V	46.6	Ambient	4.7	37.9	-39.7	-41.7	7.7	2.4	500.0	-46.2
12205.00	H	46.3	Ambient	6.1	41.4	-39.4	-41.7	12.6	4.3	500.0	-41.4
12205.00	V	46.1	Ambient	6.1	41.4	-39.4	-41.7	12.4	4.2	500.0	-41.6
19528.00	H	34.1	Ambient	4.4	40.4	-27.9	-41.7	9.4	2.9	500.0	-44.6
19528.00	V	34.1	Ambient	4.4	40.4	-27.9	-41.7	9.4	2.9	500.0	-44.6

H – Horizontal V – Vertical

Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB) + Duty Cycle(dB)



MANUFACTURER : Motorola, Inc.
EUT : Keyfob
MODEL NUMBER : PMLN6233A
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
: FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
NOTES : Peak Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2480.00	H	73.2		2.7	31.5	0.0	107.3	233032.8		
2480.00	V	64.5		2.7	31.5	0.0	98.6	85588.8		
4960.00	H	52.9		3.7	34.8	-40.2	51.2	364.9	5000.0	-22.7
4960.00	V	52.3		3.7	34.8	-40.2	50.6	340.5	5000.0	-23.3
7440.00	H	46.5	Ambient	4.7	38.0	-39.7	49.5	298.4	5000.0	-24.5
7440.00	V	47.0	Ambient	4.7	38.0	-39.7	50.0	316.1	5000.0	-24.0
9920.00	H	39.0	Ambient	5.3	40.0	-38.6	45.6	190.9	23303.3	-41.7
9920.00	V	38.7		5.3	40.0	-38.6	45.3	184.4	23303.3	-42.0
12400.00	H	47.4	Ambient	6.1	41.5	-39.3	55.7	609.1	5000.0	-18.3
12400.00	V	47.5	Ambient	6.1	41.5	-39.3	55.8	616.1	5000.0	-18.2
14880.00	H	37.5	Ambient	6.8	42.3	-40.3	46.3	207.0	23303.3	-41.0
14880.00	V	37.7	Ambient	6.8	42.3	-40.3	46.5	211.8	23303.3	-40.8
17360.00	H	37.6	Ambient	7.4	39.7	-39.0	45.7	192.4	23303.3	-41.7
17360.00	V	38.0	Ambient	7.4	39.7	-39.0	46.1	201.5	23303.3	-41.3
19840.00	H	33.4	Ambient	4.5	40.4	-27.3	51.0	354.7	5000.0	-23.0
19840.00	V	33.9	Ambient	4.5	40.4	-27.3	51.5	375.7	5000.0	-22.5
22320.00	H	33.3	Ambient	4.5	40.6	-27.5	50.8	348.7	5000.0	-23.1
22320.00	V	33.7	Ambient	4.5	40.6	-27.5	51.2	365.1	5000.0	-22.7
24800.00	H	33.7	Ambient	4.4	40.6	-28.5	50.2	324.8	23303.3	-37.1
24800.00	V	33.1	Ambient	4.4	40.6	-28.5	49.6	303.1	23303.3	-37.7

H – Horizontal V – Vertical


Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB)

MANUFACTURER : Motorola, Inc.
 EUT : Keyfob
 MODEL NUMBER : PMLN6233A
 TEST MODE : Transmit at 2480MHz
 TEST DATE : October 29, 2012
 TEST PARAMETERS : Industry Canada RSS-210 Annex 8 Spurious Radiated Emissions
 : FCC CFR Title 47 Part 15, Subpart C, Paragraph 15.247 Spurious Radiated Emissions
 NOTES : Average Detector

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4960.00	H	52.9		3.7	34.8	-40.2	-41.7	9.5	3.0	500.0	-44.4
4960.00	V	52.3		3.7	34.8	-40.2	-41.7	8.9	2.8	500.0	-45.0
7440.00	H	46.5	Ambient	4.7	38.0	-39.7	-41.7	7.8	2.5	500.0	-46.2
7440.00	V	47.0	Ambient	4.7	38.0	-39.7	-41.7	8.3	2.6	500.0	-45.7
12400.00	H	47.4	Ambient	6.1	41.5	-39.3	-41.7	14.0	5.0	500.0	-40.0
12400.00	V	47.5	Ambient	6.1	41.5	-39.3	-41.7	14.1	5.1	500.0	-39.9
19840.00	H	33.4	Ambient	4.5	40.4	-27.3	-41.7	9.3	2.9	500.0	-44.7
19840.00	V	33.9	Ambient	4.5	40.4	-27.3	-41.7	9.8	3.1	500.0	-44.2
22320.00	H	33.3	Ambient	4.5	40.6	-27.5	-41.7	9.1	2.9	500.0	-44.8
22320.00	V	33.7	Ambient	4.5	40.6	-27.5	-41.7	9.5	3.0	500.0	-44.4

H – Horizontal V – Vertical


Total (dBuV/m) = Meter Reading (dBuV) + Cbl Fac (dB) + Ant Fac (dB) + Pre Amp Gain (dB) + Duty Cycle(dB)

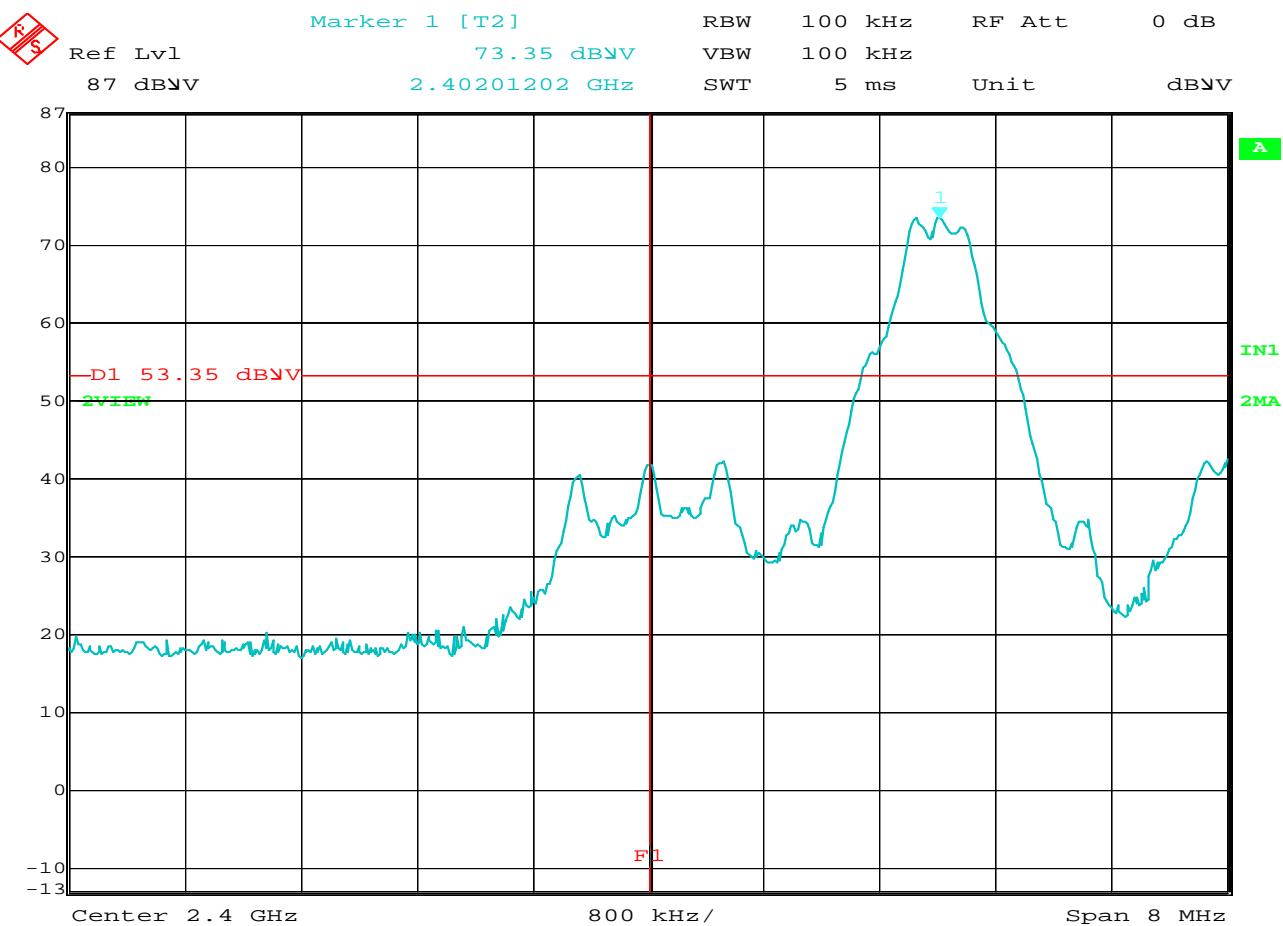

Date: 26.OCT.2012 14:18:24

Bandedge Compliance

MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST SPEC. : 15.247 Bandedge Compliance
TEST PARAMETERS : 20dBc
TEST MODE : 2402MHz
NOTES : 20dBc at 2400MHz
:

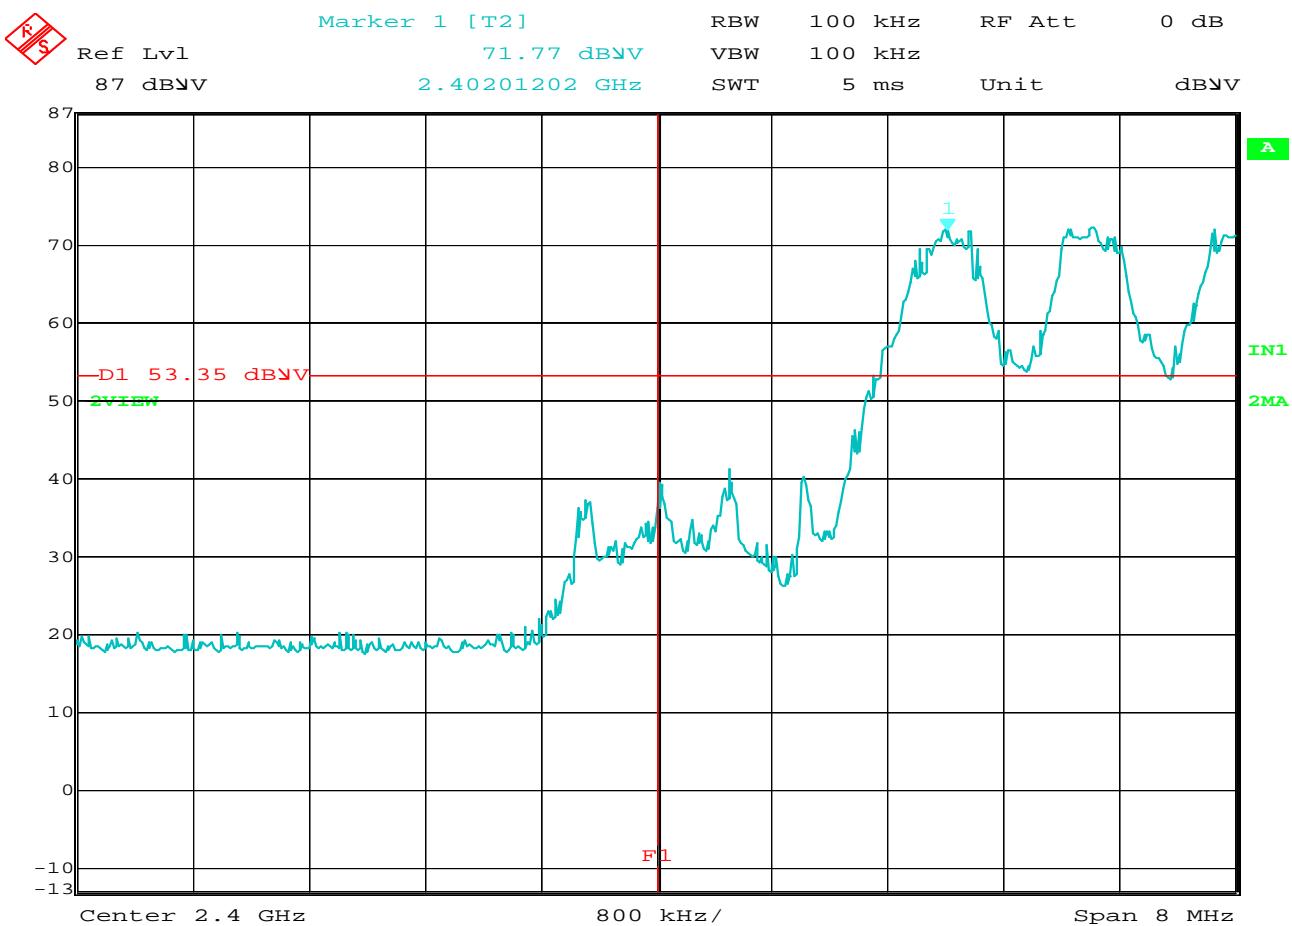

Date: 26.OCT.2012 14:27:28

Bandedge Compliance

MANUFACTURER : Motorola, Inc.
MODEL NUMBER : PMLN6233A
TEST SPEC. : 15.247 Bandedge Compliance
TEST PARAMETERS : (20dBc) The band edge must be at least 20dB below the highest level measured within the band
TEST MODE : Frequency Hopping Enabled
NOTES : 20dBc at 2400MHz
...



MANUFACTURER : Motorola, Inc.
EUT : Keyfob
MODEL NUMBER : PMLN6233A
SERIAL NUMBER : Sample #1
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Band Edge at 2483.5MHz, Peak Readings
NOTES : Single Channel

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2483.50	H	15.6		2.7	31.5	0.0	49.8	307.3	5000.0	-24.2
2483.50	V	16.0		2.7	31.5	0.0	50.2	321.8	5000.0	-23.8



MANUFACTURER : Motorola, Inc.
EUT : Keyfob
MODEL NUMBER : PMLN6233A
SERIAL NUMBER : Sample #1
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Band Edge at 2483.5MHz, Average Readings
NOTES : Single Channel

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2483.50	H	15.6		2.7	31.5	0.0	-41.7	8.1	2.5	500.0	-45.9
2483.50	V	16.0		2.7	31.5	0.0	-41.7	8.5	2.6	500.0	-45.5


MANUFACTURER : Motorola, Inc.
EUT : Keyfob
MODEL NUMBER : PMLN6233A
SERIAL NUMBER : Sample #1
TEST MODE : Hopping Enabled
TEST DATE : October 29, 2012
TEST PARAMETERS : Band Edge at 2483.5MHz, Peak Readings
NOTES : Hopping Enabled

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2483.50	H	13.8		2.7	31.5	0.0	48.0	249.8	5000.0	-26.0
2483.50	V	14.0		2.7	31.5	0.0	48.2	255.6	5000.0	-25.8



MANUFACTURER : Motorola, Inc.
EUT : Keyfob
MODEL NUMBER : PMLN6233A
SERIAL NUMBER : Sample #1
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2012
TEST PARAMETERS : Band Edge at 2483.5MHz, Peak Readings
NOTES : Hopping Enabled


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2483.50	H	13.8		2.7	31.5	0.0	-41.7	6.3	2.1	500.0	-47.7
2483.50	V	14.0		2.7	31.5	0.0	-41.7	6.5	2.1	500.0	-47.5

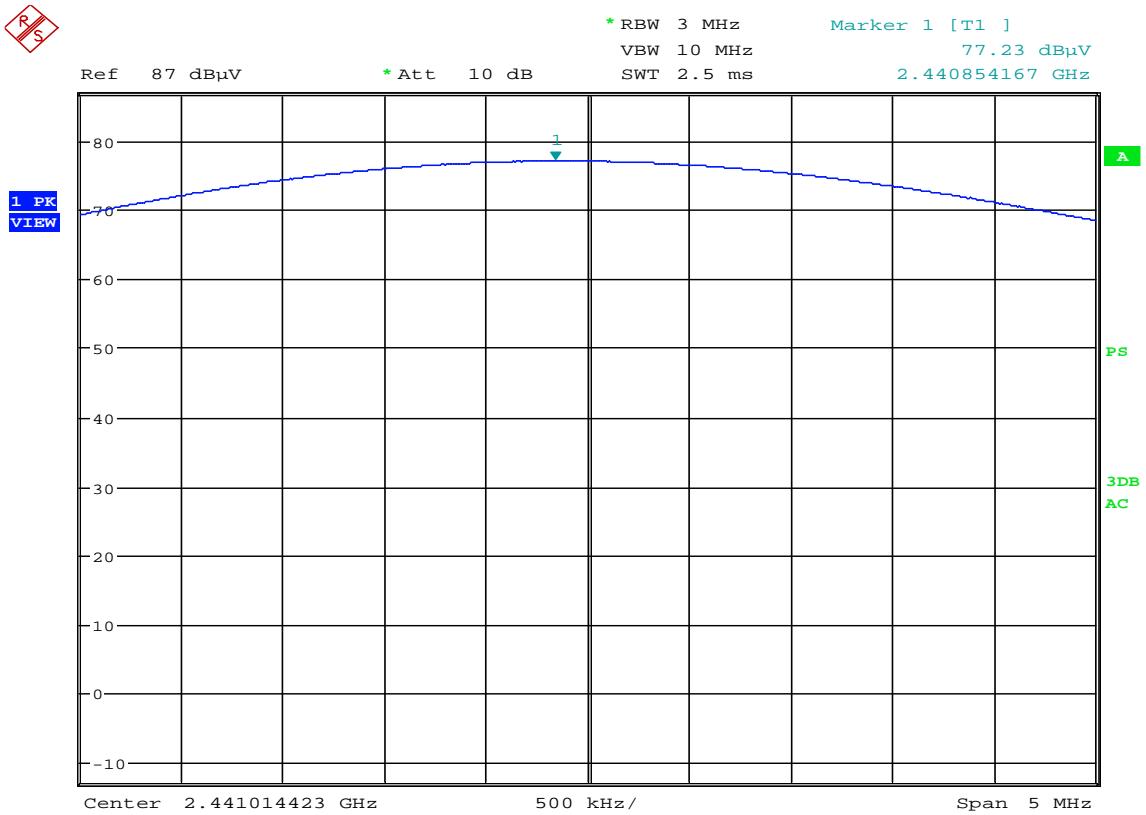

Date: 5.NOV.2012 14:31:39

15.247 Power Spectral Density

MANUFACTURER	: Motorola, Inc.
MODEL NUMBER	: Transceiver
TEST MODE	: Tx @ 2441MHz, CW
TEST DATE	: November 5, 2012
TEST PARAMETERS	: Power Spectral Density
NOTES	: Emissions reading of 77.23dB μ V corresponds to an EIRP reading of 7.6dBm.
EQUIPMENT USED	: RBD1, NWP1

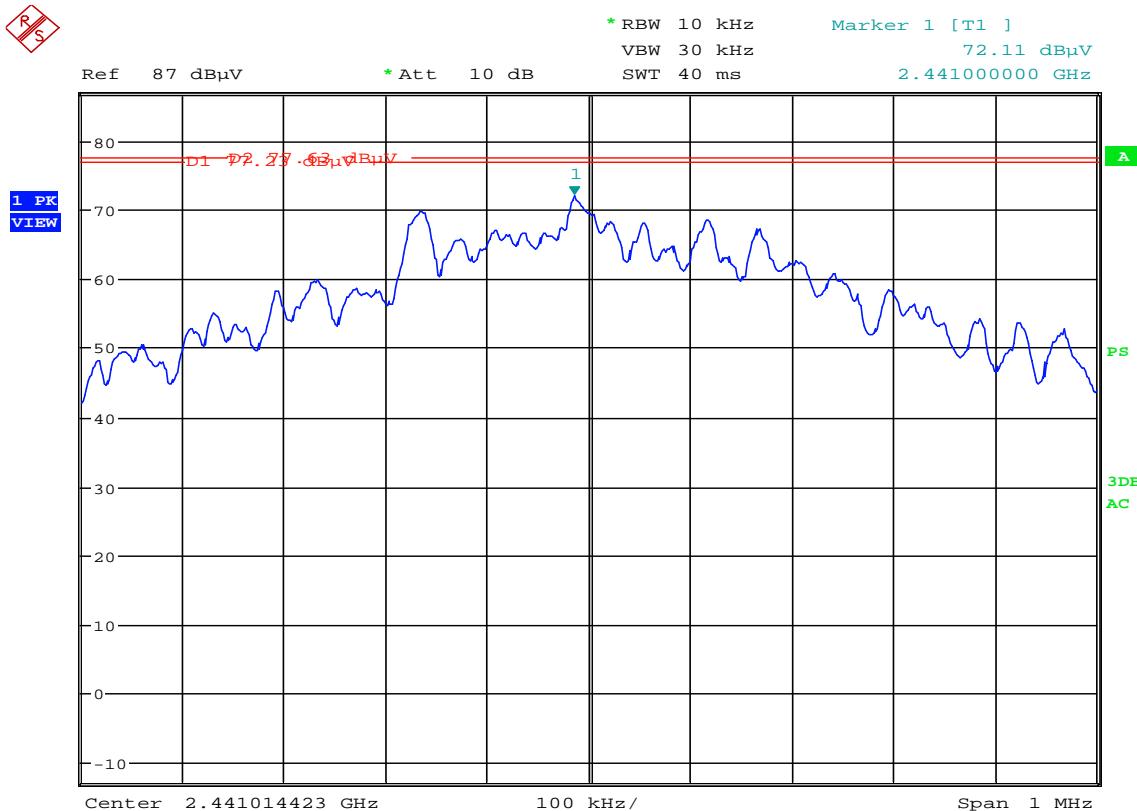

Date: 5.NOV.2012 14:42:40

15.247 Power Spectral Density

MANUFACTURER	: Motorola, Inc.
MODEL NUMBER	: Transceiver
TEST MODE	: TXDATA1, Payload = PRBS9
TEST DATE	: November 5, 2012
TEST PARAMETERS	: Power Spectral Density
NOTES	: Emissions reading of 77.23dBuV corresponds to an EIRP reading of 7.6dBm. Display line D1 represents the EIRP of 7.6dBm. Display line D2 represents the 8dBm limit (8dBm - 7.6dBm = 0.4dBm above the 7.6dBm EIRP reading). The trace represents the PSD in a 10kHz RBW.
EQUIPMENT USED	: RBD1, NWP1