



この部品には SS-00259-1 に指定する物質を含む材料は、使用してはならない。

記載文字	字高	タイプフェース	文字色
SONY®	L=13	ソニーロタイプ(機銘板用)	黒
MODEL	1.5	SONY ID TYPE HR	
IRF303U	2.0		
FCC ID:AK8IRF303U	2.0		
IC:409B-IRF303U			
SERIAL NO.	1.5	REGULAR	
XXXXXX(通番)~			
Sony Corporation	H=1.6	SONY ID TYPE HR	
01	1.5	SONY ID TYPE HRC	
2-188-898-01	1.2	SONY ID TYPE HR	
MADE IN JAPAN			
'XX.XX(製造年月日:事業所指示による)	H=1.5	CSA認定マーク	

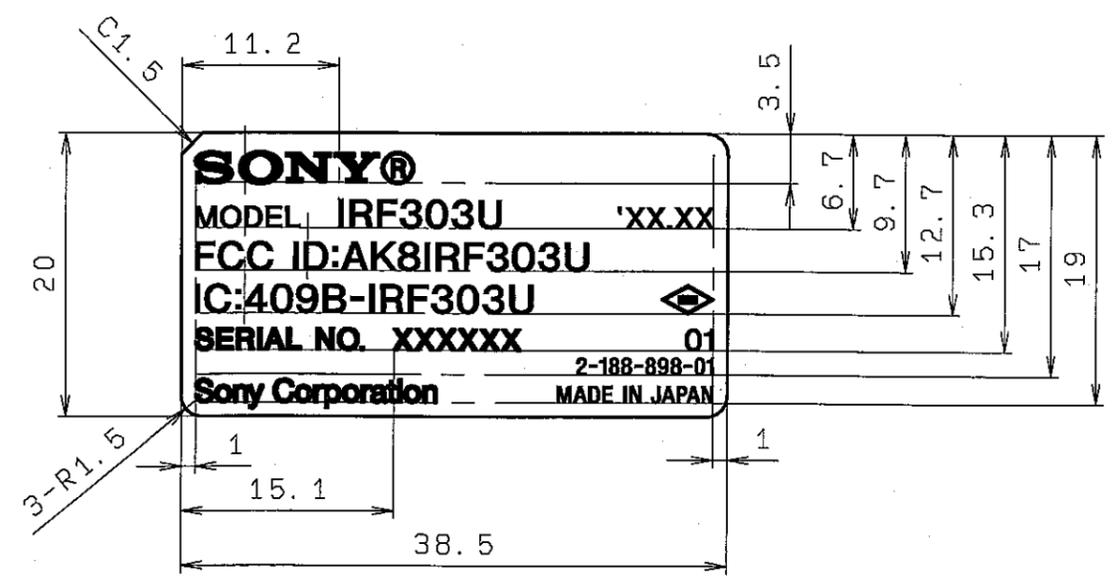

材料構成図

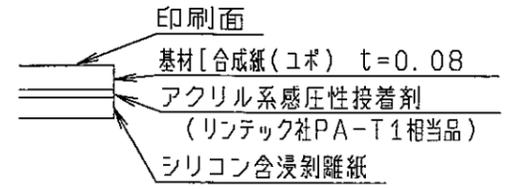

- 1) 版下は2倍寸で作成し、寸法公差は倍寸で±0.2とする。
- 2) 版下は校正、承認を受ける。
- 3) シリアルNo.は事業所発注担当の指示による。
- 4) 10枚1シートにて納入のこと。
- 5) 文字記載面に傷、汚れ等の無きこと。
- 6) 「成形用樹脂・インキ・塗料・被覆電線はグリーンパートナー認定取引先から調達すること。」
- 7) 品質特性:SS-00077「ソニー部品設計基準-機銘板」の6項に定める各特性を満足すること。
- 8) 品質特性:SS-00078「ソニー部品設計基準-ラベル・銘板」の7-2項に定める各特性を満足すること。
- 9) UL-969認可材料を使用のこと。UL認可品コードNo. SUL-W。
- 10) CSA認可材料を使用のこと。CSA認可品コード図中認定マーク参照。

△x	UNIT	mm	TOLERANCE	STS-2	USED ON	RANK
	ANGLE		L ≤ 4	±0.1	ORIGINAL MODEL	LF-X5(U2)
			4 < L ≤ 16	±0.2		
			16 < L ≤ 63	±0.3		
			63 < L ≤ 250	±0.4		
			250 < L	±0.6		
	SCALE	2:1	MATERIAL (COLOR)	上記	FINISH (COLOR)	
DESCRIPTION						
(E) LABEL, MODEL NUMBER (RF)						
(J) 機銘板 (RF)						
HISTORY	SUFFIX	ECN-NO.	REVISION	SIGN.		
X COUNT	REPL.	DATE				
DRAWN BY	PLANNED BY	CHECKED BY	APPROVED BY	MODEL		
LFX 水戸	LFX 水戸			LFX-0109		
04.06.25	04.06.25			PART NO.		
				0-537-645-01		
					PART NO.	SHEET
					2-188-898-01	1/1

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY.