

# RADIO TEST REPORT

(for Bluetooth classic)

Project No. : JB-Z0187  
 Client : Sony Corporation  
 Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan  
 Type of Equipment : Digital Music Player  
 Model No. : NW-WS623  
 Serial No. : 2000146, 2000177  
 FCC ID : AK8NWWS620  
 Regulation Applied : 47 CFR Part 15 Subpart C  
**Final Judgment** : **Passed**  
 Sample Receipt : October 18, 2016  
 Testing : October 19, 2016 - November 03, 2016  
 Reported : November 14, 2016

Reported by :

Approved Signatory :



Takanori Oho  
 Technical Manager  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division  
 Sony Global Manufacturing & Operations Corporation

Teruki Kurihara  
 Technical Manager  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division  
 Sony Global Manufacturing & Operations Corporation

**Notice**

- \* These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- \* This report shall not be reproduced except in full, without written approval of the laboratory.
- \* This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
- \* All test results are traceable to the national and / or international standards.

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.



TESTING CERT #3203.01

## TABLE OF CONTENTS

<b>1. General Information.....</b>	<b>3</b>
1.1. Description of Equipment Under Test (EUT).....	3
1.2. Summary of Test Result.....	3
1.3. Tested Methodology .....	4
1.4. Measurement Procedures .....	4
1.5. Test Facility.....	6
1.6. Uncertainty .....	6
<b>2. System Test Configuration.....</b>	<b>7</b>
2.1. Validation .....	7
2.2. Test Operating Conditions .....	7
2.3. EUT Modifications .....	7
2.4. Configuration of Tested System .....	8
<b>3. Test Data.....</b>	<b>9</b>
3.1. 20dB Bandwidth.....	9
3.2. Carrier Frequency Separation.....	11
3.3. Number of Hopping Frequencies .....	12
3.4. Time of Occupancy (Dwell Time).....	13
3.5. Maximum Peak Conducted Output Power.....	16
3.6. Radiated Spurious Emissions.....	17
3.7. Conducted Spurious Emissions for Band Edge.....	67
<b>4. Method of Calculation .....</b>	<b>68</b>
<b>5. List of Test Equipment.....</b>	<b>70</b>
5.1. Antenna-port Conducted Measurements.....	70
5.2. Radiated Spurious Emissions.....	70
<b>6. Photographs of test setup.....</b>	<b>71</b>
6.1. Antenna-port Conducted Measurements Photo(s) .....	71
6.2. Radiated Spurious Emissions Measurement Photo(s).....	72

Note

- indicates that the listed condition, standard or equipment is applicable for this report.
- indicates that the listed condition, standard or equipment is not applicable for this report.

## 1. General Information

### 1.1. Description of Equipment Under Test (EUT)

#### General specification

Test Sample Condition :  Prototype  Pre-production  Mass-production  
 Type of Equipment : Digital Music Player  
 Trade Name : SONY  
 Model No. : NW-WS623  
 Serial No. : 2000146, 2000177  
 Power Rating : DC 3.7V (The EUT was supplied with the power from built-in battery)  
 Software Ver. : 0.81.00

#### Similar model (to be covered by this Report)

Model No. : NW-WS625  
 The EUT has the following series model.  
 The difference of each model is the memory capacity.  
 NW-WS623: 4 GB (EUT)  
 NW-WS625: 16 GB (Similar model)

#### Radio specification

Function of the Equipment : Transceiver  
 Operating Frequency : 2402 - 2480MHz  
 Modulation Type : FHSS (GFSK, p/4DQPSK, 8DPSK)  
 Channel Spacing : 1MHz  
 Channel Bandwidth : 1MHz  
 Number of channels : 79  
 Antenna Type : Inverted-F antenna  
 Antenna connector Type : None  
 Antenna Gain : +0.5 dBi  
 Operating Temperature : -5 to +45 deg.C

### 1.2. Summary of Test Result

Test Item	Worst Margin	Test Frequency band	Results
AC Power-line Conducted Emissions	-	150 kHz - 30 MHz	N/A *2
20dB Bandwidth	Refer to the test data	Carrier	Complied
Carrier Frequency Separation	Refer to the test data	Carrier	Complied
Number of Hopping Frequencies	Refer to the test data	Carrier	Complied
Time of Occupancy (Dwell Time)	Refer to the test data	Carrier	Complied
Maximum Peak Conducted Output Power	25.80 dB	Carrier	Complied
Radiated Spurious Emissions	7.1 dB (AV) 2483.509 MHz Horizontal	9 kHz - 25 GHz (excluding carrier and band edge)	Complied
Conducted Spurious Emissions for Band Edge *1	30.91 dB Margin 2399.98 MHz	Carrier band edge	Complied

\*1: Conducted Spurious Emission was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emission measurement.

\*2: This item was not applied to the EUT since its transmission is stopped when the battery is being charged by the PC connected to AC Power-line.

#### Other requirements

Part 15.31(e) Supply voltage requirement  
 : Complied (The EUT was tested with a new battery)  
 Part 15.203 / 212 Antenna requirement  
 : Complied (The EUT has an internal antenna which cannot be replaced by users)



Radiated Spurious Emissions

1. The non-conductive table (EUT table) made of ( FRP,  Styrene Foam,  other non-conductive material) was placed in the center of the turntable.
2. The EUT was placed on the center of the tabletop.
3. The test antenna was placed away from the EUT at test distance.
4. The limits were compensated the distance factor with follows;  
 9 kHz - 490 kHz [Limit at 3m] = [Limit at 300m] + 40log (300[m] / 3[m])  
 490 kHz - 30 MHz [Limit at 3m] = [Limit at 30m] + 40log (30[m] / 3[m])
5. Find the worst arrangement of the EUT according to follows;
  - Rotating the turntable and/or scanning the antenna.
  - On every condition, exploring the highest emissions with the spectrum analyzer. (9 kHz - 25 GHz, peak detector)
6. On the worst arrangement of the EUT found in above, choose the three highest harmonics or spurious emissions on the spectrum data. (\*excluding carrier band edges)  
 The final measurements of all test operating modes carried out on these emissions as follows;

The test antenna and the turntable were performed with follows;

	9kHz - 30MHz	30MHz - 1000MHz	above 1GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1m, Vertical, 360 degrees	1 - 4m, Horizontal and Vertical	1 - 4m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

\*: Final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows;

	9 kHz - 90 kHz 110 kHz - 490 kHz	90 kHz- 110 kHz 490 kHz - 30 MHz	30 MHz - 1000 MHz	above 1GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	9 kHz (6dB) *1	9 kHz (6dB) *1	120 kHz (6dB)	1 MHz (3dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

\*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

\*2: VBW setting (for average) was higher than 1/T. (T is the minimum transmission duration)

7. If the final measurement result exceeded the limit(FCC 15.209(a)) in non-restricted band(excluding carrier band edges), the measurement is carried out additionally and compared with the limit (-20dBc) with follows;

Measurement points

- Fundamental Frequency

- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz - 150 kHz	150 kHz - 30MHz	above 30MHz
Detector	Peak	Peak	Peak
RBW	3 dB RBW: 300 Hz *	3 dB RBW: 10 kHz *	3 dB RBW: 100 kHz
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

\*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$C.F. \text{ of RBW [dB]} = 10 * \log (100\text{kHz} / \text{used RBW})$$

8. Although these tests were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

## 1.5. Test Facility

## Address of Test Facility

Test Facility Name : Sony Global Manufacturing & Operations Corporation  
EMC/RF Test Laboratory, Main Lab.

Address : Kisarazu Site 8-4 Shiomi Kisarazu-shi, Chiba, 292-0834 Japan

Phone : +81 438 37 2750

## Radiated Spurious Emission

Semi-Anechoic chamber

 4th Site

## Antenna-port Conducted Measurements \*

Shielded Room

 4th Site SR1

\*Note: This item contains the following

- 20dB Bandwidth
- Carrier Frequency Separation
- Number of Hopping Frequencies
- Time of Occupancy (Dwell Time)
- Maximum Peak Conducted Output Power
- Conducted Spurious Emissions for Band Edge

## A2LA Accreditation for Test Facility

The above test facility has been fully reported to A2LA and accepted as follows:

Effective dates: 2015-09-15 through 2017-10-31

## 1.6. Uncertainty

Test Item	Frequency	4th Site SR1
Conducted Output Power	1 - 6GHz	± 0.84 dB
Conducted Spurious Emissions	below 6GHz	± 0.89 dB

Test Item	Frequency	Distance	4th Site
AC Power-line Conducted Emissions	150kHz - 30MHz	-	± 3.34 dB
Radiated Emissions	below 30 MHz	3m	± 2.59 dB
	30 - 300 MHz	3m	± 4.18 dB
	300 - 1000 MHz	3m	± 4.04 dB
	1 - 6 GHz	3m	± 4.63 dB
	6 - 18 GHz	3m	± 5.31 dB
	18 - 26.5 GHz	3m	± 5.78 dB

## 2. System Test Configuration

### 2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).  
The tests were conducted with the worst case modes as follows.

### 2.2. Test Operating Conditions

The tests have been carried out the following conditions.

Test Items	Operating Mode *1	Packet type *2,3	Test Channels
Carrier Frequency Separation, Number of Hopping Frequencies, Time of Occupancy (Dwell Time)	BDR	DH5	Hopping ON
	EDR	3DH5	
20dB Bandwidth, Maximum Peak Conducted Output Power, Radiated Spurious Emissions	BDR	DH5	2402MHz, 2441MHz, 2480MHz
	EDR	3DH5	
Conducted Spurious Emissions for Band Edge	BDR	DH5	2402MHz
	EDR	3DH5	

Note:

\*1: Inquiry mode was not performed based on the result of pre-compliance testing.

\*2: The worst packet type has been decided based on the result of maximum duty cycle and pre-compliance testing in the actual product specification.

\*3: Packet type for EDR has been decided based on the result of Maximum Peak Conducted Output Power.

The Software for Operating Mode

Name: Android Debug Bridge

Version: -

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
Personal Computer	HP	K7U44AV-ACJA	JPA55142KP	-

### 2.3. EUT Modifications

- No equipment modification to achieve compliance to the standard levels was done during the tests.
- Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

\_\_\_\_\_  
Typed/ Print Name :

Responsible Party :

Position :

Date :

2.4. Configuration of Tested System

Antenna-port Conducted Measurements

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A	Digital Music Player	SONY	NW-WS623	2000146

Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
-	-	-	-	-

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-

System configuration

\*: EUT

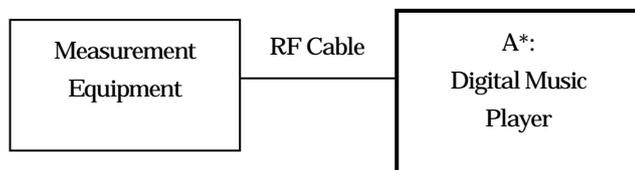

Radiated Spurious Emissions Measurement

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A	Digital Music Player	SONY	NW-WS623	2000177

Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
-	-	-	-	-

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-

System configuration

\*: EUT

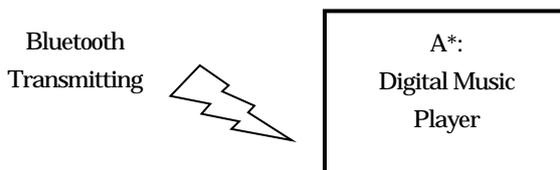

### 3. Test Data

#### 3.1. 20dB Bandwidth

- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Result [MHz]	Limit [MHz]
BDR	DH5	2402	0.952	-
		2441	0.954	-
		2480	0.953	-
EDR	3DH5	2402	1.281	-
		2441	1.272	-
		2480	1.275	-


[BDR / 2402MHz]



[BDR / 2441MHz]



[BDR / 2480MHz]

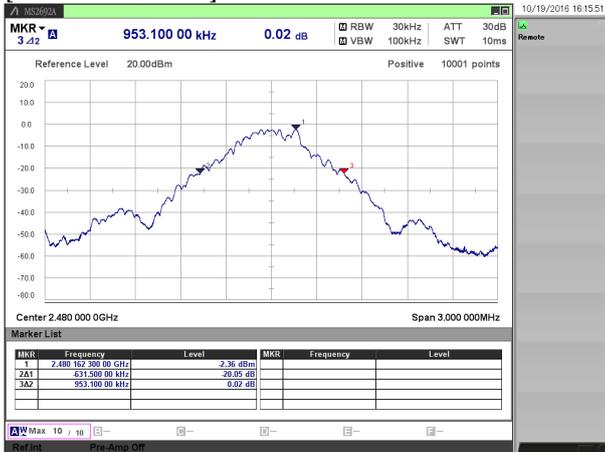

[EDR / 2402MHz]



[EDR / 2441MHz]



[EDR / 2480MHz]



### 3.2. Carrier Frequency Separation

- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Reading [kHz]	Limit [kHz]
BDR	DH5	993.9	636.0
EDR	3DH5	990.9	854.0




### 3.3. Number of Hopping Frequencies


- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Number [channel]	Limit [channel]
BDR	DH5	79	15
EDR	3DH5	79	15

[BDR]

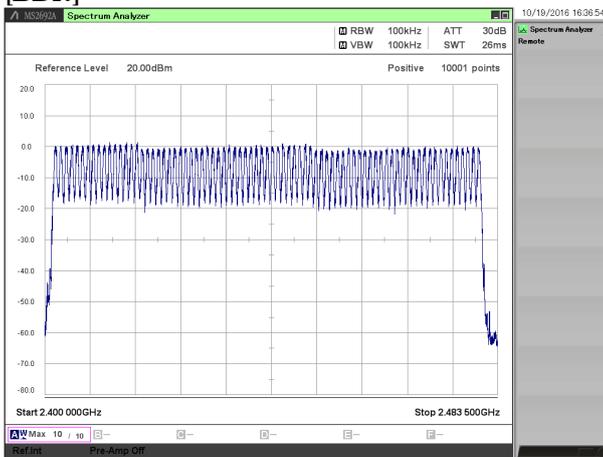

[EDR]


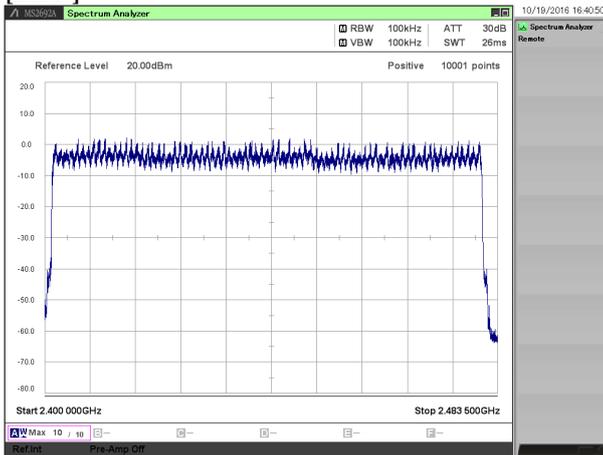


### 3.4. Time of Occupancy (Dwell Time)



- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Dwell Time [msec]	Cycle [time]	Result [msec]	Limit [msec]
BDR	DH5	2402	2.92	17.0	313.4	400.0
		2441	2.92	17.0	313.5	400.0
		2480	2.92	17.0	313.6	400.0
EDR	3DH5	2402	2.93	17.0	315.2	400.0
		2441	2.93	17.0	315.2	400.0
		2480	2.93	17.0	315.3	400.0



[BDR / 2402MHz]

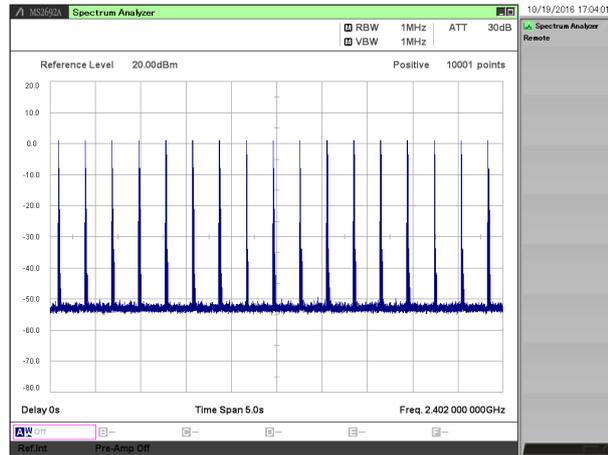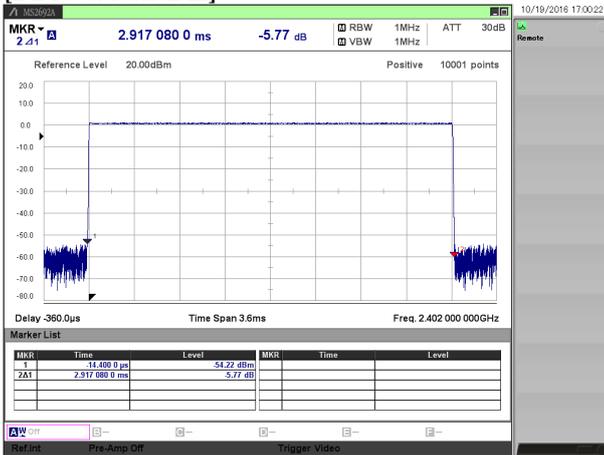



[BDR / 2441MHz]

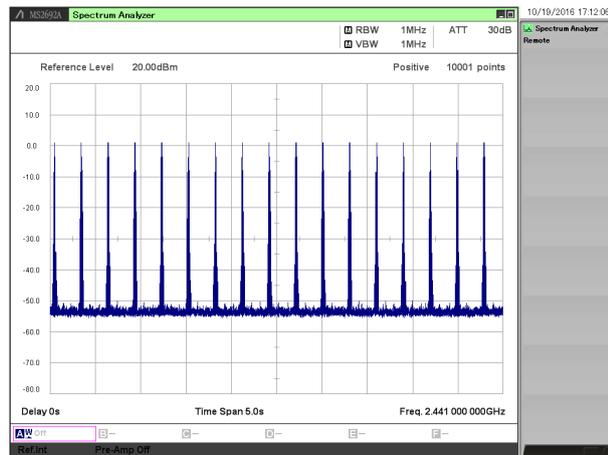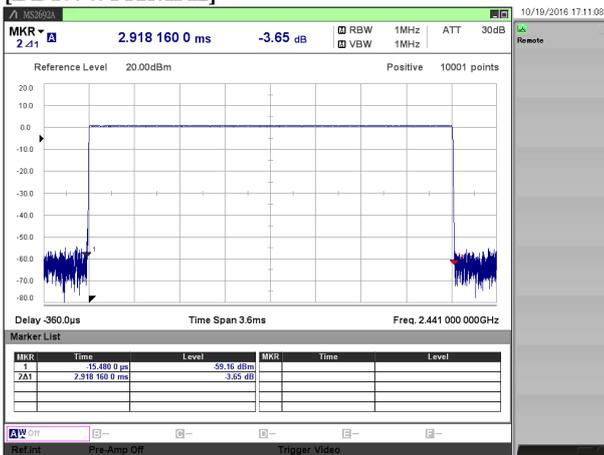



[BDR / 2480MHz]

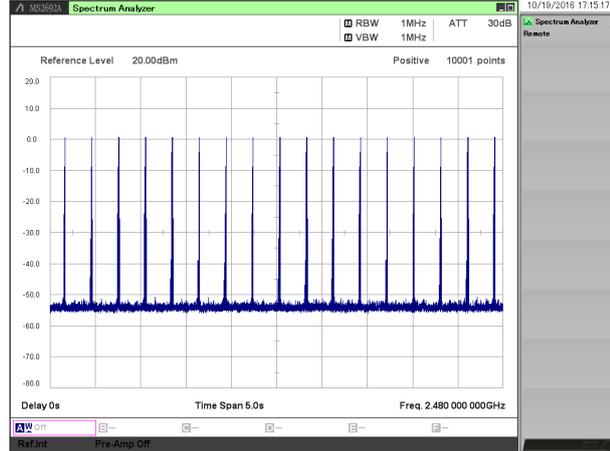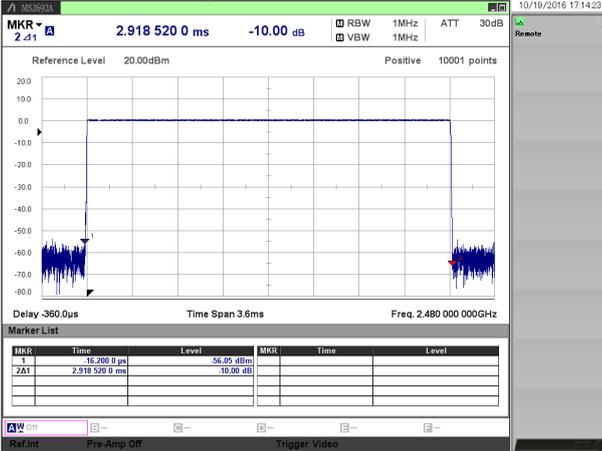



[EDR / 2402MHz]

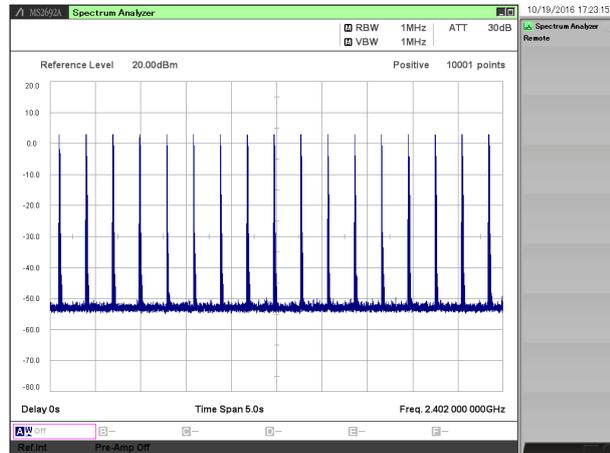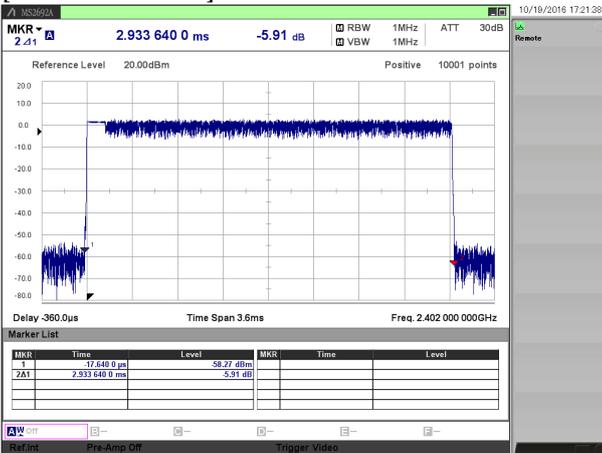

[EDR / 2441MHz]

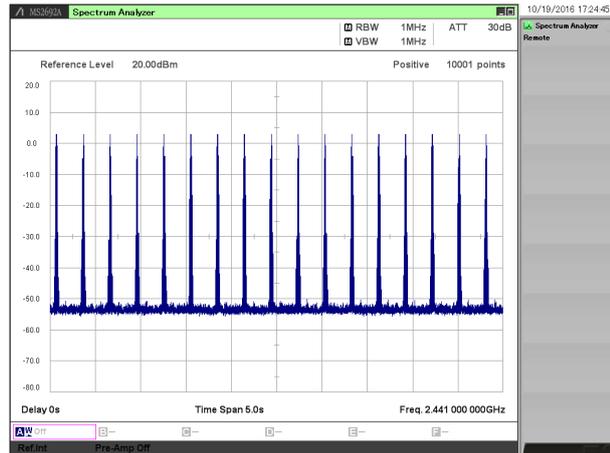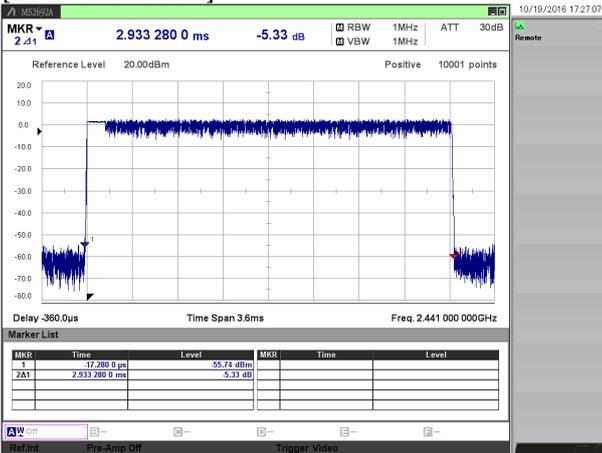

[EDR / 2480MHz]

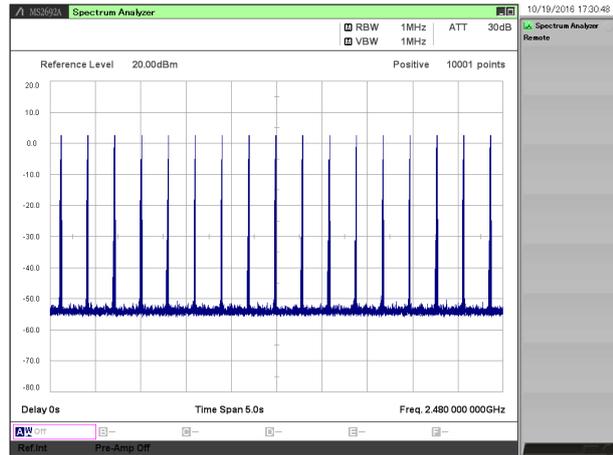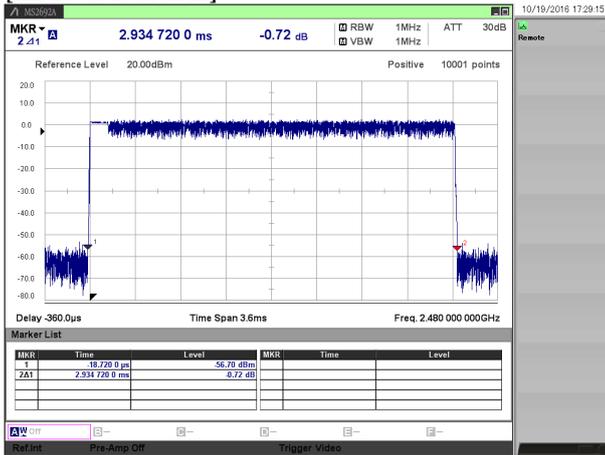

## 3.5. Maximum Peak Conducted Output Power

- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

## Peak Conducted Output Power

Mode		Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]
BDR	DH5	2402	1.56	0.20	1.76	0.00150	30.0	1.0	28.24
		2441	1.51	0.20	1.71	0.00148	30.0	1.0	28.29
		2480	1.38	0.20	1.58	0.00144	30.0	1.0	28.42
EDR	2DH5	2402	3.44	0.20	3.64	0.00231	30.0	1.0	26.36
		2441	3.51	0.20	3.71	0.00235	30.0	1.0	26.29
		2480	3.43	0.20	3.63	0.00231	30.0	1.0	26.37
	3DH5	2402	3.93	0.20	4.13	0.00259	30.0	1.0	25.87
		2441	4.00	0.20	4.20	0.00263	30.0	1.0	25.80
		2480	3.90	0.20	4.10	0.00257	30.0	1.0	25.90

## Average Conducted Output Power (for SAR measurement)

Mode		Channel [MHz]	Reading(AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Result(AV) [dBm]	Result(AV) [W]
BDR	DH5	2402	-0.07	0.20	1.10	1.23	0.00133
		2441	-0.08	0.20	1.10	1.22	0.00132
		2480	-0.20	0.20	1.10	1.10	0.00129
EDR	2DH5	2402	-0.35	0.20	1.07	0.92	0.00124
		2441	-0.29	0.20	1.07	0.98	0.00125
		2480	-0.34	0.20	1.07	0.93	0.00124
	3DH5	2402	-0.36	0.20	1.07	0.91	0.00123
		2441	-0.31	0.20	1.07	0.96	0.00125
		2480	-0.38	0.20	1.07	0.89	0.00123

## Duty Cycle check

Mode		Channel [MHz]	T(on+off) [msec]	T(on) [msec]	Duty Cycle [%]
BDR	DH1	2441	1.250	0.400	32.00
	DH3	2441	2.500	1.660	66.40
	DH5	2441	3.750	2.910	77.60
EDR	2DH1	2441	1.250	0.419	33.52
	2DH3	2441	2.500	1.670	66.80
	2DH5	2441	3.750	2.930	78.13
	3DH1	2441	1.250	0.419	33.52
	3DH3	2441	2.500	1.670	66.80
	3DH5	2441	3.750	2.930	78.13


### 3.6. Radiated Spurious Emissions

1) Date of measurement


9kHz - 30MHz : October 31, 2016 (all mode)  
 30MHz - 1000MHz : October 31, 2016 (all mode)  
 1GHz - 6GHz : November 01, 2016 (all mode) November 02, 2016 (band edge plot data)  
 6GHz - 18GHz : November 03, 2016 (all mode)  
 18GHz - 24.835GHz : November 03, 2016 (all mode)

#### 9 kHz - 30 MHz


[BDR( DH5 )/2402MHz]

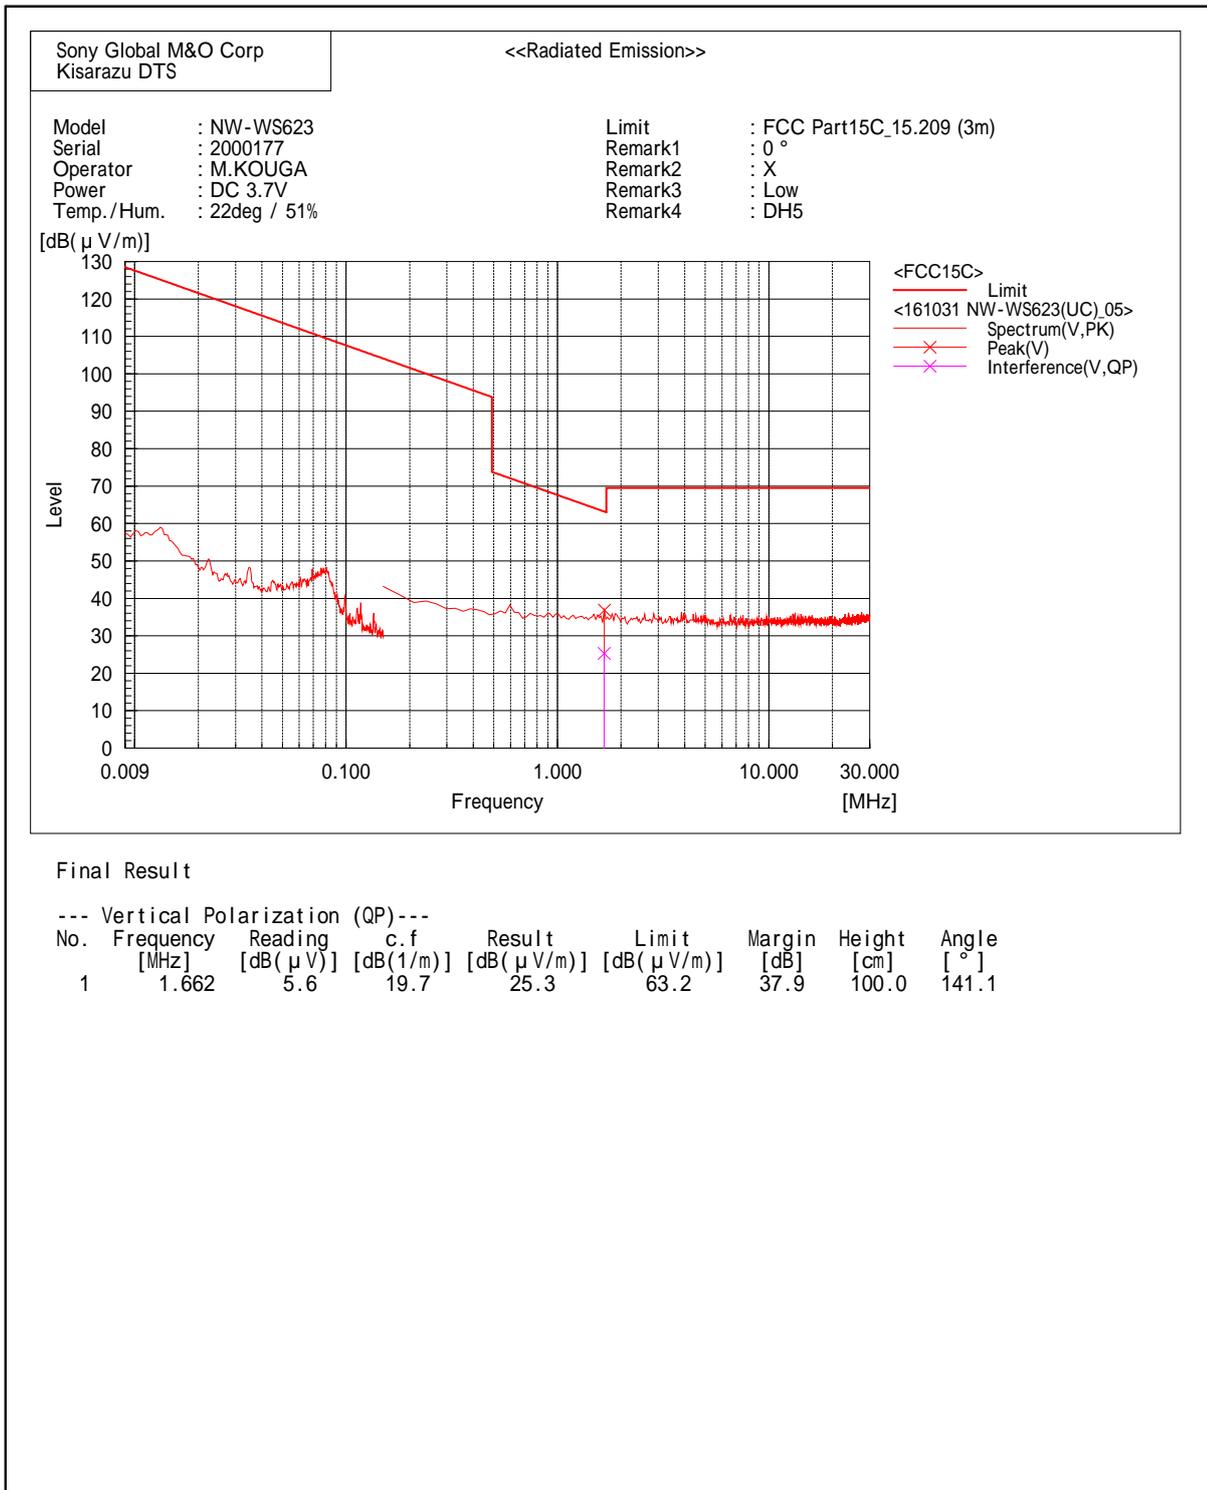

[BDR( DH5 )/2441MHz]

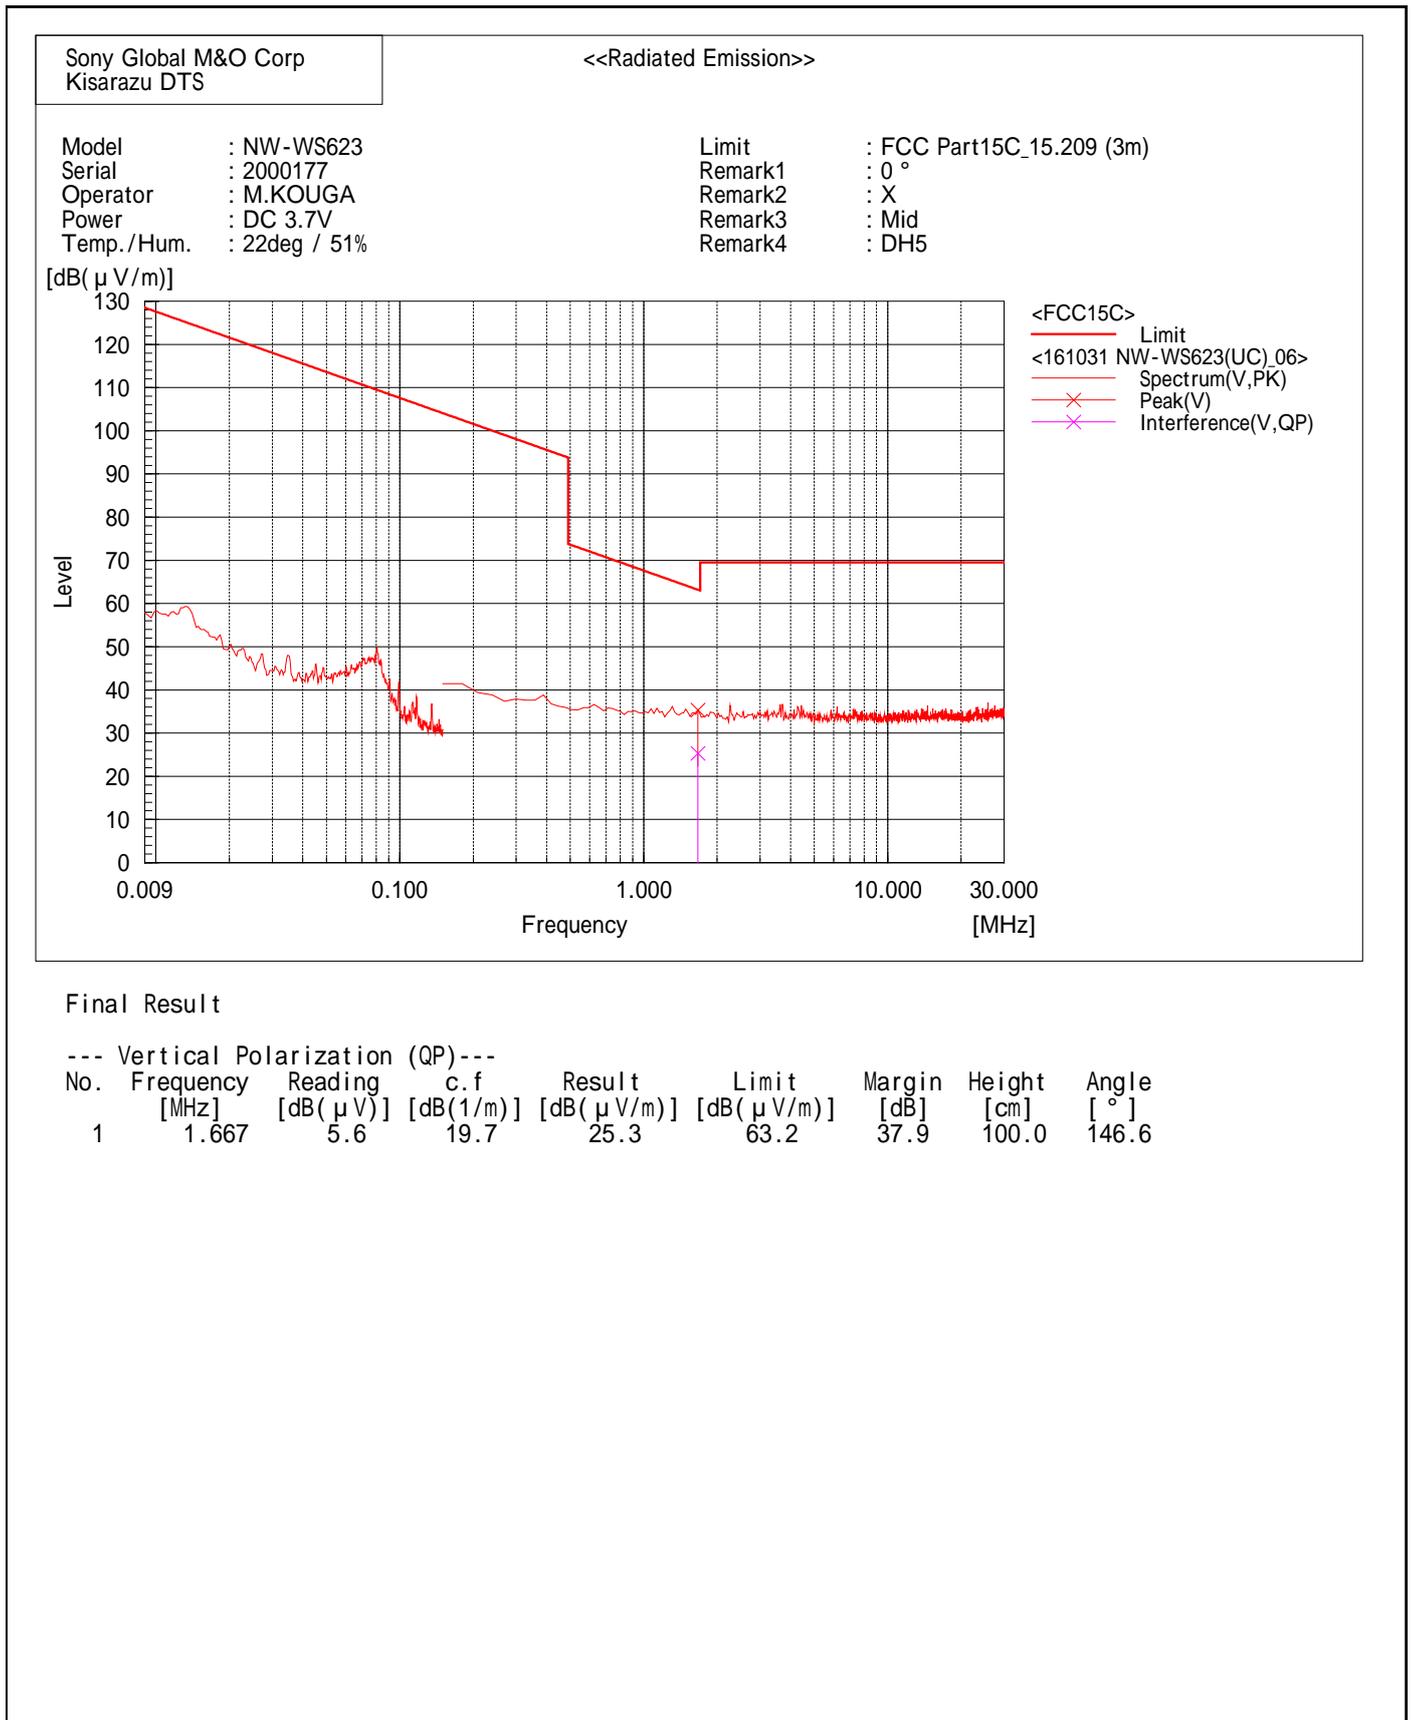

[BDR( DH5 )/2480MHz]

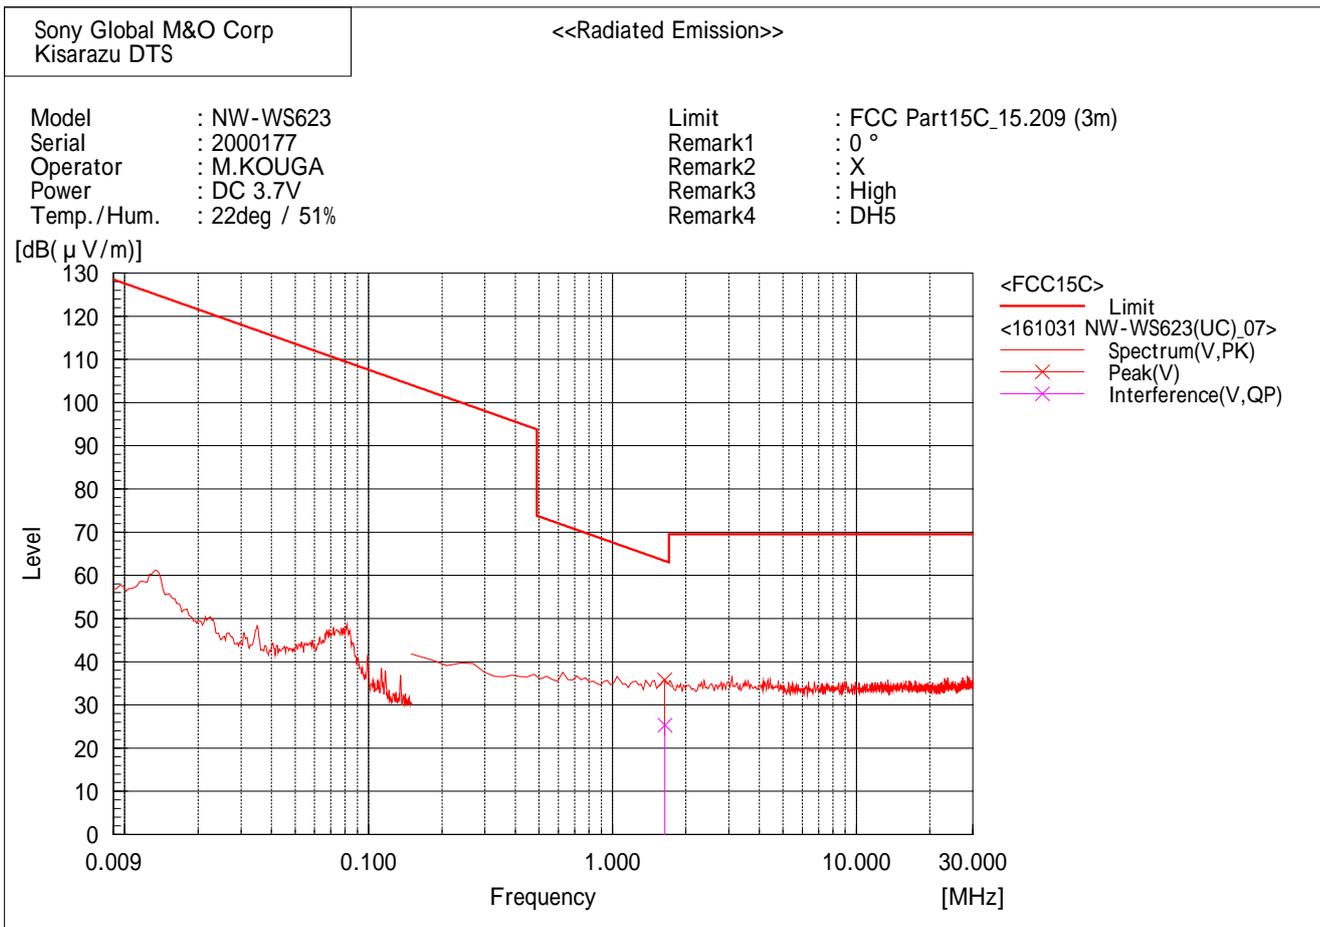


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.639	5.6	19.7	25.3	63.3	38.0	100.0	131.5

[EDR( 3DH5 )/2402MHz]

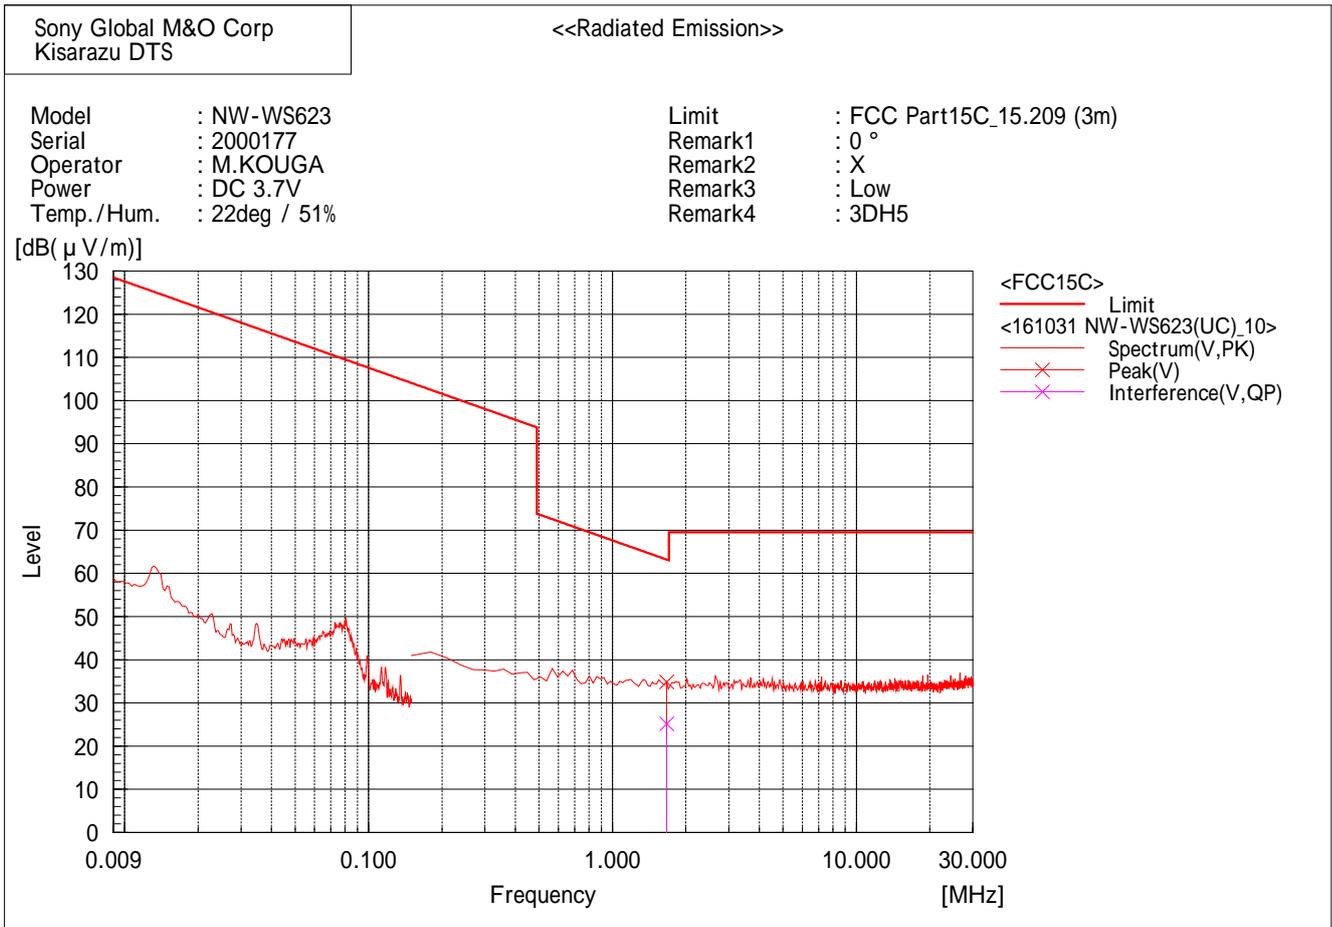


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.665	5.5	19.7	25.2	63.2	38.0	100.0	152.8

[EDR( 3DH5 )/2441MHz]

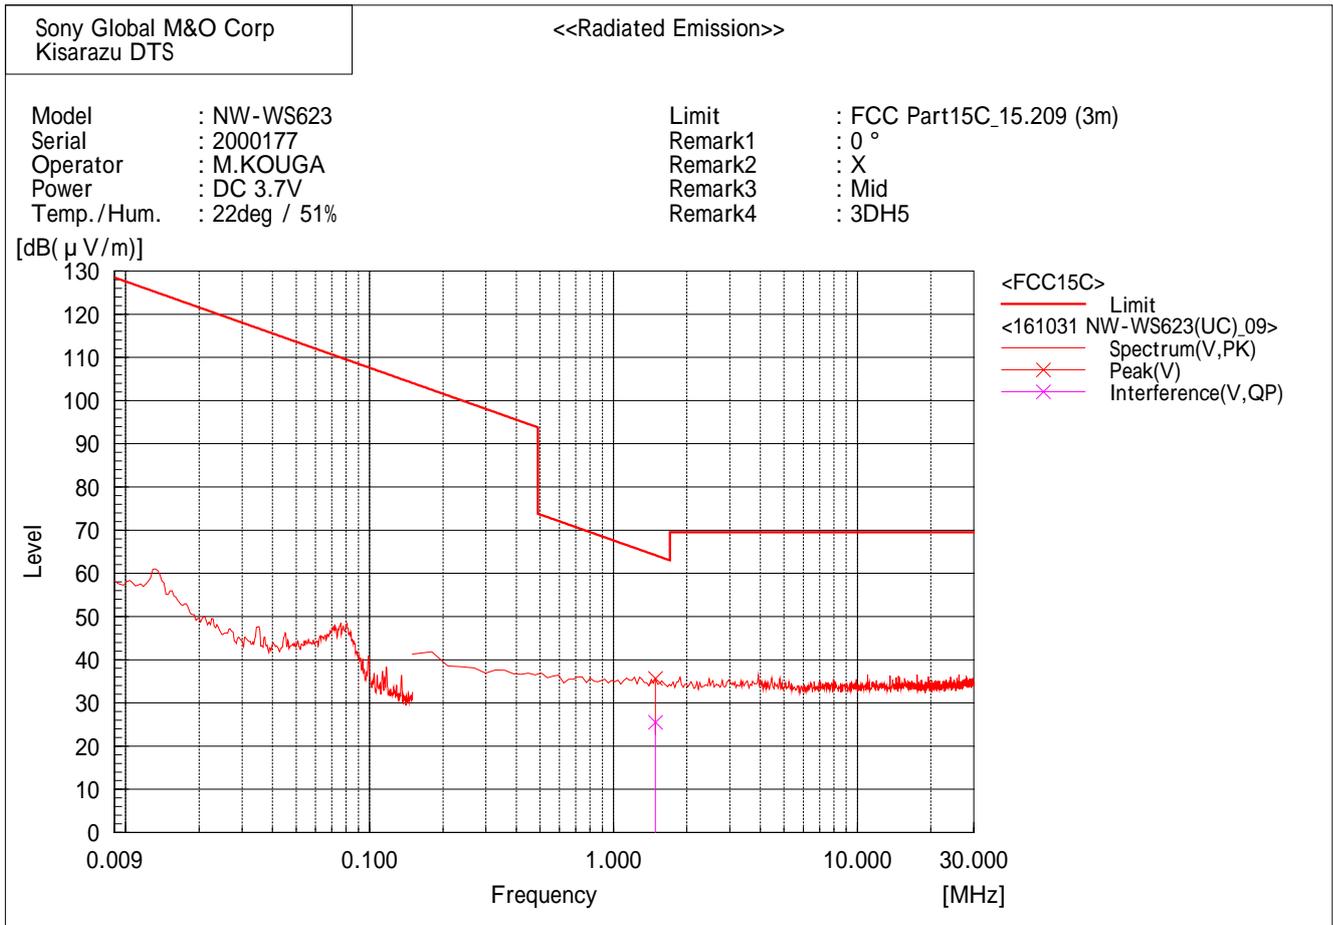


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.484	5.8	19.7	25.5	64.2	38.7	100.0	140.5

[EDR( 3DH5 )/2480MHz]

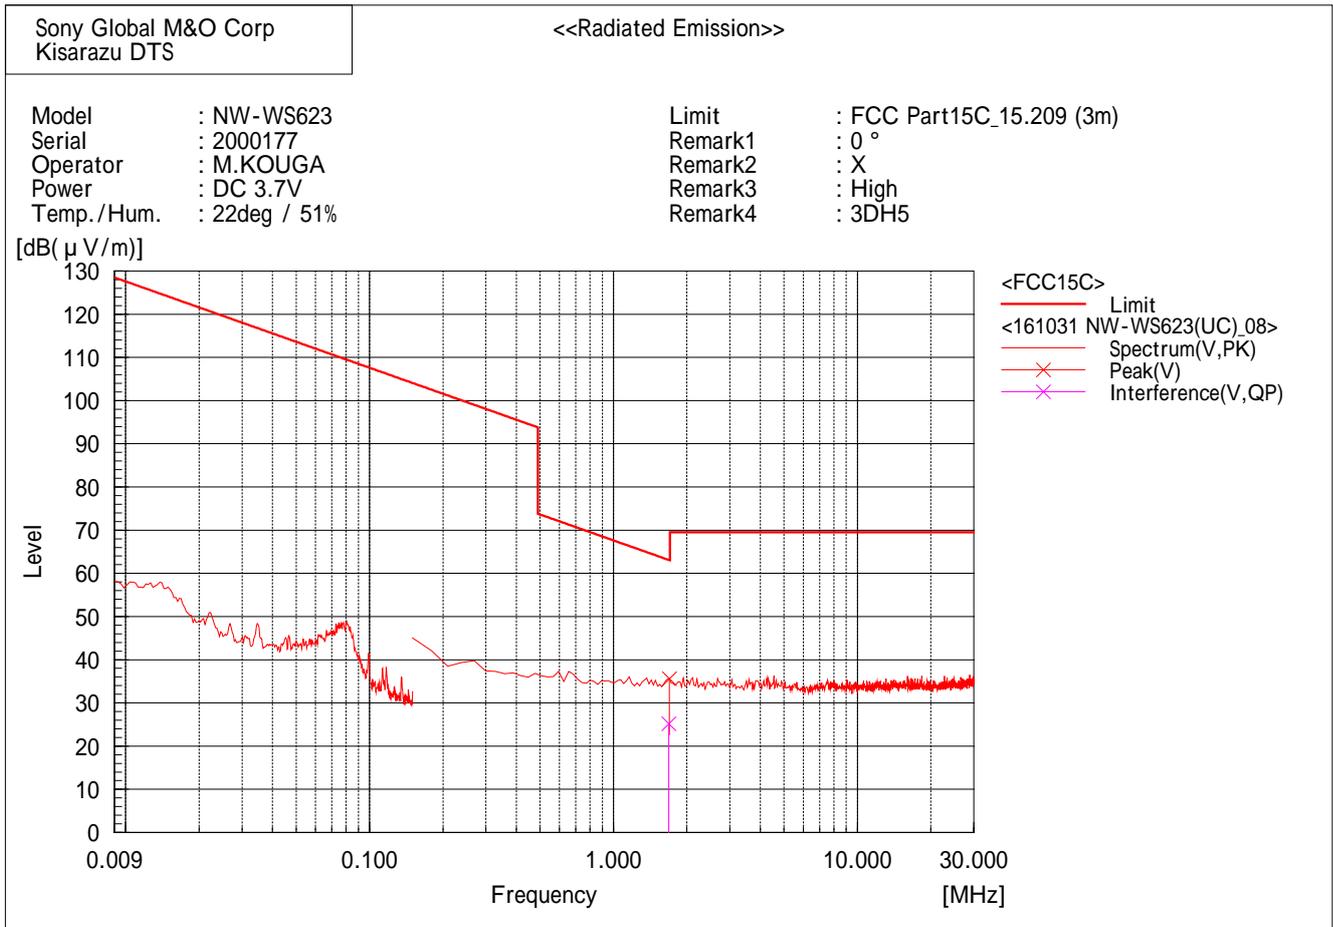


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.685	5.5	19.7	25.2	63.1	37.9	100.0	147.7

30 MHz - 1000 MHz

[BDR( DH5 )/2402MHz]

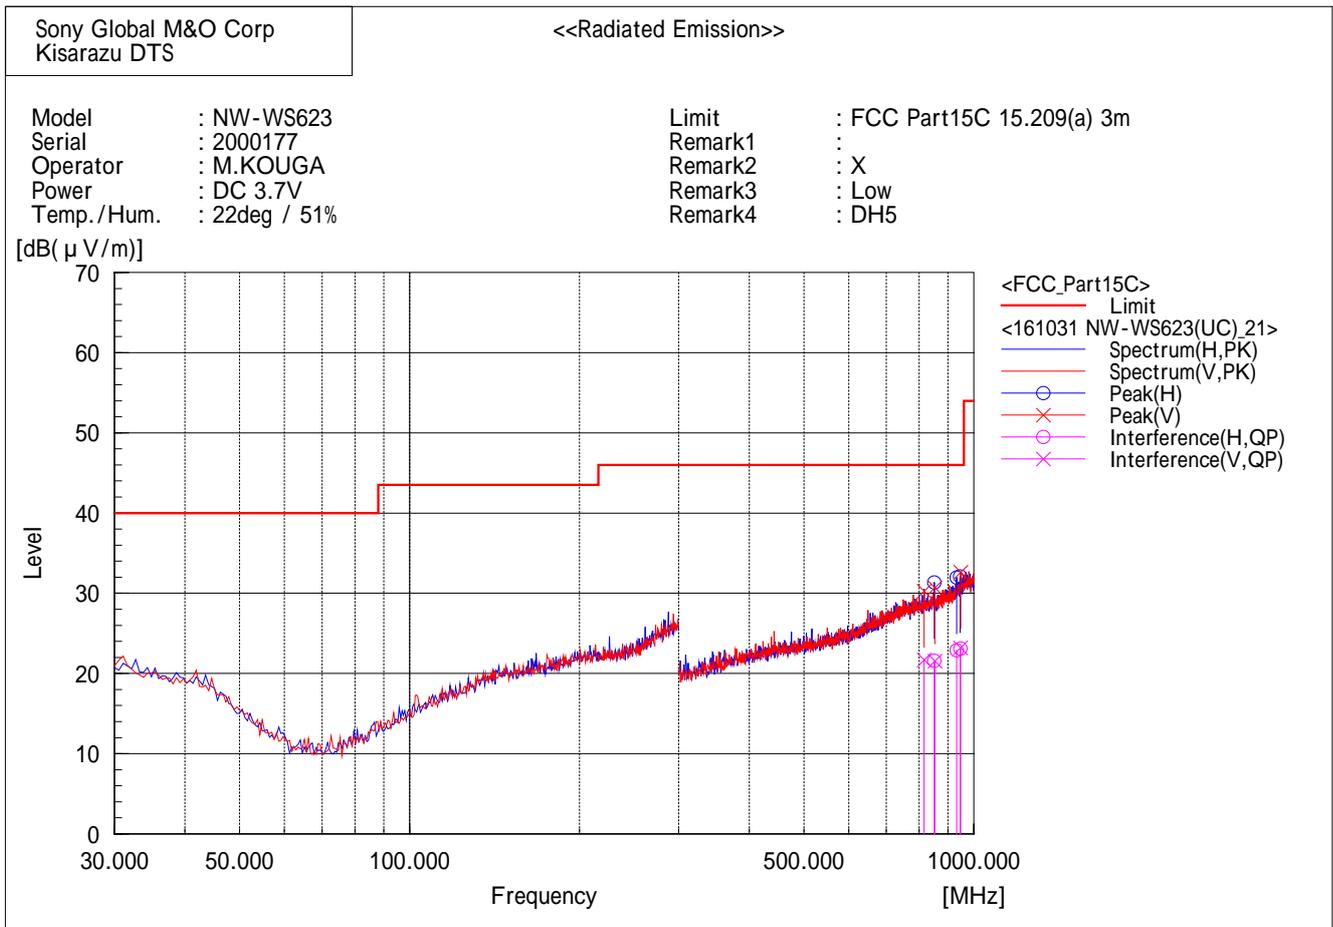

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	850.480	24.7	-3.1	21.6	46.0	24.4	100.0	170.5
2	932.260	24.5	-1.6	22.9	46.0	23.1	172.2	165.4
3	946.480	24.3	-1.2	23.1	46.0	22.9	119.6	155.3

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	816.480	25.2	-3.5	21.7	46.0	24.3	133.3	152.8
2	852.820	24.7	-3.1	21.6	46.0	24.4	100.0	174.8
3	946.540	24.4	-1.2	23.2	46.0	22.8	100.0	145.8

[BDR( DH5 )/2441MHz]

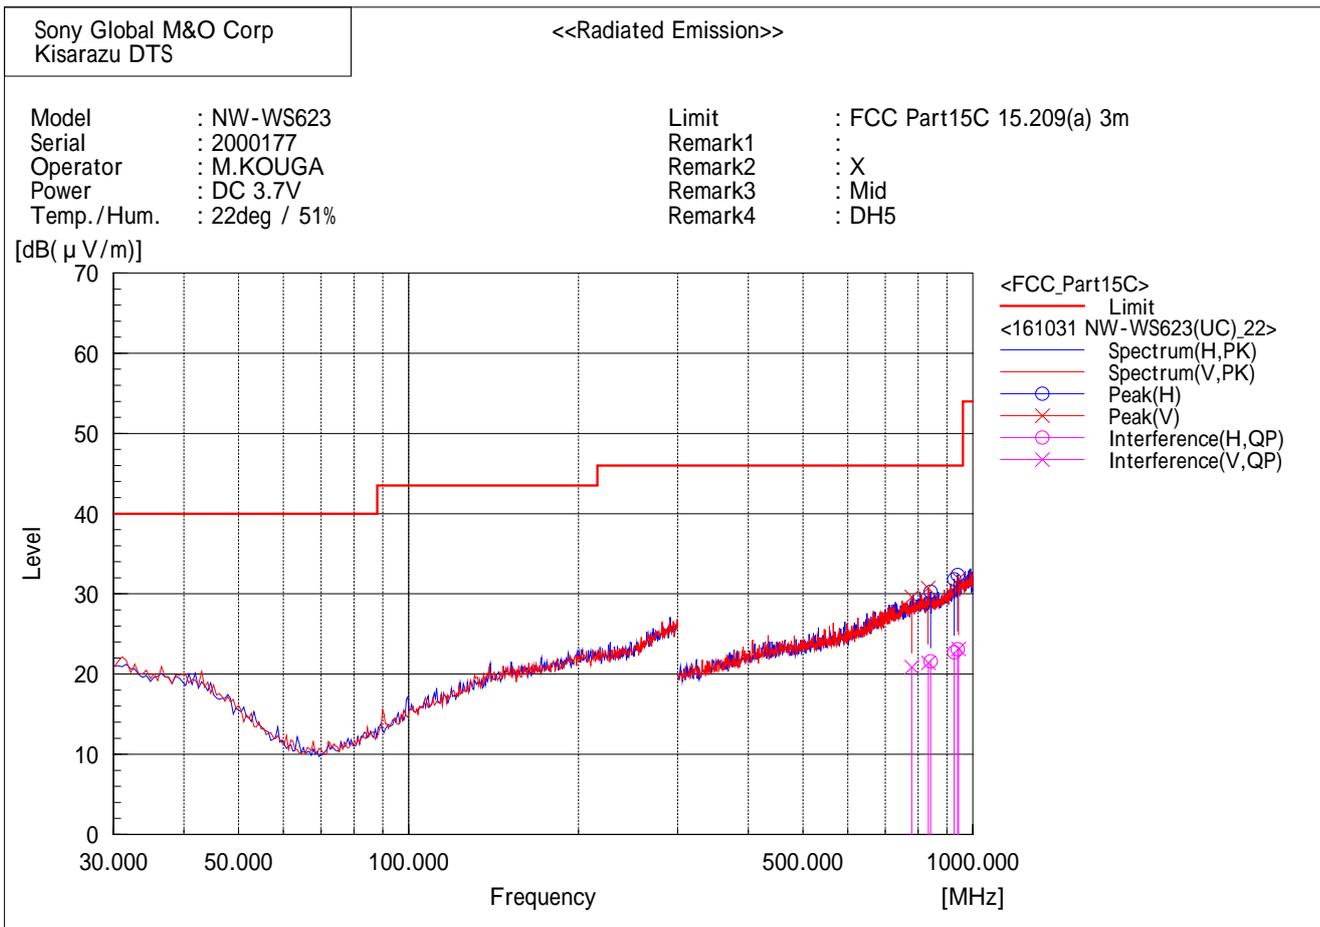

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	841.740	24.8	-3.2	21.6	46.0	24.4	168.0	138.8
2	926.320	24.4	-1.7	22.7	46.0	23.3	154.4	198.6
3	940.520	24.4	-1.3	23.1	46.0	22.9	199.0	179.3

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	779.260	24.8	-3.9	20.9	46.0	25.1	197.2	147.5
2	833.720	24.7	-3.3	21.4	46.0	24.6	231.1	160.6
3	944.000	24.3	-1.2	23.1	46.0	22.9	245.2	150.0

[BDR( DH5 )/2480MHz]

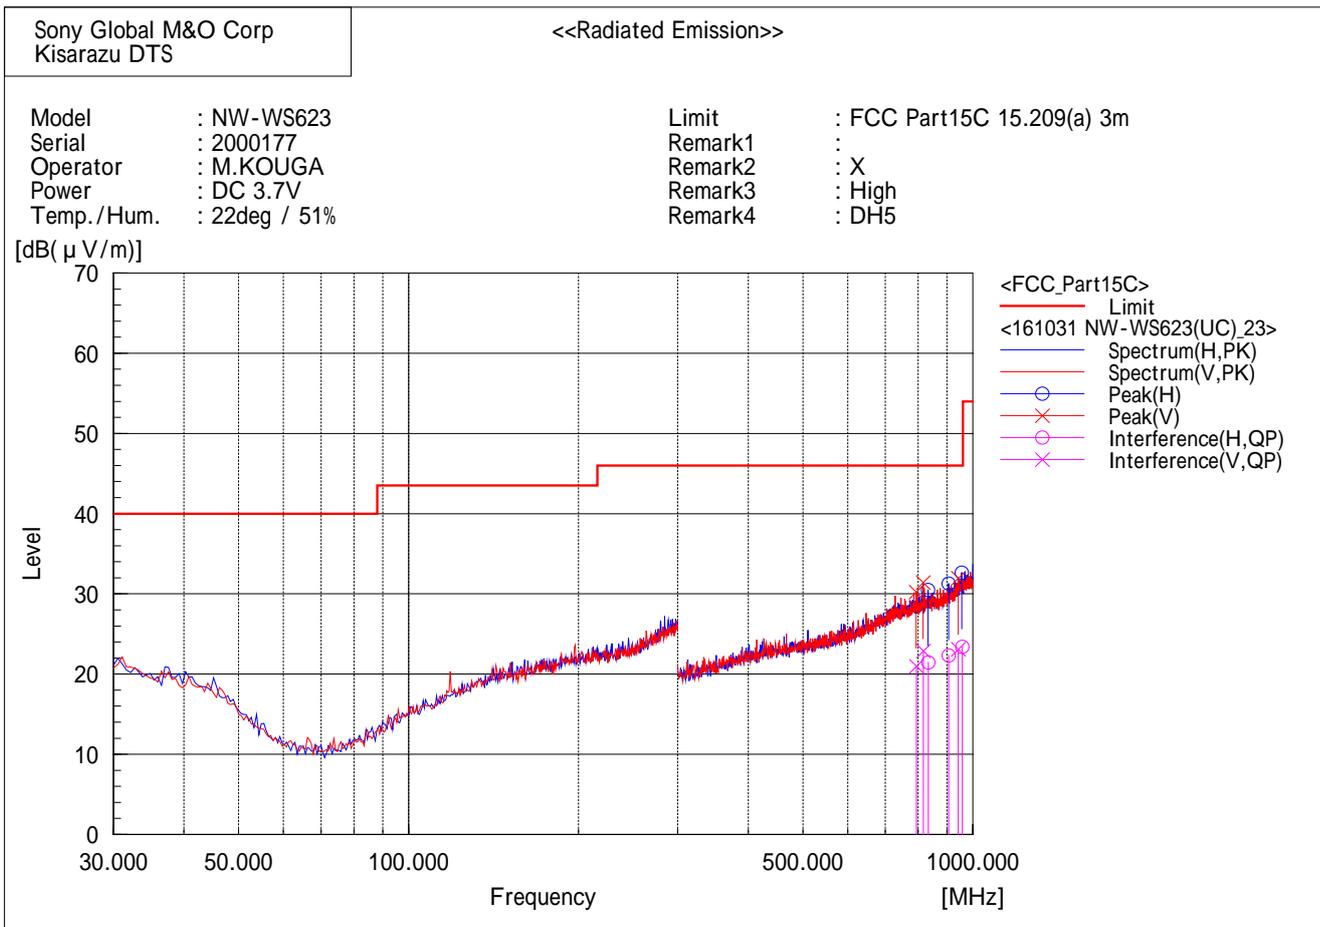

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	833.820	24.8	-3.3	21.5	46.0	24.5	100.0	181.6
2	906.140	24.5	-2.2	22.3	46.0	23.7	170.7	352.1
3	958.300	24.3	-0.9	23.4	46.0	22.6	167.5	19.8

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	793.980	24.7	-3.7	21.0	46.0	25.0	153.4	182.4
2	816.840	26.4	-3.5	22.9	46.0	23.1	100.0	105.2
3	942.720	24.4	-1.3	23.1	46.0	22.9	164.6	166.8

[EDR( 3DH5 )/2402MHz]

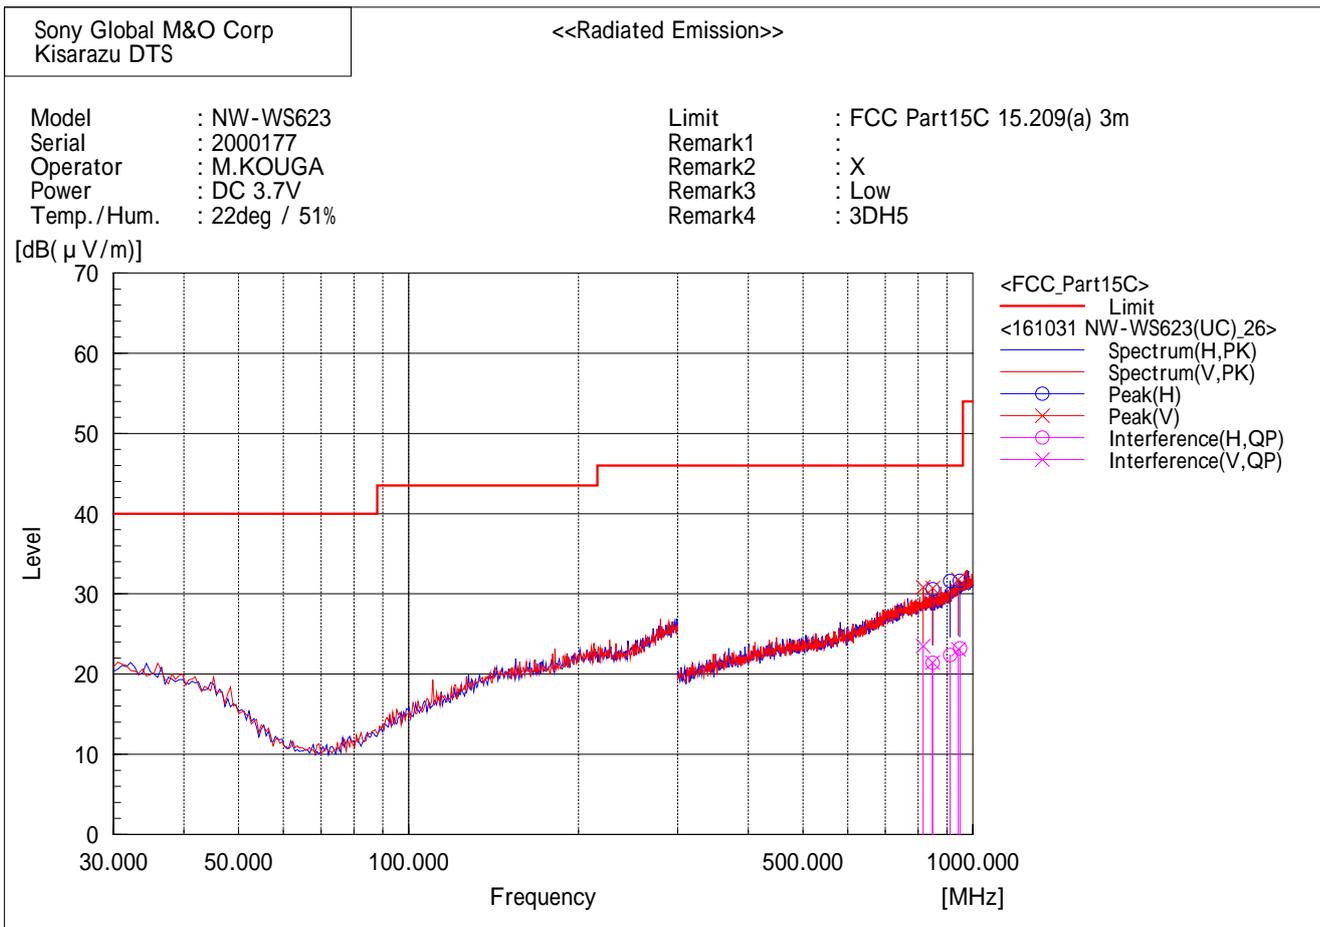

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	848.740	24.6	-3.2	21.4	46.0	24.6	153.3	155.8
2	911.700	24.5	-2.1	22.4	46.0	23.6	100.0	172.3
3	948.800	24.3	-1.1	23.2	46.0	22.8	177.1	168.8

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	816.540	27.0	-3.5	23.5	46.0	22.5	204.0	253.8
2	847.600	24.7	-3.2	21.5	46.0	24.5	196.4	293.8
3	942.840	24.4	-1.3	23.1	46.0	22.9	108.6	173.1

[EDR( 3DH5 )/2441MHz]

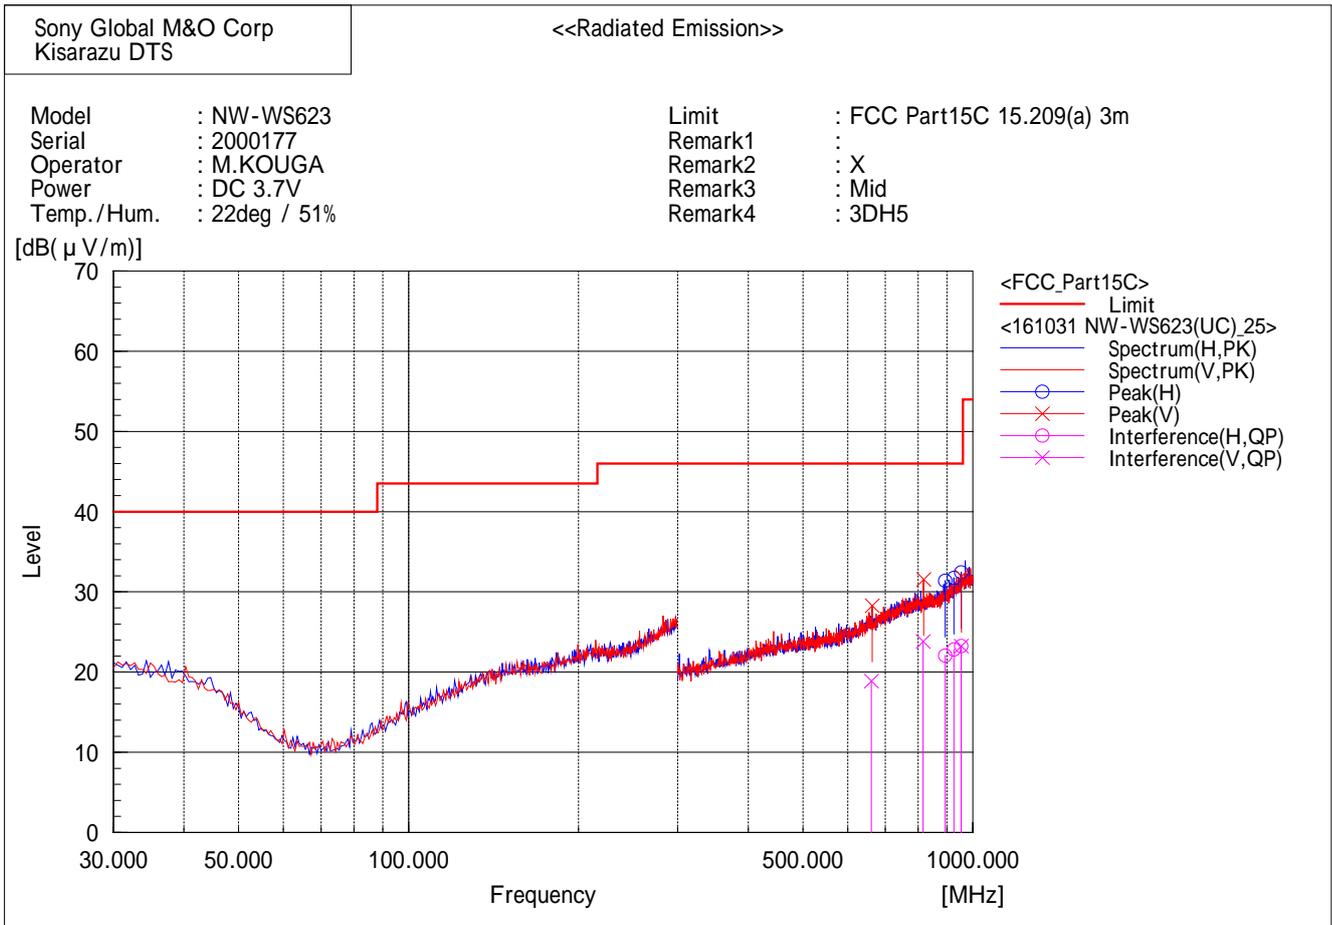

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	893.660	24.6	-2.5	22.1	46.0	23.9	143.9	164.8
2	926.280	24.5	-1.7	22.8	46.0	23.2	100.0	337.4
3	953.460	24.2	-1.0	23.2	46.0	22.8	100.0	202.3

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	661.140	25.1	-6.2	18.9	46.0	27.1	192.2	321.0
2	816.740	27.3	-3.5	23.8	46.0	22.2	200.1	264.8
3	953.900	24.3	-1.0	23.3	46.0	22.7	184.6	212.1

[EDR( 3DH5 )/2480MHz]

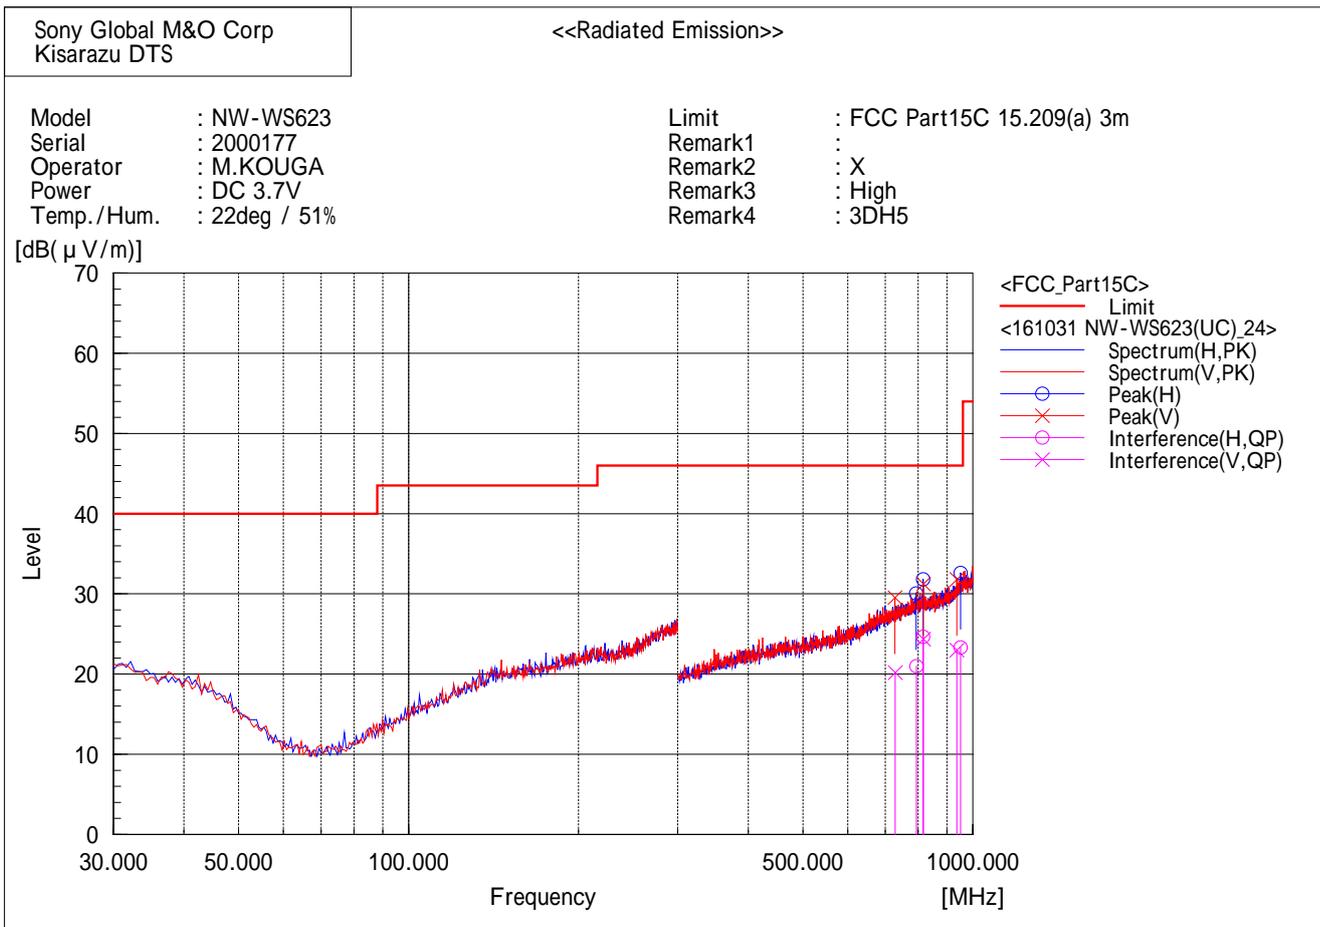

Final Result

--- Horizontal Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	793.980	24.7	-3.7	21.0	46.0	25.0	183.5	151.9
2	816.600	28.2	-3.5	24.7	46.0	21.3	100.0	149.8
3	951.040	24.3	-1.0	23.3	46.0	22.7	175.7	180.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	728.180	24.9	-4.7	20.2	46.0	25.8	148.0	182.2
2	816.880	27.9	-3.5	24.4	46.0	21.6	100.0	293.4
3	936.820	24.4	-1.4	23.0	46.0	23.0	100.0	186.0

1GHz - 6 GHz

[BDR( DH5 )/2402MHz]

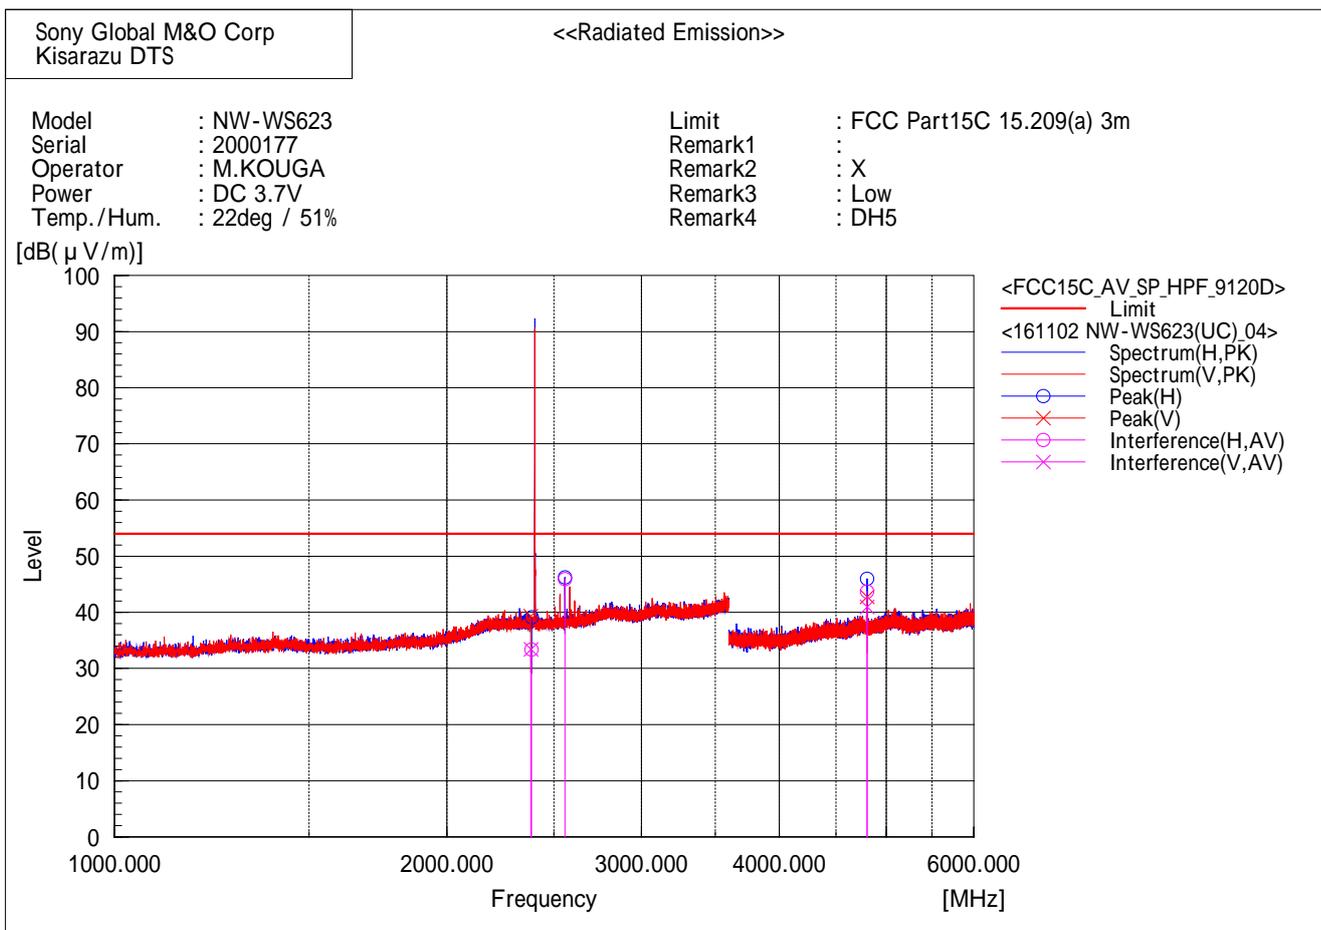

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2385.177	34.8	-1.4	33.4	54.0	20.6	193.1	6.7
2	2557.957	47.3	-1.4	45.9	54.0	8.1	246.9	240.5
3	4804.065	40.6	3.1	43.7	54.0	10.3	327.0	276.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2383.297	34.8	-1.4	33.4	54.0	20.6	255.4	144.2
2	4804.211	37.9	3.1	41.0	54.0	13.0	100.0	342.3

[BDR( DH5 )/2441MHz]

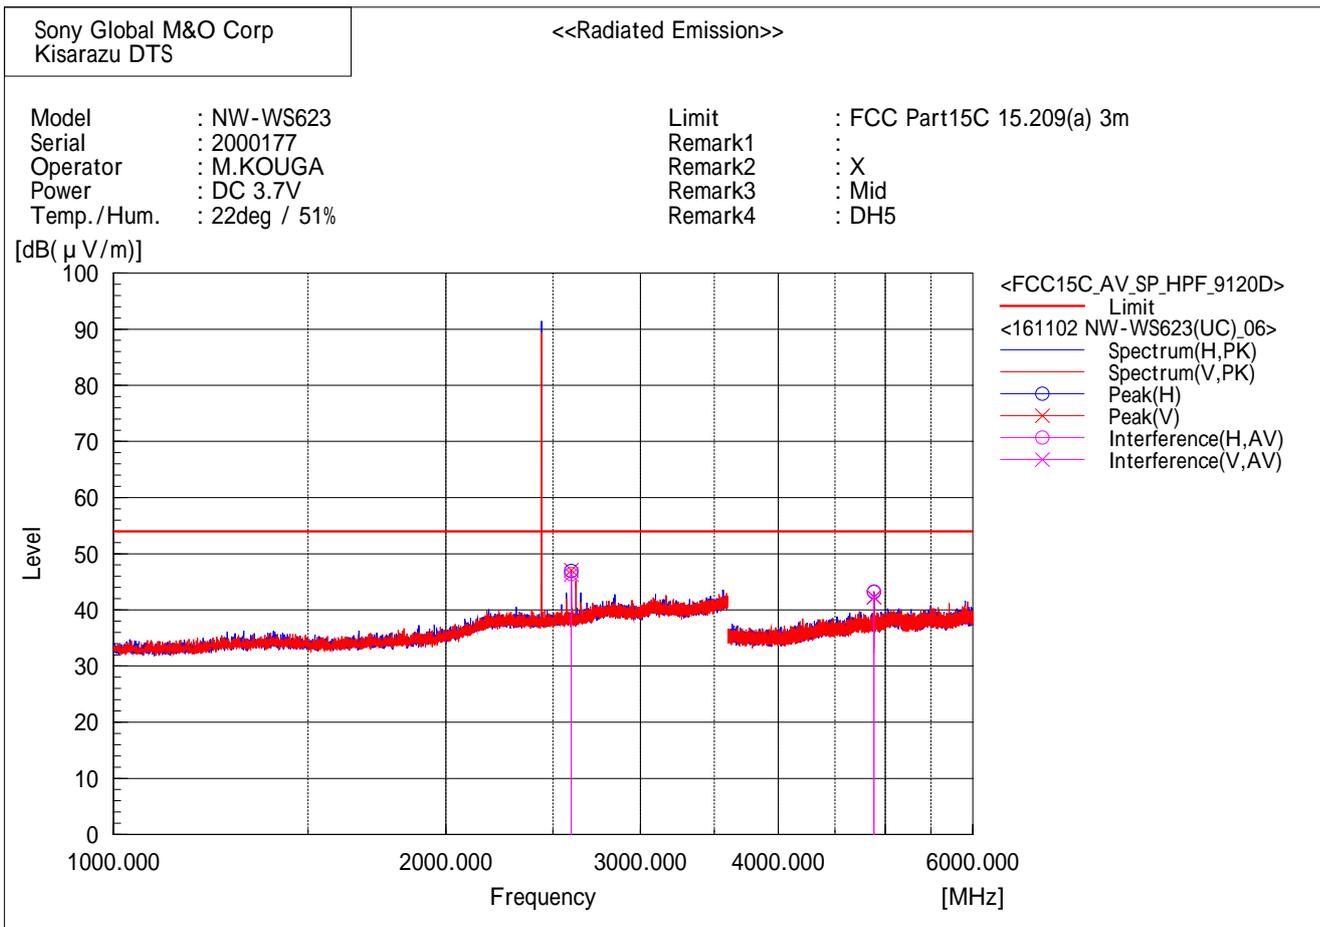

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2596.943	47.8	-1.4	46.4	54.0	7.6	215.0	238.9
2	4881.817	40.4	2.9	43.3	54.0	10.7	374.2	303.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2596.931	47.7	-1.4	46.3	54.0	7.7	280.0	129.0
2	4881.869	39.3	2.9	42.2	54.0	11.8	165.9	273.0

[BDR( DH5 )/2480MHz]

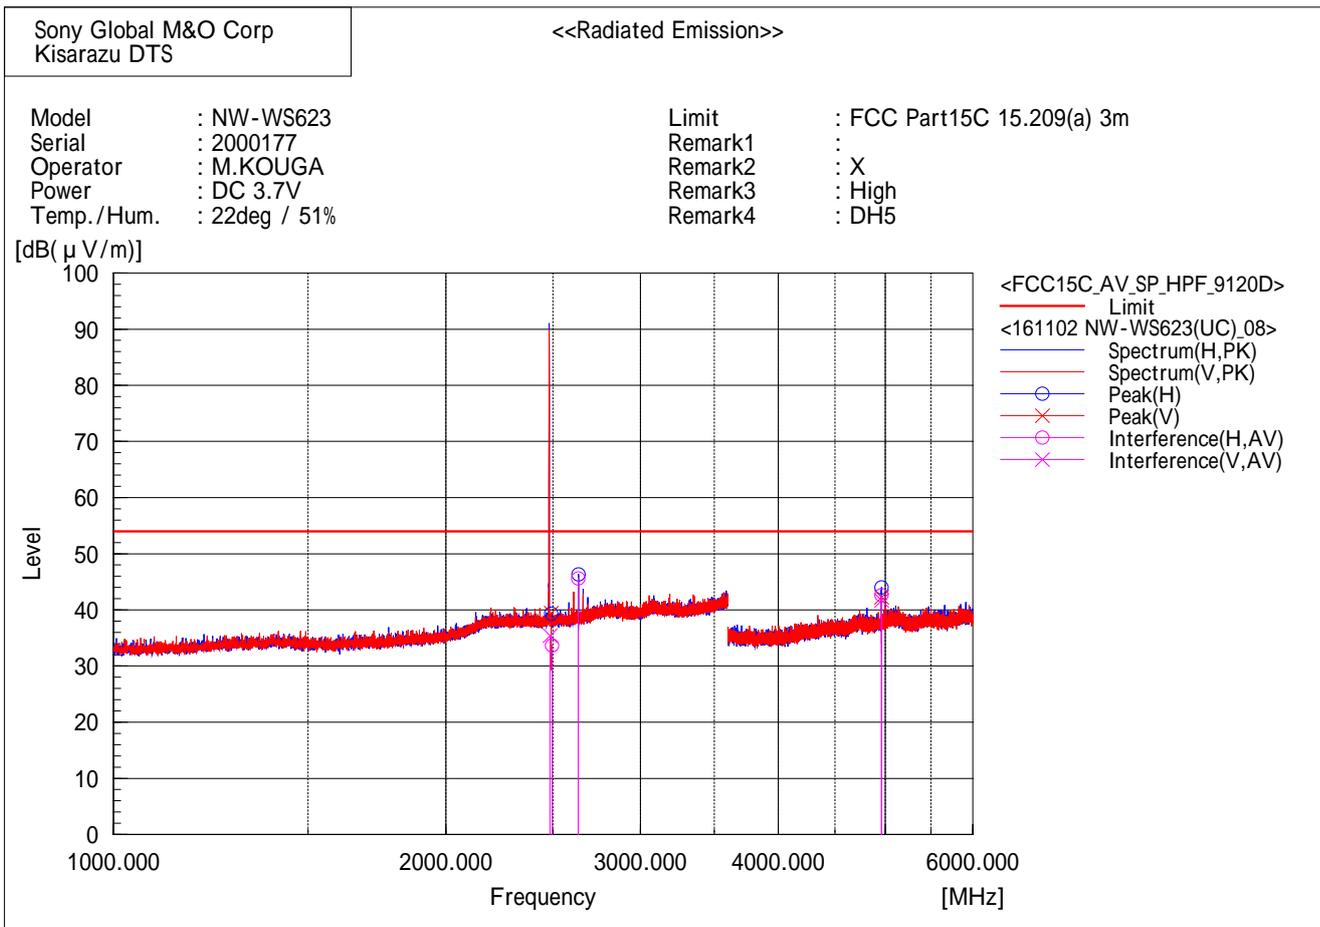

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2494.569	35.0	-1.3	33.7	54.0	20.3	347.0	187.2
2	2635.894	46.9	-1.3	45.6	54.0	8.4	240.0	234.5
3	4959.922	39.5	3.1	42.6	54.0	11.4	256.0	301.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2484.235	36.7	-1.3	35.4	54.0	18.6	164.6	146.3
2	4960.003	38.6	3.1	41.7	54.0	12.3	100.0	287.3

[BDR( DH5 )/2402MHz]

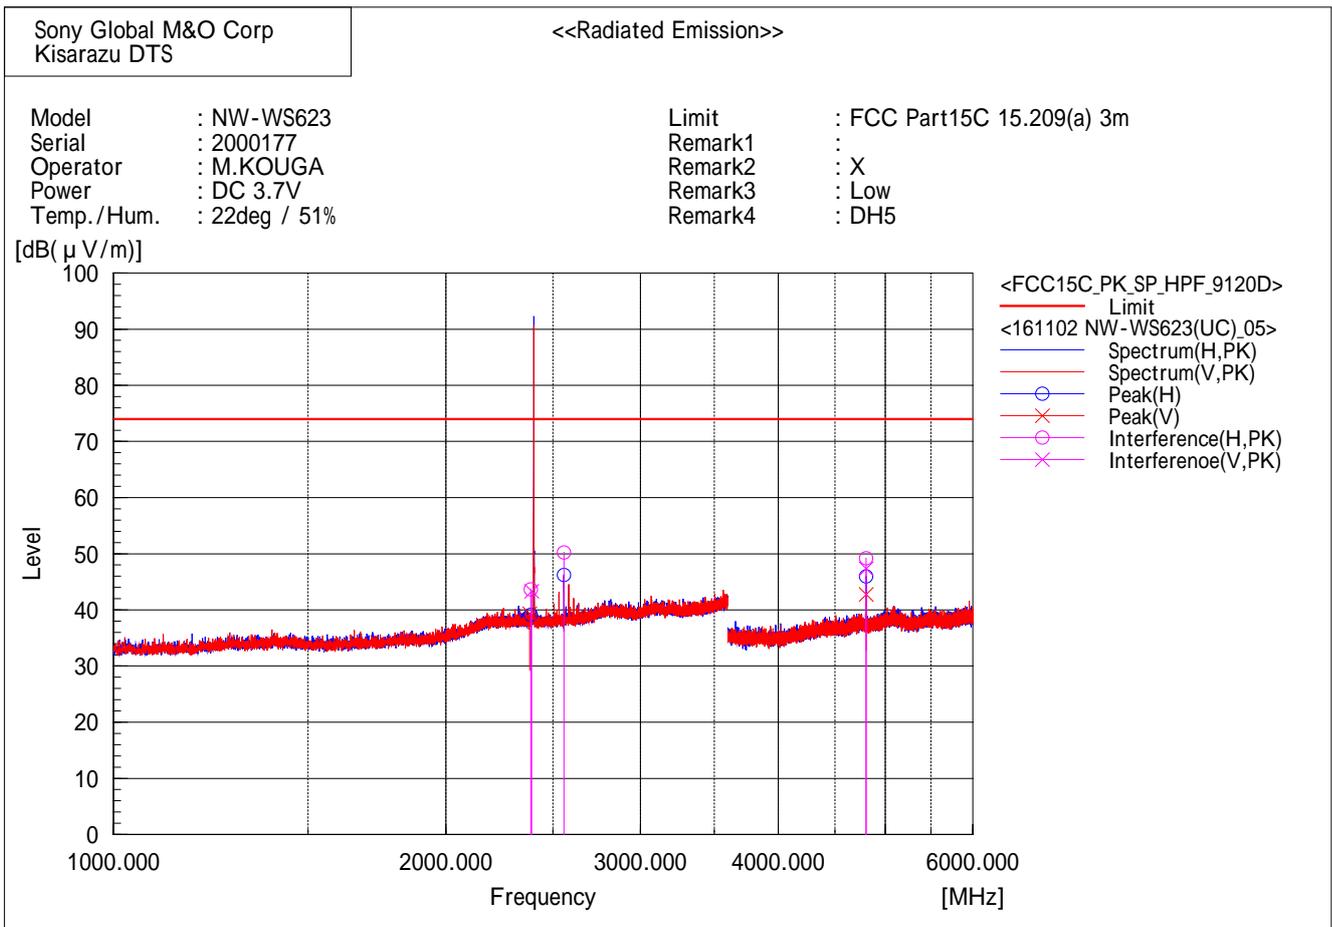

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2386.674	45.1	-1.4	43.7	74.0	30.3	193.0	8.1
2	2558.149	51.6	-1.4	50.2	74.0	23.8	246.0	240.2
3	4804.259	46.1	3.1	49.2	74.0	24.8	323.0	276.2

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2392.068	44.7	-1.4	43.3	74.0	30.7	255.0	144.2
2	4803.907	44.2	3.1	47.3	74.0	26.7	100.0	342.3

[BDR( DH5 )/2441MHz]

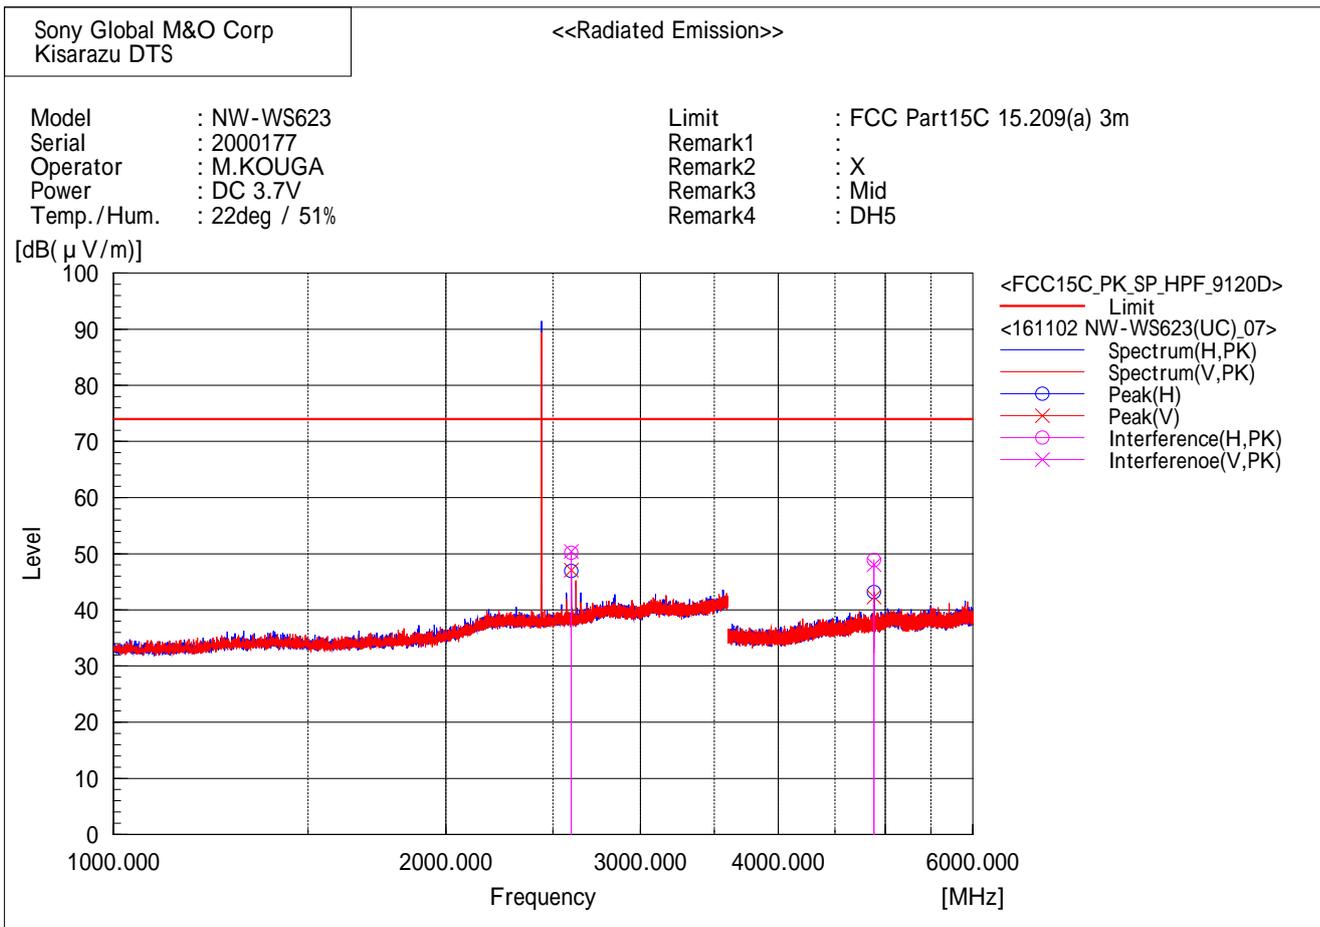

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2597.270	51.6	-1.4	50.2	74.0	23.8	215.0	239.2
2	4882.570	46.0	2.9	48.9	74.0	25.1	373.0	304.2

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2596.834	51.8	-1.4	50.4	74.0	23.6	280.0	129.2
2	4881.509	45.2	2.9	48.1	74.0	25.9	166.1	273.7

[BDR( DH5 )/2480MHz]

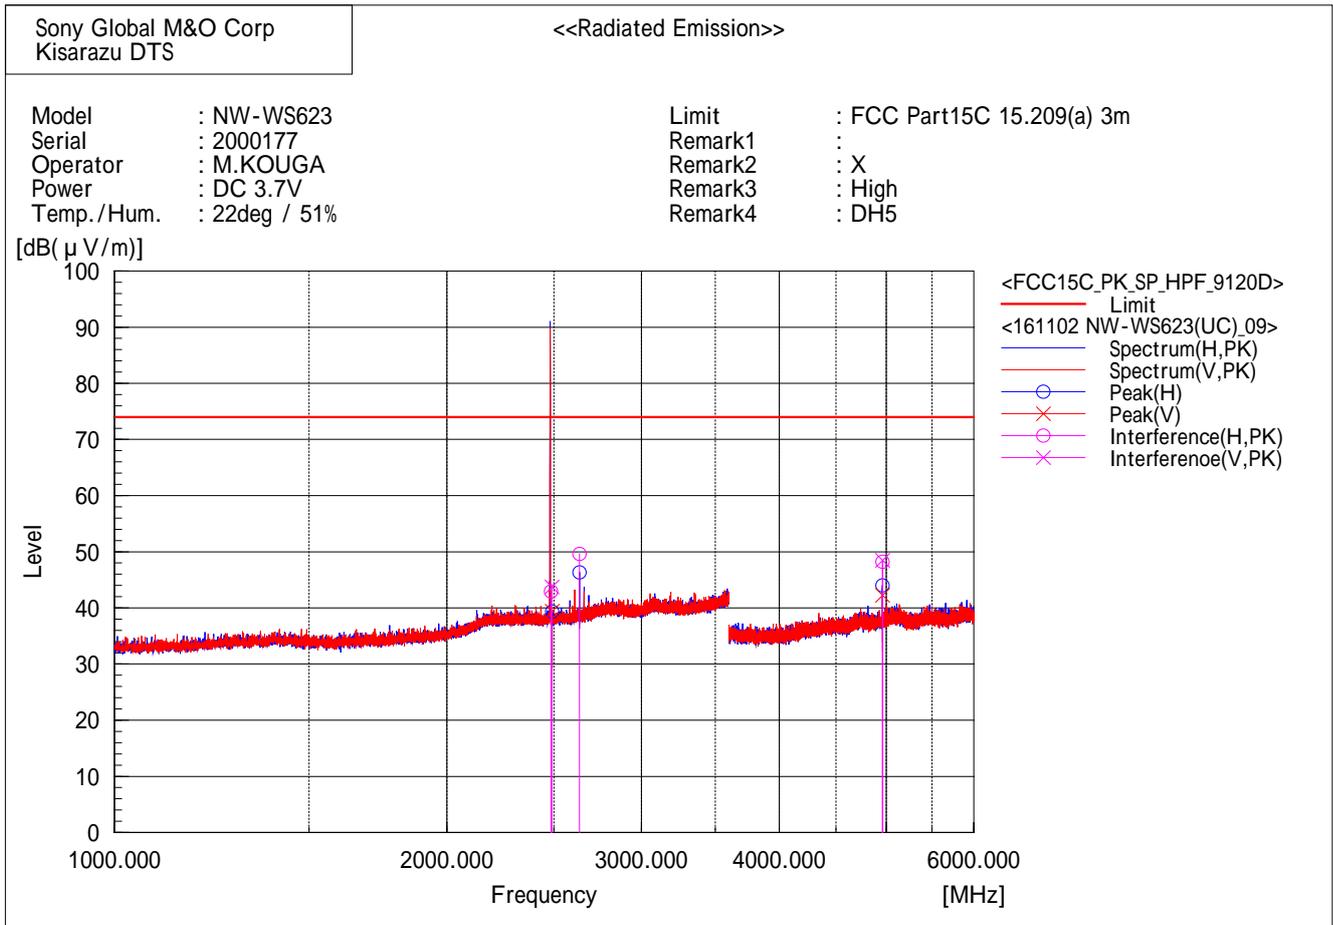

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2485.379	44.2	-1.3	42.9	74.0	31.1	346.2	189.4
2	2636.153	50.9	-1.3	49.6	74.0	24.4	240.0	234.2
3	4960.279	45.1	3.1	48.2	74.0	25.8	256.0	302.0


--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2489.652	45.1	-1.3	43.8	74.0	30.2	164.6	146.5
2	4960.261	45.4	3.1	48.5	74.0	25.5	100.0	287.2


[EDR( 3DH5 )/2402MHz]

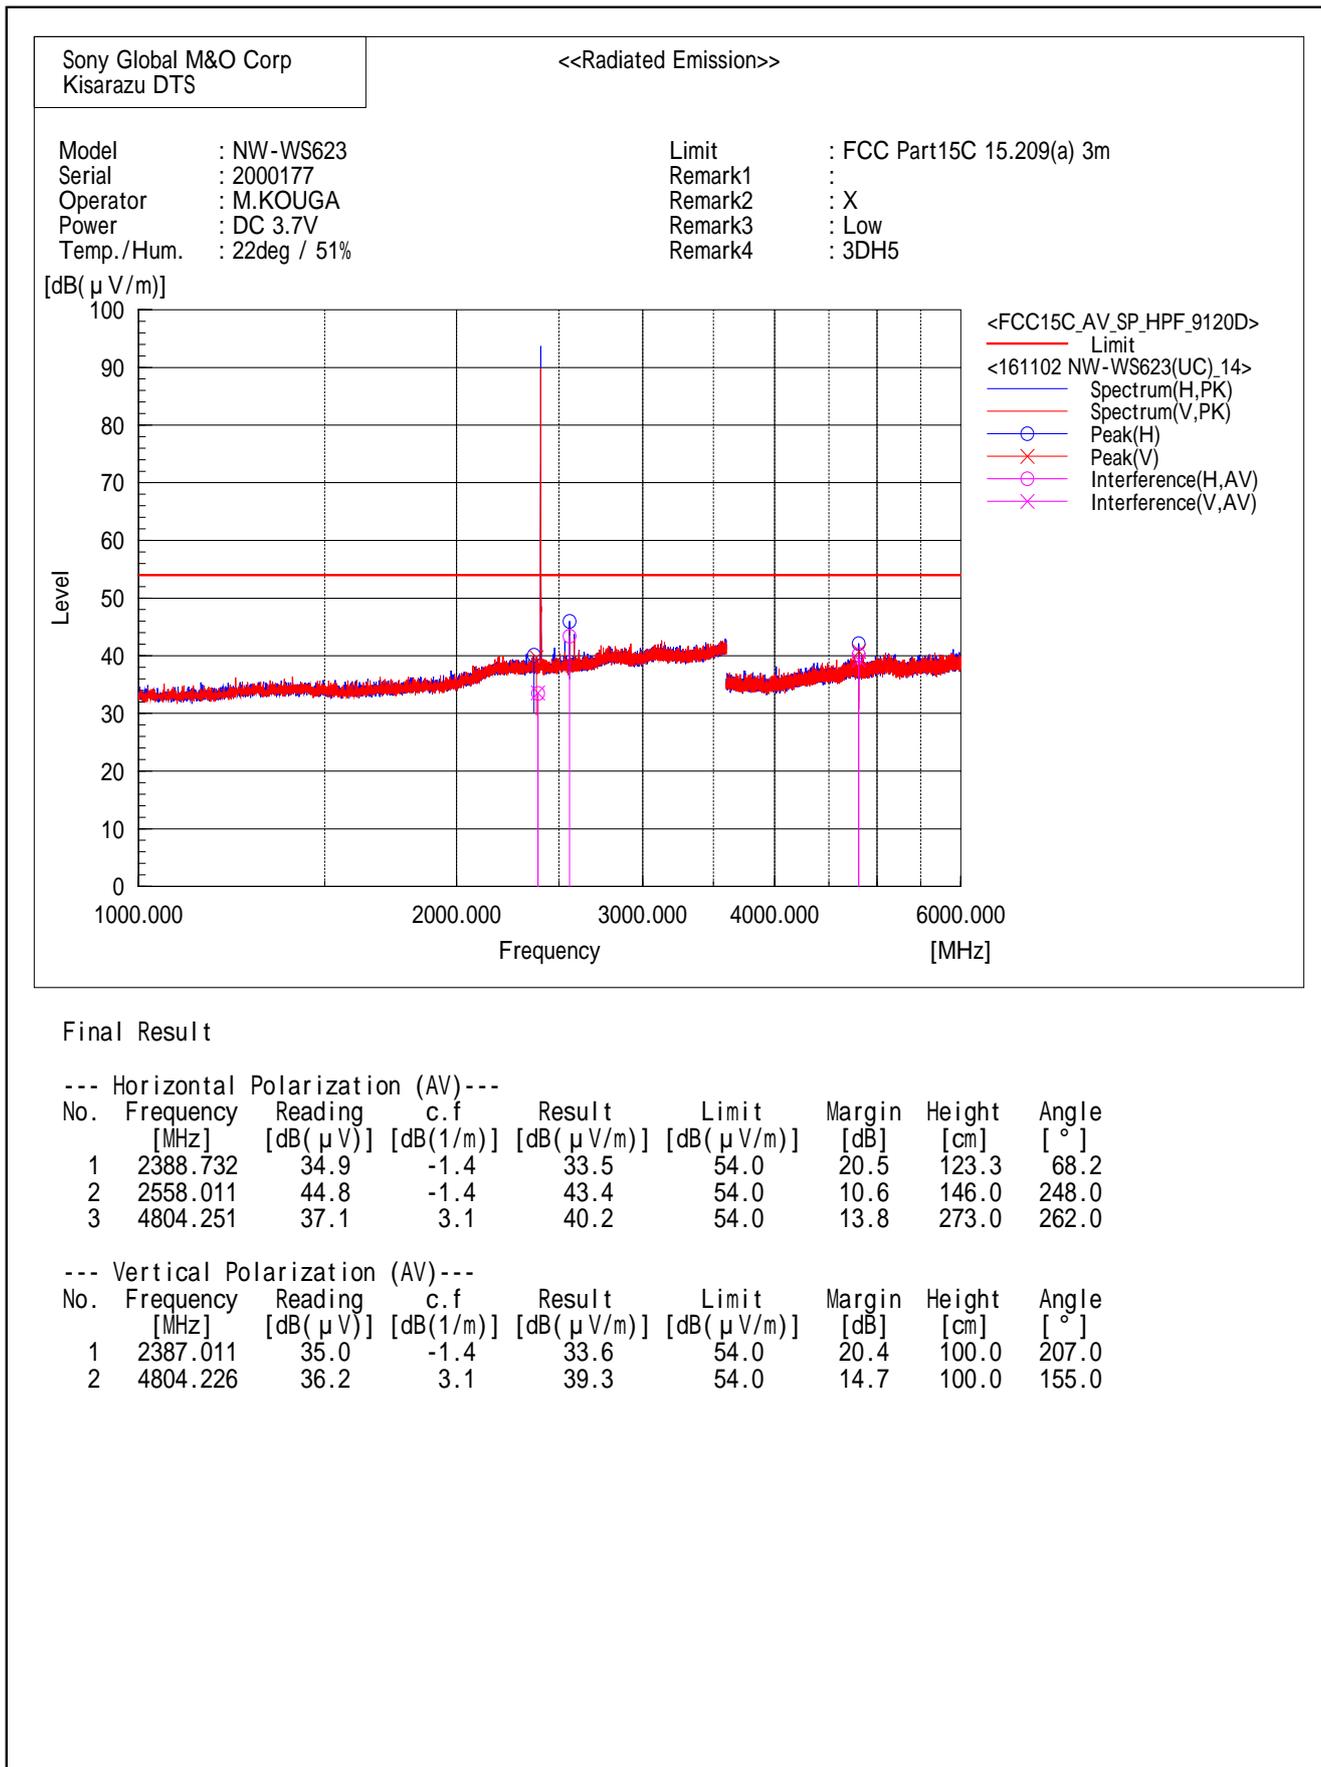


[EDR( 3DH5 )/2441MHz]

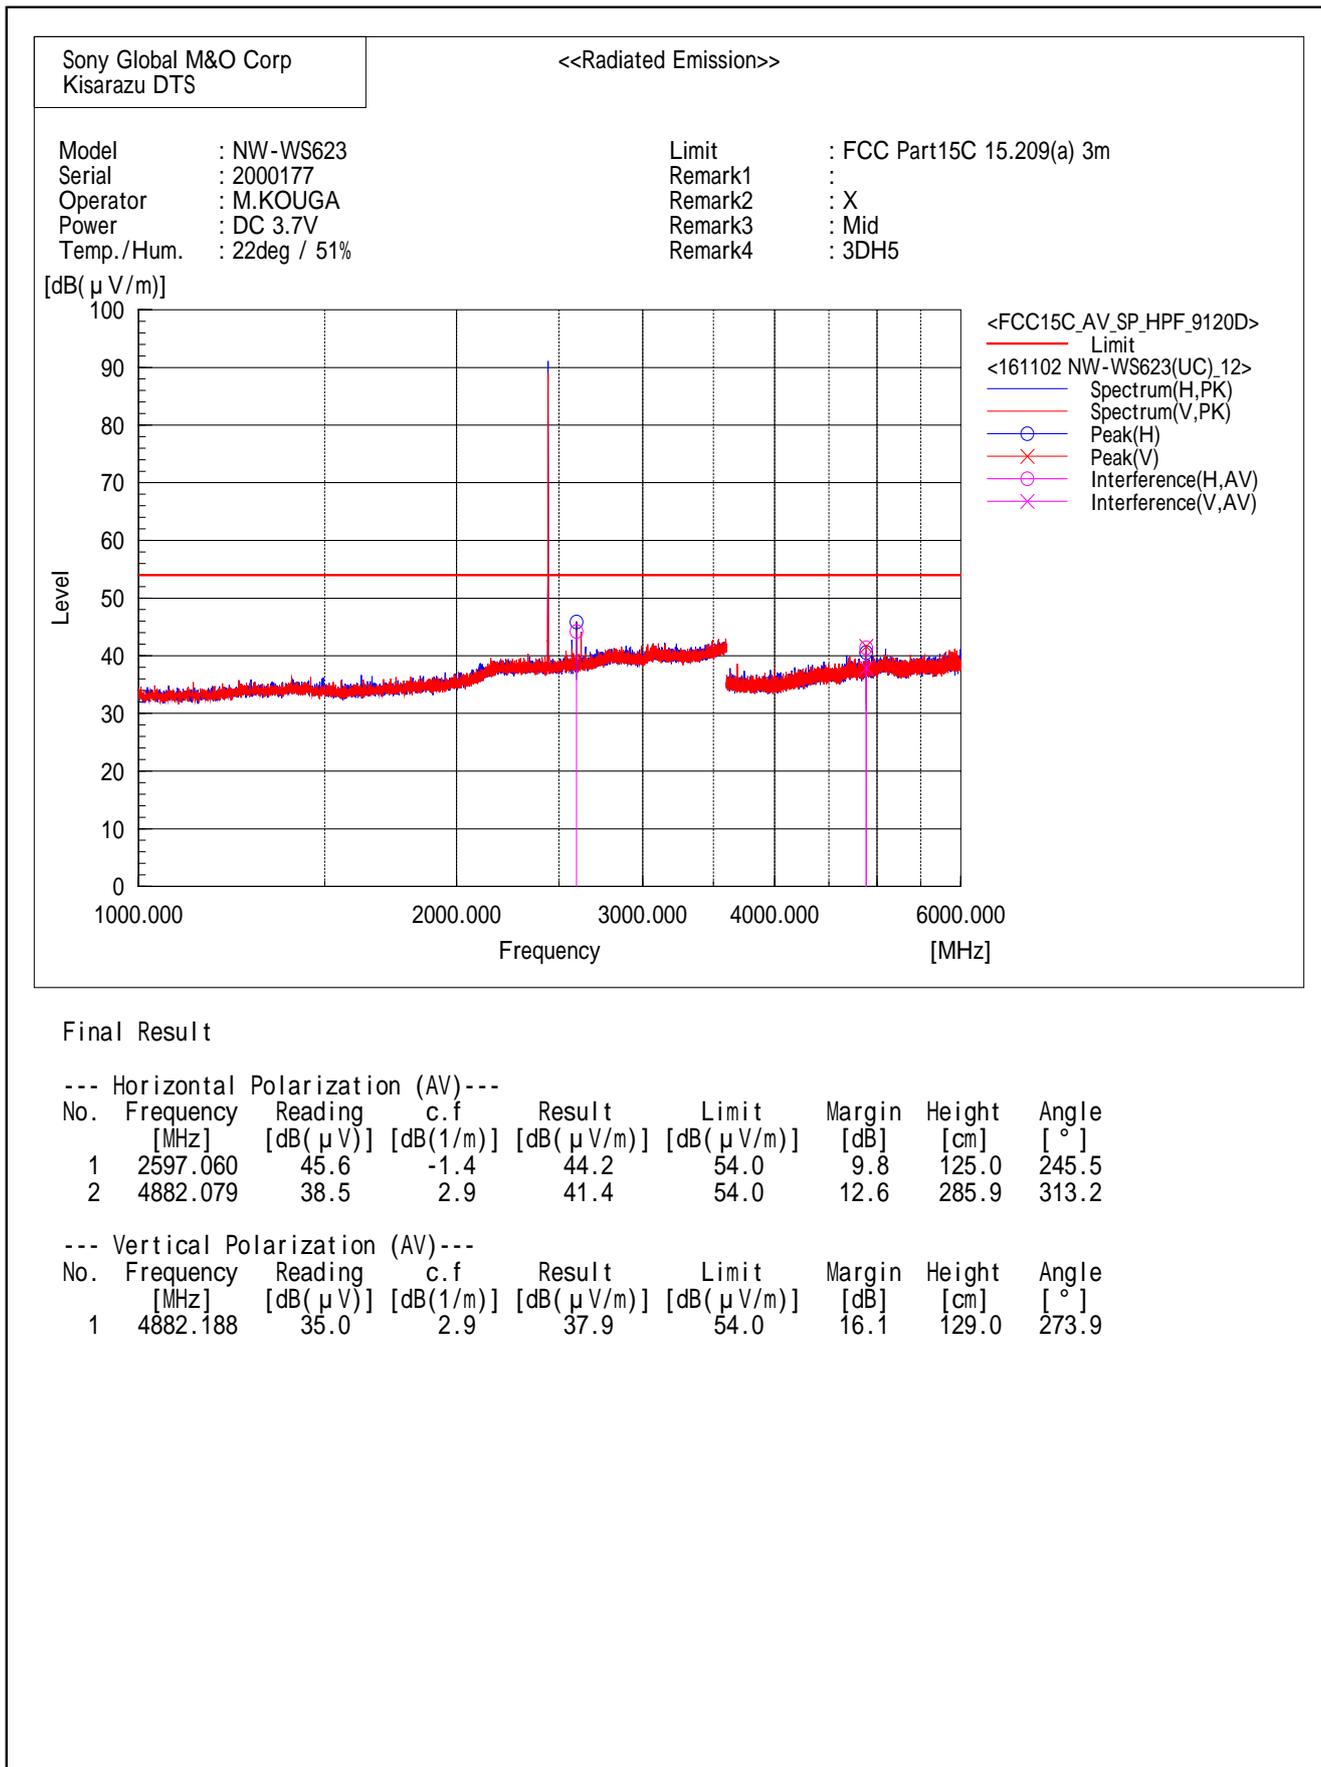

[EDR( 3DH5 )/2480MHz]

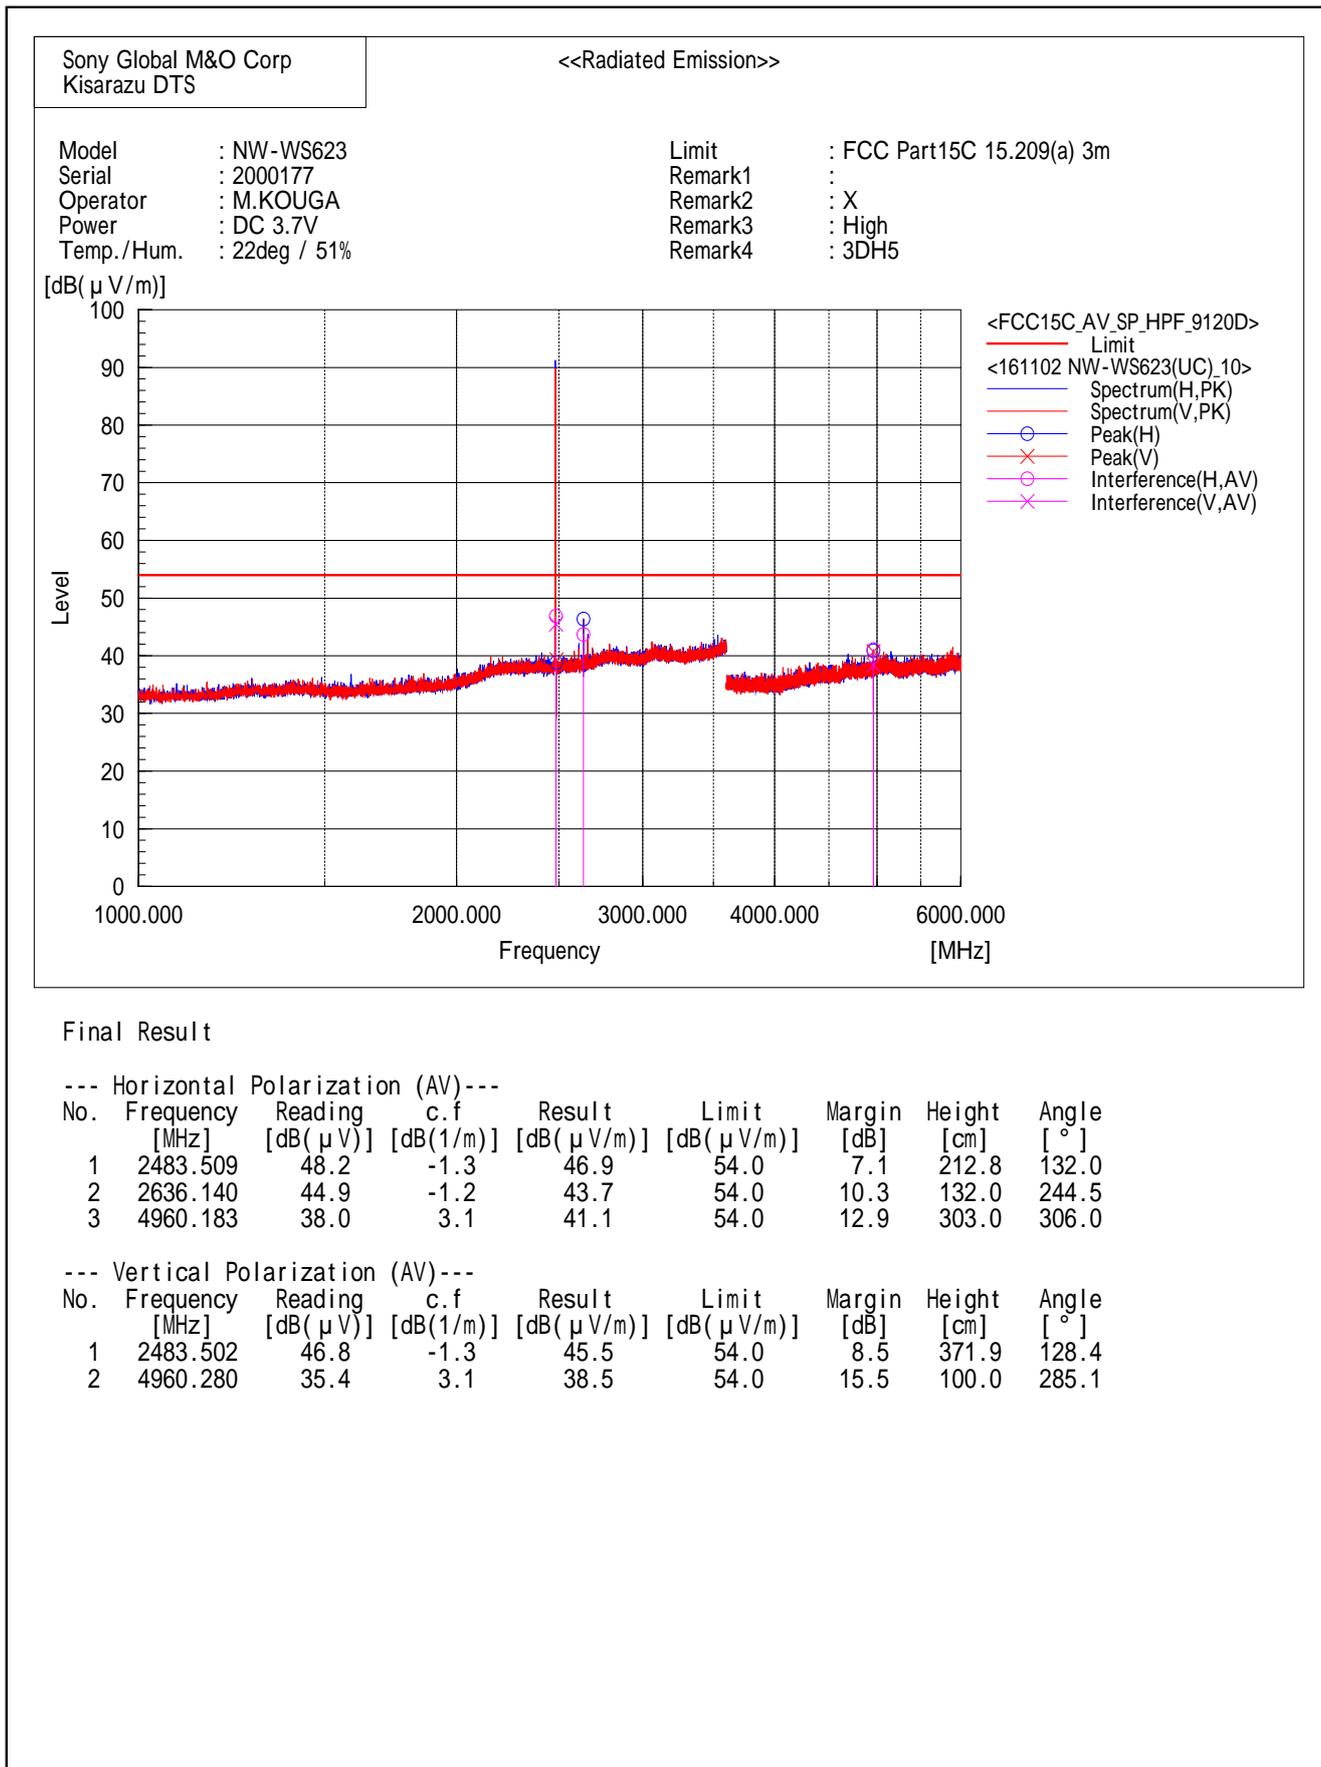

[EDR( 3DH5 )/2402MHz]

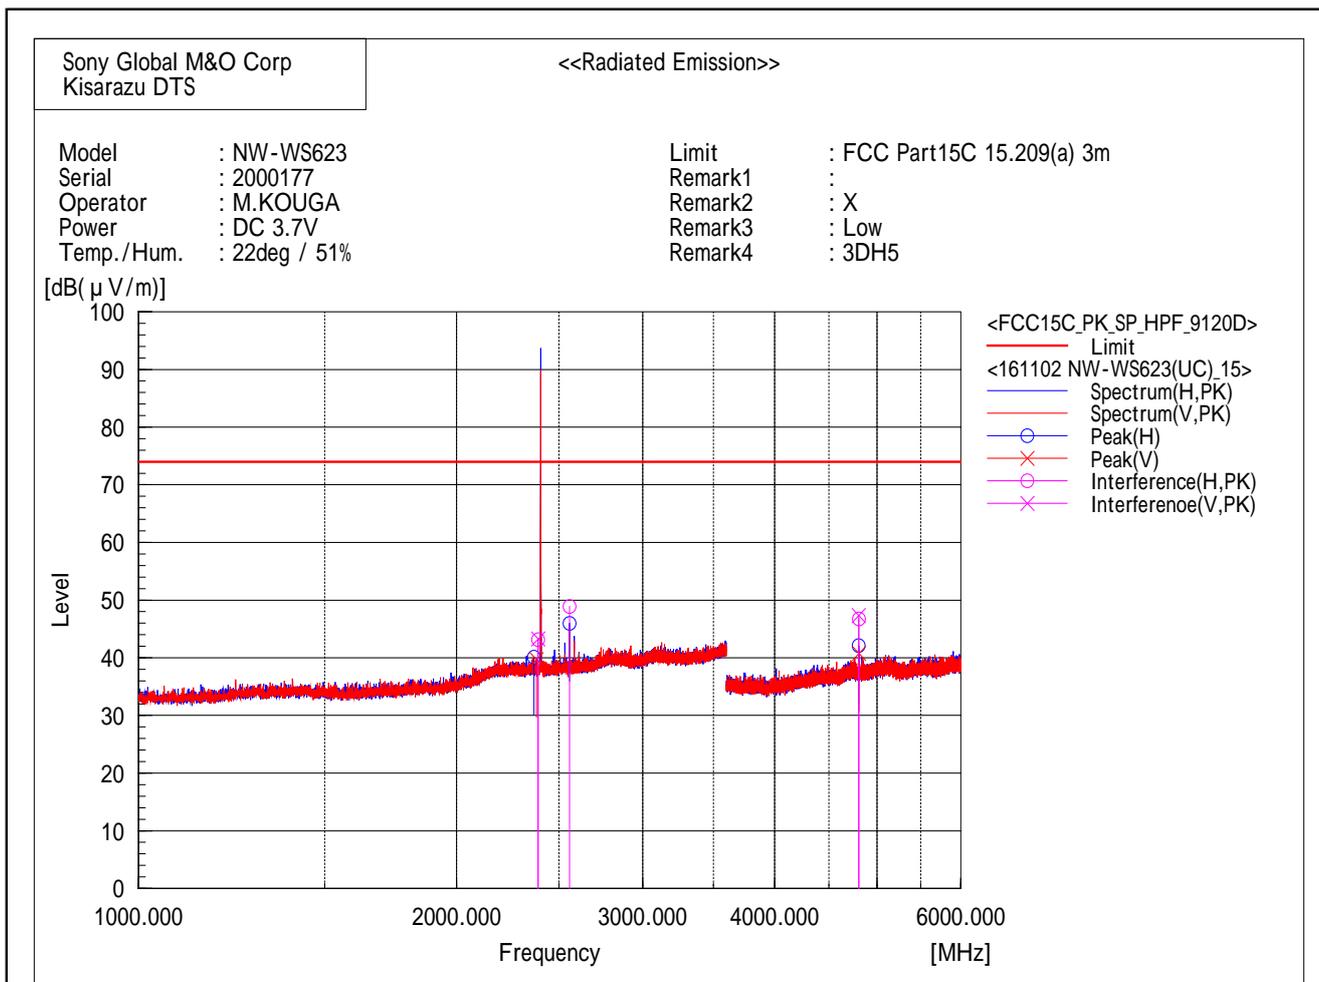

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.250	44.6	-1.4	43.2	74.0	30.8	122.0	71.2
2	2557.780	50.3	-1.4	48.9	74.0	25.1	128.0	236.0
3	4804.554	43.7	3.1	46.8	74.0	27.2	278.6	260.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2388.207	44.7	-1.4	43.3	74.0	30.7	100.0	209.3
2	4804.304	44.2	3.1	47.3	74.0	26.7	100.0	154.7

[EDR( 3DH5 )/2441MHz]

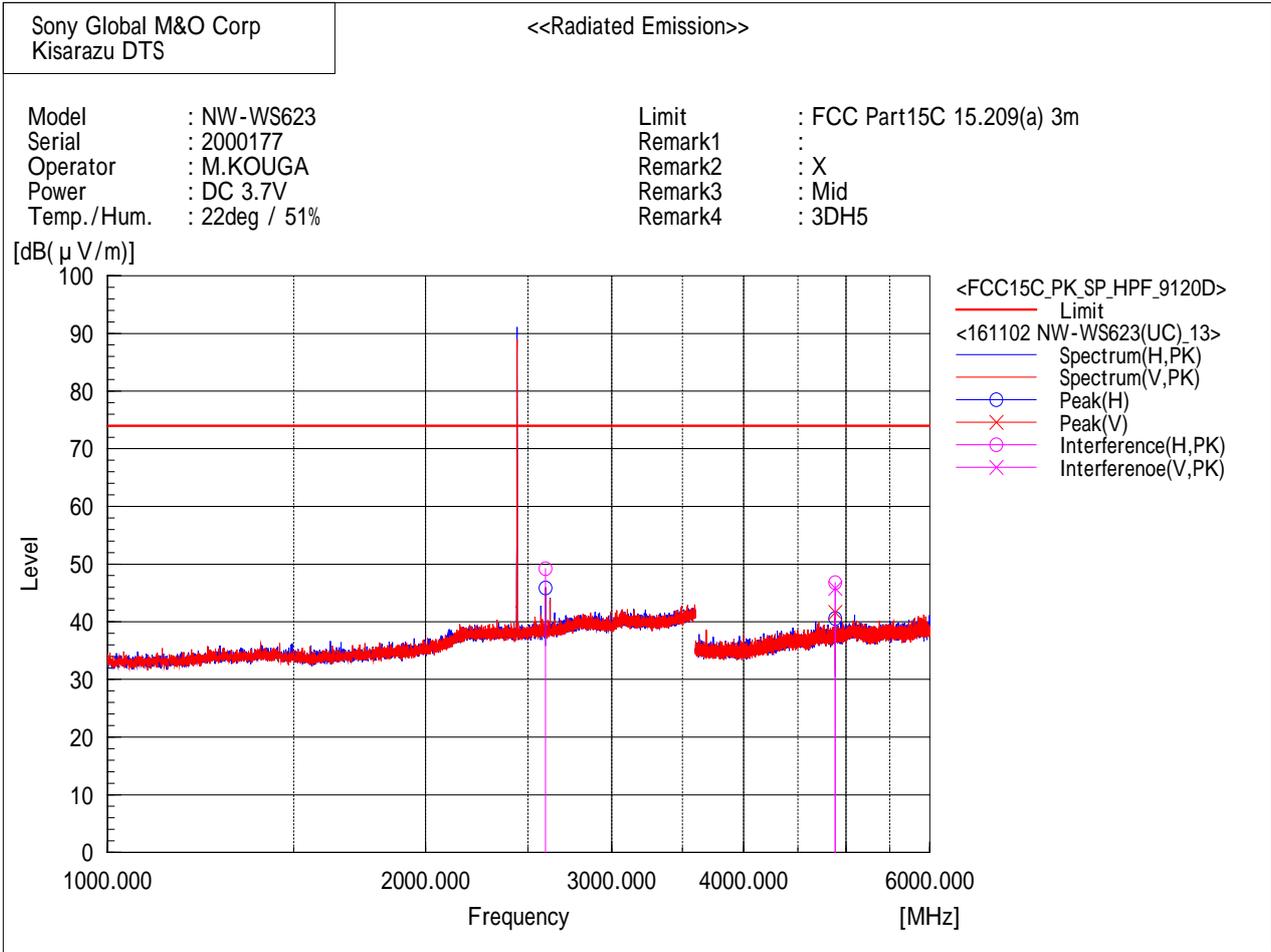

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4881.742	43.9	2.9	46.8	74.0	27.2	284.0	310.2
2	2596.589	50.6	-1.4	49.2	74.0	24.8	150.0	244.0

--- Vertical Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4881.650	42.9	2.9	45.8	74.0	28.2	131.2	269.2

[EDR( 3DH5 )/2480MHz]

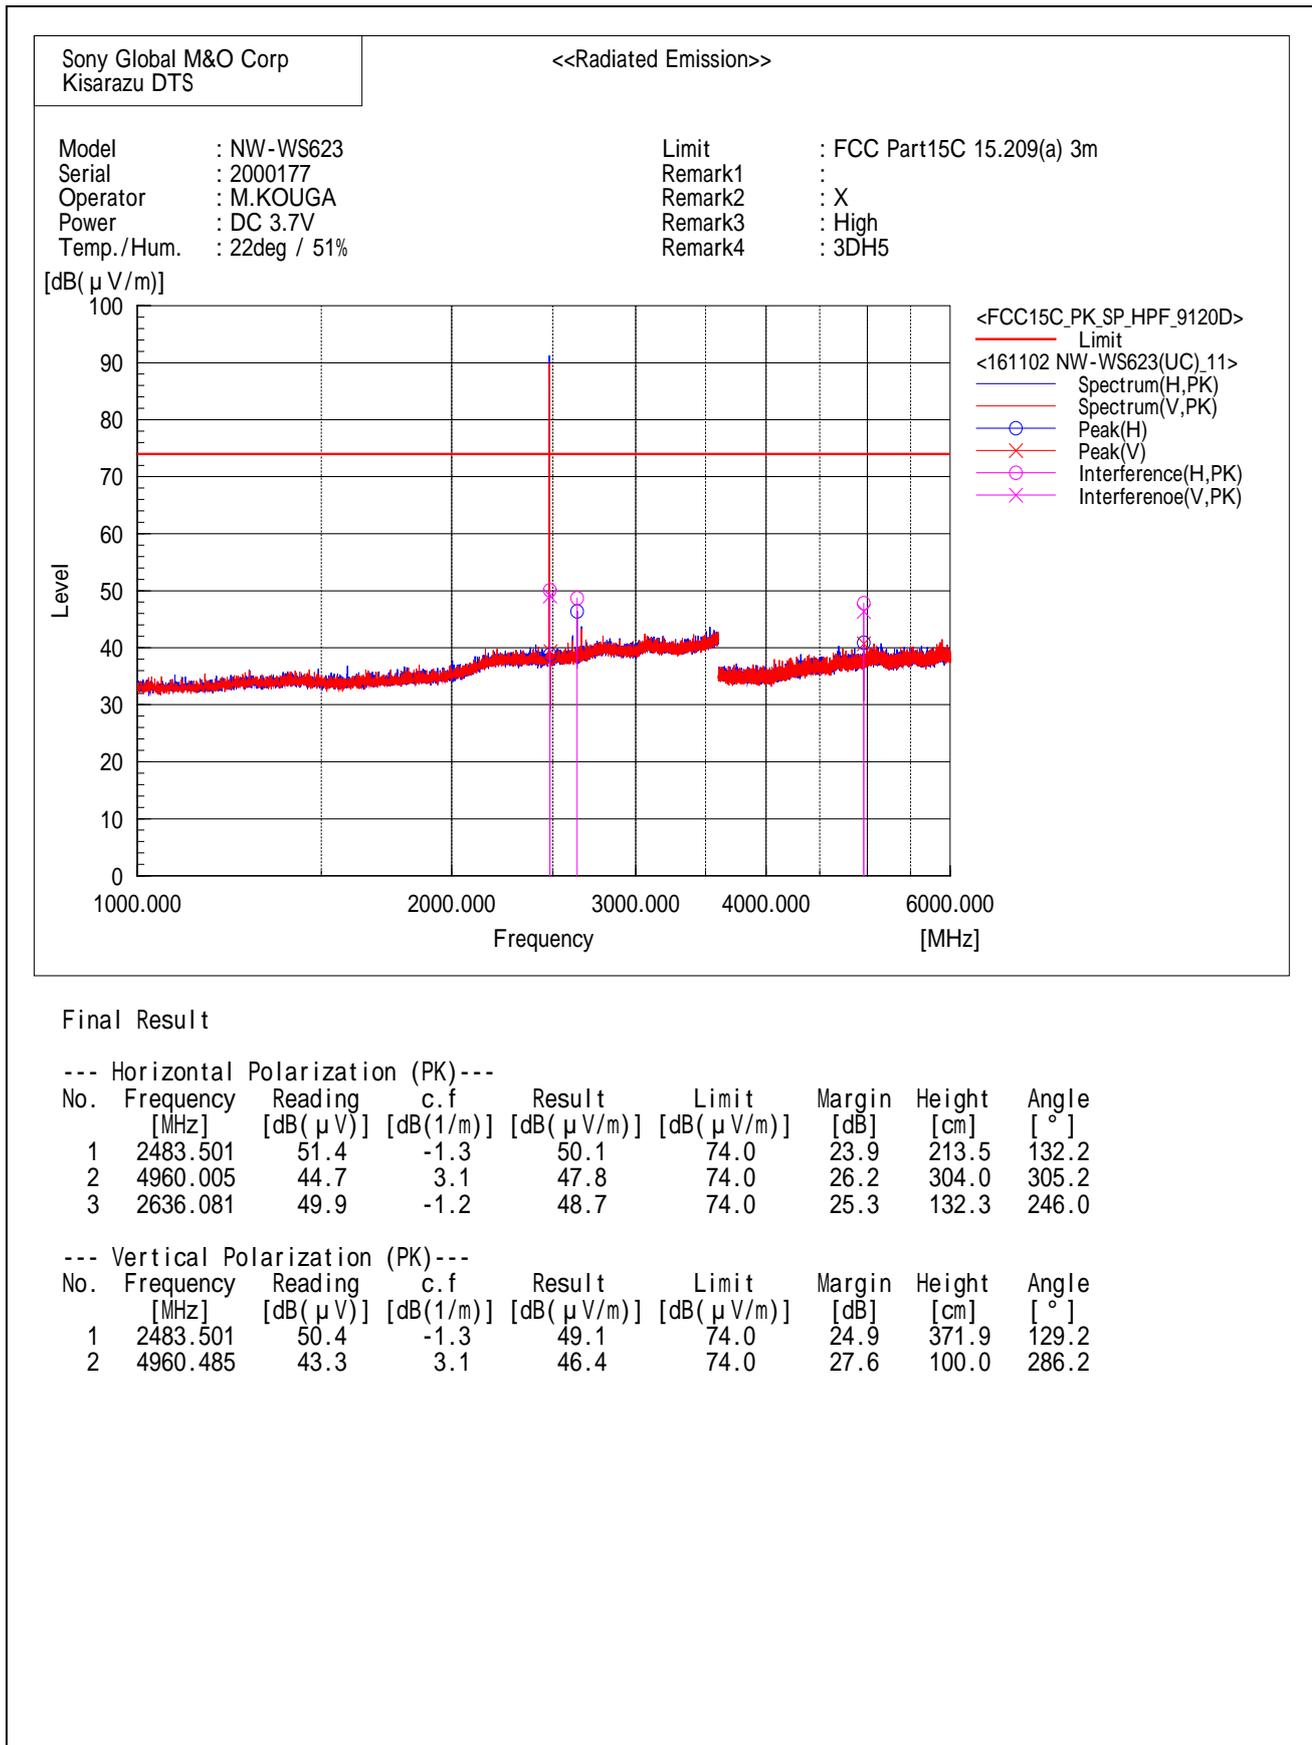

6 GHz - 18 GHz

[BDR( DH5 )/2402MHz]

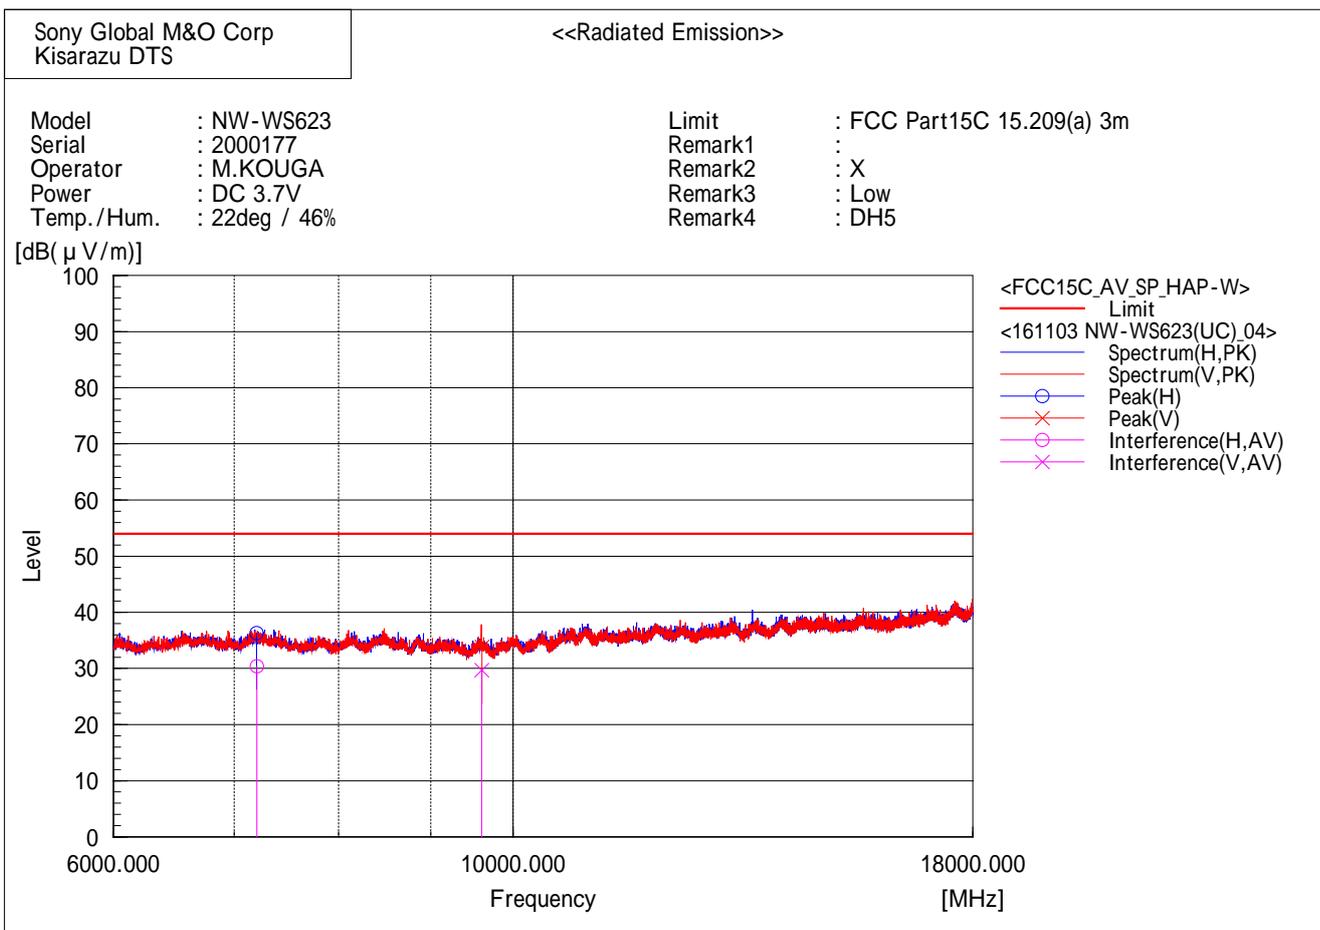

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	38.5	-8.1	30.4	54.0	23.6	394.1	97.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9608.000	36.1	-6.4	29.7	54.0	24.3	122.1	119.1

[BDR( DH5 )/2441MHz]

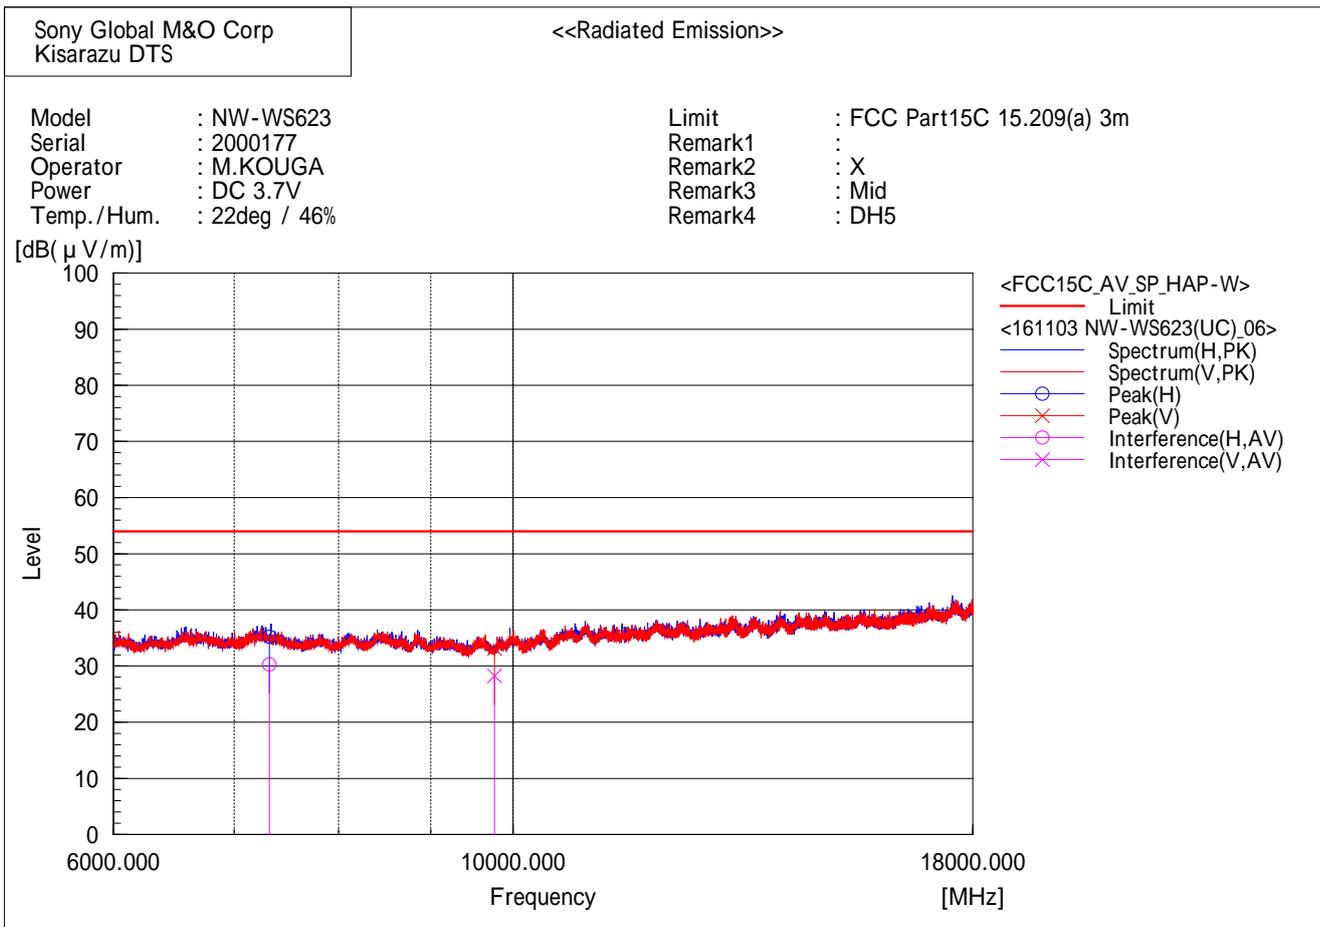

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	38.7	-8.4	30.3	54.0	23.7	391.1	345.4

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9764.000	34.4	-6.1	28.3	54.0	25.7	100.0	274.8

[BDR( DH5 )/2480MHz]

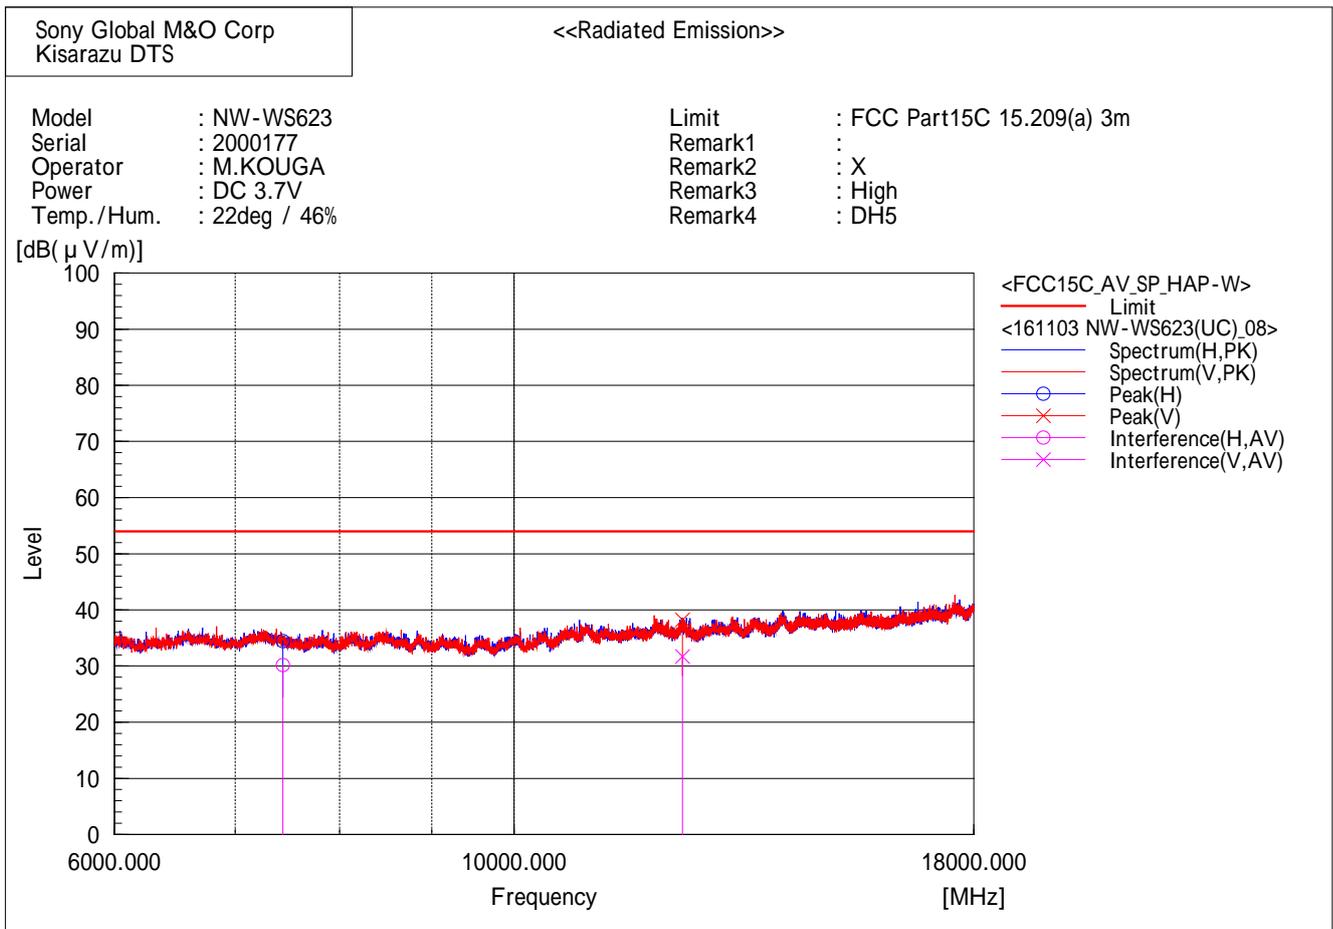

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.9	-8.7	30.2	54.0	23.8	386.2	141.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12400.000	37.7	-6.0	31.7	54.0	22.3	100.0	266.2

[BDR( DH5 )/2402MHz]

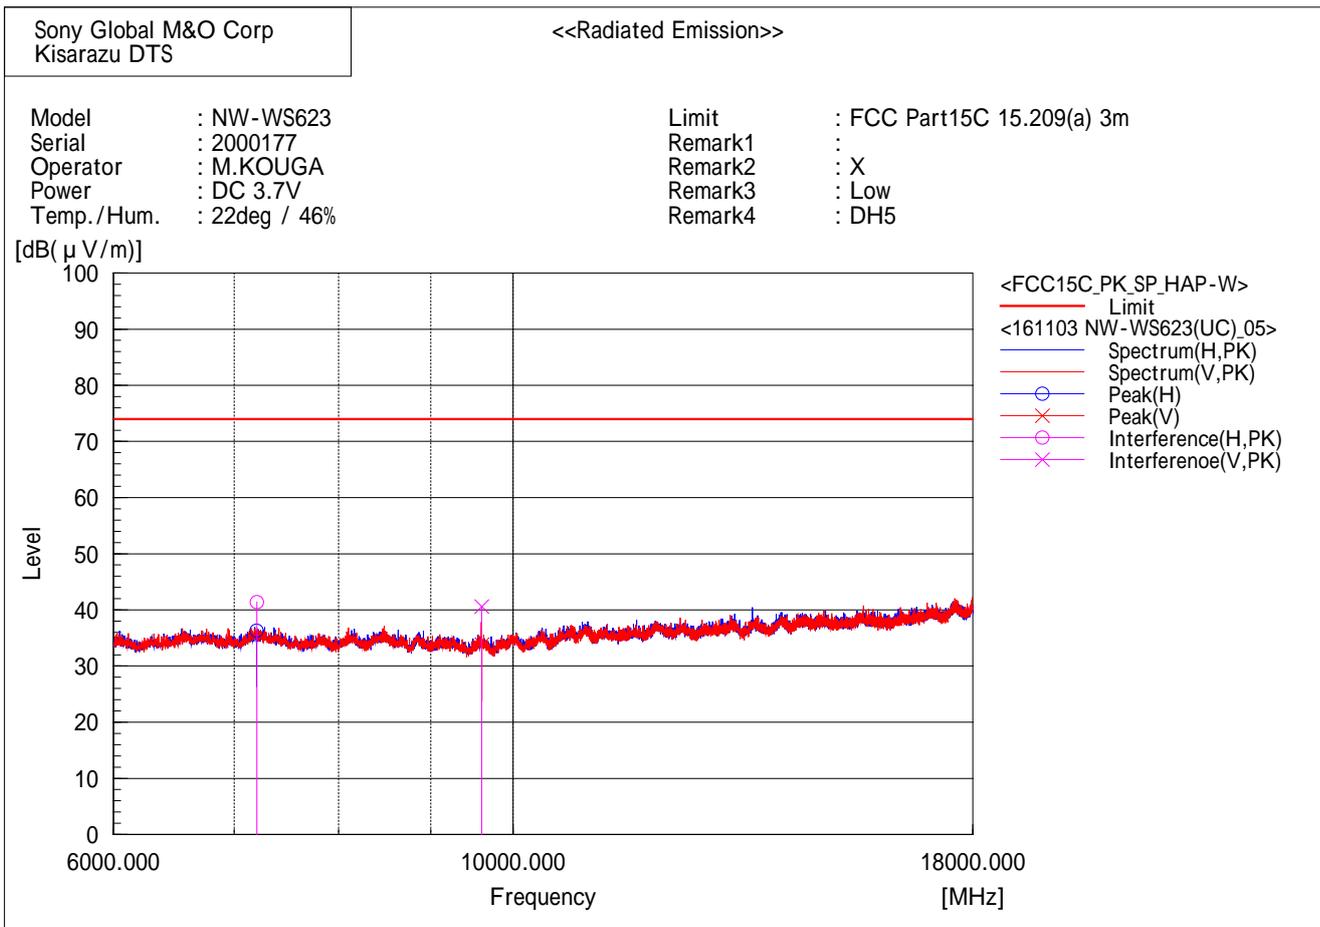

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	49.5	-8.1	41.4	74.0	32.6	394.1	98.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9608.000	47.0	-6.4	40.6	74.0	33.4	119.8	121.8

[BDR( DH5 )/2441MHz]

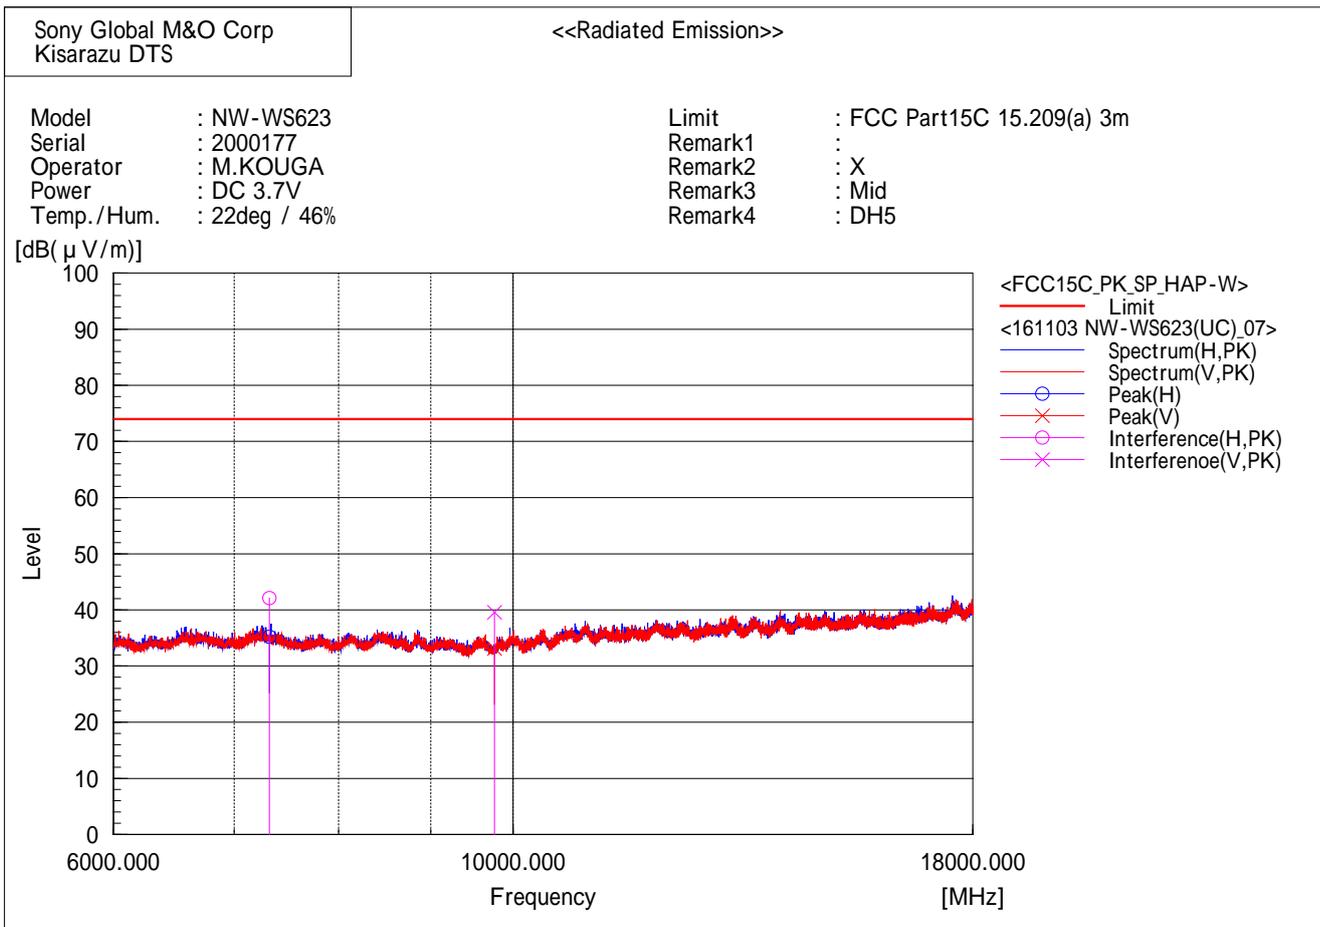

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	50.5	-8.4	42.1	74.0	31.9	393.3	345.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9764.000	45.7	-6.1	39.6	74.0	34.4	100.0	281.0

[BDR( DH5 )/2480MHz]

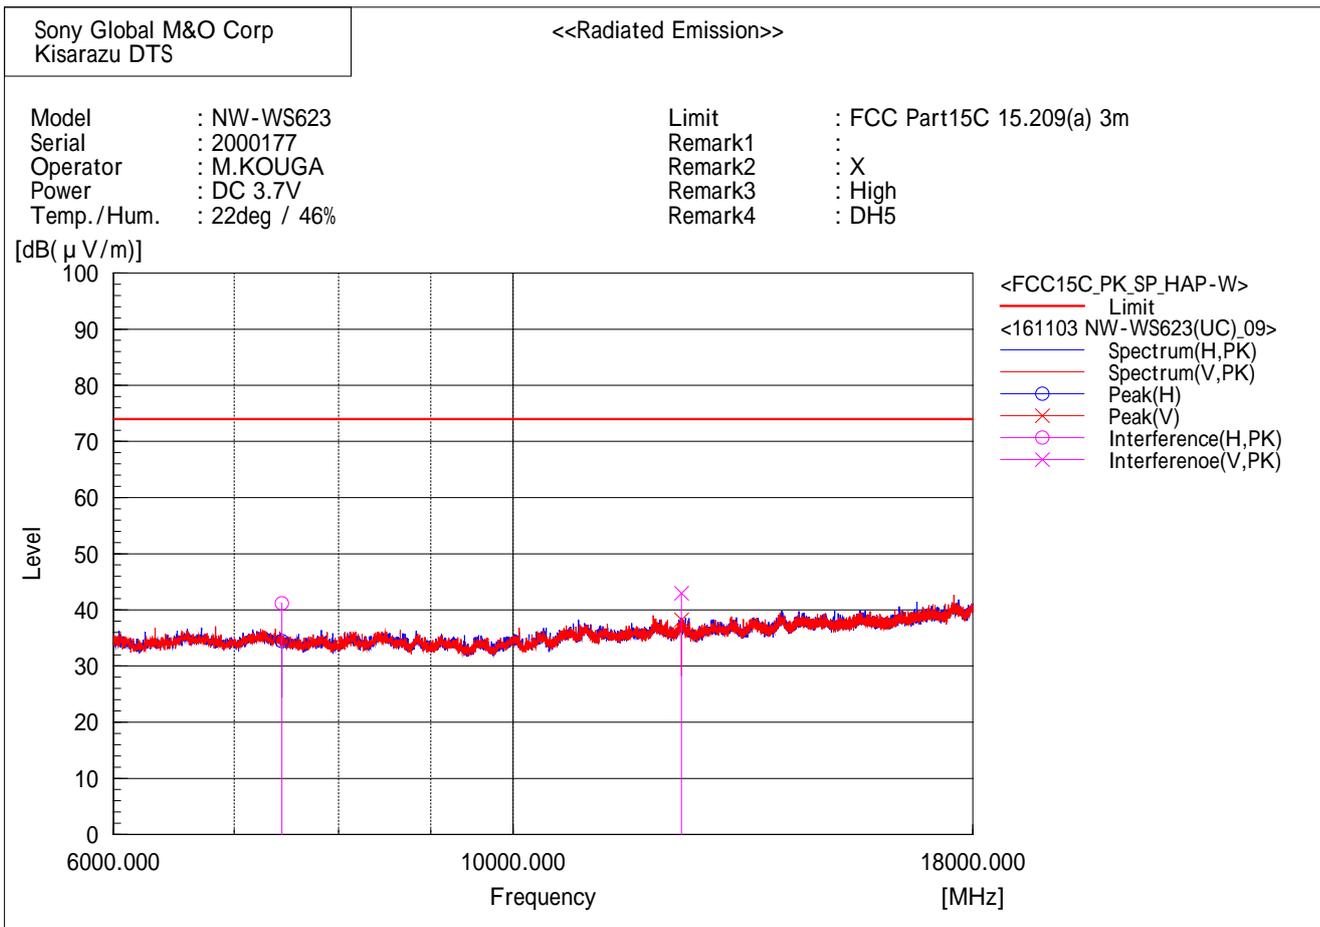

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	49.9	-8.7	41.2	74.0	32.8	385.3	130.5

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12400.000	49.0	-6.0	43.0	74.0	31.0	100.0	273.0

[EDR( 3DH5 )/2402MHz]

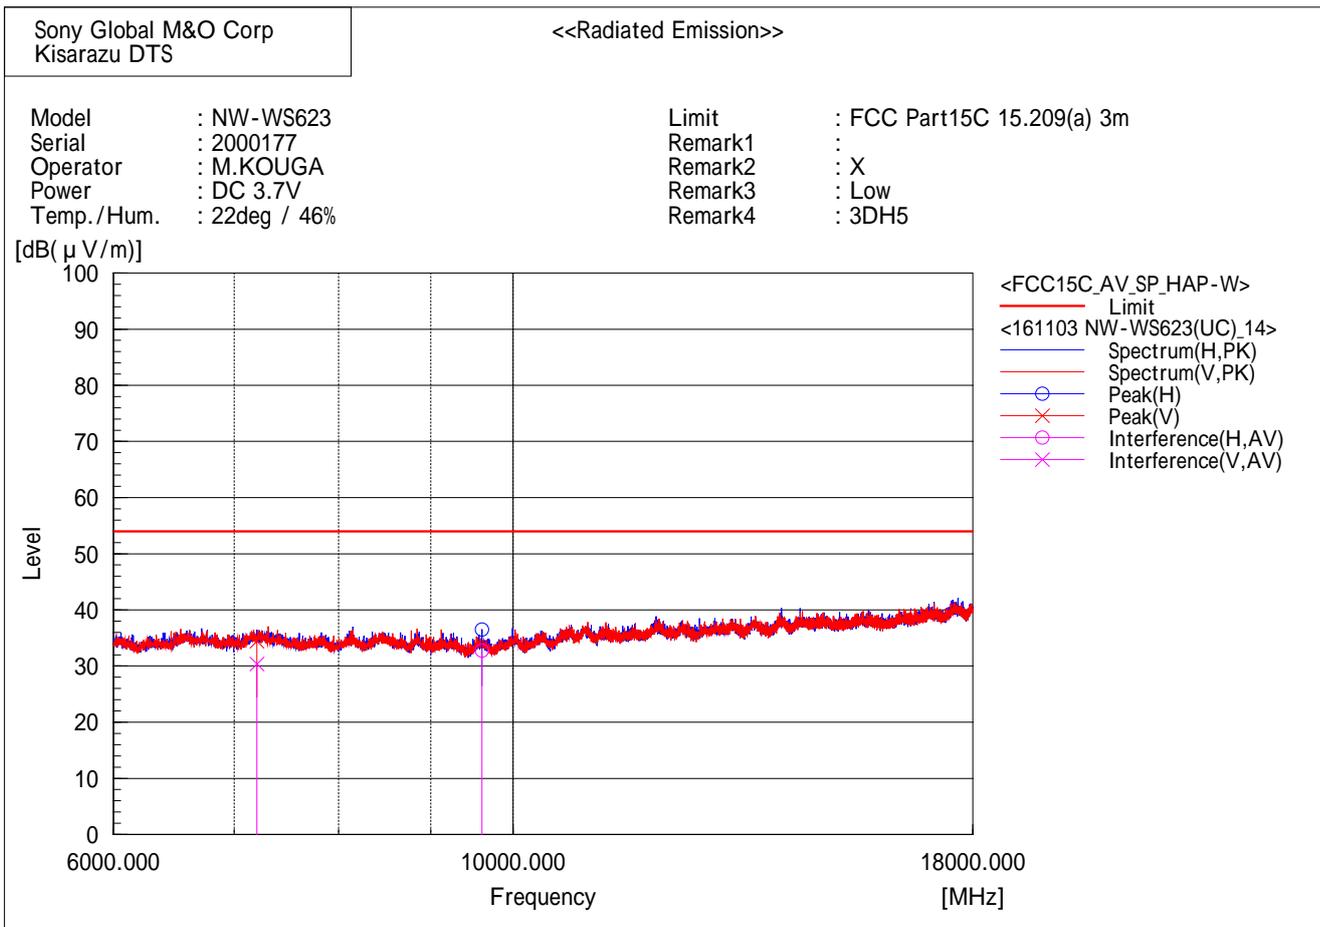

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9609.824	39.1	-6.4	32.7	54.0	21.3	293.2	257.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	38.5	-8.1	30.4	54.0	23.6	100.0	35.4

[EDR( 3DH5 )/2441MHz]

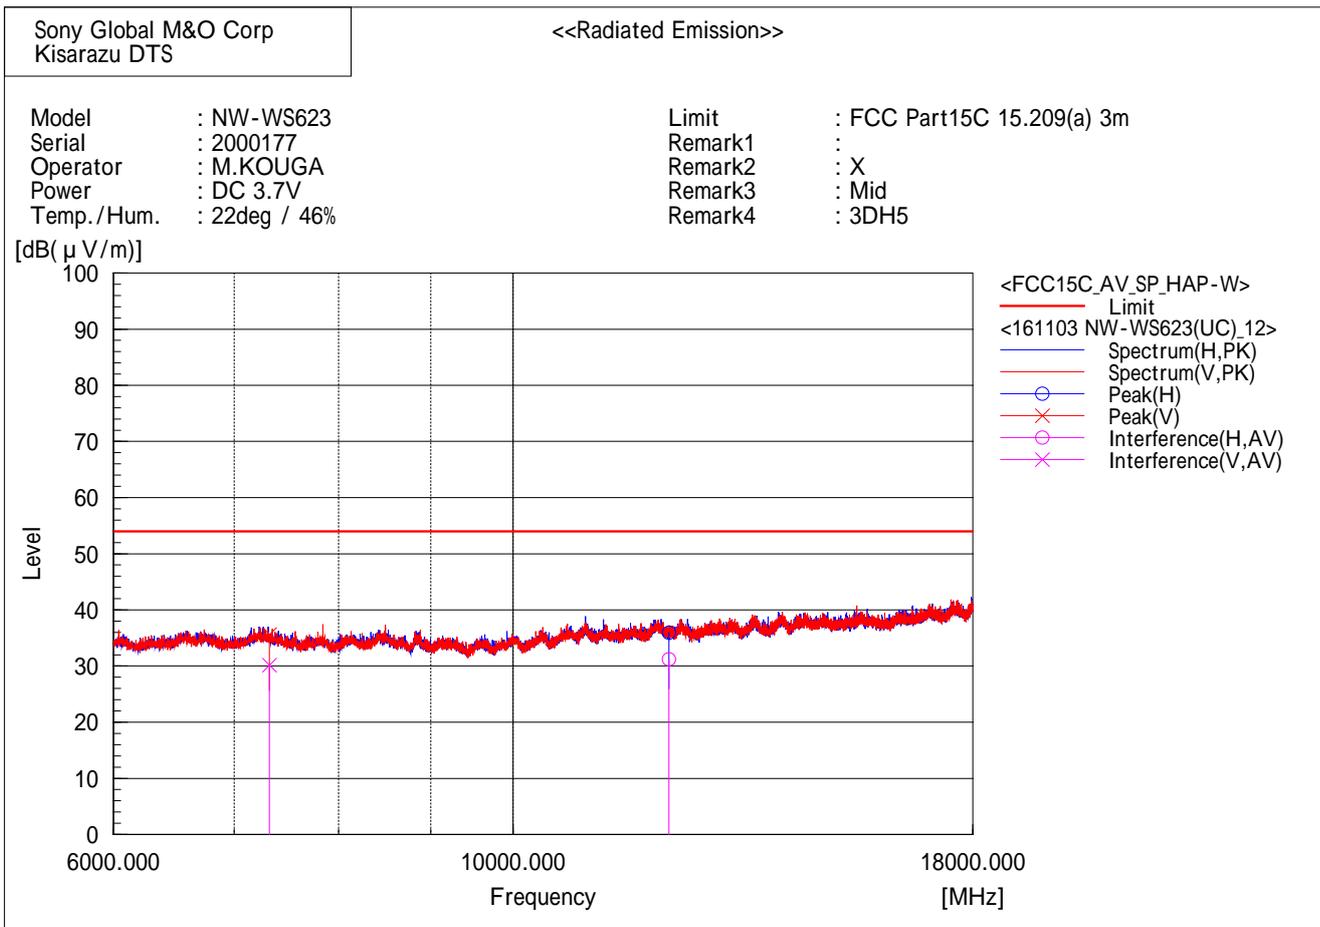

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12205.000	36.4	-5.2	31.2	54.0	22.8	349.4	234.9

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	38.6	-8.4	30.2	54.0	23.8	100.0	62.0

[EDR( 3DH5 )/2480MHz]

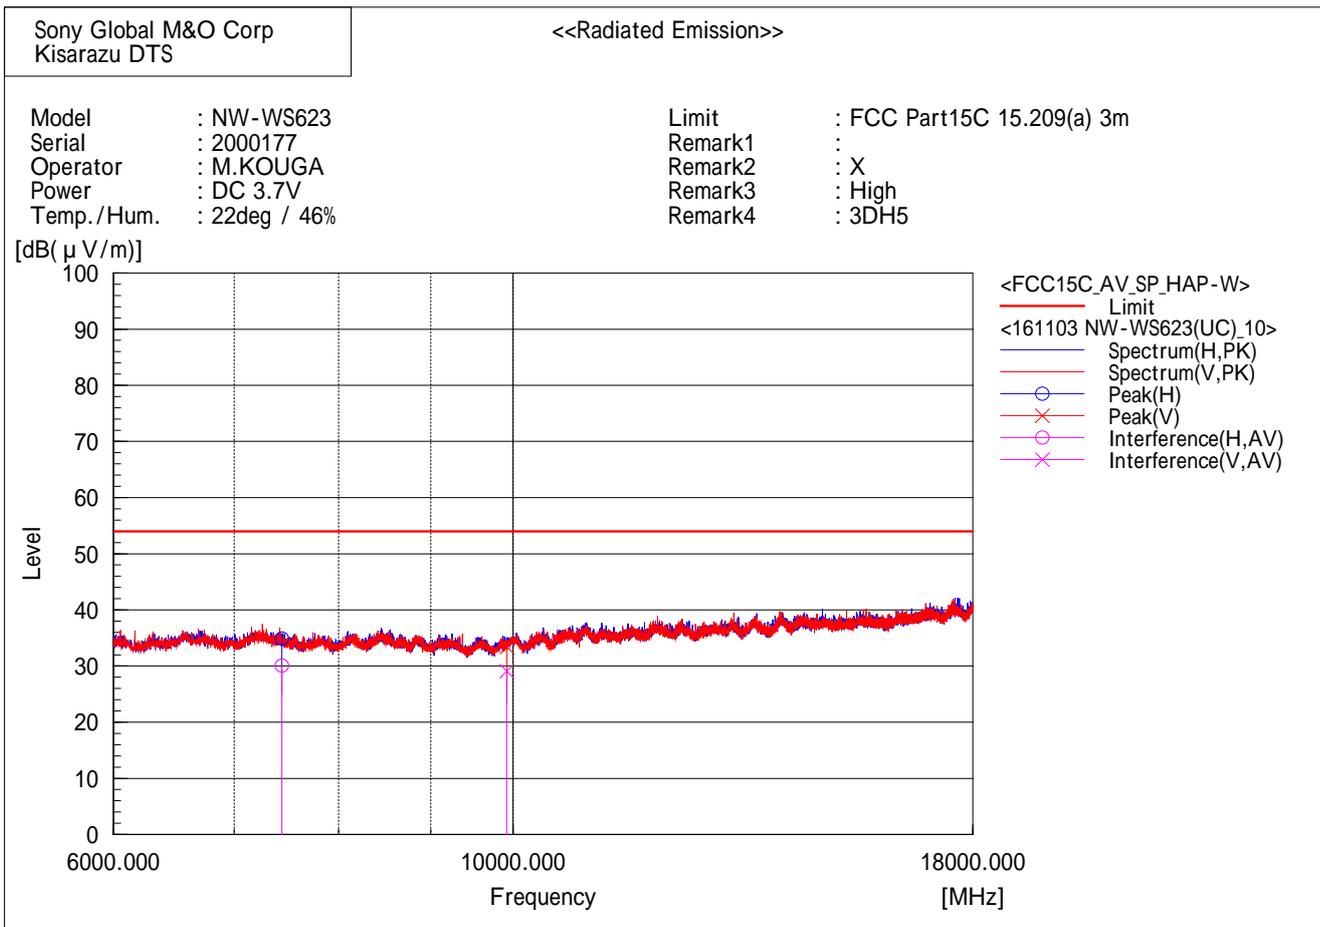

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.8	-8.7	30.1	54.0	23.9	257.3	319.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9920.000	34.7	-5.6	29.1	54.0	24.9	100.0	254.1

[EDR( 3DH5 )/2402MHz]

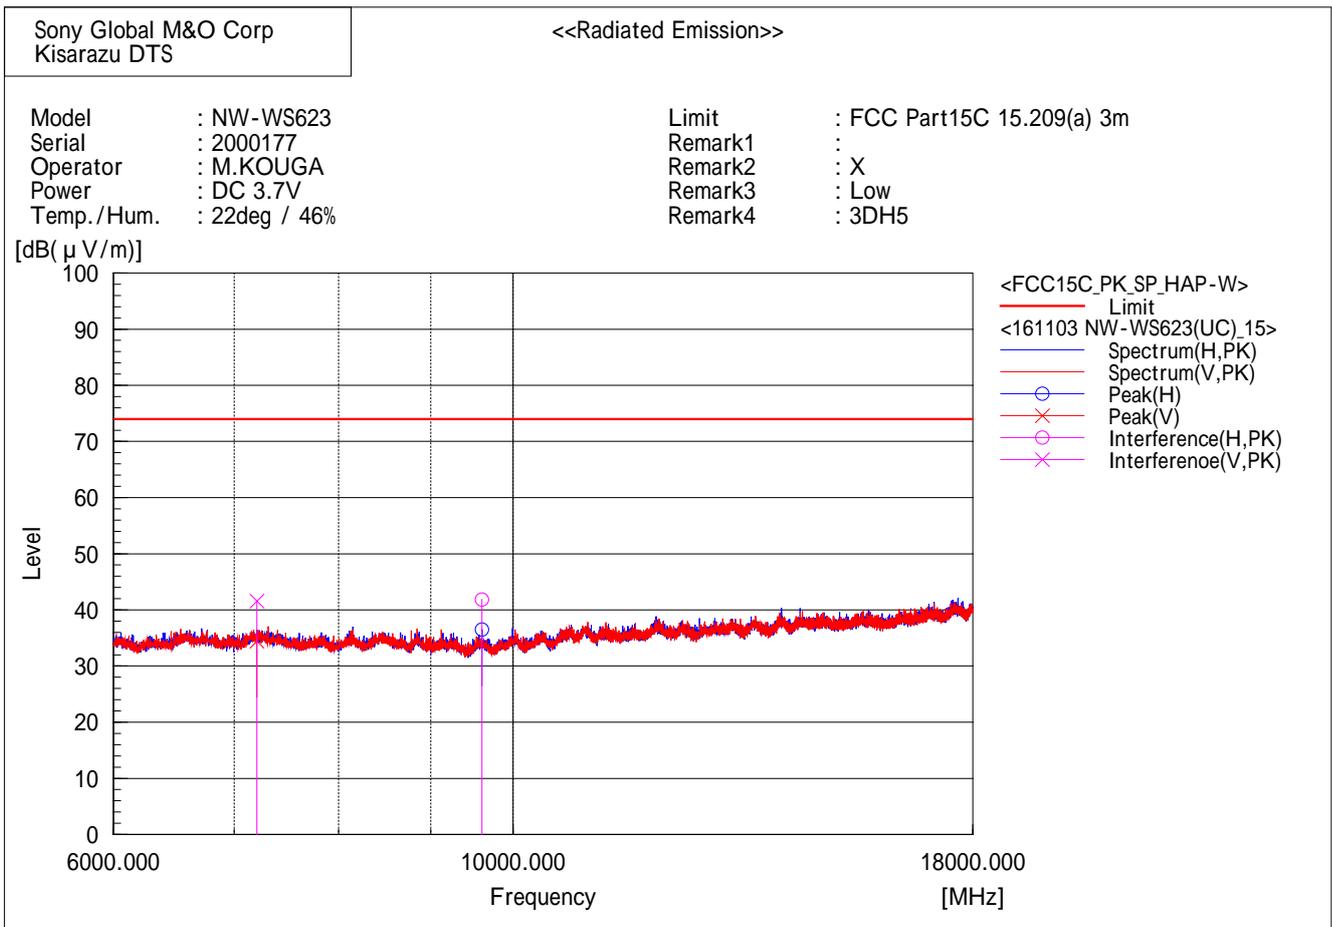

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	9610.107	48.2	-6.4	41.8	74.0	32.2	294.0	260.9

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	49.7	-8.1	41.6	74.0	32.4	100.0	35.8

[EDR( 3DH5 )/2441MHz]

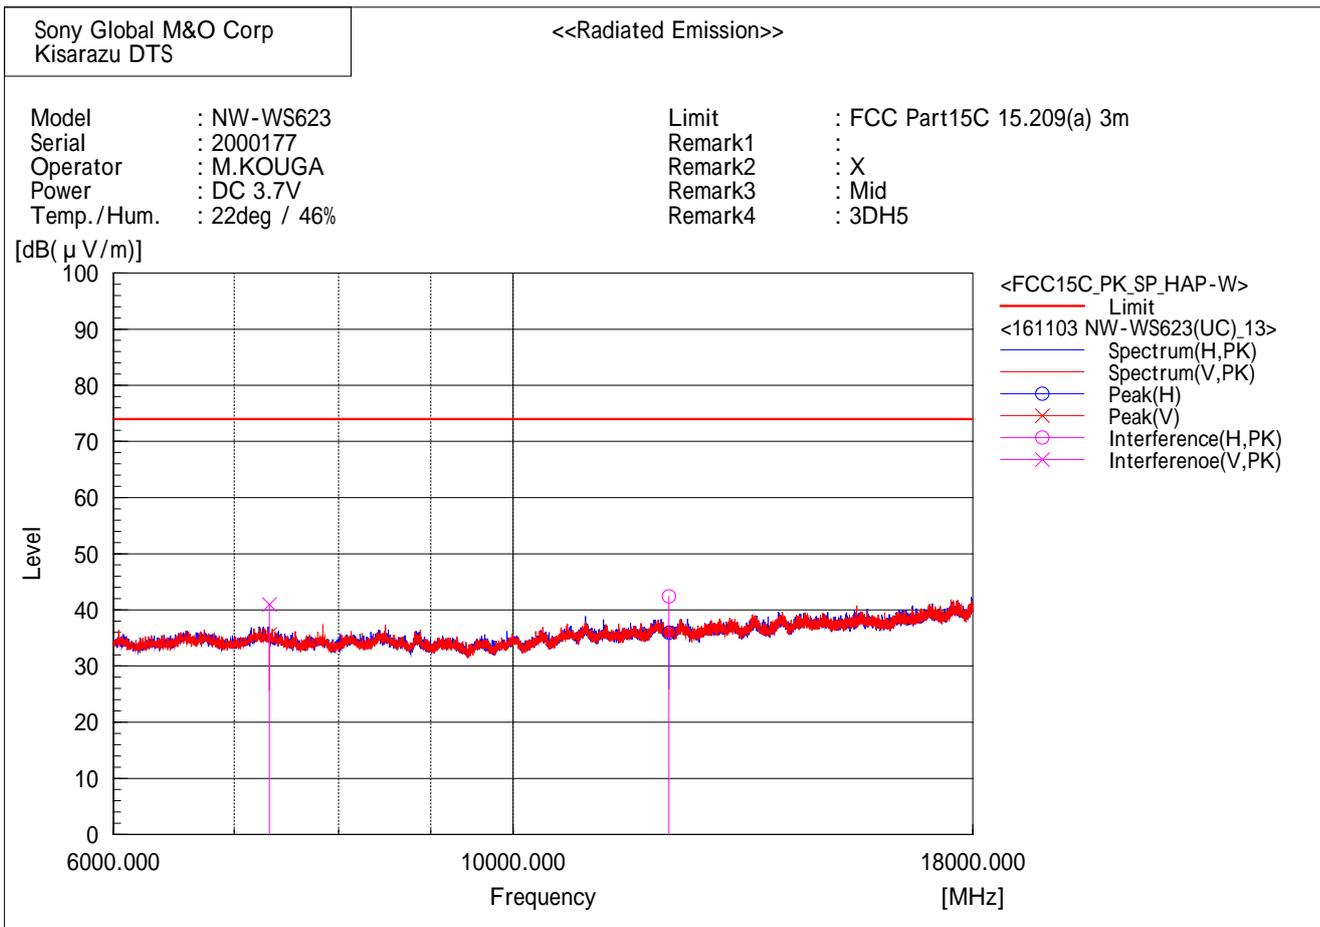

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12205.000	47.6	-5.2	42.4	74.0	31.6	365.4	233.5

--- Vertical Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	49.4	-8.4	41.0	74.0	33.0	100.0	65.0

[EDR( 3DH5 )/2480MHz]

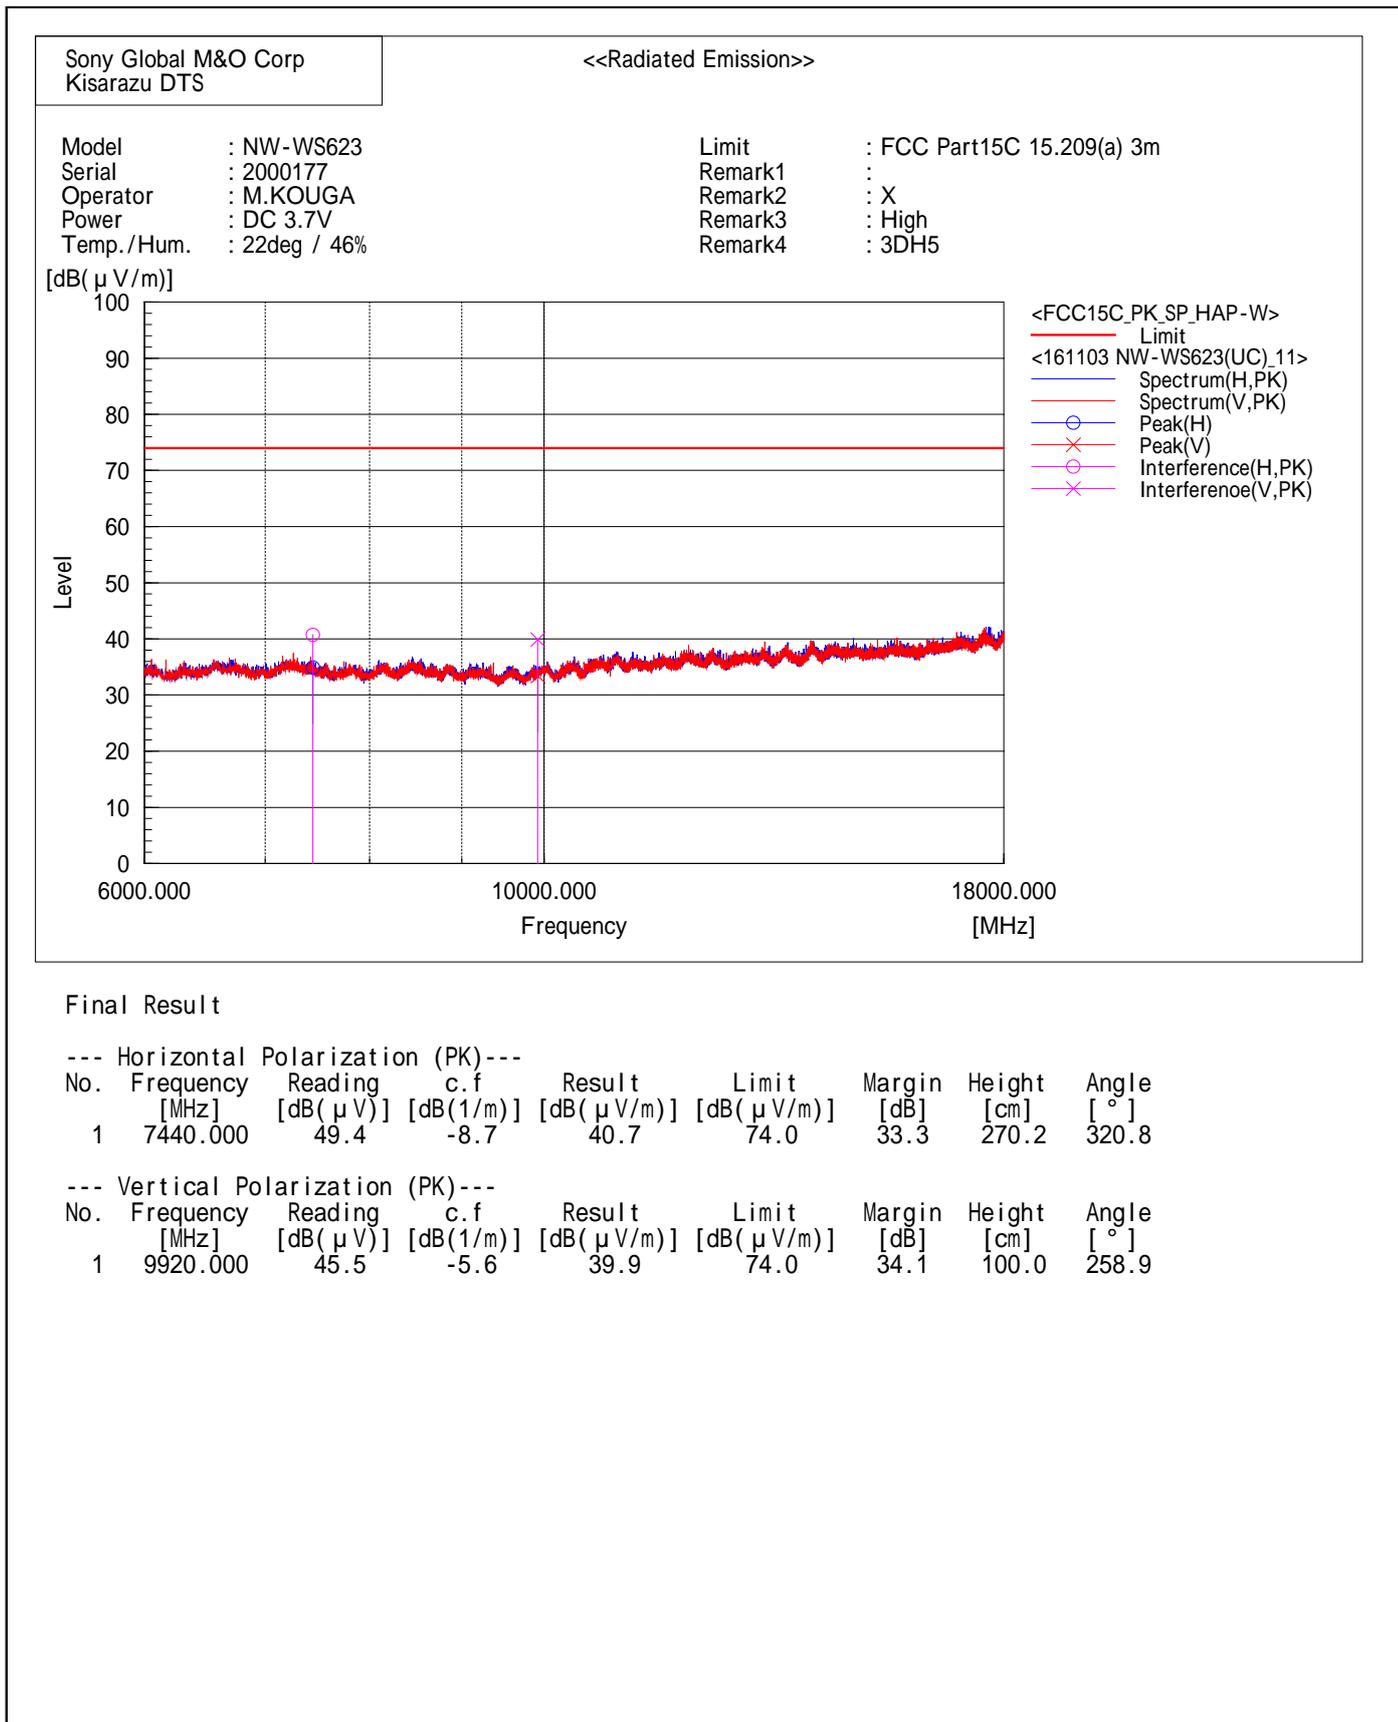

**18 GHz – 24.835 GHz**

[BDR( DH5 )/2402MHz]

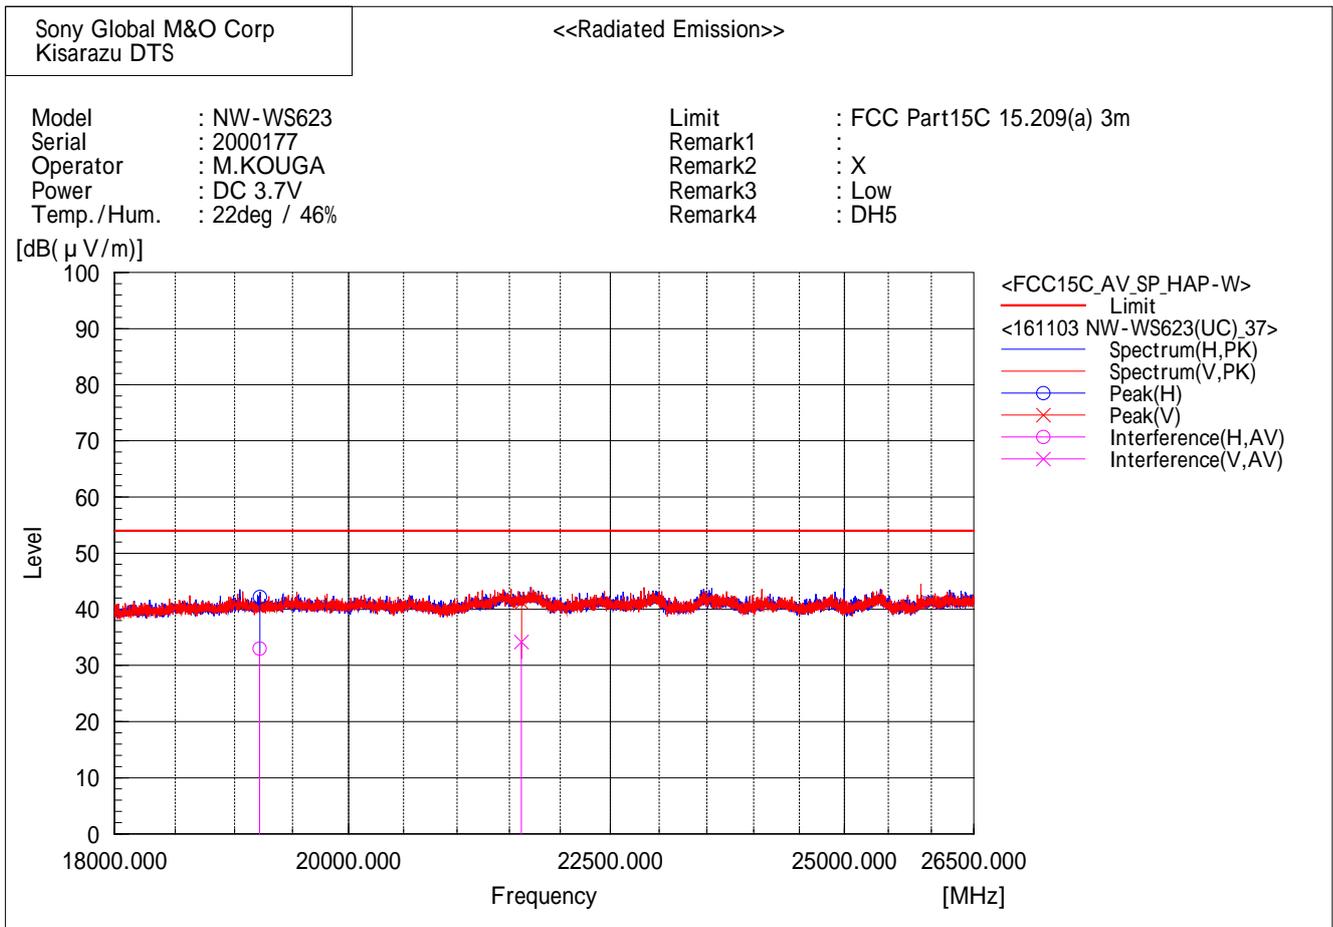

**Final Result**


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	33.4	-0.4	33.0	54.0	21.0	299.9	246.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	35.0	-0.8	34.2	54.0	19.8	100.0	98.1

[BDR( DH5 )/2441MHz]

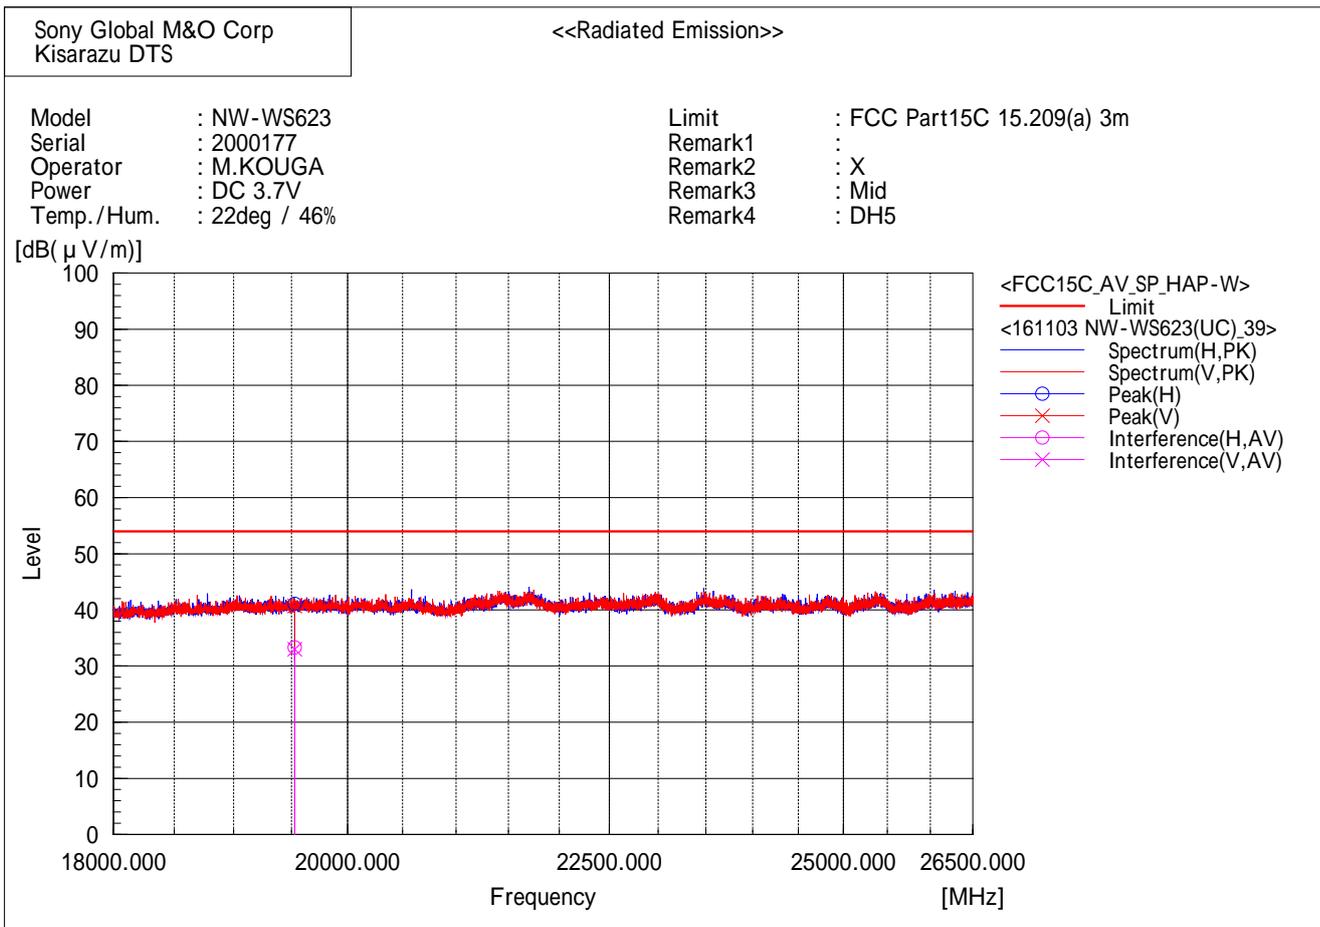

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	33.8	-0.5	33.3	54.0	20.7	254.0	262.5

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	33.5	-0.5	33.0	54.0	21.0	100.0	89.0

[BDR( DH5 )/2480MHz]

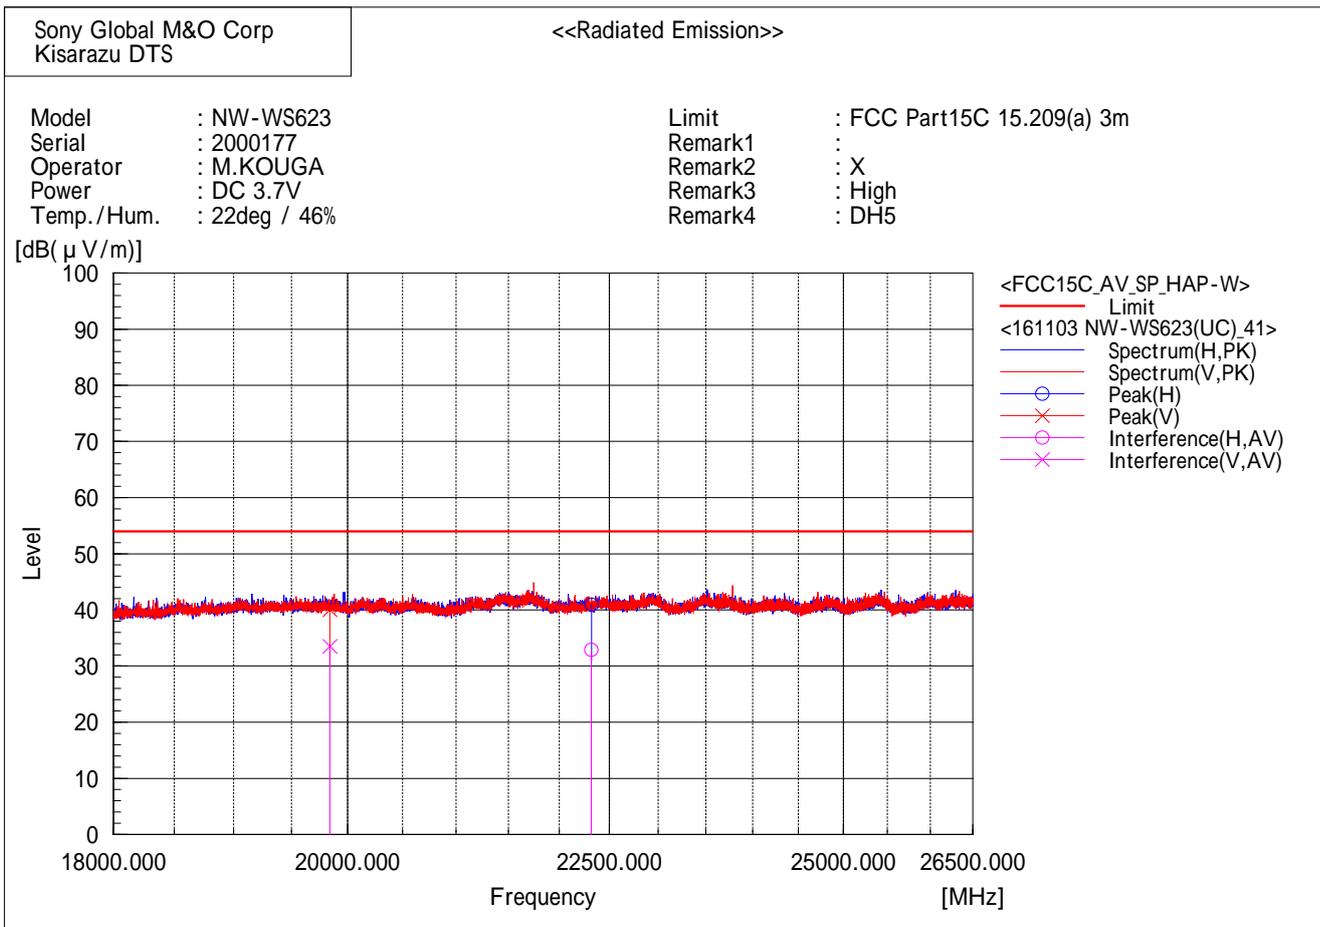

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	34.1	-1.2	32.9	54.0	21.1	216.4	222.6

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	34.0	-0.5	33.5	54.0	20.5	100.0	44.3

[BDR( DH5 )/2402MHz]

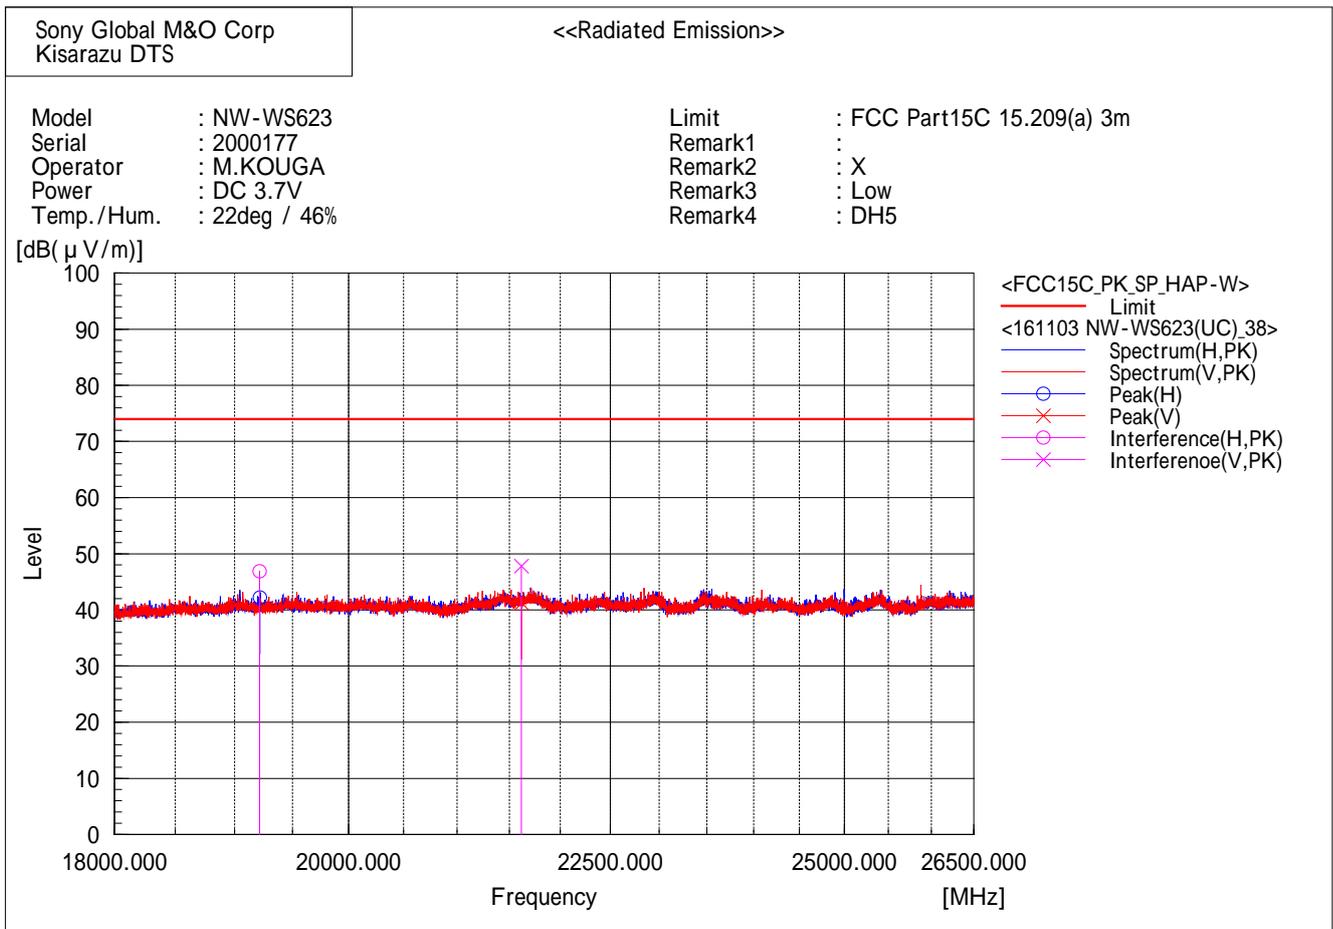

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	47.3	-0.4	46.9	74.0	27.1	286.7	270.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	48.6	-0.8	47.8	74.0	26.2	100.0	89.4

[BDR( DH5 )/2441MHz]

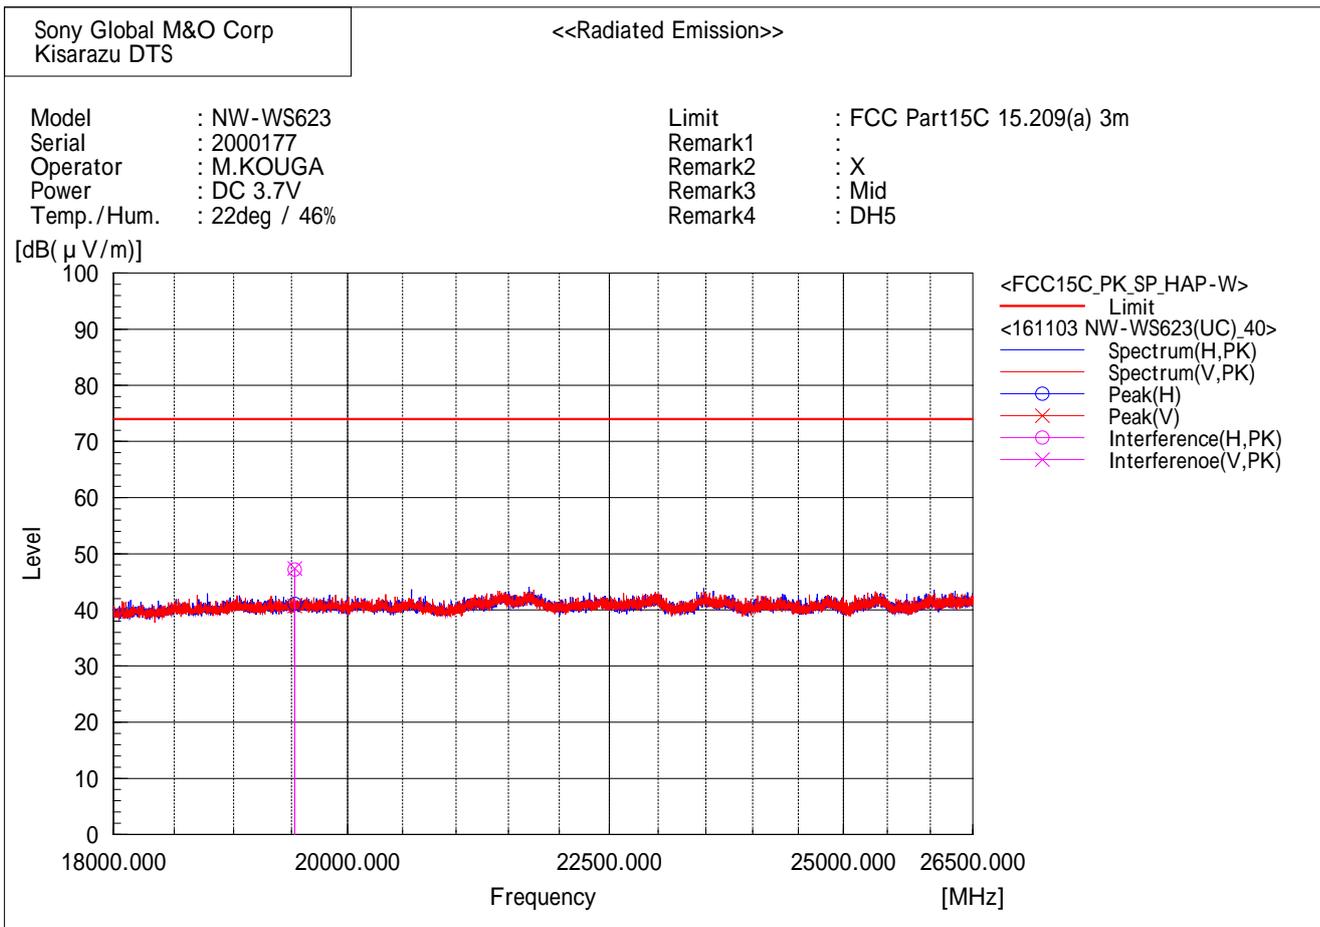

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	47.7	-0.5	47.2	74.0	26.8	266.8	246.9

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	47.9	-0.5	47.4	74.0	26.6	100.0	98.8

[BDR( DH5 )/2480MHz]

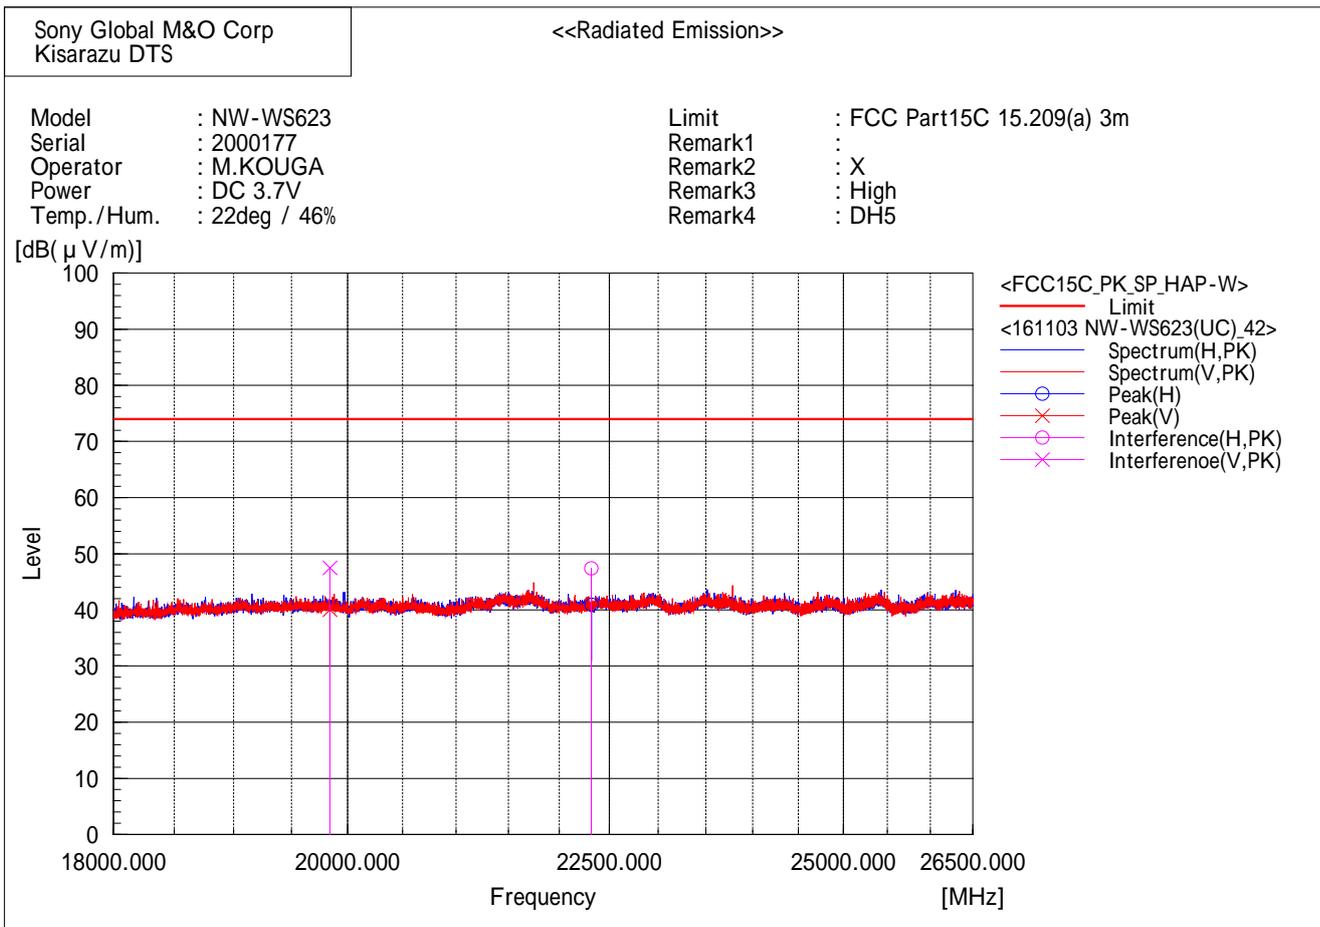

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	48.6	-1.2	47.4	74.0	26.6	238.3	249.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	48.0	-0.5	47.5	74.0	26.5	100.0	62.8

[EDR( 3DH5 )/2402MHz]

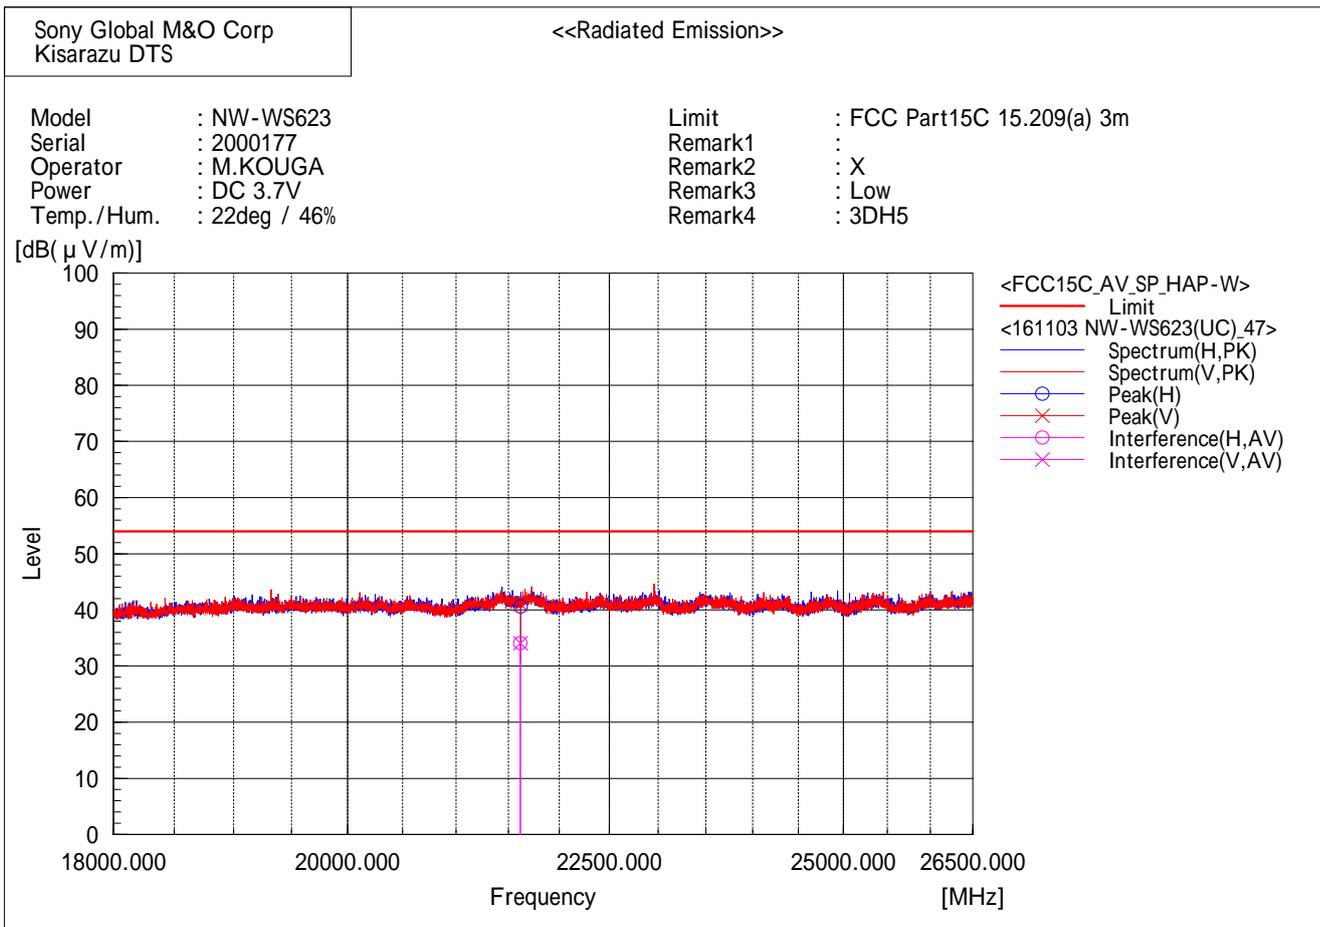

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	34.9	-0.8	34.1	54.0	19.9	390.4	212.4

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	34.9	-0.8	34.1	54.0	19.9	100.0	81.3

[EDR( 3DH5 )/2441MHz]

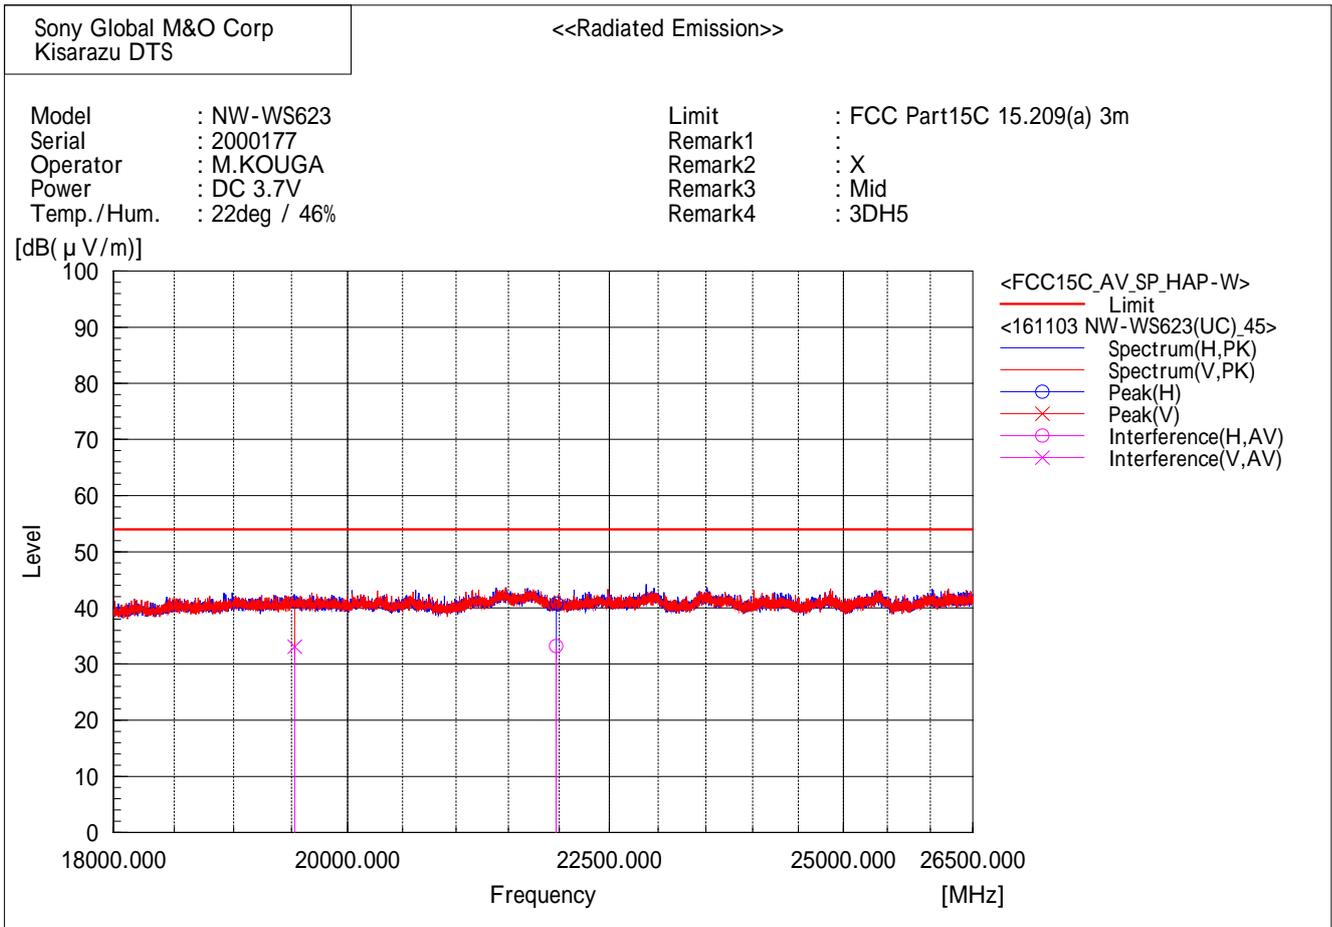

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21969.000	34.2	-1.0	33.2	54.0	20.8	259.9	243.2

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	33.6	-0.5	33.1	54.0	20.9	100.0	85.5

[EDR( 3DH5 )/2480MHz]

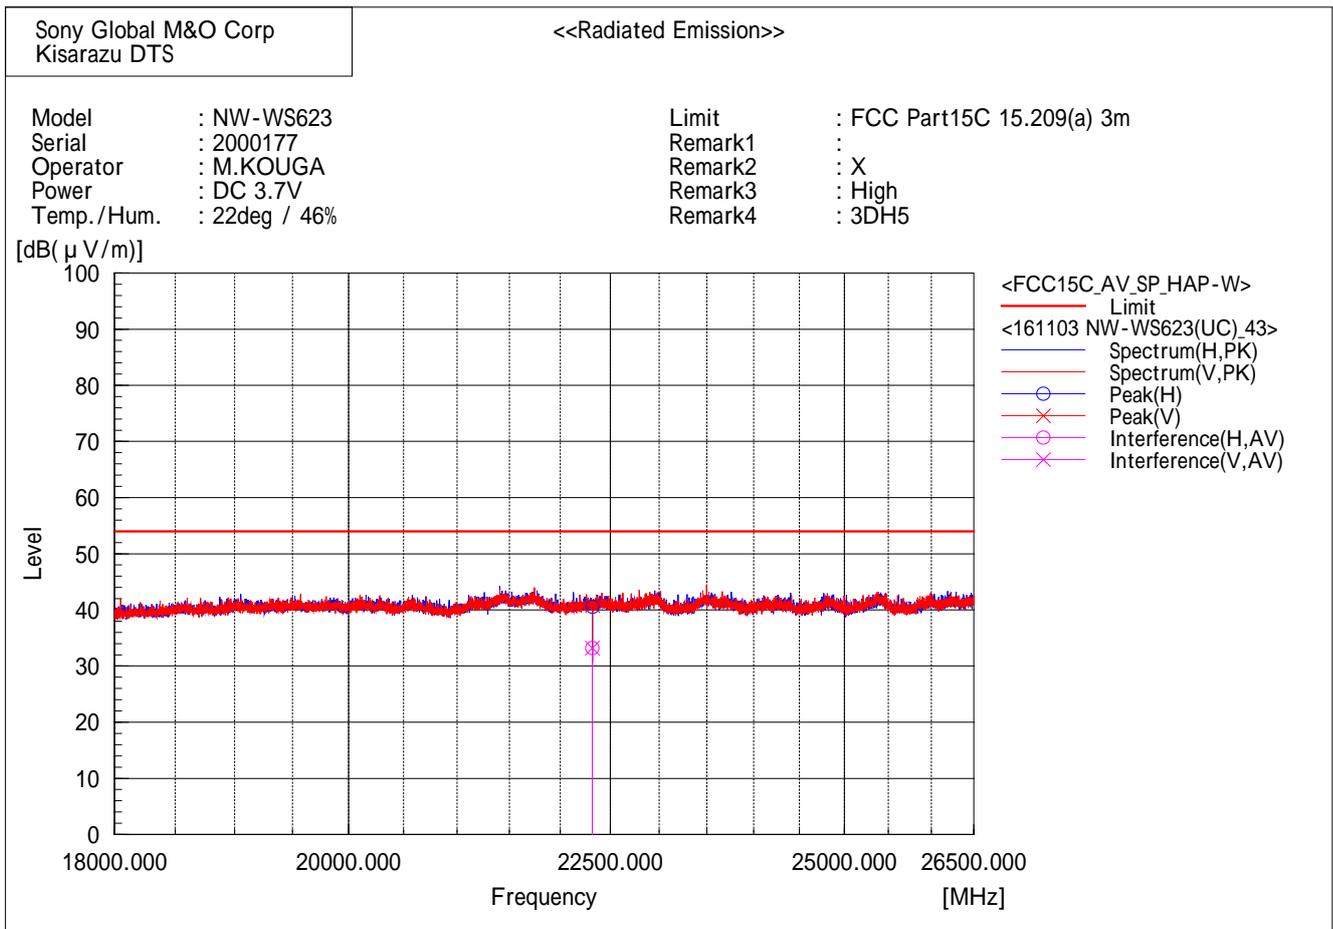

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	34.4	-1.2	33.2	54.0	20.8	310.2	69.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	34.4	-1.2	33.2	54.0	20.8	100.0	107.5

[EDR( 3DH5 )/2402MHz]

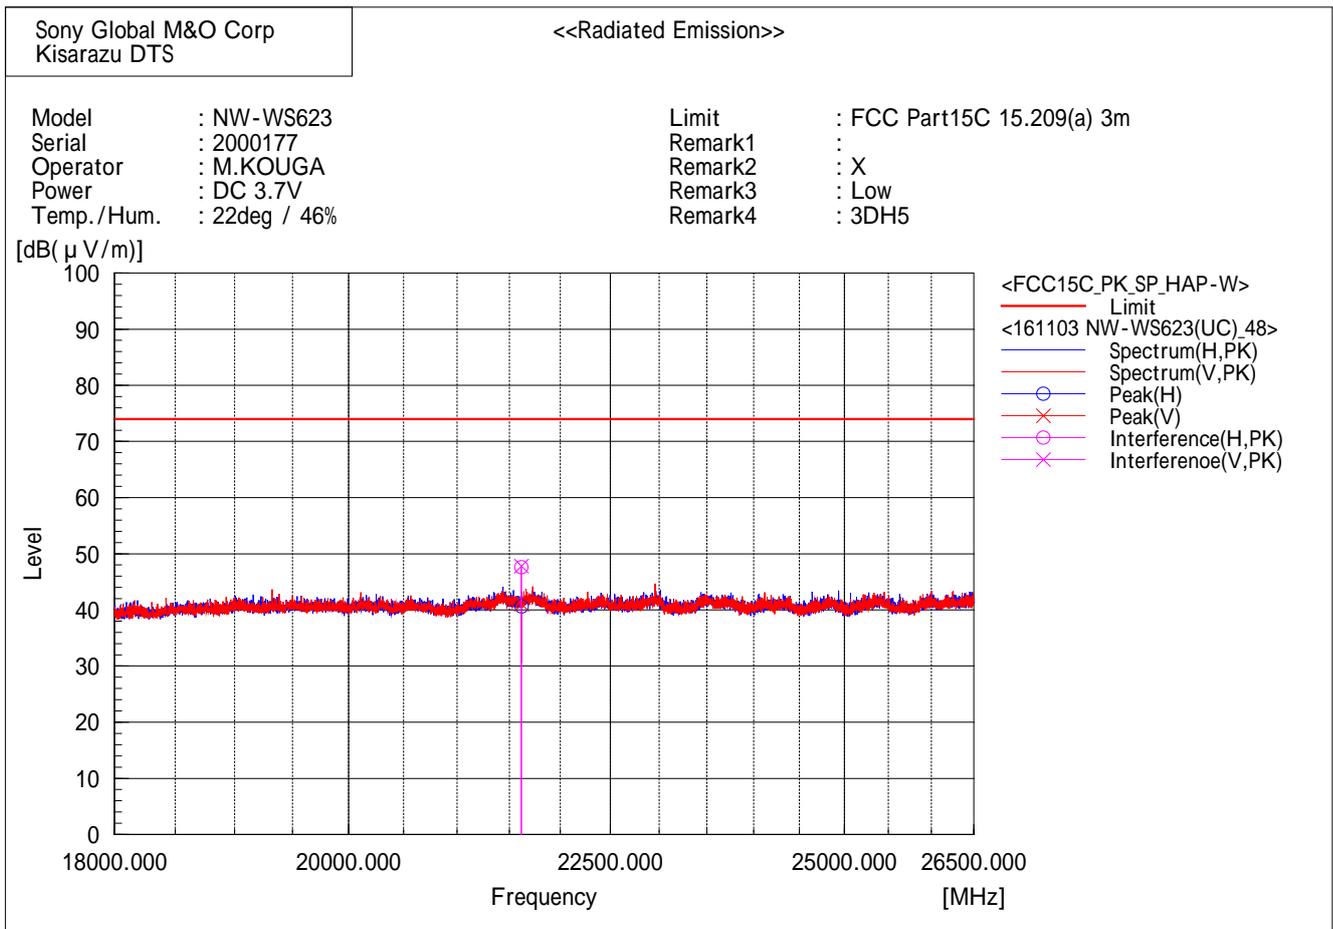

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	48.4	-0.8	47.6	74.0	26.4	390.4	212.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	48.6	-0.8	47.8	74.0	26.2	100.0	87.6

[EDR( 3DH5 )/2441MHz]

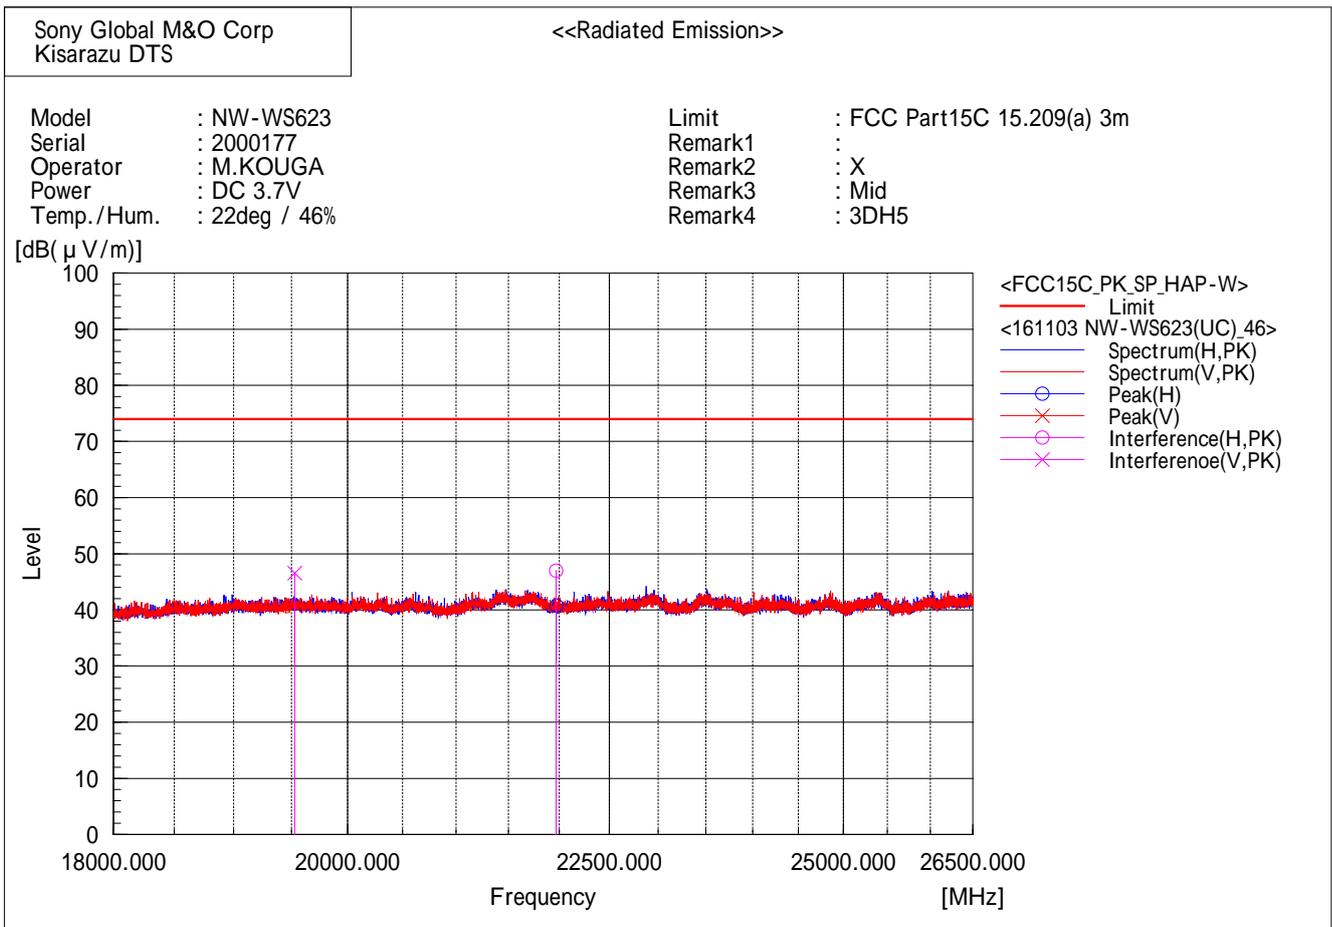

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21969.000	48.0	-1.0	47.0	74.0	27.0	260.0	257.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	47.1	-0.5	46.6	74.0	27.4	100.0	96.2

[EDR( 3DH5 )/2480MHz]

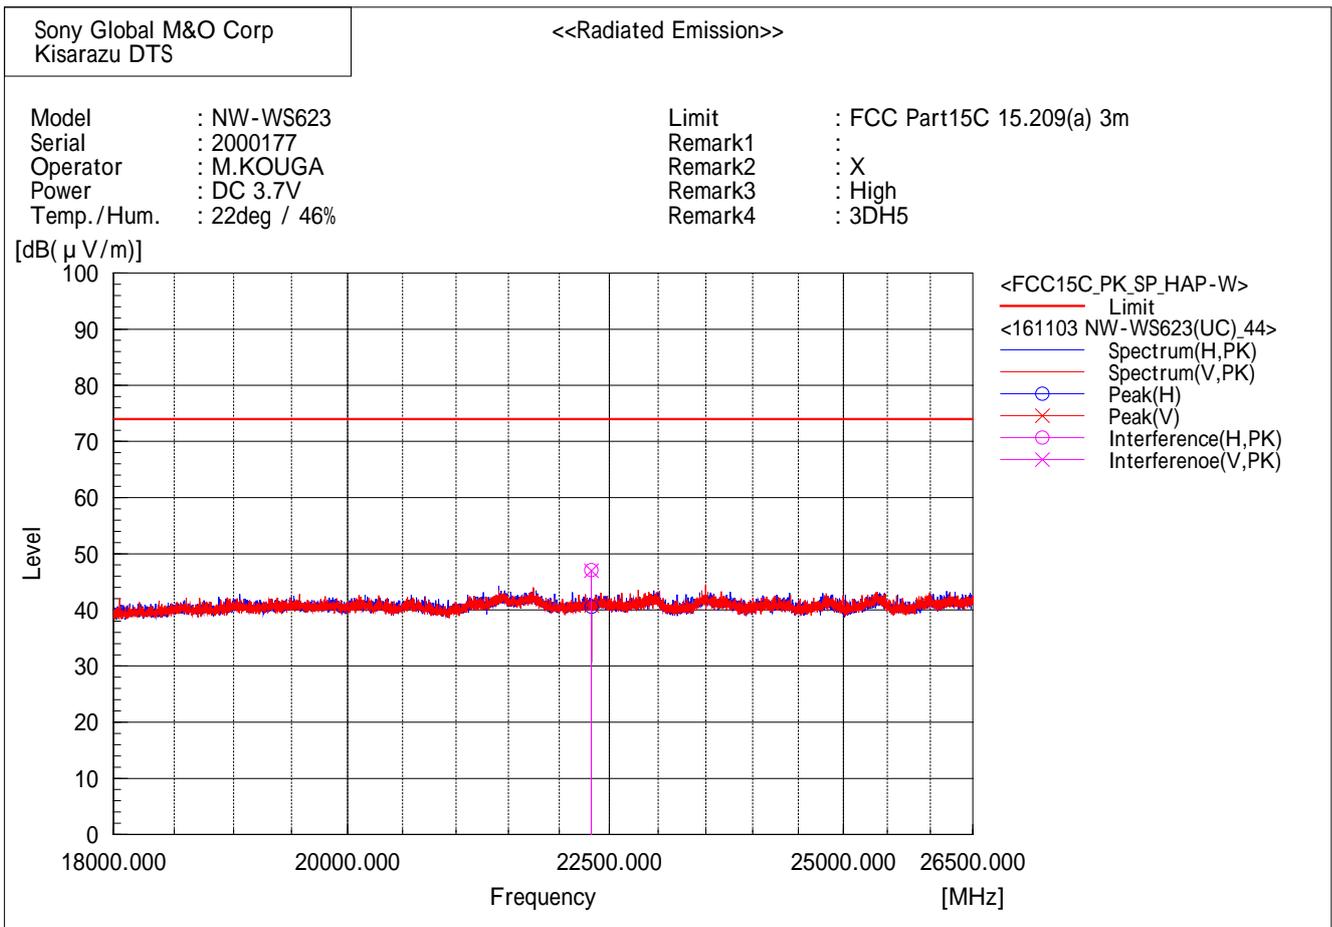

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	48.3	-1.2	47.1	74.0	26.9	289.0	77.9

--- Vertical Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	48.2	-1.2	47.0	74.0	27.0	100.0	88.9

### 2.4GHz Restricted-Band Edge (Plot data)

These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390MHz and above 2483.5MHz)  
The result of the final radiated emissions measurement refers in previous pages.


#### [BDR / 2402MHz]

Horizontal

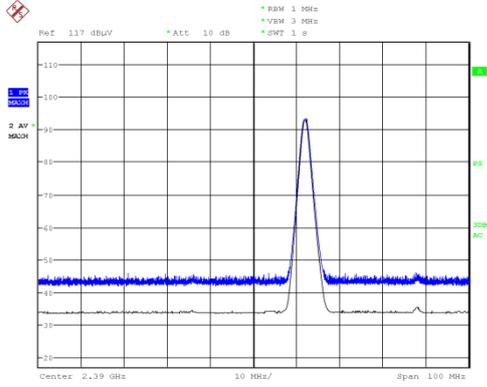

Date: 2.NOV.2016 22:50:19


Vertical

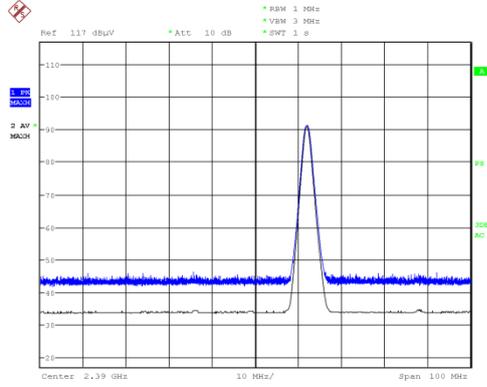

Date: 2.NOV.2016 22:48:40


#### [BDR / 2480MHz]

Horizontal

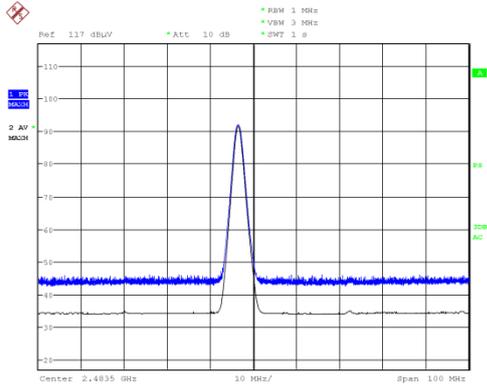


Date: 2.NOV.2016 20:19:40

Vertical

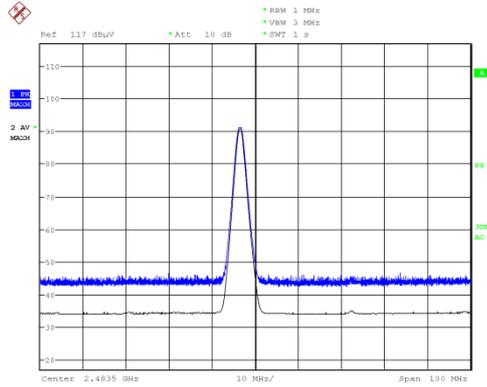


Date: 2.NOV.2016 20:13:47

[EDR / 2402MHz]  
Horizontal

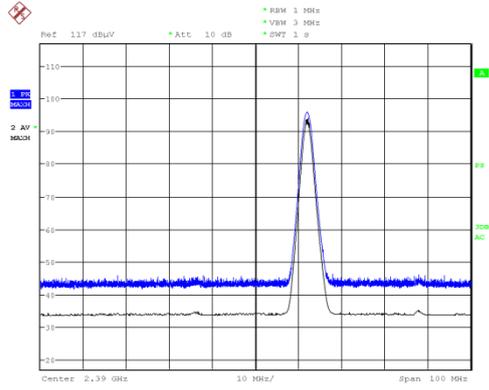


Date: 2.NOV.2016 22:28:52

Vertical

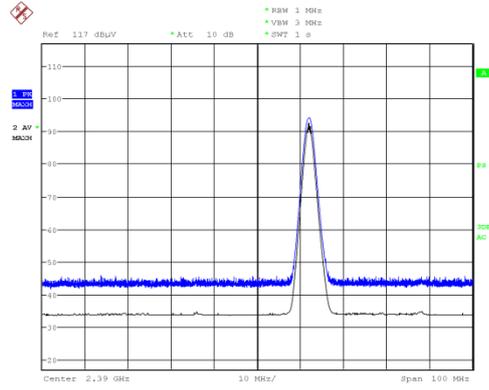


Date: 2.NOV.2016 22:24:03

[EDR / 2480MHz]  
Horizontal

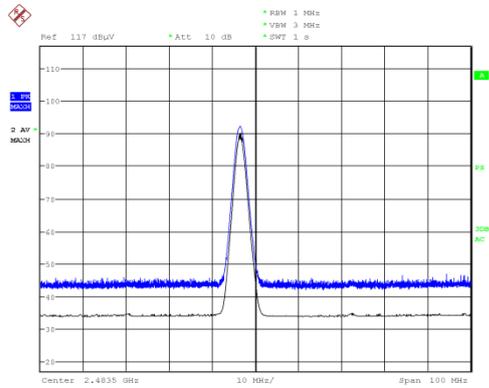

Date: 2.NOV.2016 20:53:54

Vertical


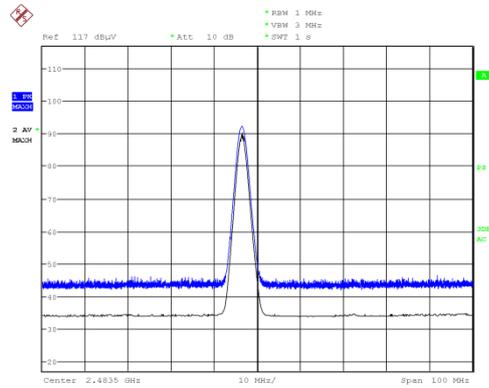


Date: 2.NOV.2016 20:58:44

### 3.7. Conducted Spurious Emissions for Band Edge

- 1) Ambient temperature : 22.4 deg.C
- 2) Relative humidity : 69.3 %
- 3) Date of measurement : 19 October 2016
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Frequency [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Limit [dBm]	Margin [dB]
BDR	DH5	2402	2400.00	-50.13	0.55	-49.58	-18.4	31.14
			2402.16	1.00	0.55	1.55	-	-
EDR	3DH5	2402	2399.98	-49.15	0.55	-48.60	-17.7	30.91
			2402.16	1.77	0.55	2.32	-	-

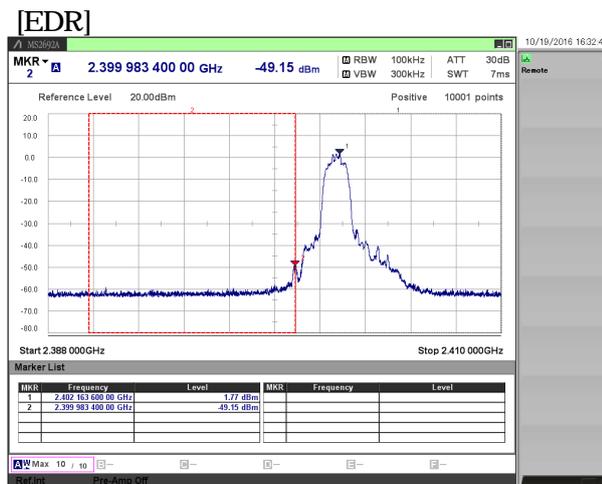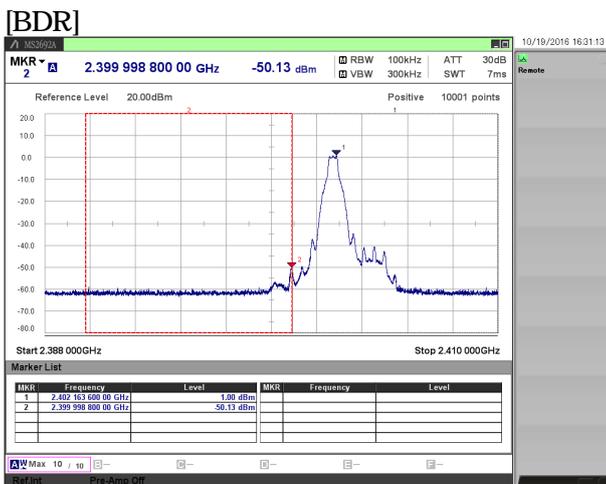

## 4. Method of Calculation

### 4.1. Time of Occupancy (Dwell Time) Measurement

Method of calculation : Software  
 The Software for Calculation Name : SW-308  
 Version : Ver.2.6

Test Result [ msec ] = Dwell Time [ msec ] \* Cycle [ time ] \* 31.6 [ sec ] / Sweep Time [ sec ]

Notes :

- (a) Dwell Time : Transmission duration of 1 hopping.
- (b) Cycle : Number of hopping appearances on the spectrum analyzer.  
(The average of 5 measurements if it is random hopping equipment)
- (c) 31.6 : 0.4 [sec] \* Number of Hopping Frequencies(79)
- (d) Sweep Time : Sweep time settings on the spectrum analyzer.

### 4.2. Maximum Peak Conducted Output Power Measurement

Method of calculation : Software  
 The Software for Calculation Name : SW-308  
 Version : Ver.2.6

Test Result [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ]  
 Duty Cycle [ % ] = Tx ON Time / (Tx ON Time + Tx OFF Time) \* 100

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.
- (b) C.F. : System Cable Loss + EUT Cable Loss

#### 4.3. Radiated Spurious Emission Measurement

Method of calculation : Software  
The Software for Calculation Name : V-Scan  
Version : Ver.4.0.30

Test Result [ dBuV/m ] = Meter Reading [ dBuV ] + C.F. [ dB/m ]

Notes :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer.
- (b) C.F. :  Antenna Factor (including Balun Loss) + System GainLoss  
:  Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

#### 4.4. Conducted Spurious Emission for Band Edge Measurement

Method of calculation : Software  
The Software for Calculation Name : SW-308  
Version : Ver.2.6

Test Result [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ]

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.
- (b) C.F. : System Cable Loss + EUT Cable Loss

## 5. List of Test Equipment

All test results are traceable to the national and/or international standards.

### 5.1. Antenna-port Conducted Measurements

#### 4th Site Shielded Room 1

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	-	Shield Room	B83117-B2432-T161	P26428	Albatross Project	-	-
x	W100	Spectrum Analyzer	MS2692A	6201338954	Anritsu	12	16.04.15
x	W006	Power Meter	N1911A	MY50000295	Keysight Technologies	12	16.10.03
x	W007	Power Sensor	N1922A	MY50180022	Keysight Technologies	12	16.10.03
-	W029	10dB Attenuator	8493C	76549	Keysight Technologies	12	16.08.01
x	WC05	RF Cable	SUCOFLEX 102	34287	HUBER + SUHNER	12	16.11.04
x	M720	Thermometer	TH-321	140044	AS ONE	12	16.06.02

### 5.2. Radiated Spurious Emissions

#### 4th Site 10m Semi-Anechoic Chamber

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	M506	EMC Chamber	None	-	TDK	12	16.06.04
x	M575	EMI Receiver	ESCI	100161	Rohde&Schwarz	12	15.11.09
x	M669	EMI Receiver	N9038A	MY51210223	Keysight Technologies	12	16.06.08
x	A073	Loop Antenna	HFH2-Z2	100171	Rohde&Schwarz	12	16.10.04
x	A043	Biconical Antenna	BBA9106	V5(91032598)	Schwarzbeck	12	16.06.01
x	A046	Log periodic Antenna	UHALP9108A1	0830	Schwarzbeck	12	16.06.01
x	A056	Horn Antenna	BBHA9120D	670	Schwarzbeck	12	16.08.29
x	A057	Horn Antenna	HAP06-18W	00000037	TOYO Corporation	12	16.06.02
x	A058	Horn Antenna	HAP18-26W	00000016	TOYO Corporation	12	16.01.26
-	CS037	Fourth Site RE Cable SYS1	-	-	EMC/RF Test Lab.	12	16.06.02
x	CS039	Fourth Site RE Cable SYS3	-	-	EMC/RF Test Lab.	12	16.06.04
x	CS054	Fourth Site EMF Cable SYS	-	-	EMC/RF Test Lab.	12	16.06.02
x	CS064/065	Fourth Site RE Cable SYS8	-	-	EMC/RF Test Lab.	12	16.06.04
x	M510	RF Selector	NS4900	0802-226	TOYO Corporation	12	16.06.04
x	M620	RF Pre-Amp	8447D	2944A10720	Keysight Technologies	12	16.06.04
x	M706	3dB Attenuator	8491A	MY39267782	Keysight Technologies	12	16.06.04
x	M831	GHz Filter Box	FB-G1	002	Sony GM&O	12	16.06.04
x	M798	Thermometer	AD-5640B	201501	AND	12	16.05.26

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.