



## SAR EVALUATION REPORT

**Report No. : 25BE0349-HO-1**

**Applicant** : Sony Corporation  
**Type of Equipment** : Notebook Personal Computer  
**Model No.** : PCG-1H1L  
**FCC ID** : AK8PCG1H1L  
**Test standard** : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C  
**Test Result** : Complied  
**Max SAR Measured** : 0.994W/kg( Body, 2437MHz )

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

**Date of test** : June 28 and 29, 2004

**Tested by** :   
Miyo Ikuta  
Head Office EMC Lab.

**Approved by** :   
Tetsuo Maeno  
Site Manager of Head Office EMC Lab.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**CONTENTS**

	<b>PAGE</b>
<b>SECTION 1 : Client information .....</b>	<b>3</b>
<b>SECTION 2 : Equipment under test (E.U.T.) .....</b>	<b>4</b>
<b>SECTION 3 : Requirements for compliance testing defined by the FCC .....</b>	<b>5</b>
<b>SECTION 4 : Dosimetry assessment setup .....</b>	<b>5</b>
<b>SECTION 5 : Test system specifications .....</b>	<b>9</b>
<b>SECTION 6 : Test setup of EUT .....</b>	<b>10</b>
<b>SECTION 7 : Measurement uncertainty .....</b>	<b>14</b>
<b>SECTION 8 : Simulated tissue liquid parameter .....</b>	<b>15</b>
<b>SECTION 9 : System validation data .....</b>	<b>17</b>
<b>SECTION 10 : Evaluation procedure .....</b>	<b>18</b>
<b>SECTION 11 : Exposure limit .....</b>	<b>19</b>
<b>SECTION 12 : SAR Measurement results .....</b>	<b>20</b>
<b>SECTION 13 : Equipment &amp; calibration information .....</b>	<b>24</b>
<b>SECTION 14 : References .....</b>	<b>25</b>
<b>APPENDIX 1 : Photographs of test setup .....</b>	<b>26</b>
<b>APPENDIX 2 : SAR Measurement data .....</b>	<b>32</b>
<b>APPENDIX 3 : Validation Measurement data .....</b>	<b>64</b>
<b>APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713) .....</b>	<b>67</b>
<b>APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1685) .....</b>	<b>76</b>

**SECTION 1 : Client information**

Company Name : Sony Corporation  
Brand Name : SONY  
Address : 6-7-35, Kitashinagawa, Shinagawa-ku, Tokyo 141-0001, Japan  
Telephone Number : +81-3-5795-8711  
Facsimile Number : +81-3-5795-8981  
Contact Person : Tsutomu Shibusawa

---

## **SECTION 2 : Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Applicant : Sony Corporation  
Type of Equipment : Notebook Personal Computer  
Model No. : PCG-1H1L  
Serial No. : 1200034  
Country of Manufacture : JAPAN  
Receipt Date of Sample : June 17, 2004  
Condition of EUT : Engineering prototype  
(Not for sale: This sample is equivalent to mass-produced items.)  
Battery option : Only one model with EUT  
Category Identified : Portable device

### **2.2 Product Description**

Tx Frequency : 2412MHz~2462MHz  
Modulation : OFDM , DSSS  
Rating : DC 16.0 V  
Max.Output Power Tested : 22.6 dBm Peak Conducted  
Antenna Type : Film Antenna (Rambda/4-Monopole Antenna)  
Position of Antenna : See photograph of following



---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### **SECTION 3 : Requirements for compliance testing defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- 1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- 2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

### **SECTION 4 : Dosimetry assessment setup**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1685 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

---

***UL Apex Co., Ltd.***


***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

#### 4.1 Configuration and peripherals

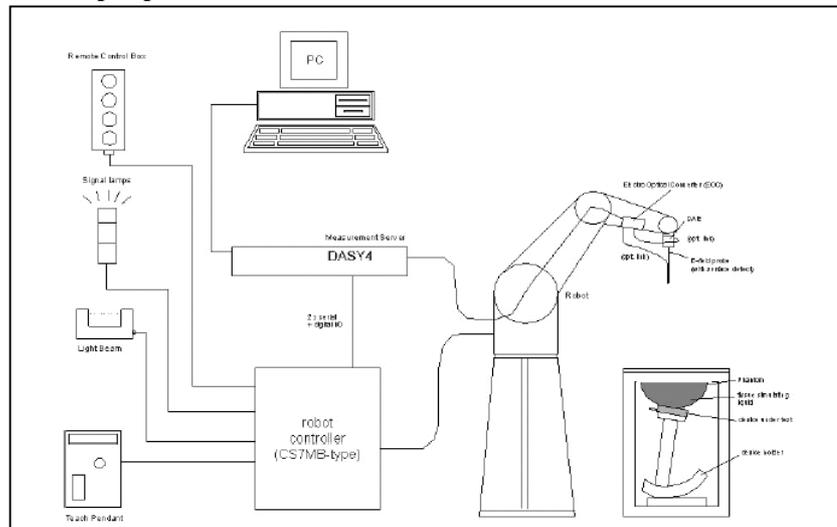

The DASYS4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.  
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid.  
The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.  
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASYS4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 4.2 System components

### 4.2.1 ET3DV6 Probe Specification

#### Construction:

Symmetrical design with triangular core  
Built-in optical fiber for surface detection System  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

#### Calibration:

Basic Broad Band calibration in air from 10 MHz to 2.5 GHz  
In brain and muscle simulating tissue at  
Frequencies of 450 MHz, 900 MHz, 1.8 GHz and 2.45GHz (accuracy +/-8%)

#### Frequency:

10 MHz to 3GHz; Linearity: +/-0.2 dB  
(30 MHz to 3 GHz)

#### Directivity:

+/-0.2 dB in brain tissue (rotation around probe axis)  
+/-0.4 dB in brain tissue (rotation normal probe axis)

#### Dynamic Range:

5 mW/g to > 100 mW/g; Linearity: +/-0.2 dB

#### Optical Surface Detection:


+/-0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.

#### Dimensions:

Overall length: 330 mm (Tip: 16 mm)  
Tip length: 16 mm  
Body diameter: 12 mm (Body: 12 mm)  
Tip diameter: 6.8 mm  
Distance from probe tip to dipole centers: 2.7 mm

#### Application:

General dosimetric up to 3 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms

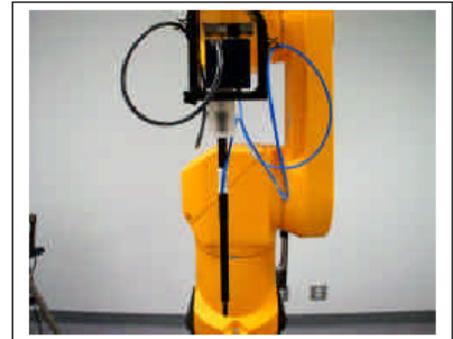

Inside view of  
ET3DV6 E-field Probe

#### 4.2.2 SAM Phantom

**Construction:**

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

**Shell Thickness:**


2 +/-0.2 mm

**Filling Volume:**

Approx. 25 liters

**Dimensions:**

(H x L x W): 810 x 1000 x 500 mm

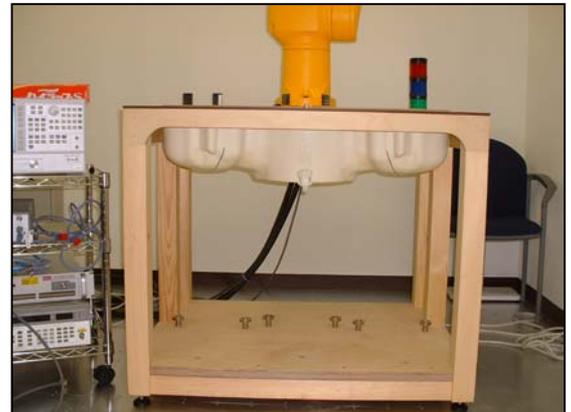

**SAM Phantom**

#### 4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



**Device Holder**

Device holder couldn't be used at this SAR measurement.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 5 : Test system specifications**

### **Robot RX60L**

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manufacture	:	Stäubli Unimation Corp. Robot Model: RX60

### **DASY4 Measurement sever**

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chain Two expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

### **Data Acquisition Electronic (DAE)**

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 $\mu$ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 $\mu$ V (with auto zero)
Input Resistance	:	200 M $\Omega$
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

### **Software**

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.1
Manufacture / Origin	:	Schimid & Partner Engineering AG

### **E-Field Probe**

Model	:	ET3DV6
Serial No.	:	1685
Construction	:	Triangular core fiber optic detection system
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

### **Phantom**

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

---


## **SECTION 6 : Test setup of EUT**

### **6.1 Photographs of test setup**

When users operate or carry this EUT, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

- 1.Front : The test was performed in touch with front of EUT to the flat phantom.
- 2.Back : The test was performed in touch with back of EUT to the flat phantom.
- 3.Top : The test was performed in touch with top of EUT to the flat phantom.
- 4.Right Side : The test was performed in touch with right side of EUT to the flat phantom.
- 5.Left Side : The test was performed in touch with left side of EUT to the flat phantom.

#### **1.Front**

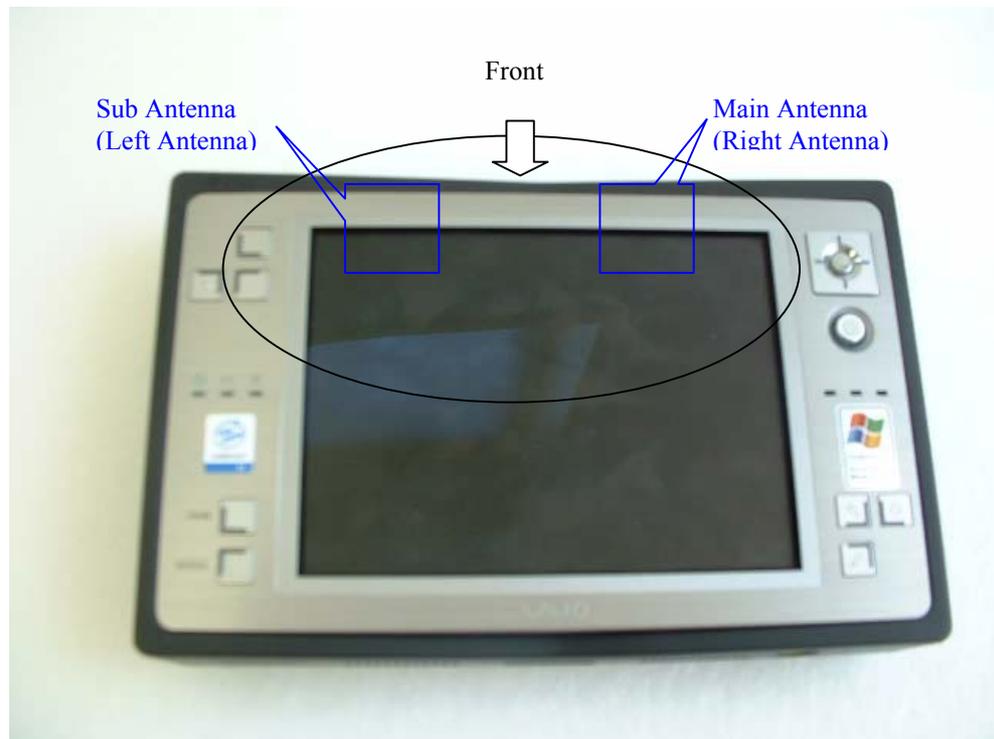

---

***UL Apex Co., Ltd.***


***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*


*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

2.Back

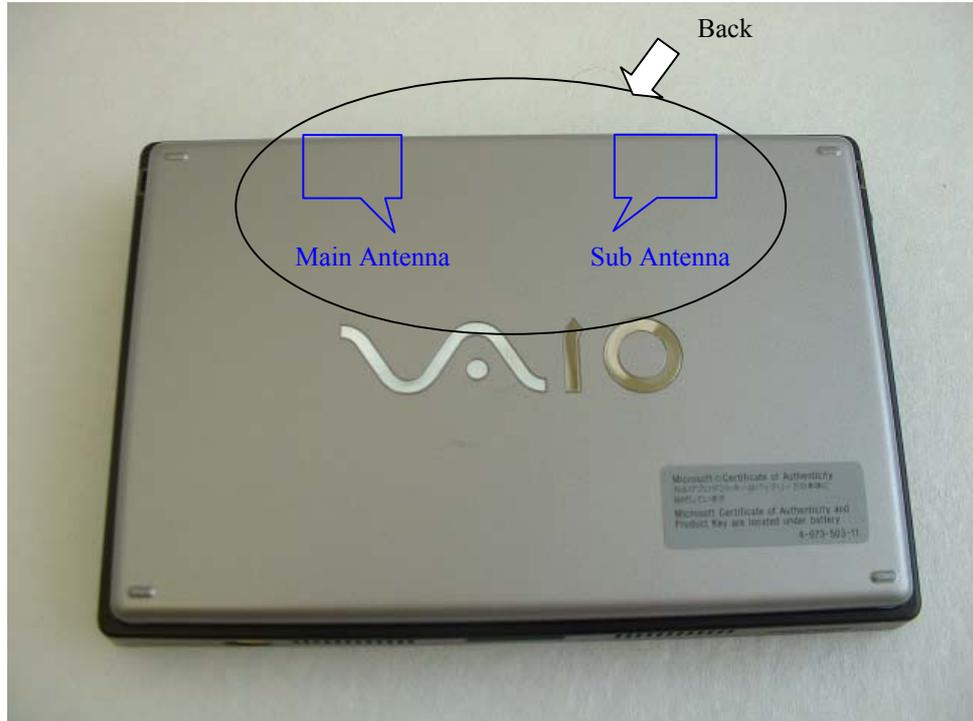

3.Top

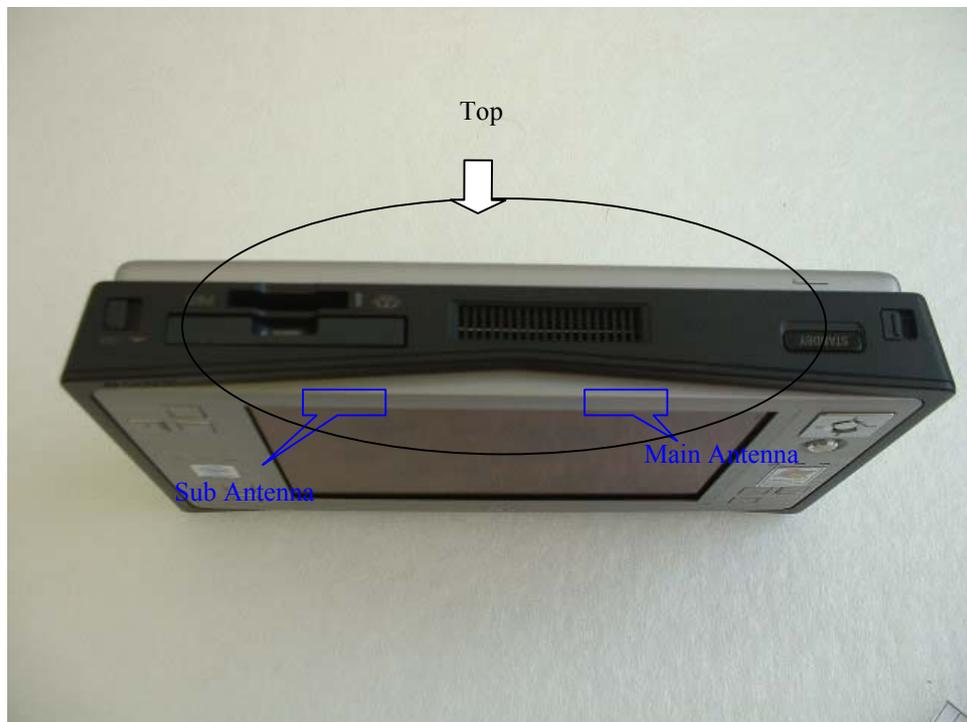

#### 4.Right Side



#### 5.Left Side



## 6.2 EUT Tune-up procedure

This EUT has IEEE.802.11b/11g modes.

The frequency range and the modulation were used in the testing of each mode are shown as a following.

The testing was performed in Low, Middle and High channels.

### 1. IEEE 802.11b mode

Frequency band : 2412-2462MHz  
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)  
Modulation : DSSS(CCK)  
Crest factor : 1

### 2. IEEE 802.11g mode

Frequency band : 2412-2462MHz  
Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz)  
Modulation : OFDM(64QAM & QPSK)  
Crest factor : 1

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 7 : Measurement uncertainty**

The uncertainty budget has been determined for the DASY4 measurement system according to the NIS81 [13] and the NIST1297 [6] documents and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci)1 lg	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 4.8$	Normal	1	1	$\pm 4.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Mech. constraints of robot	$\pm 0.4$	Rectangular	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
Probe positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Extrap. and integration	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	29
Device holder uncertainty	$\pm 3.6$	Rectangular	$\sqrt{3}$	1	$\pm 3.6$	5
Power drift	$\pm 10.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 3.7$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 3.5$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 11.51</math></b>	
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 23.0</math></b>	

The result of some test showed that the power drift has exceeded 5%. Therefore, the uncertainty of power drift expanded to 10%. However, the extended uncertainty (k= 2) of a test is less than 30%.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 8 : Simulated tissue liquid parameter**

### **8.1 Simulated Tissue Liquid Parameter confirmation**

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit. The dielectric parameters measurement are reported in each correspondent section.

#### **8.1.1 Head 2450MHz**

#### **8.1.1 Head 2450MHz**

Type of liquid : **Head 2450 MHz**  
Ambient temperature (deg.c.) : **24.8(June 28) / 24.8(June 29)**  
Relative Humidity (%) : **51(June 28) / 48(June 29)**  
Liquid depth (cm) : **15.3**

Measured By : Miyo Ikuta

<b>DIELECTRIC PARAMETERS MEASUREMENT RESULTS</b>							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
June 28	23.3	23.3	Relative Permittivity $\epsilon_r$	39.2	37.5	-4.3	+/-5
			Coductivity $\sigma$ [mho/m]	1.80	1.82	1.1	+/-5
June 29	23.5	23.5	Relative Permittivity $\epsilon_r$	39.2	37.5	-4.3	+/-5
			Coductivity $\sigma$ [mho/m]	1.80	1.87	3.9	+/-5

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

**8.1.2 Muscle 2450MHz**

Type of liquid : Muscle 2450 MHz  
Ambient temperature (deg.c.) : 24.8(June 28) / 24.8(June 29)  
Relative Humidity (%) : 51(June 28) / 48(June 29)  
Liquid depth (cm) : 15.1

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS							
Date	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
	Before	After					
June 28	23.5	23.5	Relative Permittivity $\epsilon_r$	52.7	50.3	-4.6	+/-5
			Conductivity $\sigma$ [mho/m]	1.95	1.99	2.1	+/-5
June 29	23.8	23.8	Relative Permittivity $\epsilon_r$	52.7	50.4	-4.4	+/-5
			Conductivity $\sigma$ [mho/m]	1.95	1.99	2.1	+/-5

**8.2 Simulated Tissues**

Ingredient	MiXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.17

Note:DGMBE(Diethylenglycol-monobuthyl ether)

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 9 : System validation data**


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are tabulated below. Please refer to APPENDIX 3.

Type of liquid : **HEAD 2450MHz**  
Frequency : **2450MHz**  
Dipole : **D2450V2 SN:713**  
Liquid depth (cm) : **15.3**  
Ambient temperature (deg.c.) : **24.8 (June 28) / 24.8(June 29)**  
Relative Humidity (%) : **51(June 28) / 48(June 29)**  
Power : **250mW**

Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity $\epsilon_r$		Conductivity $\sigma$ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
June 28	23.3	23.3	39.2	37.5	1.80	1.82	13.1	13.5	3.1	+/-10
June 29	23.5	23.5	39.2	37.5	1.80	1.87	13.1	14.1	7.6	+/-10

Note: Please refer to Attachment for the result representation in plot format

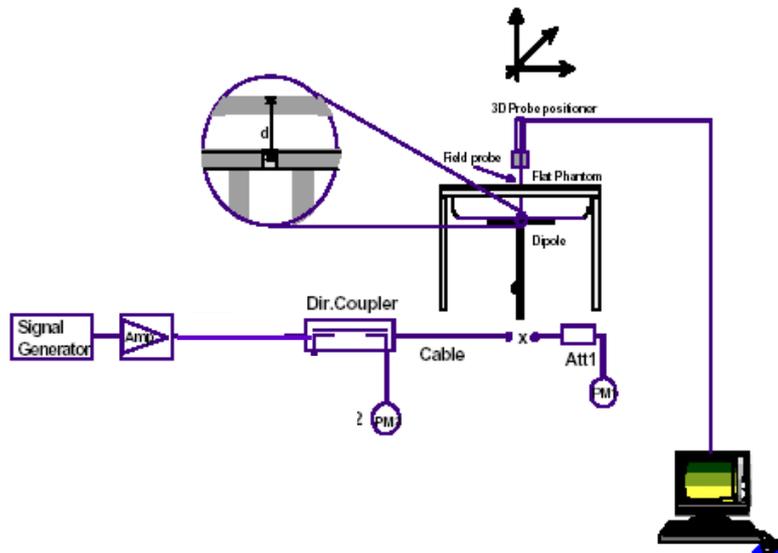

**2450MHz System performance check setup**

Test system for the system performance check setup diagram

## **SECTION 10 : Evaluation procedure**

**The evaluation was performed with the following procedure:**

**Step 1:** Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

**Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension the antenna of the EUT and the horizontal grid spacing was 20 mm x 20 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

**Step 3:** Around this point found in the Step 2 (area scan) , a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

**Step 4:** Re-measurement of the E-field at the same location as in Step 1.

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

---

**SECTION 11 : Exposure limit**

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p><b>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</b></p>
---

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

**SECTION 12 : SAR Measurement results**

**12.1 Measurement results of main antenna (Right antenna)**

**12.1.1 Conducted power measurement results**

CONDUCTED POWER MEASUREMENT RESULTS OF MAIN ANTENNA													
Modulation	Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
DSSS	2412	-4.4	20	1.1	16.7	46.8	-4.4	20	1.1	16.7	46.8	0.0	+/-5
	2437	-4.5	20	1.1	16.6	45.7	-4.4	20	1.1	16.7	46.8	2.3	+/-5
	2462	-4.8	20	1.1	16.3	42.7	-4.9	20	1.1	16.2	41.7	-2.3	+/-5
OFDM (64QAM)	2412	-1.0	20	1.1	20.1	102.3	-0.8	20	1.1	20.3	107.2	4.7	+/-5
	2437	-1.1	20	1.1	20.0	100.0	-1.0	20	1.1	20.1	102.3	2.3	+/-5
	2462	-2.0	20	1.1	19.1	81.3	-1.8	20	1.1	19.3	85.1	4.7	+/-5
OFDM (QPSK)	2412	1.5	20	1.1	22.6	182.0	1.3	20	1.1	22.4	173.8	-4.5	+/-5
	2437	0.2	20	1.1	21.3	134.9	0.4	20	1.1	21.5	141.3	4.7	+/-5
	2462	0.2	20	1.1	21.3	134.9	0.3	20	1.1	21.4	138.0	2.3	+/-5

**12.1.2 Body 2450MHz SAR of main antenna**

Liquid Depth (cm) : **15.1** Model : **PCG-1H1L**  
Parameters :  $\epsilon_r=50.3, \sigma=1.99$  (June 28)  
 $\epsilon_r=50.4, \sigma=1.99$  (June 29)  
Ambient Temperature[deg.c.] : **24.8(June 28 and 29)** Serial No. : **1200034**  
Relative Humidity (%) : **51(June 28) / 48(June 29)** Modulation : **DSSS,OFDM**  
Crest factor : **1**  
Date : June 28 and 29,2004  
Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak)
Mid	2437	DSSS	Flat	Fixed	Front	0	23.5	23.5	<b>0.617</b>
Mid	2437	DSSS	Flat	Fixed	Back	0	24.0	24.0	<b>0.163</b>
Mid	2437	DSSS	Flat	Fixed	Top	0	23.6	23.6	<b>0.506</b>
Mid	2437	DSSS	Flat	Fixed	Right Side	0	23.6	23.6	<b>0.195</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg</b>		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>							<b>(averaged over 1 gram)</b>		

<b>BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA</b>									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Mid	2437	OFDM(64QAM)	Flat	Fixed	Front	0	24.0	24.0	<b>0.287</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Back	0	23.5	23.5	<b>0.0288</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Top	0	23.6	23.6	<b>0.312</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Right Side	0	23.6	23.6	<b>0.0567</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Front	0	23.5	23.5	<b>0.56</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Back	0	24.0	24.0	<b>0.0547</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Top	0	23.6	23.6	<b>0.419</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Right Side	0	23.6	23.6	<b>0.0985</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg</b>		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>							<b>(averaged over 1 gram)</b>		

**12.2 Measurement results of sub antenna (Left antenna)**

**12.2.1 Conducted power measurement results**

CONDUCTED POWER MEASUREMENT RESULTS OF SUB ANTENNA													
Modulation	Frequency [MHz]	Before					After					Deviation [%]	Limit [%]
		Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]	Reading [dBm]	Att. [dB]	Cable loss [dB]	Result [dBm]	Convert [mW]		
DSSS	2412	-3.2	20	1.1	17.9	61.7	-3.4	20	1.1	17.7	58.9	-4.5	+/-5
	2437	-3.4	20	1.1	17.7	58.9	-3.6	20	1.1	17.5	56.2	-4.5	+/-5
	2462	-4.9	20	1.1	16.2	41.7	-4.8	20	1.1	16.3	42.7	2.3	+/-5
OFDM (64QAM)	2412	-0.8	20	1.1	20.3	107.2	-1.0	20	1.1	20.1	102.3	-4.5	+/-5
	2437	-0.8	20	1.1	20.3	107.2	-0.7	20	1.1	20.4	109.6	2.3	+/-5
	2462	-2.0	20	1.1	19.1	81.3	-2.0	20	1.1	19.1	81.3	0.0	+/-5
OFDM (QPSK)	2412	1.3	20	1.1	22.4	173.8	1.2	20	1.1	22.3	169.8	-2.3	+/-5
	2437	0.3	20	1.1	21.4	138.0	0.1	20	1.1	21.2	131.8	-4.5	+/-5
	2462	0.8	20	1.1	21.9	154.9	0.7	20	1.1	21.8	151.4	-2.3	+/-5

**12.1.2 Body 2450MHz SAR of sub antenna**

Liquid Depth (cm) : **15.1** Model : **PCG-1H1L**  
Parameters :  $\epsilon_r=50.3, \sigma=1.99$  (June 28)  
 $\epsilon_r=50.4, \sigma=1.99$  (June 29)  
Ambient Temperature[deg.c.] : **24.8(June 28 and 29)** Serial No. : **1200034**  
Relative Humidity (%) : **51(June 28) / 48(June 29)** Modulation : **DSSS,OFDM**  
Crest factor : **1**

Date : June 28 and 29,2004  
Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF SUB ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak)
Mid	2437	DSSS	Flat	Fixed	Front	0	23.5	23.5	<b>0.994</b>
Mid	2437	DSSS	Flat	Fixed	Back	0	24.0	24.0	<b>0.0138</b>
Mid	2437	DSSS	Flat	Fixed	Top	0	23.5	23.5	<b>0.602</b>
Mid	2437	DSSS	Flat	Fixed	Left Side	0	23.6	23.6	<b>0.0527</b>
Low	2412	DSSS	Flat	Fixed	Front	0	23.5	23.5	<b>0.781</b>
High	2462	DSSS	Flat	Fixed	Front	0	23.8	23.8	<b>0.466</b>
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

BODY SAR MEASUREMENT RESULTS OF SUB ANTENNA									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak)
Mid	2437	OFDM(64QAM)	Flat	Fixed	Front	0	23.5	23.5	<b>0.429</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Back	0	23.5	23.5	<b>0.0177</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Top	0	23.8	23.8	<b>0.244</b>
Mid	2437	OFDM(64QAM)	Flat	Fixed	Left Side	0	23.6	23.6	<b>0.0178</b>
Low	2412	OFDM(64QAM)	Flat	Fixed	Front	0	23.7	23.7	<b>0.366</b>
High	2462	OFDM(64QAM)	Flat	Fixed	Front	0	23.7	23.7	<b>0.314</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Front	0	24.0	24.0	<b>0.641</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Back	0	23.5	23.5	<b>0.0261</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Top	0	23.8	23.8	<b>0.498</b>
Mid	2437	OFDM(QPSK)	Flat	Fixed	Left Side	0	23.6	23.6	<b>0.0418</b>
Low	2412	OFDM(QPSK)	Flat	Fixed	Front	0	23.7	23.8	<b>0.737</b>
High	2462	OFDM(QPSK)	Flat	Fixed	Front	0	23.8	23.8	<b>0.623</b>
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg</b>		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>							<b>(averaged over 1 gram)</b>		

**SECTION 13 : Equipment & calibration information**

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2003/11/12	2004/11/11
Power Sensor	Agilent	E9300B	US40010300	2003/11/17	2004/11/16
Power Sensor	Agilent	E9327A	US40440576	2003/11/03	2004/11/02
S-Parameter Network Analyzer	Agilent	E8358A	US41080381	2003/08/13	2004/08/12
Signal Generator	Rohde&Schwarz	SML40	100023	2003/11/26	2004/11/25
RF Amplifier	OPHIR	5056F	1005	2004/02/17	2005/02/16
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	ET3DV6	1685	2003/10/10	2004/10/09
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3 V1	509	2004/04/22	2005/04/21
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2003/12/16	2004/12/15
Attenuator	HIROSE ELECTRIC CO.,LTD.	AT-120	901247	2004/01/28	2005/01/27
Spectrum Analyzer	Advantest	R3265A	55060359	2003/09/18	2004/09/17
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	713	2002/11/15	2004/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

## **SECTION 14 : References**

- [1] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*


*Facsimile: +81 596 24 8124*

## **APPENDIX 1 : Photographs of test setup**

**Front**



Back

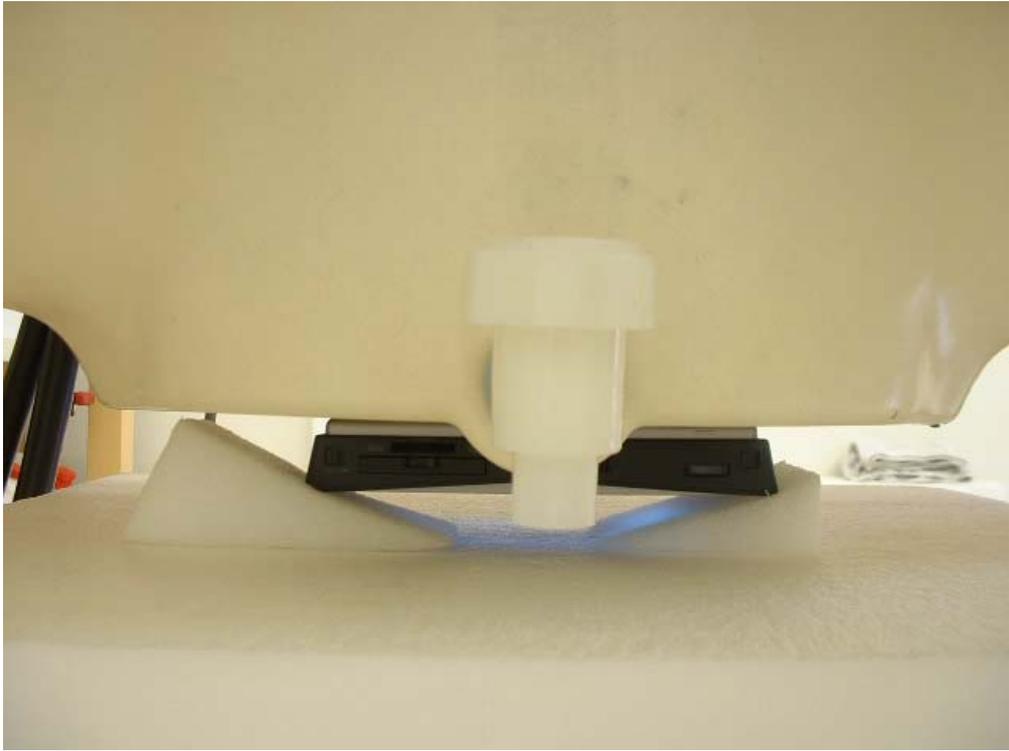


Top



**Right Side**



**Left Side**

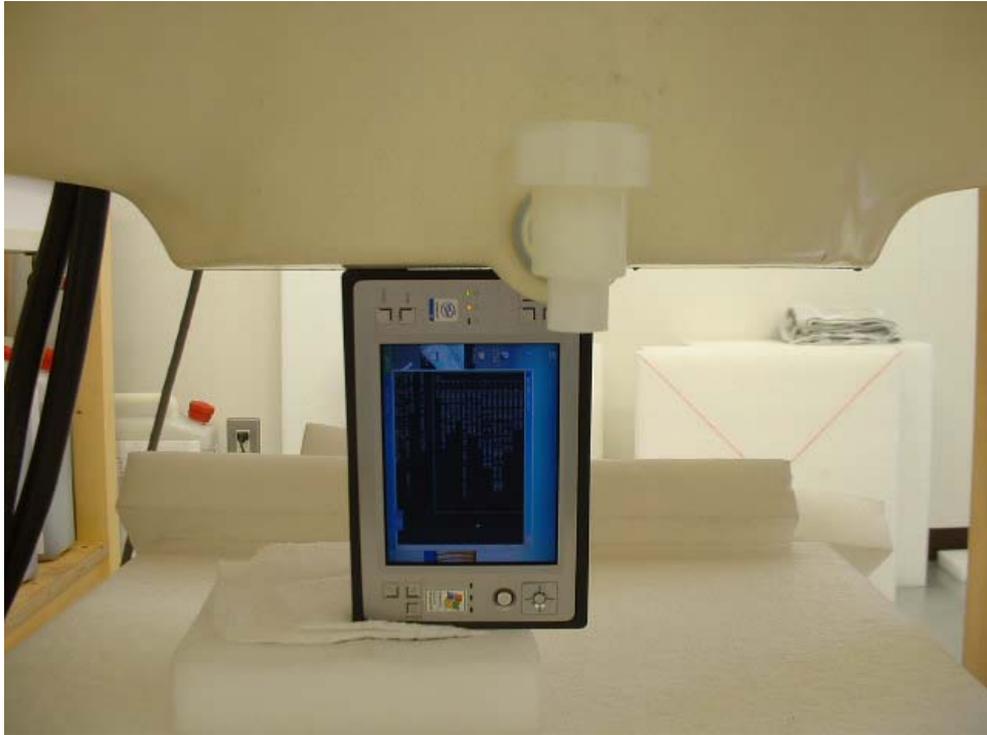

## **APPENDIX 2 : SAR Measurement data**

---

**PCG-1H1L/ Body / Front (Main antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.694 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.81 W/kg  
**SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.245 mW/g**  
Maximum value of SAR = 0.657 mW/g

Reference Value = 4.77 V/m  
Power Drift = 0.06 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

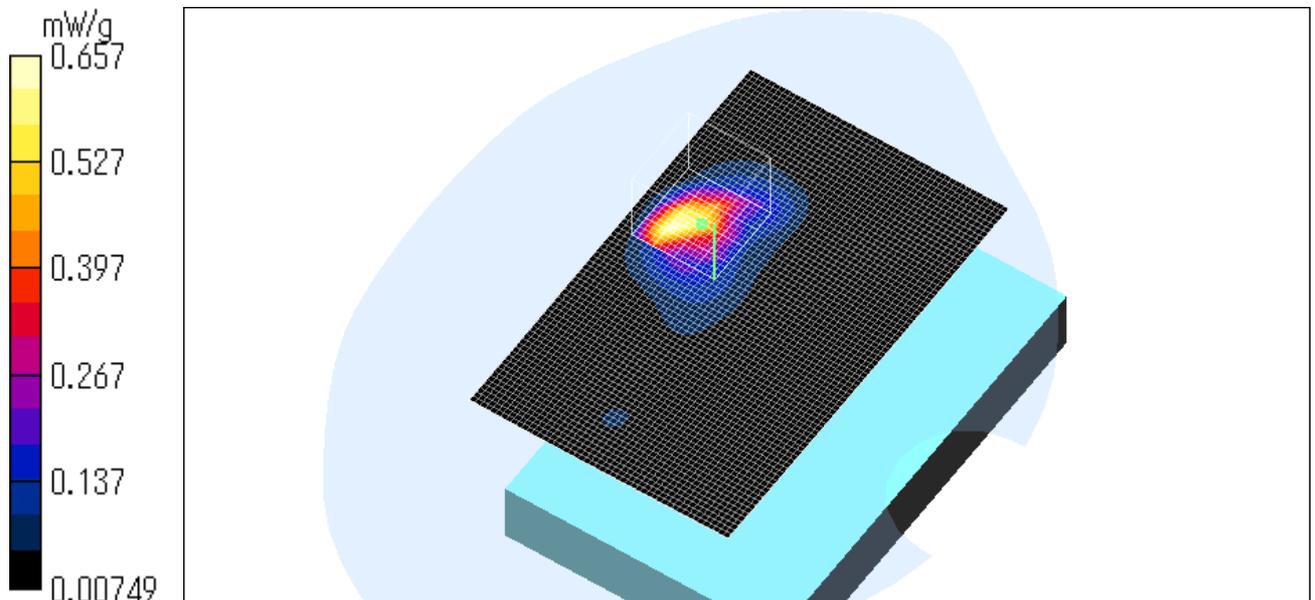

**PCG-1H1L/ Body / Back (Main antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.119 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.682 W/kg  
**SAR(1 g) = 0.12 mW/g; SAR(10 g) = 0.0543 mW/g**  
Maximum value of SAR = 0.149 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.423 W/kg  
**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.0773 mW/g**  
Maximum value of SAR = 0.167 mW/g

Reference Value = 7.17 V/m  
Power Drift = 0.1 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

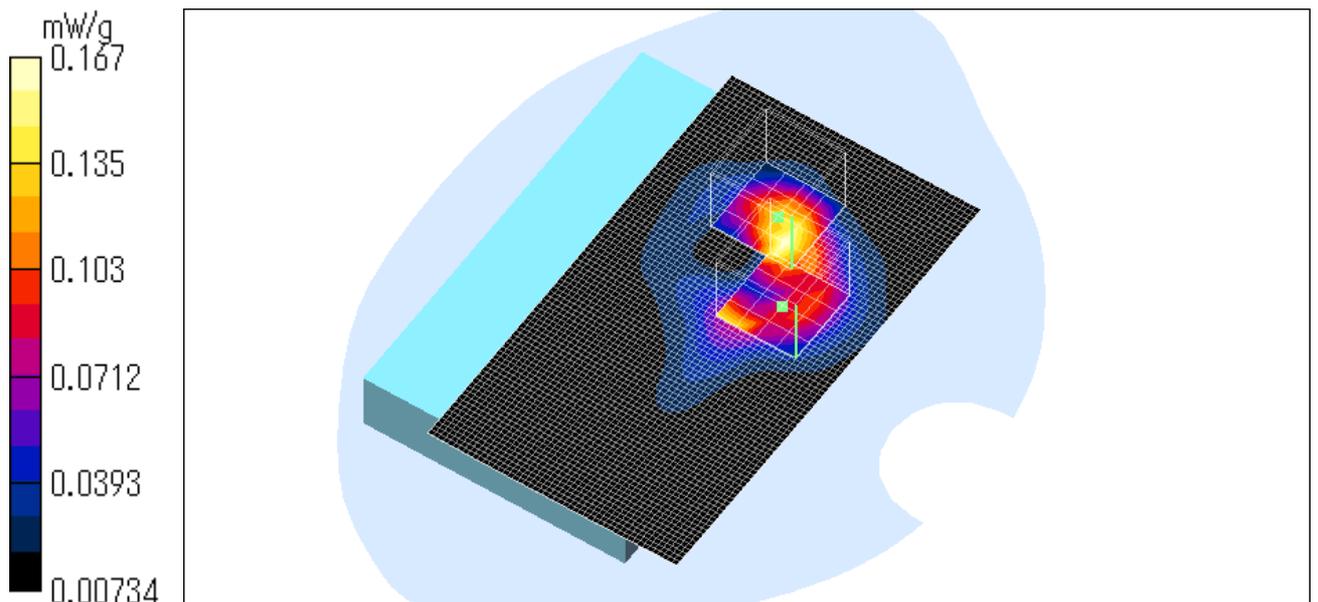

---

**PCG-1H1L/ Body / Top (Main antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.41 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.54 W/kg  
**SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.195 mW/g**  
Maximum value of SAR = 0.565 mW/g

Reference Value = 5.62 V/m  
Power Drift = -0.4 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

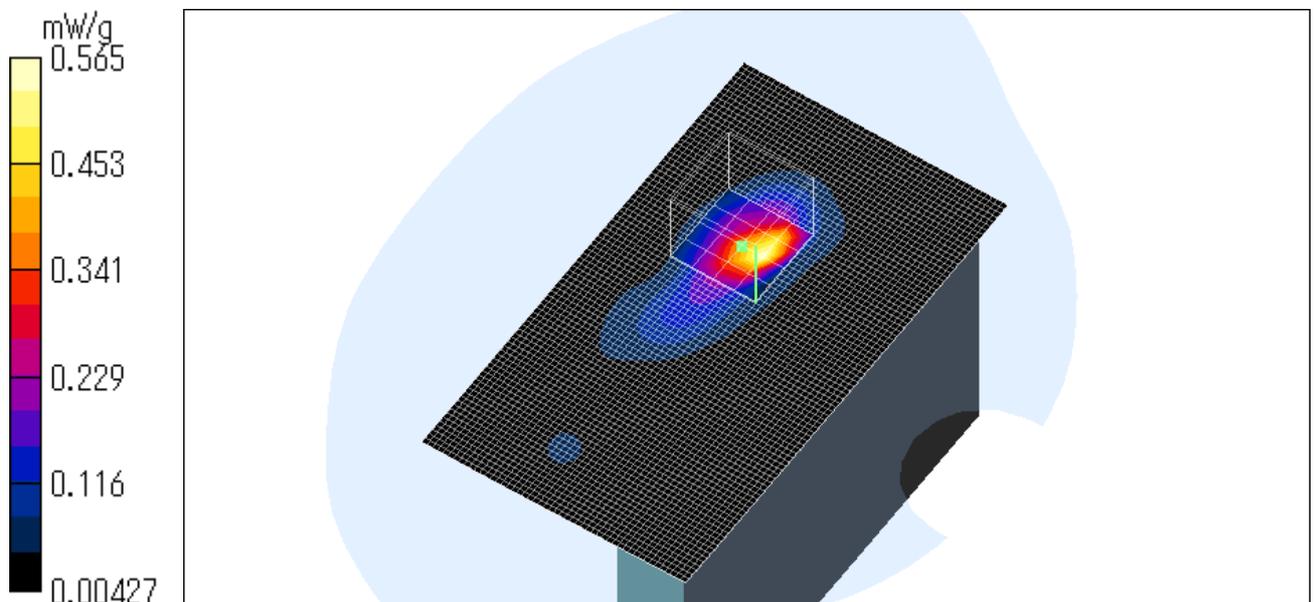

**PCG-1H1L/ Body / Right Side (Main antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.143 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.506 W/kg  
**SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.0804 mW/g**  
Maximum value of SAR = 0.236 mW/g

Reference Value = 7.08 V/m  
Power Drift = 0.1 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

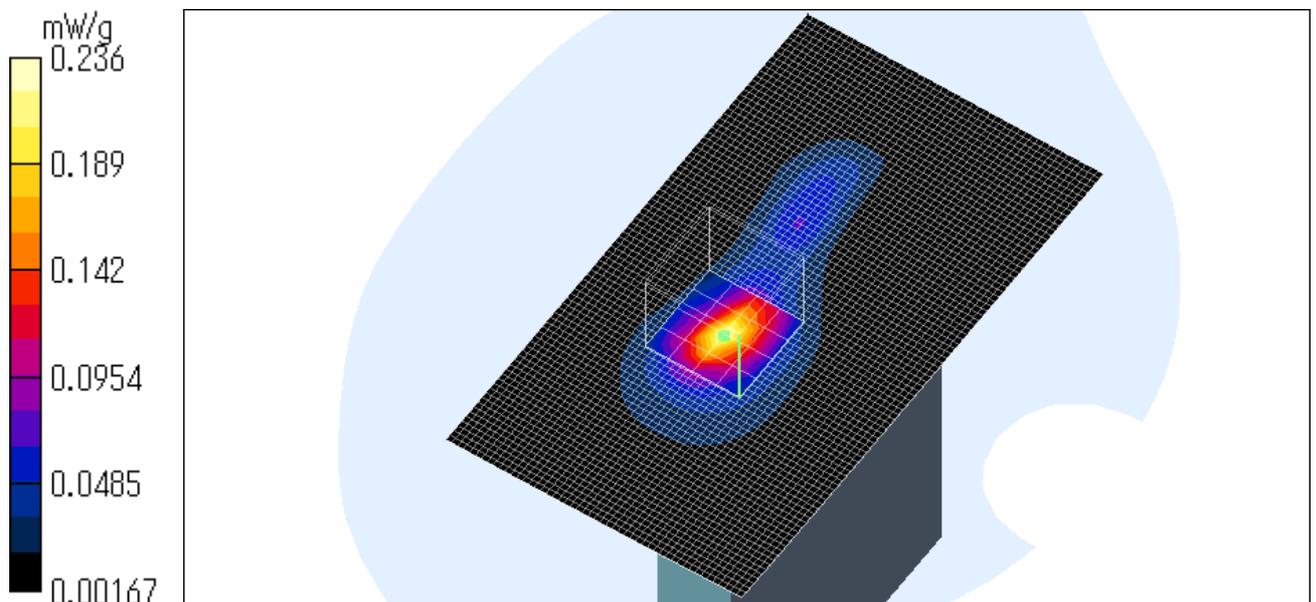

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**PCG-1H1L/ Body / Front (Main antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.293 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.08 W/kg  
**SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.108 mW/g**  
Maximum value of SAR = 0.269 mW/g

Reference Value = 3.17 V/m  
Power Drift = 0.05 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

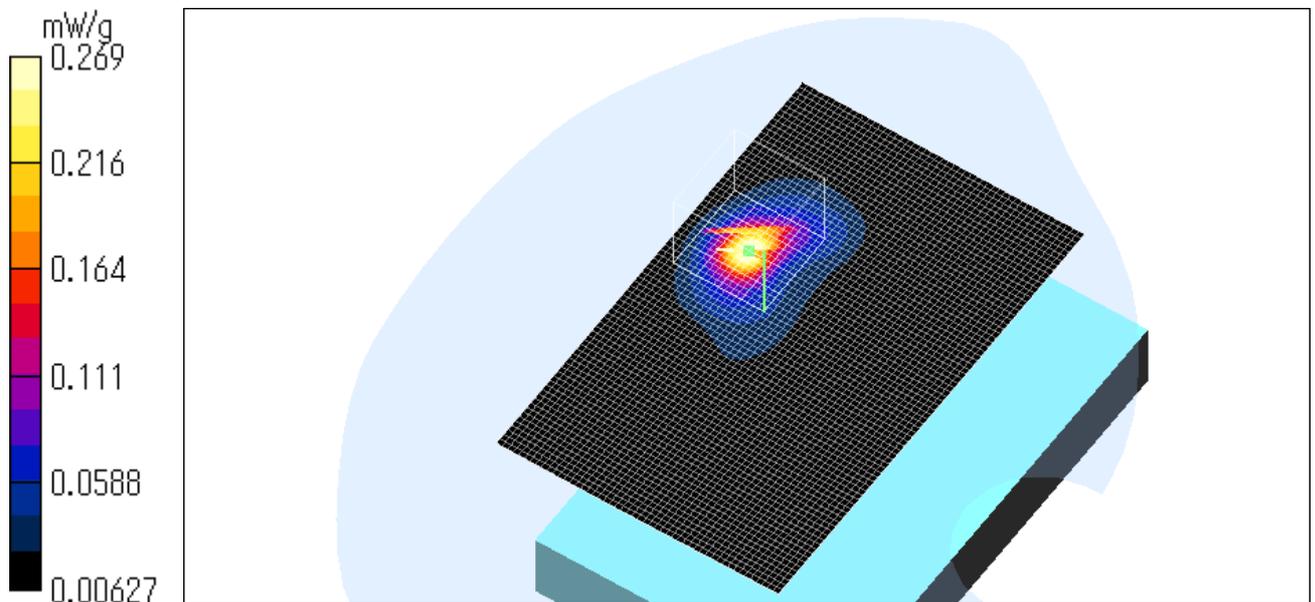

---

**PCG-1H1L/ Body / Back (Main antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0274 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.139 W/kg  
**SAR(1 g) = 0.0288 mW/g; SAR(10 g) = 0.0126 mW/g**  
Maximum value of SAR = 0.0275 mW/g

Reference Value = 2.09 V/m  
Power Drift = -0.1 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

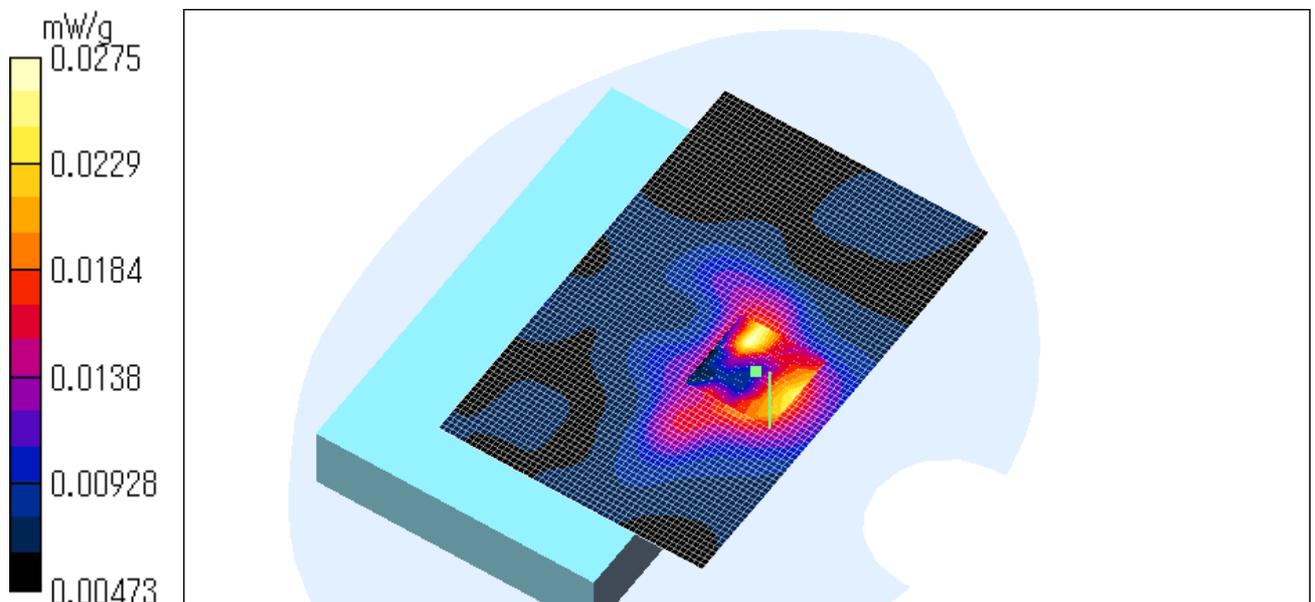

---

**PCG-1H1L/ Body / Top (Main antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.296 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.893 W/kg  
**SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.121 mW/g**  
Maximum value of SAR = 0.353 mW/g

Reference Value = 5.02 V/m  
Power Drift = -0.2 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

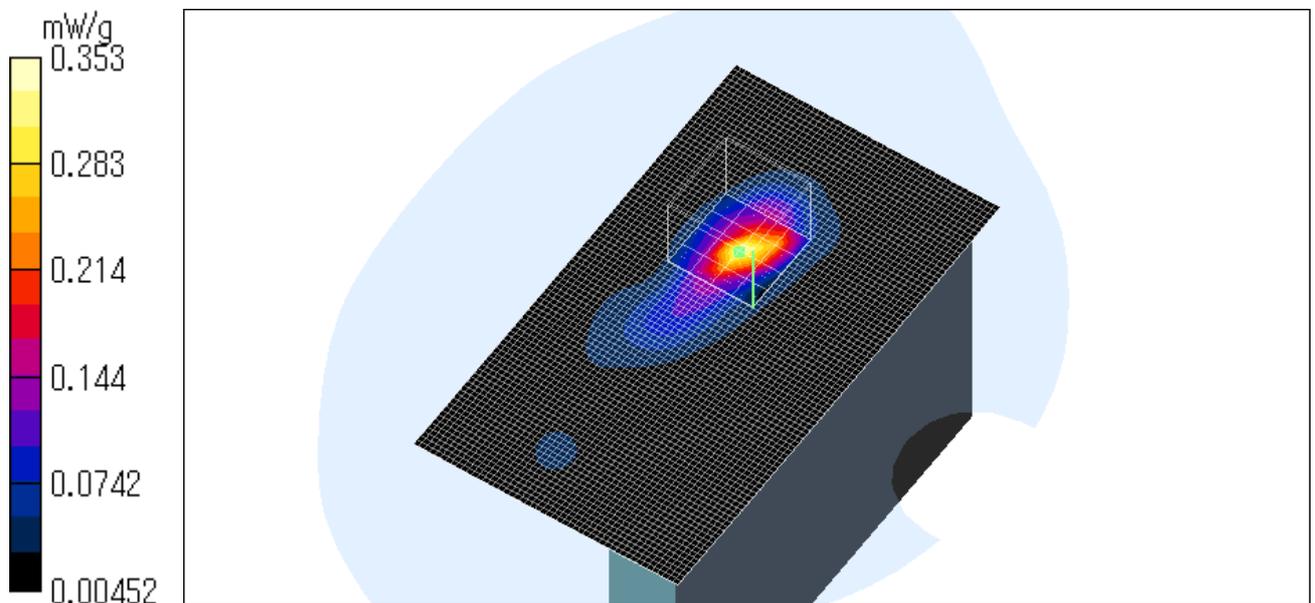

---

**PCG-1H1L/ Body / Right Side (Main antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0461 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.26 W/kg  
**SAR(1 g) = 0.0567 mW/g; SAR(10 g) = 0.0219 mW/g**  
Maximum value of SAR = 0.0597 mW/g

Reference Value = 3.29 V/m  
Power Drift = 0.2 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

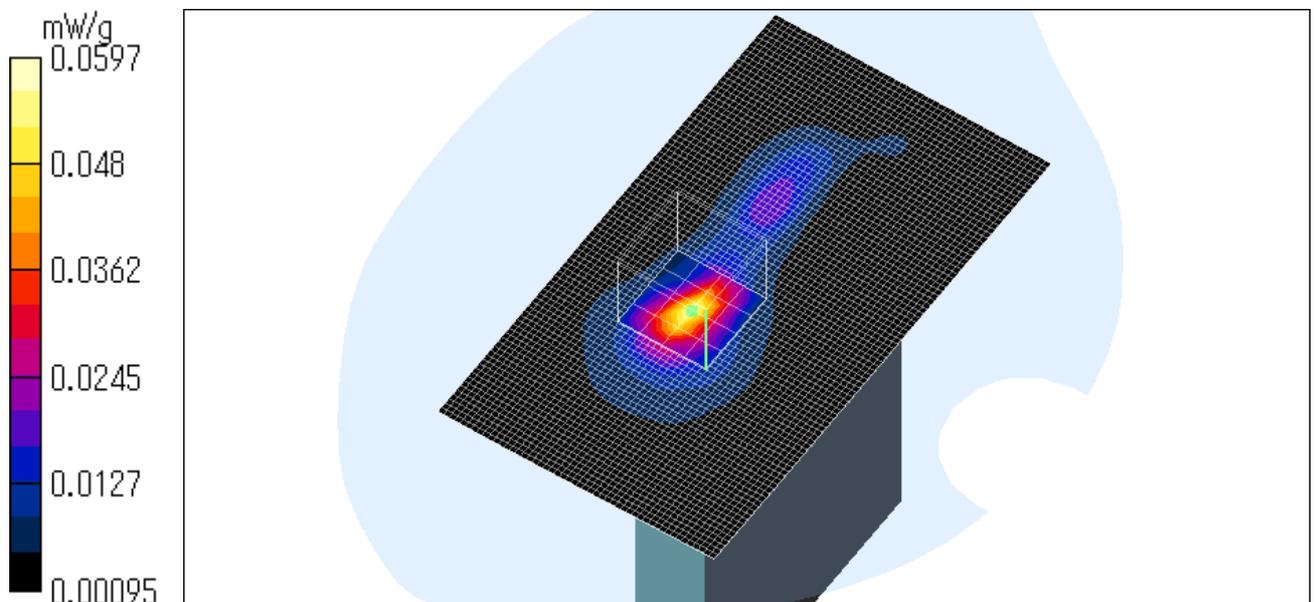

---

**PCG-1H1L/ Body / Front ( Main antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.72 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.65 W/kg  
**SAR(1 g) = 0.56 mW/g; SAR(10 g) = 0.222 mW/g**  
Maximum value of SAR = 0.587 mW/g

Reference Value = 4.78 V/m  
Power Drift = -0.02 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

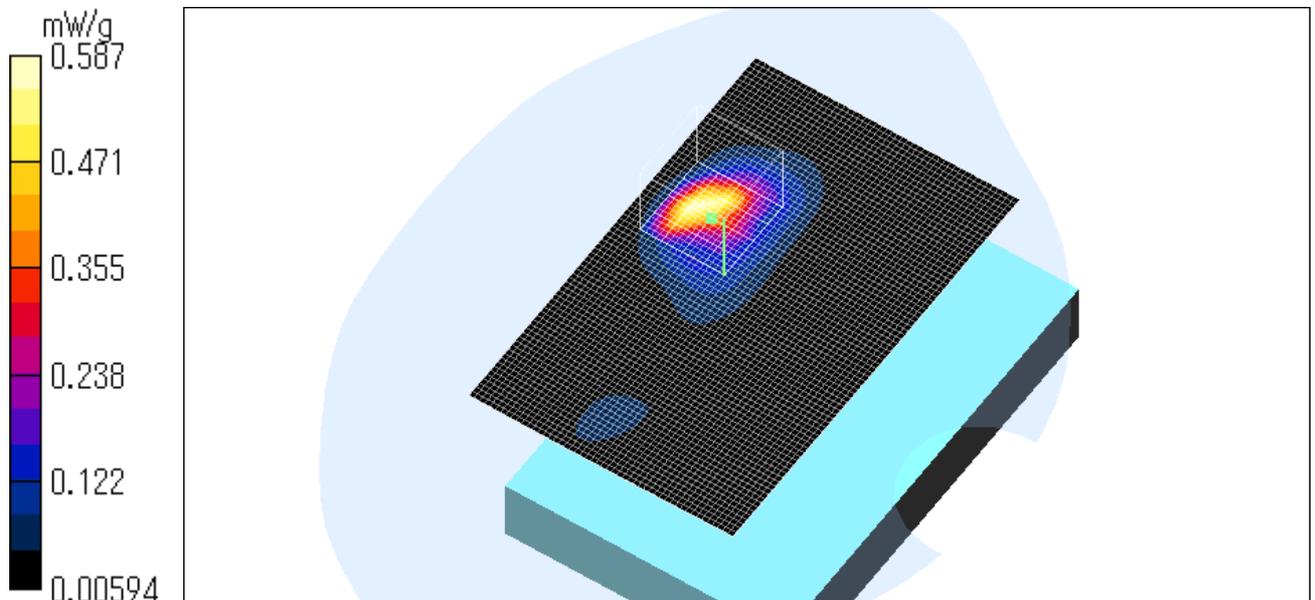

---

**PCG-1H1L/ Body / Back (Main antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.044 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 5.35 W/kg  
**SAR(1 g) = 0.0547 mW/g; SAR(10 g) = 0.0269 mW/g**  
Maximum value of SAR = 0.0534 mW/g

Reference Value = 3.44 V/m  
Power Drift = -0.3 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

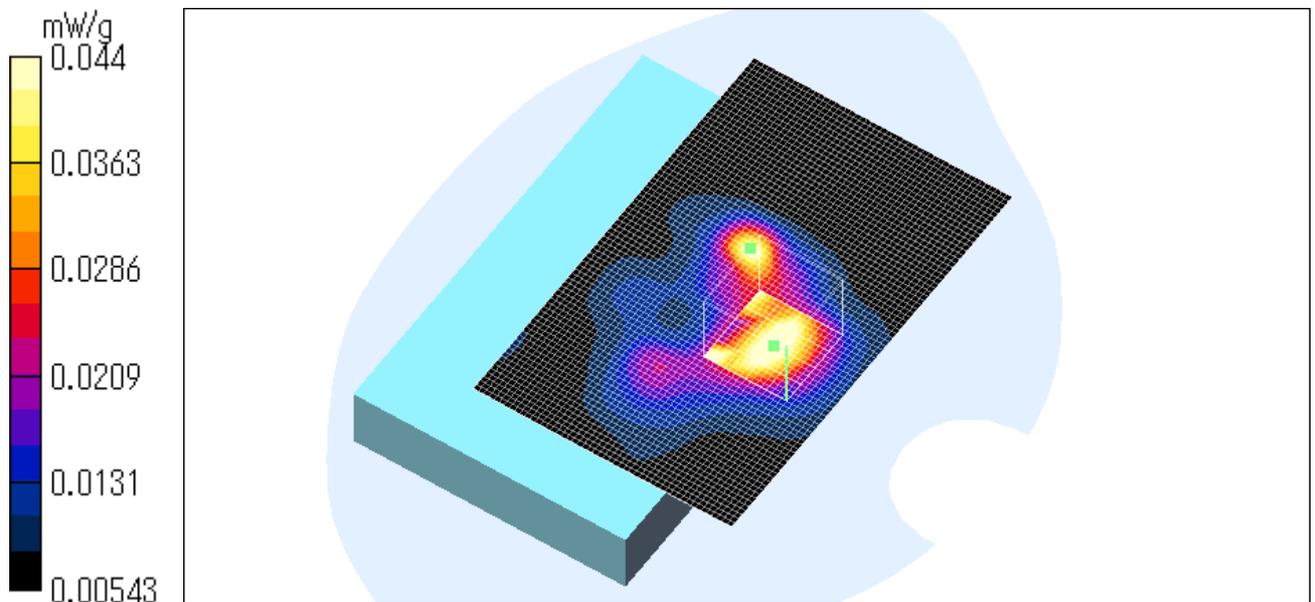

---

**PCG-1H1L/ Body / Top (Main antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.338 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 1.3 W/kg

**SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.161 mW/g**

Maximum value of SAR = 0.47 mW/g


Reference Value = 5.04 V/m

Power Drift = -0.3 dB

Test Date = 06/29/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

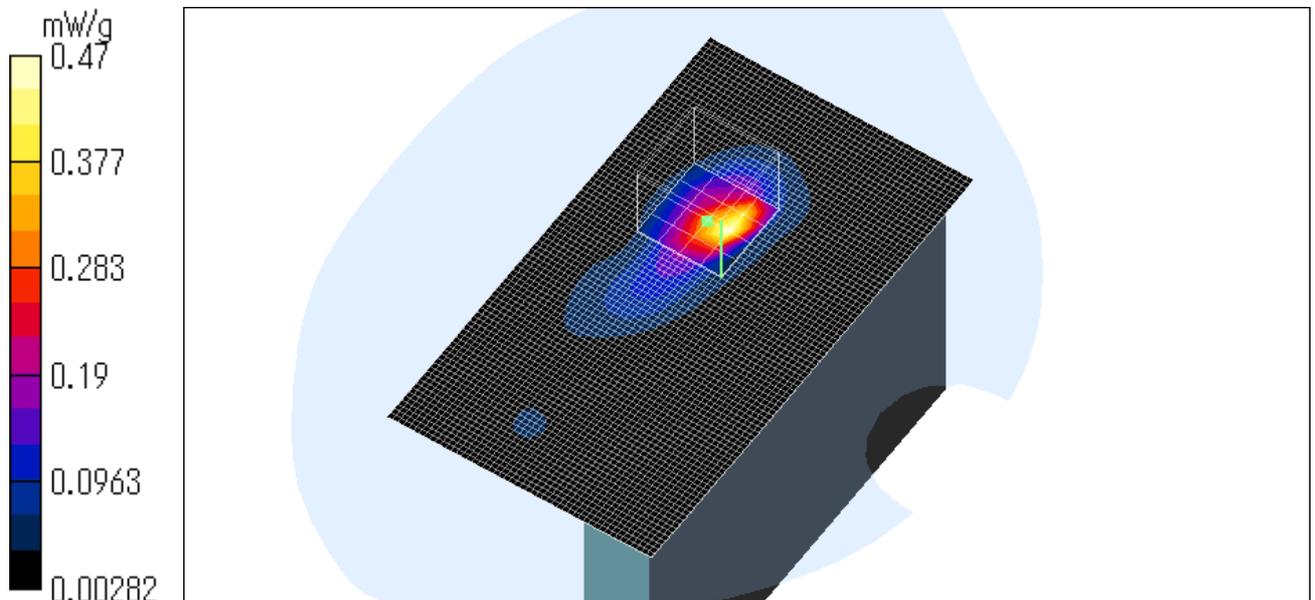

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**PCG-1H1L/ Body / Right Side (Main antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0746 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.307 W/kg  
**SAR(1 g) = 0.0985 mW/g; SAR(10 g) = 0.039 mW/g**  
Maximum value of SAR = 0.107 mW/g

Reference Value = 5.54 V/m  
Power Drift = -0.4 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

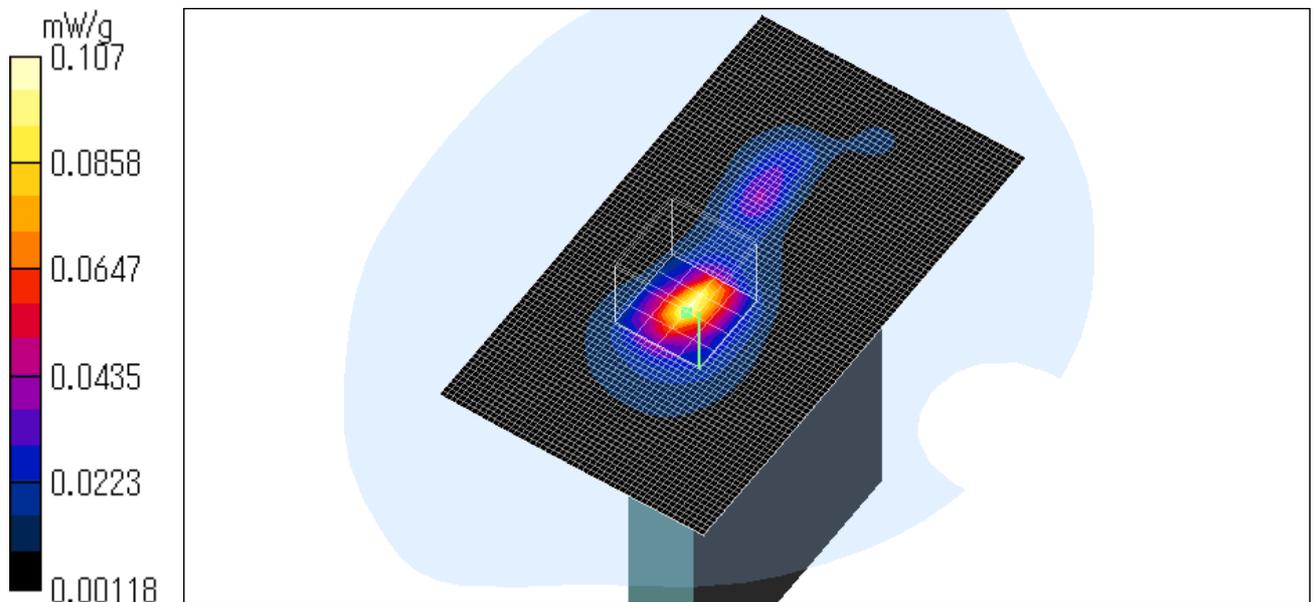

**PCG-1H1L/ Body / Front (Sub antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 1.02 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 2.62 W/kg  
**SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.378 mW/g**  
Maximum value of SAR = 1.26 mW/g

Reference Value = 6.91 V/m  
Power Drift = -0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

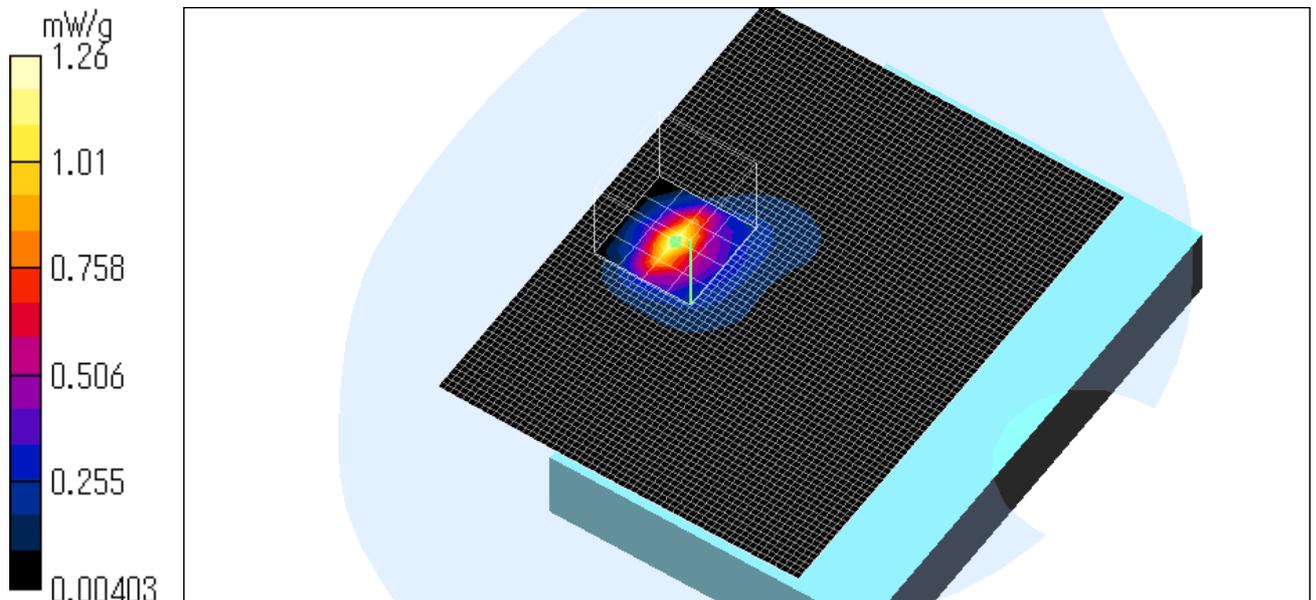

### Z-axis scan at max SAR location

PCG-1H1L/ Body / Front (Sub antenna) / DSSS / 2437MHz

Crest factor: 1

Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

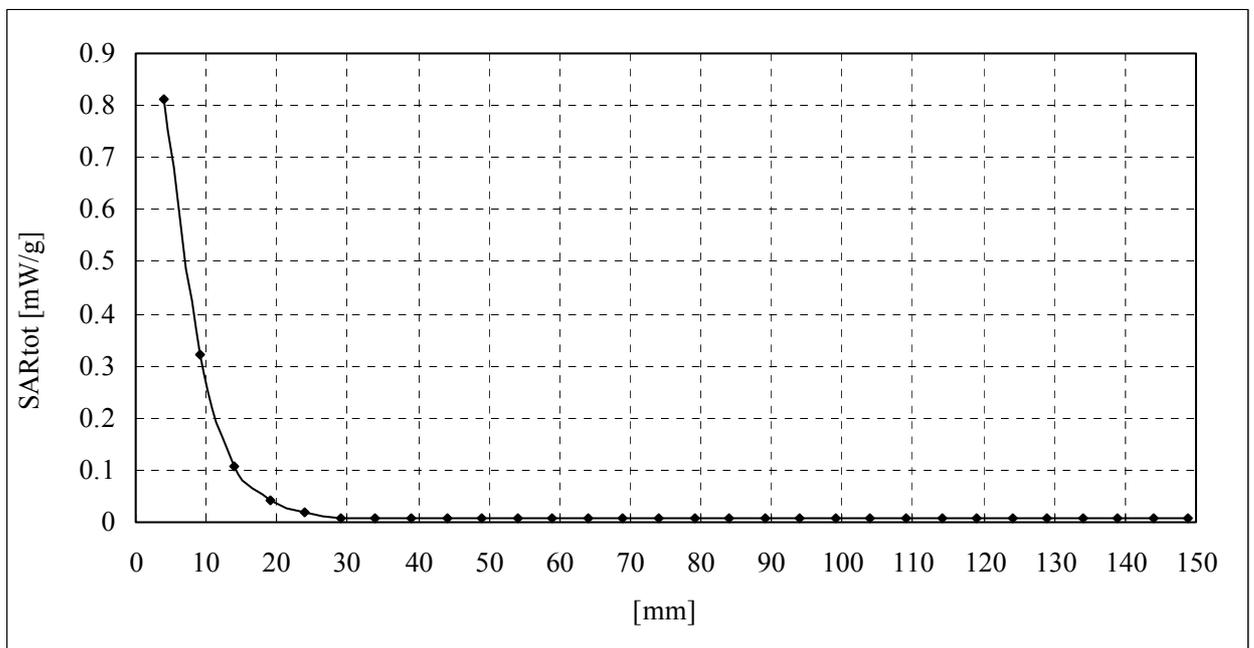

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**PCG-1H1L/ Body / Back (Sub antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0123 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.0488 W/kg  
**SAR(1 g) = 0.0138 mW/g; SAR(10 g) = 0.00976 mW/g**  
Maximum value of SAR = 0.0131 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.0122 W/kg  
**SAR(1 g) = 0.00919 mW/g; SAR(10 g) = 0.00824 mW/g**  
Maximum value of SAR = 0.00965 mW/g

Reference Value = 1.95 V/m  
Power Drift = 0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

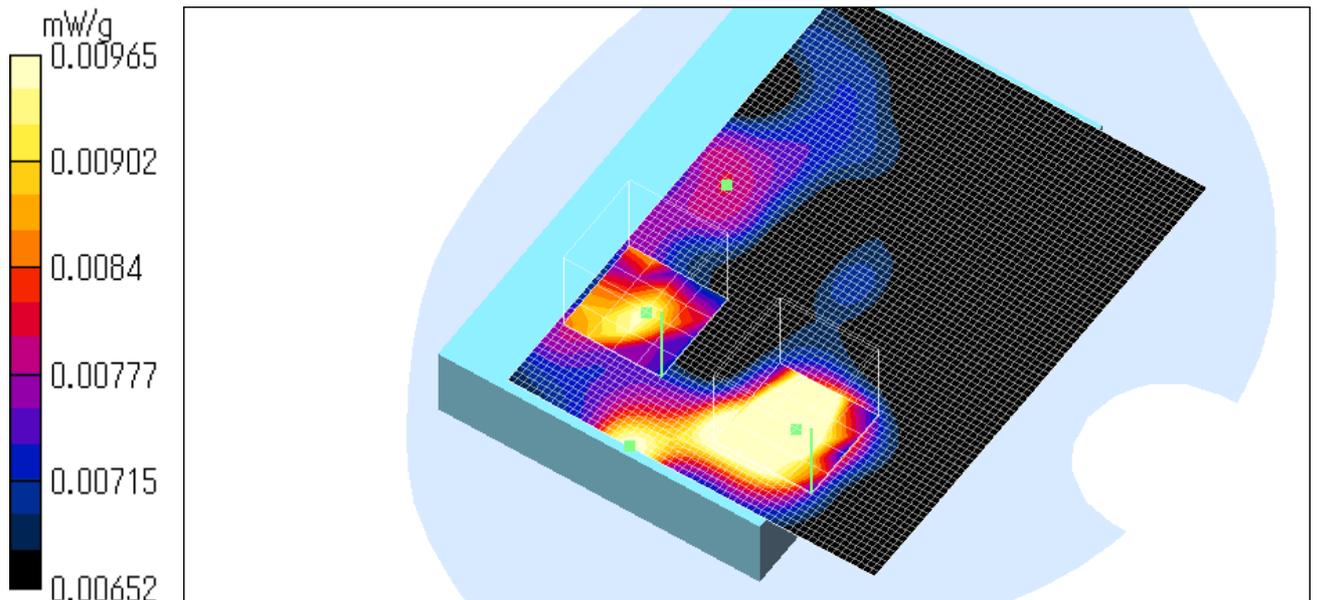

---

**PCG-1H1L/ Body / Top (Sub antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.44 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.79 W/kg  
**SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.217 mW/g**  
Maximum value of SAR = 0.762 mW/g

Reference Value = 14.3 V/m  
Power Drift = -0.3 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

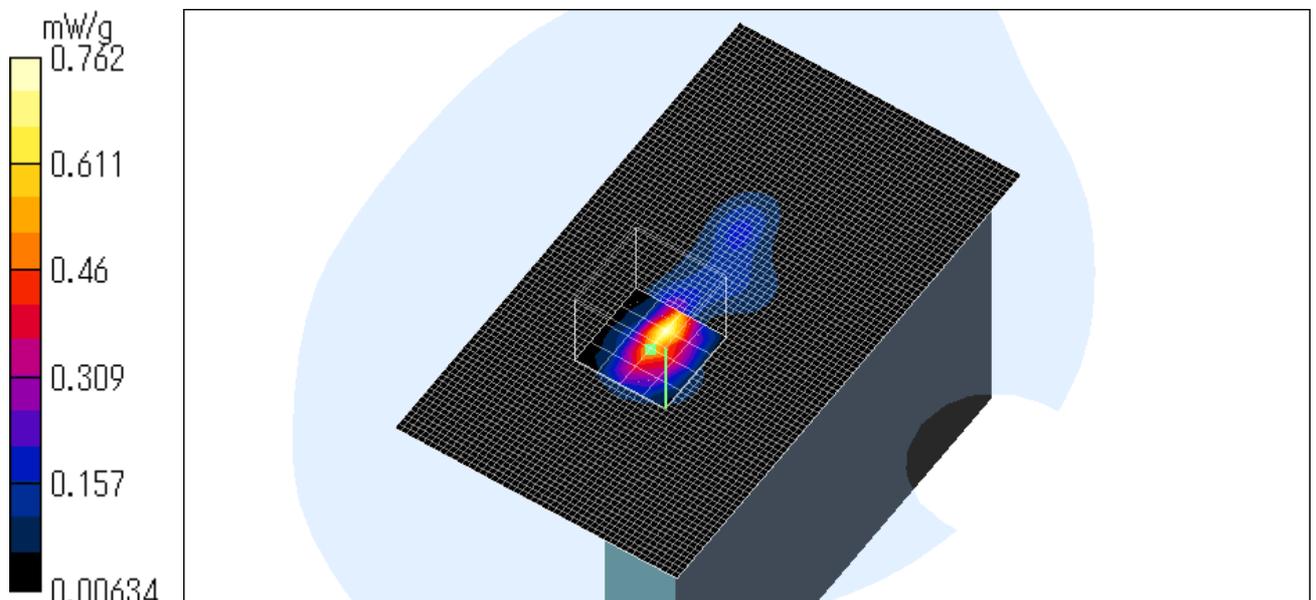

---

**PCG-1H1L/ Body / Left Side (Sub antenna) / DSSS / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0516 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.188 W/kg  
**SAR(1 g) = 0.0527 mW/g; SAR(10 g) = 0.0234 mW/g**  
Maximum value of SAR = 0.051 mW/g

Reference Value = 3.82 V/m  
Power Drift = -0.05 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

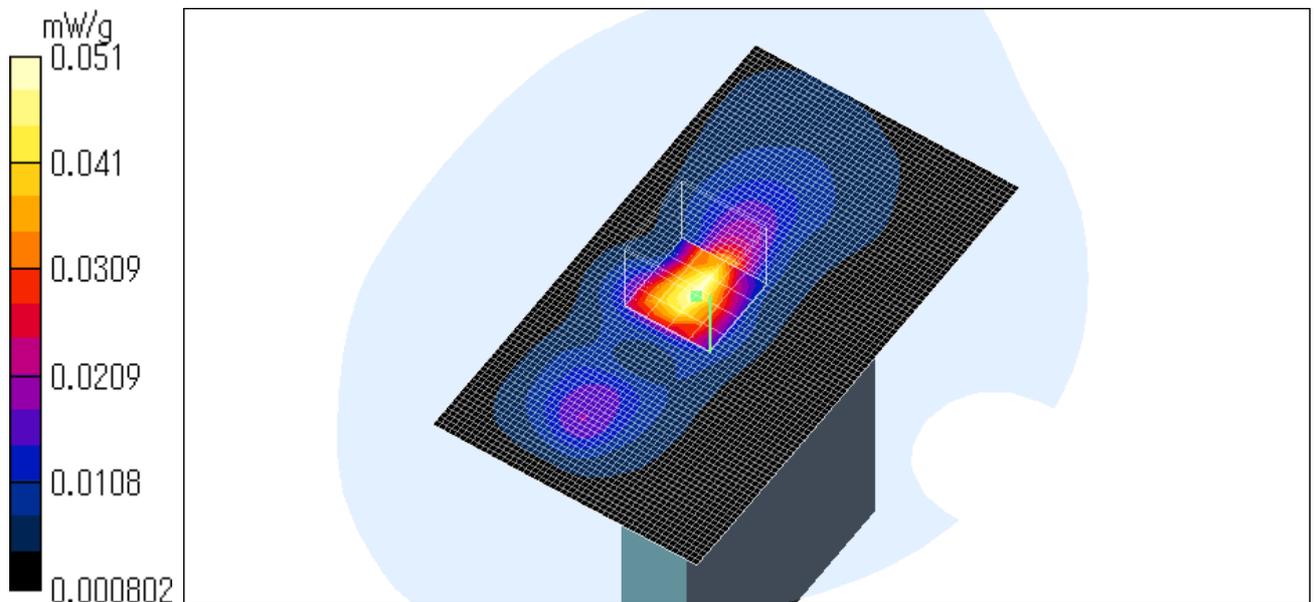

---

**PCG-1H1L/ Body / Front (Sub antenna) / DSSS / 2412MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 1.03 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 2.37 W/kg  
**SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.288 mW/g**  
Maximum value of SAR = 0.774 mW/g

Reference Value = 4.22 V/m  
Power Drift = 0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

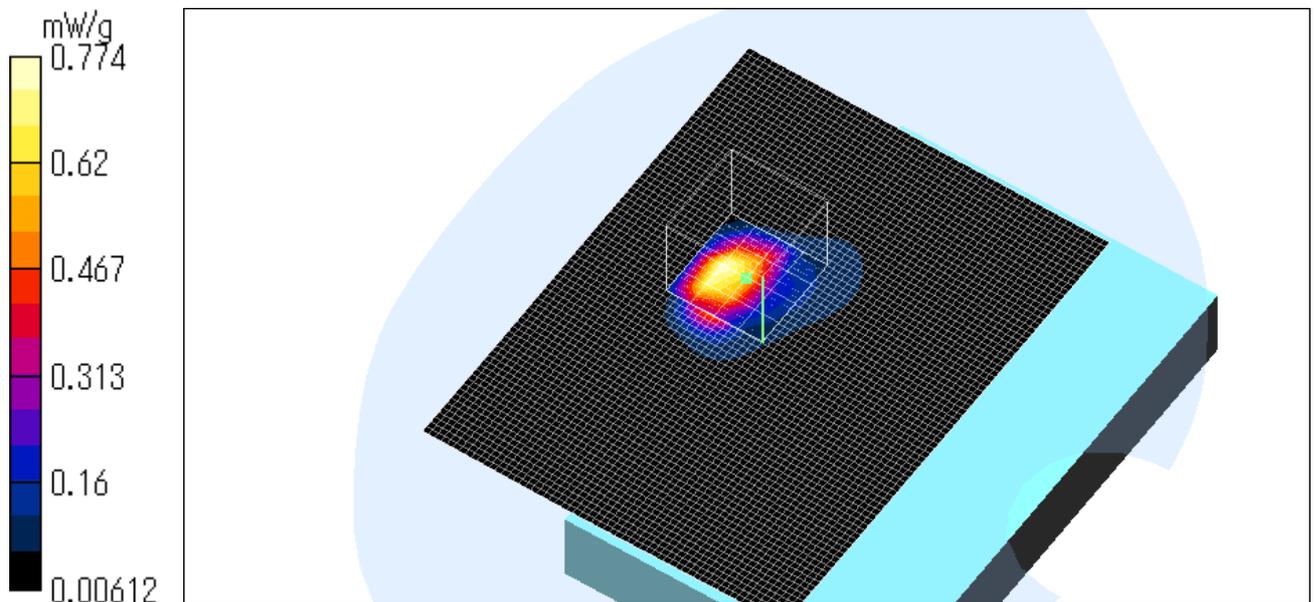

---

### PCG-1H1L/ Body / Front (Sub antenna) / DSSS / 2462MHz

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.614 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.48 W/kg  
**SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.169 mW/g**  
Maximum value of SAR = 0.542 mW/g

Reference Value = 4.49 V/m  
Power Drift = -0.08 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

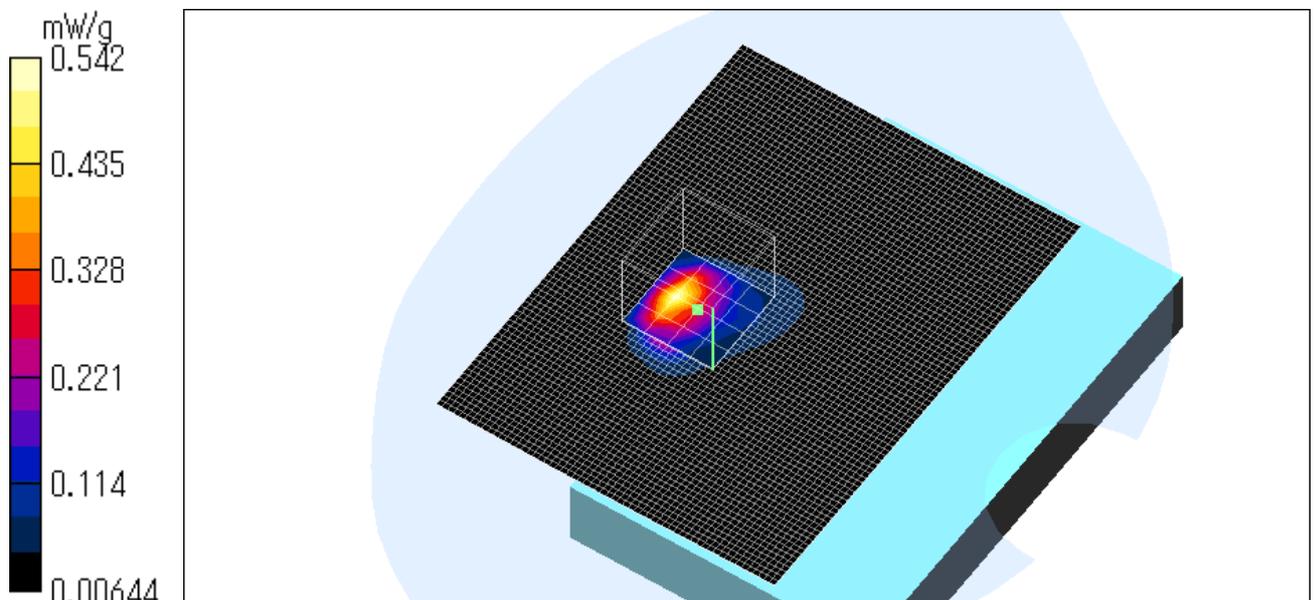

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.331 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.24 W/kg  
**SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.156 mW/g**  
Maximum value of SAR = 0.544 mW/g

Reference Value = 3.16 V/m  
Power Drift = 0.04 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

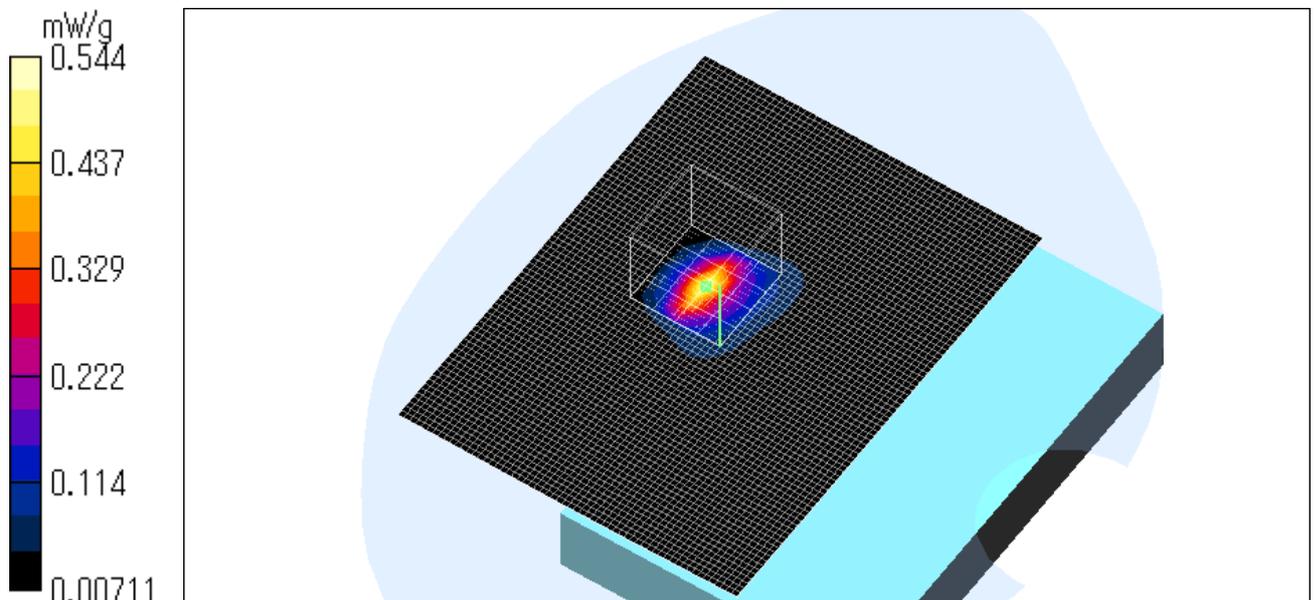

**PCG-1H1L/ Body / Back (Sub antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0158 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.0525 W/kg  
**SAR(1 g) = 0.0177 mW/g; SAR(10 g) = 0.0117 mW/g**  
Maximum value of SAR = 0.017 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.0223 W/kg  
**SAR(1 g) = 0.0126 mW/g; SAR(10 g) = 0.00931 mW/g**  
Maximum value of SAR = 0.0125 mW/g

Reference Value = 2.1 V/m  
Power Drift = -0.3 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

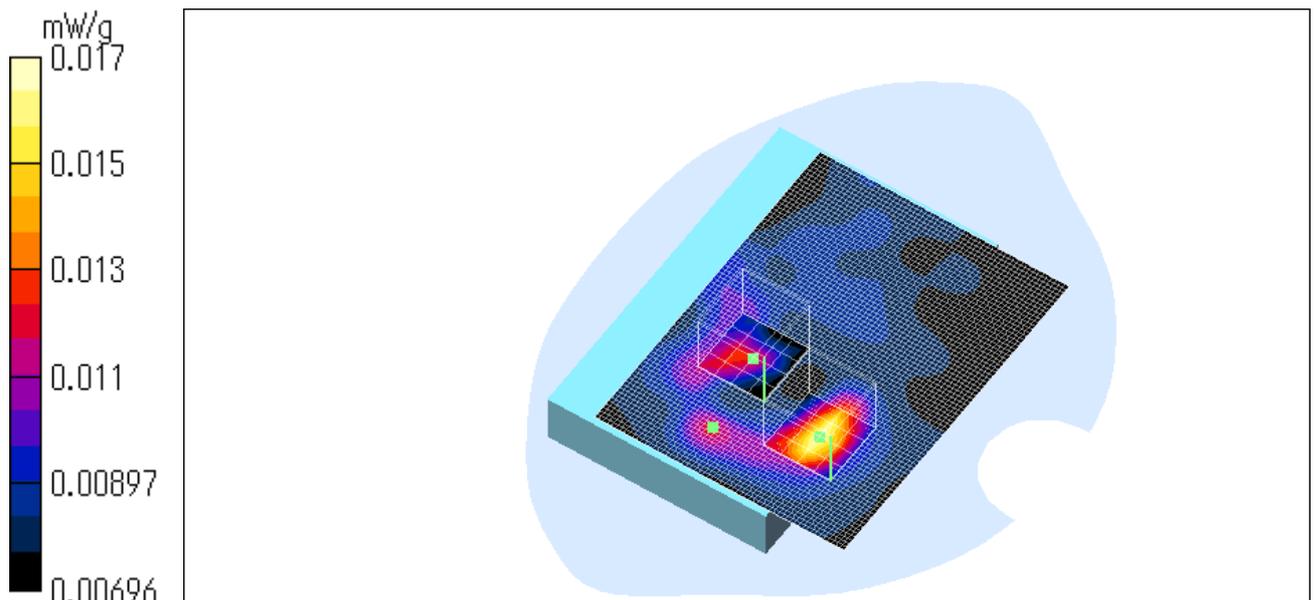

---

**PCG-1H1L/ Body / Top (Sub antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.115 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.847 W/kg  
**SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.084 mW/g**  
Maximum value of SAR = 0.24 mW

Reference Value = 6.68 V/m  
Power Drift = -0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

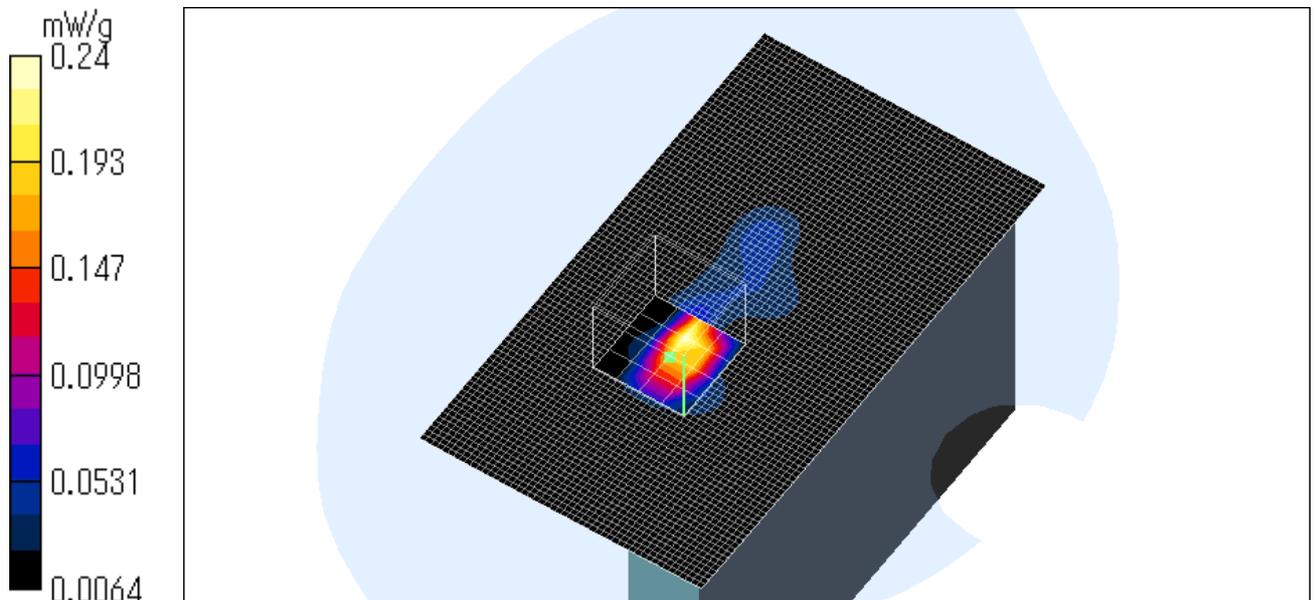

**PCG-1H1L/ Body / Left Side (Sub antenna) / OFDM 64QAM / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0215 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.0502 W/kg  
**SAR(1 g) = 0.0178 mW/g; SAR(10 g) = 0.00938 mW/g**  
Maximum value of SAR = 0.0198 mW/g

Reference Value = 2.56 V/m  
Power Drift = 0.1 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

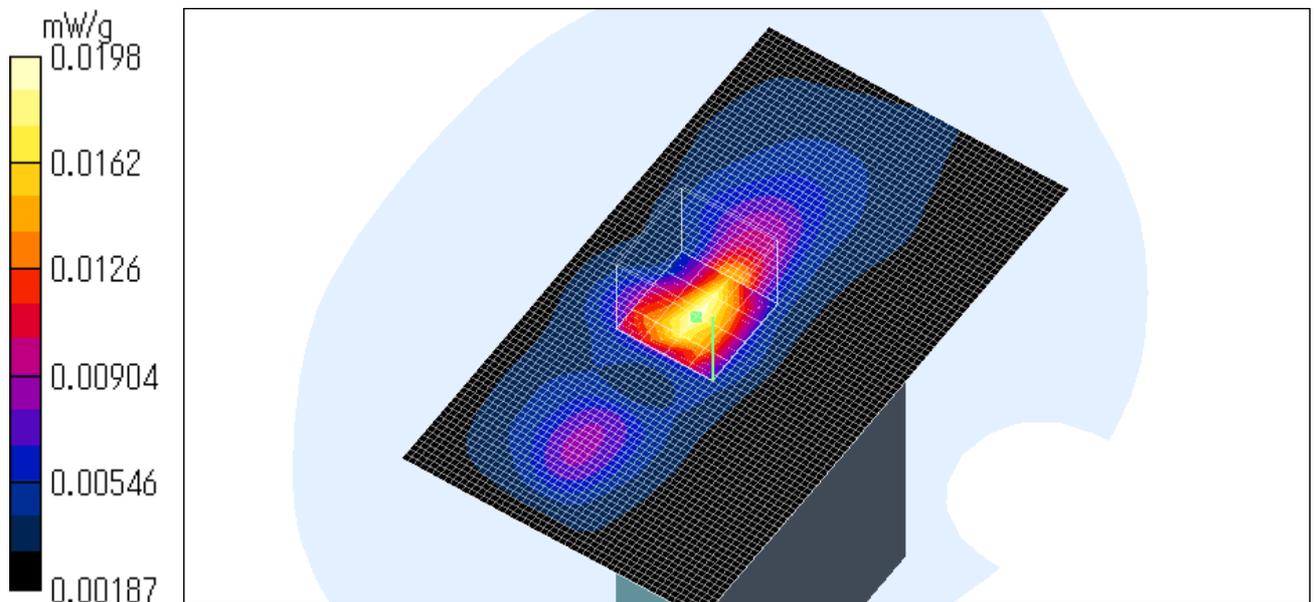

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM 64QAM / 24312MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.267 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1 W/kg  
**SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.134 mW/g**  
Maximum value of SAR = 0.467 mW/g

Reference Value = 3.92 V/m  
Power Drift = -0.1 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.7 degree.C , After 23.7 degree.C

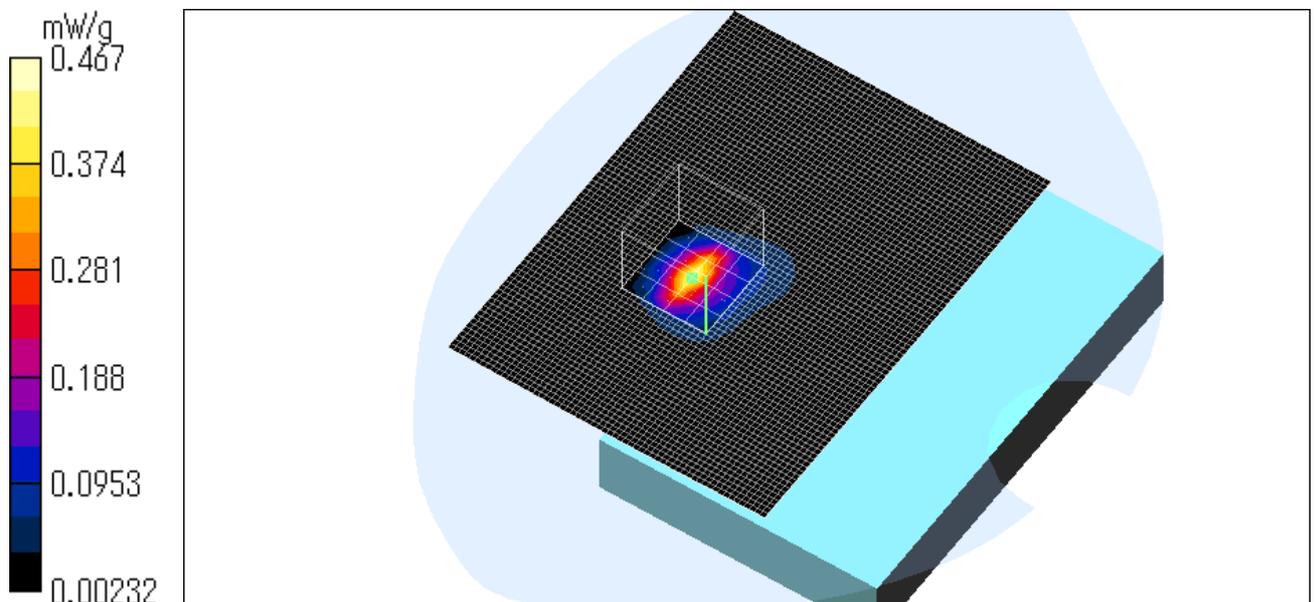

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM 64QAM / 24362MHz**

Crest factor: 1

Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.255 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.871 W/kg

**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.114 mW/g**

Maximum value of SAR = 0.402 mW/g


Reference Value = 3.69 V/m

Power Drift = -0.1 dB

Test Date = 06/29/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 23.7 degree.C , After 23.7 degree.C

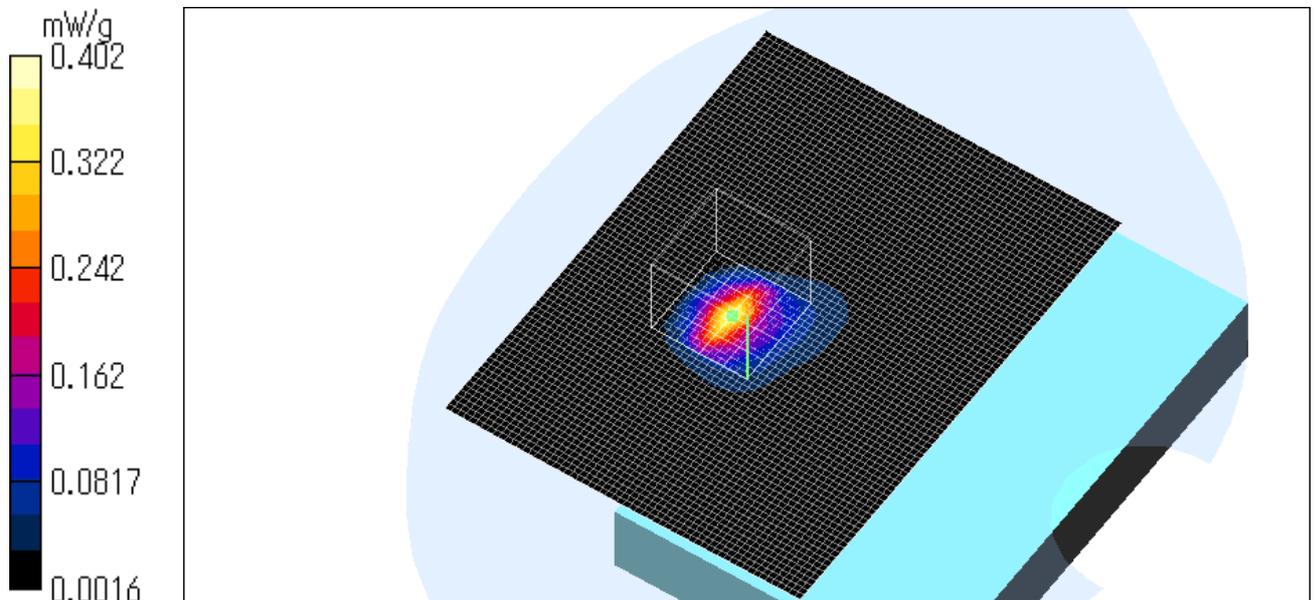

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

**DASY4 Configuration:**


- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.678 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.83 W/kg  
**SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.236 mW/g**  
Maximum value of SAR = 0.766 mW/g

Reference Value = 4.48 V/m  
Power Drift = -0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 24.0 degree.C , After 24.0 degree.C

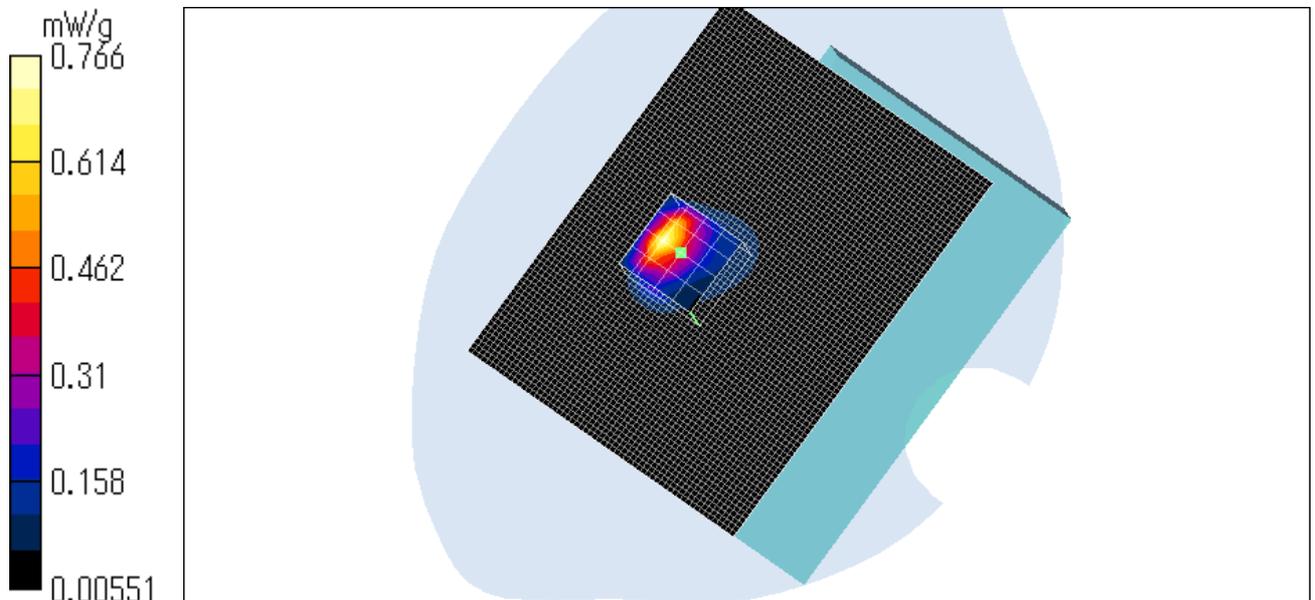

## PCG-1H1L/ Body / Back (Sub antenna) / OFDM QPSK / 2437MHz

Crest factor: 1

Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Phantom: SAM 1196

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR = 0.023 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0921 W/kg

**SAR(1 g) = 0.0261 mW/g; SAR(10 g) = 0.0144 mW/g**

Maximum value of SAR = 0.0236 mW/g

**Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.0439 W/kg

**SAR(1 g) = 0.0189 mW/g; SAR(10 g) = 0.0115 mW/g**

Maximum value of SAR = 0.0185 mW/g


Reference Value = 1.94 V/m

Power Drift = -0.09 dB

Test Date = 06/28/04

Ambient Temperature = 24.8 degree.c

Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

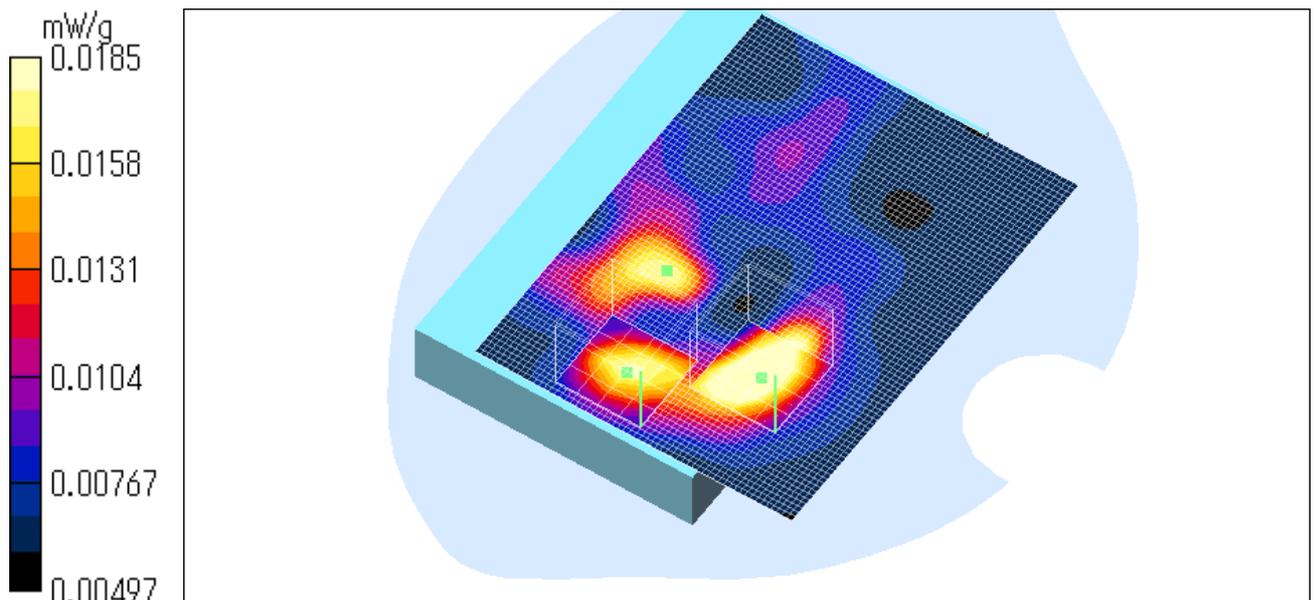

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

**PCG-1H1L/ Body / Top (Sub antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.3$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.301 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.46 W/kg  
**SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.182 mW/g**  
Maximum value of SAR = 0.629 mW/g

Reference Value = 10.1 V/m  
Power Drift = -0.2 dB

Test Date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

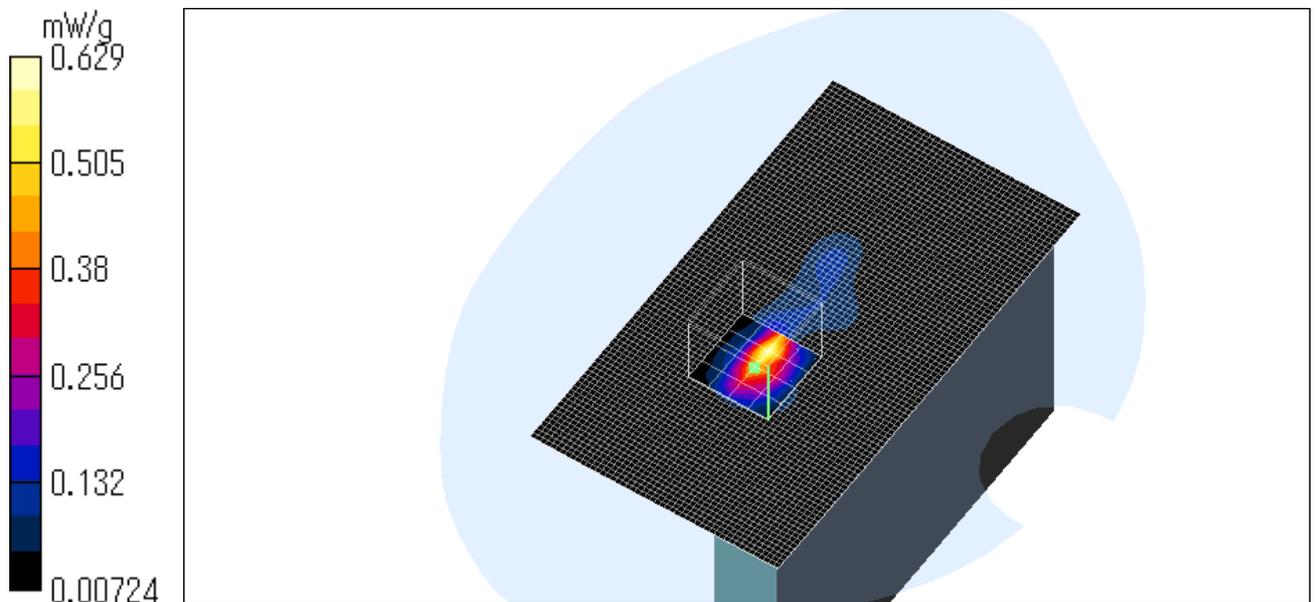

---

**PCG-1H1L/ Body / Left Side (Sub antenna) / OFDM QPSK / 2437MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x91x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.0408 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 0.166 W/kg  
**SAR(1 g) = 0.0418 mW/g; SAR(10 g) = 0.0188 mW/g**  
Maximum value of SAR = 0.0399 mW/g

Reference Value = 3.49 V/m  
Power Drift = -0.09 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.6 degree.C , After 23.6 degree.C

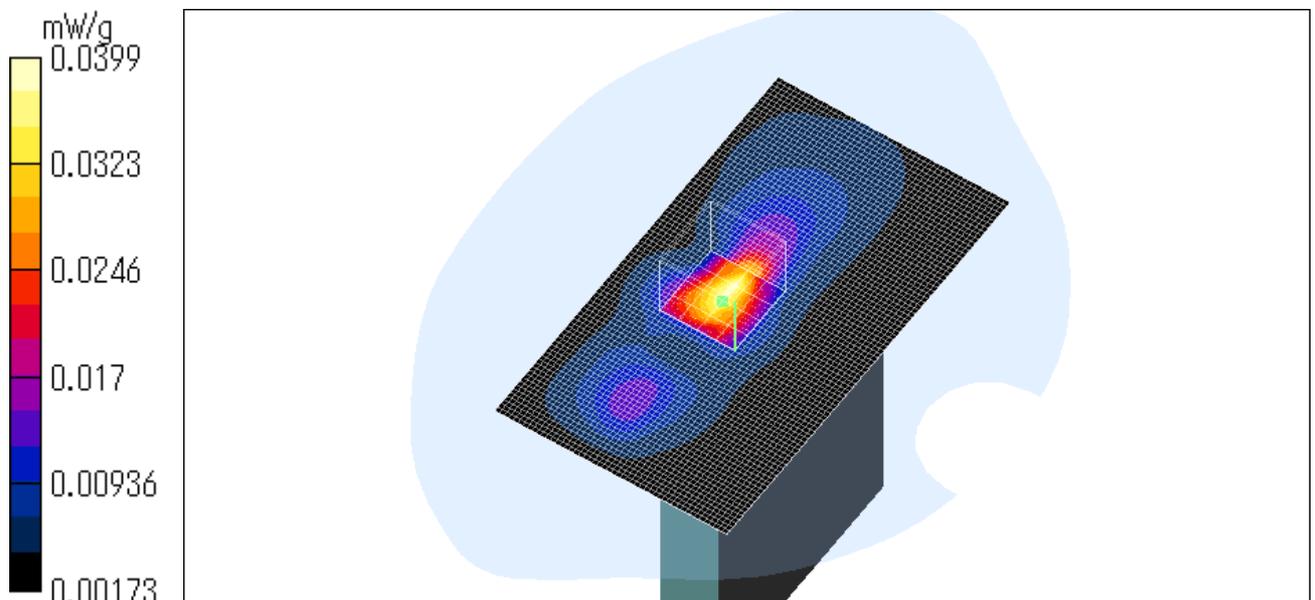

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM QPSK / 2412MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Phantom: SAM 1196
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.44 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.98 W/kg  
**SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.275 mW/g**  
Maximum value of SAR = 0.909 mW/g

Reference Value = 4.88 V/m  
Power Drift = -0.1 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.7 degree.C , After 23.8 degree.C

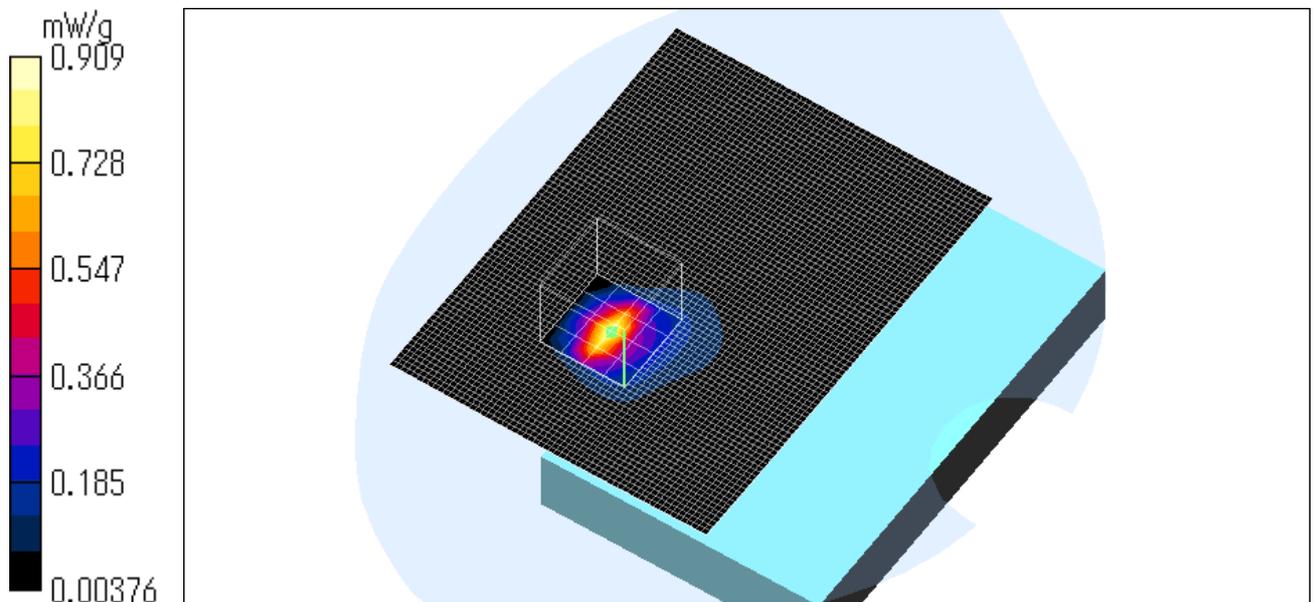

---

**PCG-1H1L/ Body / Front (Sub antenna) / OFDM QPSK / 2462MHz**

Crest factor: 1  
Medium: M2450 ( $\sigma = 1.99$  mho/m,  $\epsilon_r = 50.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.3, 4.3, 4.3); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (61x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 0.644 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.229 mW/g**  
Maximum value of SAR = 0.766 mW/g

Reference Value = 4.36 V/m  
Power Drift = 0.2 dB

Test Date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.8 degree.C , After 23.8 degree.C

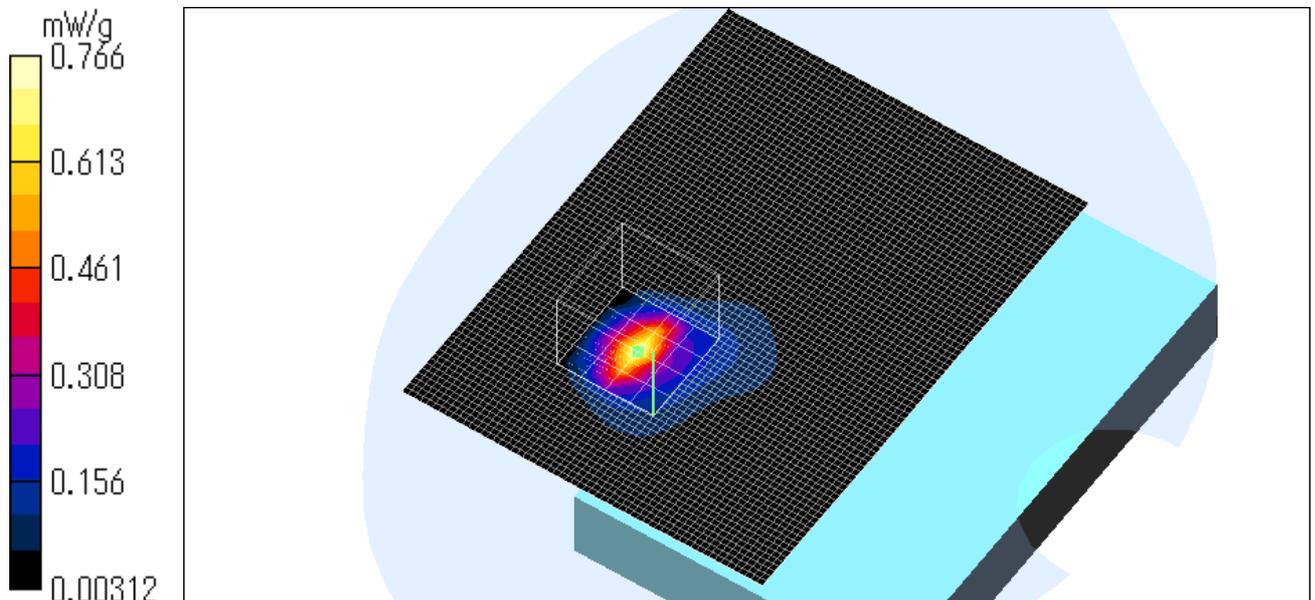

### **APPENDIX 3 : Validation Measurement data**

---

**System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW**

Crest factor: 1  
Medium: HSL2450 ( $\sigma = 1.82$  mho/m,  $\epsilon_r = 37.5$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

Dipole 2450 MHz;  
- Type: D2450V2; Serial: SN:713


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.7, 4.7, 4.7); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x51x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 15.8 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 28.4 W/kg  
**SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.1 mW/g**  
Maximum value of SAR = 14.9 mW/g

Reference Value = 91.1 V/m  
Power Drift = 0.04 dB

Test date = 06/28/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.3 degree.C , After 23.3 degree.C

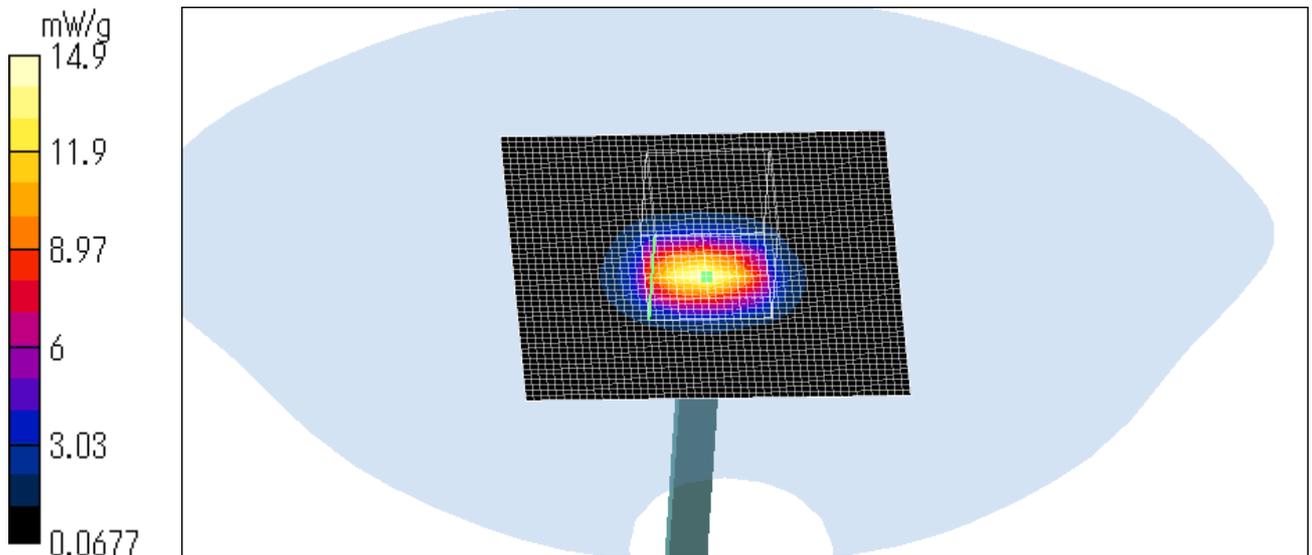

**System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW**

Crest factor: 1  
Medium: HSL2450 ( $\sigma = 1.87$  mho/m,  $\epsilon_r = 37.5$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

Dipole 2450 MHz;  
- Type: D2450V2; Serial: SN:713


DASY4 Configuration:  
- Probe: ET3DV6 - SN1685; ConvF(4.7, 4.7, 4.7); Calibrated: 2003/10/10  
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)  
- Phantom: SAM 1196  
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Area Scan (51x51x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR = 16.7 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 29.7 W/kg  
**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.4 mW/g**  
Maximum value of SAR = 15.5 mW/g

Reference Value = 92 V/m  
Power Drift = 0.06 dB

Test date = 06/29/04  
Ambient Temperature = 24.8 degree.c  
Liquid Temperature = Before 23.5 degree.C , After 23.5 degree.C

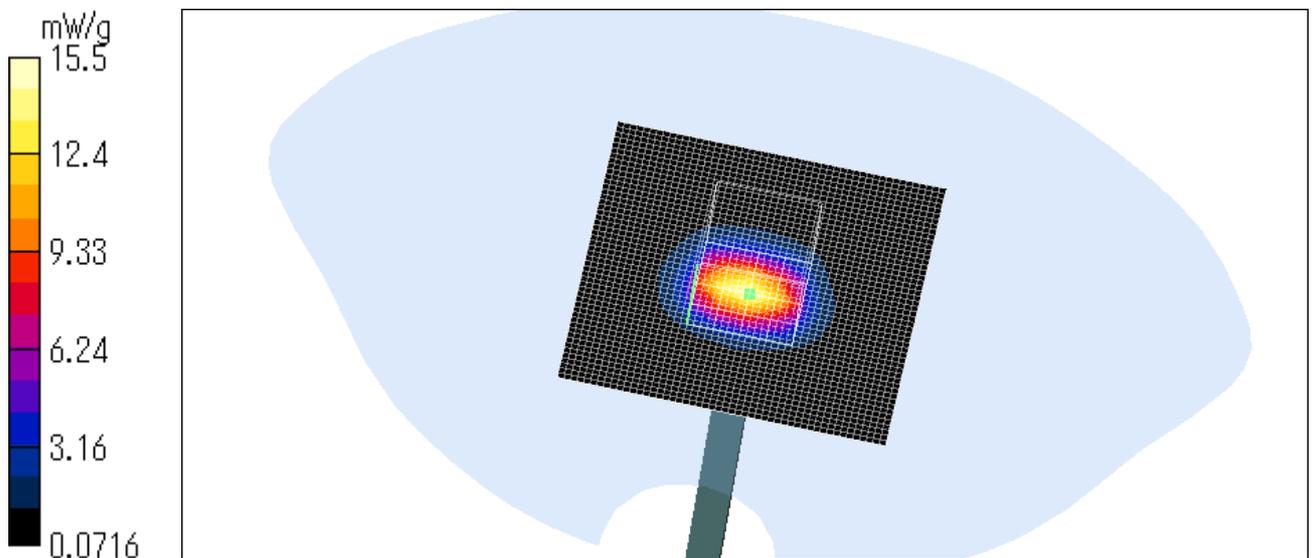

**APPENDIX 4 : System Validation Dipole (D2450V2,S/N: 713)**

---

## Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

---

### Calibration Certificate

#### 2450 MHz System Validation Dipole

Type:

D2450V2

Serial Number:

713

Place of Calibration:

Zurich

Date of Calibration:

November 15, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vetterli

Approved by:

Poloni Kofe

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Schmid & Partner  
Engineering AG**

*Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79*

---

**DASY**

**Dipole Validation Kit**

**Type: D2450V2**

**Serial: 713**

Manufactured: July 5, 2002  
Calibrated: November 15, 2002

## 1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity	<b>38.0</b>	± 5%
Conductivity	<b>1.87 mho/m</b>	± 10%

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.0 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

## 2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm <sup>3</sup> (1 g) of tissue:	<b>54.4 mW/g</b>
averaged over 10 cm <sup>3</sup> (10 g) of tissue:	<b>24.2 mW/g</b>

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124



Date/Time: 11/13/02 21:52:22

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN713\_SN1507\_HSL2450\_131102.da4


**DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713**  
**Program: Dipole Calibration; Pin = 250 mW; d = 10 mm**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL 2450 MHz ( $\sigma = 1.87$  mho/m,  $\epsilon = 38.03$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5, 5, 5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

**Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm  
Reference Value = 94.4 V/m  
Peak SAR = 29.6 mW/g  
SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.04 mW/g  
Power Drift = 0.01 dB

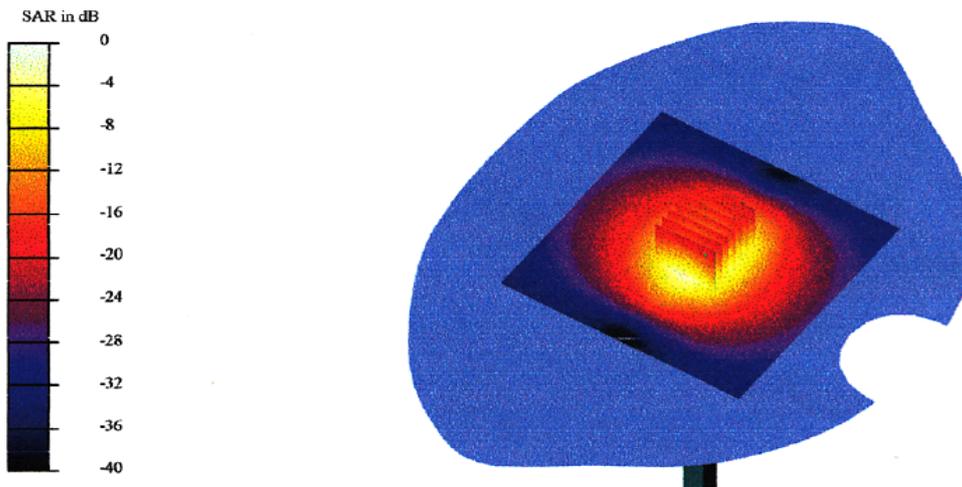

**UL Apex Co., Ltd.**



**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

13 Nov 2002 20:32:38  
CH1 S11 1 U FS 1: 51.254  $\alpha$  2.4414  $\alpha$  158.60 pH 2 450.000 000 MHz

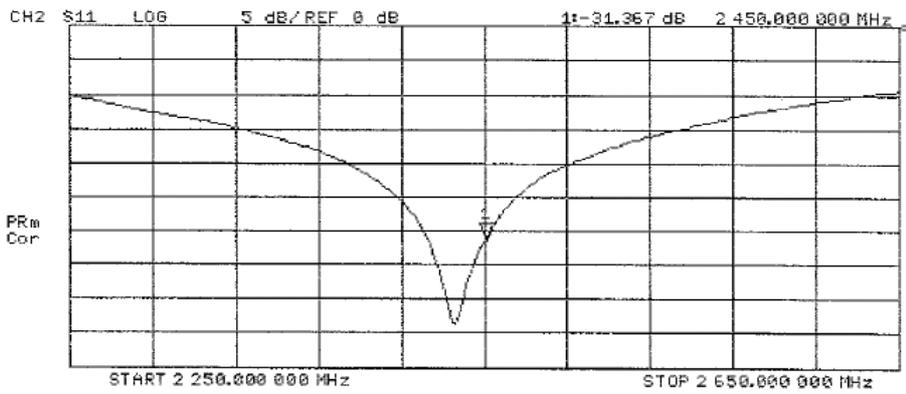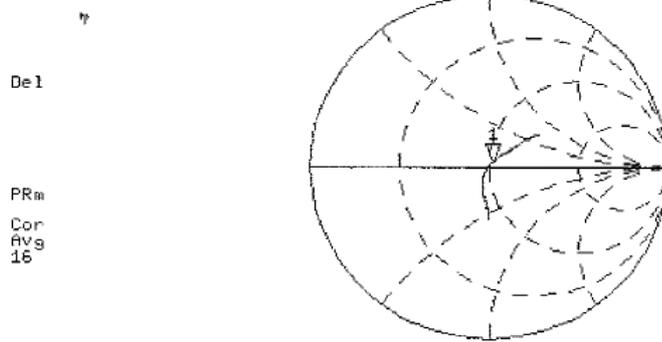

Date/Time: 11/15/02 14:25:17

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN713\_SN1507\_M2450\_141102.da4


**DUT: Dipole 2450 MHz Type & Serial Number: D2450V2 - SN713**  
**Program: Dipole Calibration; Pin = 250 mW; d = 10 mm**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz ( $\sigma = 1.96$  mho/m,  $\epsilon = 51.15$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.5, 4.5, 4.5); Calibrated: 1/24/2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN410; Calibrated: 7/18/2002
- Phantom: SAM 4.0 - TP:1006
- Software: DASY4, V4.0 Build 35

**Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm  
Reference Value = 95.2 V/m  
Peak SAR = 25 mW/g  
SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.99 mW/g  
Power Drift = 0.02 dB

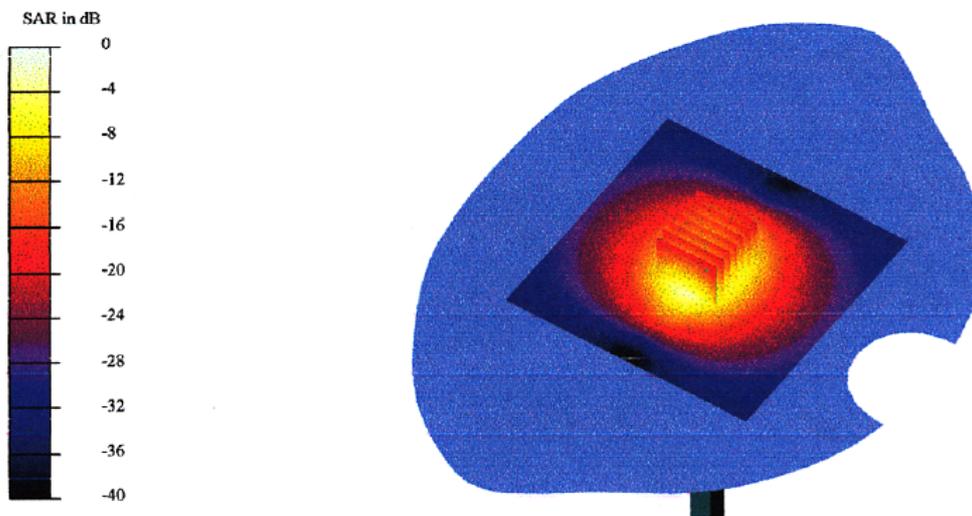


**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

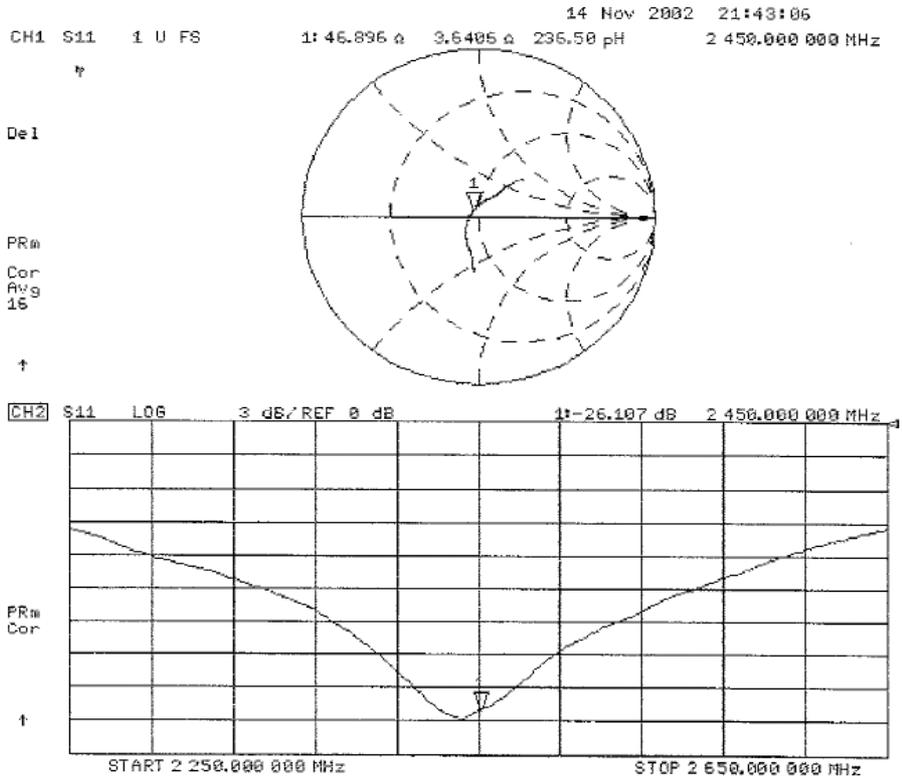

**APPENDIX 5 : Dosimetric E-Field Probe Calibration (ET3DV6,S/N: 1685)**

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

Schmid & Partner Engineering AG

**s p e a g**

---

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, http://www.speag.com

## IMPORTANT NOTICE

### USAGE OF PROBES IN ORGANIC SOLVENTS

Diethylene Glycol Monobuthy Ether (the basis for liquids above 1 GHz), as many other organic solvents, is a very effective softener for synthetic materials. These solvents can cause irreparable damage to certain SPEAG products, except those which are explicitly declared as compliant with organic solvents.

**Compatible Probes:**

- ET3DV6
- ET3DV6R
- ES3DV2
- ER3DV6
- H3DV6

**Important Note for ET3DV6 Probes:**  
**The ET3DV6 probes shall not be exposed to solvents longer than necessary for the measurements and shall be cleaned daily after use with warm water and stored dry.**

**s p e a g**

---

Schmid & Partner Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, http://www.speag.com

Schmid & Partner Engineering AG

Technical Note 01.06.15-1

June 2002

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland

**Client**            **UL Apex (MTT)**

CALIBRATION CERTIFICATE			
Object(s)	ET3DV6 - SN:1685		
Calibration procedure(s)	QA CAL-01 v2 Calibration procedure for dosimetric E-field probes		
Calibration date:	October 10, 2003		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.			
All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.			
Calibration Equipment used (M&TE critical for calibration)			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	In house check: Oct 03
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03
Calibrated by:	Name Nico Vetterli	Function Technician	Signature 
Approved by:	Name Katja Pokovic	Function Laboratory Director	Signature 
Date issued: October 23, 2003			
This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.			

Schmid & Partner Engineering AG

**s p e a g**

---

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, <http://www.speag.com>

# Probe ET3DV6

## SN:1685

Manufactured:	April 3, 2002
Last calibration:	May 10, 2002
Recalibrated:	October 10, 2003

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

***Head Office EMC Lab.***

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8116  
Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

## DASY - Parameters of Probe: ET3DV6 SN:1685

### Sensitivity in Free Space

NormX	<b>1.60</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>1.65</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.56</b> $\mu\text{V}/(\text{V}/\text{m})^2$

### Diode Compression

DCP X	<b>95</b>	mV
DCP Y	<b>95</b>	mV
DCP Z	<b>95</b>	mV

### Sensitivity in Tissue Simulating Liquid

Head **900 MHz**  $\epsilon_r = 41.5 \pm 5\%$   $\sigma = 0.97 \pm 5\%$  mho/m  
Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>6.6</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>6.6</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.26</b>
ConvF Z	<b>6.6</b> $\pm 9.5\%$ (k=2)	Depth <b>3.07</b>

Head **1800 MHz**  $\epsilon_r = 40.0 \pm 5\%$   $\sigma = 1.40 \pm 5\%$  mho/m  
Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>5.2</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>5.2</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.41</b>
ConvF Z	<b>5.2</b> $\pm 9.5\%$ (k=2)	Depth <b>2.77</b>

### Boundary Effect

Head	<b>900 MHz</b>	Typical SAR gradient: 5 % per mm	
	Probe Tip to Boundary	<b>1 mm</b>	<b>2 mm</b>
	SAR <sub>pe</sub> [%] Without Correction Algorithm	8.9	5.4
	SAR <sub>pe</sub> [%] With Correction Algorithm	0.4	0.5

Head	<b>1800 MHz</b>	Typical SAR gradient: 10 % per mm	
	Probe Tip to Boundary	<b>1 mm</b>	<b>2 mm</b>
	SAR <sub>pe</sub> [%] Without Correction Algorithm	11.8	8.4
	SAR <sub>pe</sub> [%] With Correction Algorithm	0.4	0.2

### Sensor Offset

Probe Tip to Sensor Center	<b>2.7</b>	mm
Optical Surface Detection	<b>1.6 <math>\pm</math> 0.2</b>	mm

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685


October 10, 2003

### Receiving Pattern ( $\phi, \theta = 0^\circ$ )

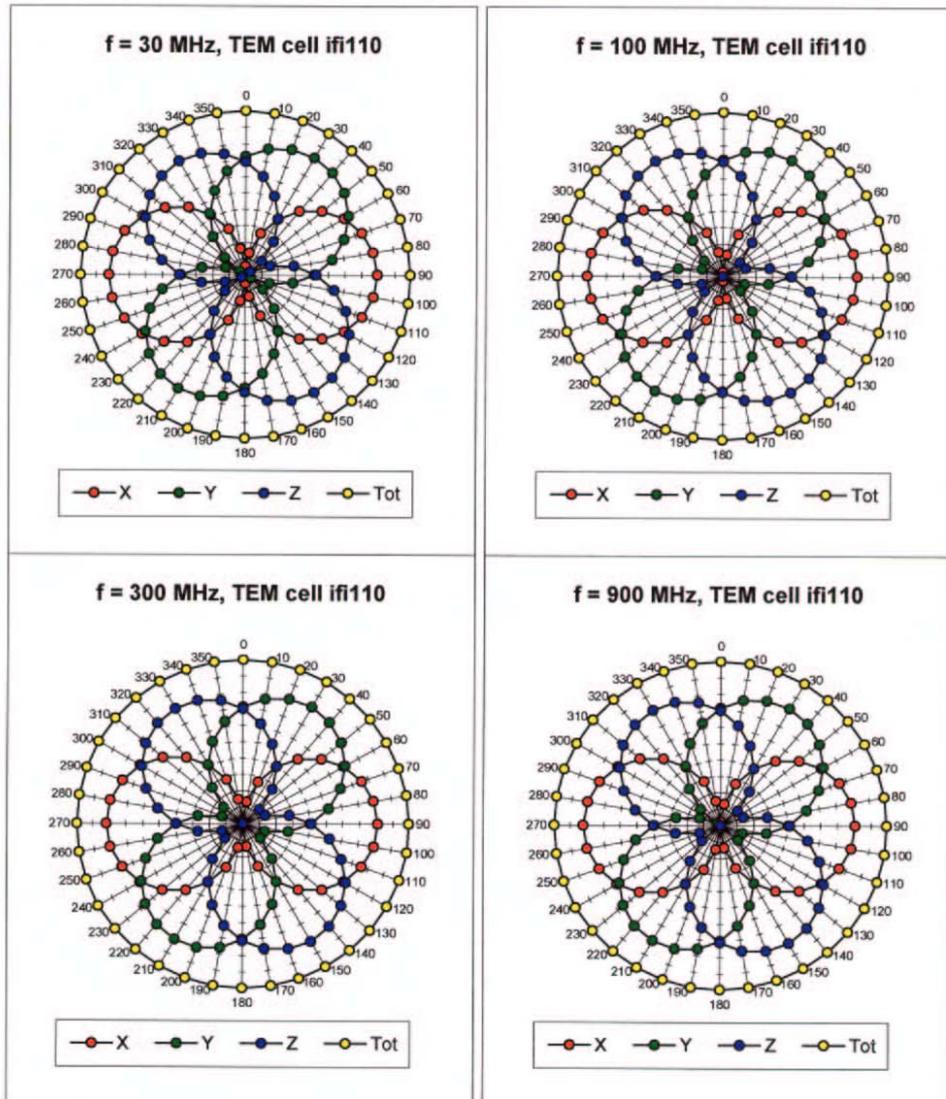


ET3DV6 SN:1685

October 10, 2003

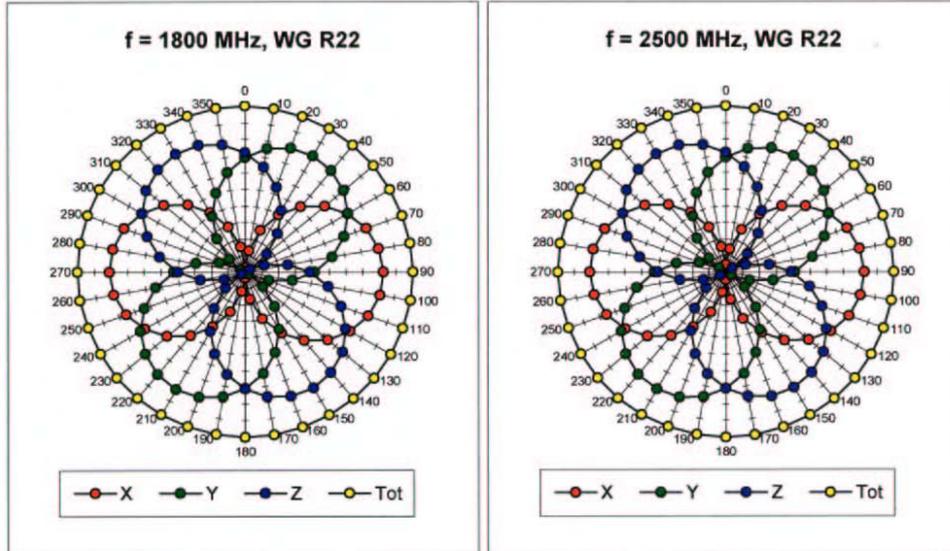

### Isotropy Error ( $\phi$ ), $\theta = 0^\circ$

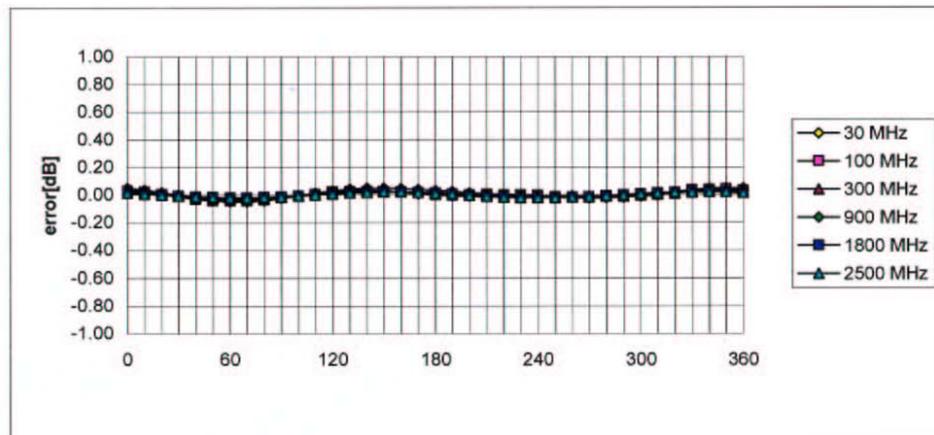


ET3DV6 SN:1685

October 10, 2003

## Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)

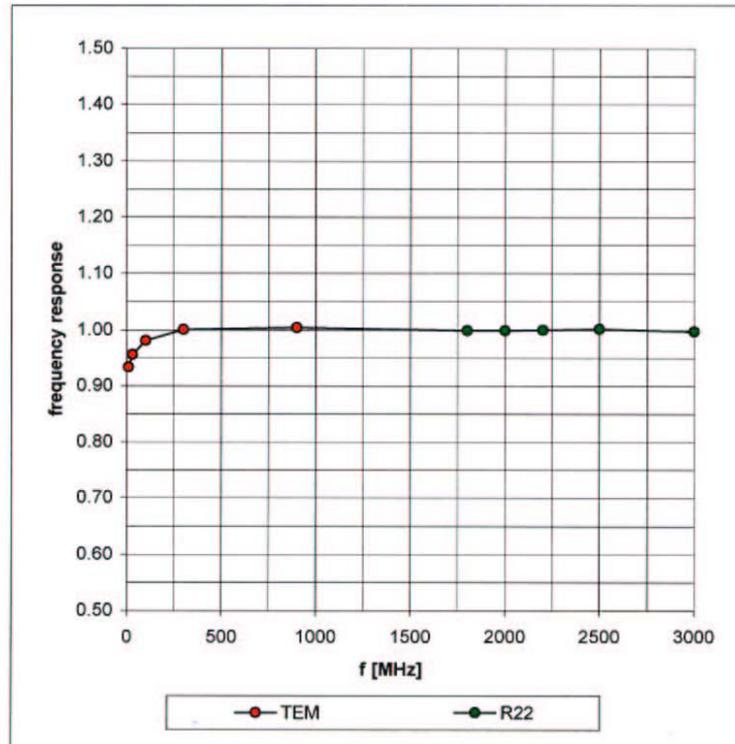

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003


### Dynamic Range f(SAR<sub>brain</sub>) ( Waveguide R22 )

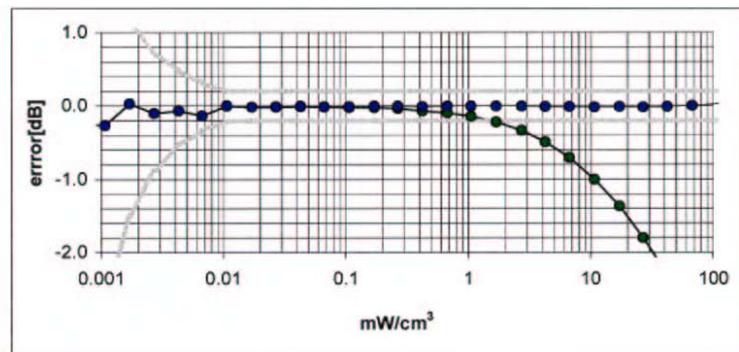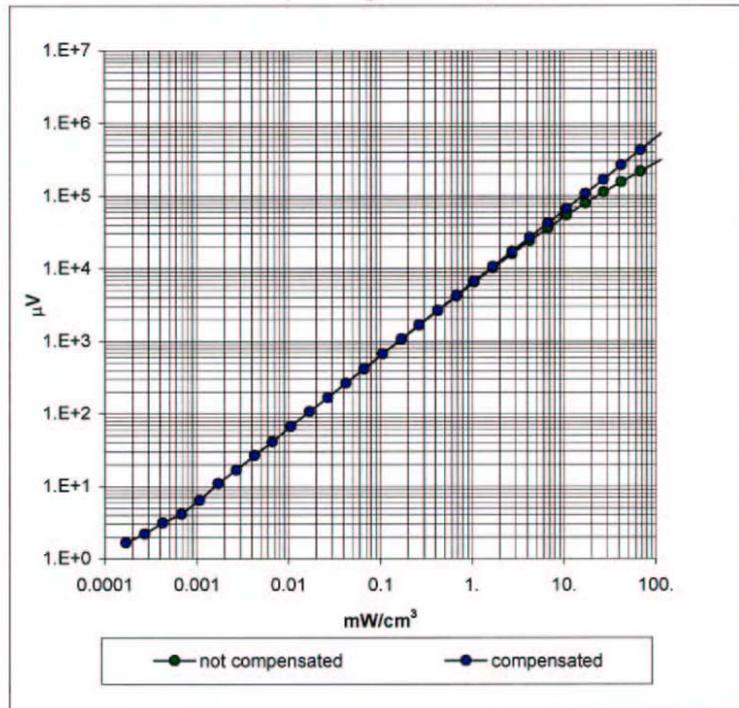

ET3DV6 SN:1685

October 10, 2003

### Conversion Factor Assessment

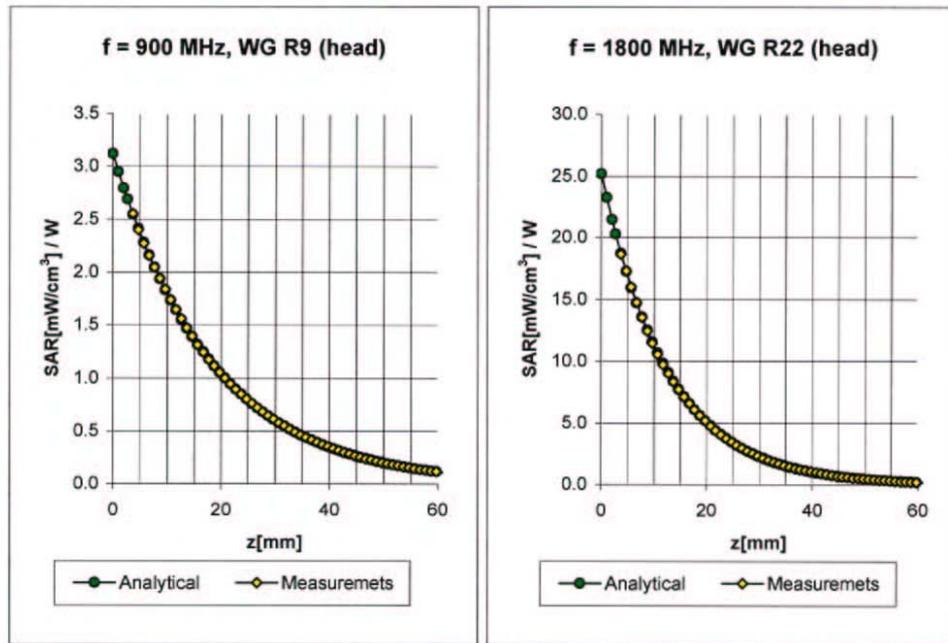

Head                      900 MHz                       $\epsilon_r = 41.5 \pm 5\%$                        $\sigma = 0.97 \pm 5\%$  mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>6.6</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>6.6</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.26</b>
ConvF Z	<b>6.6</b> $\pm 9.5\%$ (k=2)	Depth <b>3.07</b>

Head                      1800 MHz                       $\epsilon_r = 40.0 \pm 5\%$                        $\sigma = 1.40 \pm 5\%$  mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>5.2</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>5.2</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.41</b>
ConvF Z	<b>5.2</b> $\pm 9.5\%$ (k=2)	Depth <b>2.77</b>

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

### Conversion Factor Assessment

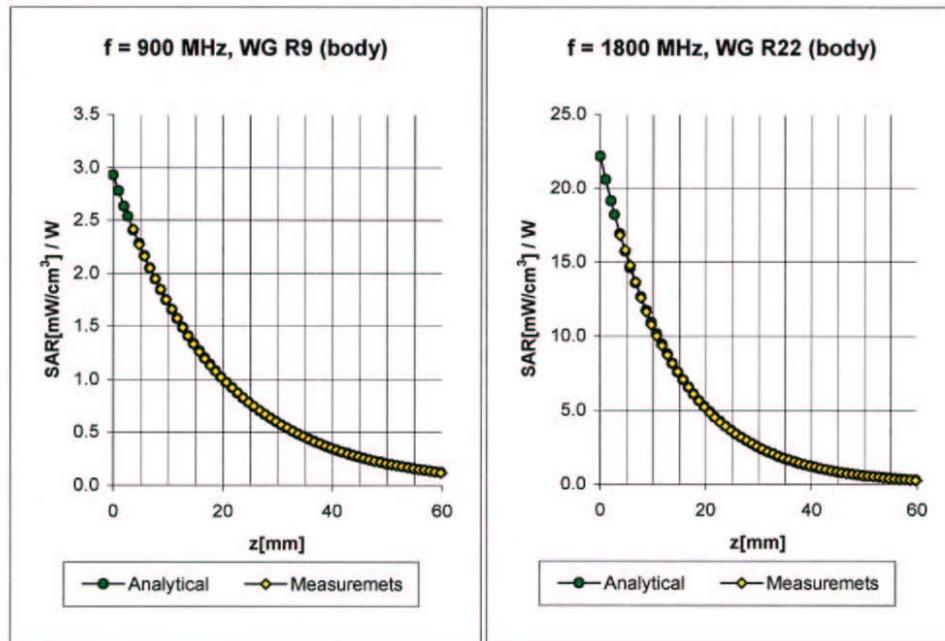

Body                    900 MHz                     $\epsilon_r = 55.0 \pm 5\%$                      $\sigma = 1.05 \pm 5\%$  mho/m

Valid for f=800-1000 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	<b>6.4</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>6.4</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.27</b>
ConvF Z	<b>6.4</b> $\pm 9.5\%$ (k=2)	Depth <b>3.22</b>

Body                    1800 MHz                     $\epsilon_r = 53.3 \pm 5\%$                      $\sigma = 1.52 \pm 5\%$  mho/m

Valid for f=1710-1910 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	<b>4.7</b> $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	<b>4.7</b> $\pm 9.5\%$ (k=2)	Alpha <b>0.48</b>
ConvF Z	<b>4.7</b> $\pm 9.5\%$ (k=2)	Depth <b>2.94</b>

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

### Conversion Factor Assessment

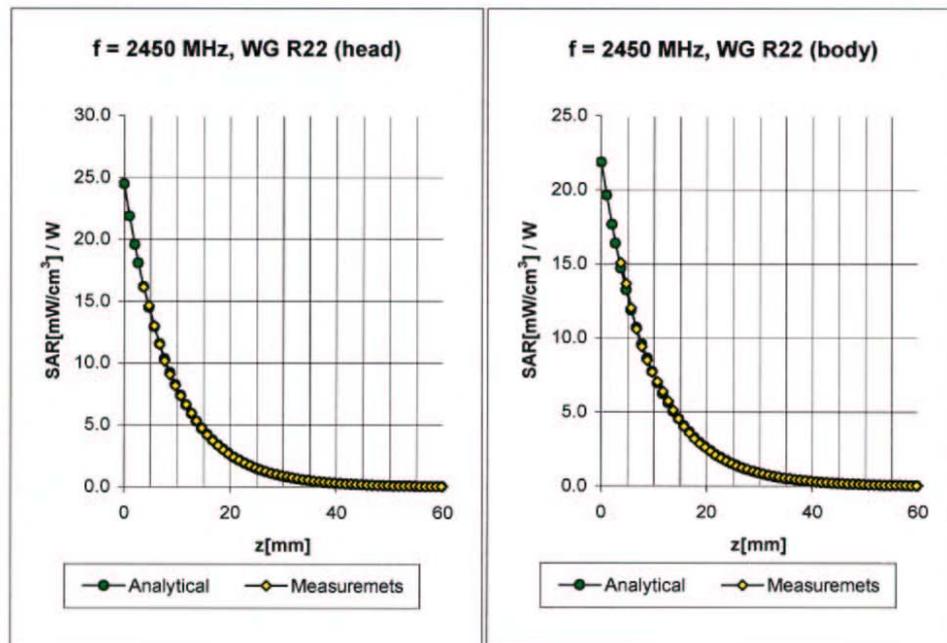

**Head**                      **2450 MHz**                       $\epsilon_r = 39.2 \pm 5\%$                        $\sigma = 1.80 \pm 5\%$  mho/m

Valid for f=2400-2500 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	<b>4.7</b> $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	<b>4.7</b> $\pm 9.5\%$ (k=2)	Alpha	<b>0.78</b>
ConvF Z	<b>4.7</b> $\pm 9.5\%$ (k=2)	Depth	<b>2.04</b>

**Body**                      **2450 MHz**                       $\epsilon_r = 52.7 \pm 5\%$                        $\sigma = 1.95 \pm 5\%$  mho/m

Valid for f=2400-2500 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	<b>4.3</b> $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	<b>4.3</b> $\pm 9.5\%$ (k=2)	Alpha	<b>0.80</b>
ConvF Z	<b>4.3</b> $\pm 9.5\%$ (k=2)	Depth	<b>1.89</b>

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116


Facsimile: +81 596 24 8124

ET3DV6 SN:1685

October 10, 2003

## Deviation from Isotropy in HSL

Error ( $\theta\phi$ ),  $f = 900$  MHz

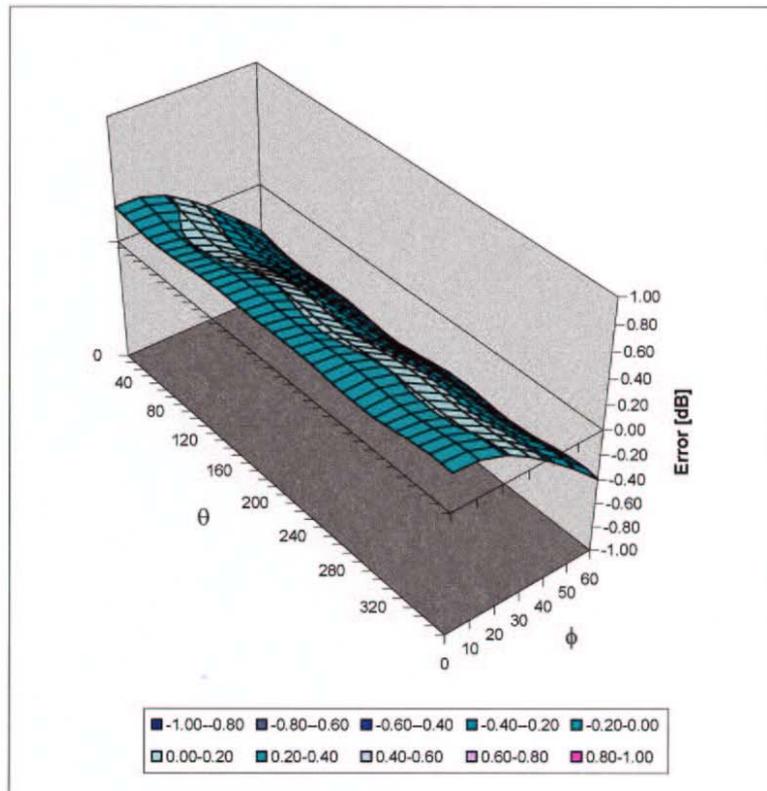

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124