

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Portable Bluetooth Speaker
Model No.	:	PULSE4
Trade Mark	:	JBL
FCC ID	:	APIJBLPULSE4
IC	:	6132A-JBLPULSE4
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan
City, Guangdong Province, China, 523808

Tel: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	5
2.	General test information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test	7
2.4.	Block diagram of EUT configuration for test	7
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty	9
3.	Equipment used during test	9
4.	Radiated emission	11
4.1.	Block diagram of test setup	11
4.2.	Limit	12
4.3.	Test Procedure	13
4.4.	Test result	15
5.	Power Line Conducted Emission	26
5.1.	Block diagram of test setup	26
5.2.	Power Line Conducted Emission Limits	26
5.3.	Test Procedure	26
5.4.	Test Result	27

TEST REPORT DECLARE

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Portable Bluetooth Speaker
Model No.	:	PULSE4
Trade mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No.:	DDT-R19032112-5E4		
Date of Receipt:	Mar. 25, 2019	Date of Test:	Mar. 25, 2019 ~ Jun. 05, 2019
	Nov 21, 2019		Nov 21, 2019 ~ Jan 05, 2020
	Apr. 21, 2020		Apr. 21, 2020 ~ Apr. 30, 2020

Prepared By:

Talent Zhang

Talent Zhang /Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jul. 01, 2019	Sam Li
Rev.01	Added two new battery model based on the original report. The data of the new battery model is added in this report.	Jan. 05, 2020	Talent Zhang
Rev.02	Added mainboard based on the original report. The data of mainboard is added in this report.	Jun. 10, 2020	Talent Zhang

1. Summary of test results

Description of Test Item	Standard	Results
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	PASS

Note 1: There are two kinds of products for two factories in this report, the main PCB of the products, Battery Model, software and hardware versions are different, but antenna type and RF module are the same, so only radiated emission and Power Line Conducted Emissions were tested respectively and recorded in this report.

Note 2: This report added mainboard based on the original report, this change doesn't influence the RF performance, so only power line conducted and radiated emission (below 1GHz) were tested and updated in this report.

2. General test information

2.1. Description of EUT

EUT* Name	: Portable Bluetooth Speaker
Model Number	: PULSE4
EUT function description	: Please reference user manual of this device
Power supply	: DC 5 V from external AC Adapter DC 3.6 V Polymer Li-ion built-in battery
Radio Specification	: Bluetooth V4.2
Operation frequency	: 2402MHz-2480MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data rate	: 1 Mbps, 2 Mbps, 3 Mbps
Antenna Type	: Dedicated FPCB antenna, maximum PK gain: 3.25 dBi
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
USB cable	Harman	N/A	Length: 1.2m, unshielded	N/A
Battery Pack	ICON ENERGY SYSTEM (SHENZHEN) CO., LTD	IY1091	3.6V, 7260mAh, 26.136Wh	Alternative for factory 1
Battery Pack	ICON ENERGY SYSTEM (SHENZHEN) CO., LTD	IAA033NA	3.6V, 7260mAh	
Battery Pack	SUNWODA Electronic Co., Ltd	SUN-INTE-168	3.6V, 7260mAh, 26.14Wh	Alternative for factory 2
Battery Pack	SUNWODA Electronic Co., Ltd	SUN-INTE-277	1S3P 3.6V 7260mAh Lithium-ion Battery	


New mainboard:

Description of Accessories	Hardware Version
mainboard	V1.0

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300
Adapter	SAMSUNG	EP-TA200	N/A	Input: 100-240~, 50/60Hz, 0.5A; Output: 9V/1.67A or 5V/2A

2.4. Block diagram of EUT configuration for test



Test software: FCC Tool.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	CH0	2402
	CH39	2441
	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	CH0	2402
	CH39	2441
	CH78	2480
8DPSK hopping off Tx mode	CH0	2402
	CH39	2441
	CH78	2480

Note: For $\pi/4$ -DQPSK its same modulation type with 8DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, except the RF output power, all other items final test was only performed with the worst case 8DPSK and GFSK.

2.5. Deviations of test standard

No Deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

FCC Designation Number: CN1182; FCC Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for radio frequency (RBW<20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz) 4.40 dB (6 GHz-18 GHz) 3.54 dB (18 GHz-26 GHz) 4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 29, 2019	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 25, 2019	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 29, 2019	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 25, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jun. 28, 2019	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jun. 28, 2019	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Jun. 25, 2019	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 29, 2019	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2019	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 29, 2019	1 Year

Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 25, 2019	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 15, 2019	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2019	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 15, 2019	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Sep. 29, 2019	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 29, 2019	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Sep. 29, 2019	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 29, 2019	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 29, 2019	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Sep. 29, 2019	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
EMI Test Receiver	R&S	ESU8	100316	Sep. 29, 2019	1 Year
LISN 1	R&S	ENV216	101109	Sep. 29, 2019	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 29, 2019	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 29, 2019	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 29, 2019	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A


4. Radiated emission

4.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

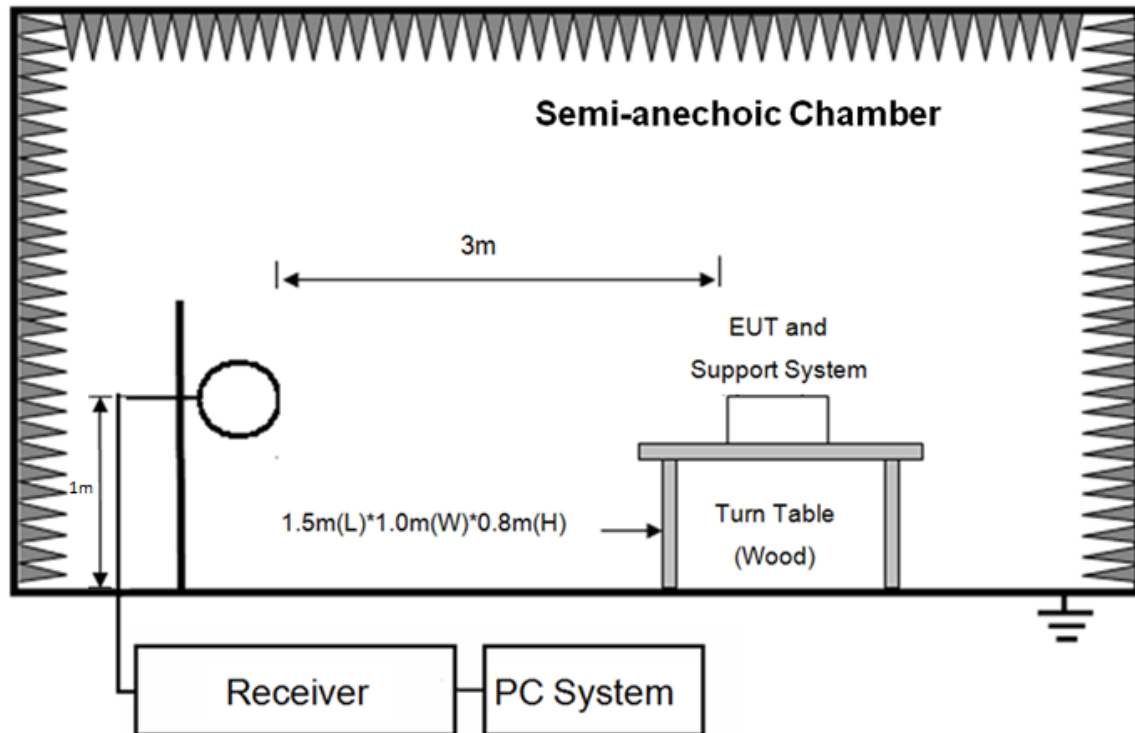

In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

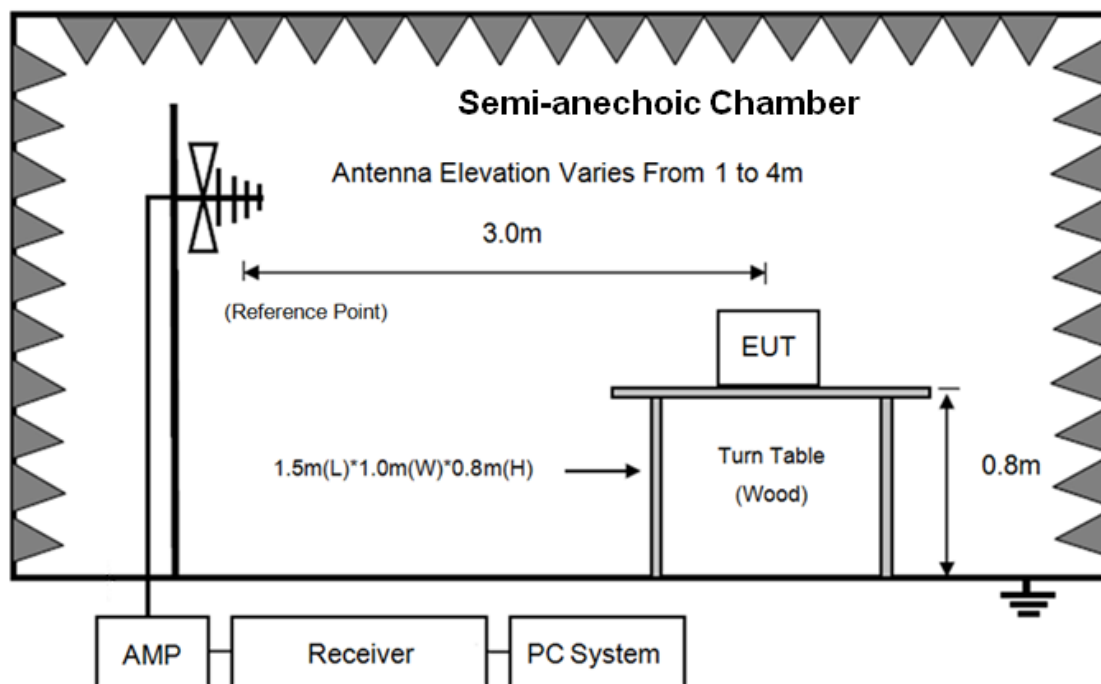

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

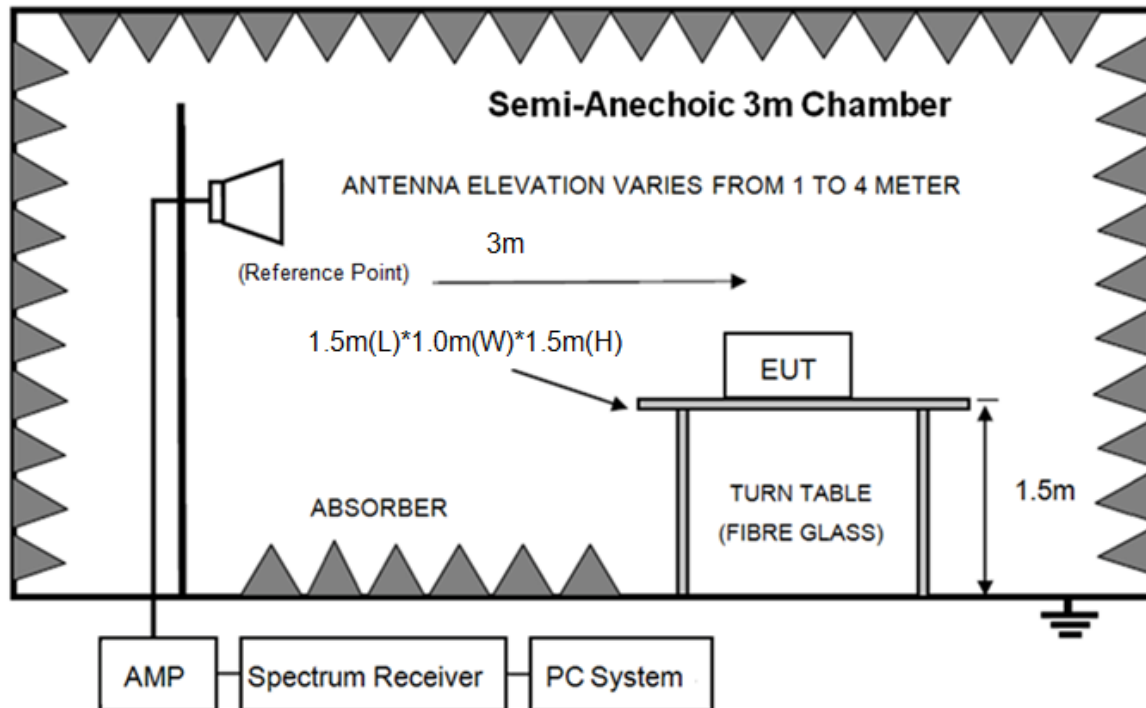

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

4.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

4.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1G.
- (2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the trilob Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz,110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure).

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

4.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK, Tx 2402 MHz mode.


Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

Original data:

TR-4-E-009 Radiated Emission Test Result**Test Site** : DDT 3m Chamber 1#D:\2019 RE1# Report Data\Q18121103-1E Y400Wireless\FCC
BELOW1G.EM6**Test Date** : 2019-06-04**Tested By** : Talent**EUT** : Portable Bluetooth Speaker**Model Number** : PULSE4**Power Supply** : Battery**Test Mode** : Tx mode**Condition** : Temp:24.5°C, Humi:55%, Press:100.1kPa **Antenna/Distance** : 2018 VULB 9163 1#/3m/VERTICAL**Memo** : Factory 1

Data: 9

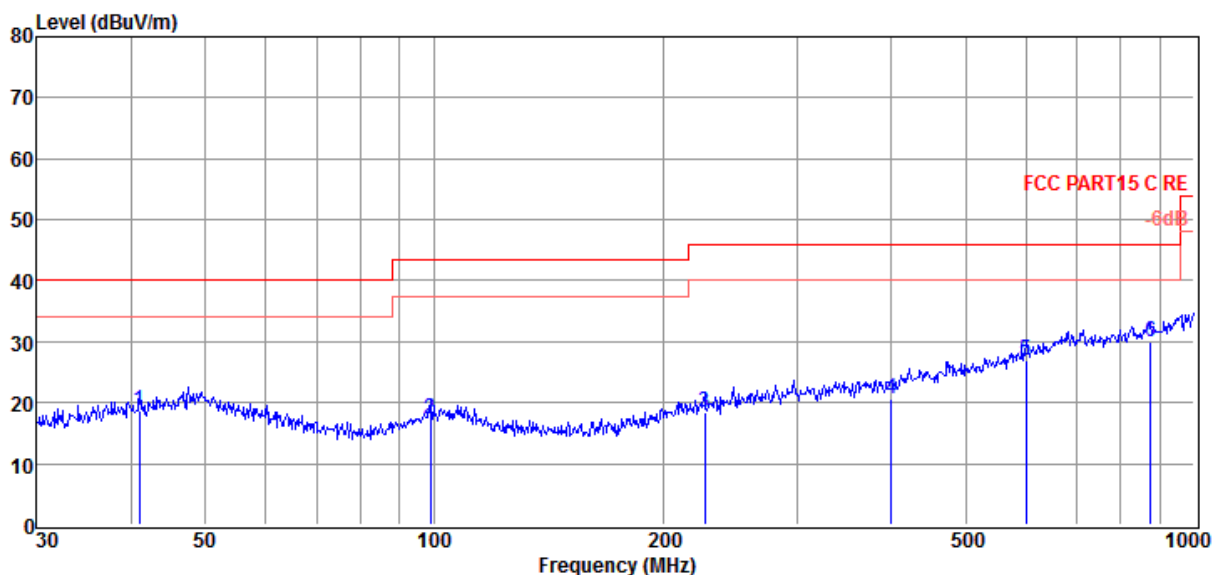

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	40.99	1.28	13.53	3.78	18.59	40.00	-21.41	QP	VERTICAL
2	98.83	1.65	11.51	4.20	17.36	43.50	-26.14	QP	VERTICAL
3	226.89	1.41	12.21	4.91	18.53	46.00	-27.47	QP	VERTICAL
4	399.03	-0.39	15.59	5.51	20.71	46.00	-25.29	QP	VERTICAL
5	601.43	2.29	18.52	6.10	26.91	46.00	-19.09	QP	VERTICAL
6	875.25	1.76	21.46	6.81	30.03	46.00	-15.97	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 RE1# Report Data\Q18121103-1E Y400Wireless\FCC
BELOW1G.EM6

Test Date : 2019-06-04

Tested By : Talent

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.5°C, Humi:55%, Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/HORIZONTAL

Memo : Factory 1

Data: 10

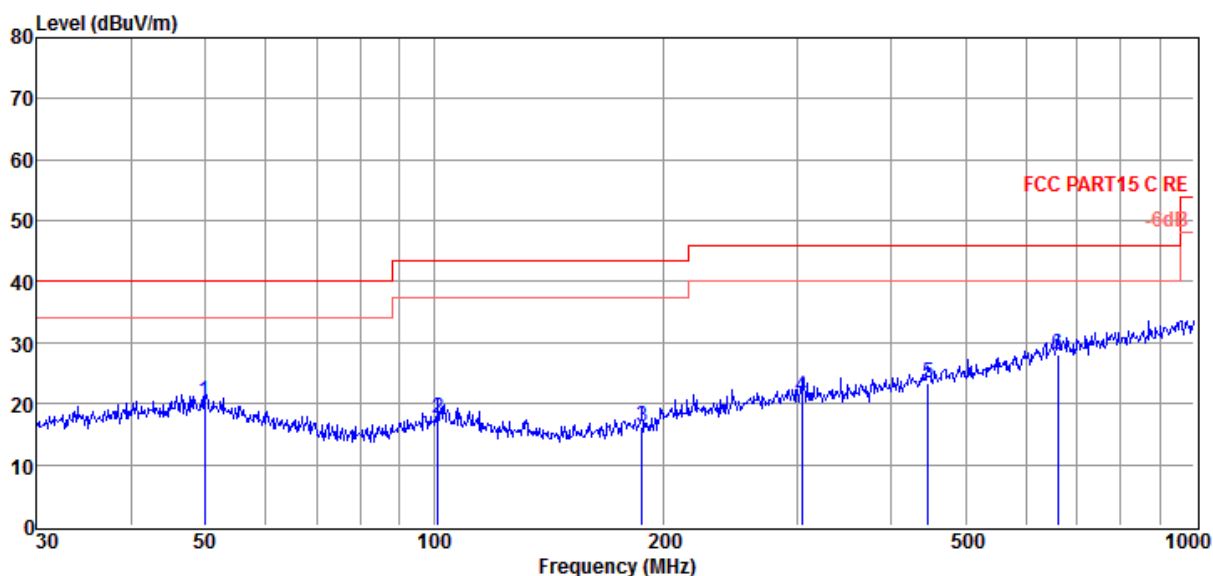

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	49.88	1.85	14.59	3.87	20.31	40.00	-19.69	QP	HORIZONTAL
2	101.29	1.68	11.71	4.21	17.60	43.50	-25.90	QP	HORIZONTAL
3	187.75	1.44	9.93	4.76	16.13	43.50	-27.37	QP	HORIZONTAL
4	304.61	1.92	14.08	5.20	21.20	46.00	-24.80	QP	HORIZONTAL
5	446.41	1.25	16.34	5.66	23.25	46.00	-22.75	QP	HORIZONTAL
6	661.15	2.17	19.51	6.27	27.95	46.00	-18.05	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 RE1# Report Data\Q18121103-1E Y400Wireless\FCC
BELOW1G.EM6

Test Date : 2019-06-03

Tested By : Talent

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/HORIZONTAL

Memo : Factory 2

Data: 7

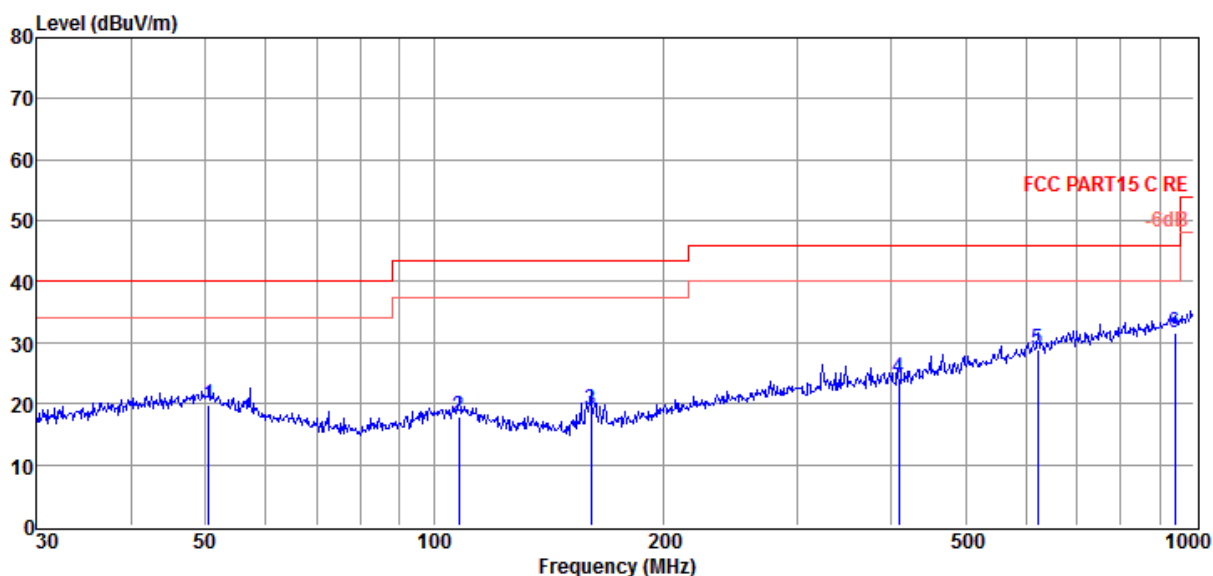

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	50.59	1.62	14.40	3.87	19.89	40.00	-20.11	QP	HORIZONTAL
2	107.89	1.96	11.78	4.25	17.99	43.50	-25.51	QP	HORIZONTAL
3	160.91	5.65	8.81	4.60	19.06	43.50	-24.44	QP	HORIZONTAL
4	408.95	2.79	15.75	5.54	24.08	46.00	-21.92	QP	HORIZONTAL
5	622.89	3.69	18.89	6.16	28.74	46.00	-17.26	QP	HORIZONTAL
6	942.13	2.24	22.18	7.06	31.48	46.00	-14.52	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 RE1# Report Data\Q18121103-1E Y400Wireless\FCC
BELOW1G.EM6

Test Date : 2019-06-03

Tested By : Talent

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/VERTICAL

Memo : Factory 2

Data: 8

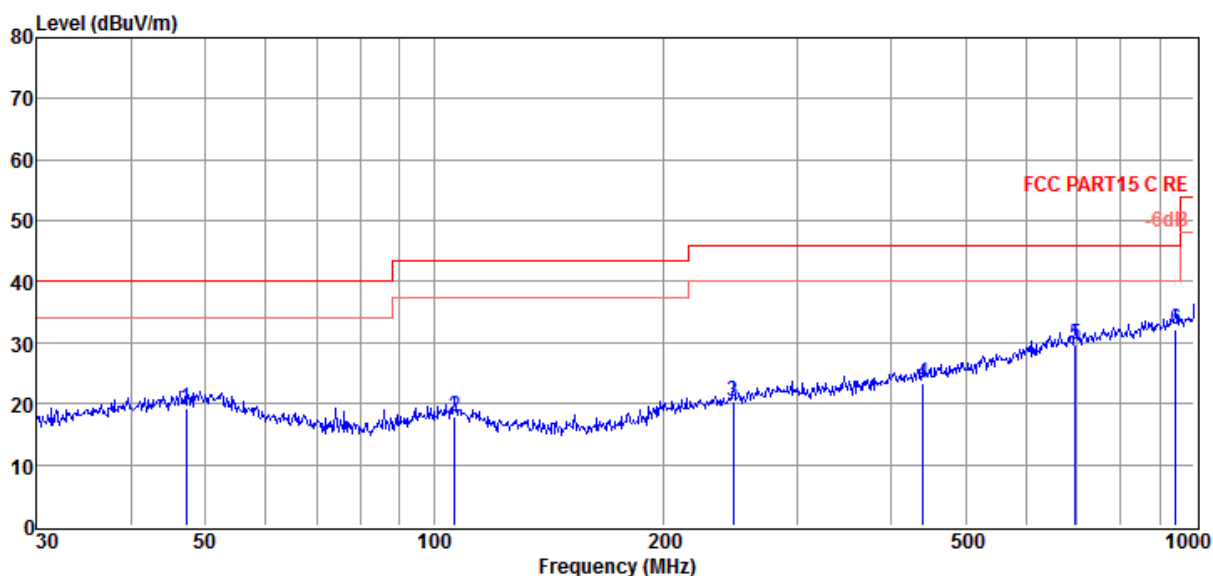

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	47.16	1.09	14.29	3.84	19.22	40.00	-20.78	QP	VERTICAL
2	106.39	1.77	11.76	4.24	17.77	43.50	-25.73	QP	VERTICAL
3	247.68	2.56	12.77	4.99	20.32	46.00	-25.68	QP	VERTICAL
4	440.20	1.59	16.24	5.64	23.47	46.00	-22.53	QP	VERTICAL
5	696.86	3.29	20.05	6.37	29.71	46.00	-16.29	QP	VERTICAL
6	945.44	2.84	22.21	7.06	32.11	46.00	-13.89	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Battery: IAA033NA:

TR-4-E-009 Radiated Emission Test Result**Test Site** : DDT 3m Chamber 1#D:\2019 RE1# Report Data\Q19103115-1E PULSE4\FCC
BELOW1G.EM6**Test Date** : 2019-11-25**Tested By** : Talent**EUT** : Portable Bluetooth Speaker**Model Number** : PULSE4**Power Supply** : Battery**Test Mode** : TX mode**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa**Antenna/Distance** : 2018 VULB 9163 1#/3m/VERTICAL**Memo** :

Data: 1

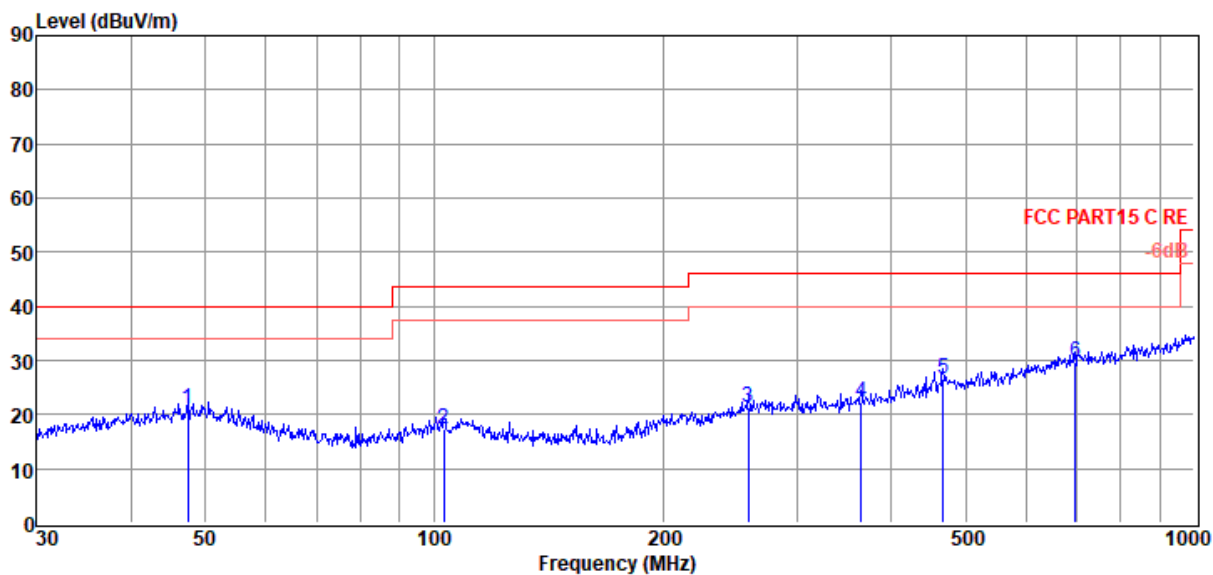

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	47.49	2.76	14.32	3.85	20.93	40.00	-19.07	QP	VERTICAL
2	103.08	1.25	11.73	4.22	17.20	43.50	-26.30	QP	VERTICAL
3	259.23	3.39	13.06	5.04	21.49	46.00	-24.51	QP	VERTICAL
4	364.26	1.94	15.08	5.40	22.42	46.00	-23.58	QP	VERTICAL
5	467.24	4.09	16.64	5.72	26.45	46.00	-19.55	QP	VERTICAL
6	696.86	3.14	20.05	6.37	29.56	46.00	-16.44	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 RE1# Report Data\Q19103115-1E PULSE4\FCC
BELOW1G.EM6

Test Date : 2019-11-25

Tested By : Talent

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : Battery


Test Mode : TX mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2018 VULB 9163 1#/3m/HORIZONTAL

Memo :

Data: 2

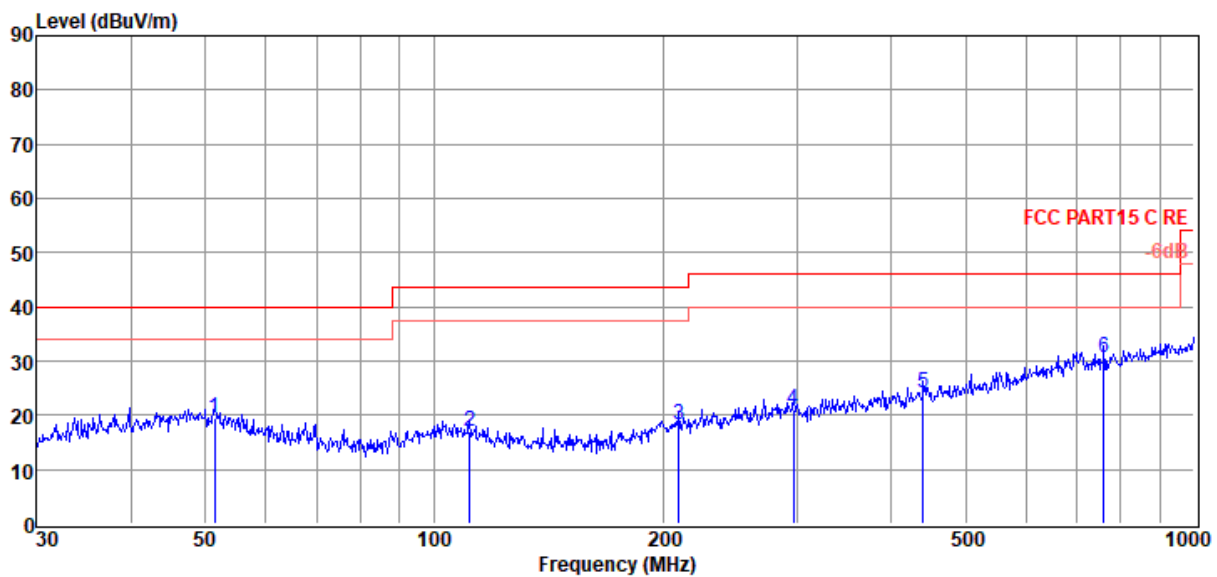


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	51.48	1.59	14.09	3.88	19.56	40.00	-20.44	Peak	HORIZONTAL
2	111.35	1.23	11.51	4.26	17.00	43.50	-26.50	Peak	HORIZONTAL
3	210.05	1.83	11.71	4.85	18.39	43.50	-25.11	Peak	HORIZONTAL
4	297.22	1.88	13.94	5.18	21.00	46.00	-25.00	Peak	HORIZONTAL
5	440.20	2.34	16.24	5.64	24.22	46.00	-21.78	Peak	HORIZONTAL
6	760.70	3.65	20.47	6.52	30.64	46.00	-15.36	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Battery: SUN-INTE-277:

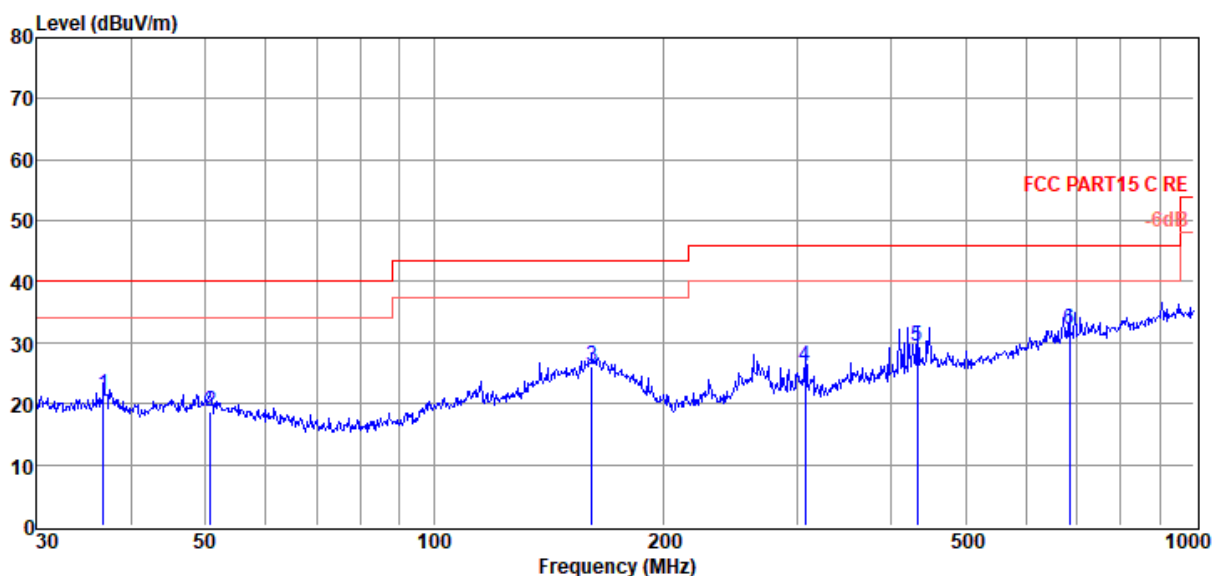TR-4-E-009 Radiated Emission Test Result**Test Site** : DDT 3m Chamber 1#D:\2019 RE1# Report Data\Q19103115-4E 三诺 pulse4\FCC
BELOW 1G.EM6**Test Date** : 2019-12-19**Tested By** : Jacky**EUT** : Portable Bluetooth Speaker**Model Number** : PULSE4**Power Supply** : Battery**Test Mode** : Tx mode**Condition** : Temp:24.5°C,Humi:55%,Press:101.4kPa**Antenna/Distance** : 2018 VULB 9161/3m/VERTICAL**Memo** :

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	36.77	5.16	12.58	3.73	21.47	40.00	-18.53	QP	VERTICAL
2	50.76	2.16	12.71	3.88	18.75	40.00	-21.25	QP	VERTICAL
3	161.47	2.86	18.72	4.60	26.18	43.50	-17.32	QP	VERTICAL
4	307.83	7.44	13.36	5.21	26.01	46.00	-19.99	QP	VERTICAL
5	432.55	7.73	16.10	5.62	29.45	46.00	-16.55	QP	VERTICAL
6	684.75	6.03	19.84	6.33	32.20	46.00	-13.80	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2019 RE1# Report Data\Q19103115-4E 三诺 pulse4\FCC
BELOW 1G.EM6

Test Date : 2019-12-19

Tested By : Jacky

EUT : Portable Bluetooth Speaker

Model Number : PULSE4


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:101.4kPa

Antenna/Distance : 2018 VULB 9161/3m/HORIZONTAL

Memo :

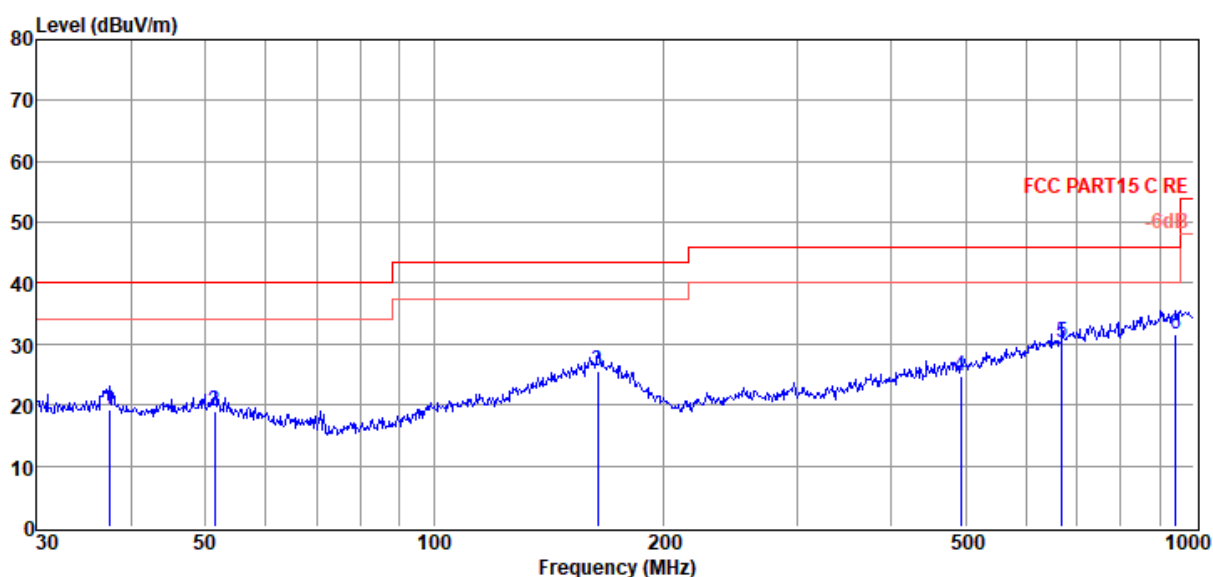

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	37.42	2.97	12.49	3.74	19.20	40.00	-20.80	QP	HORIZONTAL
2	51.48	2.46	12.53	3.88	18.87	40.00	-21.13	QP	HORIZONTAL
3	164.33	2.12	18.95	4.62	25.69	43.50	-17.81	QP	HORIZONTAL
4	492.47	2.31	16.67	5.80	24.78	46.00	-21.22	QP	HORIZONTAL
5	670.49	4.26	19.60	6.29	30.15	46.00	-15.85	QP	HORIZONTAL
6	945.44	1.34	23.11	7.06	31.51	46.00	-14.49	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


New mainboard:

TR-4-E-009 Radiated Emission Test Result**Test Site** : DDT 3m Chamber 2#

E:\2020 RE2# Report Data\Q20042112-1E JBL PULSE4\FCC BELOW1G.EM6

Test Date : 2020-04-23**Tested By** : KENNSY**EUT** : Portable Bluetooth Speaker**Model Number** : PULSE4**Power Supply** : Battery**Test Mode** : Tx mode**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa**Antenna/Distance** : 2019 VULB 9163 2#/3m/HORIZONTAL**Memo** :

Data: 1

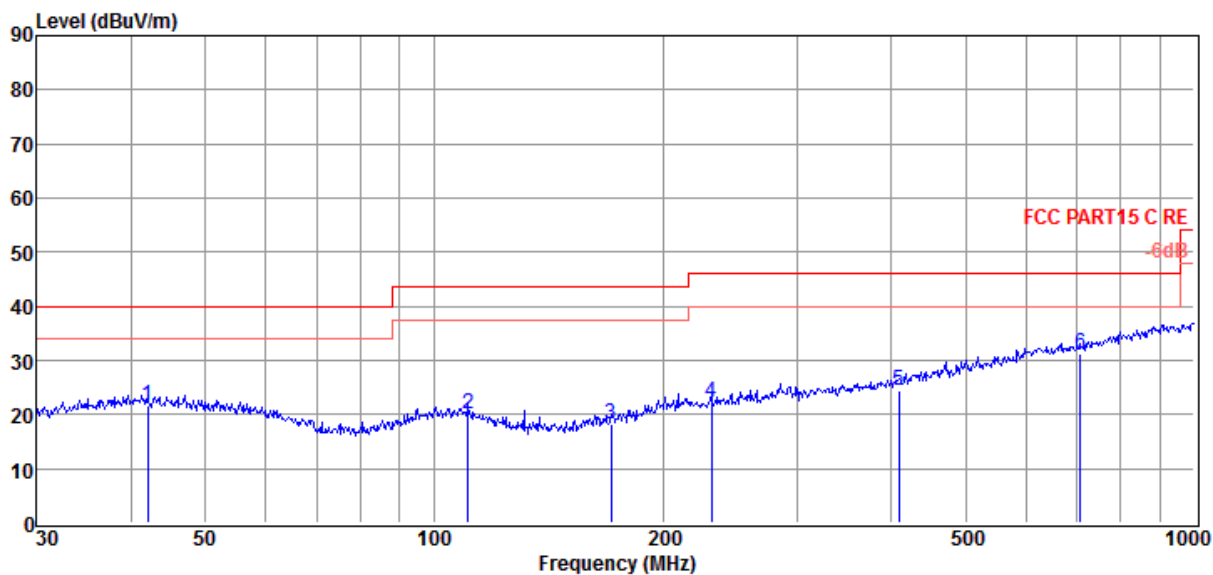

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\2020 RE2# Report Data\Q20042112-1E JBL PULSE4\FCC BELOW1G.EM6

Test Date : 2020-04-23

Tested By : KENNSY

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : Battery


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2019 VULB 9163 2#/3m/VERTICAL

Memo :

Data: 2

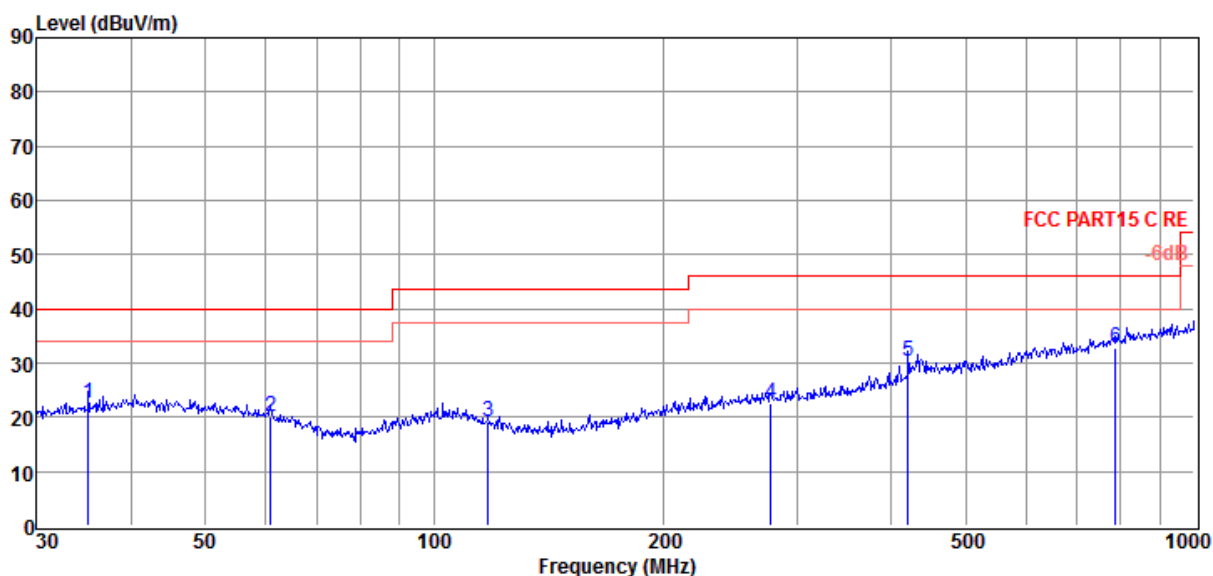

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	35.13	5.47	13.46	3.66	22.59	40.00	-17.41	QP	VERTICAL
2	60.92	4.92	11.44	3.89	20.25	40.00	-19.75	QP	VERTICAL
3	117.77	4.35	10.42	4.34	19.11	43.50	-24.39	QP	VERTICAL
4	277.09	3.82	13.49	5.27	22.58	46.00	-23.42	QP	VERTICAL
5	420.58	8.32	15.99	5.93	30.24	46.00	-15.76	QP	VERTICAL
6	787.85	4.36	21.05	7.50	32.91	46.00	-13.09	QP	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

5. Power Line Conducted Emission

5.1. Block diagram of test setup

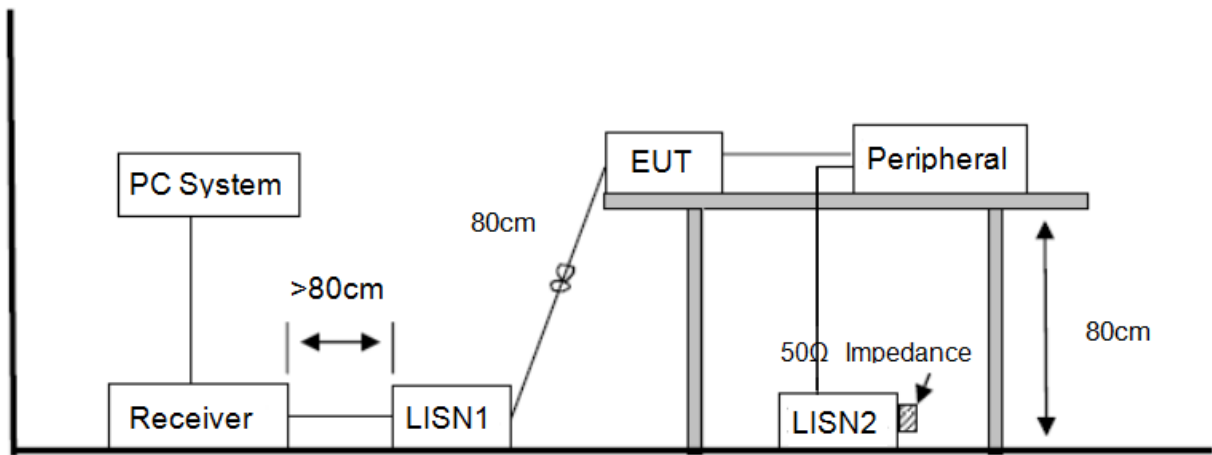

5.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

5.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

5.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case. (AC 240V/60Hz)

Original data:

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2019 CE report data\Q19032112-1E\CE.EM6

Test Date : 2019-05-06

Tested By : Alan

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : AC 240V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5°C, Humi:71.2%,
Press:101.4kPa

LISN : 2018 ENV216/NEUTRAL

Memo : Factory 1

Data: 26

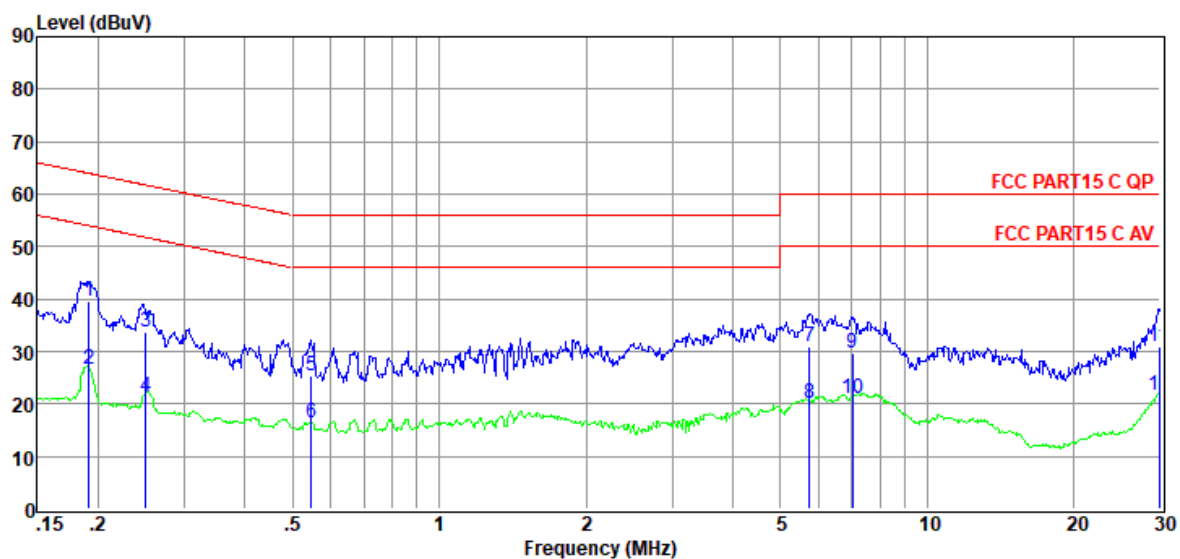

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Detector	Phase
1	0.19	20.12	9.64	0.02	9.86	39.64	63.98	-24.34	QP	NEUTRAL
2	0.19	7.15	9.64	0.02	9.86	26.67	53.98	-27.31	Average	NEUTRAL
3	0.25	14.13	9.64	0.02	9.86	33.65	61.73	-28.08	QP	NEUTRAL
4	0.25	1.80	9.64	0.02	9.86	21.32	51.73	-30.41	Average	NEUTRAL
5	0.55	5.89	9.64	0.02	9.86	25.41	56.00	-30.59	QP	NEUTRAL
6	0.55	-3.05	9.64	0.02	9.86	16.47	46.00	-29.53	Average	NEUTRAL
7	5.74	11.38	9.72	0.07	9.88	31.05	60.00	-28.95	QP	NEUTRAL
8	5.74	0.54	9.72	0.07	9.88	20.21	50.00	-29.79	Average	NEUTRAL
9	7.03	9.94	9.74	0.04	9.89	29.61	60.00	-30.39	QP	NEUTRAL
10	7.03	1.35	9.74	0.04	9.89	21.02	50.00	-28.98	Average	NEUTRAL
11	29.84	10.43	10.23	0.16	10.02	30.84	60.00	-29.16	QP	NEUTRAL
12	29.84	1.12	10.23	0.16	10.02	21.53	50.00	-28.47	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2019-05-06
EUT : Portable Bluetooth Speaker
Power Supply : AC 240V/60Hz
Condition : Temp:24.5°C, Humi:71.2%,
 Press:101.4kPa
Memo : Factory 1

D:\2019 CE report data\Q19032112-1E\CE.EM6
Tested By : Alan
Model Number : PULSE4
Test Mode : Tx mode
LISN : 2018 ENV216/LINE

Data: 28

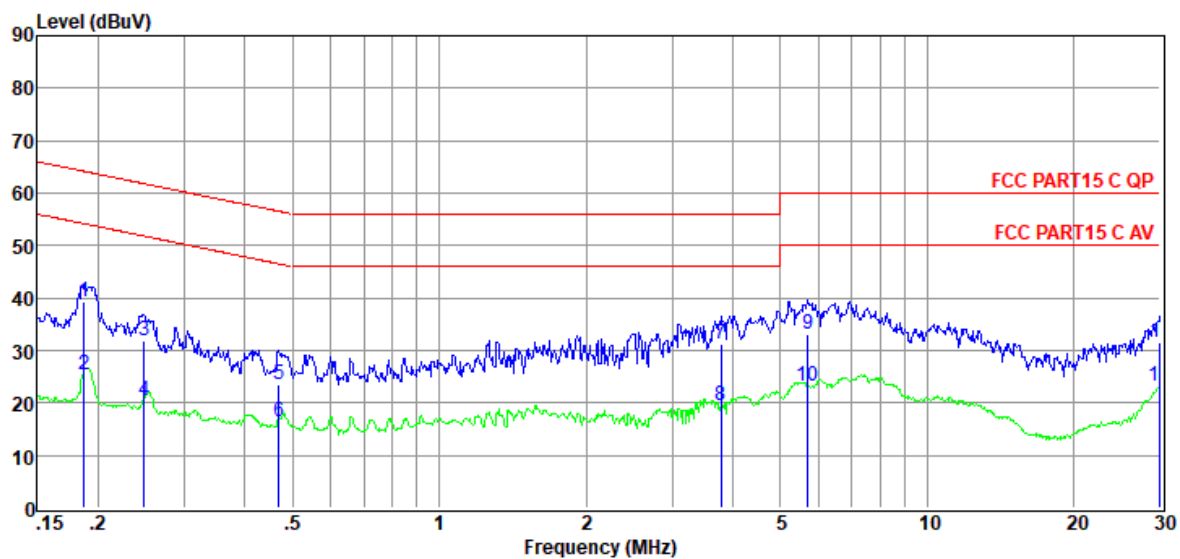

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBUV)	(dB)	(dB)	(dB)	(dBUV)	(dBUV)	(dB)		
1	0.19	19.88	9.63	0.02	9.86	39.39	64.15	-24.76	QP	LINE
2	0.19	5.99	9.63	0.02	9.86	25.50	54.15	-28.65	Average	LINE
3	0.25	12.39	9.63	0.02	9.86	31.90	61.82	-29.92	QP	LINE
4	0.25	0.88	9.63	0.02	9.86	20.39	51.82	-31.43	Average	LINE
5	0.47	3.95	9.64	0.02	9.86	23.47	56.54	-33.07	QP	LINE
6	0.47	-3.05	9.64	0.02	9.86	16.47	46.54	-30.07	Average	LINE
7	3.78	11.59	9.68	0.06	9.87	31.20	56.00	-24.80	QP	LINE
8	3.78	-0.09	9.68	0.06	9.87	19.52	46.00	-26.48	Average	LINE
9	5.68	13.36	9.70	0.07	9.88	33.01	60.00	-26.99	QP	LINE
10	5.68	3.61	9.70	0.07	9.88	23.26	50.00	-26.74	Average	LINE
11	30.00	11.27	10.02	0.16	10.02	31.47	60.00	-28.53	QP	LINE
12	30.00	3.09	10.02	0.16	10.02	23.29	50.00	-26.71	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2019 CE report data\Q19032112-1E\CE.EM6

Test Date : 2019-06-03

Tested By : Alan

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : AC 240V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5°C, Humi:71.2%,
Press:101.4kPa

LISN : 2018 ENV216/LINE

Memo : Factory 2

Data: 46

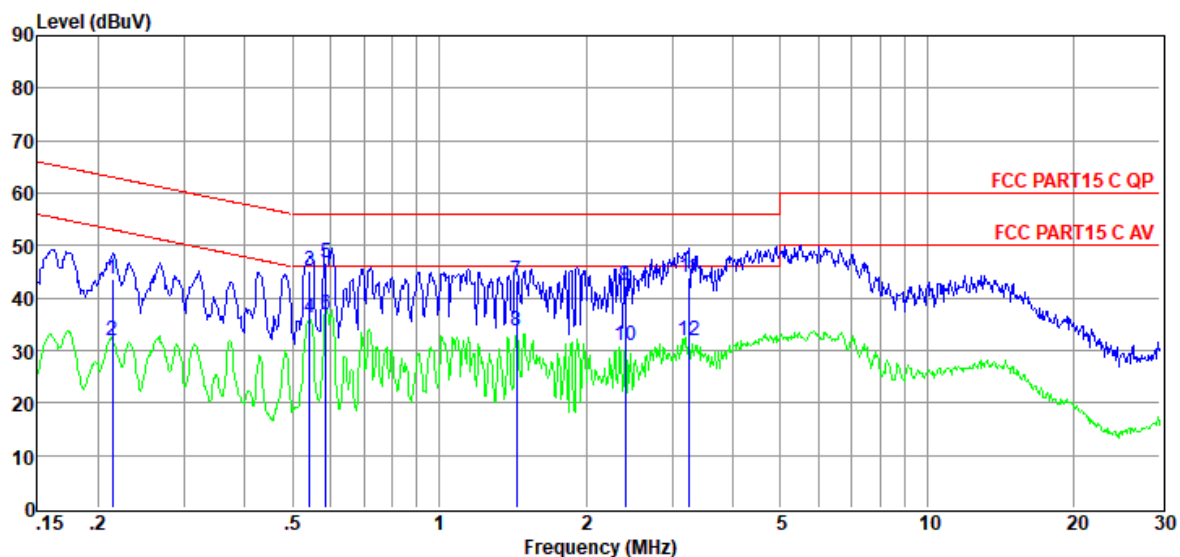

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.21	24.01	9.63	0.02	9.86	43.52	63.05	-19.53	QP	LINE
2	0.21	12.24	9.63	0.02	9.86	31.75	53.05	-21.30	Average	LINE
3	0.54	25.55	9.64	0.02	9.86	45.07	56.00	-10.93	QP	LINE
4	0.54	16.78	9.64	0.02	9.86	36.30	46.00	-9.70	Average	LINE
5	0.59	27.20	9.64	0.03	9.86	46.73	56.00	-9.27	QP	LINE
6	0.59	17.16	9.64	0.03	9.86	36.69	46.00	-9.31	Average	LINE
7	1.44	23.55	9.65	0.08	9.87	43.15	56.00	-12.85	QP	LINE
8	1.44	14.19	9.65	0.08	9.87	33.79	46.00	-12.21	Average	LINE
9	2.41	22.67	9.66	0.04	9.87	42.24	56.00	-13.76	QP	LINE
10	2.41	11.36	9.66	0.04	9.87	30.93	46.00	-15.07	Average	LINE
11	3.26	24.32	9.67	0.04	9.87	43.90	56.00	-12.10	QP	LINE
12	3.26	12.39	9.67	0.04	9.87	31.97	46.00	-14.03	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2019-06-03
EUT : Portable Bluetooth Speaker
Power Supply : AC 240V/60Hz
Condition : Temp:24.5°C, Humi:71.2%,
 Press:101.4kPa
Memo : Factory 2

D:\2019 CE report data\Q19032112-1E\CE.EM6
Tested By : Alan
Model Number : PULSE4
Test Mode : Tx mode
LISN : 2018 ENV216/NEUTRAL

Data: 48

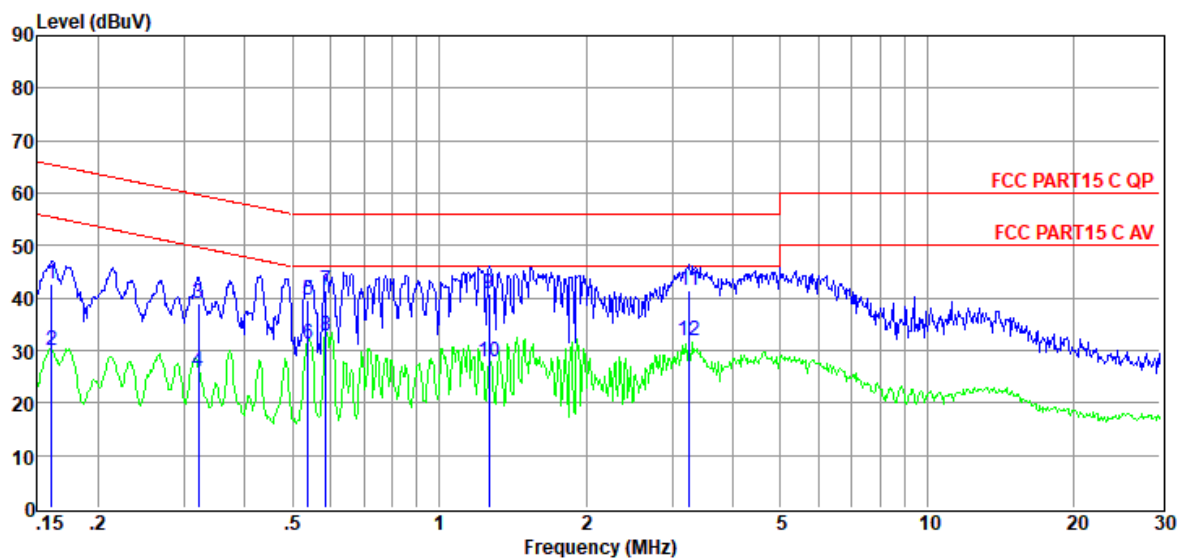

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	23.19	9.64	0.02	9.86	42.71	65.43	-22.72	QP	NEUTRAL
2	0.16	10.39	9.64	0.02	9.86	29.91	55.43	-25.52	Average	NEUTRAL
3	0.32	19.31	9.64	0.02	9.86	38.83	59.66	-20.83	QP	NEUTRAL
4	0.32	6.45	9.64	0.02	9.86	25.97	49.66	-23.69	Average	NEUTRAL
5	0.54	20.22	9.64	0.02	9.86	39.74	56.00	-16.26	QP	NEUTRAL
6	0.54	11.82	9.64	0.02	9.86	31.34	46.00	-14.66	Average	NEUTRAL
7	0.59	22.01	9.64	0.03	9.86	41.54	56.00	-14.46	QP	NEUTRAL
8	0.59	13.16	9.64	0.03	9.86	32.69	46.00	-13.31	Average	NEUTRAL
9	1.26	21.24	9.65	0.09	9.87	40.85	56.00	-15.15	QP	NEUTRAL
10	1.26	8.32	9.65	0.09	9.87	27.93	46.00	-18.07	Average	NEUTRAL
11	3.26	21.80	9.68	0.04	9.87	41.39	56.00	-14.61	QP	NEUTRAL
12	3.26	12.18	9.68	0.04	9.87	31.77	46.00	-14.23	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Battery: IAA033NA:

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2019 CE report data\Q19103115-1E\1122 ce.EM6**
Test Date : 2019-12-02 **Tested By** : Lori
EUT : Portable Bluetooth Speaker **Model Number** : PULSE4
Power Supply : AC 240V/60Hz **Test Mode** : Tx mode
Condition : Temp:24'C,Humi:54%,Press:101.4kPa **LISN** : 2018 ENV216/NEUTRAL

Memo :

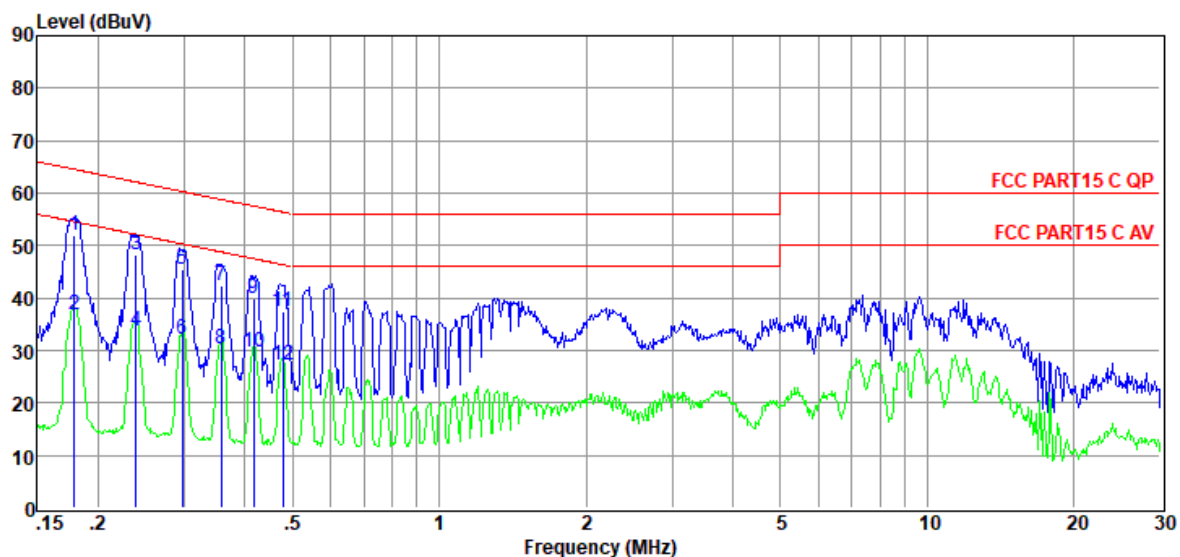

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	32.44	9.64	0.02	9.86	51.96	64.55	-12.59	QP	NEUTRAL
2	0.18	17.40	9.64	0.02	9.86	36.92	54.55	-17.63	Average	NEUTRAL
3	0.24	28.77	9.64	0.02	9.86	48.29	62.13	-13.84	QP	NEUTRAL
4	0.24	14.29	9.64	0.02	9.86	33.81	52.13	-18.32	Average	NEUTRAL
5	0.30	25.89	9.64	0.02	9.86	45.41	60.32	-14.91	QP	NEUTRAL
6	0.30	12.79	9.64	0.02	9.86	32.31	50.32	-18.01	Average	NEUTRAL
7	0.36	22.84	9.64	0.02	9.86	42.36	58.78	-16.42	QP	NEUTRAL
8	0.36	10.70	9.64	0.02	9.86	30.22	48.78	-18.56	Average	NEUTRAL
9	0.42	20.37	9.64	0.02	9.86	39.89	57.51	-17.62	QP	NEUTRAL
10	0.42	10.08	9.64	0.02	9.86	29.60	47.51	-17.91	Average	NEUTRAL
11	0.48	18.03	9.64	0.02	9.86	37.55	56.36	-18.81	QP	NEUTRAL
12	0.48	7.60	9.64	0.02	9.86	27.12	46.36	-19.24	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2019 CE report data\Q19103115-1E\1122 ce.EM6**
Test Date : 2019-12-02 **Tested By** : Lori
EUT : Portable Bluetooth Speaker **Model Number** : PULSE4
Power Supply : AC 240V/60Hz **Test Mode** : Tx mode
Condition : Temp:24'C,Humi:54%,Press:101.4kPa **LISN** : 2018 ENV216/LINE
Memo :

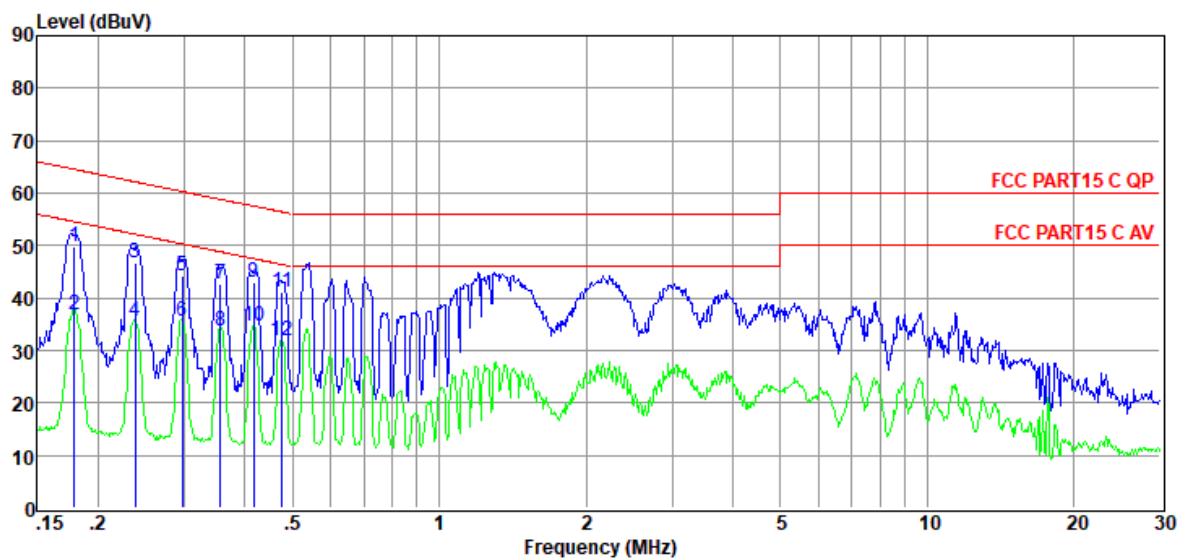

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.18	30.17	9.63	0.02	9.86	49.68	64.55	-14.87	QP	LINE
2	0.18	17.29	9.63	0.02	9.86	36.80	54.55	-17.75	Average	LINE
3	0.24	27.24	9.63	0.02	9.86	46.75	62.17	-15.42	QP	LINE
4	0.24	16.03	9.63	0.02	9.86	35.54	52.17	-16.63	Average	LINE
5	0.30	24.81	9.63	0.02	9.86	44.32	60.32	-16.00	QP	LINE
6	0.30	16.10	9.63	0.02	9.86	35.61	50.32	-14.71	Average	LINE
7	0.36	23.13	9.63	0.02	9.86	42.64	58.83	-16.19	QP	LINE
8	0.36	14.31	9.63	0.02	9.86	33.82	48.83	-15.01	Average	LINE
9	0.42	23.59	9.64	0.02	9.86	43.11	57.51	-14.40	QP	LINE
10	0.42	15.19	9.64	0.02	9.86	34.71	47.51	-12.80	Average	LINE
11	0.48	21.59	9.64	0.02	9.86	41.11	56.41	-15.30	QP	LINE
12	0.48	12.34	9.64	0.02	9.86	31.86	46.41	-14.55	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Battery: SUN-INTE-277:

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2019 CE report data\Q19103115-4E\1216 ce.EM6**
Test Date : 2019-12-16 **Tested By** : Lori
EUT : Portable Bluetooth Speaker **Model Number** : PULSE4
Power Supply : AC 240V/60Hz **Test Mode** : Tx mode
Condition : Temp:24'C,Humi:54%,Press:101.4kPa **LISN** : 2018 ENV216/LINE

Memo :

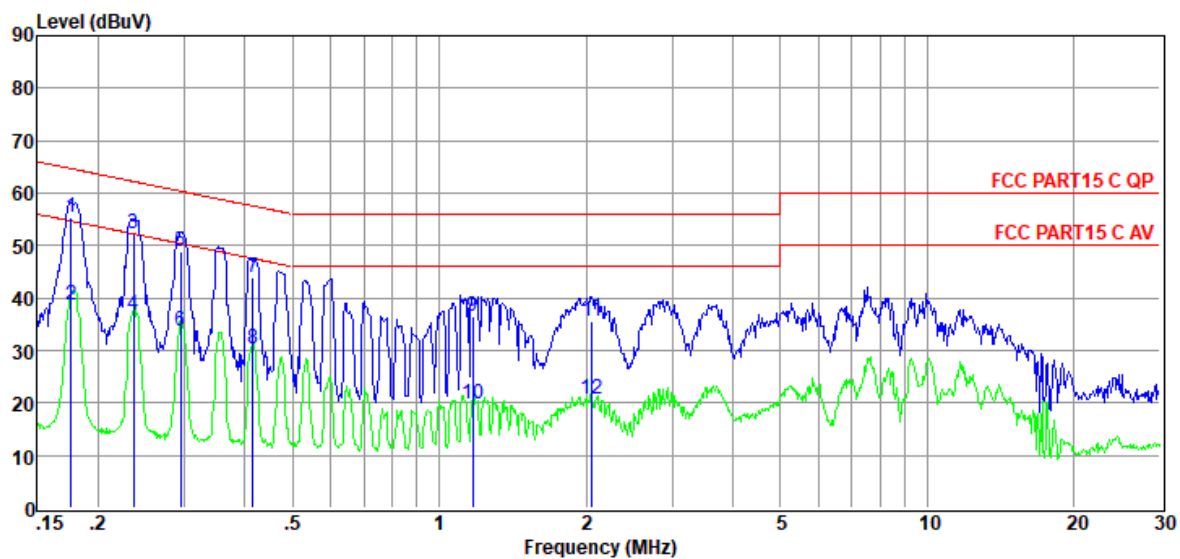

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	35.79	9.63	0.02	9.86	55.30	64.68	-9.38	QP	LINE
2	0.18	19.26	9.63	0.02	9.86	38.77	54.68	-15.91	Average	LINE
3	0.24	32.79	9.63	0.02	9.86	52.30	62.22	-9.92	QP	LINE
4	0.24	17.20	9.63	0.02	9.86	36.71	52.22	-15.51	Average	LINE
5	0.30	29.23	9.63	0.02	9.86	48.74	60.37	-11.63	QP	LINE
6	0.30	14.21	9.63	0.02	9.86	33.72	50.37	-16.65	Average	LINE
7	0.41	24.47	9.64	0.02	9.86	43.99	57.55	-13.56	QP	LINE
8	0.41	10.73	9.64	0.02	9.86	30.25	47.55	-17.30	Average	LINE
9	1.17	16.76	9.64	0.09	9.87	36.36	56.00	-19.64	QP	LINE
10	1.17	0.26	9.64	0.09	9.87	19.86	46.00	-26.14	Average	LINE
11	2.06	16.04	9.65	0.05	9.87	35.61	56.00	-20.39	QP	LINE
12	2.06	1.24	9.65	0.05	9.87	20.81	46.00	-25.19	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2019 CE report data\Q19103115-4E\1216 ce.EM6**
Test Date : 2019-12-16 **Tested By** : Lori
EUT : Portable Bluetooth Speaker **Model Number** : PULSE4
Power Supply : AC 240V/60Hz **Test Mode** : Tx mode
Condition : Temp:24'C,Humi:54%,Press:101.4kPa **LISN** : 2018 ENV216/NEUTRAL
Memo :

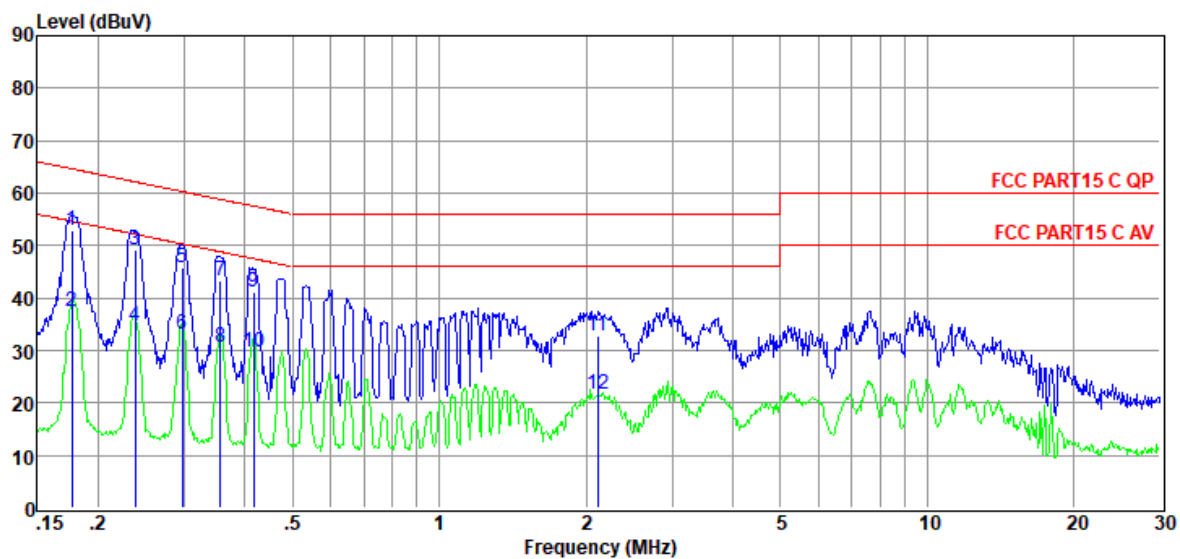

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	33.26	9.64	0.02	9.86	52.78	64.64	-11.86	QP	NEUTRAL
2	0.18	17.97	9.64	0.02	9.86	37.49	54.64	-17.15	Average	NEUTRAL
3	0.24	29.58	9.64	0.02	9.86	49.10	62.17	-13.07	QP	NEUTRAL
4	0.24	15.03	9.64	0.02	9.86	34.55	52.17	-17.62	Average	NEUTRAL
5	0.30	26.40	9.64	0.02	9.86	45.92	60.32	-14.40	QP	NEUTRAL
6	0.30	13.46	9.64	0.02	9.86	32.98	50.32	-17.34	Average	NEUTRAL
7	0.36	23.91	9.64	0.02	9.86	43.43	58.83	-15.40	QP	NEUTRAL
8	0.36	11.00	9.64	0.02	9.86	30.52	48.83	-18.31	Average	NEUTRAL
9	0.42	21.47	9.64	0.02	9.86	40.99	57.51	-16.52	QP	NEUTRAL
10	0.42	10.22	9.64	0.02	9.86	29.74	47.51	-17.77	Average	NEUTRAL
11	2.11	13.31	9.67	0.05	9.87	32.90	56.00	-23.10	QP	NEUTRAL
12	2.11	2.13	9.67	0.05	9.87	21.72	46.00	-24.28	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.


New mainboard:

TR-4-E-010 Conducted Emission Test Result**Test Site** : DDT 1# Shield Room

D:\2020 CE report data\Q20042112-1E\20200430 CE.EM6

Test Date : 2020-04-30**Tested By** : Chunchieh**EUT** : Portable Bluetooth Speaker**Model Number** : PULSE4**Power Supply** : AC 120V/60Hz**Test Mode** : Tx mode**Condition** : Temp:24.5°C, Humi:55.5%,
Press:100.1kPa**LISN** : 2019 ENV216 1#/LINE**Memo** :

Data: 2

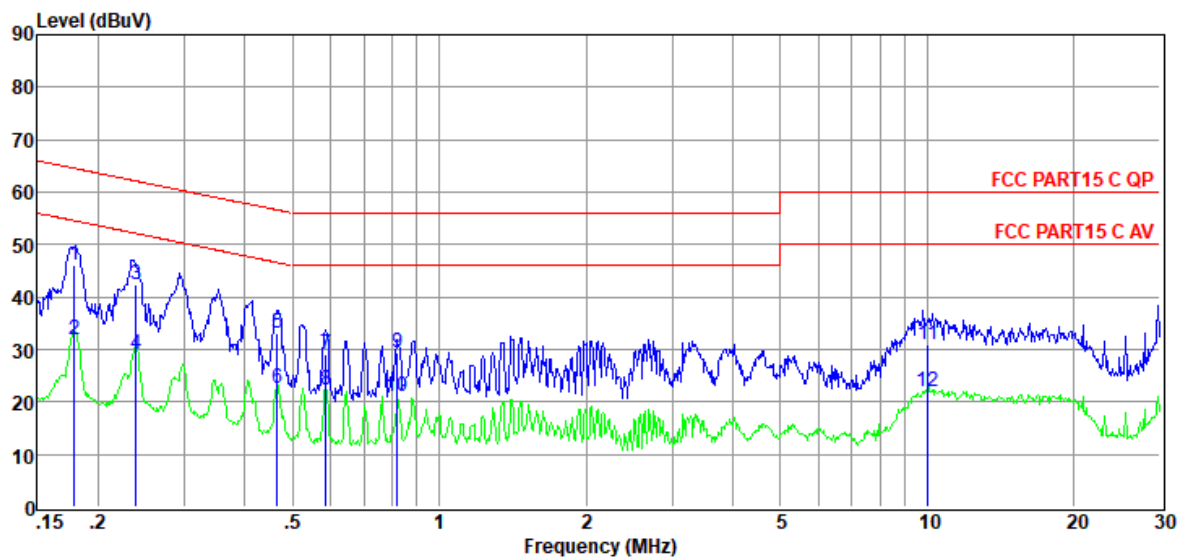

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	26.76	9.60	0.02	9.86	46.24	64.55	-18.31	QP	LINE
2	0.18	12.45	9.60	0.02	9.86	31.93	54.55	-22.62	Average	LINE
3	0.24	22.82	9.60	0.02	9.86	42.30	62.13	-19.83	QP	LINE
4	0.24	9.66	9.60	0.02	9.86	29.14	52.13	-22.99	Average	LINE
5	0.47	13.62	9.60	0.02	9.86	33.10	56.58	-23.48	QP	LINE
6	0.47	3.09	9.60	0.02	9.86	22.57	46.58	-24.01	Average	LINE
7	0.59	9.58	9.60	0.03	9.86	29.07	56.00	-26.93	QP	LINE
8	0.59	2.82	9.60	0.03	9.86	22.31	46.00	-23.69	Average	LINE
9	0.82	9.97	9.60	0.03	9.86	29.46	56.00	-26.54	QP	LINE
10	0.82	1.51	9.60	0.03	9.86	21.00	46.00	-25.00	Average	LINE
11	10.02	11.20	9.60	0.11	9.89	30.80	60.00	-29.20	QP	LINE
12	10.02	2.43	9.60	0.11	9.89	22.03	50.00	-27.97	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2020 CE report data\Q20042112-1E\20200430 CE.EM6

Test Date : 2020-04-30

Tested By : Chunchieh

EUT : Portable Bluetooth Speaker

Model Number : PULSE4

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5°C, Humi:55.5%,
Press:100.1kPa

LISN : 2019 ENV216 1#/NEUTRAL

Memo :

Data: 4

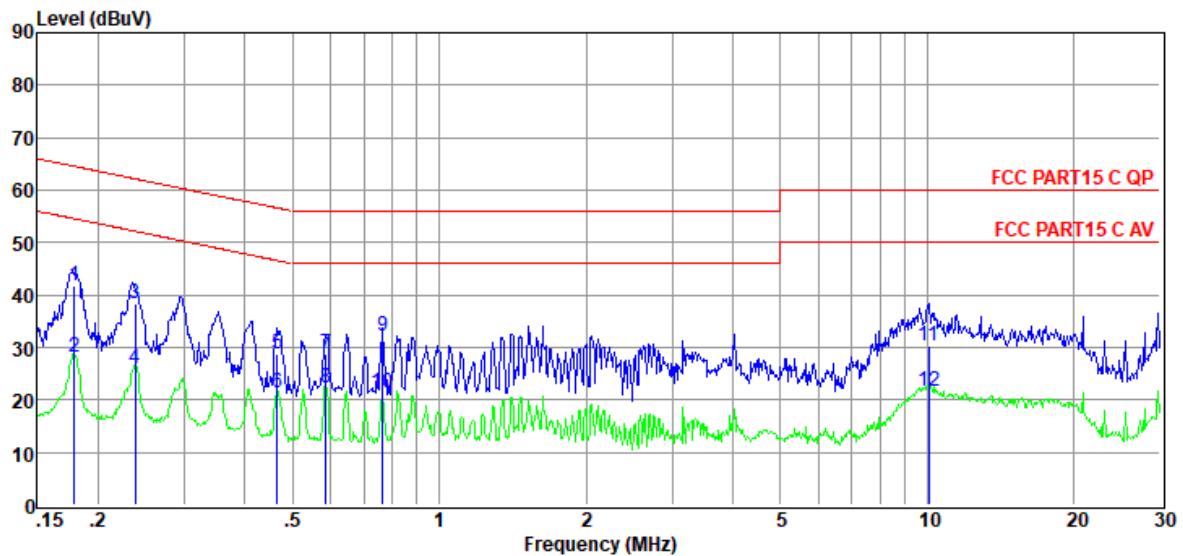

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.18	22.15	9.60	0.02	9.86	41.63	64.55	-22.92	QP	NEUTRAL
2	0.18	8.53	9.60	0.02	9.86	28.01	54.55	-26.54	Average	NEUTRAL
3	0.24	18.93	9.60	0.02	9.86	38.41	62.17	-23.76	QP	NEUTRAL
4	0.24	6.62	9.60	0.02	9.86	26.10	52.17	-26.07	Average	NEUTRAL
5	0.47	9.31	9.60	0.02	9.86	28.79	56.58	-27.79	QP	NEUTRAL
6	0.47	2.00	9.60	0.02	9.86	21.48	46.58	-25.10	Average	NEUTRAL
7	0.59	9.27	9.60	0.03	9.86	28.76	56.00	-27.24	QP	NEUTRAL
8	0.59	2.89	9.60	0.03	9.86	22.38	46.00	-23.62	Average	NEUTRAL
9	0.77	12.67	9.60	0.03	9.86	32.16	56.00	-23.84	QP	NEUTRAL
10	0.77	1.86	9.60	0.03	9.86	21.35	46.00	-24.65	Average	NEUTRAL
11	10.07	10.56	9.60	0.11	9.89	30.16	60.00	-29.84	QP	NEUTRAL
12	10.07	2.05	9.60	0.11	9.89	21.65	50.00	-28.35	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

END OF REPORT