

## TEST REPORT

**APPLICANT** : Sharp Corporation, Communication Systems Group  
**ADDRESS** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN  
**PRODUCTS** : Cellular Phone  
**MODEL NO.** : SH-05C  
**SERIAL NO.** : 004401112985128  
004401112985136  
**FCC ID** : APYHRO00134  
**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15  
**TESTING LOCATION** : Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan  
**TEST RESULTS** : **Passed**  
**DATE OF TEST** : November 8, 2010 ~ November 17, 2010

This report must not be used by the client to  
claim product endorsement by NVLAP or  
NIST or any agency of the U.S. Government.



Kousei Shibata  
Manager  
Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
Testing Dept. EMC Division  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.

**TABLE OF CONTENTS**

	<b>Page</b>
<b>Documentation .....</b>	<b>3</b>
1 <b>Test Regulation.....</b>	<b>3</b>
2 <b>Test Location.....</b>	<b>3</b>
3 <b>Recognition of Test Laboratory.....</b>	<b>3</b>
4 <b>Description of the Equipment Under Test.....</b>	<b>4</b>
5 <b>Test Condition.....</b>	<b>5</b>
6 <b>Preliminary Test and Test Setup .....</b>	<b>7</b>
7 <b>Equipment Under Test Modification.....</b>	<b>14</b>
8 <b>Responsible Party .....</b>	<b>14</b>
9 <b>Deviation from Standard.....</b>	<b>14</b>
10 <b>Test Results.....</b>	<b>15</b>
11 <b>Summary .....</b>	<b>18</b>
12 <b>Operating Condition.....</b>	<b>19</b>
13 <b>Test Configuration.....</b>	<b>19</b>
14 <b>Equipment Under Test Arrangement (Drawings) .....</b>	<b>20</b>
<b>Appendix A: Test Data .....</b>	<b>21</b>
<b>Appendix B: Test Arrangement (Photographs) .....</b>	<b>53</b>
<b>Appendix C: Test Instruments.....</b>	<b>55</b>

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**

<b>EUT</b> : Equipment Under Test	<b>EMC</b> : Electromagnetic Compatibility
<b>AE</b> : Associated Equipment	<b>EMI</b> : Electromagnetic Interference
<b>N/A</b> : Not Applicable	<b>EMS</b> : Electromagnetic Susceptibility
<b>N/T</b> : Not Tested	

- ☒ - indicates that the listed condition, standard or equipment is applicable for this report.  
☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

## Documentation

### 1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

The tests were performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000.  
The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

### 2 Test Location

KITA-KANSAI Testing Center

1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto 621-0126, Japan

### 3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Department EMC Division is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2012)

NVLAP Lab Code : 200191-0 (Effective through : June 30, 2011)

BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006  
(Effective through : September 14, 2013)

VCCI Registration No. : R-008, C-006, C-007, C-1674, C-2143, C-3685, T-1418, T-1419, T-1819, T-1820,  
T-1821, G-172, G-173  
(Effective through : March 30, 2012)

IC Registration No. : 2079E-1, 2079E-2 (Effective through : January 6, 2011)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2012)

## 4 Description of the Equipment Under Test

### 4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-05C
4. Serial No. : 004401112985128  
: 004401112985136
5. Product Type : Pre-production
6. Date of Manufacture : October, 2010
7. Transmitting Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH)
8. Receiving Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH)
9. Max. RF Output Power : 3.04 dBm(Measure Value)
10. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH26 900mAh)
11. EUT Grounding : None
12. Category : Spread Spectrum Transmitter(FHSS).
13. EUT Authorization : Certification
14. Receive Date of EUT : November 1, 2010

### 4.2 Channel Plan

The carrier spacing is 1 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) =  $2402.0 + n$

Receiving Frequency (in MHz) =  $2402.0 + n$

where, n : channel number ( $0 \leq n \leq 78$ )

## 5 Test Condition

### 5.1 Channel Separation

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.2 Minimum Hopping Channel

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.3 Occupied Bandwidth

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.4 Dwell Time

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.5 Peak Output Power (Conduction)**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.6 Spurious Emission (Conduction)**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.7 AC Powerline Conducted Emission**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☐ - Anechoic chamber  
KAMEOKA ☒ - Shielded room ☐ - Conducted emission facility  
☐ - 1st open site

Test instruments : Refer to Appendix C.

**5.8 Field Strength of Spurious Radiation**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable


Test site : ☒ - KAMEOKA 1st open site ☒ - 3 m ☐ - 10 m  
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

## 6 Preliminary Test and Test Setup

### 6.1 Channel Separation

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	100 kHz
Video Bandwidth	300 kHz
Span	3 MHz / 5 MHz
Sweep Time	AUTO
Trace	Maxhold

### 6.2 Minimum Hopping Channel

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	300 kHz
Video Bandwidth	300 kHz
Span	30 MHz
Sweep Time	AUTO
Trace	Maxhold

### 6.3 Occupied Bandwidth

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	10 kHz
Video Bandwidth	30 kHz
Span	3 MHz
Sweep Time	AUTO
Trace	Maxhold

### 6.4 Dwell Time

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	1 MHz
Video Bandwidth	1 MHz
Span	Zero Span




## 6.5 Peak Output Power

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



## 6.6 Spurious Emission(Conduction)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	200 kHz
Video Bandwidth	300 kHz	200 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


## 6.7 AC Powerline Conducted Emission

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

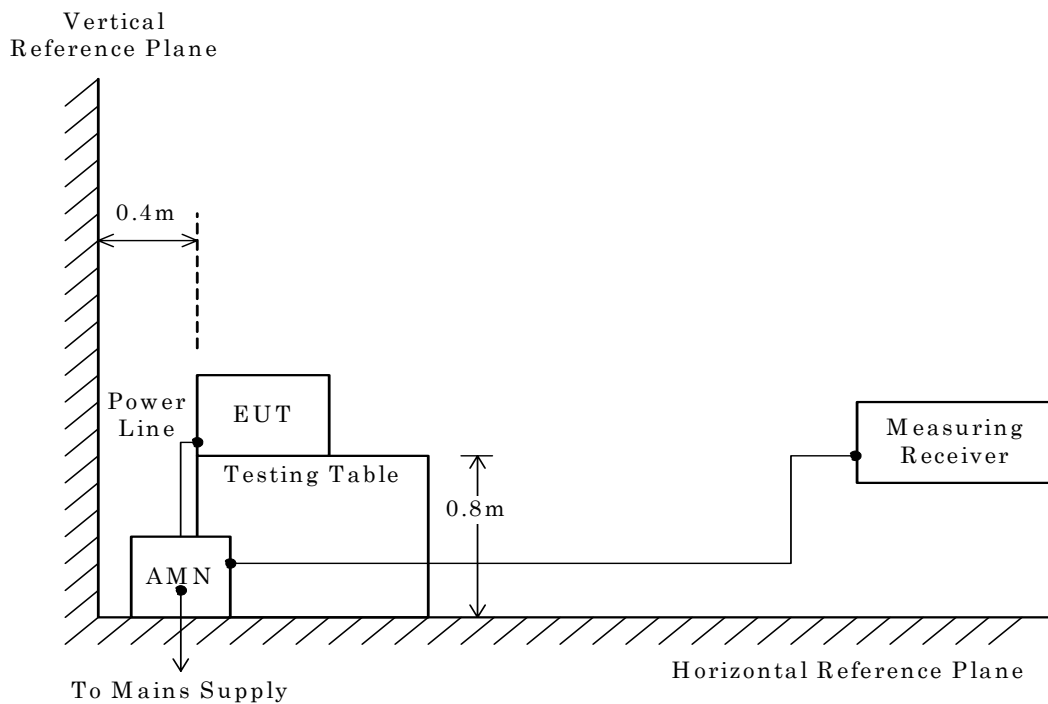

NOTE

AMN : Artificial Mains Network

## 6.8 Field Strength of Spurious Emission


### 6.8.1 Field Strength of Spurious Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

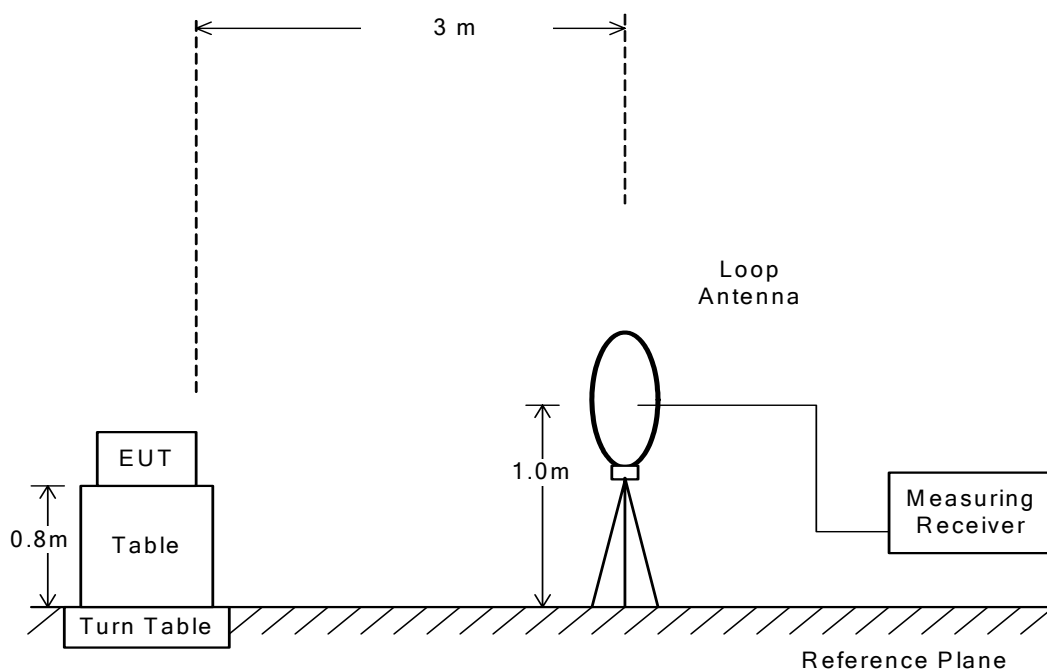


## 6.8.2 Field Strength of Spurious Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

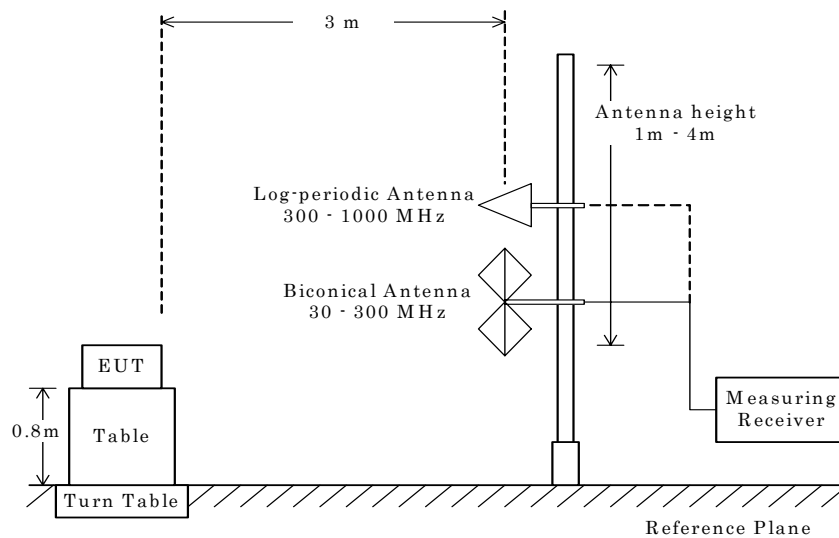


### 6.8.3 Field Strength of Spurious Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

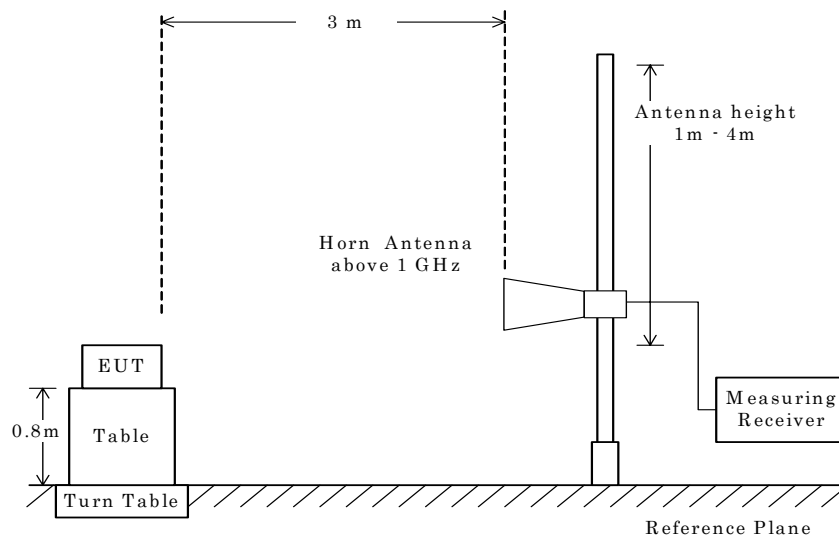

#### NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

**7 Equipment Under Test Modification**

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.  
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

**8 Responsible Party**Responsible Party of Test Item (Product)

Responsible Party :

Contact Person :

\_\_\_\_\_  
Signatory

**9 Deviation from Standard**

- ☒ - No deviations from the standard described in clause 1.  
☐ - The following deviations were employed from the standard described in clause 1.

\_\_\_\_\_

**10 Test Results****10.1 RF Power Output (§2.1046)****10.1.1 Channel Separation**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - **Passed** ☐ - **Failed** ☐ - **Not judged**

Channel Separation is 1.002 MHz  
Channel Separation(Inquiry) is 2.005 MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : \_\_\_\_\_

**10.1.2 Minimum Hopping Channel**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Number of Channel is 79  
Number of Channel (Inquiry) is 32

Remarks : \_\_\_\_\_

**10.1.3 Occupied Bandwidth**

The requirements are ☒ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - **Passed** ☐ - **Failed** ☐ - **Not judged**

The 99% Bandwidth is 1188.7 kHz at 2441.0 MHz  
The 20dB Bandwidth is 1312.0 kHz at 2441.0 MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : \_\_\_\_\_

**10.1.4 Dwell Time**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Dwell Time is 308.1 msec

Dwell Time (Inquiry) is 64.1 msec

Uncertainty of Measurement Results +/-0.6 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.5 Peak Output Power(Conduction)**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Transmitter Power is 3.04 dBm at 2441.0 MHz

Uncertainty of Measurement Results at Amplitude +/-0.8 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.6 Spurious Emissions(Conduction)**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results 9 kHz – 1GHz +/-1.0 dB(2 $\sigma$ )

1GHz – 18GHz +/-1.2 dB(2 $\sigma$ )

18GHz – 40GHz +/-1.6 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_



### 10.1.7 AC Powerline Conducted Emission

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 14.5 dB at 1.84 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-2.5 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

### 10.1.8 Field Strength of Spurious Emission

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Average) >4.0 dB at 22320.0 MHz

Max. Limit Exceeding (Average) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results

9 kHz – 30 MHz	<u>+/-1.7</u>	dB(2 $\sigma$ )
30 MHz – 300 MHz	<u>+/-4.3</u>	dB(2 $\sigma$ )
300 MHz – 1000 MHz	<u>+/-4.5</u>	dB(2 $\sigma$ )
1 GHz – 18 GHz	<u>+/-4.0</u>	dB(2 $\sigma$ )
18 GHz – 40 GHz	<u>+/-4.7</u>	dB(2 $\sigma$ )

Remarks : The measurement result is within the range of measurement uncertainty.

**11 Summary****General Remarks :**

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 15

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

**Test Results :**

The "as received" sample;


- ☒ - fulfill the test requirements of the regulation mentioned on clause 1.
- ☐ - doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Shigeru Kinoshita  
Deputy Manager  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center

Tested by:



Akio Hosoda  
Advisor  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center

## 12 Operating Condition

### Transmitting/Receiving

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH)

### Modulation Type

1.DH1, DH3, DH5(Modulation Type : GFSK)

2.2DH1, 2DH3, 2DH5(Modulation Type : pi/4-DQPSK)

3.3DH1, 3DH3, 3DH5(Modulation Type : 8DPSK)

### Other Clock Frequency

13.56 MHz, 52 MHz, 27.456 MHz, 40.95 MHz, 48MHz, 32.768 kHz

## 13 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	SH-05C	004401112 985128*1) 004401112 985136*2)	APYHRO00134
B	Lithium-ion Battery	Sharp	SH26	--	N/A
C	AC Adapter for Global use	NTT DoCoMo	MAS-BH0008 -A 002	--	N/A
D	Flat-plug Stereo Earphone Set	NTT DoCoMo	P01	--	N/A
E	Arib Connector Adaptor	SMK	--	--	N/A

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

\*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	--	NO	NO	1.5
2	AC Power Cord	--	--	NO	NO	0.5
3	Stereo Earphone Cable	--	--	NO	NO	1.5
4	Arib Connector Cable	--	--	NO	NO	0.1

## 14 Equipment Under Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

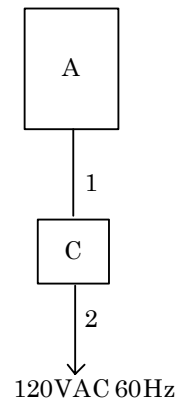

c) Stereo Earphone used



## Appendix A: Test Data


Test Date : November 17, 2010

Temp.:20°C, Humi:38%


### A.1 Channel Separation

Mode of EUT	Channel Separation (MHz)
Hopping	1.002
Inquiry	2.005

Mode of EUT : Hopping

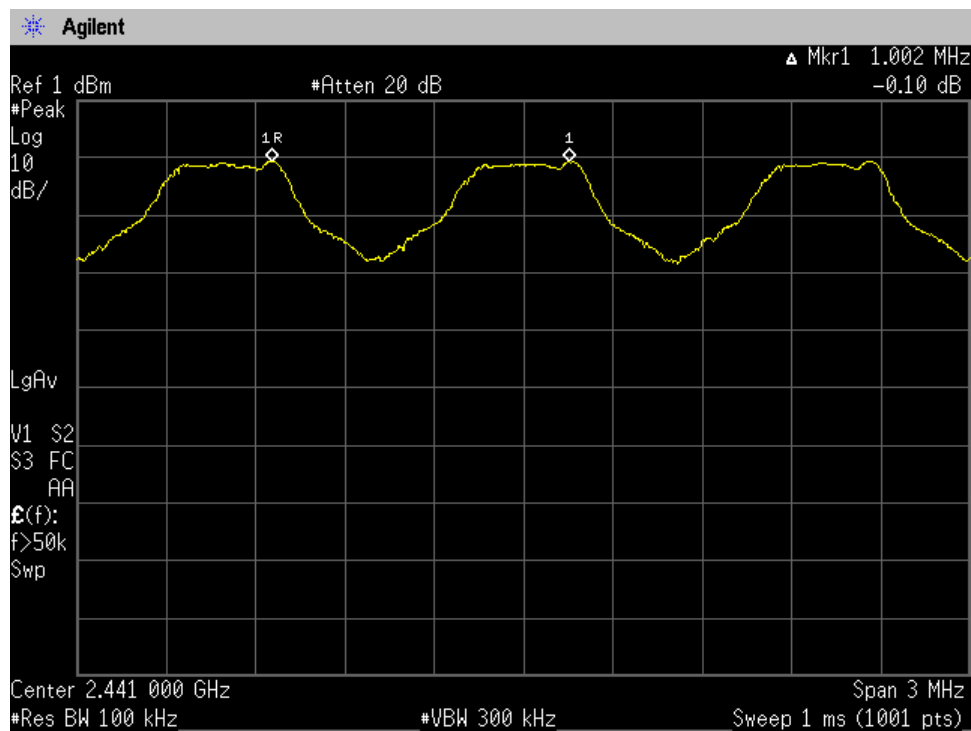

Mode of EUT : Inquiry

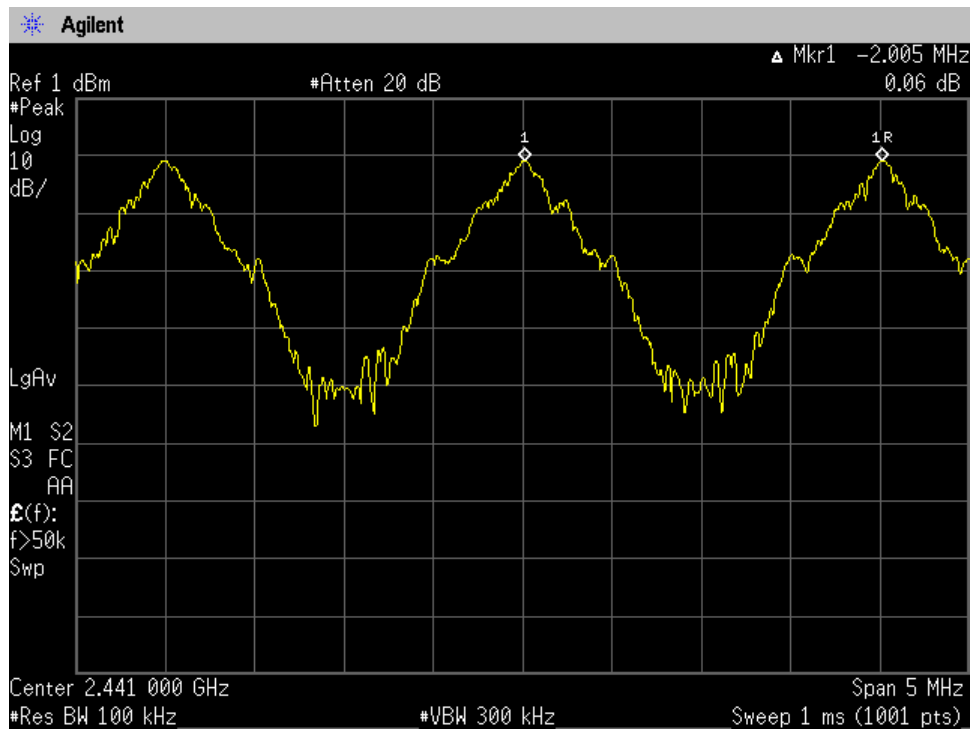


## A.2 Minimum Hopping Channel

Test Date : November 17, 2010


Temp.:20°C, Humi:38%

Mode of EUT	Minimum Hopping Channel
Hopping	79
Inquiry	32


Mode of EUT : Hopping(1/3)

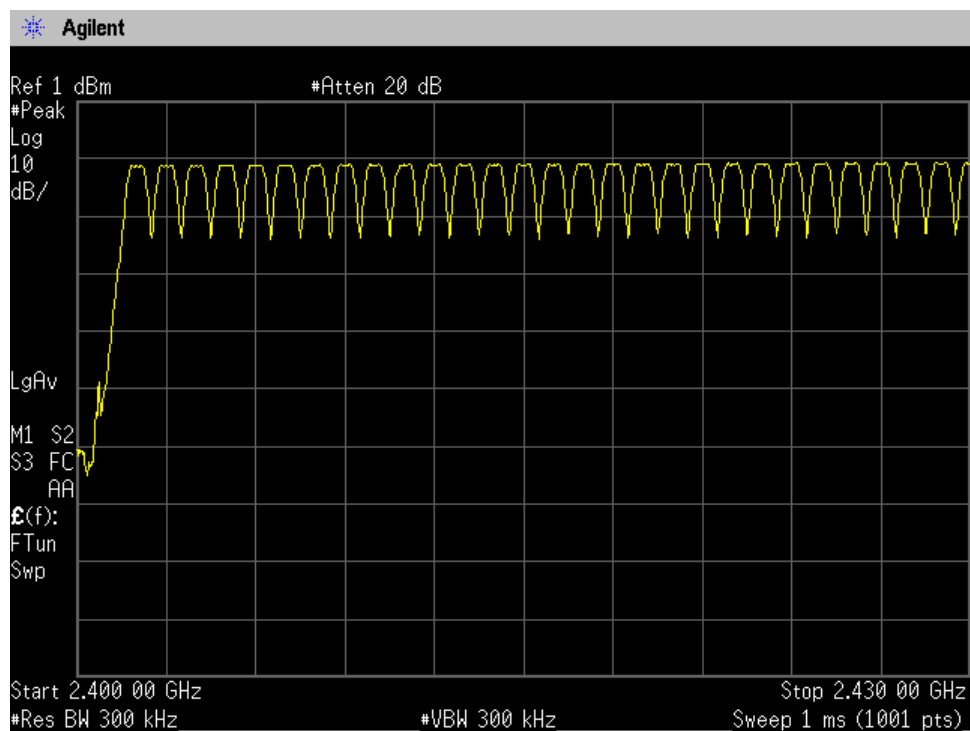

Mode of EUT : Hopping(2/3)

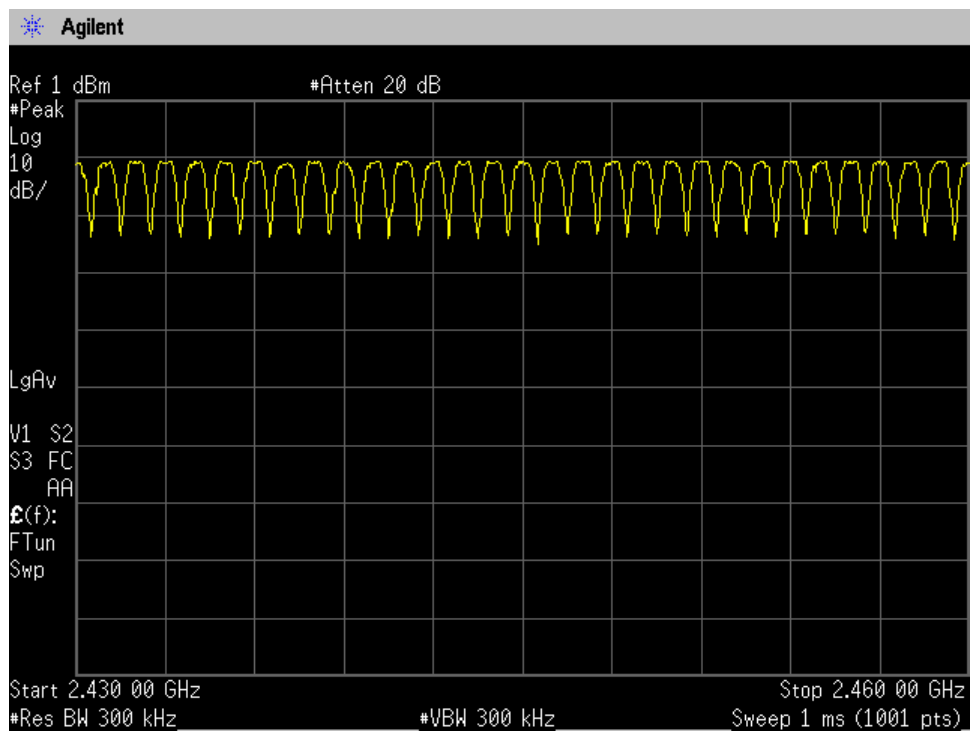


Mode of EUT : Hopping(3/3)

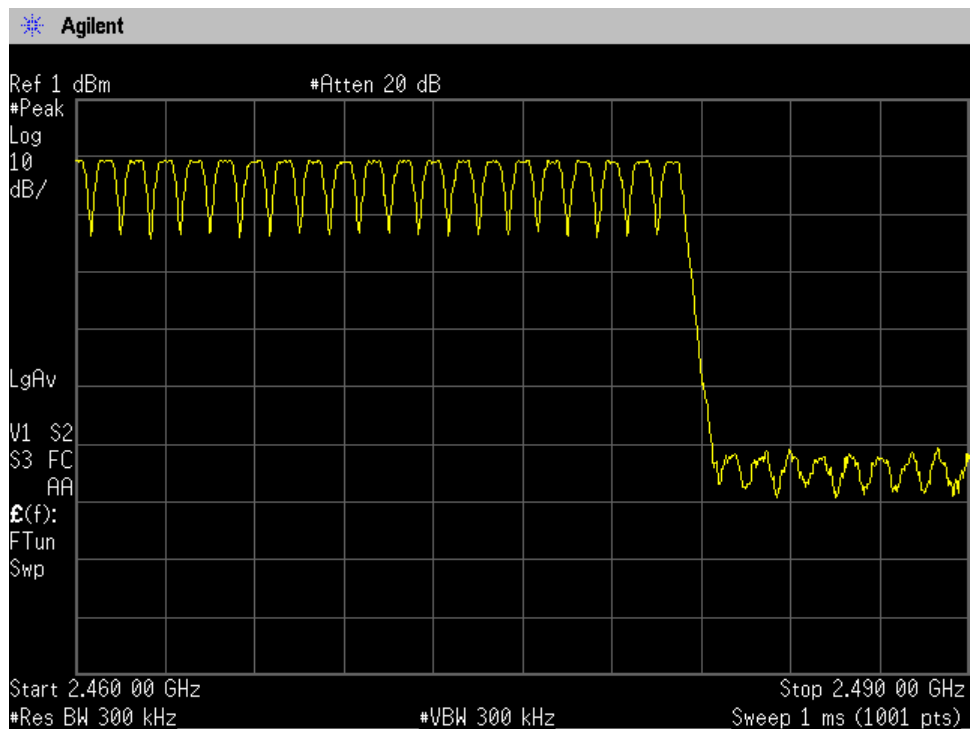





Mode of EUT : Inquiry(1/3)

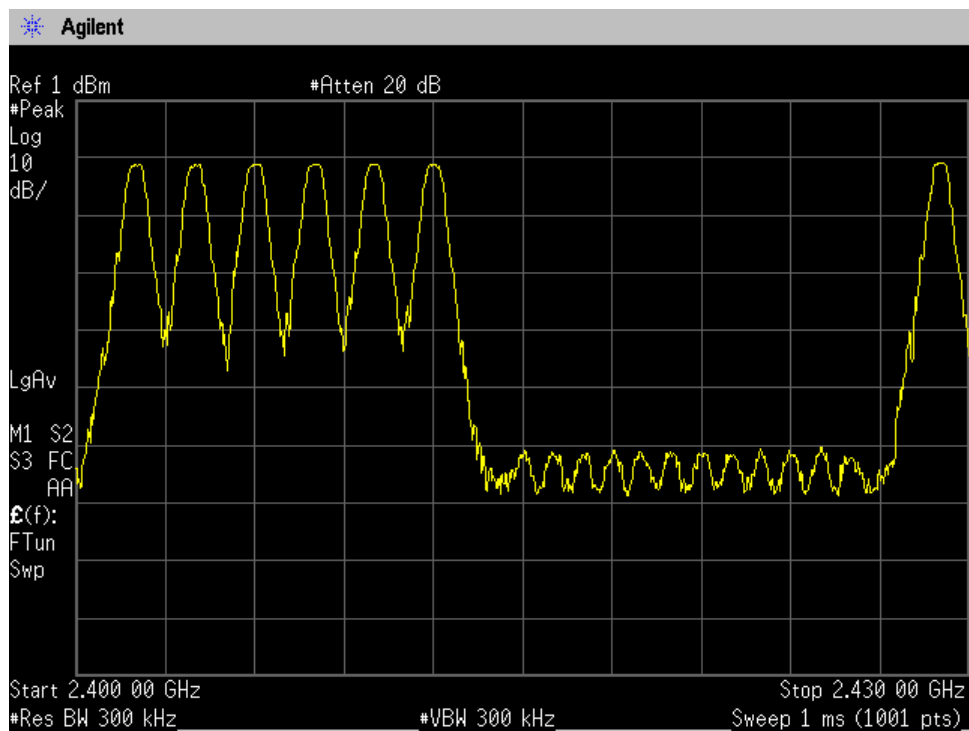

Mode of EUT : Inquiry(2/3)

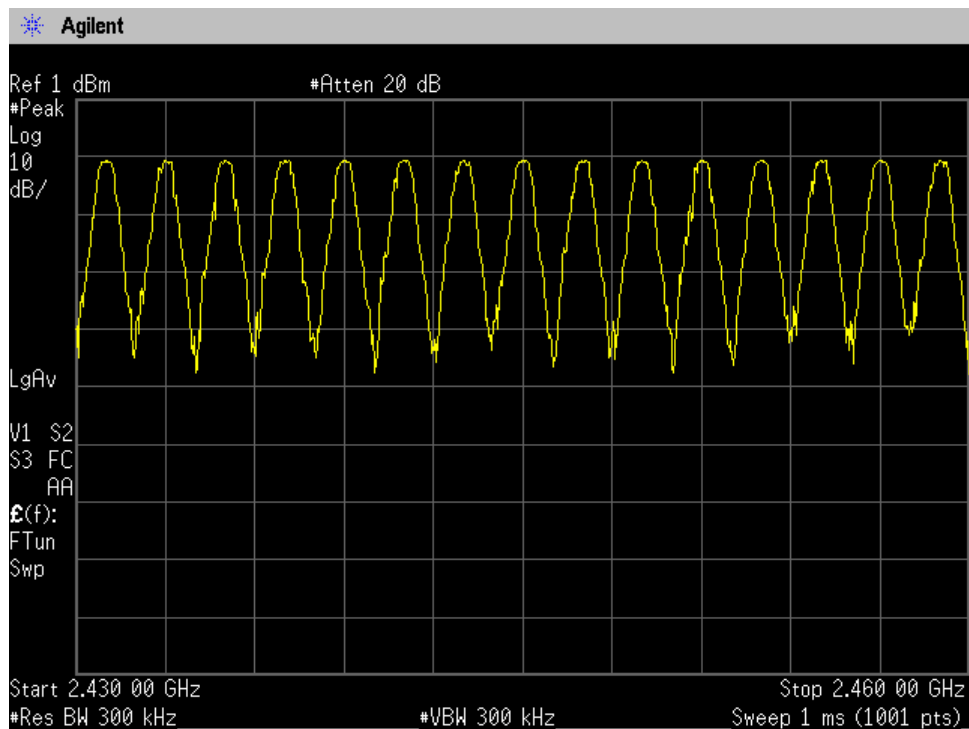

Mode of EUT : Inquiry(3/3)

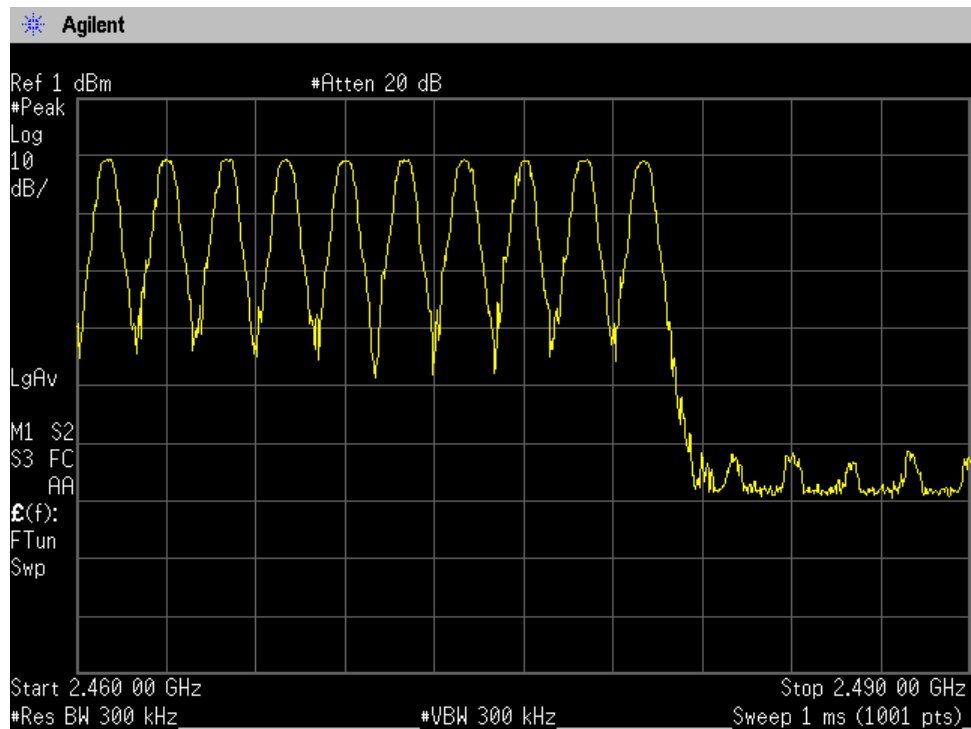

**A.3 Occupied Bandwidth**Test Date : November 17, 2010Temp.:20°C, Humi:38%

The resolution bandwidth was set to about 1% of emission bandwidth, -20dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

**1)Packet Setting : DH5(Modulation type : GFSK)**

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)
00	2402.0	843.1	884.4
39	2441.0	844.1	885.0
78	2480.0	842.2	884.2


**2)Packet Setting : 2DH5(Modulation type : pi/4-DQPSK)**

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)
00	2402.0	1171.6	1310.0
39	2441.0	1176.8	1312.0
78	2480.0	1175.8	1312.0

**3)Packet Setting : 3 DH5(Modulation type : 8DPSK)**

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)
00	2402.0	1181.6	1254.0
39	2441.0	1188.7	1257.0
78	2480.0	1188.0	1255.0


1)Packet Setting : DH5(Modulation type : GFSK)  
Low Channel

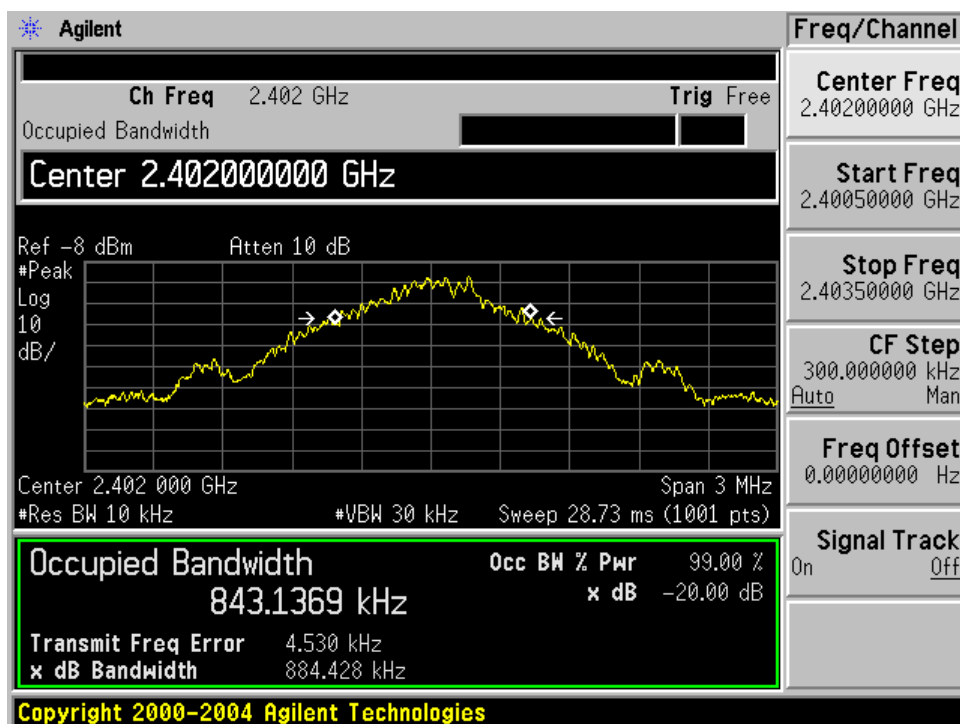

Middle Channel




## High Channel

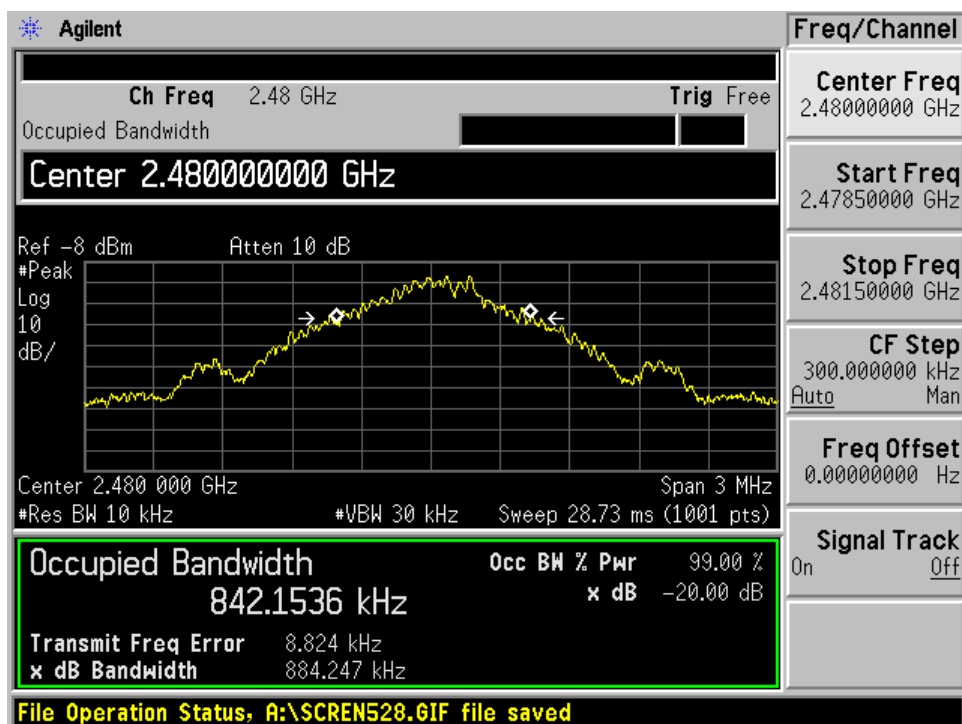


## 2)Packet Setting : 2DH5(Modulation type : pi/4-DQPSK)


### Low Channel

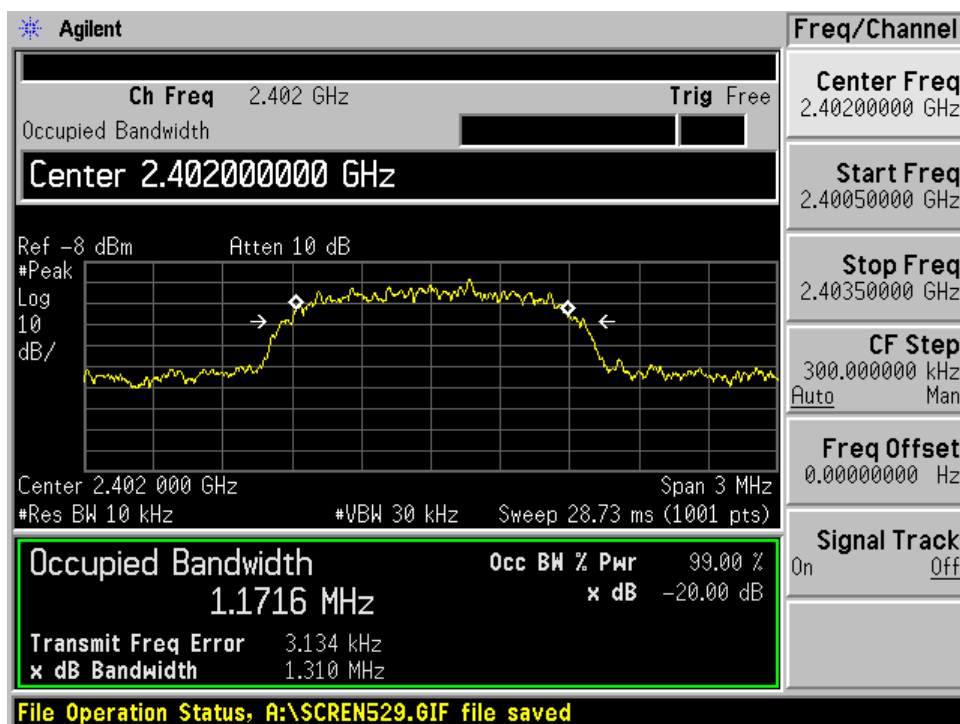

### Middle Channel

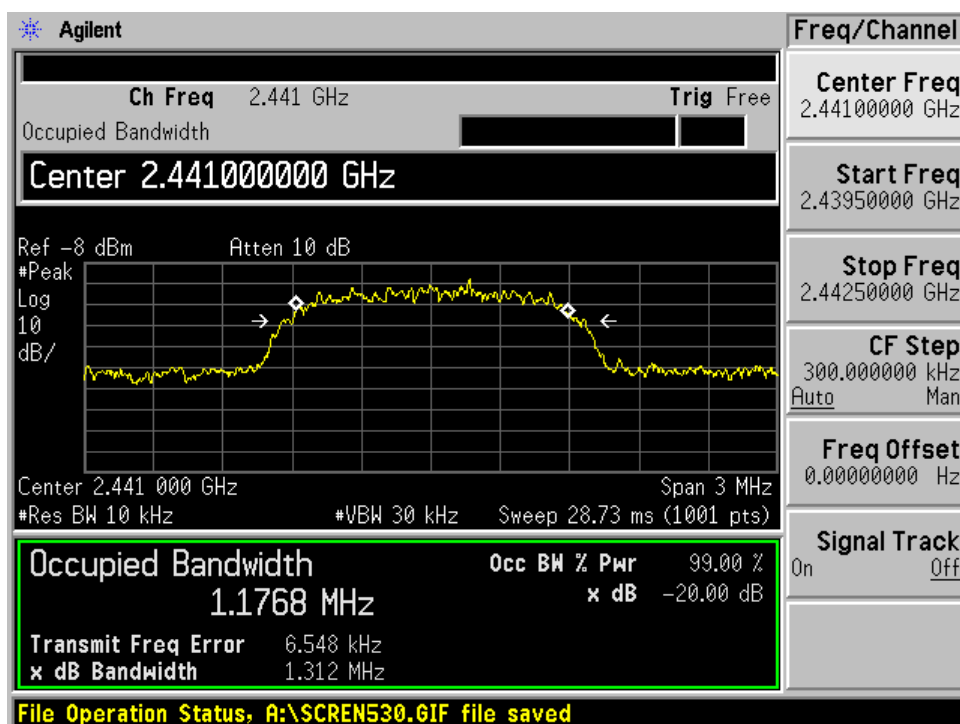


## High Channel

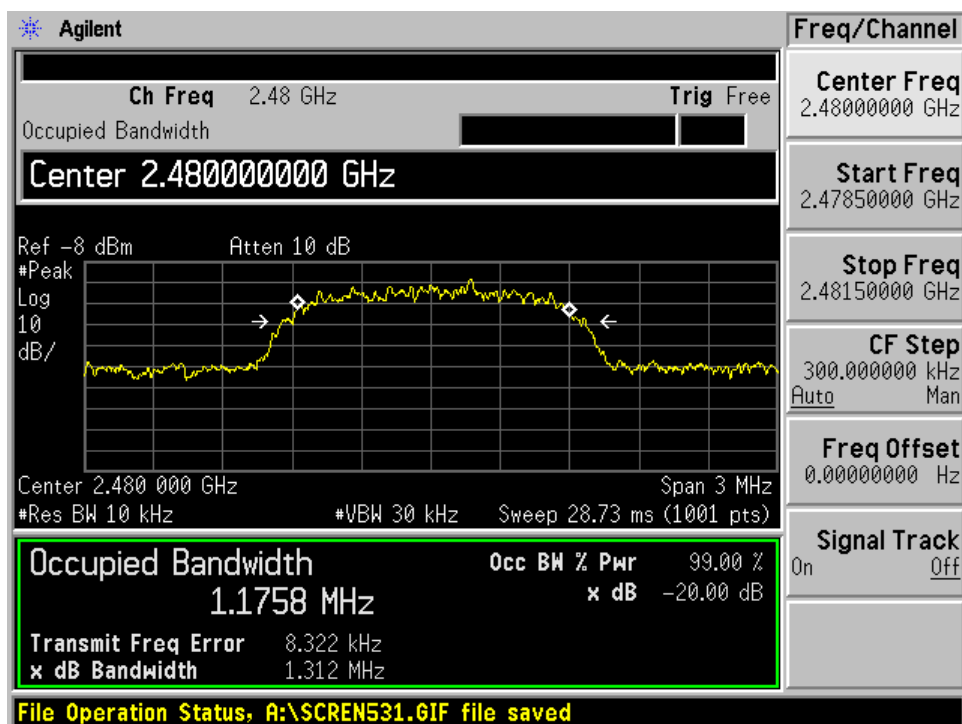


### 3)Packet Setting : 3 DH5(Modulation type : 8DPSK)

#### Low Channel

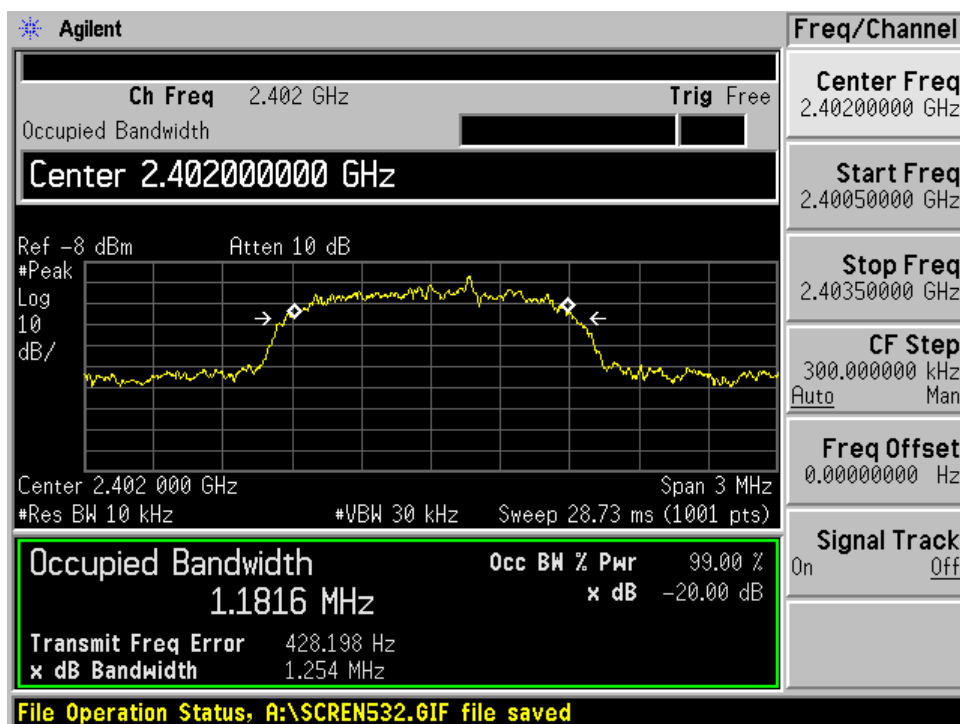


#### Middle Channel

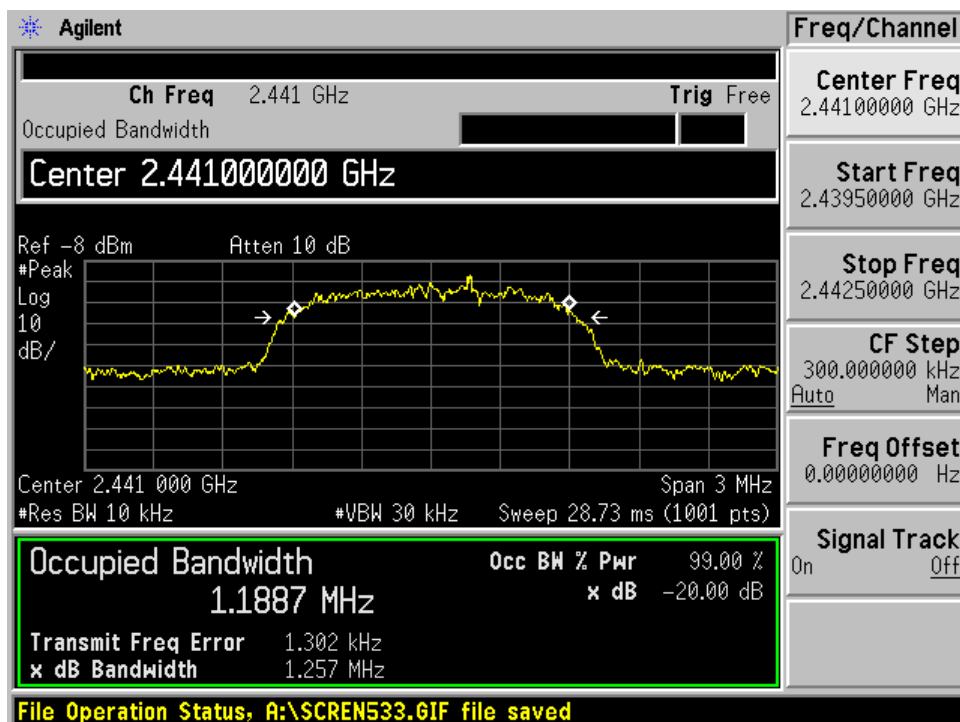



## High Channel

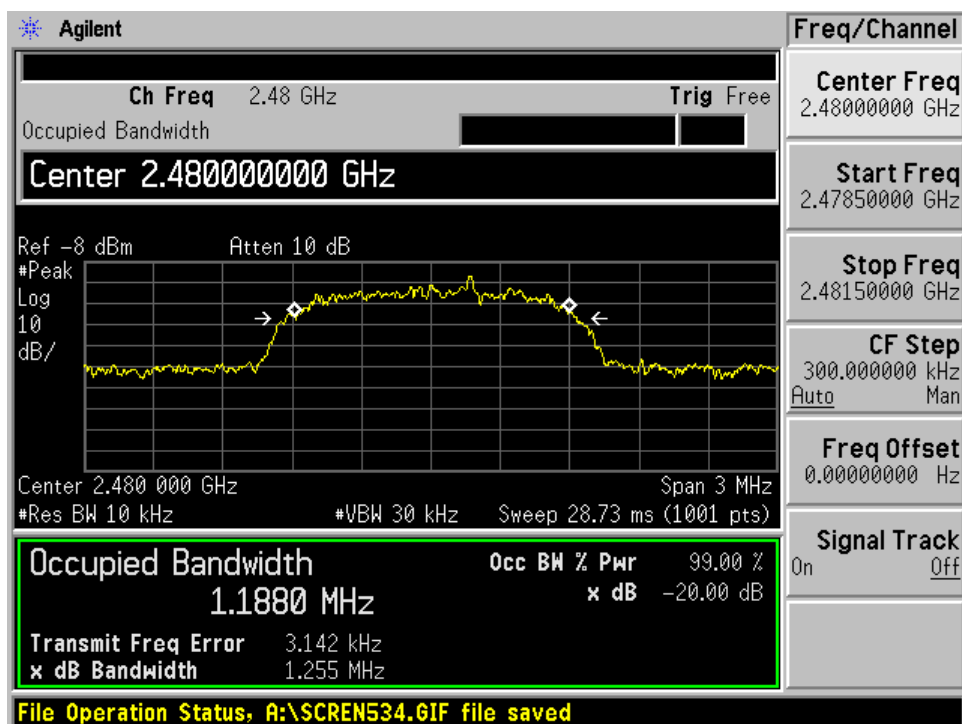


#### A.4 Dwell Time

Test Date : November 17, 2010

Temp.:20°C, Humi:38%

Mode of EUT	Dwell Time (msec)
DH1	121.6
DH3	261.6
DH5	308.1
Inquiry	64.1

DH1(Modulation type : GFSK)

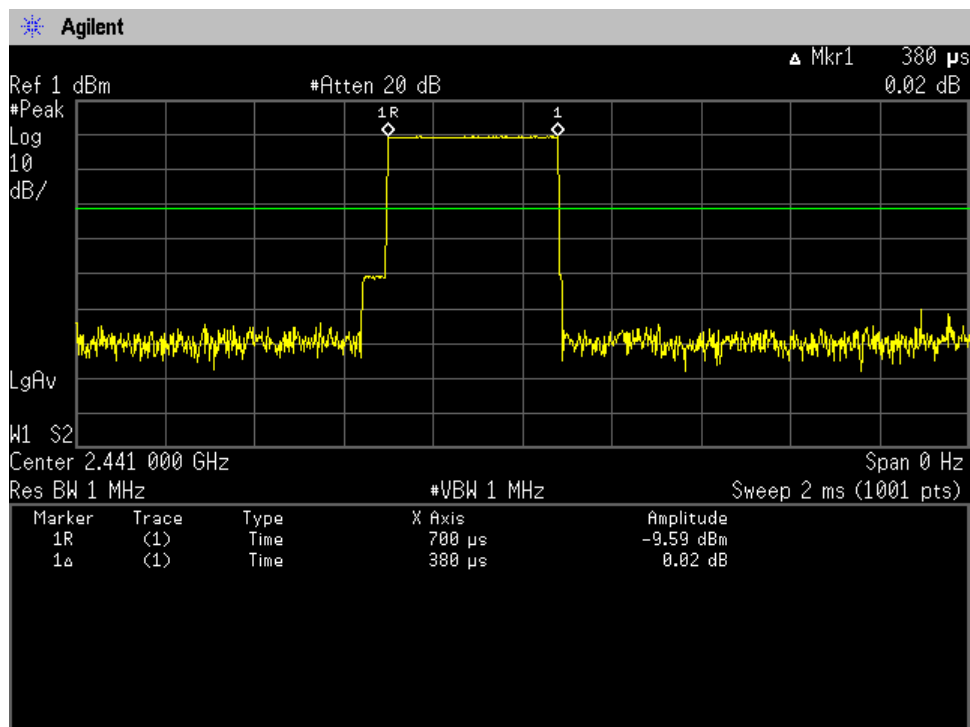


Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So the system has each channel 10.1266 times per second and so for 31.6 seconds the system have 320.0 times of appearance.

Each tx-time per appearance is 0.380 ms.


Dwell time = 320.0 \* 0.380 = 121.6 ms

DH3(Modulation type : GFSK)

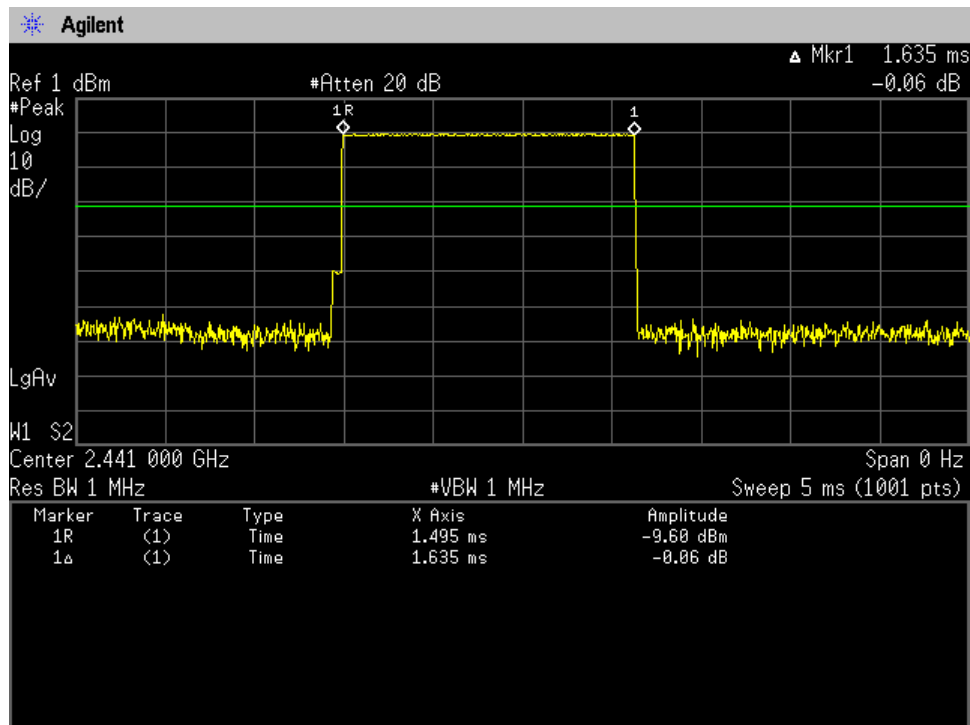


Note : A DH3 Packet need 3 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 400 hops per second with 79 channels. So the system have each channel 5.063 times per second and so for 31.6 seconds the system have 160.0 times of appearance. Each tx-time per appearance is 1.635 ms.  
Dwell time = 160.0 \* 1.635= 261.6 ms

DH5(Modulation type : GFSK)

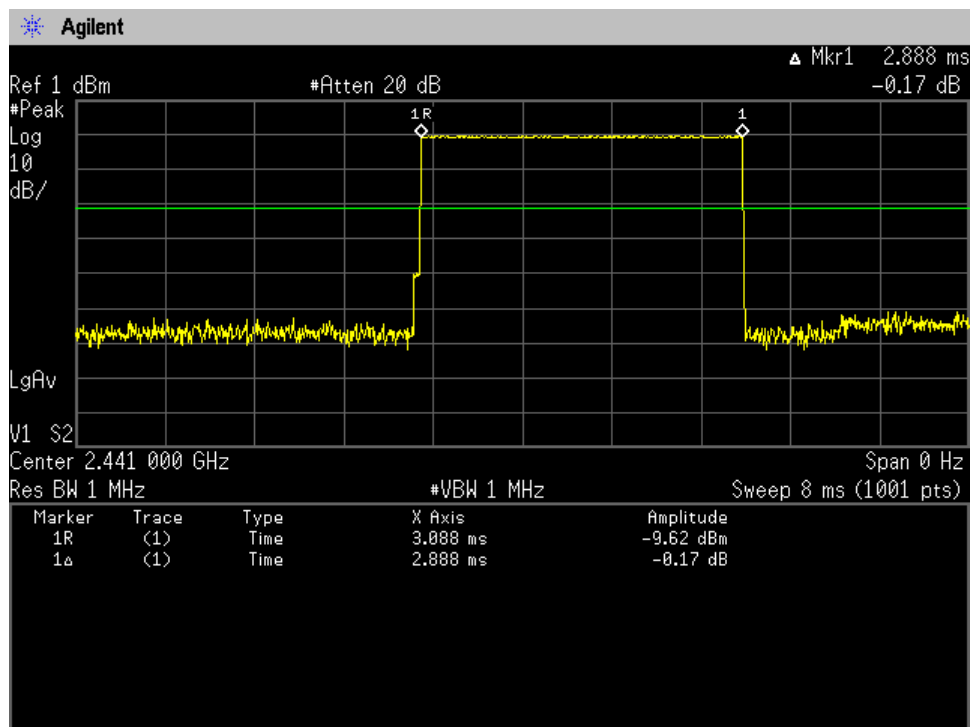

Note : A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 266.667 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance. Each tx-time per appearance is 2.888 ms.  
Dwell time = 106.7 \* 2.888= 308.1 ms

### Inquiry

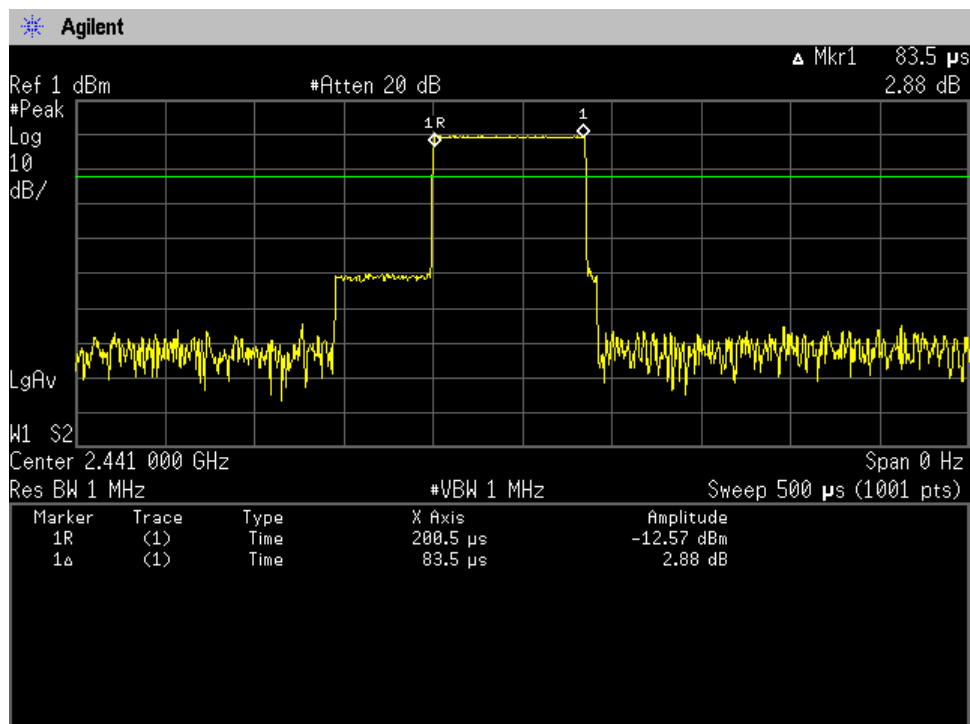

Note : The system have 32 hopping channel in Inquiry mode.

The time period =  $32 * 0.4 = 12.8$  seconds

In maximum case the bluetooth system have three blocks of 2560 ms in 12.8 s period. One block has 256 burst at each hopping channel.

Each tx-time per appearance is 0.0835 ms.

Dwell time =  $0.0835 * 256 * 3 = 64.1$  ms

## A.5 Peak Output Power(Conduction)

1)DH5(Modulation type : GFSK)

Test Date: November 17, 2010

Temp.: 20 °C, Humi: 38 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.03	-9.80	0.23	1.05	20.97	+20.74
39	2441	10.03	-9.38	0.65	1.16	20.97	+20.32
78	2480	10.03	-9.49	0.54	1.13	20.97	+20.43

Calculated result at 2441.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.03 dB
+ ) Meter Reading	=	-9.38 dBm
Result	=	0.65 dBm = 1.16 mW

Minimum Margin: 20.97 - 0.65 = 20.32 (dB)

### NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	5 MHz

2)2DH5(Modulation type : pi/4-DQPSK)

Test Date: November 17, 2010

Temp.: 20 °C, Humi: 38 %

Transmitting Frequency		Correction	Meter Reading	Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	[dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
00	2402	10.03	-7.74	2.29	1.69	20.97	+18.68
39	2441	10.03	-7.35	2.68	1.85	20.97	+18.29
78	2480	10.03	-7.59	2.44	1.75	20.97	+18.53

Calculated result at 2441.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.03 dB
+ ) Meter Reading	=	-7.35 dBm
Result	=	2.68 dBm = 1.85 mW

Minimum Margin: 20.97 - 2.68 = 18.29 (dB)

#### NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	5 MHz

## 3)3DH5(Modulation type : 8DPSK)

Test Date: November 17, 2010

Temp.: 20 °C, Humi: 38 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.03	-7.31	2.72	1.87	20.97	+18.25
39	2441	10.03	-6.99	3.04	2.01	20.97	+17.93
78	2480	10.03	-7.25	2.78	1.90	20.97	+18.19

Calculated result at 2441.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.03 dB
+ ) Meter Reading	=	-6.99 dBm
Result	=	3.04 dBm = 2.01 mW

Minimum Margin: 20.97 - 3.04 = 17.93 (dB)

## NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	5 MHz




## A.6 Spurious Emission(Conduction)


Test Date : November 17, 2010

Temp.:20°C, Humi:38%


### Low Channel

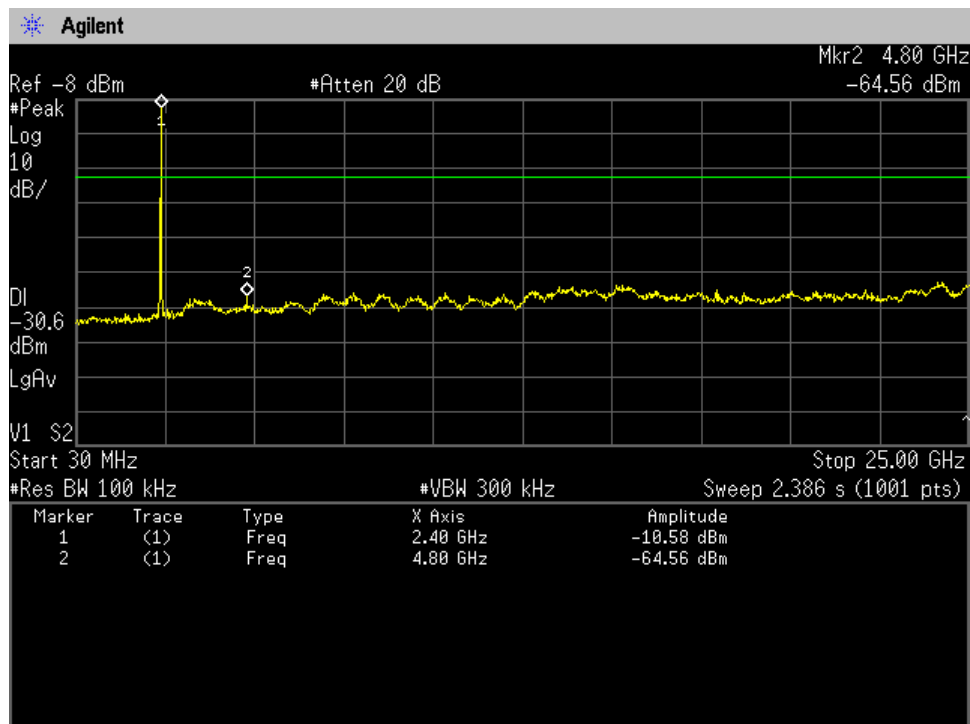


### Middle Channel

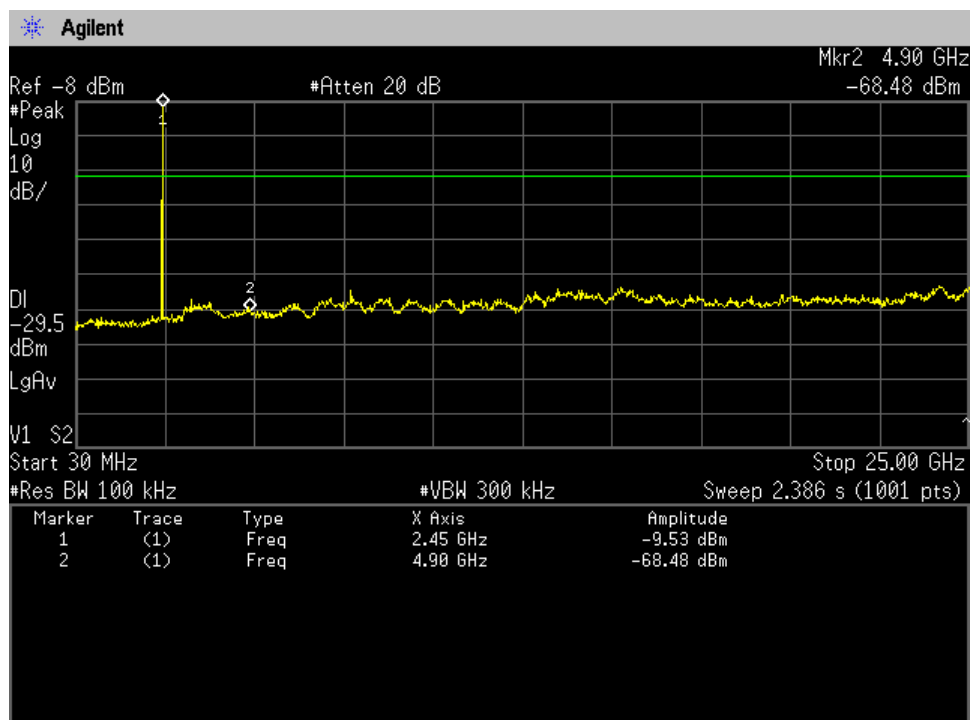

## High Channel

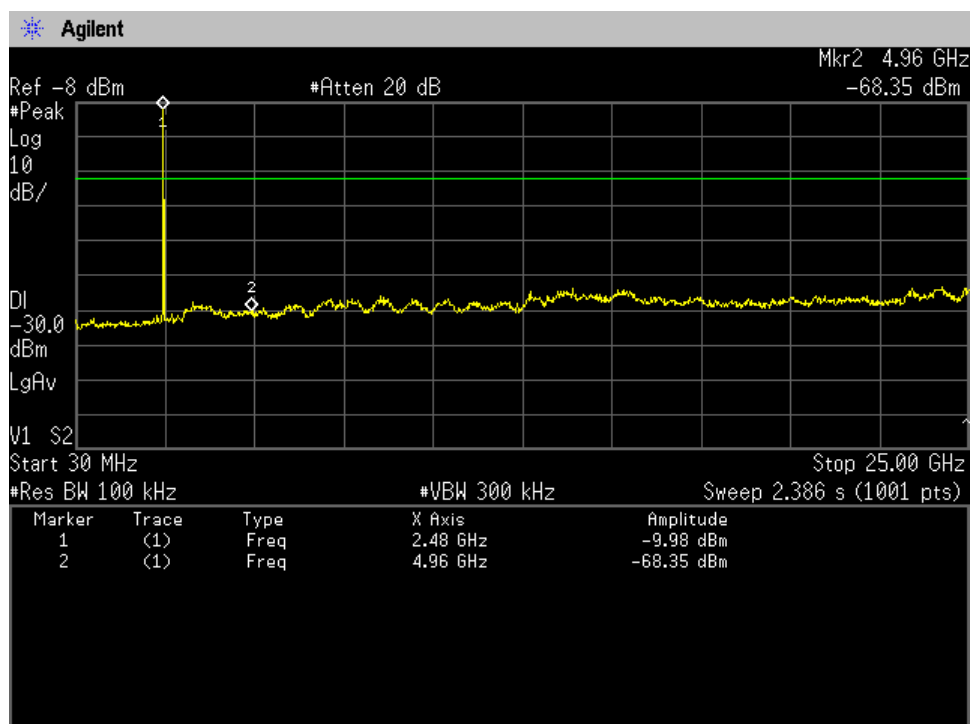


## Receiving(Middle Channel)

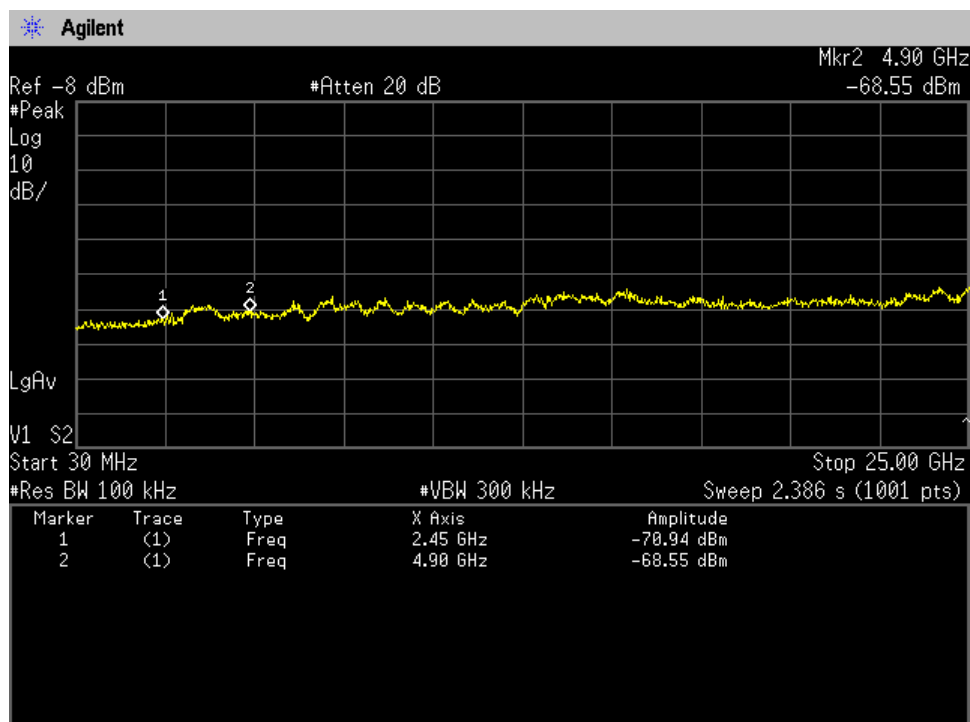


## Band-Edge Emission


### Low Channel(Hopping off), Band-Edge Emission

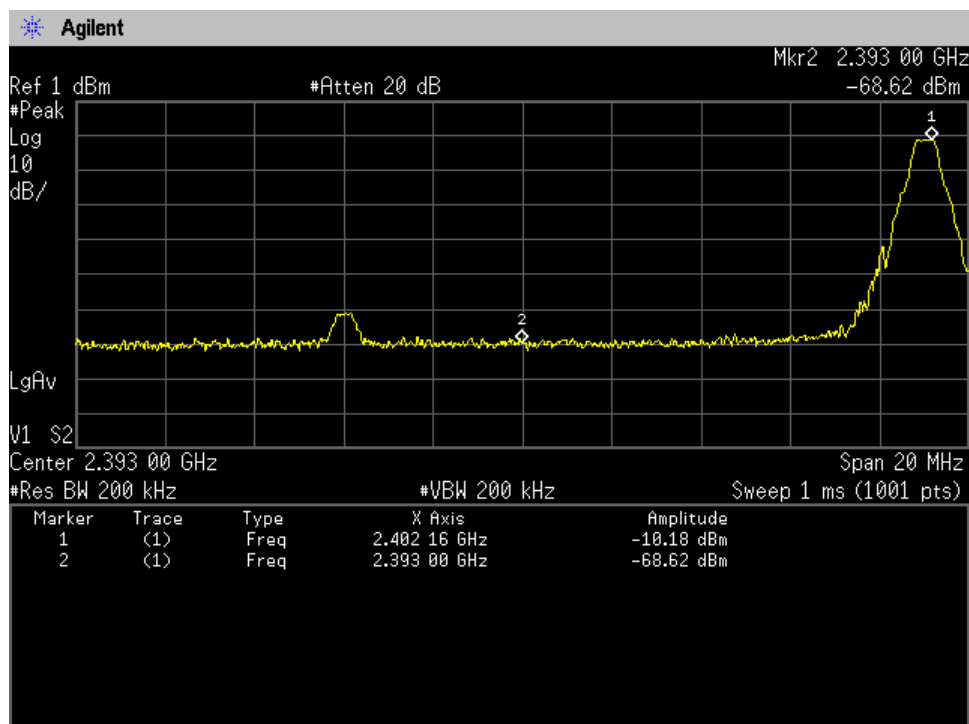


### High Channel(Hopping off), Band-Edge Emission

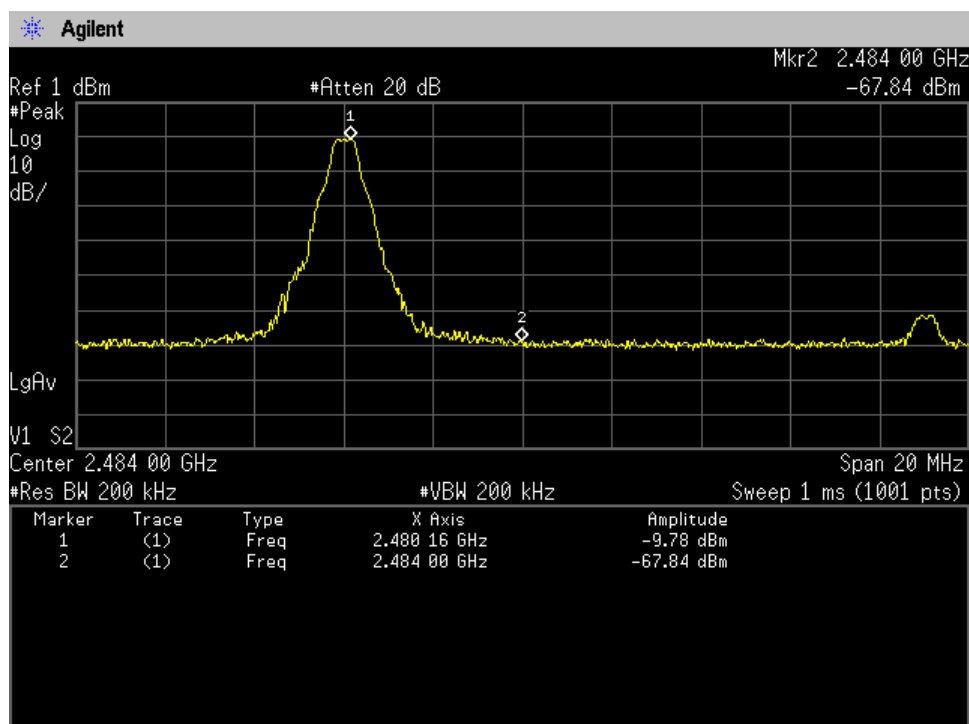

### Low Channel(Hopping on), Band-Edge Emission

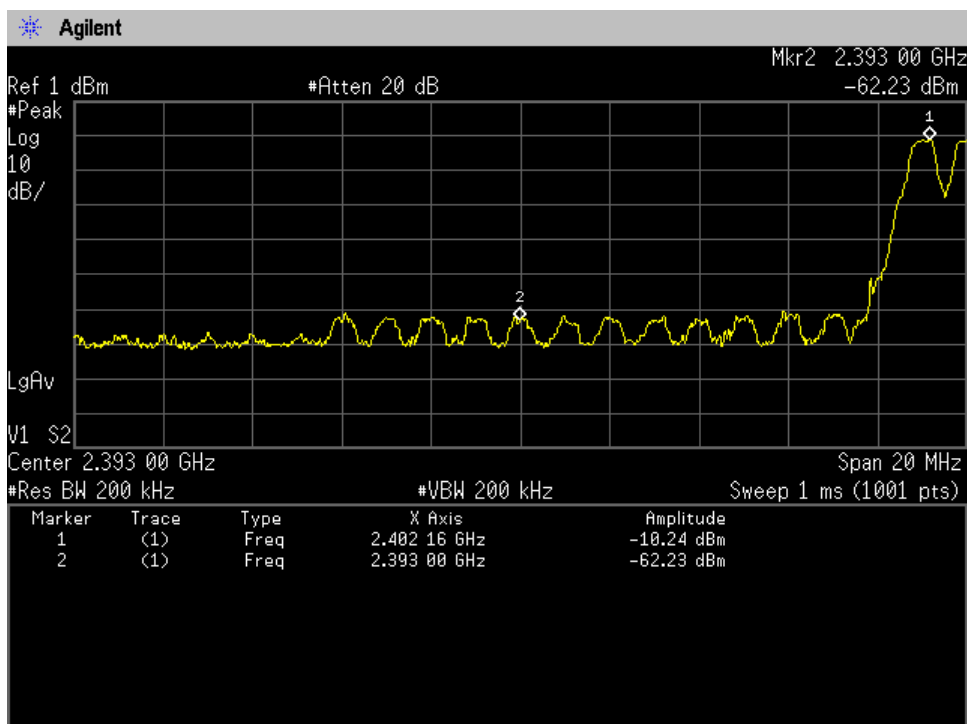

### High Channel(Hopping on), Band-Edge Emission

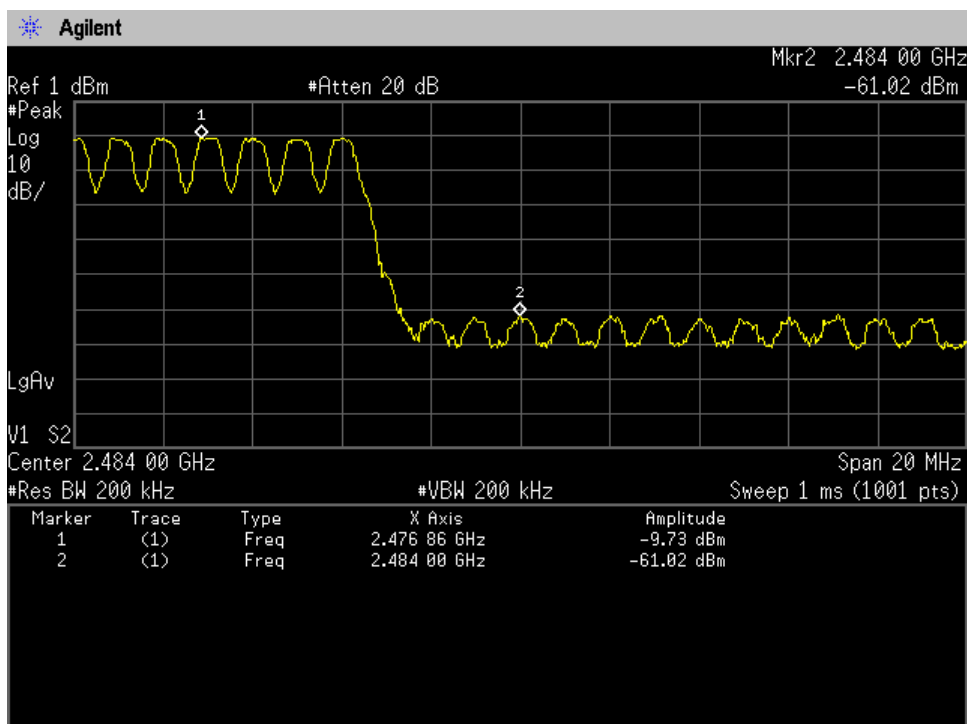


## A.7 AC Powerline Conducted Emission

Test Date: November 14, 2010

Temp.: 19 °C, Humi: 53 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA		VB							
		QP	AVE	QP	AVE	QP	AVE	QP	AVE		
0.15	10.0	37.0	--	36.0	--	66.0	56.0	47.0	--	+19.0	-
0.16	10.0	36.0	--	36.0	--	65.5	55.5	46.0	--	+19.5	-
1.45	10.0	25.0	--	30.5	--	56.0	46.0	40.5	--	+15.5	-
1.53	10.0	27.6	--	30.5	--	56.0	46.0	40.5	--	+15.5	-
1.68	10.0	29.0	--	29.0	--	56.0	46.0	39.0	--	+17.0	-
1.79	10.0	29.1	--	30.5	--	56.0	46.0	40.5	--	+15.5	-
1.84	10.0	29.5	--	31.5	--	56.0	46.0	41.5	--	+14.5	-
3.08	10.1	17.0	--	19.0	--	56.0	46.0	29.1	--	+26.9	-
3.50	10.1	17.0	--	21.0	--	56.0	46.0	31.1	--	+24.9	-
30.00	11.2	< 10.0	--	< 10.0	--	60.0	50.0	< 21.2	--	> +38.8	-

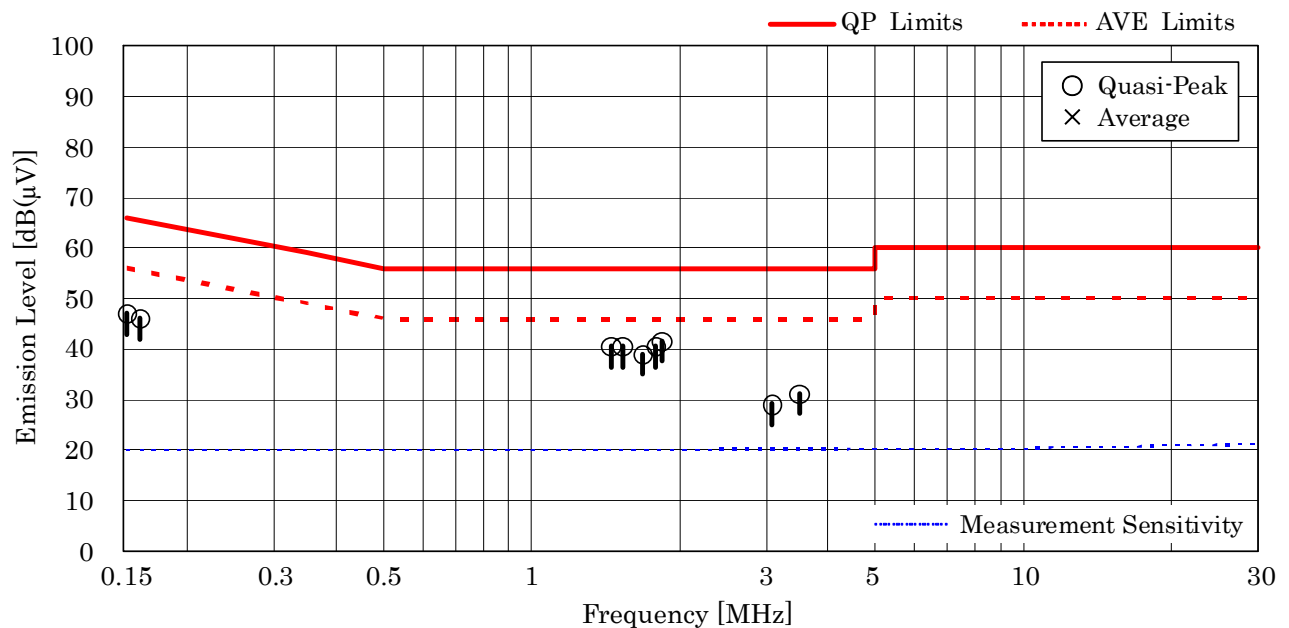

### NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.84 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading = 10.0 + 31.5 = 41.5 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

## A.8 Field Strength of Spurious Radiation


### A.8.1 Band-edge Compliance

Test Date : November 8, 2010

Temp.:24°C, Humi:37%

Mode of EUT : Hopping


Antenna Polarization : Horizontal

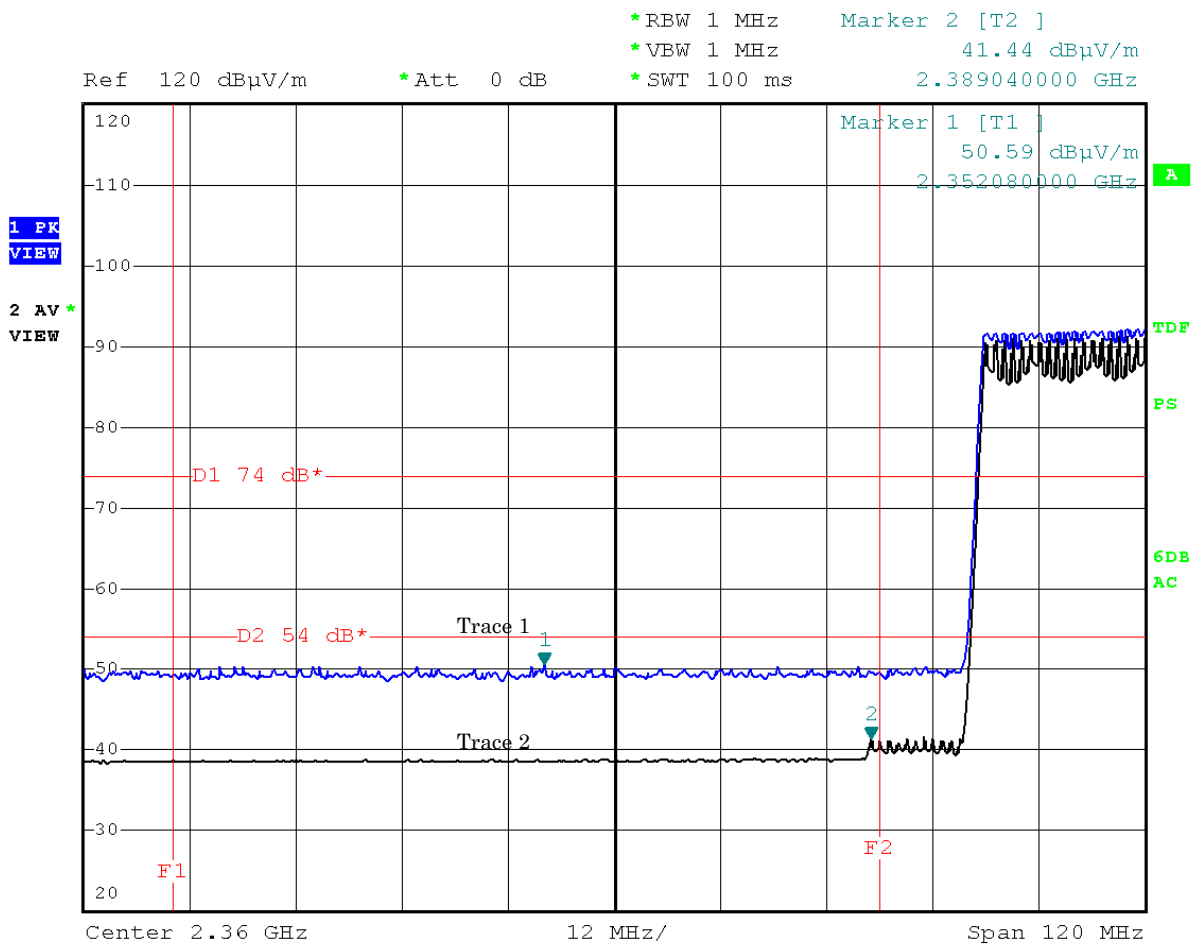

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping


Antenna Polarization : Vertical

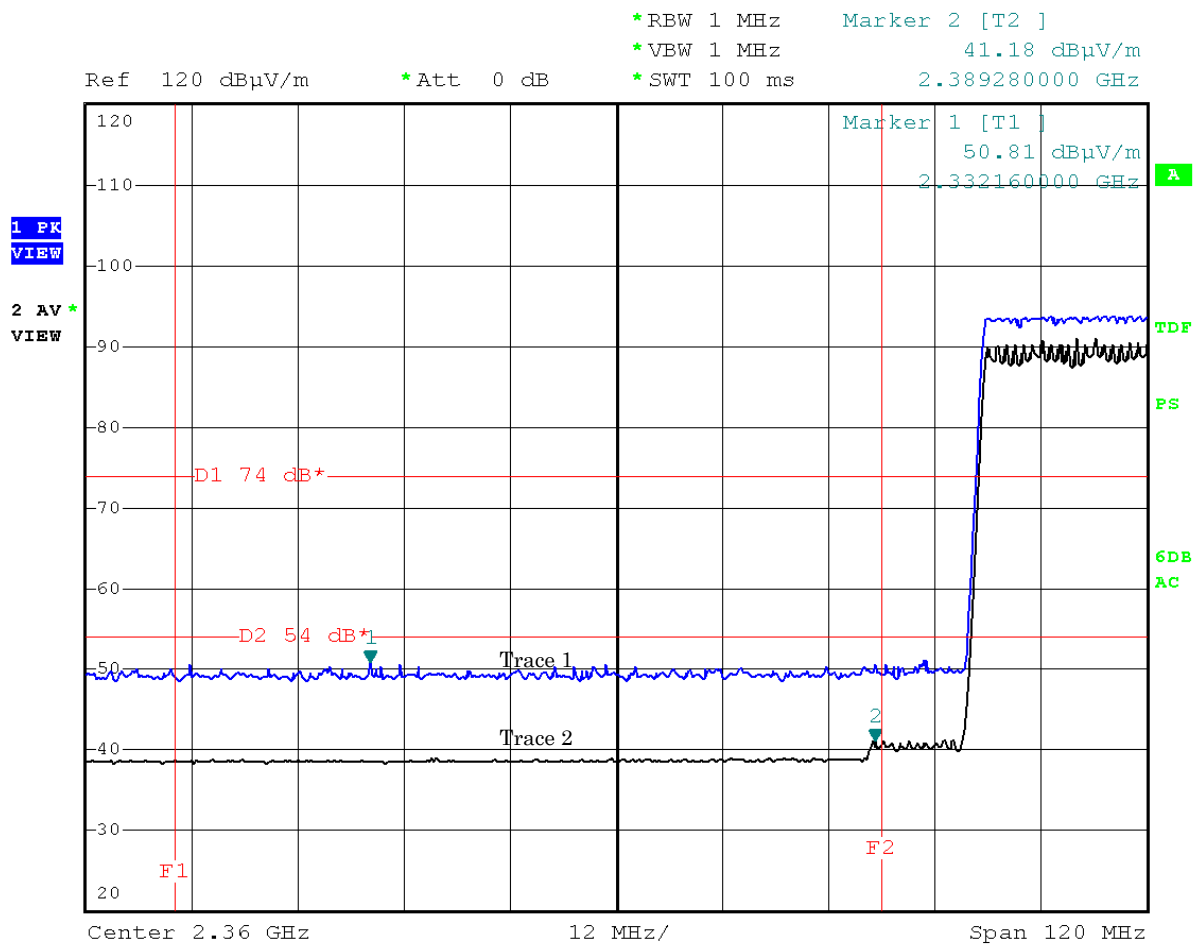

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping

Antenna Polarization : Horizontal

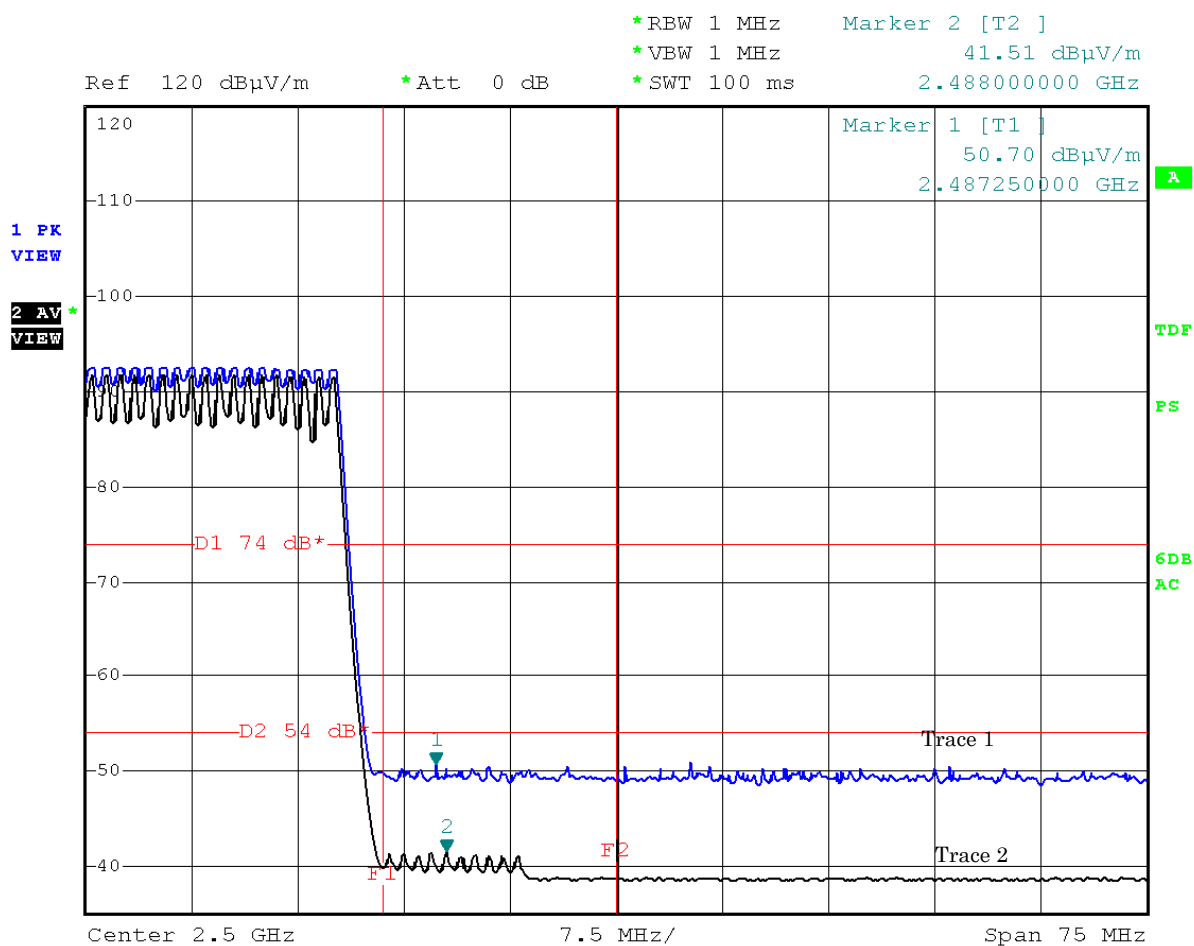


Note: The trace 1 is Peak detection. The trace 2 is Average detection.



Mode of EUT : Hopping

Antenna Polarization : Vertical

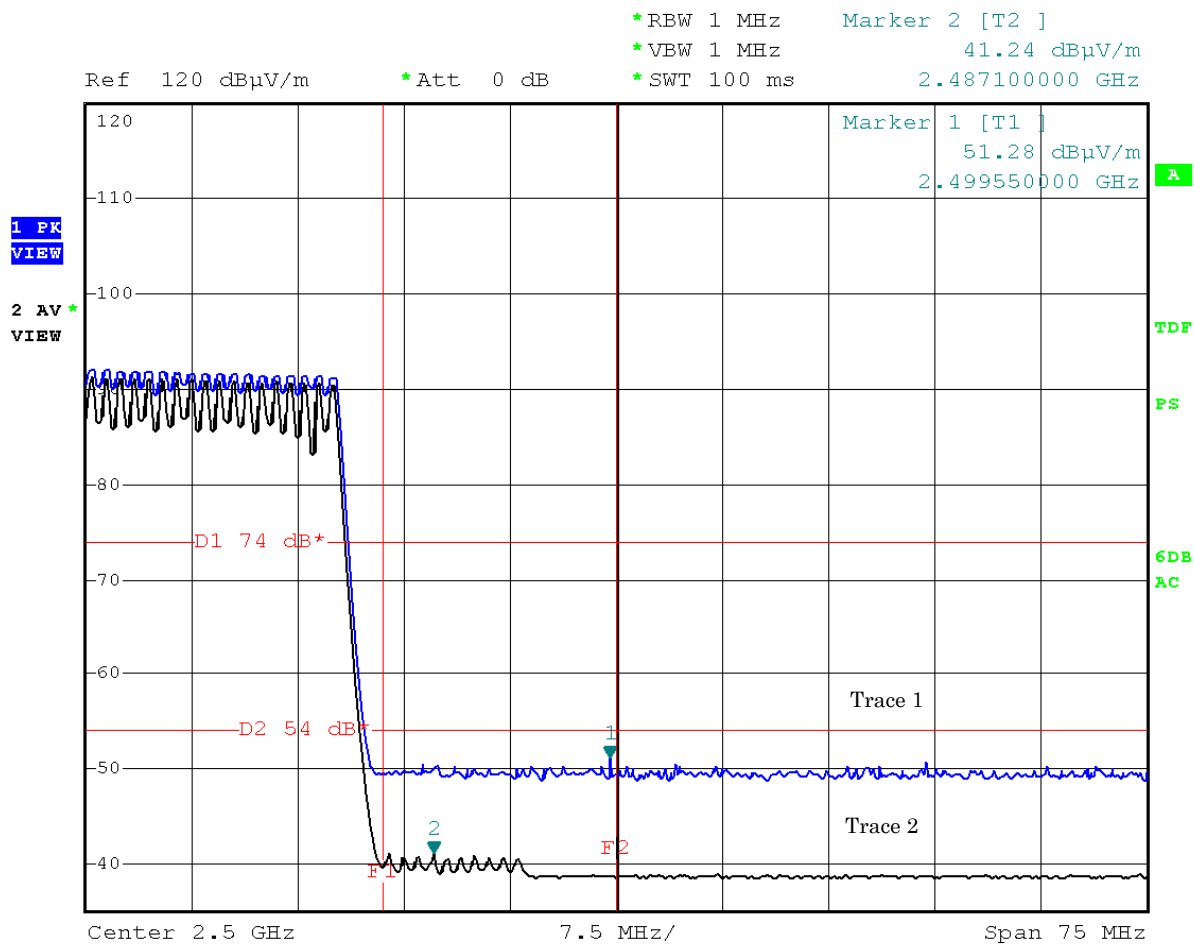

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

## A.8.2 Other Spurious Emission

### A.8.2.1 Other Spurious Emission(9kHz – 30MHz)

Test Date : November 14, 2010

Temp.:19°C, Humi:54%

Mode of EUT : All modes have been investigated and the worst case mode for channel (39ch: 2441MHz) has been listed.

Results : No spurious emissions in the range 20dB below the limit.


### A.8.2.2 Other Spurious Emission(30MHz – 1000MHz)

Mode of EUT : All modes have been investigated and the worst case mode for channel (39ch: 2441MHz) has been listed.

Test Date: November 14, 2010

Temp: 19 °C, Humi: 54 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
50.0	12.4	1.2	< 0.0	7.3	40.0	< 13.6	20.9	+19.1	-
55.0	11.0	1.3	< 0.0	8.5	40.0	< 12.3	20.8	+19.2	-
58.0	10.1	1.3	< 0.0	12.0	40.0	< 11.4	23.4	+16.6	-
58.6	9.9	1.3	< 0.0	13.6	40.0	< 11.2	24.8	+15.2	-
59.0	9.8	1.3	< 0.0	12.4	40.0	< 11.1	23.5	+16.5	-
62.3	9.0	1.4	< 0.0	12.0	40.0	< 10.4	22.4	+17.6	-
64.0	8.7	1.4	< 0.0	8.4	40.0	< 10.1	18.5	+21.5	-
160.0	15.1	2.4	< 0.0	< 0.0	43.5	< 17.5	< 17.5	> +26.0	-
256.0	17.4	3.1	< 0.0	< 0.0	46.0	< 20.5	< 20.5	> +25.5	-
366.0	15.1	3.9	< 0.0	< 0.0	46.0	< 19.0	< 19.0	> +27.0	-
640.0	19.5	5.3	< 0.0	< 0.0	46.0	< 24.8	< 24.8	> +21.2	-

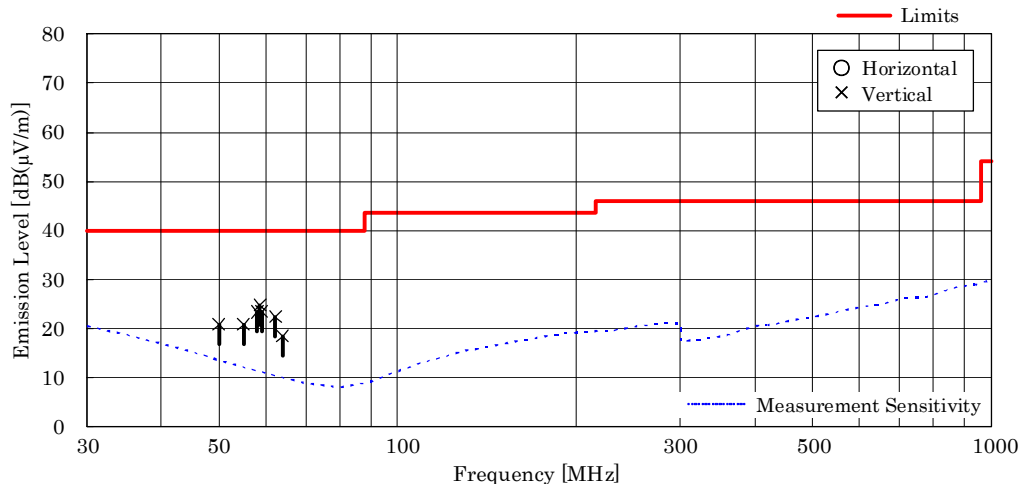

#### NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 58.6 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 9.9 + 1.3 + 13.6 = 24.8 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

### A.8.2.3 Other Spurious Emission(Above 1000MHz)

Test Date: November 8, 2010

Temp.: 24 °C, Humi: 37 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4804.0	27.4	-20.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
12010.0	33.8	-25.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.2	< 38.2	> +15.8	A/B
19216.0	40.4	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B
Test condition : TX Middle Ch												
4882.0	27.3	-20.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.6	< 36.6	> +17.4	A/B
7323.0	29.8	-19.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
12205.0	33.6	-25.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.2	< 38.2	> +15.8	A/B
19528.0	40.4	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B
Test condition : TX High Ch												
4960.0	27.3	-20.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
7440.0	29.8	-18.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 51.0	< 41.0	> +13.0	A/B
12400.0	33.6	-25.4	< 40.0	< 30.0	40.0	< 30.0	74.0	54.0	< 48.2	< 38.2	> +15.8	A/B
19840.0	40.4	-21.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 59.0	< 49.0	> + 5.0	A/B
22320.0	40.6	-20.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 60.0	< 50.0	> + 4.0	A/B

Calculated result at 22320.0 MHz, as the worst point shown on underline:

Antenna Factor = 40.6 dB(1/m)  
 Corr. Factor = -20.6 dB  
 +) Meter Reading = <30.0 dB(μV)  
 Result = <50.0 dB(μV/m)

Minimum Margin: 54.0 - <50.0 = >4.0 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak Detector / AVE : Average Detector
- Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

Test Date: November 8, 2010

Temp.: 24 °C, Humi: 37 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : RX Middle Ch												
2441.0	21.3	-21.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 39.5	< 29.5	> +24.5	A/B
4882.0	27.3	-21.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.3	< 36.3	> +17.7	A/B
7323.0	29.8	-19.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.5	< 40.5	> +13.5	A/B

Calculated result at 7323.0 MHz, as the worst point shown on underline:

Antenna Factor = 29.8 dB(1/m)

Corr. Factor = -19.3 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = <40.5 dB(μV/m)

Minimum Margin: 54.0 - <40.5 = >13.5 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 7.5 GHz .
- The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak Detector / AVE : Average Detector
- Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**Appendix B: Test Arrangement (Photographs)****B.1 AC Powerline Conducted Emission**

*This page is CONFIDENTIAL.*

## B.2 Radiated Emission

*This page is CONFIDENTIAL.*

## Appendix C: Test Instruments

### C.1 Channel Separation

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.2 Minimum Hopping Channel

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.3 Occupied Bandwidth

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.4 Dwell Time

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.5 Peak Output Power (Conduction)

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2010/6	1 Year
Power Sensor	N1921A	Agilent	B-64	2010/6	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.6 Spurious Emission (Conduction)

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2010/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2010/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2010/6	1 Year

### C.7 AC Power Conducted Emission

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCS 30	Rohde & Schwarz	A-1	2010/2	1 Year
AMN (main)	KNW-407R	Kyoritsu	D-39	2010/9	1 Year
Attenuator	MP721C	Anritsu	D-105	2010/9	1 Year
RF Cable	3D-2W	FUJIKURA	H-8	2010/10	1 Year

### C.8 Radiated Emission

#### C.8.1 Radiated Emission 9 kHz – 30 MHz

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI	Rohde & Schwarz	A-42	2009/11	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-3	2010/8	1 Year
RF Cable	RG213/U	Rohde & Schwarz	H-29	2010/8	1 Year

#### C.8.2 Radiated Emission 30MHz – 1000 MHz

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI	Rohde & Schwarz	A-42	2009/11	1 Year
Biconical Antenna	VHA9103/FBAB9177	Schwarzbeck	C-25	2010/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-28	2010/5	1 Year
RF Cable	--	----	H-1	2010/5	1 Year
Site Attenuation	--	----	H-11	2009/11	1 Year

#### C.8.3 Radiated Emission Above 1000 MHz

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU26 (S/N: 100170)	Rohde & Schwarz	--	2010/4	1 Year
Test Receiver	ESCI	Rohde & Schwarz	A-42	2009/11	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-11	2010/1	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-14	2010/1	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-54	2010/1	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2010/1	1 Year
Attenuator	2-10	Weinschel	D-79	2010/10	1 Year
Attenuator	54-10	Weinschel	D-82	2010/6	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2010/1	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2010/1	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2010/1	1 Year
Pre-Amplifier	BZ1804LD1	B&T Technologies	A-29	2010/1	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2010/2	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2010/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2010/8	1 Year
Horn Antenna	3160-05	EMCO	C-55	2009/6	2 Years
Horn Antenna	3160-06	EMCO	C-57	2009/6	2 Years
Horn Antenna	3160-07	EMCO	C-58	2009/6	2 Years
Horn Antenna	3160-08	EMCO	C-59	2009/6	2 Years
Horn Antenna	3160-09	EMCO	C-48	2009/6	2 Years