

	    <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMM NO. 0825</p>																												
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / ISED TEST REPORT Report Revision : Rev.B</p>																												
<table><tr><td>Date/s Tested</td><td>: 08-January-2020 to 09-January-2020</td></tr><tr><td>Report Issue Date</td><td>: 09-January-2020</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solution Malaysia Sdn Bhd</td></tr><tr><td>Requestor</td><td>: SZE KEAT NG</td></tr><tr><td>Product Type (PMN)</td><td>: Portable</td></tr><tr><td>Model Number (HVIN)</td><td>: H98SDH9PW7BN</td></tr><tr><td>Frequency Band</td><td>: 2.402 - 2.480 GHz</td></tr><tr><td>Rated / Max RF Output Power</td><td>: 1.5 mWatts / 1.98 mWatts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322.</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>IC Registrations</td><td>: MY0001</td></tr><tr><td>Firmware Version (FVIN)</td><td>: D20.55.25</td></tr></table> <p>The equipment was tested accordance to the requirement listed below:</p> <table><tr><td>(2.4GHz BT LE) FCC 47CFR Part 15C ISED RSS 247 Issue 2, February 2017</td><td>PASS</td></tr></table>		Date/s Tested	: 08-January-2020 to 09-January-2020	Report Issue Date	: 09-January-2020	Manufacturer/Location	: Motorola Solution Malaysia Sdn Bhd	Requestor	: SZE KEAT NG	Product Type (PMN)	: Portable	Model Number (HVIN)	: H98SDH9PW7BN	Frequency Band	: 2.402 - 2.480 GHz	Rated / Max RF Output Power	: 1.5 mWatts / 1.98 mWatts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322.	FCC Registrations	: 461337	IC Registrations	: MY0001	Firmware Version (FVIN)	: D20.55.25	(2.4GHz BT LE) FCC 47CFR Part 15C ISED RSS 247 Issue 2, February 2017	PASS
Date/s Tested	: 08-January-2020 to 09-January-2020																												
Report Issue Date	: 09-January-2020																												
Manufacturer/Location	: Motorola Solution Malaysia Sdn Bhd																												
Requestor	: SZE KEAT NG																												
Product Type (PMN)	: Portable																												
Model Number (HVIN)	: H98SDH9PW7BN																												
Frequency Band	: 2.402 - 2.480 GHz																												
Rated / Max RF Output Power	: 1.5 mWatts / 1.98 mWatts																												
Applicant Name	: Motorola Solutions Inc																												
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322.																												
FCC Registrations	: 461337																												
IC Registrations	: MY0001																												
Firmware Version (FVIN)	: D20.55.25																												
(2.4GHz BT LE) FCC 47CFR Part 15C ISED RSS 247 Issue 2, February 2017	PASS																												
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																													
<table><tr><td>Prepared By:</td><td>Approved By:</td></tr><tr><td></td><td></td></tr><tr><td><hr/></td><td><hr/></td></tr><tr><td>Faris Abdullah Test Personnel</td><td>Ho Sze Khian Responsible Engineer</td></tr></table>		Prepared By:	Approved By:			<hr/>	<hr/>	Faris Abdullah Test Personnel	Ho Sze Khian Responsible Engineer																				
Prepared By:	Approved By:																												
																													
<hr/>	<hr/>																												
Faris Abdullah Test Personnel	Ho Sze Khian Responsible Engineer																												

Table of Contents

1.0. General Information.....	3
2.0. Summary of Test Results	4
3.0. Measurement Uncertainty	4
4.0. Equipment List.....	5
5.0. Test Mode Applicability and Test Channel Detail	6
6.0. Transmitter Test Parameters	7
6.1. Radiated Emission within restricted Bands	7
6.1.1. Test Setup.....	7
6.1.2. Test Limits:	8
6.1.3. Test Data:	9
6.2. AC Powerline Conducted Emission.....	13
6.2.1. Test Setup.....	13
6.2.2. Test Limits:	14
6.2.3. Test Result.....	14

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	09-January-2020	Faris Abdullah
Rev. B	Update Front Page on Applicant Name & Address	26-March-2020	Faris Abdullah

1.0. General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Input/Output	RF port
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	INTERNAL BT/WLAN ANTENNA (RADIO ONLY)

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATT IMP STD DELTA T RUGGED LIION 5000T	MOTOROLA	PMNN4494A
UHF R2 PLUS GPS STUBBY ANT 450-520MHZ, 1575MHZ	MOTOROLA	FAF5260A

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

A pigtail was soldered out of the Bluetooth/WiFi subsection to allow for conducted tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

2.0. Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Evaluate on worst case channel from SR05882-EMC-00064	756TVZ0040
15.207	RSS-Gen 8.8	AC Powerline Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode	Not Applicable
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end- user	Not Applicable

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0. Equipment List

Radiated Emission Station (SW Version: EMC FCC RE v1.6.0)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
EMI TEST RECEIVER	ESIB40	100264	17-Jul-19	17-Jul-20
3m Semi-anechoic Chamber	NA	888032	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	T-200-S	N/A	No Cal. Req'd	No Cal. Req'd
Bore sight Antenna mast	MBS-500	N/A	No Cal. Req'd	No Cal. Req'd
PROGRAMMING CONTROLLER	3000	MF780208272	No Cal. Req'd	No Cal. Req'd
POWER SUPPLY (0-60V/0-35A)	6674A	3126A00133	11-Nov-19	11-Nov-21
SIGNAL ANALYZER	FSV40	101432	27-Jul-19	27-Jul-20
DATA LOGGER	SDL500	A.016776	05-Apr-19	05-Apr-20
BILOG ANTENNA	CBL6112D	30991	05-Aug-2019	5-Aug-20
DRG HORN FREQ.	SAS-571	1027	22-Apr-19	22-Apr-21
PREAMPLIFIER	PAM-0118	270	24-May-19	24-May-22
MICROWAVE GENERATOR	SMP04	100127	21-Mar-19	21-Mar-20
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
LOOP ANTENNA	6502	00208416	5-Sep-19	5-Sep-20
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.6.1			

5.0. Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	19	GFSK	22.8°C, 69.9%RH

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	19	GFSK	22.8°C, 69.9%RH

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	Not Applicable

Antenna Port Conducted Measurement:

☐ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK, Pi/4 DQPSK,8DPSK	Not Applicable

6.0. Transmitter Test Parameters

6.1. Radiated Emission within restricted Bands

6.1.1. Test Setup

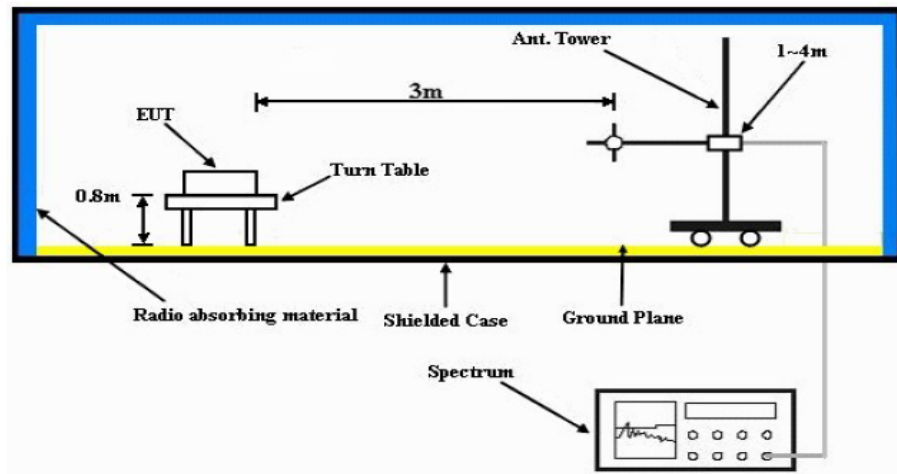

- The EUT is placed on the top of a rotating table 0.8m above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.1.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, QPK

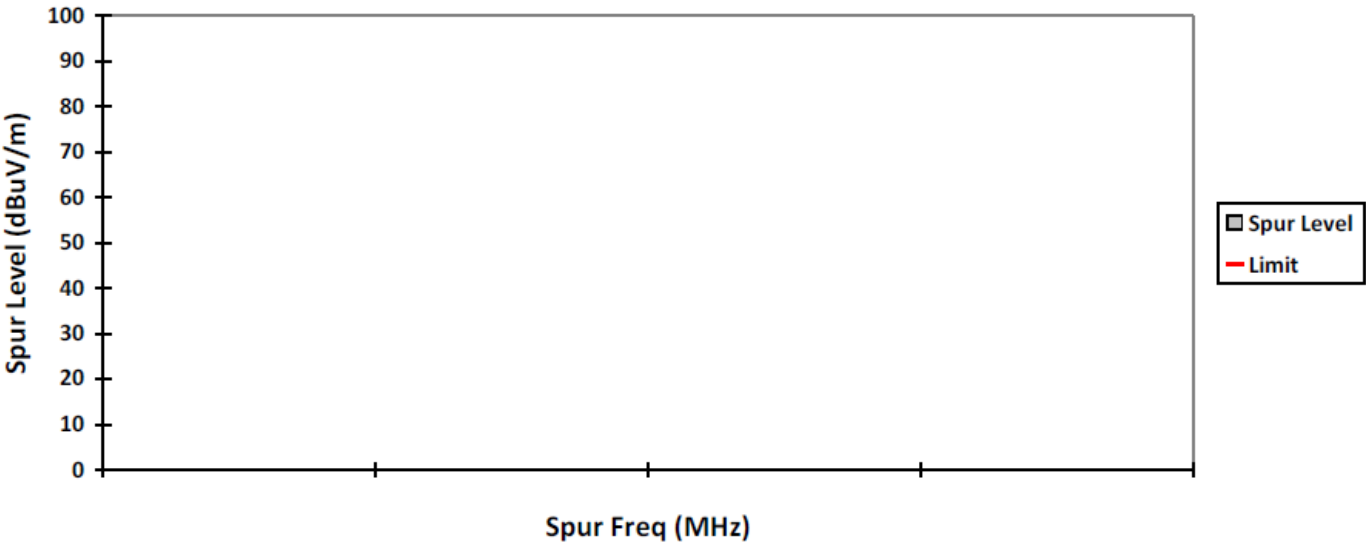


HORIZONTAL, QPK

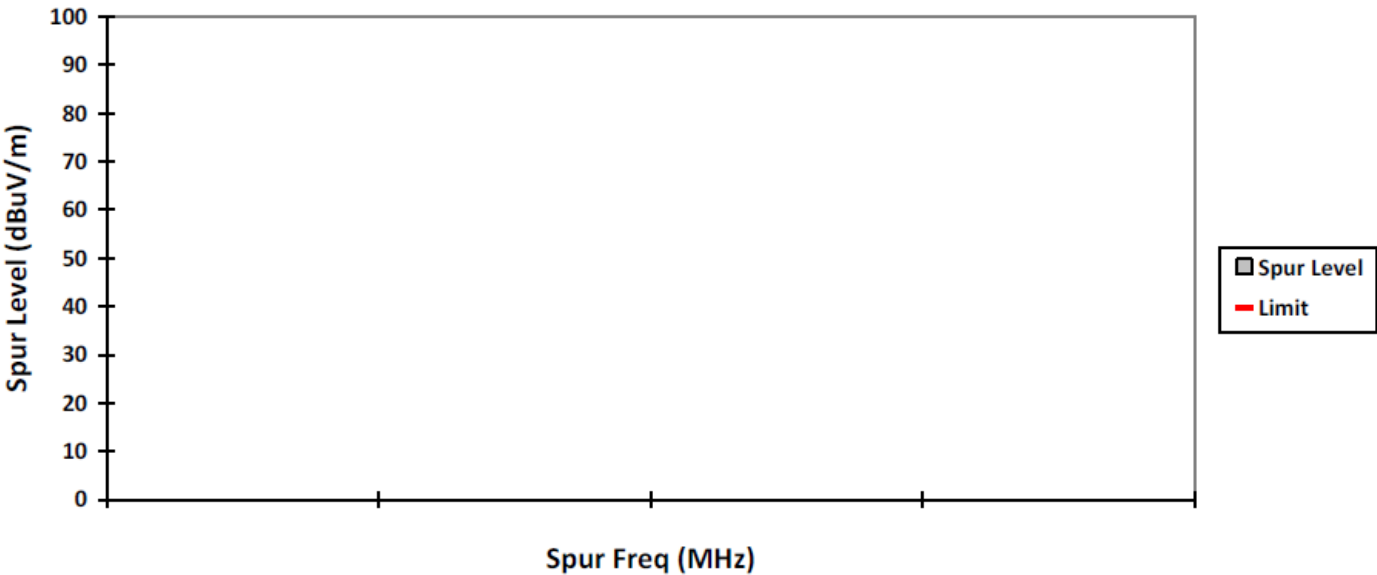


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, PK

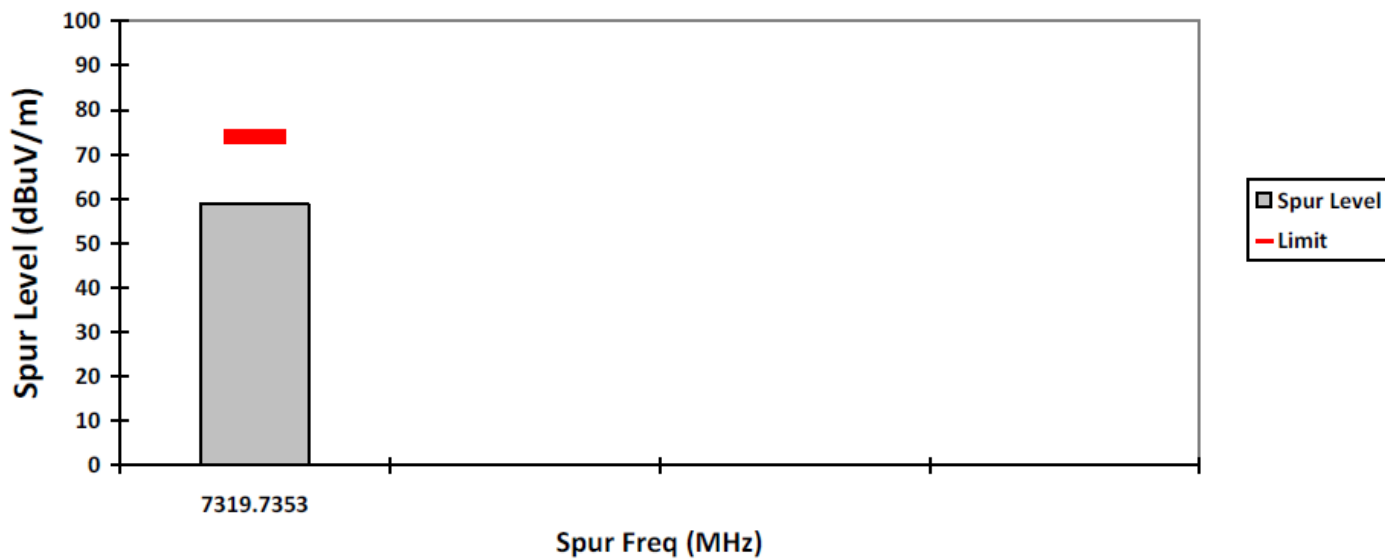


HORIZONTAL, PK

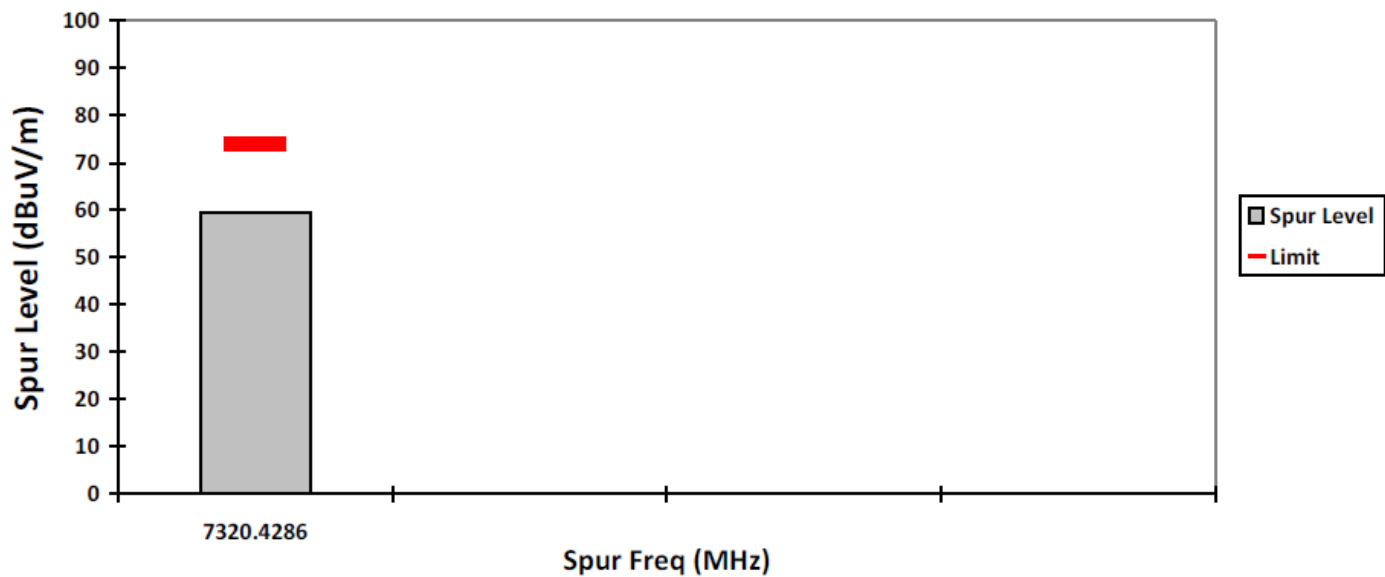


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, AV

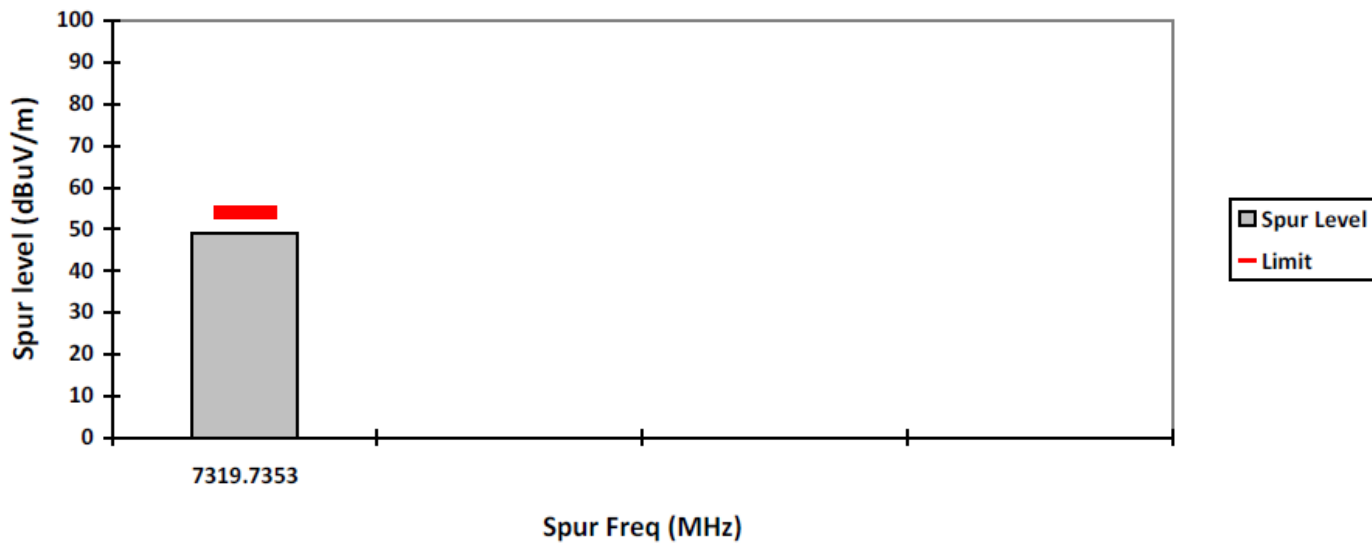


HORIZONTAL, AV

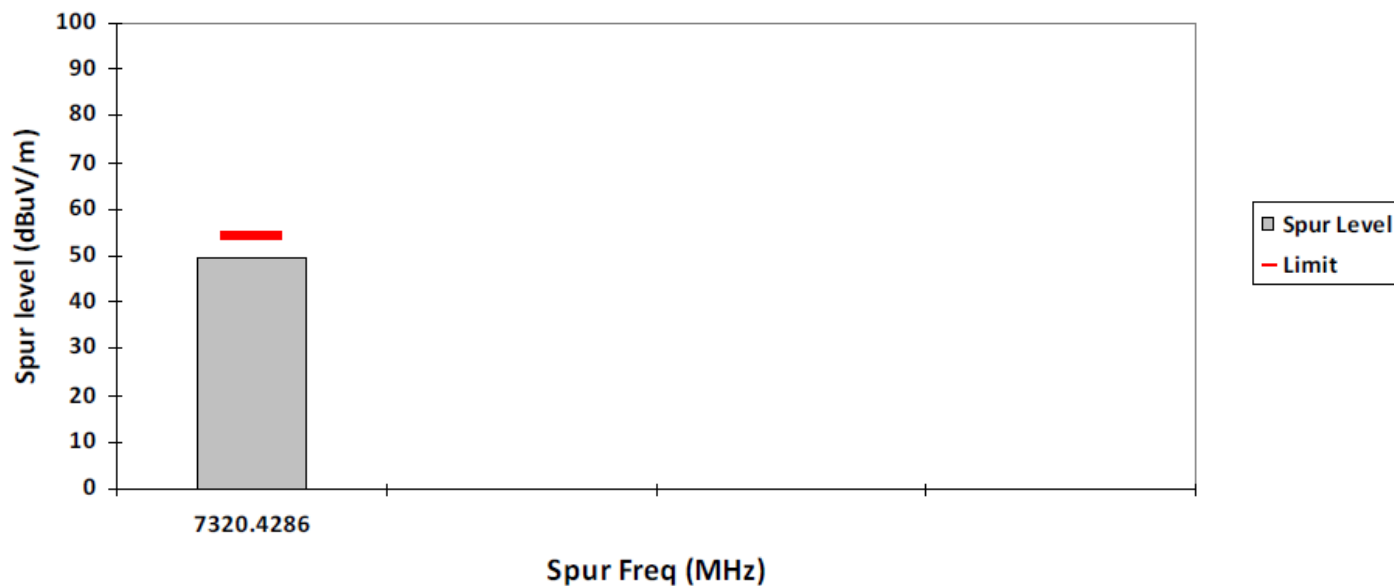

6.2. AC Powerline Conducted Emission

6.2.1. Test Setup

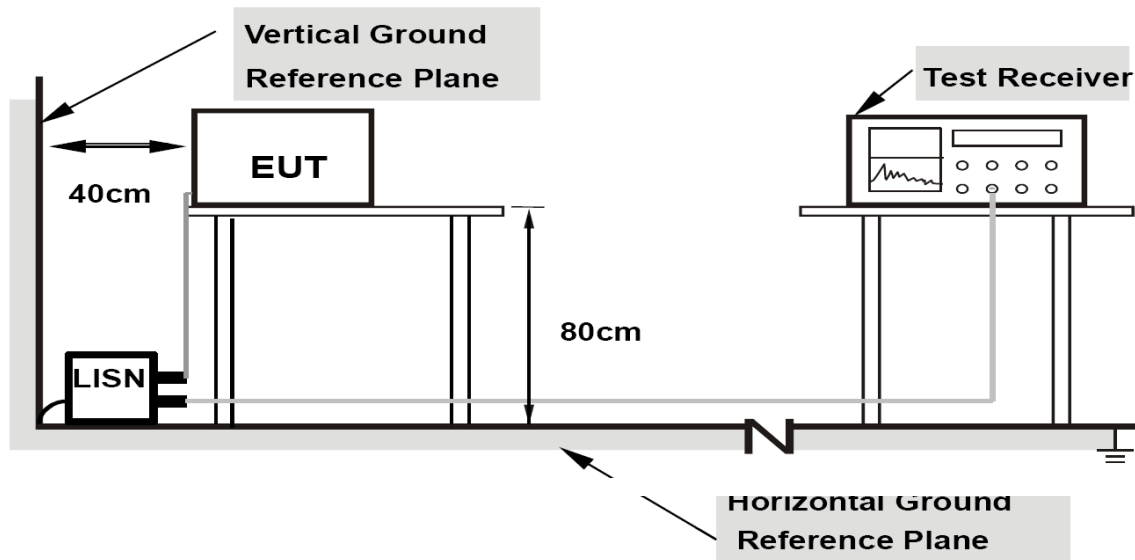

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.2.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

**Limits for conducted disturbance at the mains ports
of class A ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.2.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode

END OF TEST REPORT