



MEASUREMENT REPORT WCDMA

Applicant Name:

 Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:

05/01/2019 - 07/24/2019

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1905130010-02.BCG

FCC ID:	BCG-A2095
IC:	579C-A2095
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2095

EUT Type:

Watch

FCC Classification:

PCS Licensed Transmitter Worn on Body (PCT)

FCC Rule Part(s):

22, 24, 27

ISED Specification:

RSS-132, RSS-133, RSS-139

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.





 Randy Ortanez
 President


FCC ID: BCG-A2095	PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 1 of 61

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	5
2.4	Test Support Equipment.....	5
2.5	Test Configuration.....	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Cellular - Base Frequency Blocks	7
3.3	Cellular - Mobile Frequency Blocks	7
3.4	PCS - Base Frequency Blocks	7
3.5	PCS - Mobile Frequency Blocks.....	8
3.6	AWS - Base Frequency Blocks	8
3.7	AWS - Mobile Frequency Blocks.....	8
3.8	Radiated Measurements	9
4.0	MEASUREMENT UNCERTAINTY	10
5.0	TEST EQUIPMENT CALIBRATION DATA	11
6.0	SAMPLE CALCULATIONS	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	17
7.4	Band Edge Emissions at Antenna Terminal	33
7.5	Peak-Average Ratio	39
7.6	Radiated Power (ERP/EIRP).....	42
7.7	Radiated Spurious Emissions Measurements	45
7.8	Frequency Stability / Temperature Variation	54
8.0	CONCLUSION.....	61

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 2 of 61

MEASUREMENT REPORT

WCDMA

Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	
WCDMA850	22H	826.4 - 846.6	0.473	-3.25	0.776	-1.10	4M10F9W
WCDMA1700	27	1712.4 - 1752.6			13.490	11.30	4M09F9W
WCDMA1900	24E	1852.4 - 1907.6			15.488	11.90	4M09F9W

EUT Overview

FCC ID: BCG-A2095	 MEASUREMENT REPORT <small>(CERTIFICATION)</small>			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 4 of 61	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2095**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: D92YD00AM95F, D92YD05CM95J, FN6919608QFKTRG66

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, HDR4, HDR8, LE), NFC

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [MHz]	Antenna Gain (dBi)
814-849	-26.10
1710-1785	-12.70
1850-1915	-12.10

Table 2-1. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook w/AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: N/A
2	Apple USB Cable w/ Charging Dock w/ Dock	Model: Kanzi Model: FAPS73 Model: X241	S/N: 311C81 S/N: 17481001022 S/N: GW17F01ST22
3	USB Lightning Cable w/ AC Adapter	Model: N/A Model: A1385	S/N: N/A S/N: N/A
4	Wireless Charging Pad (WCP) Wireless Charging Pad (WCP)	Model: EVT Model: EVT	S/N: DLC915600ECLNWL3K S/N: DLC9156006TLNWK3V
5	Test Pathfinder Sinsa Board w/ SiP Cradle	Model: X1456 Model: P1 X1454S	S/N: 920-062535-01 S/N: 920-06373-02
6	DC Power Supply	Model: KPS3010D	S/N: N/A
7	Mobile Comm DC Source	Model: 66321D	S/N: MY52000555

Table 2-2. Test Support Equipment Used

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 5 of 61

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The worst case configuration was investigated for all combinations of the four materials, aluminum, stainless steel, ceramic, and aluminum/ceramic mix, and various types of wristbands, metal and non-metal wristbands. The store display sample was investigated and determined as not the worst case. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version wOS 6.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 6 of 61


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....**None**

3.2 Cellular - Base Frequency Blocks

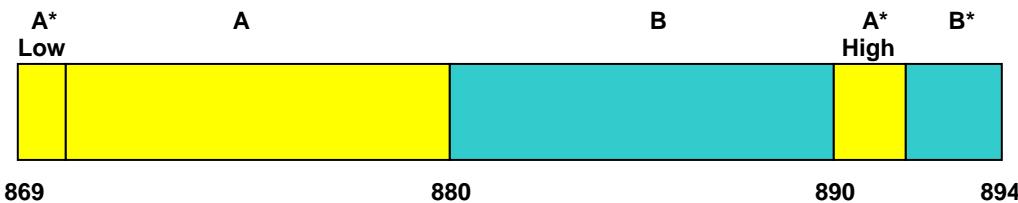


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

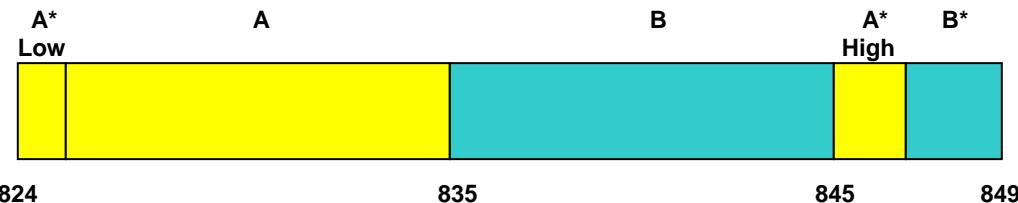


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)


BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

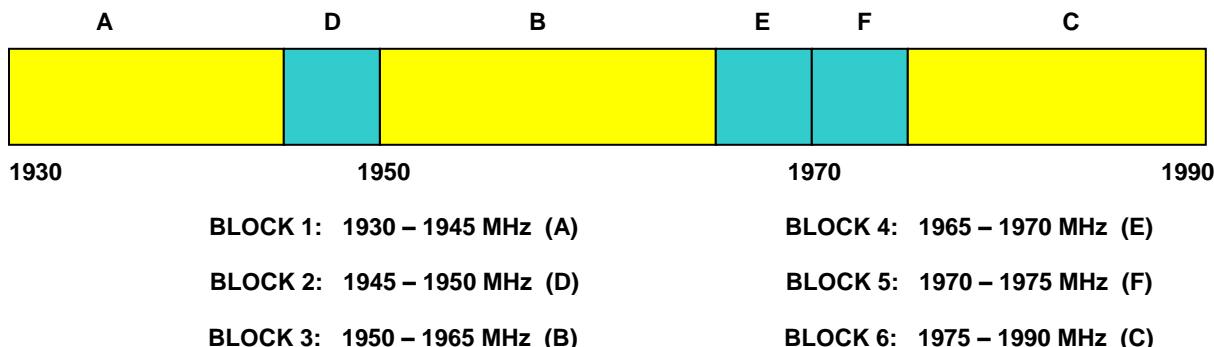


FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			


3.5 PCS - Mobile Frequency Blocks

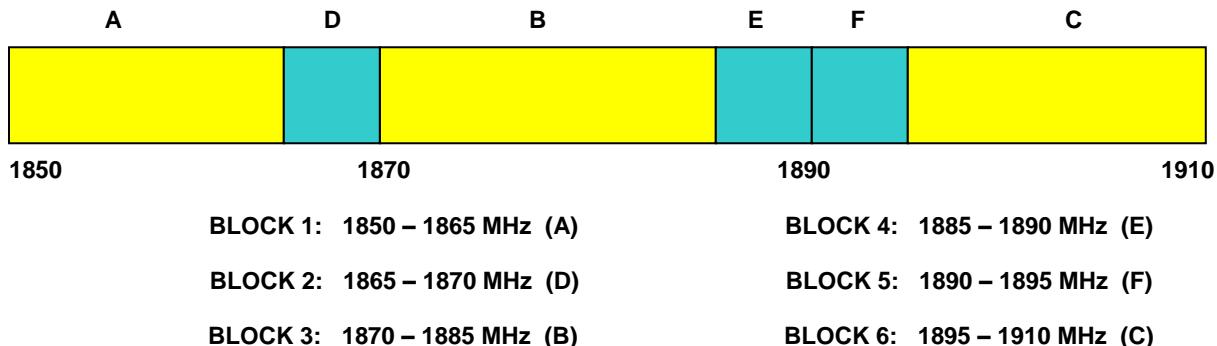

3.6 AWS - Base Frequency Blocks

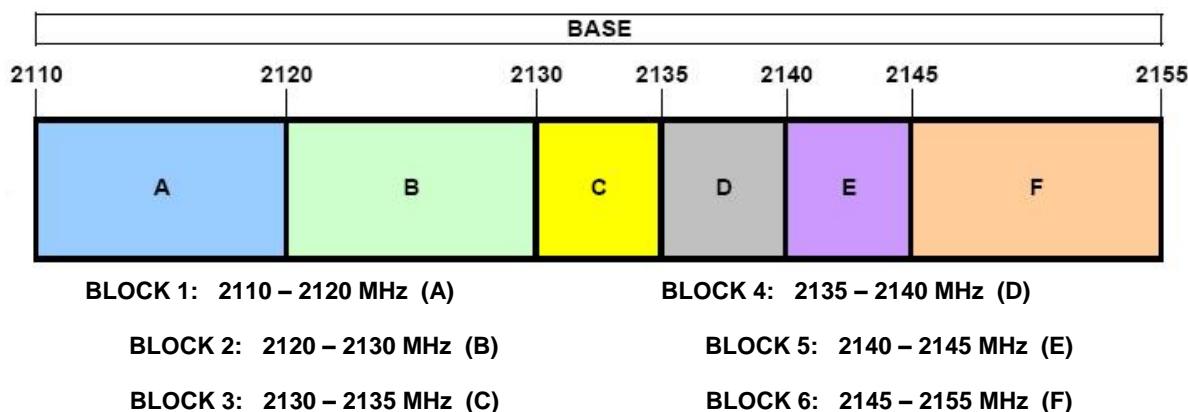

3.7 AWS - Mobile Frequency Blocks

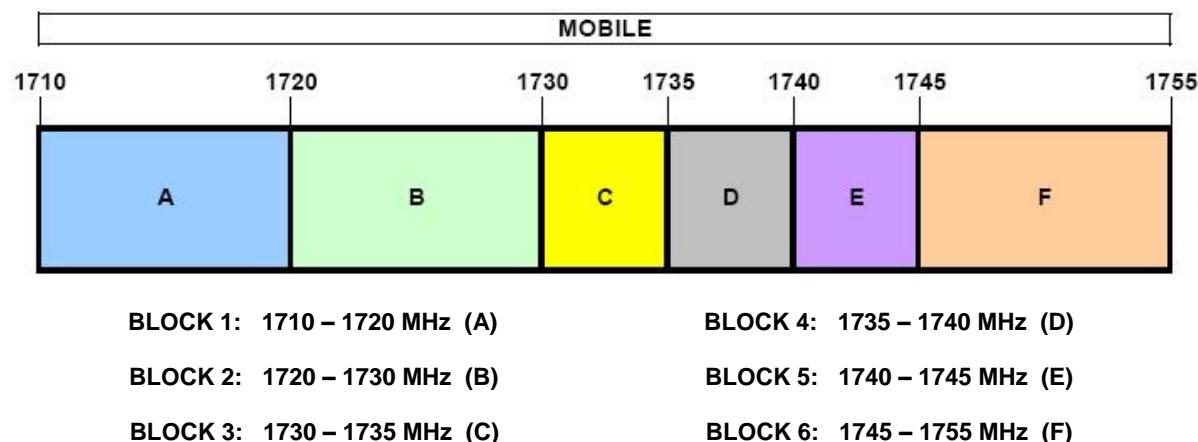

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			

3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where P_T is the transmitter output power, expressed in dBm, G_T is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and L_c signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss } [\text{dB}] + \text{antenna gain } [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss } [\text{dB}]$. The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10 \log_{10}(\text{Power } [\text{Watts}])$.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 9 of 61

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.29
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.70
Radiated Disturbance (>18GHz)	5.01
Temperature	0.01

FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019		EUT Type: Watch	Page 10 of 61

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2019	Annual	3/13/2020	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	9/10/2018	Annual	9/10/2019	T058701-03
ESPEC	SU-241	Tabletop Temperature Chamber	8/10/2018	Annual	8/10/2019	92009574
ETS-Lindgren	118490	Pre-Amplifier (30MHz - 6GHz)	8/31/2018	Annual	8/31/2019	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	12/11/2018	Annual	12/11/2019	224569
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/27/2019	Annual	2/27/2020	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/21/2019	Annual	5/21/2020	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	11/20/2018	Annual	11/20/2019	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/10/2018	Annual	8/10/2019	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/16/2018	Annual	11/16/2019	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/8/2019	Annual	1/8/2020	166869
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/5/2018	Annual	9/5/2019	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/21/2018	Annual	11/21/2019	101057
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	12/7/2018	Annual	12/7/2019	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/21/2019	Annual	3/21/2020	100519

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 11 of 61	

6.0 SAMPLE CALCULATIONS

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 12 of 61	

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2095
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
 Mode(s): WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (6.7) RSS-133(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> 43 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d) 27.50(d)(5)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	Section 7.5, 7.6
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 13 of 61

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 14 of 61	

Mode	Occupied Bandwidth [kHz]
WCDMA850	4095.00
WCDMA1700	4087.40
WCDMA1900	4093.30

Table 7-2. Occupied Band Width Results

Plot 7-1. Occupied Bandwidth Plot (Cellular WCDMA Mode)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 15 of 61



Plot 7-2. Occupied Bandwidth Plot (AWS WCDMA Mode)



Plot 7-3. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 16 of 61

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 17 of 61

Cellular WCDMA Mode

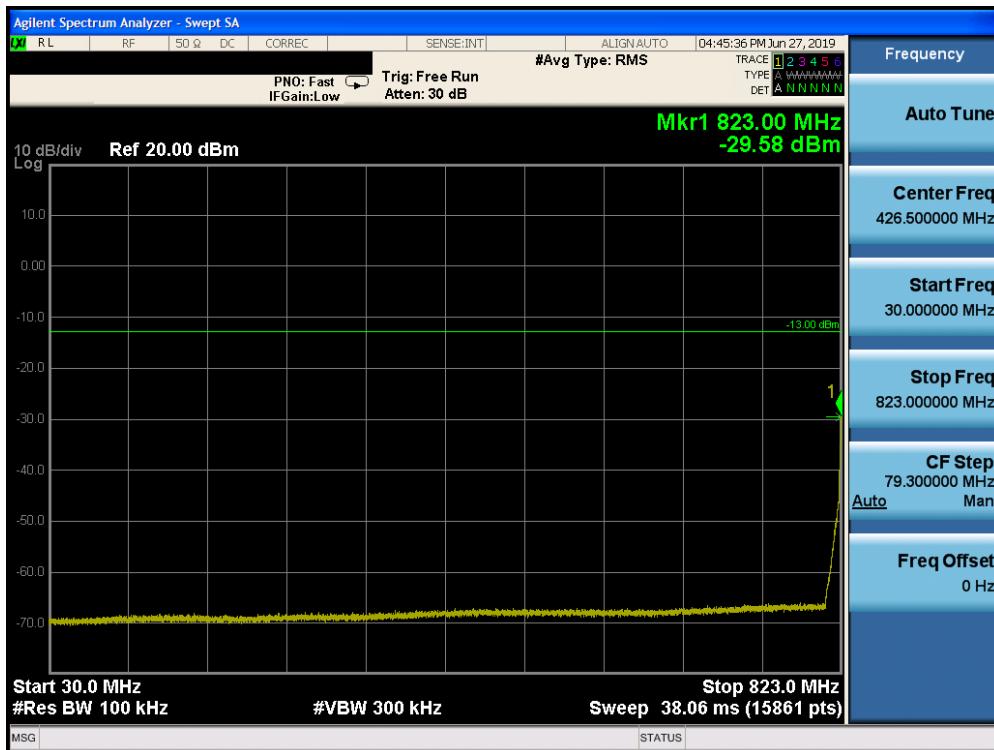


Plot 7-4. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

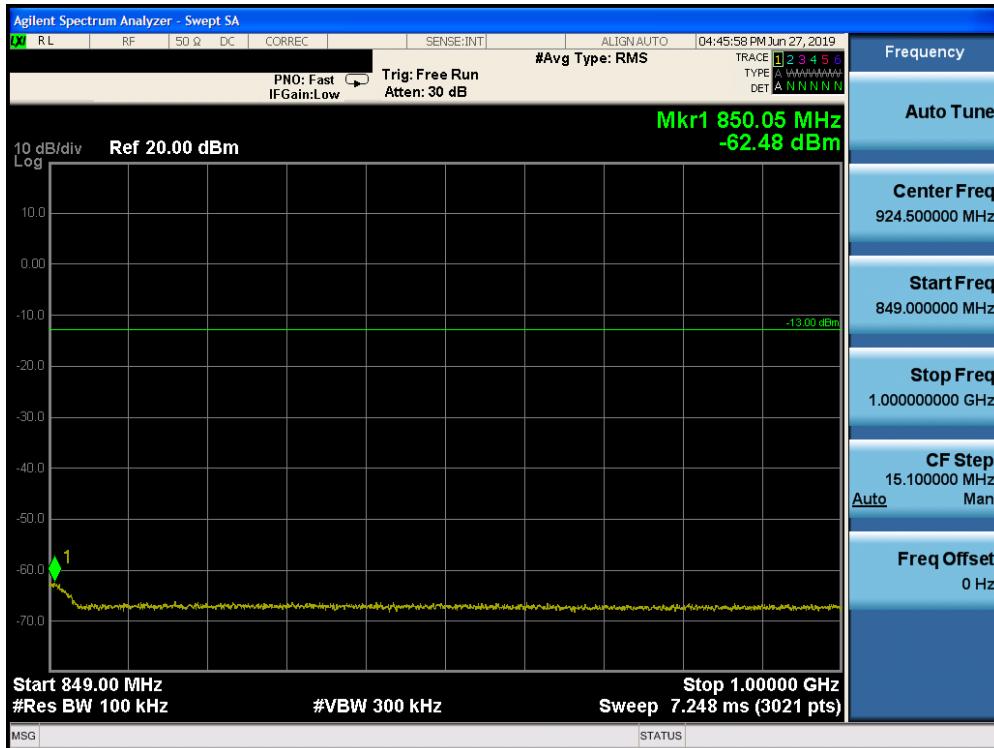


Plot 7-5. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 18 of 61

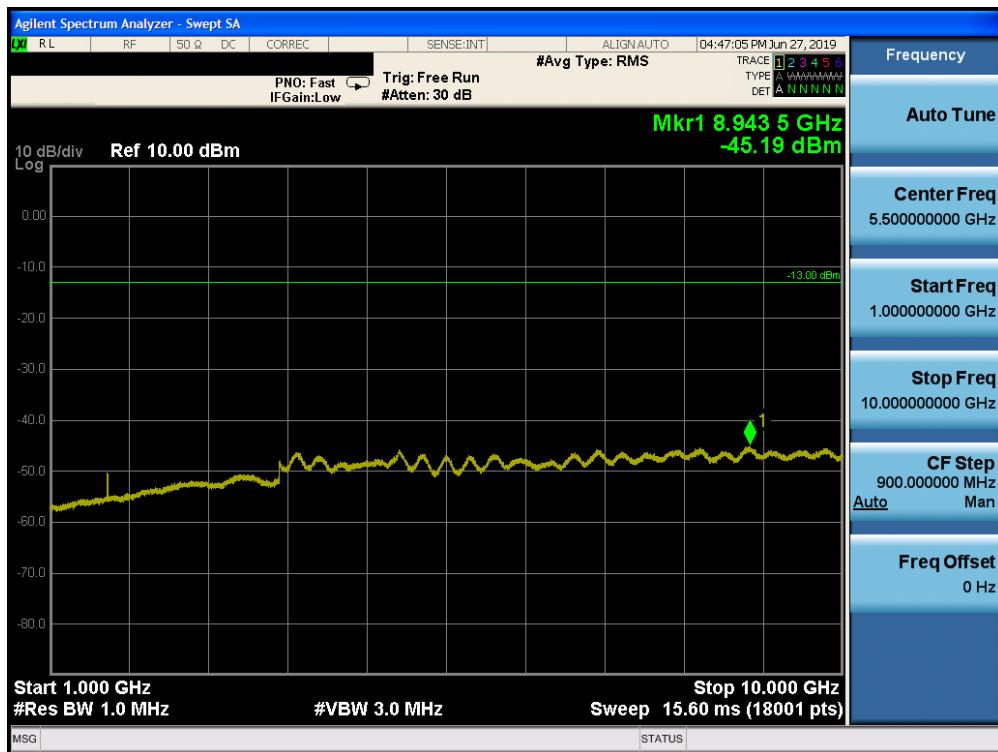


Plot 7-6. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

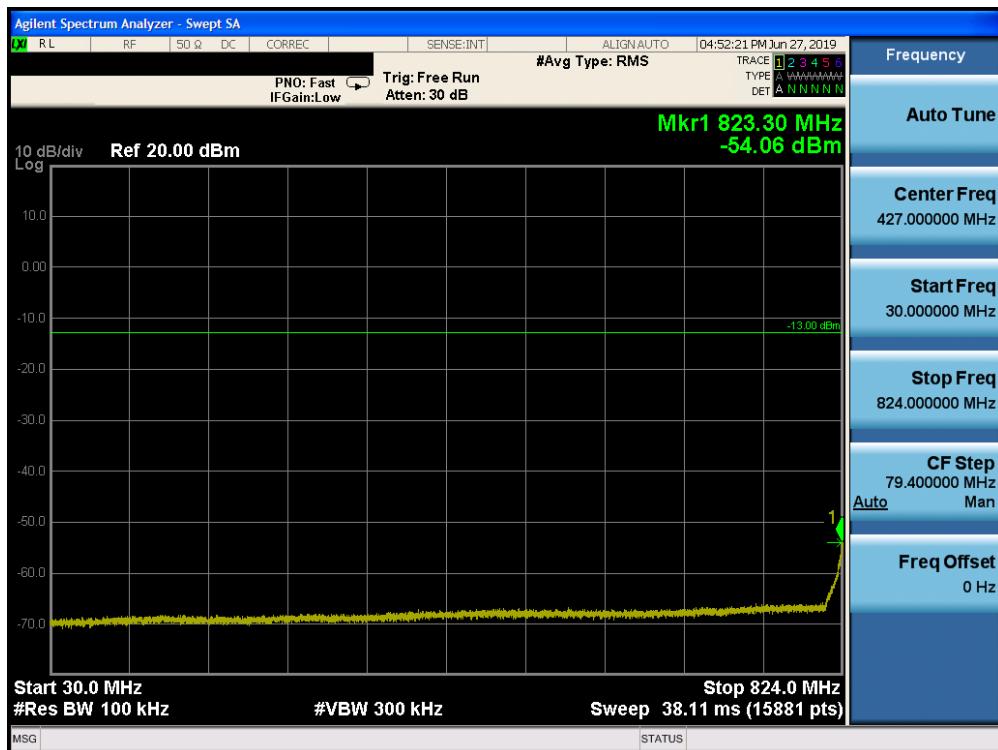


Plot 7-7. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 19 of 61

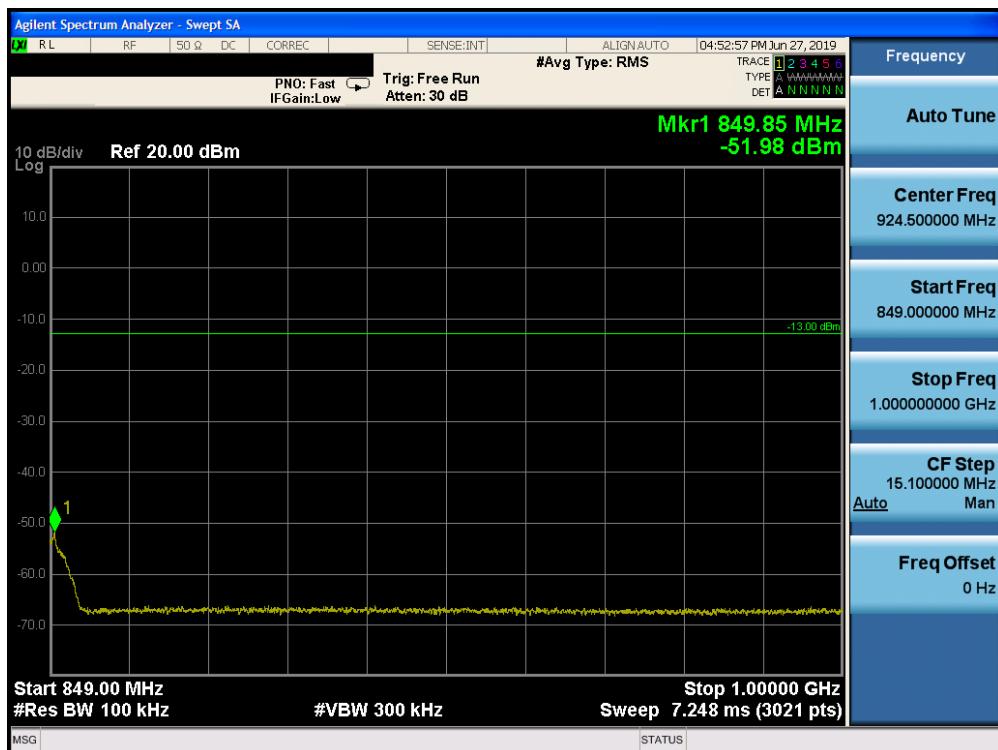


Plot 7-8. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

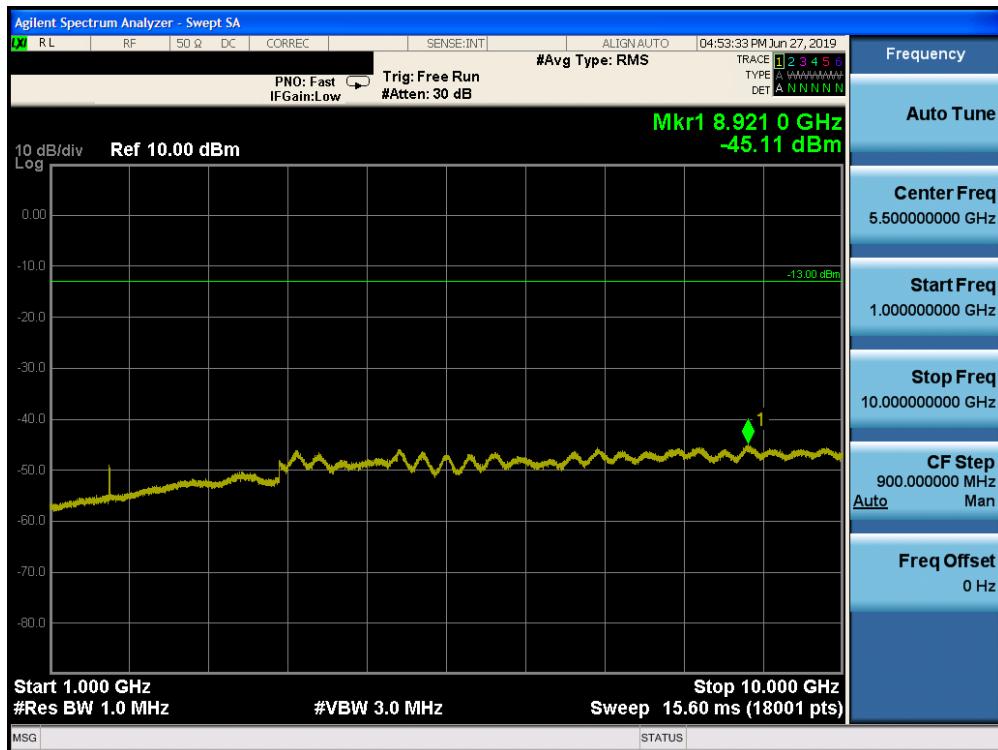


Plot 7-9. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			Page 20 of 61

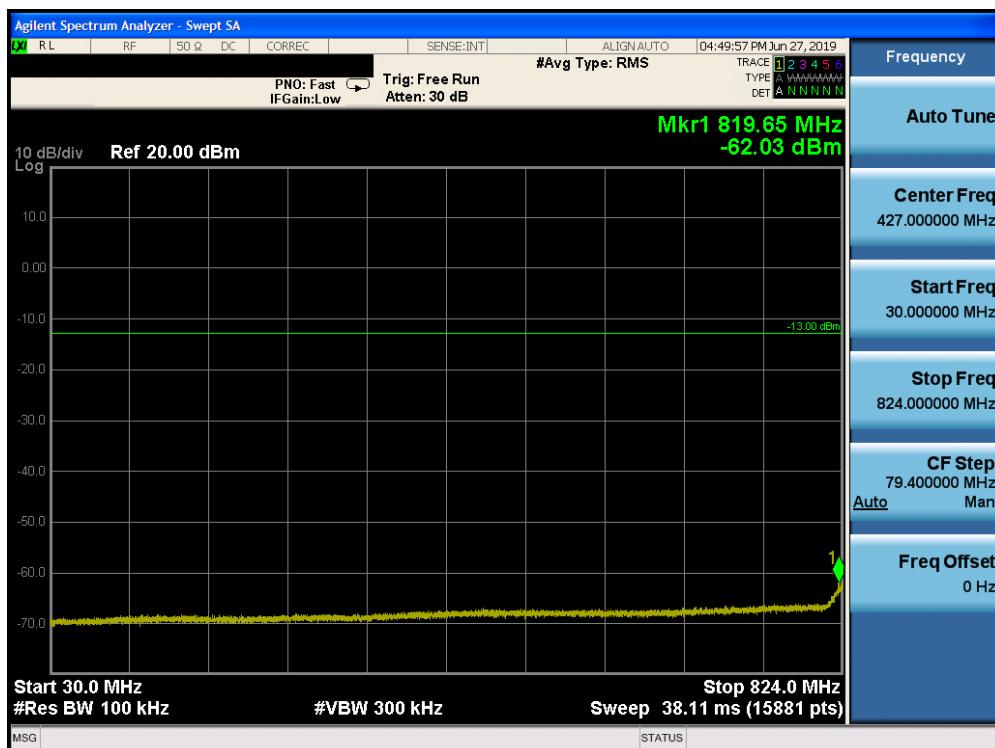

Plot 7-10. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

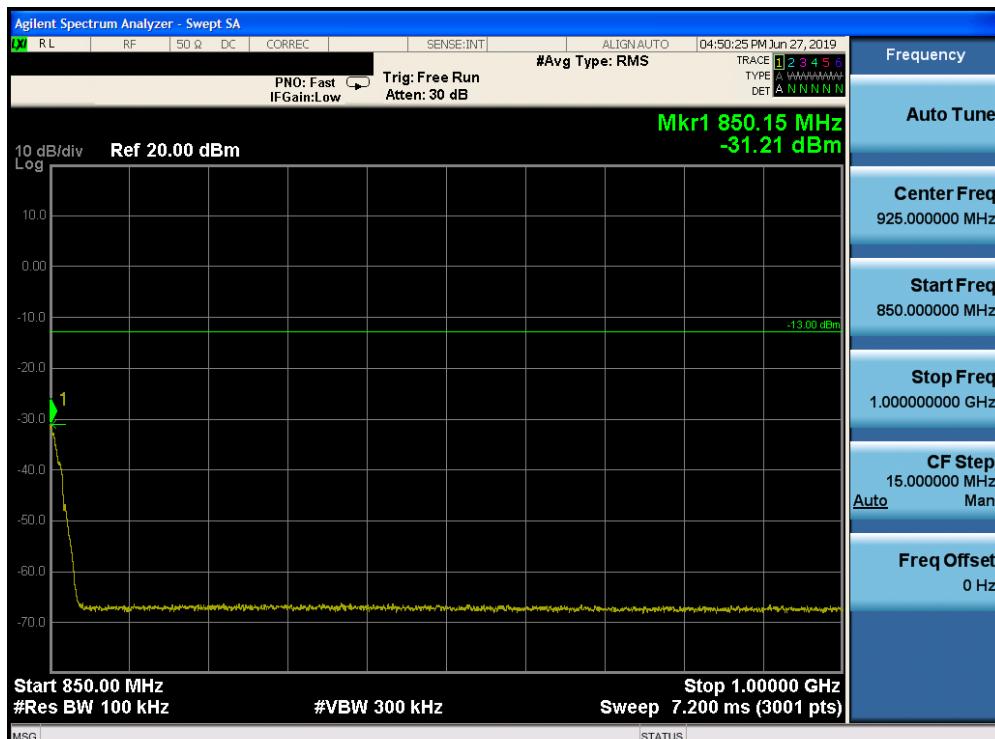

Plot 7-11. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: BCG-A2095	PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 21 of 61




Plot 7-12. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCG-A2095	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 22 of 61

AWS WCDMA Mode

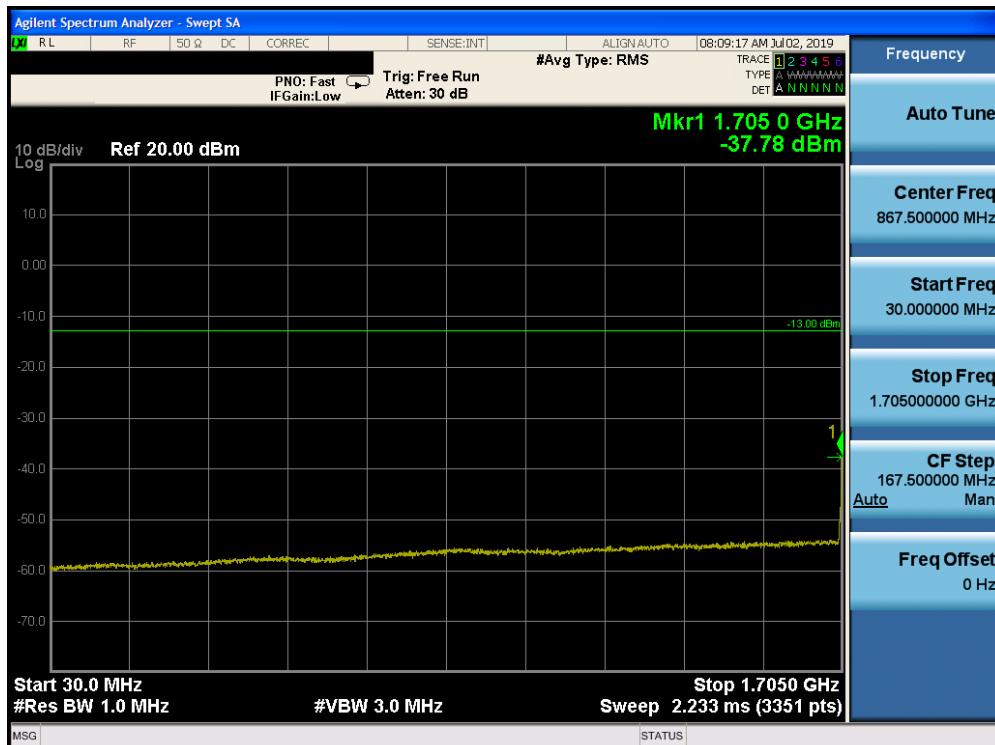


Plot 7-13. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

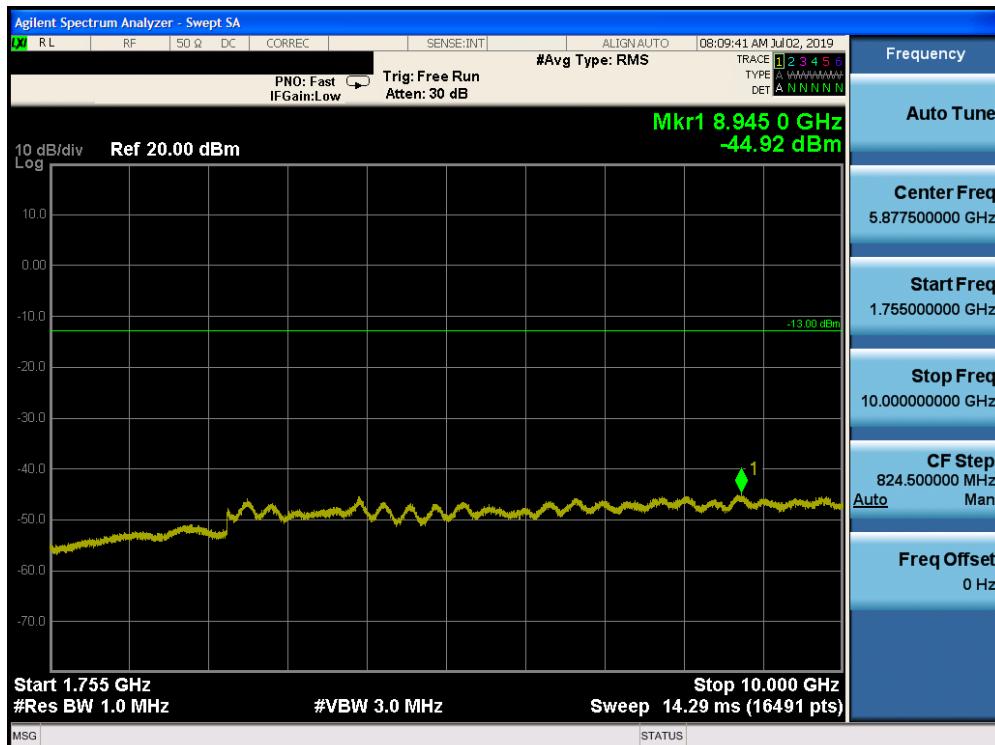

Plot 7-14. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 23 of 61

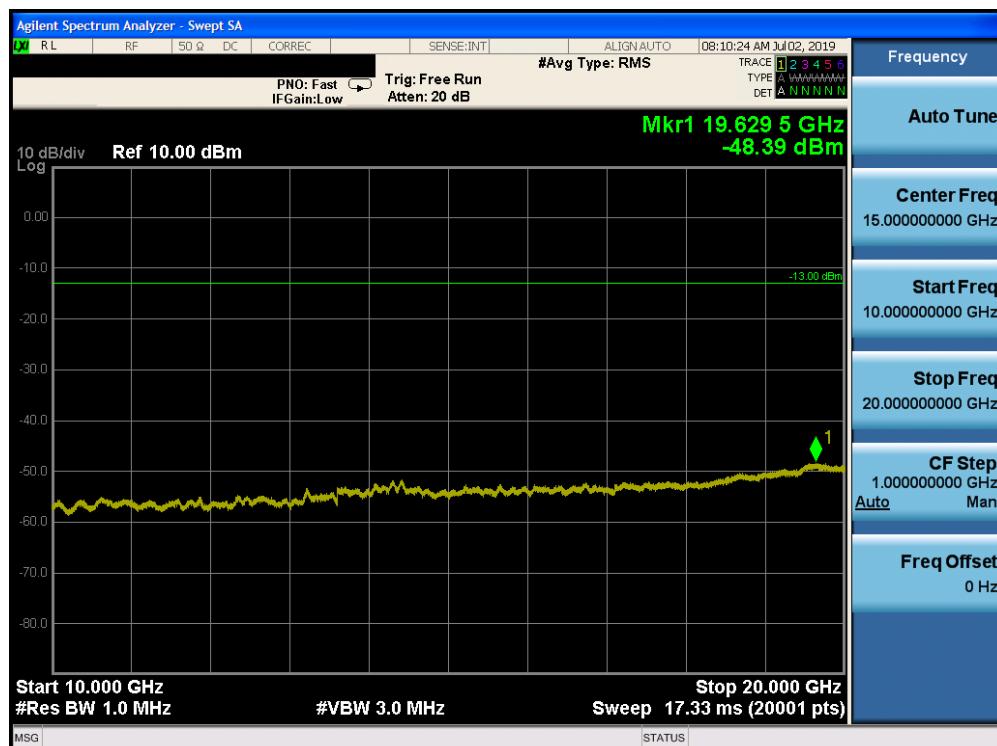


Plot 7-15. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)




Plot 7-16. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 24 of 61		

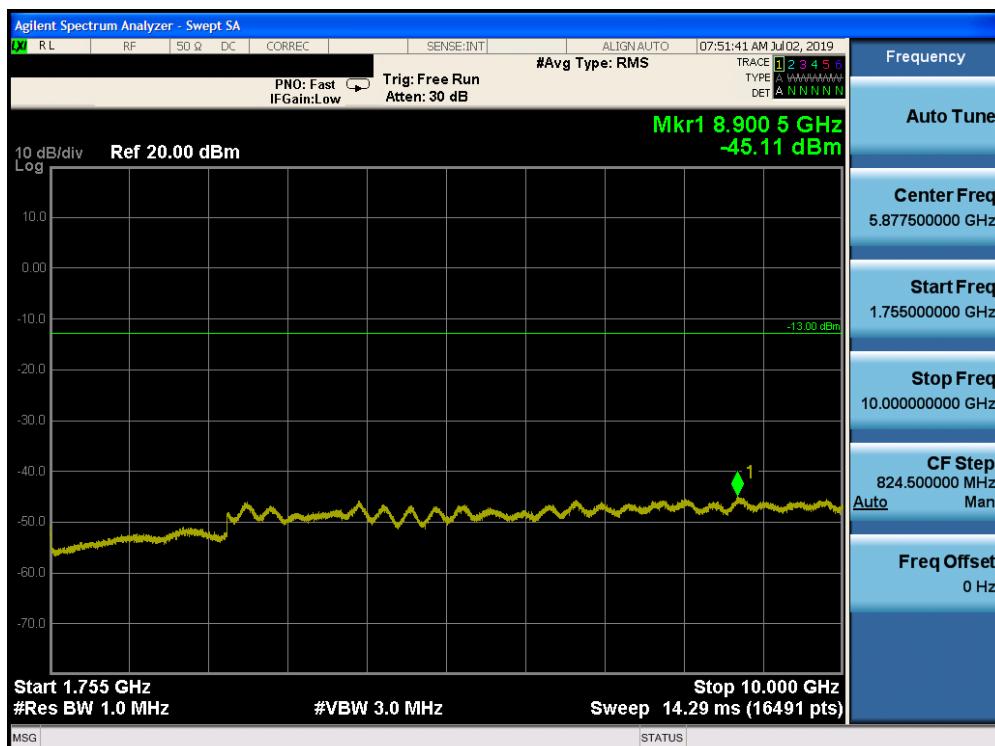


Plot 7-17. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

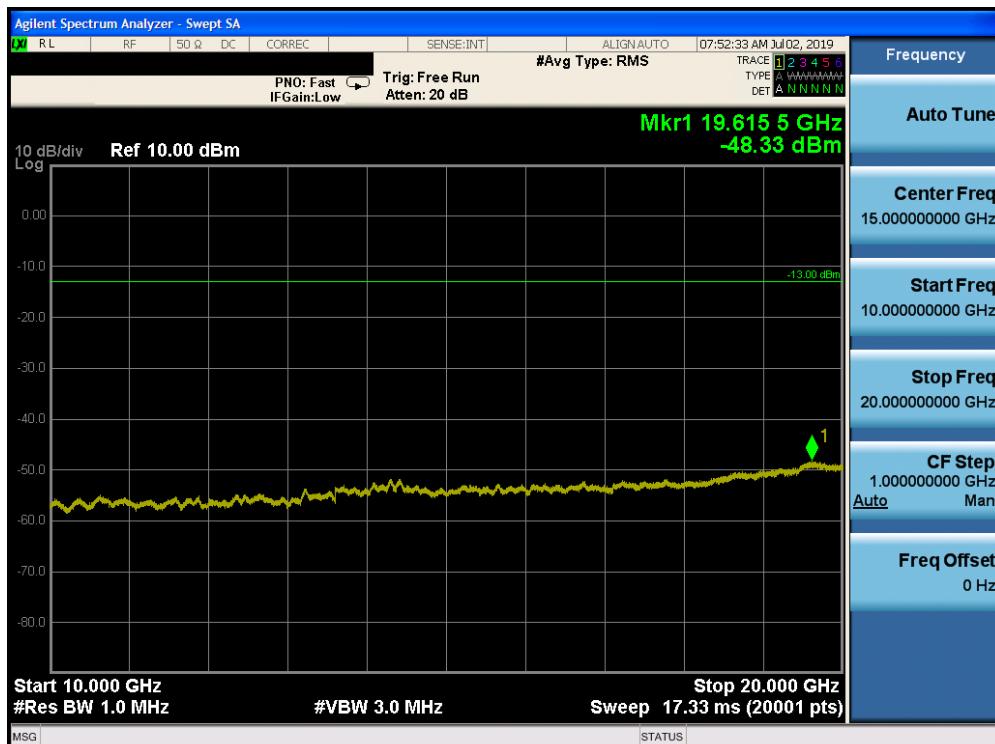


Plot 7-18. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 25 of 61

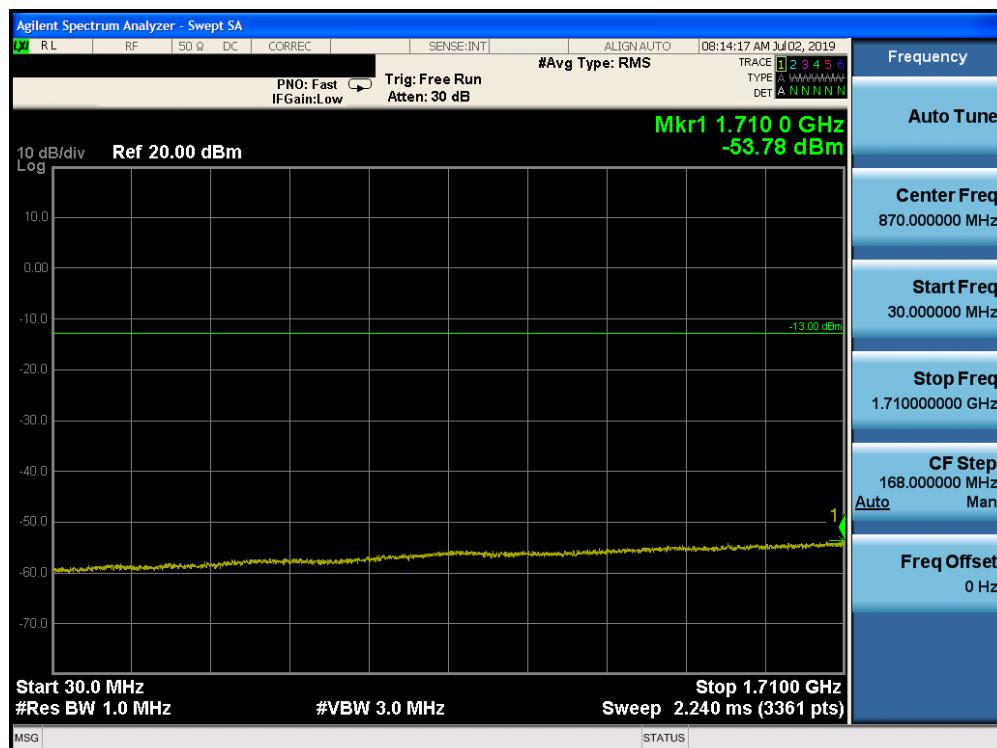


Plot 7-19. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

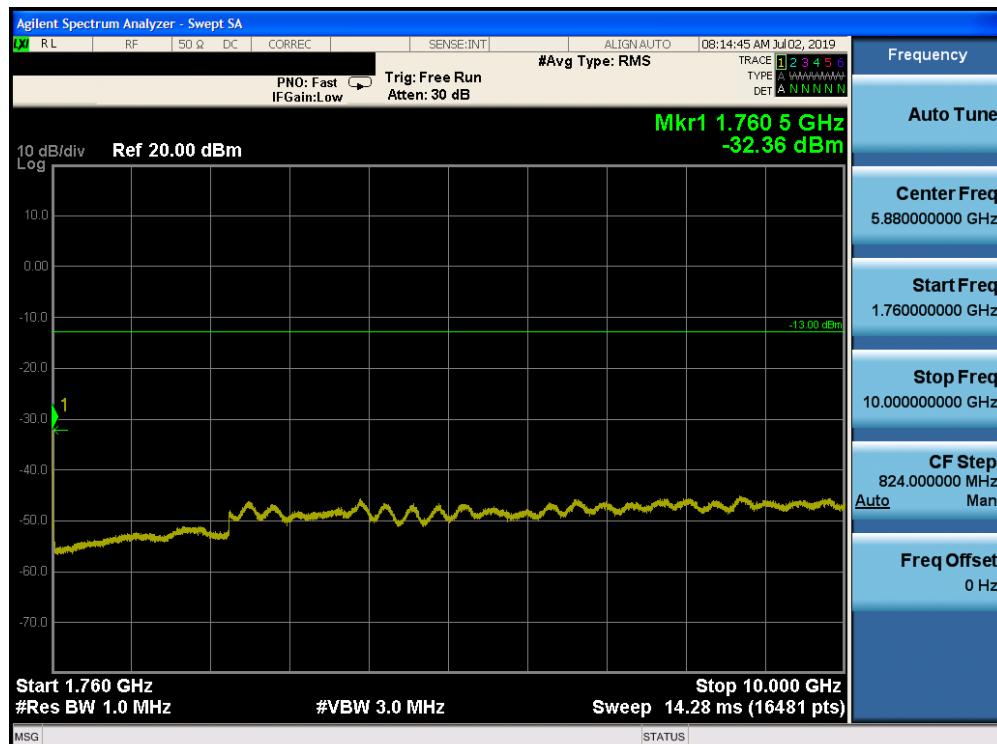

Plot 7-20. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 26 of 61	

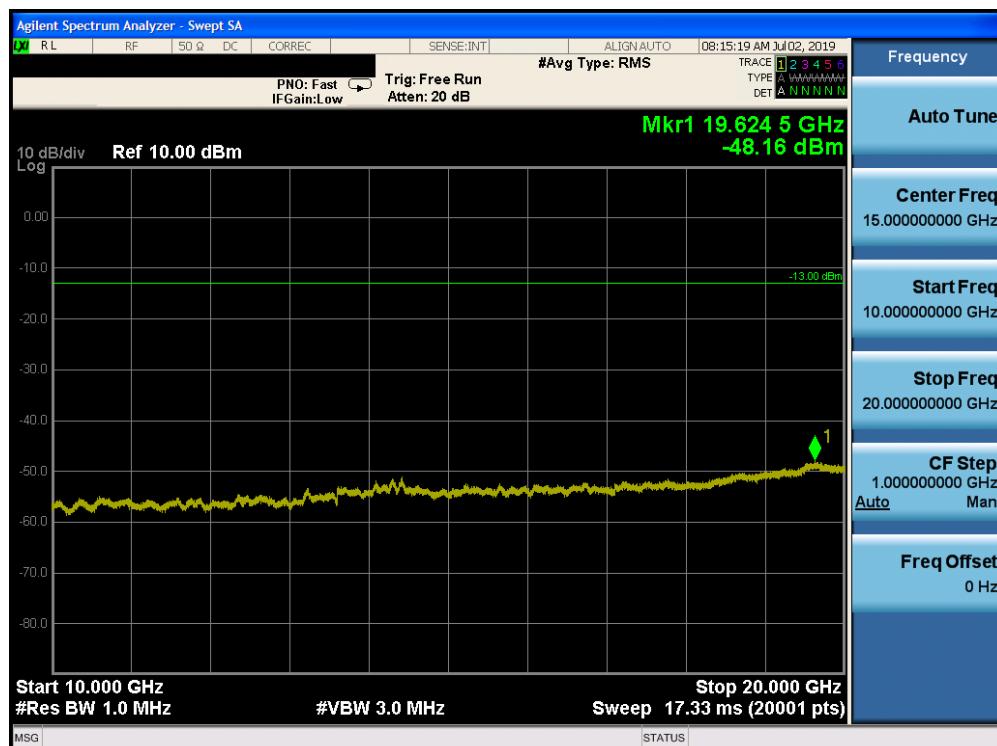


Plot 7-21. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 27 of 61

PCS WCDMA Mode

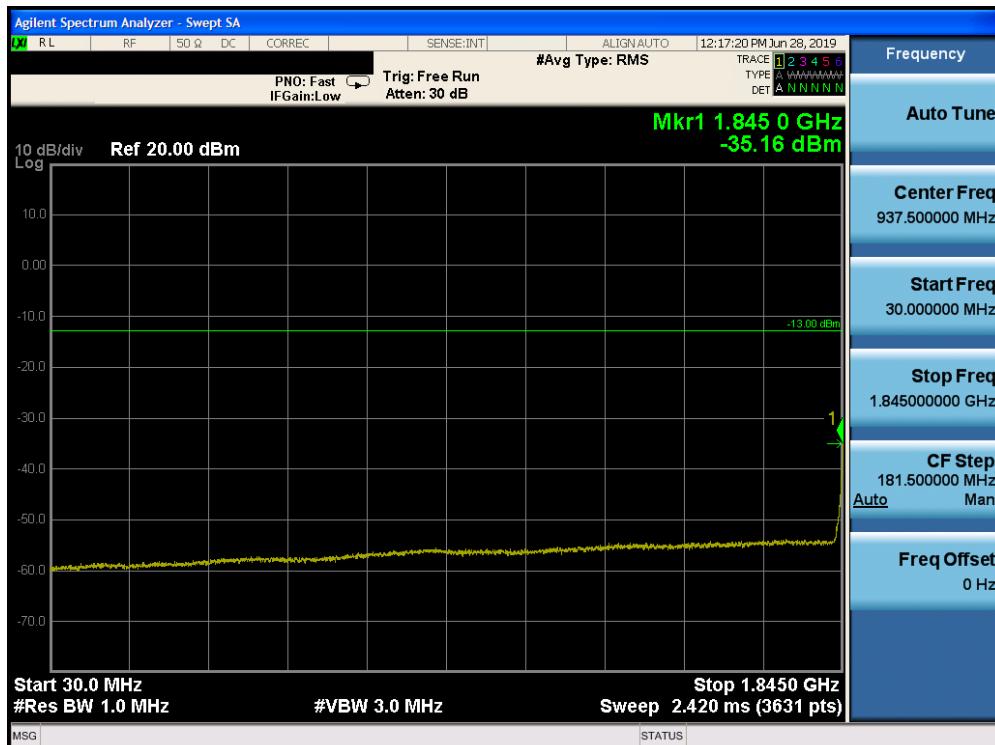


Plot 7-22. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

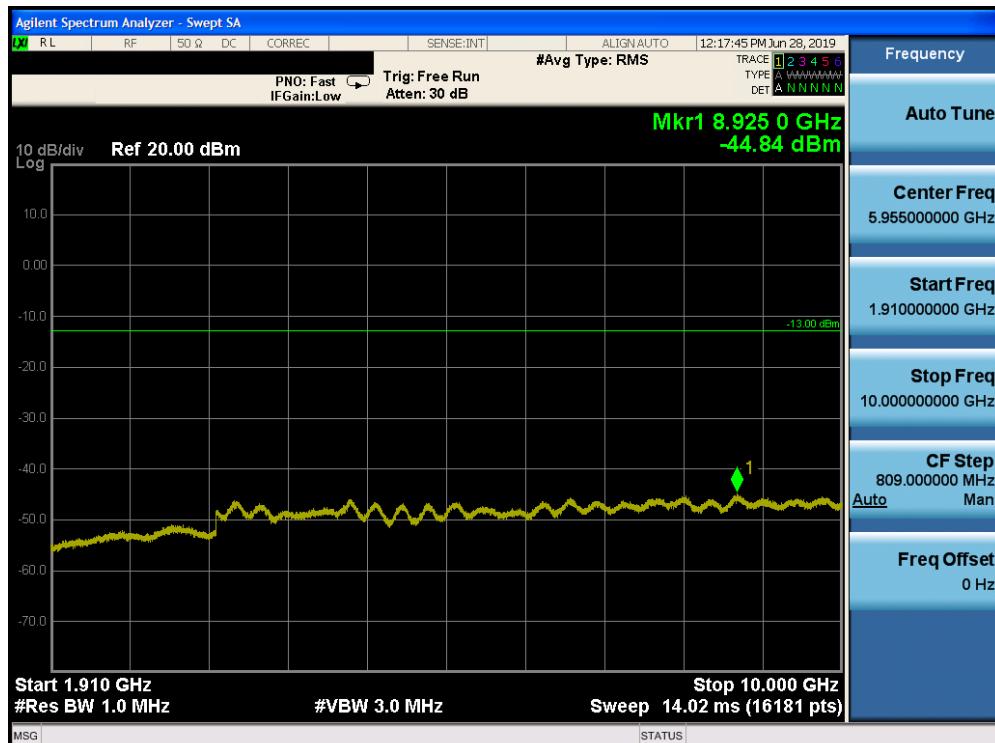


Plot 7-23. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 28 of 61

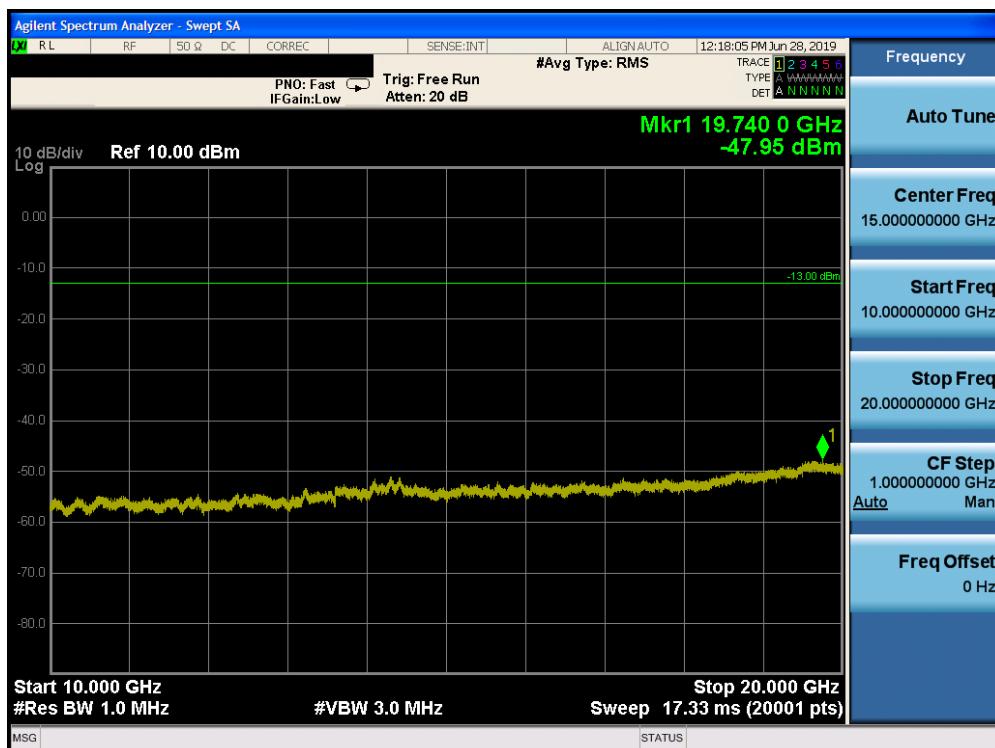


Plot 7-24. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

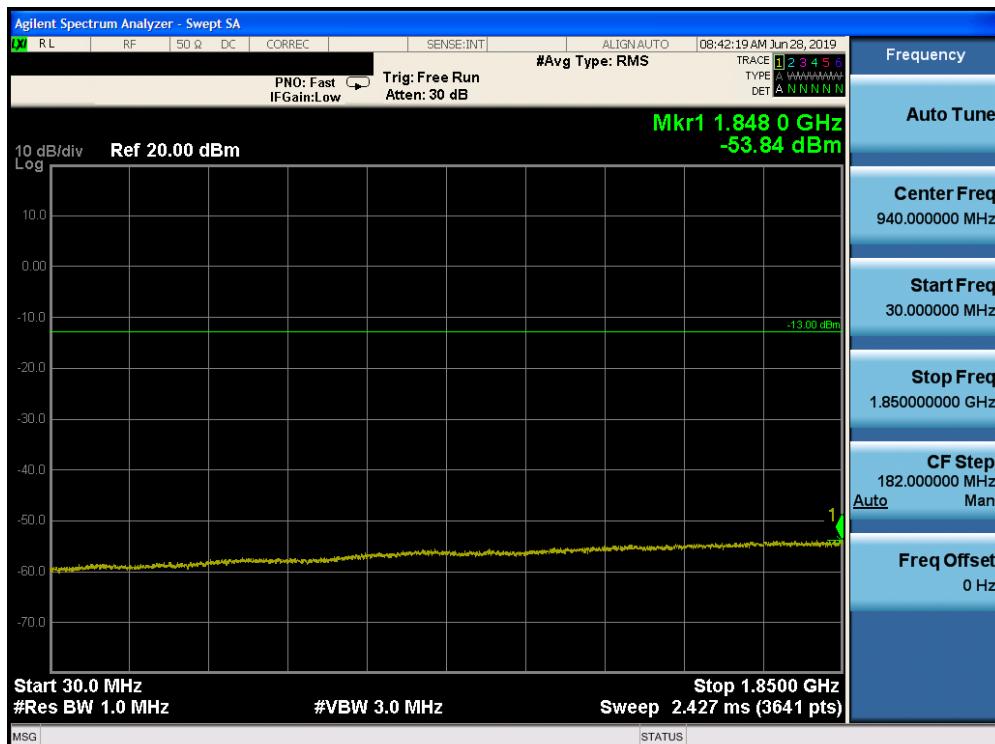


Plot 7-25. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 29 of 61		
© 2019 PCTEST Engineering Laboratory, Inc.					V 9.0 02/01/2019

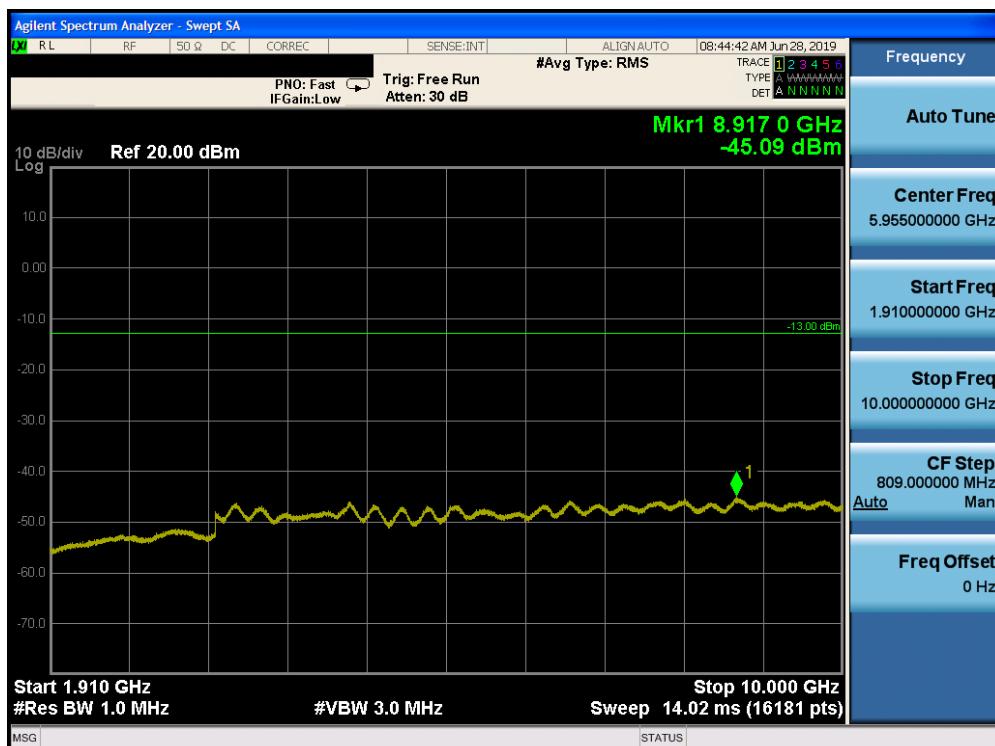


Plot 7-26. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

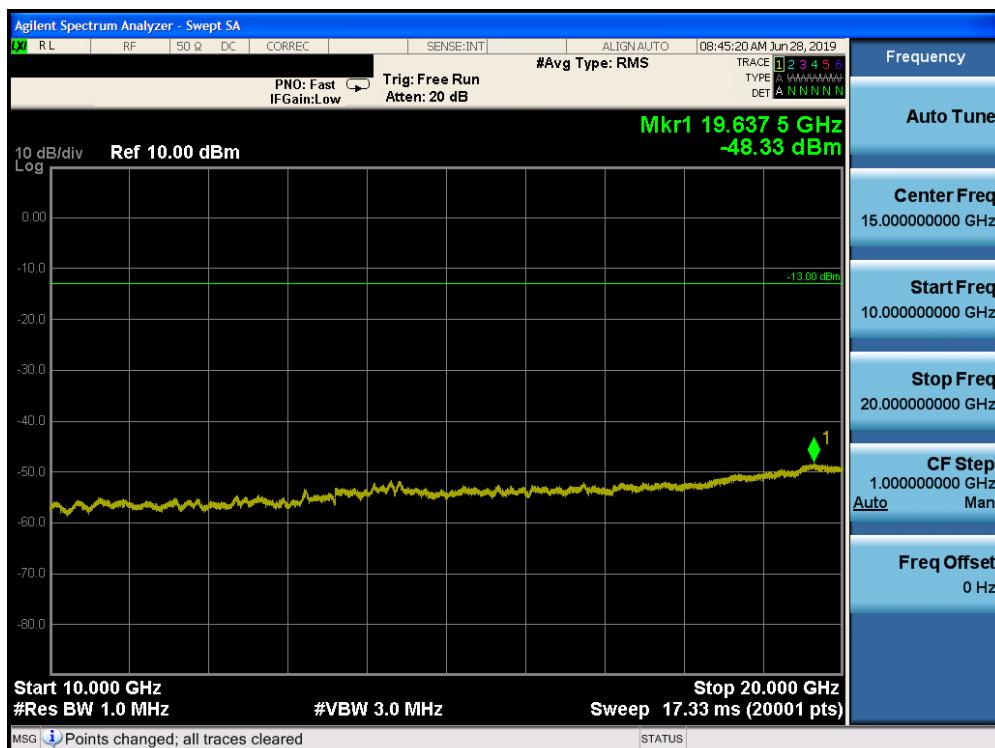


Plot 7-27. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCG-A2095	MEASUREMENT REPORT (CERTIFICATION)			Approved by:
Test Report S/N:	Test Dates:	EUT Type:		
1C1905130010-02.BCG	05/01/2019 - 07/24/2019	Watch	Quality Manager	

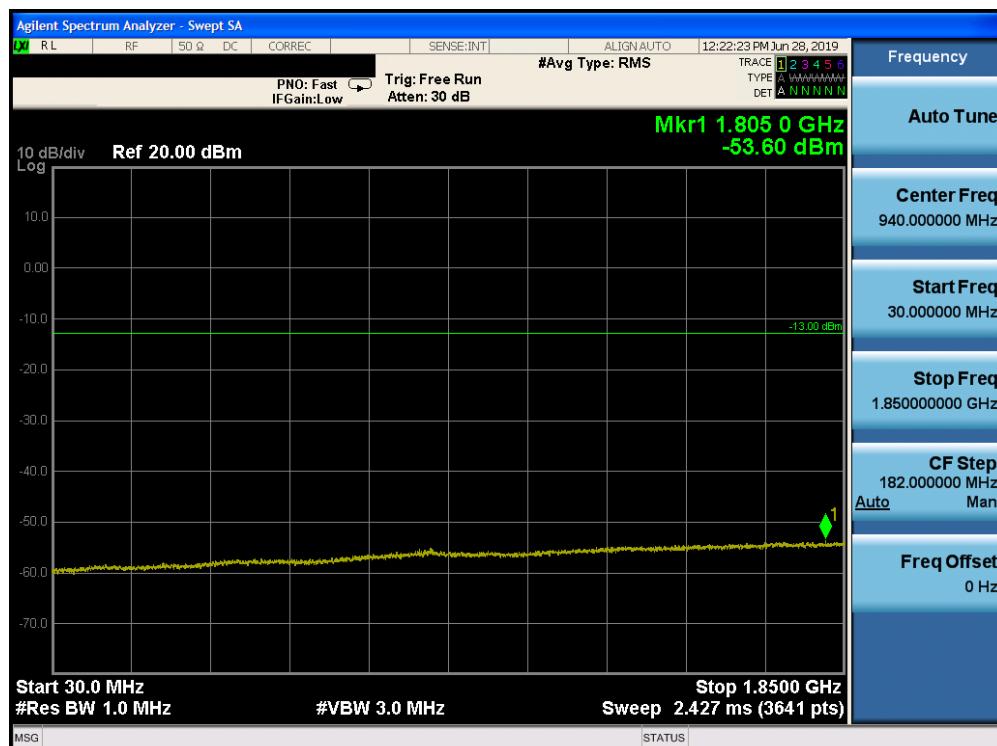


Plot 7-28. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

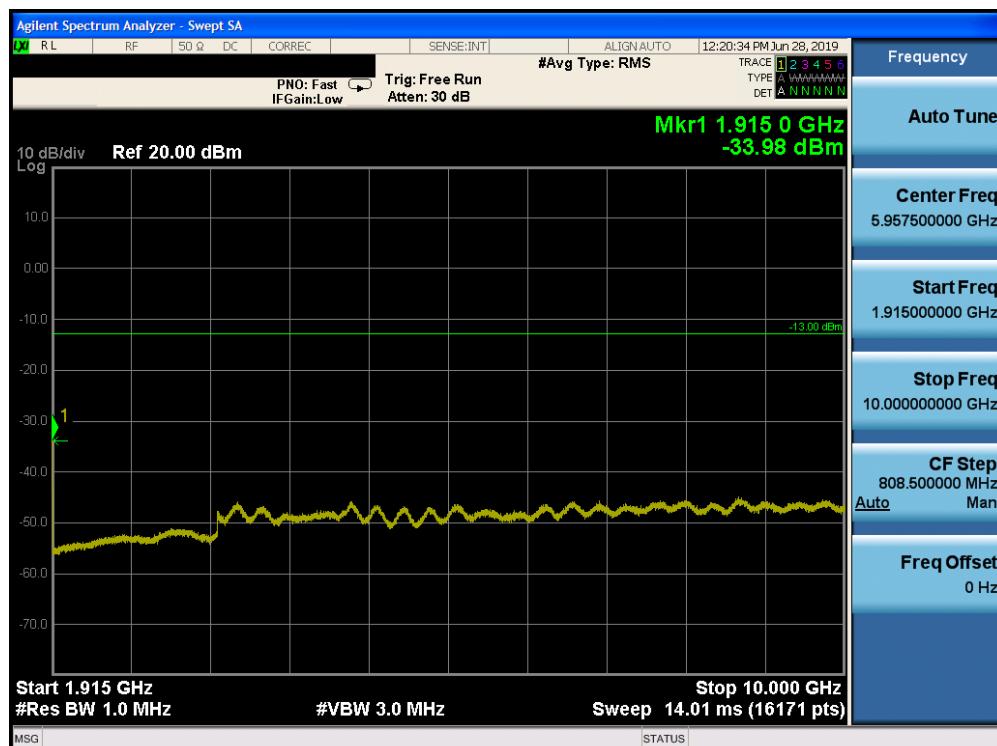

Plot 7-29. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 31 of 61

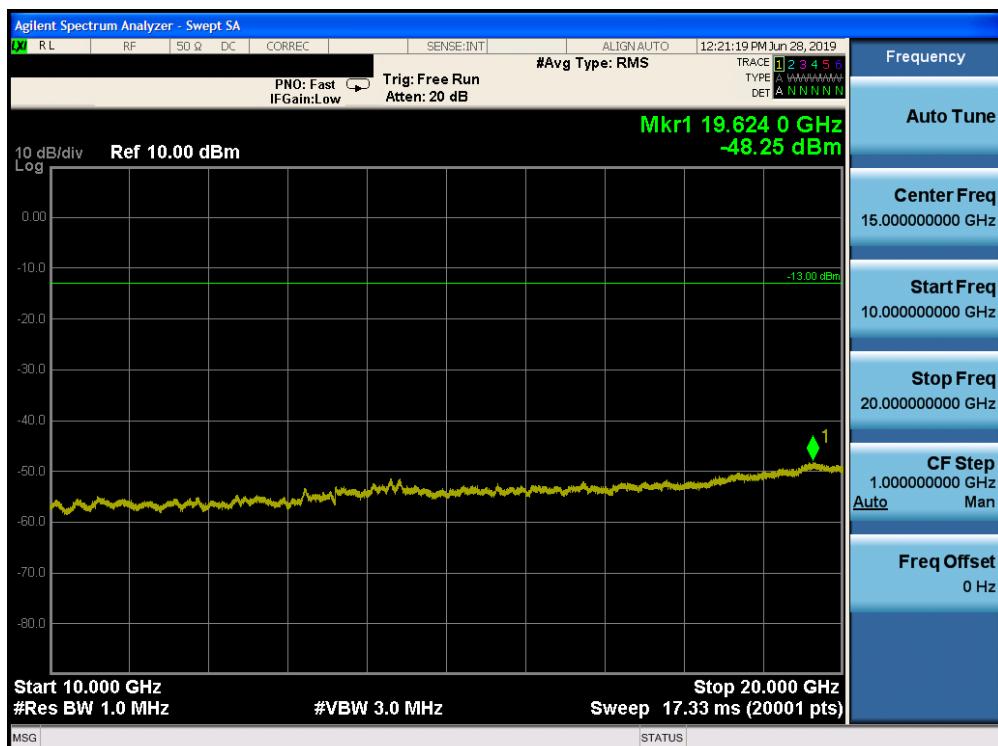

Plot 7-30. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 32 of 61	

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

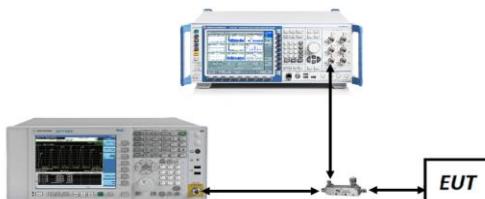


Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 33 of 61

Cellular WCDMA Mode



Plot 7-31. Band Edge Plot (Cellular WCDMA Mode - Low Channel)

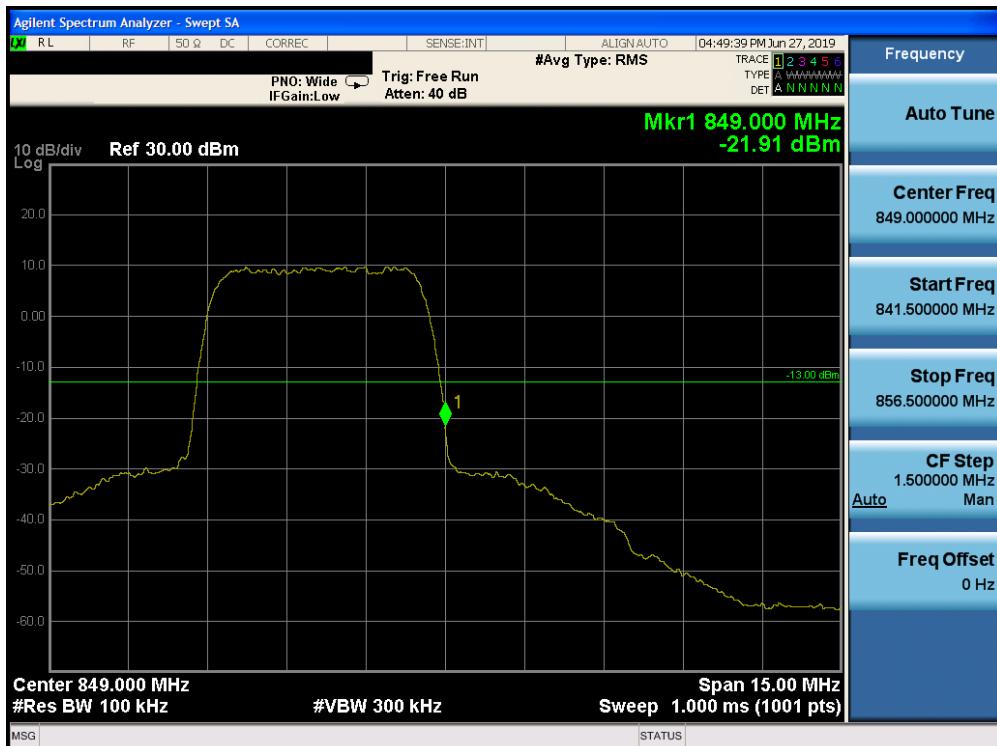


Plot 7-32. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 34 of 61

AWS WCDMA Mode



Plot 7-33. Band Edge Plot (AWS WCDMA Mode - Low Channel)

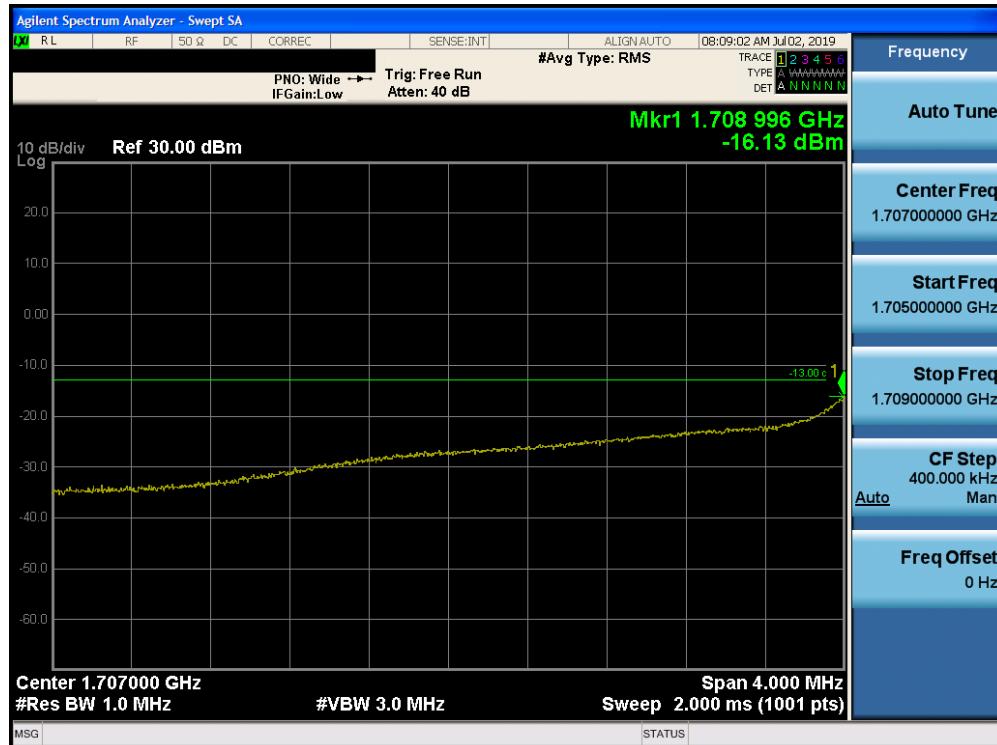


Plot 7-34. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCG-A2095	PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 35 of 61	



Plot 7-35. Band Edge Plot (AWS WCDMA Mode - High Channel)

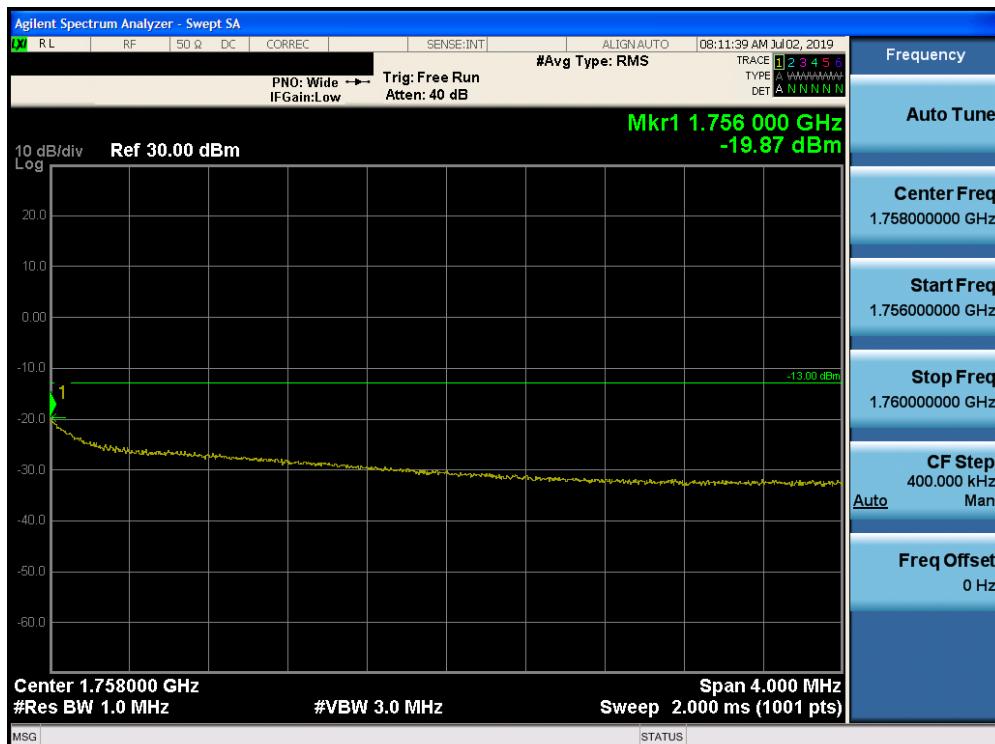


Plot 7-36. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 36 of 61

PCS WCDMA Mode



Plot 7-37. Band Edge Plot (PCS WCDMA Mode - Low Channel)

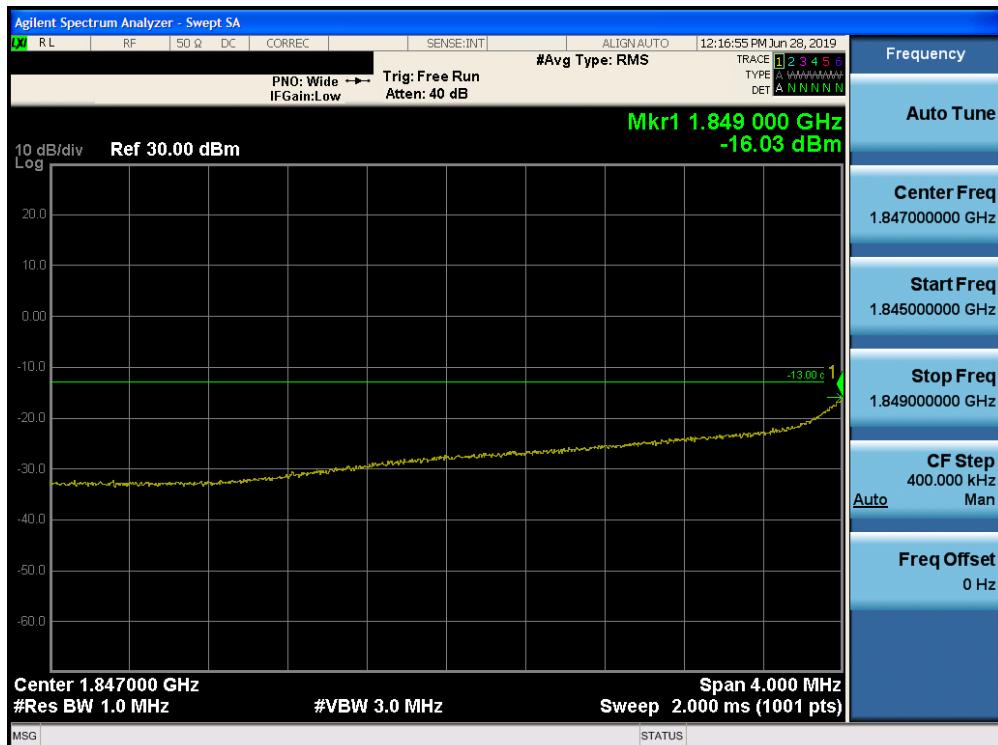

Plot 7-38. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCG-A2095		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 37 of 61



Plot 7-39. Band Edge Plot (PCS WCDMA Mode - High Channel)



Plot 7-40. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 38 of 61	

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

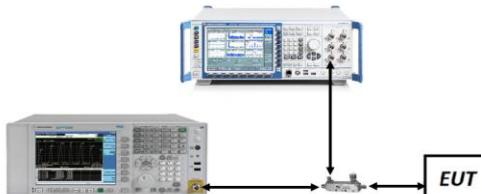


Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 39 of 61	

Mode	Average Power [dBm]	PAR at 0.1% [dB]	Limit [dB]	Margin [dB]
WCDMA850	24.78	3.31	13.0	-9.69
WCDMA1700	24.00	3.33	13.0	-9.67
WCDMA1900	23.99	3.35	13.0	-9.65

Table 7-3. Peak to Average Ratio Results

Plot 7-41. Peak-Average Ratio Plot (Cellular WCDMA Mode)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			



Plot 7-42. Peak-Average Ratio Plot (AWS WCDMA Mode)



Plot 7-43. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: BCG-A2095	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 41 of 61

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are determined from the equation below.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBD (ERP) or dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 42 of 61	

Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The Ant. Gains (GT) are listed in dBi.

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 43 of 61	

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [mW]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	25.00	-26.10	-3.25	0.473	38.45	-41.70	-1.10	0.776	40.61	-41.71
836.60	WCDMA850	25.00	-26.10	-3.25	0.473	38.45	-41.70	-1.10	0.776	40.61	-41.71
846.60	WCDMA850	24.99	-26.10	-3.26	0.472	38.45	-41.71	-1.11	0.774	40.61	-41.72

Table 7-4. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.00	-12.70	11.30	13.490	30.00	-18.70
1732.50	WCDMA1700	23.96	-12.70	11.26	13.366	30.00	-18.74
1752.50	WCDMA1700	24.00	-12.70	11.30	13.490	30.00	-18.70

Table 7-5. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.00	-12.10	11.90	15.488	33.01	-21.11
1880.00	WCDMA1900	24.00	-12.10	11.90	15.488	33.01	-21.11
1907.60	WCDMA1900	23.95	-12.10	11.85	15.311	33.01	-21.16

Table 7-6. EIRP (PCS WCDMA)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 44 of 61

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 45 of 61	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

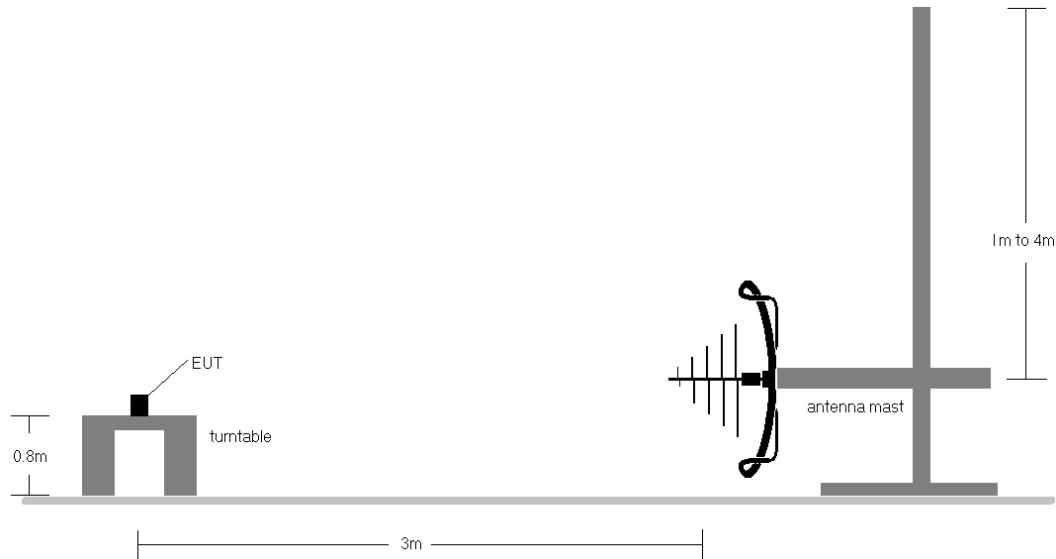


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

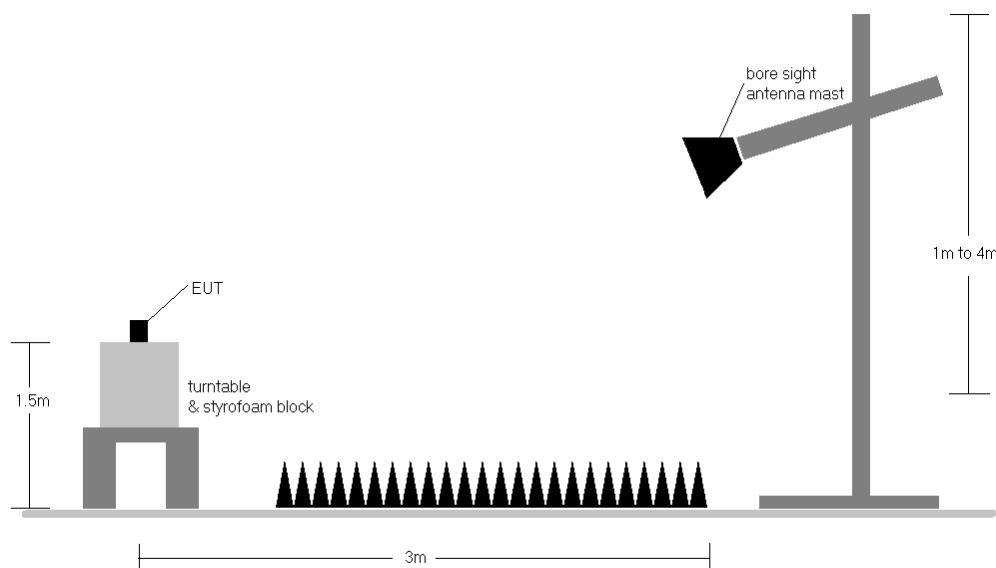


Figure 7-7. Test Instrument & Measurement Setup > 1 GHz


FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 46 of 61	

Test Notes


- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) Below 1GHz Pre-scan plot shows no significant emissions.

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 47 of 61	

Cellular WCDMA Mode

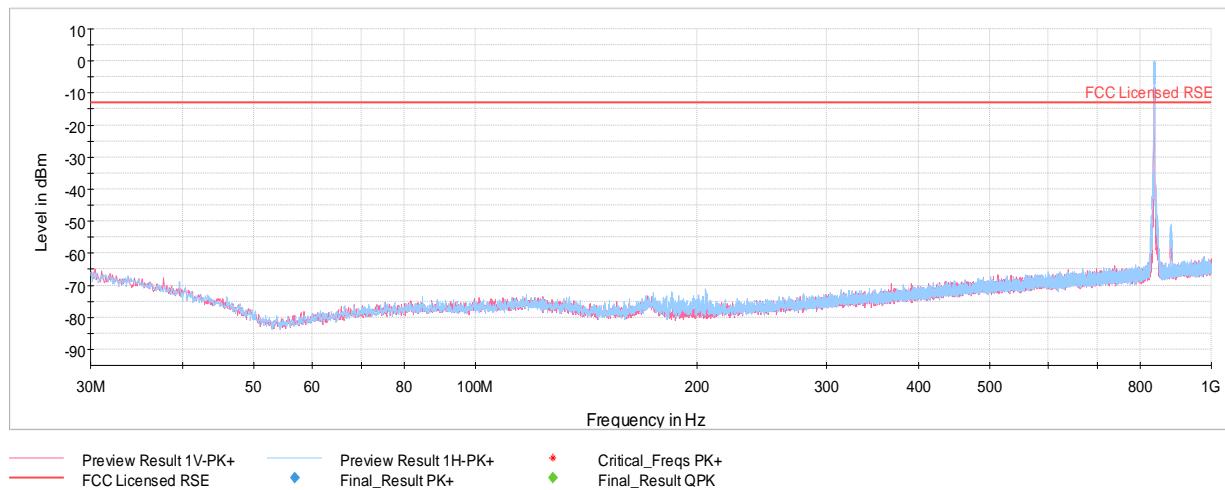

Plot 7-44. Radiated Spurious Plot Below 1GHz (Cellular WCDMA Mode – Ch. 4183)

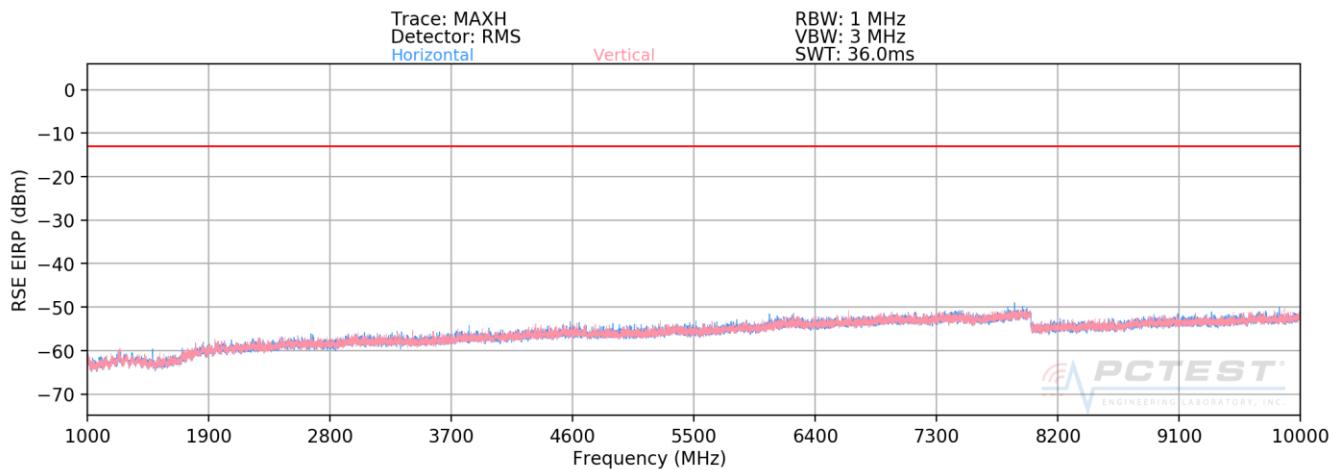

Plot 7-45. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-73.03	5.43	-67.60	-54.6
2479.20	H	-	-	-70.07	5.93	-64.14	-51.1
3305.60	H	-	-	-71.03	7.84	-63.19	-50.2

Table 7-7. Radiated Spurious Data Above 1GHz (Cellular WCDMA Mode – Ch. 4132)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019			EUT Type: Watch	Page 48 of 61

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	171	309	-73.15	5.60	-67.54	-54.5
2509.80	H	-	-	-69.96	5.90	-64.06	-51.1
3346.40	H	-	-	-71.29	7.95	-63.34	-50.3
4183.00	H	-	-	-71.15	9.13	-62.02	-49.0

Table 7-8. Radiated Spurious Data Above 1GHz (Cellular WCDMA Mode – Ch. 4183)


OPERATING FREQUENCY:	846.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-73.20	5.64	-67.56	-54.6
2539.80	H	-	-	-69.88	5.98	-63.90	-50.9
3386.40	H	-	-	-71.26	8.07	-63.19	-50.2

Table 7-9. Radiated Spurious Data Above 1GHz (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 49 of 61

AWS WCDMA Mode

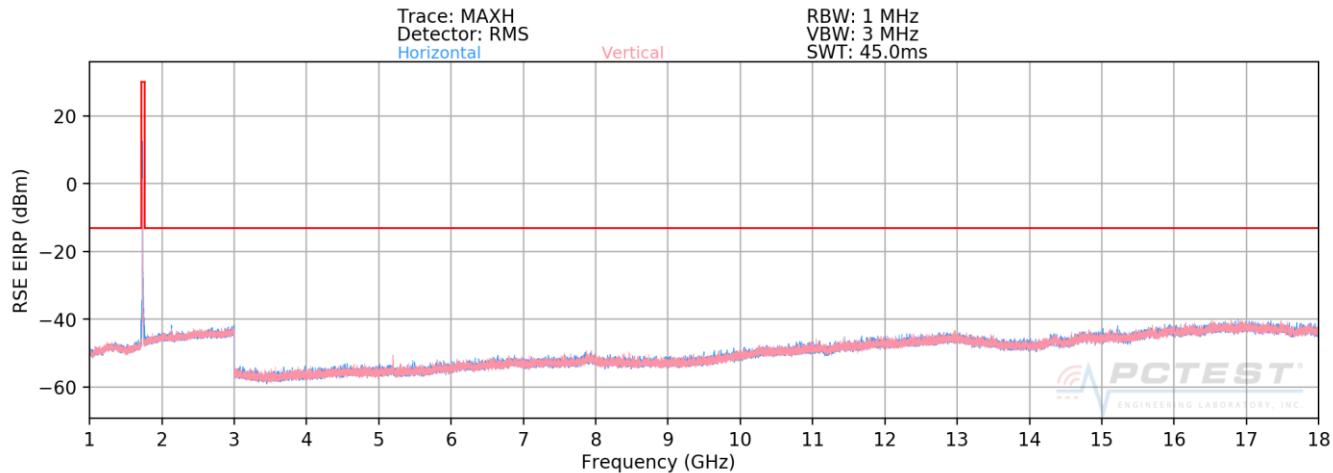

Plot 7-46. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	V	-	-	-71.46	8.12	-63.34	-50.3
5137.20	V	241	71	-68.24	10.11	-58.13	-45.1
6849.60	V	-	-	-70.58	11.37	-59.21	-46.2
8562.00	V	-	-	-73.48	13.00	-60.48	-47.5
10274.40	V	-	-	-71.36	13.10	-58.26	-45.3

Table 7-10. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	-	-	-71.26	8.11	-63.16	-50.2
5197.80	V	282	161	-66.59	10.23	-56.36	-43.4
6930.40	V	-	-	-70.92	11.41	-59.51	-46.5
8663.00	V	-	-	-73.25	13.15	-60.09	-47.1
10395.60	V	-	-	-70.86	13.03	-57.83	-44.8

Table 7-11. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)


OPERATING FREQUENCY:	1752.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.48	8.07	-62.42	-49.4
5257.80	H	103	221	-68.97	10.27	-58.69	-45.7
7010.40	H	-	-	-71.66	11.51	-60.15	-47.1
8763.00	H	-	-	-73.16	13.18	-59.98	-47.0
10515.60	H	-	-	-70.48	13.08	-57.40	-44.4

Table 7-12. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 51 of 61

PCS WCDMA Mode

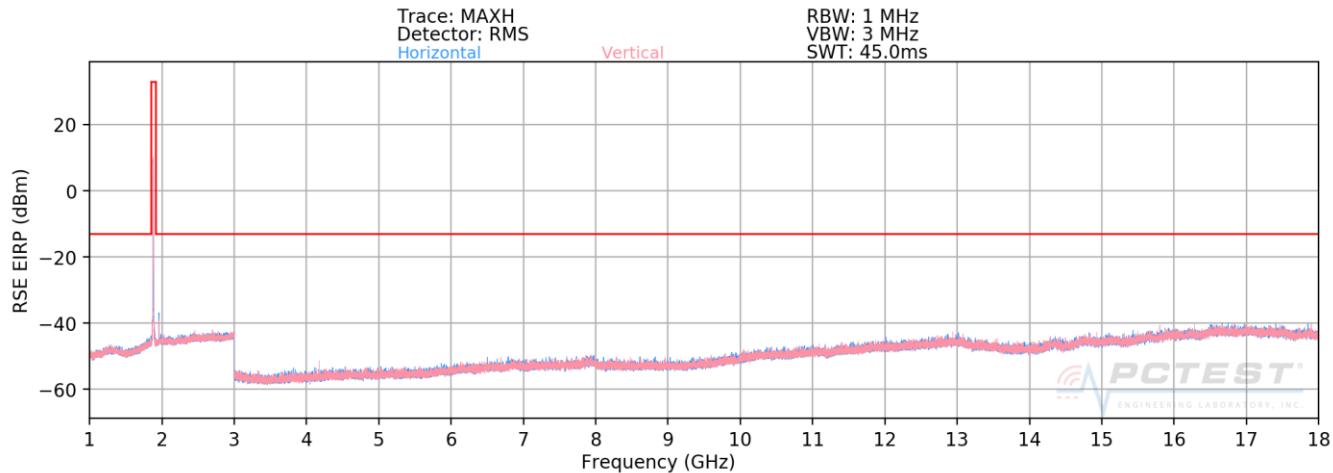

Plot 7-47. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	-	-	-70.85	8.41	-62.44	-49.4
5557.20	V	108	228	-68.00	10.72	-57.28	-44.3
7409.60	V	-	-	-71.39	11.89	-59.50	-46.5
9262.00	V	-	-	-72.58	13.30	-59.28	-46.3
11114.40	V	-	-	-69.98	13.23	-56.76	-43.8

Table 7-13. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 52 of 61	

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	-	-	-70.91	8.47	-62.44	-49.4
5640.00	V	107	150	-64.14	10.69	-53.45	-40.5
7520.00	V	-	-	-71.65	11.99	-59.66	-46.7
9400.00	V	-	-	-72.07	13.36	-58.70	-45.7
11280.00	V	-	-	-69.93	13.22	-56.70	-43.7

Table 7-14. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY:	1907.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	-	-	-71.98	8.62	-63.36	-50.4
5722.80	V	106	139	-66.62	10.66	-55.95	-43.0
7630.40	V	-	-	-63.45	12.16	-51.29	-38.3
9538.00	V	-	-	-62.95	13.21	-49.74	-36.7
11445.60	V	-	-	-61.28	13.28	-48.00	-35.0

Table 7-15. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 53 of 61

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5 \text{ ppm}$) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCG-A2095	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 54 of 61	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,006	6	0.0000007
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,005	5	0.0000006
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,006	6	0.0000007
100 %		+ 30	836,599,993	-7	-0.0000008
100 %		+ 40	836,600,005	5	0.0000007
100 %		+ 50	836,600,005	5	0.0000006
BATT. ENDPOINT	3.40	+ 20	836,600,005	5	0.0000006

Table 7-16. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch			

Frequency Stability / Temperature Variation

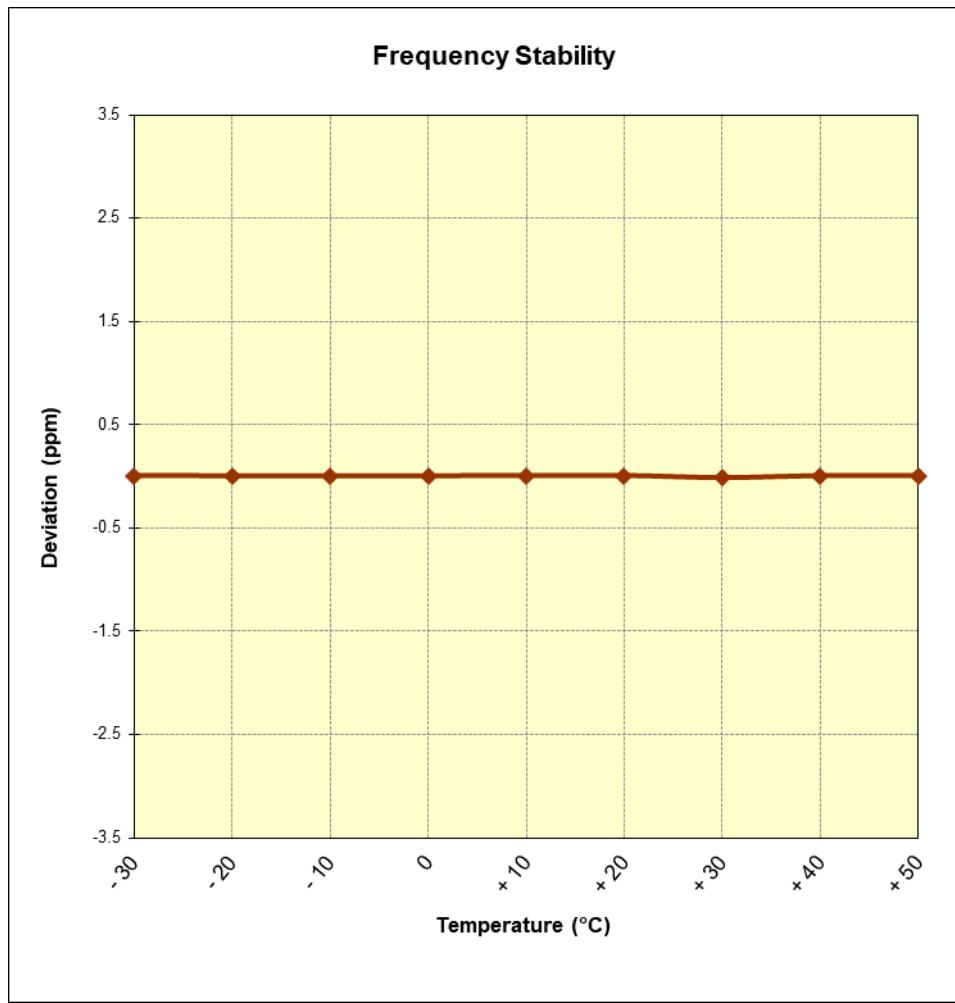


Figure 7-9. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 56 of 61	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,600,006	6	0.0000004
100 %		- 20	1,732,599,993	-7	-0.0000004
100 %		- 10	1,732,599,994	-6	-0.0000003
100 %		0	1,732,600,007	7	0.0000004
100 %		+ 10	1,732,600,008	8	0.0000005
100 %		+ 20	1,732,600,009	9	0.0000005
100 %		+ 30	1,732,600,012	12	0.0000007
100 %		+ 40	1,732,600,010	10	0.0000006
100 %		+ 50	1,732,600,011	11	0.0000006
BATT. ENDPOINT	3.40	+ 20	1,732,600,007	7	0.0000004

Table 7-17. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		

Frequency Stability / Temperature Variation

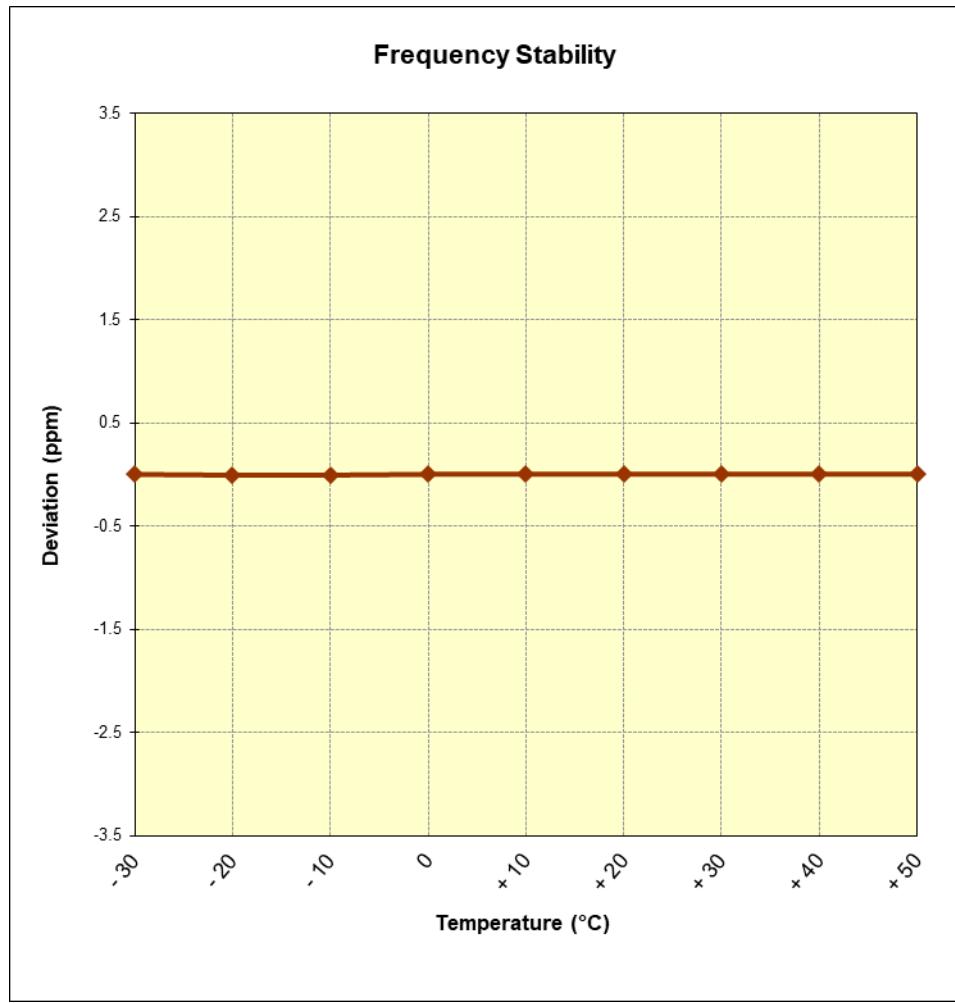


Figure 7-10. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCG-A2095	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 58 of 61

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,007	7	0.0000004
100 %		- 20	1,880,000,009	9	0.0000005
100 %		- 10	1,880,000,008	8	0.0000004
100 %		0	1,880,000,007	7	0.0000004
100 %		+ 10	1,880,000,008	8	0.0000004
100 %		+ 20	1,880,000,009	9	0.0000005
100 %		+ 30	1,880,000,012	12	0.0000006
100 %		+ 40	1,880,000,012	12	0.0000007
100 %		+ 50	1,880,000,014	14	0.0000007
BATT. ENDPOINT	3.40	+ 20	1,880,000,009	9	0.0000005

Table 7-18. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 59 of 61

Frequency Stability / Temperature Variation

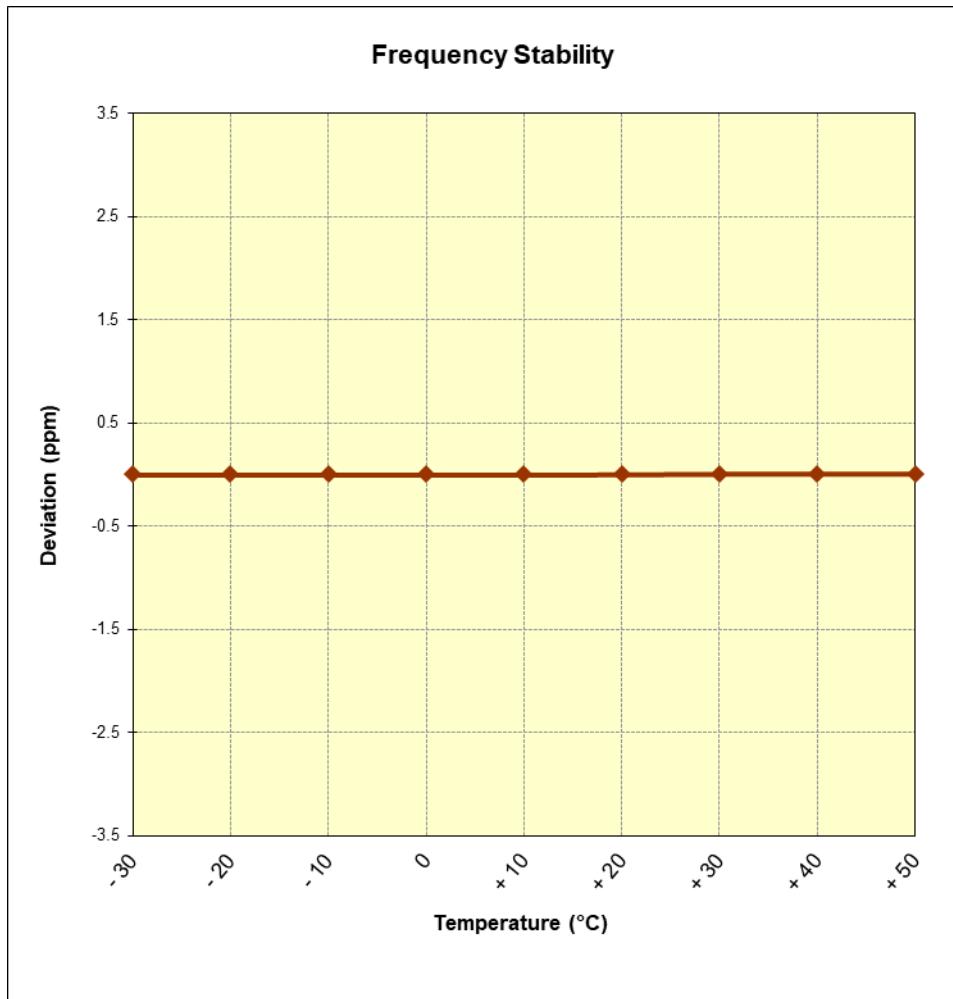


Figure 7-11. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A2095	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch		Page 60 of 61

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch FCC ID: BCG-A2095** complies with all the requirements of Part 27 of the FCC Rules and RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCG-A2095	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1905130010-02.BCG	Test Dates: 05/01/2019 - 07/24/2019	EUT Type: Watch	Page 61 of 61	