



Mode: 802.11n  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

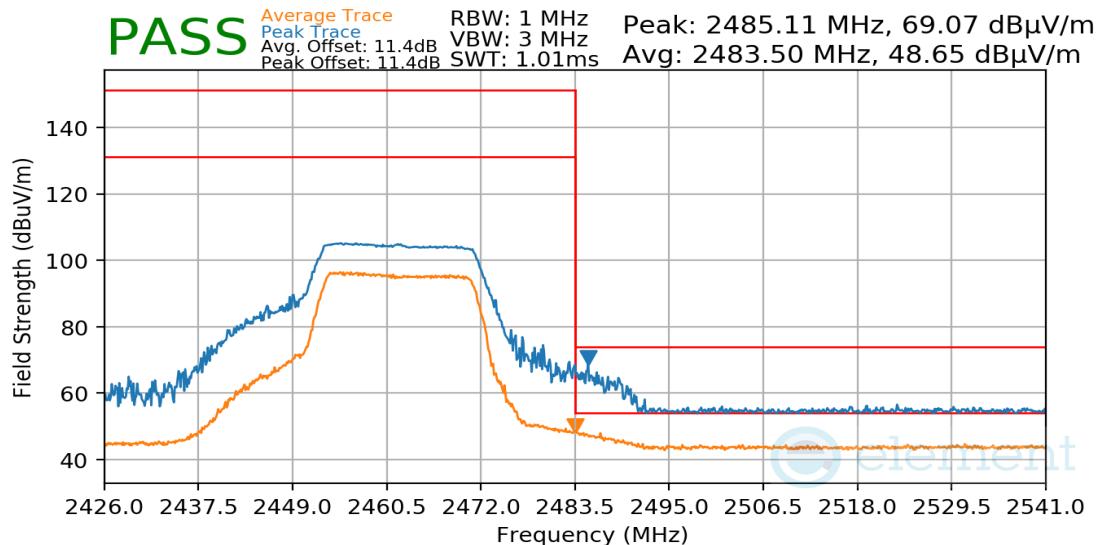

**Plot 7-73. Radiated Restricted Upper Band Edge Measurement**


Mode: 802.11n  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

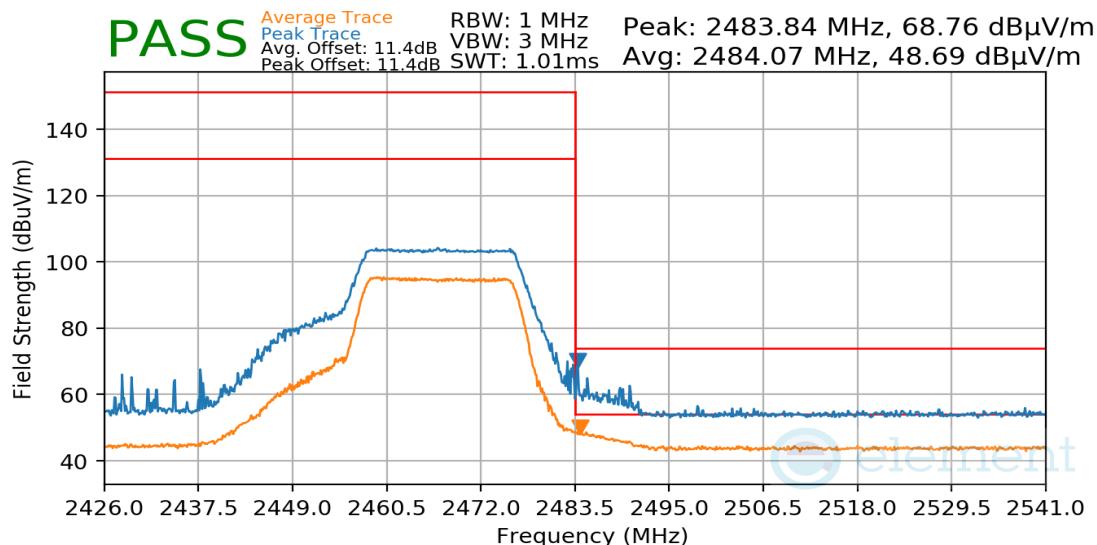

**Plot 7-74. Radiated Restricted Upper Band Edge Measurement**


FCC ID: BCG-A2986 IC: 579C-A2986		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 66 of 78 V 10.5 12/15/2021

Mode: 802.11n  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

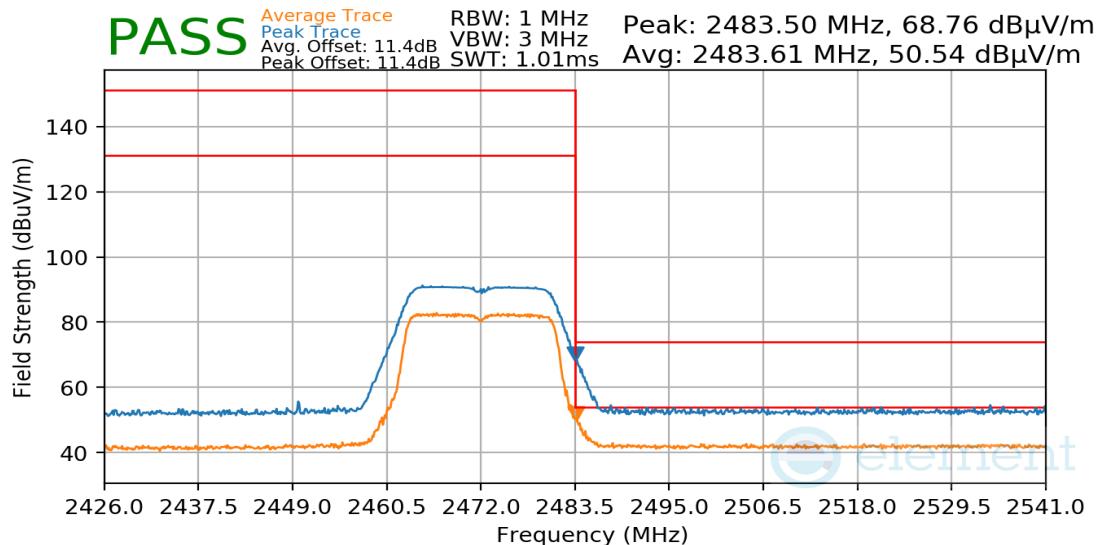

**Plot 7-75. Radiated Restricted Upper Band Edge Measurement**


Mode: 802.11n  
 Data Rate: MCS7  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

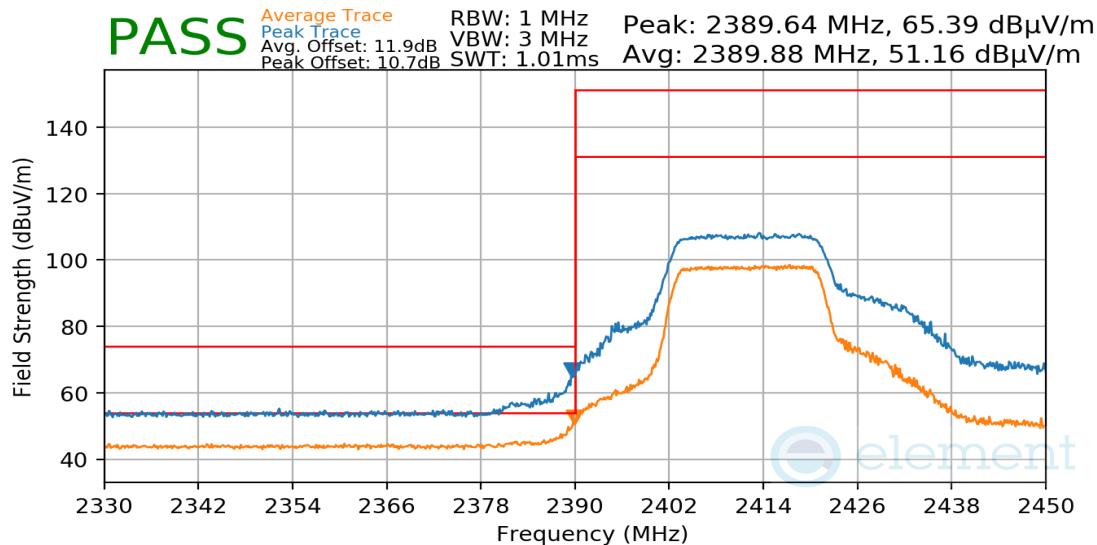

**Plot 7-76. Radiated Restricted Lower Band Edge Measurement**


FCC ID: BCG-A2986 IC: 579C-A2986	 <b>element</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 67 of 78 V 10.5 12/15/2021

Mode: 802.11n  
 Data Rate: MCS7  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

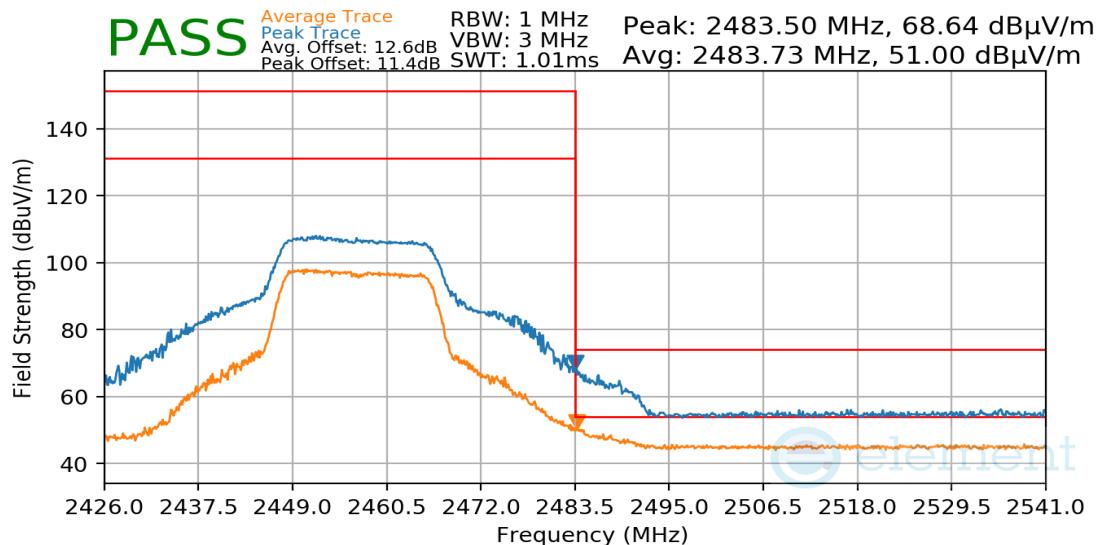

**Plot 7-77. Radiated Restricted Upper Band Edge Measurement**


Mode: 802.11n  
 Data Rate: MCS7  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

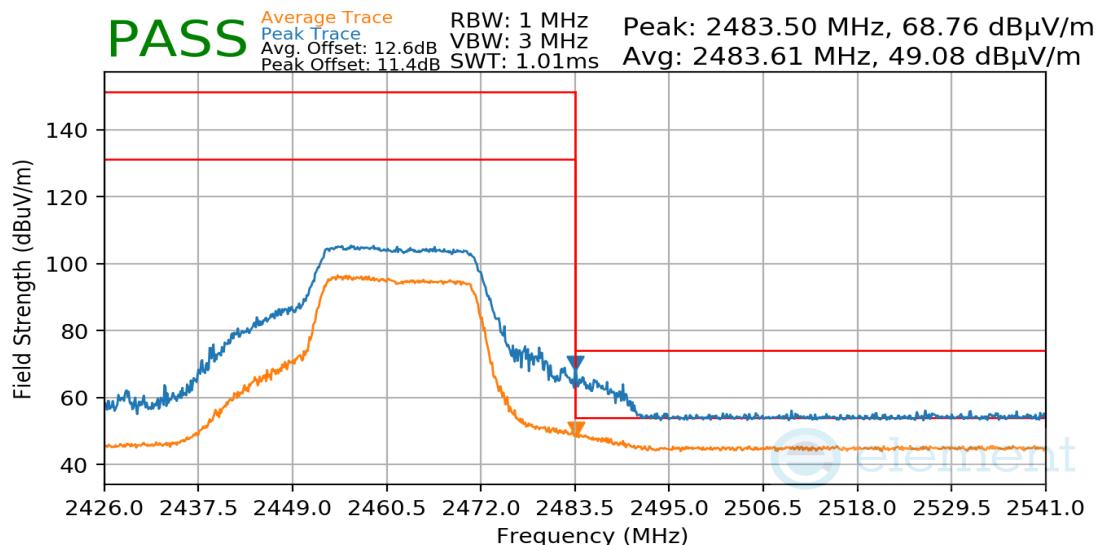

**Plot 7-78. Radiated Restricted Upper Band Edge Measurement**


FCC ID: BCG-A2986 IC: 579C-A2986	 <b>element</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 68 of 78

Mode: 802.11n  
 Data Rate: MCS7  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

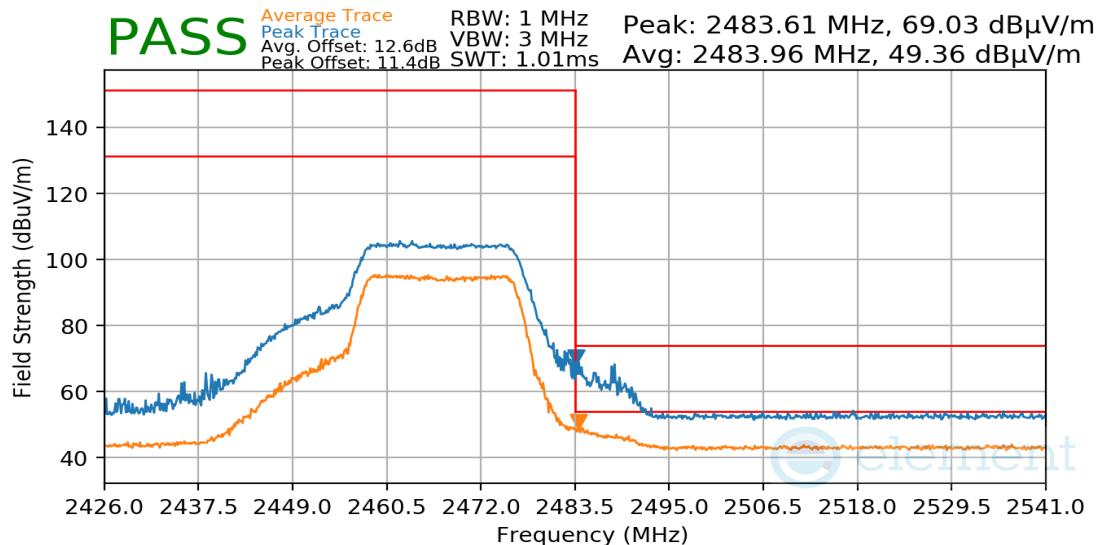

**Plot 7-79. Radiated Restricted Upper Band Edge Measurement**

Mode: 802.11n  
 Data Rate: MCS7  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

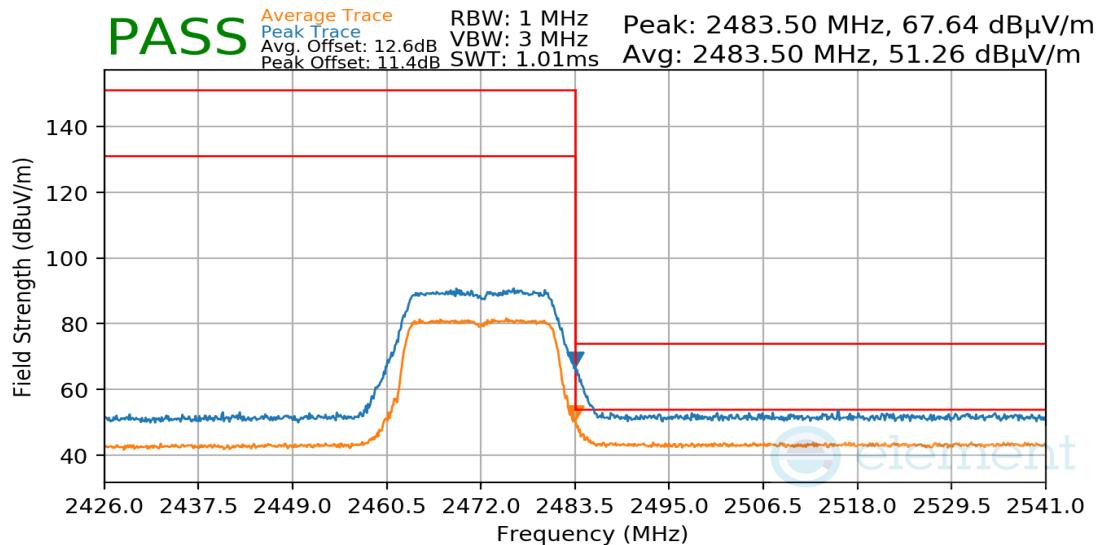

**Plot 7-80. Radiated Restricted Upper Band Edge Measurement**

FCC ID: BCG-A2986 IC: 579C-A2986	 <b>element</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 69 of 78 V 10.5 12/15/2021

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-10. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold


FCC ID: BCG-A2986 IC: 579C-A2986	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 70 of 78 V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

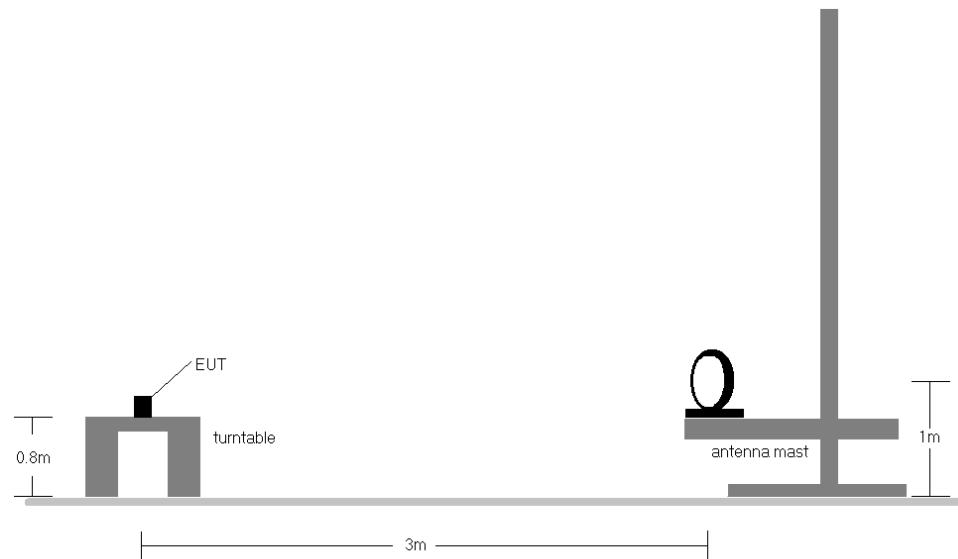

**Figure 7-7. Radiated Test Setup < 30Mhz**

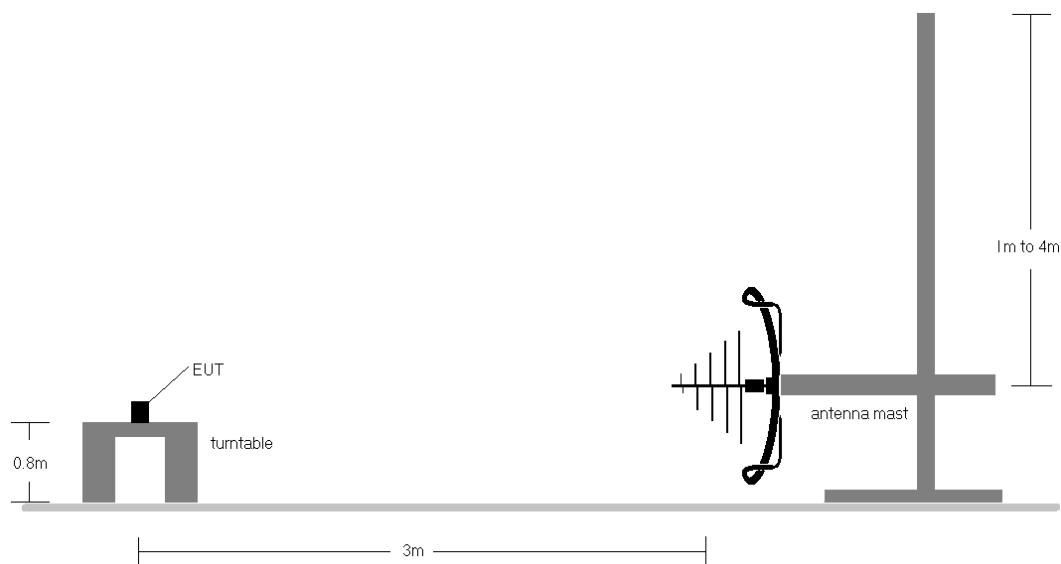

**Figure 7-8. Radiated Test Setup < 1GHz**

FCC ID: BCG-A2986 IC: 579C-A2986	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 71 of 78

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
  - b. EUT powered by host PC via USB-C cable with magnetic charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The unit was tested with all possible modes and only the highest emission is reported.

## Sample Calculations


### Determining Spurious Emissions Levels

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}]$  = Analyzer Level  $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL  $[\text{dB/m}]$  = Antenna Factor  $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin  $[\text{dB}]$  = Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCG-A2986 IC: 579C-A2986	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 72 of 78

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

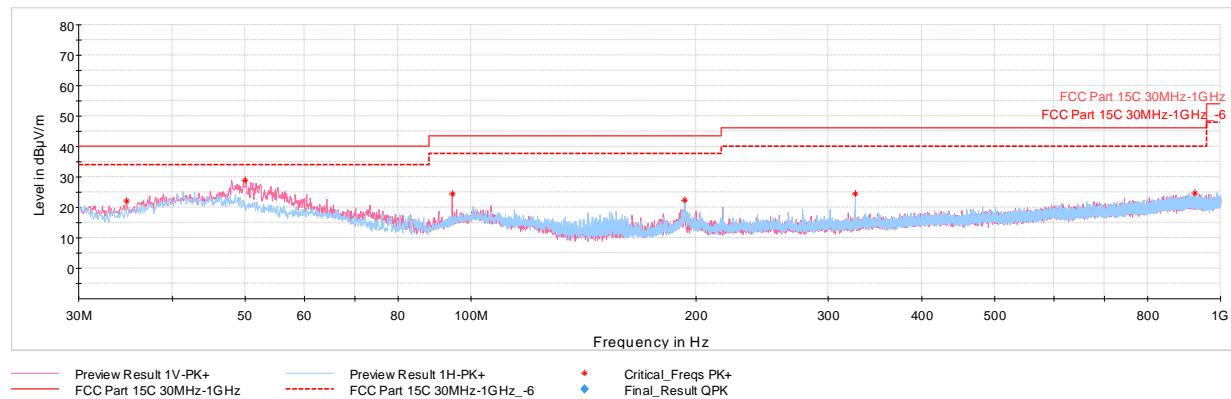

**Plot 7-81. Radiated Spurious Emissions below 1GHz 11b Ch.6, with AC/DC Adapter and Magnetic Charger**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
34.75	Max-Peak	V	100	257	-65.96	-18.83	22.21	40.00	-17.79
50.08	Max-Peak	V	100	3	-62.51	-15.63	28.86	40.00	-11.14
94.51	Max-Peak	V	100	337	-63.77	-18.85	24.38	43.52	-19.14
192.86	Max-Peak	V	100	331	-66.73	-18.00	22.27	43.52	-21.25
325.61	Max-Peak	H	100	131	-67.78	-14.64	24.58	46.02	-21.44
923.76	Max-Peak	V	300	65	-78.03	-4.32	24.65	46.02	-21.37

**Table 7-11. Radiated Spurious Emissions below 1GHz 11b Ch.6, AC/DC Adapter with and Magnetic Charger**

FCC ID: BCG-A2986 IC: 579C-A2986	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 73 of 78

## 7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-12. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2986 IC: 579C-A2986	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 74 of 78	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

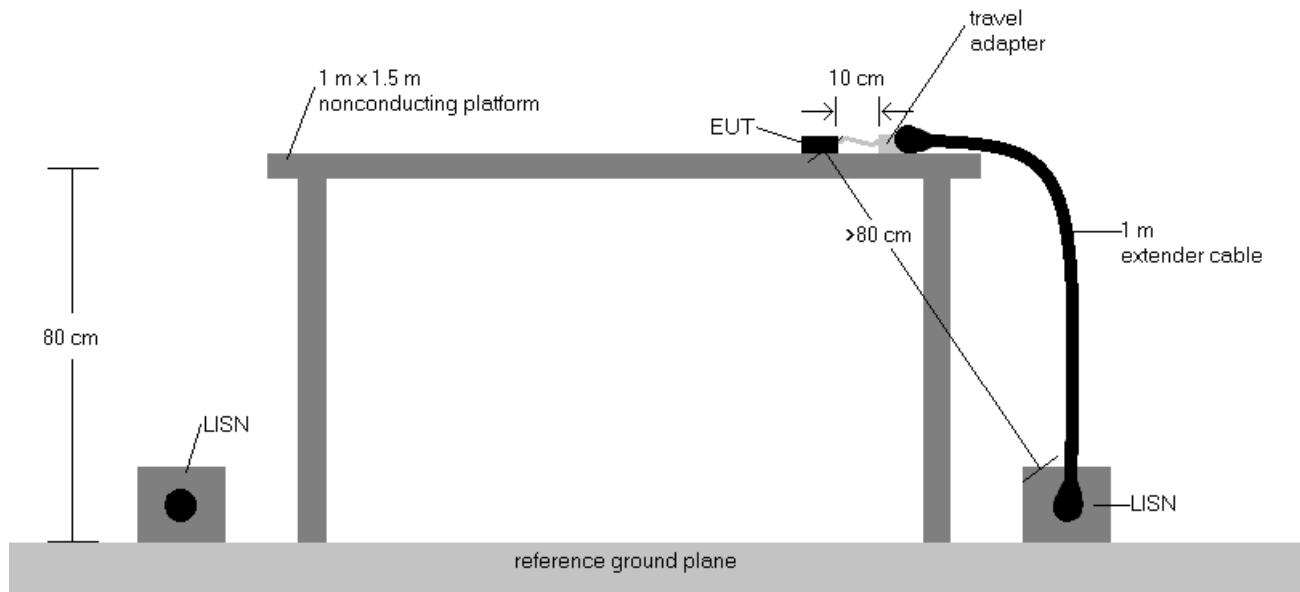


**Figure 7-9. Test Instrument & Measurement Setup**

### Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
  - b. EUT powered by host PC via USB-C cable with magnetic charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Corr. (dB)
6. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCG-A2986 IC: 579C-A2986	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 75 of 78

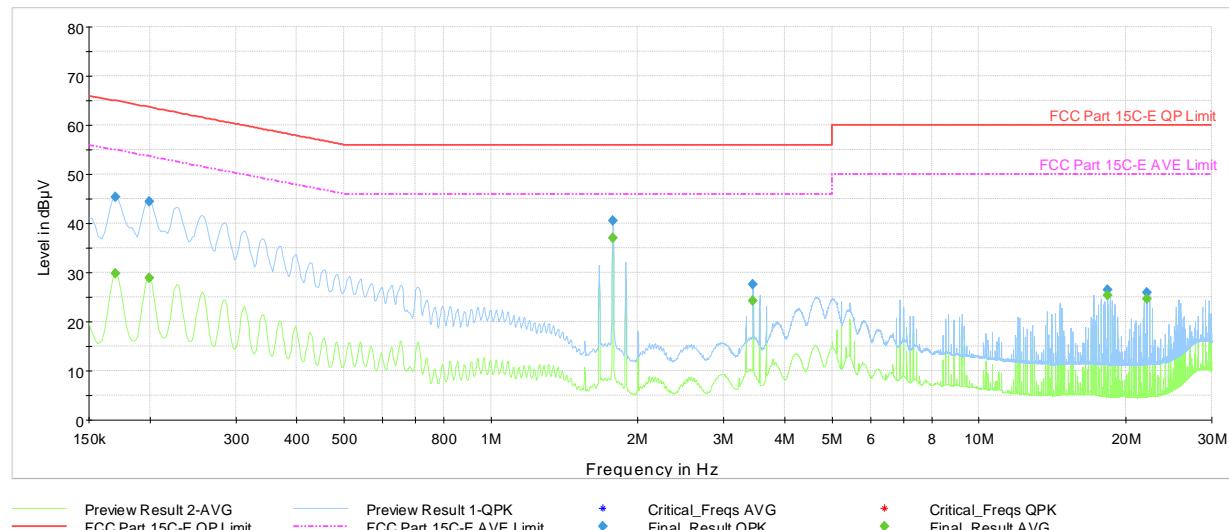


**Plot 7-82. AC Line Conducted Plot 802.11b - Ch.6 (L1, with host PC and Magnetic charger)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.170	FINAL	—	29.84	54.95	-25.11	L1	GND
0.170	FINAL	45.4	—	64.95	-19.52	L1	GND
0.200	FINAL	—	28.96	53.63	-24.67	L1	GND
0.200	FINAL	44.5	—	63.63	-19.11	L1	GND
1.777	FINAL	—	37.02	46.00	-8.98	L1	GND
1.777	FINAL	40.6	—	56.00	-15.40	L1	GND
3.444	FINAL	27.7	—	56.00	-28.35	L1	GND
3.444	FINAL	—	24.32	46.00	-21.68	L1	GND
18.332	FINAL	26.4	—	60.00	-33.56	L1	GND
18.332	FINAL	—	25.44	50.00	-24.56	L1	GND
22.110	FINAL	—	24.56	50.00	-25.44	L1	GND
22.110	FINAL	25.9	—	60.00	-34.13	L1	GND

**Table 7-13. AC Line Conducted Data 802.11b - Ch.6 (L1, with host PC and Magnetic charger)**

FCC ID: BCG-A2986 IC: 579C-A2986		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 76 of 78

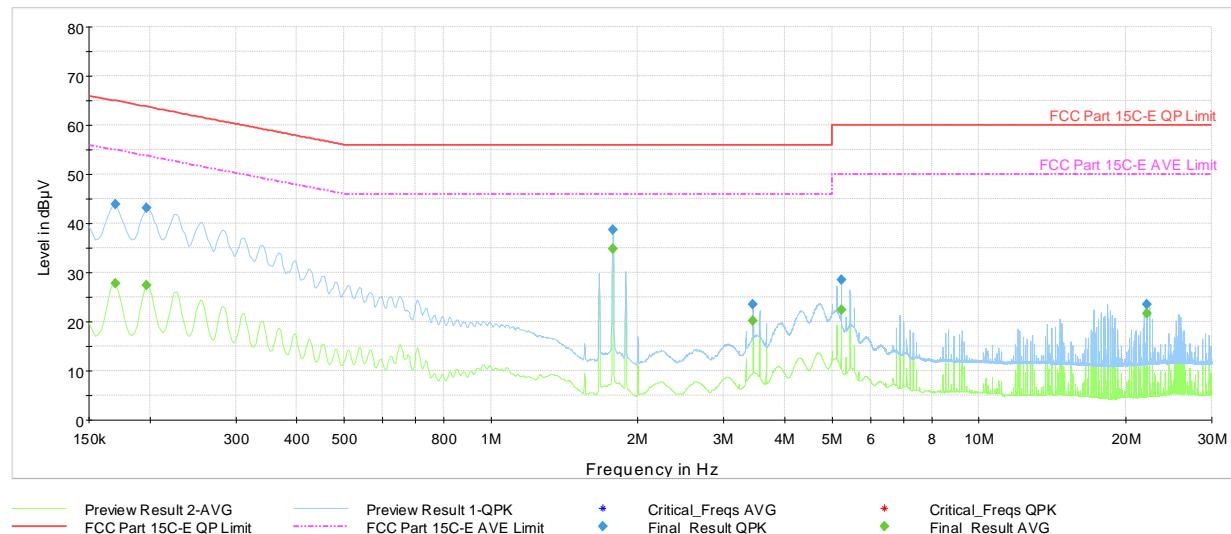

**Plot 7-83. AC Line Conducted Plot 802.11b - Ch.6 (N, with host PC and Magnetic charger)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.170	FINAL	—	27.83	54.95	-27.12	N	GND
0.170	FINAL	43.9	—	64.95	-21.10	N	GND
0.197	FINAL	—	27.44	53.73	-26.29	N	GND
0.197	FINAL	43.1	—	63.73	-20.62	N	GND
1.777	FINAL	—	34.75	46.00	-11.25	N	GND
1.777	FINAL	38.6	—	56.00	-17.36	N	GND
3.444	FINAL	23.5	—	56.00	-32.49	N	GND
3.444	FINAL	—	20.11	46.00	-25.89	N	GND
5.222	FINAL	28.5	—	60.00	-31.46	N	GND
5.222	FINAL	—	22.33	50.00	-27.67	N	GND
22.110	FINAL	—	21.68	50.00	-28.32	N	GND
22.110	FINAL	23.5	—	60.00	-36.49	N	GND

**Table 7-14. AC Line Conducted Data 802.11b - Ch.6 (N, with host PC and Magnetic charger)**

FCC ID: BCG-A2986 IC: 579C-A2986		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch	Page 77 of 78

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch FCC ID: BCG-A2986, IC: 579C-A2986** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCG-A2986 IC: 579C-A2986	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2305020014-08.BCG	Test Dates: 6/7/2023 - 8/7/2023	EUT Type: Watch		Page 78 of 78