



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 1**

**BLUETOOTH LOW ENERGY  
CERTIFICATION TEST REPORT**

**FOR**

**CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS**

**MODEL NUMBER: A1661, A1786**

**FCC ID: BCG-E3087A  
IC: 579C-E3087A**

**REPORT NUMBER: 16U23287-E2V5**

**ISSUE DATE: AUGUST 26, 2016**

*Prepared for*  
**APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| Rev. | Issue Date | Revisions                                                       | Revised By |
|------|------------|-----------------------------------------------------------------|------------|
| V1   | 7/21/2016  | Initial Issue                                                   | Hung Thai  |
| V2   | 7/30/2016  | Addressed TCB Questions                                         | Tony Li    |
| V3   | 8/15/2016  | Added test utility info                                         | Tina Chu   |
| V4   | 8/24/2016  | Updated Power, PSD for high power mode base on client new power | Joe Vang   |
| V5   | 8/26/2016  | Revised report to address TCB's questions                       | Tina Chu   |

## TABLE OF CONTENTS

|                                                |           |
|------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>    | <b>5</b>  |
| <b>2. TEST METHODOLOGY .....</b>               | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>   | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>    | <b>7</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....    | 7         |
| 4.2. SAMPLE CALCULATION .....                  | 7         |
| 4.3. MEASUREMENT UNCERTAINTY.....              | 7         |
| <b>5. EQUIPMENT UNDER TEST .....</b>           | <b>8</b>  |
| 5.1. DESCRIPTION OF EUT .....                  | 8         |
| 5.2. MAXIMUM OUTPUT POWER.....                 | 8         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....   | 8         |
| 5.4. SOFTWARE AND FIRMWARE.....                | 8         |
| 5.5. WORST-CASE CONFIGURATION AND MODE.....    | 9         |
| 5.6. DESCRIPTION OF TEST SETUP.....            | 10        |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b> | <b>16</b> |
| <b>7. ANTENNA PORT TEST RESULTS .....</b>      | <b>17</b> |
| 7.1. MEASUREMENT METHODS .....                 | 17        |
| 7.2. ON TIME, DUTY CYCLE .....                 | 18        |
| 7.3. 6 dB BANDWIDTH.....                       | 20        |
| 7.4. 99% BANDWIDTH.....                        | 24        |
| 7.5. AVERAGE POWER .....                       | 28        |
| 7.6. OUTPUT POWER.....                         | 29        |
| 7.7. POWER SPECTRAL DENSITY .....              | 30        |
| 7.8. CONDUCTED SPURIOUS EMISSIONS.....         | 34        |
| <b>8. RADIATED TEST RESULTS.....</b>           | <b>41</b> |
| 8.1. LIMITS AND PROCEDURE .....                | 41        |
| 8.2. TRANSMITTER ABOVE 1 GHz .....             | 42        |
| 8.2.1. LOW POWER .....                         | 42        |
| 8.2.2. HARMONICS AND SPURIOUS EMISSIONS .....  | 46        |
| 8.2.3. HIGH POWER .....                        | 52        |
| 8.2.4. HARMONICS AND SPURIOUS EMISSIONS .....  | 56        |
| 8.3. WORST-CASE BELOW 1 GHz.....               | 62        |
| 8.4. WORST-CASE 18 to 26 GHz.....              | 64        |

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>     | <b>66</b> |
| 9.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE ..... | 67        |
| 9.2. EUT POWERED BY HOST PC VIA USB CABLE .....       | 69        |
| <b>10. SETUP PHOTOS .....</b>                         | <b>71</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

**MODEL:** A1661, A1786

**SERIAL NUMBER:** C39RV05THFNN (CONDUCTED), C39RV04CHFNN (RADIATED)


**DATE TESTED:** MARCH 11, 2016 – AUGUST 24, 2016

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C        | Pass         |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 4 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



MENGISTU MEKURIA  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

Prepared By:



HUNG THAI  
EMC TECHNICIAN  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street               | 47266 Benicia Street                          |
|------------------------------------|-----------------------------------------------|
| <input type="checkbox"/> Chamber A | <input type="checkbox"/> Chamber D            |
| <input type="checkbox"/> Chamber B | <input checked="" type="checkbox"/> Chamber E |
| <input type="checkbox"/> Chamber C | <input type="checkbox"/> Chamber F            |
|                                    | <input type="checkbox"/> Chamber G            |
|                                    | <input checked="" type="checkbox"/> Chamber H |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                                | UNCERTAINTY |
|------------------------------------------|-------------|
| Conducted Disturbance, 9KHz to 0.15 MHz  | ± 3.84dB    |
| Conducted Disturbance, 0.15 to 30 MHz    | ± 3.65 dB   |
| Radiated Disturbance, 9KHz to 30 MHz     | ± 3.15 dB   |
| Radiated Disturbance, 30 to 1000 MHz     | ± 5.36 dB   |
| Radiated Disturbance, 1000 to 18000 MHz  | ± 4.32 dB   |
| Radiated Disturbance, 18000 to 26000 MHz | ± 4.45 dB   |
| Radiated Disturbance, 26000 to 40000 MHz | ± 5.24dB    |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT, Model A1661, A1786 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE-radio, IEEE 802.11a/b/g/n/ac, NFC and Bluetooth radio. The rechargeable battery is not user accessible

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-----------------------|------|--------------------|-------------------|
| 2402 - 2480           | BLE  | 16.62              | 45.92             |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

| Frequency Band (GHz) | Antenna Gain (dBi) |
|----------------------|--------------------|
| 2.4                  | -1.85              |

### 5.4. SOFTWARE AND FIRMWARE

The firmware version installed in the EUT during testing was 14.1.39.180  
The test utility software used during testing was BlueTool.



## **5.5. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation.

BLE: 1 Mbps.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |               |               |        |
|------------------------|--------------|---------------|---------------|--------|
| Description            | Manufacturer | Model         | Serial Number | FCC ID |
| Laptop                 | Dell         | Latitude 3540 | 9J6WQZ1       | NA     |
| Laptop Power Supply    | Dell         | LA65NM130     | QJNKWD        | NA     |

### I/O CABLES (CONDUCTED TEST)

| I/O Cable List |         |                      |                |             |                  |                      |
|----------------|---------|----------------------|----------------|-------------|------------------|----------------------|
| Cable No       | Port    | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks              |
| 1              | Antenna | 1                    | SMA            | Un-Shielded | 0.2              | To spectrum Analyzer |
| 2              | USB     | 2                    | USB            | Shielded    | 1                | N/A                  |

### I/O CABLES (RADIATED ABOVE 1 GHZ)

| I/O Cable List |      |                      |                |            |                  |         |
|----------------|------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| None Used      |      |                      |                |            |                  |         |

### I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

| I/O Cable List |      |                      |                |             |                  |         |
|----------------|------|----------------------|----------------|-------------|------------------|---------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | AC   | 1                    | AC             | Un-shielded | 3                | N/A     |


### I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER)

| I/O Cable List |               |                |                |             |                  |         |
|----------------|---------------|----------------|----------------|-------------|------------------|---------|
| Cable No       | Port          | # of identical | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | AC            | 1              | AC             | Un-shielded | 3                | N/A     |
| 2              | Power Adapter | 1              | AC             | Un-shielded | 3                | N/A     |

### TEST SETUP- CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


### SETUP DIAGRAM

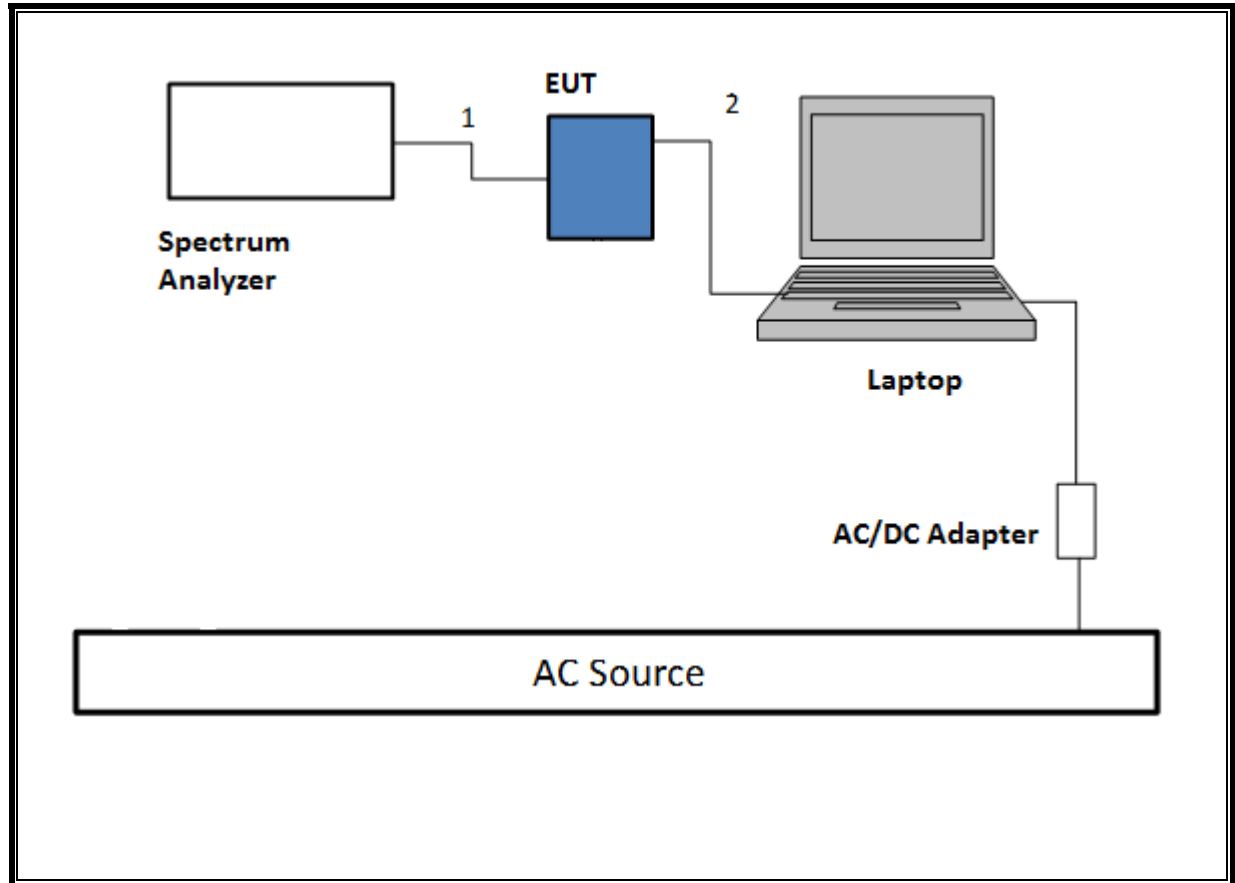

**TEST SETUP- RADIATED-ABOVE 1 GHZ**

The EUT was powered by battery. Test software exercised the EUT.


**SETUP DIAGRAM**

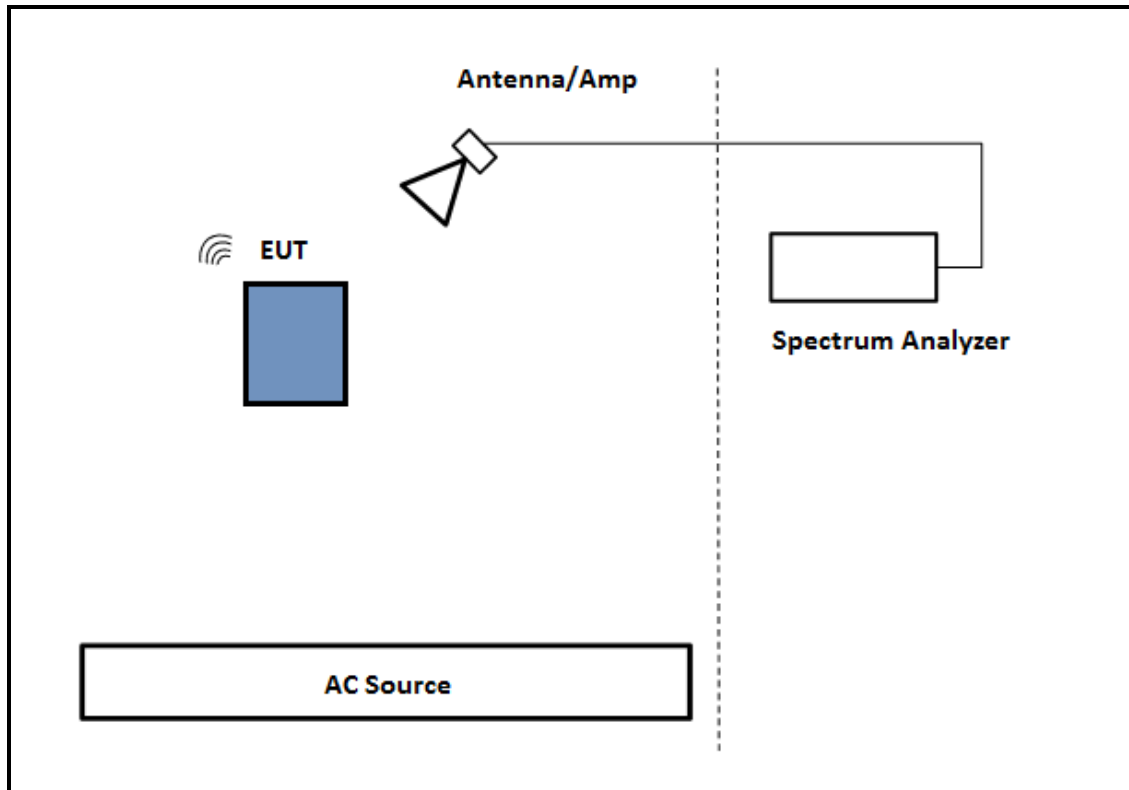

### **TEST SETUP- BELOW 1GHZ**

The EUT was powered by AC cord. Test software exercised the EUT.


### **SETUP DIAGRAM**

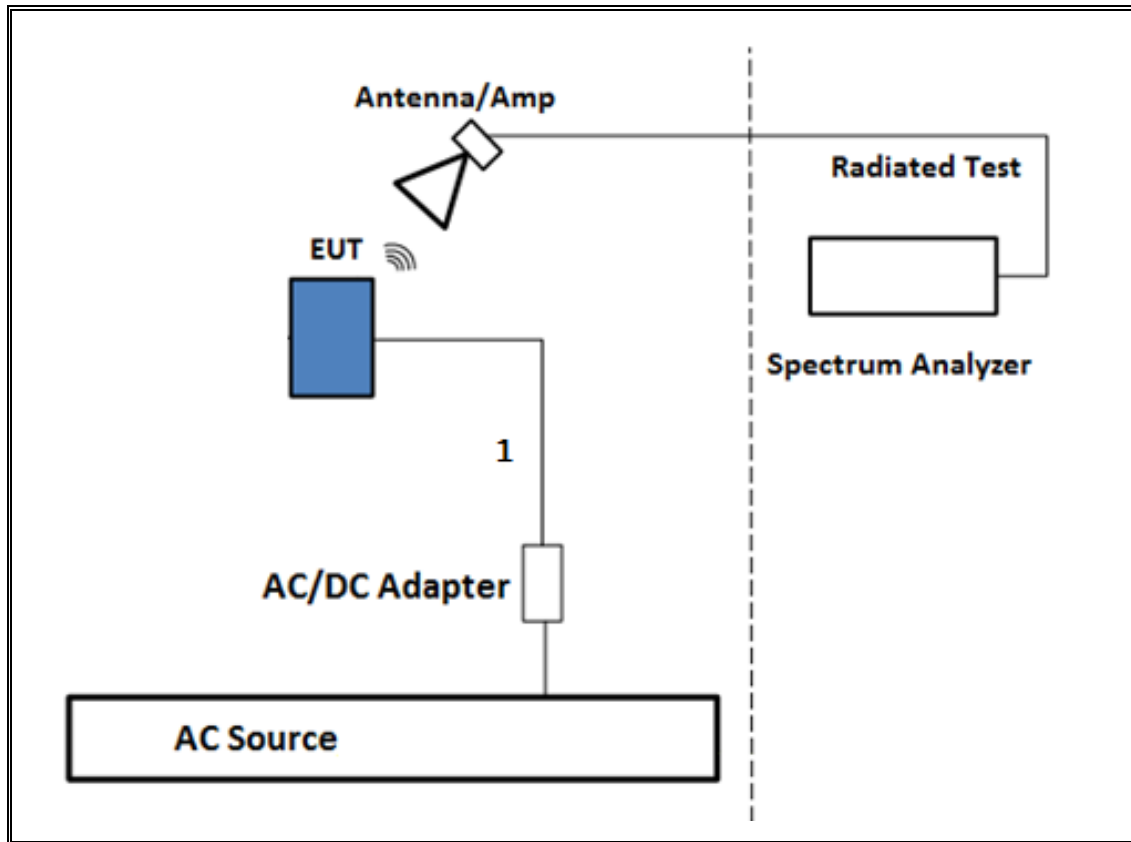

**TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER**

The EUT was tested with powered by AC/DC adapter via USB cable. Test software exercised the EUT.


**SETUP DIAGRAM**

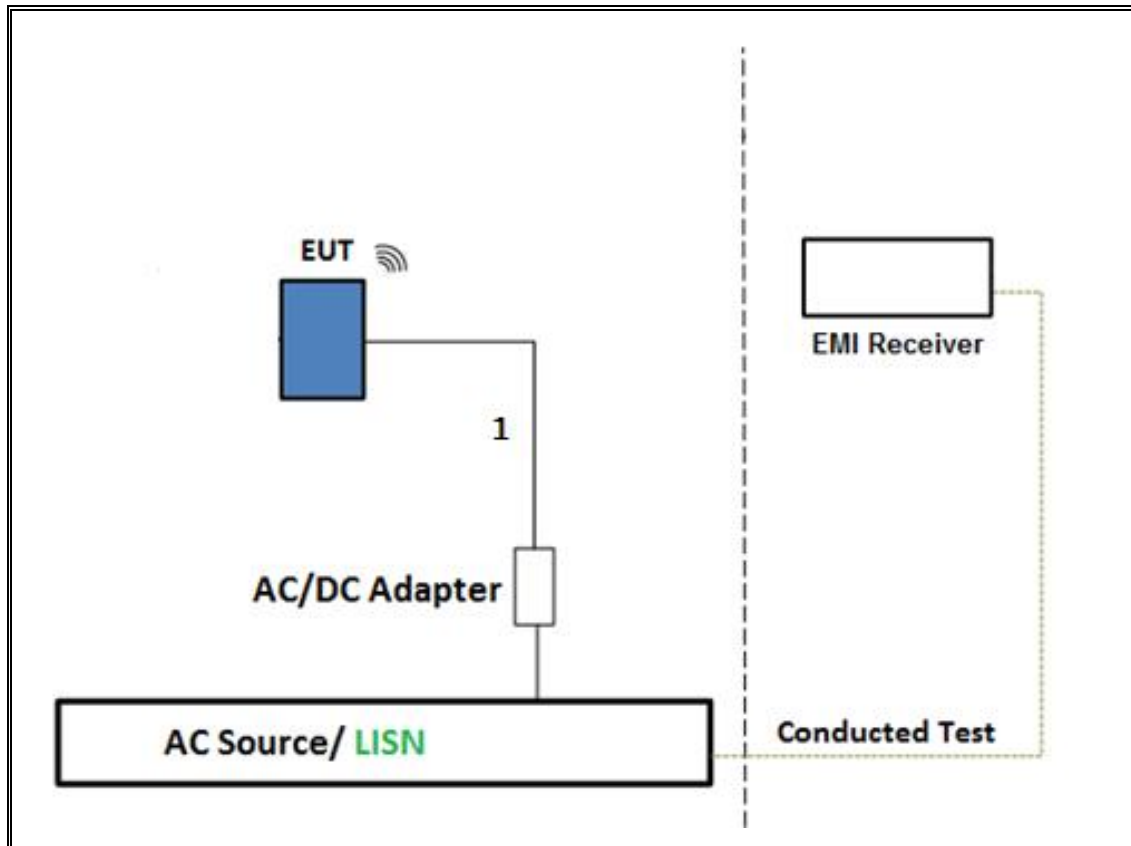

**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

The EUT was tested with powered by host PC via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM**

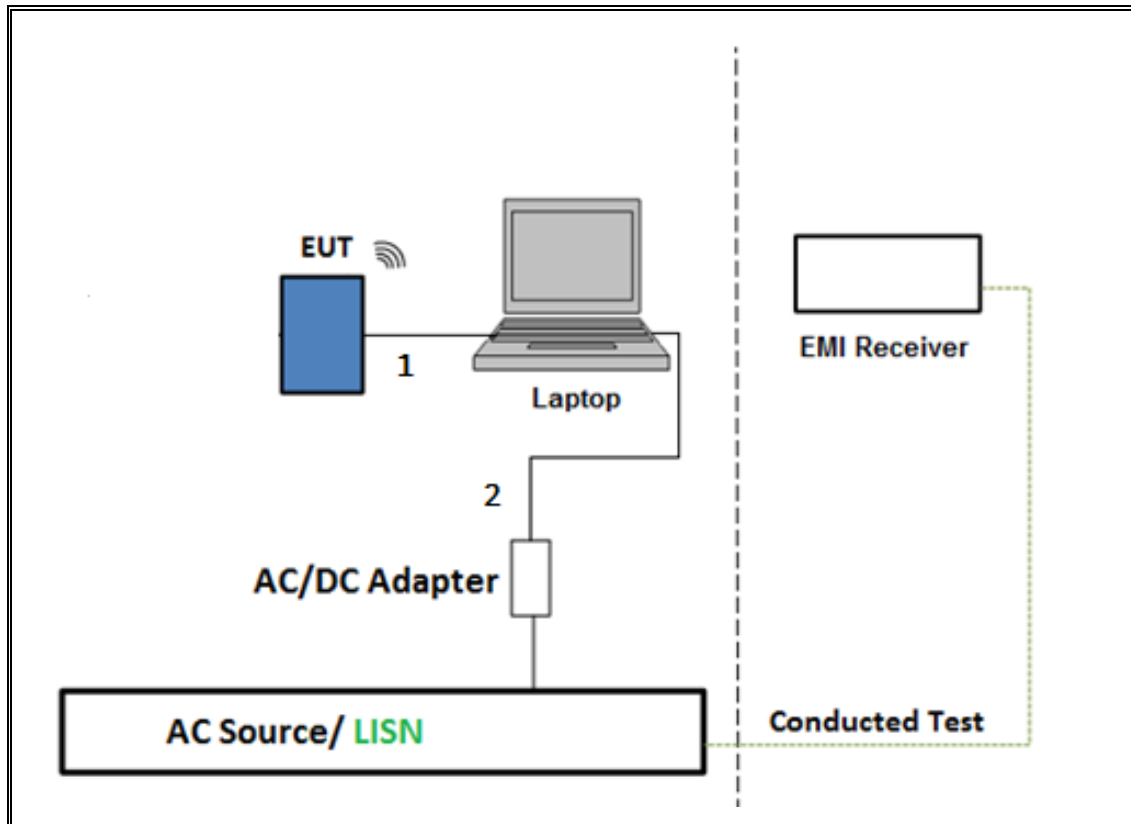

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                                   |                 |                        |                           |            |
|-------------------------------------------------------|-----------------|------------------------|---------------------------|------------|
| Description                                           | Manufacturer    | Model                  | Asset                     | Cal Due    |
| Antenna, Horn 1-18GHz                                 | ETS Lindgren    | 3117                   | 00154522                  | 1/12/2017  |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz           | Sunol Sciences  | JB3                    | A022813-1                 | 10/28/2016 |
| Amplifier, 1 - 18GHz                                  | Miteq           | AFS42-00101800-25-S-42 | 1782158                   | 1/25/2017  |
| **Amplifier, 10KHz to 1GHz, 32dB                      | Sonoma          | 310N                   | 323561                    | 6/8/2016   |
| **Spectrum Analyzer, PXA, 3Hz to 44GHz                | Agilent         | N9030A                 | US51350187                | 6/1/2016   |
| **Amplifier, 10KHz to 1GHz, 32dB                      | Sonoma          | 310N                   | 185623                    | 6/9/2016   |
| Spectrum Analyzer, PXA, 3Hz to 44GHz                  | Agilent         | N9030A                 | MY51380911                | 10/15/2016 |
| Power Meter, P-series single channel                  | Agilent         | N1911A                 | GB45100212                | 9/25/2016  |
| **Power Sensor, P - series, 50MHz to 18GHz, Wideband  | Agilent         | N1921A                 | MY53260010                | 7/8/2016   |
| ***Power Sensor, P - series, 50MHz to 18GHz, Wideband | Agilent         | N1921A                 | MY55200004                | 5/18/2017  |
| **Antenna, Horn 18 to 26.5GHz                         | ARA             | MWH-1826               | 209336                    | 5/12/2016  |
| **Spectrum Analyzer, 40 GHz                           | Agilent         | 8564E                  | 3943A01643                | 8/14/2016  |
| **Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum        | Keysight        | 8449B                  | 3008A04710                | 6/29/2016  |
| AC Line Conducted                                     |                 |                        |                           |            |
| EMI Test Receiver 9KHz-7GHz                           | Rohde & Schwarz | ESCI7                  | 100935                    | 9/10/2016  |
| LISN for Conducted Emissions CISPR-16                 | Fischer         | 50/250-25-2            | 161124                    | 9/16/2016  |
| **Power Cable, Line Conducted Emissions               | UL              | PG1                    | N/A                       | 7/28/2016  |
| UL SOFTWARE                                           |                 |                        |                           |            |
| * Radiated Software                                   | UL              | UL EMC                 | Ver 9.5, June 24, 2015    |            |
| * Conducted Software                                  | UL              | UL EMC                 | Ver 4.0, January 11, 2016 |            |

Note: \* indicates automation software version used in the compliance certification testing

\*\*Testing is completed before equipment expiration date.

\*\*\*Equipment was use after calibration.



## 7. ANTENNA PORT TEST RESULTS

### 7.1. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

## 7.2. ON TIME, DUTY CYCLE

### LIMITS

None; for reporting purposes only.



### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

### ON TIME AND DUTY CYCLE RESULTS

| Mode           | ON Time<br>B<br>(msec) | Period<br>(msec) | Duty Cycle<br>x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction Factor<br>(dB) | 1/B<br>Minimum VBW<br>(kHz) |
|----------------|------------------------|------------------|-----------------------------|----------------------|-----------------------------------------|-----------------------------|
| BLE LOW POWER  | 1.000                  | 1.000            | 1.000                       | 100.00%              | 0.00                                    | 0.010                       |
| BLE HIGH POWER | 1.000                  | 1.000            | 1.000                       | 100.00%              | 0.00                                    | 0.010                       |

## DUTY CYCLE PLOTS

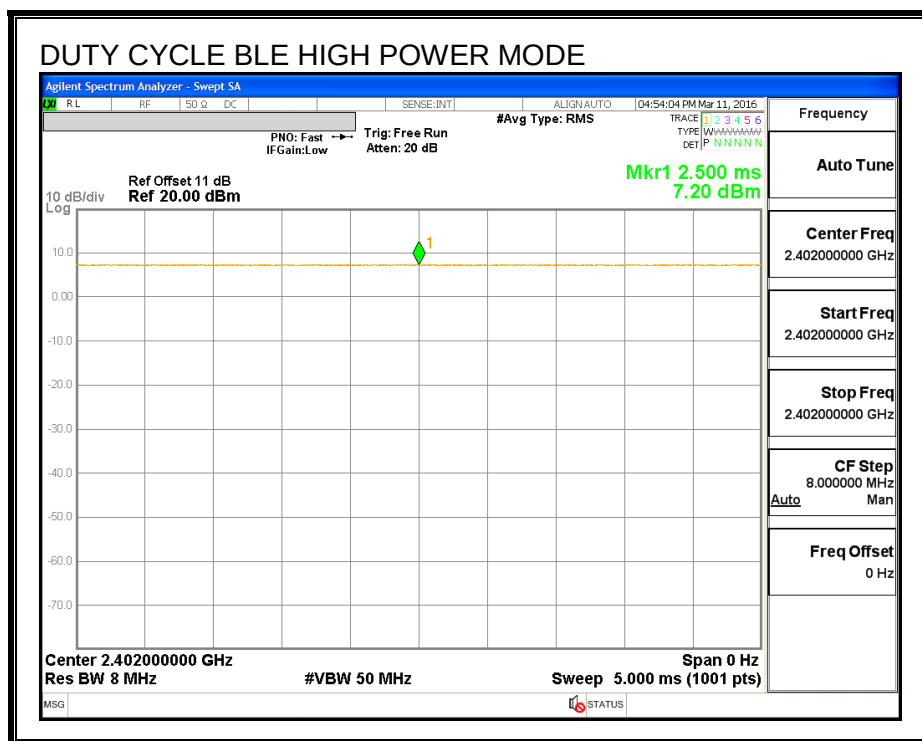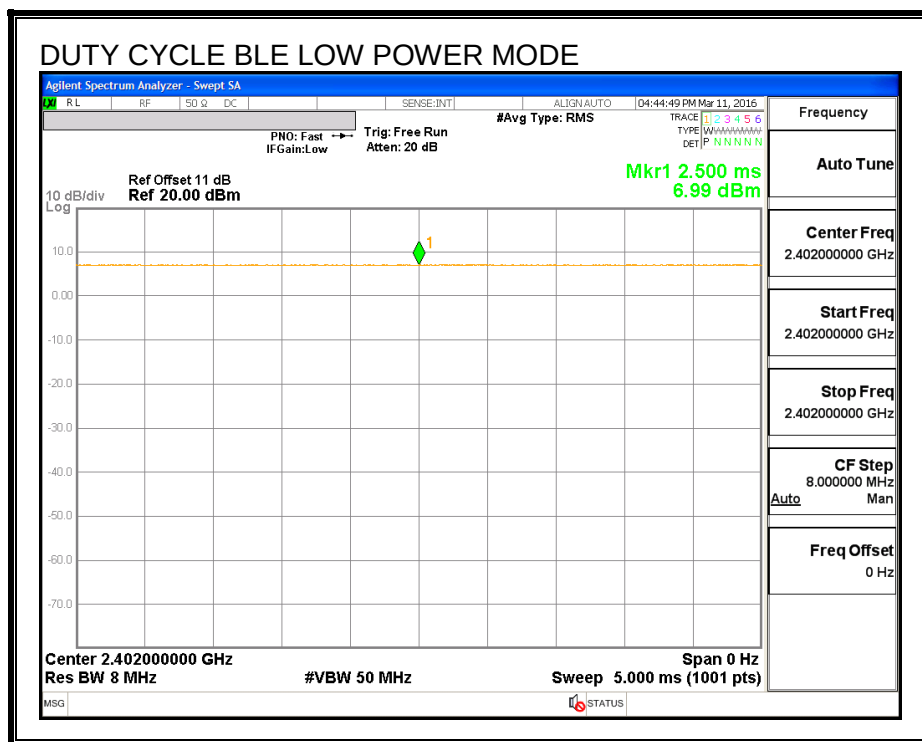

### 7.3. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RESULTS



##### LOW POWER


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2402            | 0.684                | 0.5                 |
| Middle  | 2440            | 0.750                | 0.5                 |
| High    | 2480            | 0.746                | 0.5                 |

##### HIGH POWER


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2402            | 0.766                | 0.5                 |
| Middle  | 2440            | 0.746                | 0.5                 |
| High    | 2480            | 0.756                | 0.5                 |



**6 dB BANDWIDTH LOW POWER**

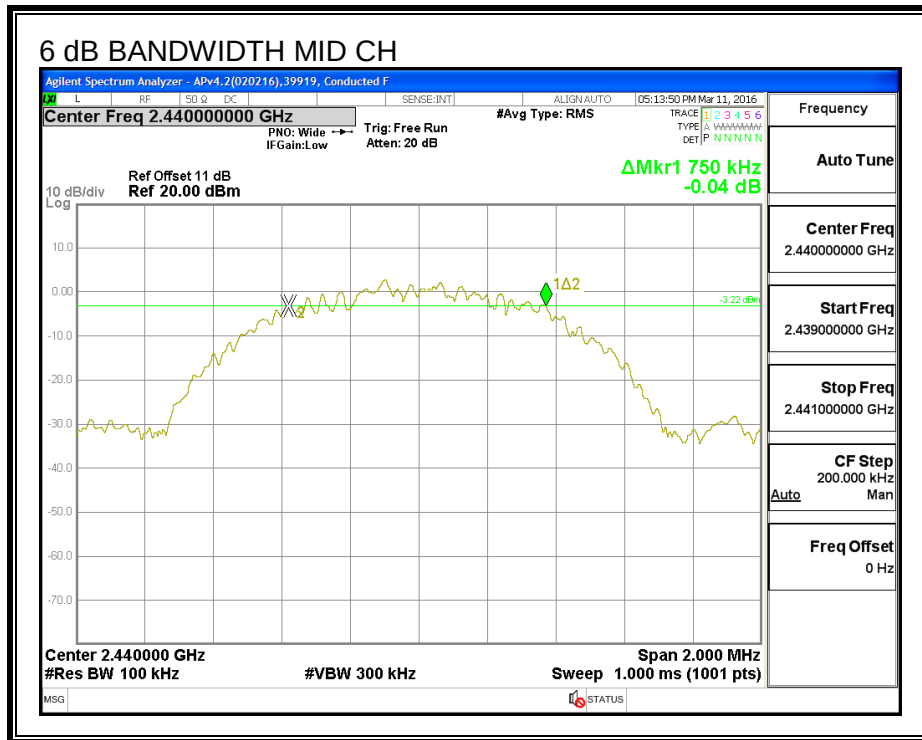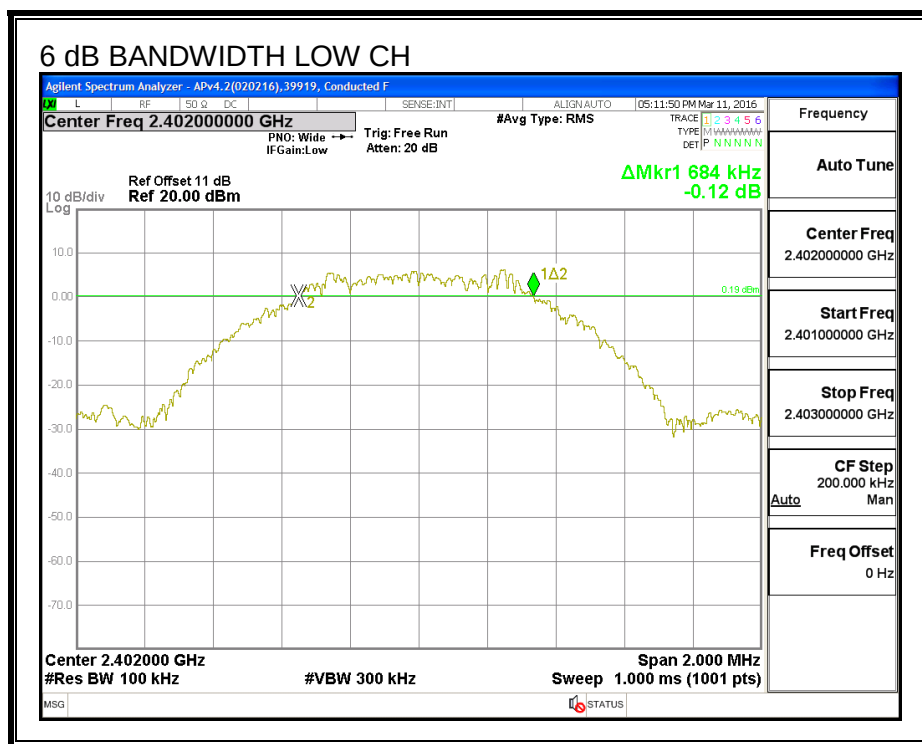

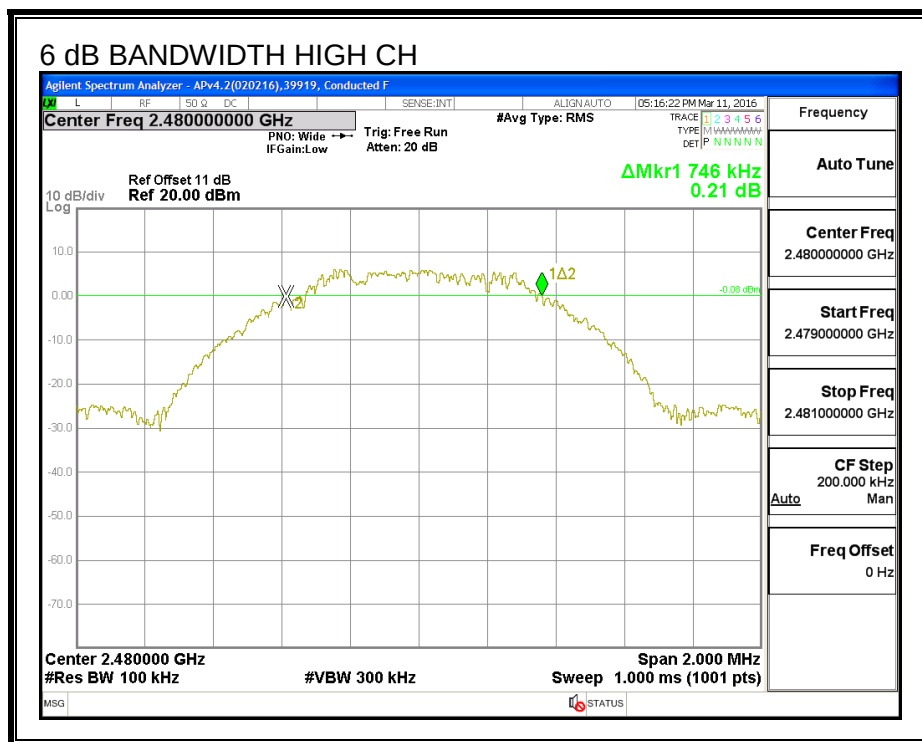

**6 dB BANDWIDTH HIGH POWER**

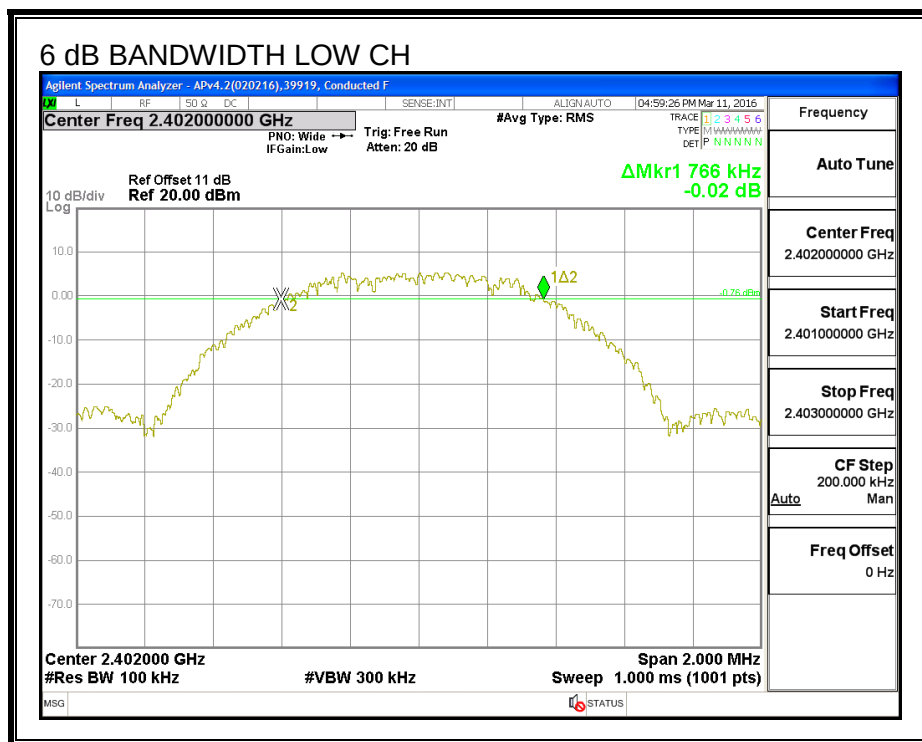

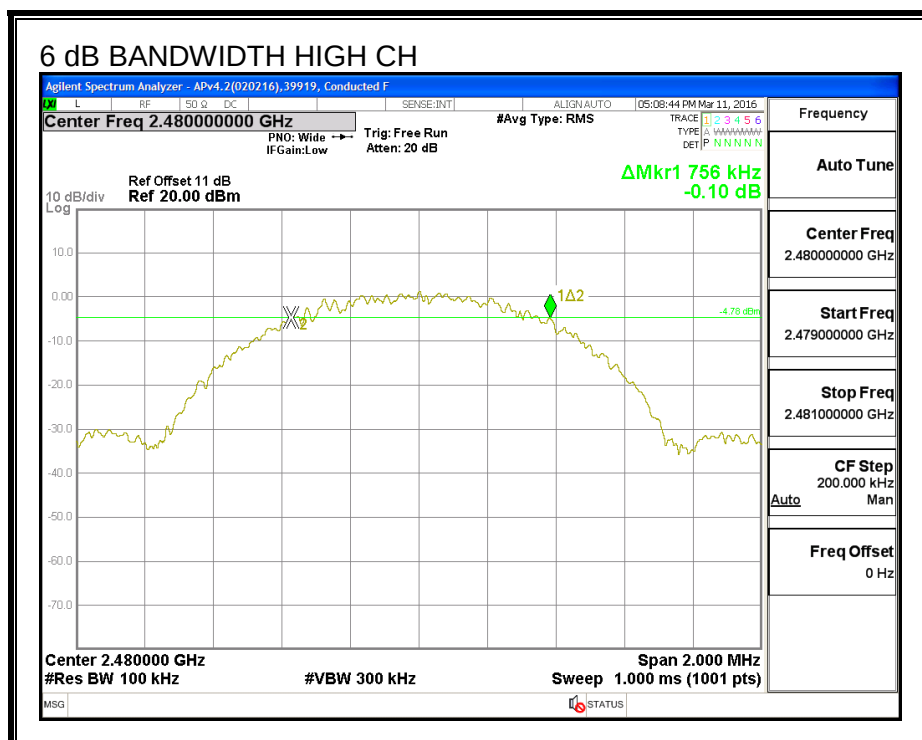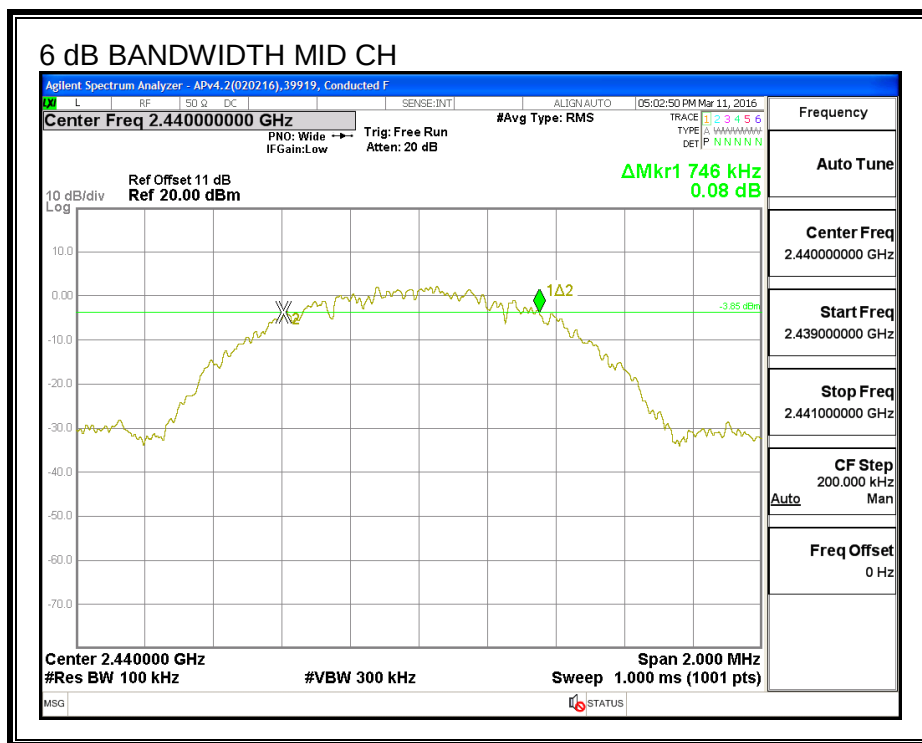

## 7.4. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### RESULTS

#### LOW POWER



| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2402            | 1.0484              |
| Middle  | 2440            | 1.0511              |
| High    | 2480            | 1.0505              |


#### HIGH POWER

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2402            | 1.0494              |
| Middle  | 2440            | 1.0474              |
| High    | 2480            | 1.0498              |






**99% BANDWIDTH LOW POWER**

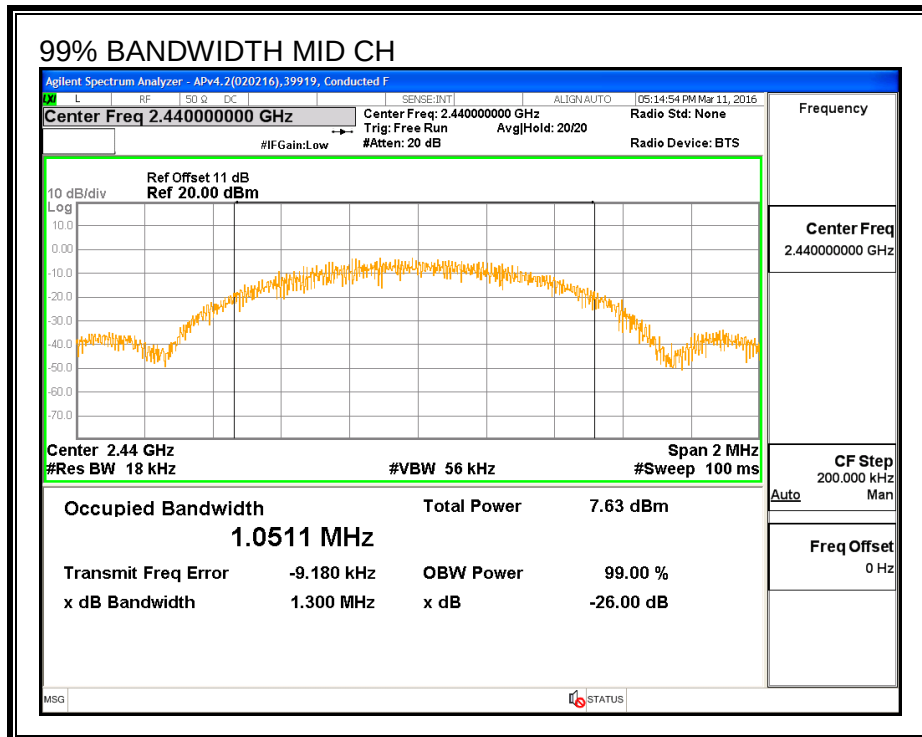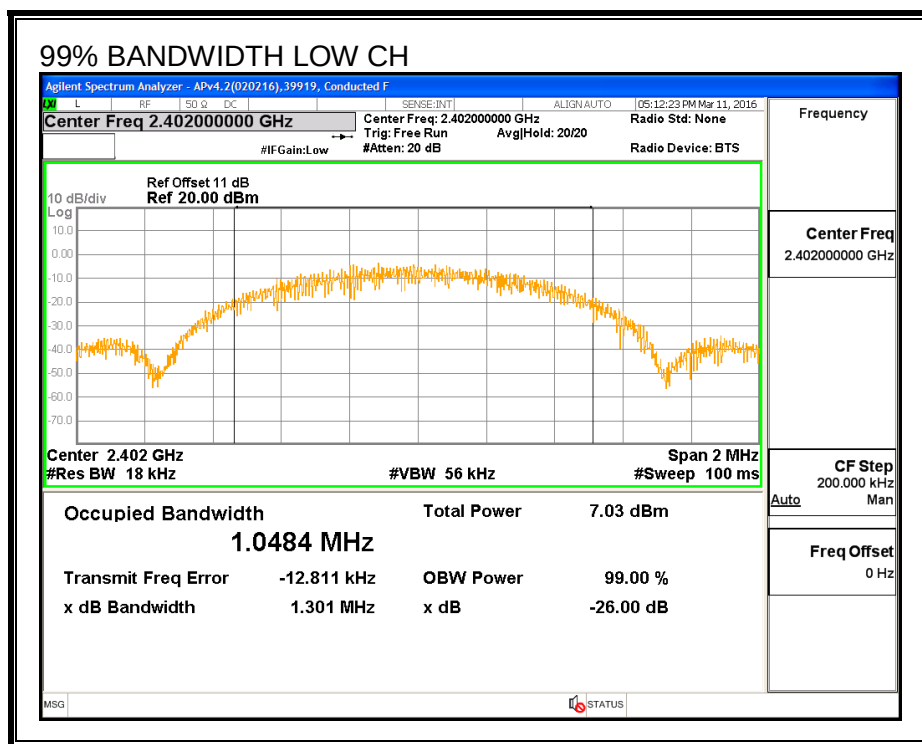

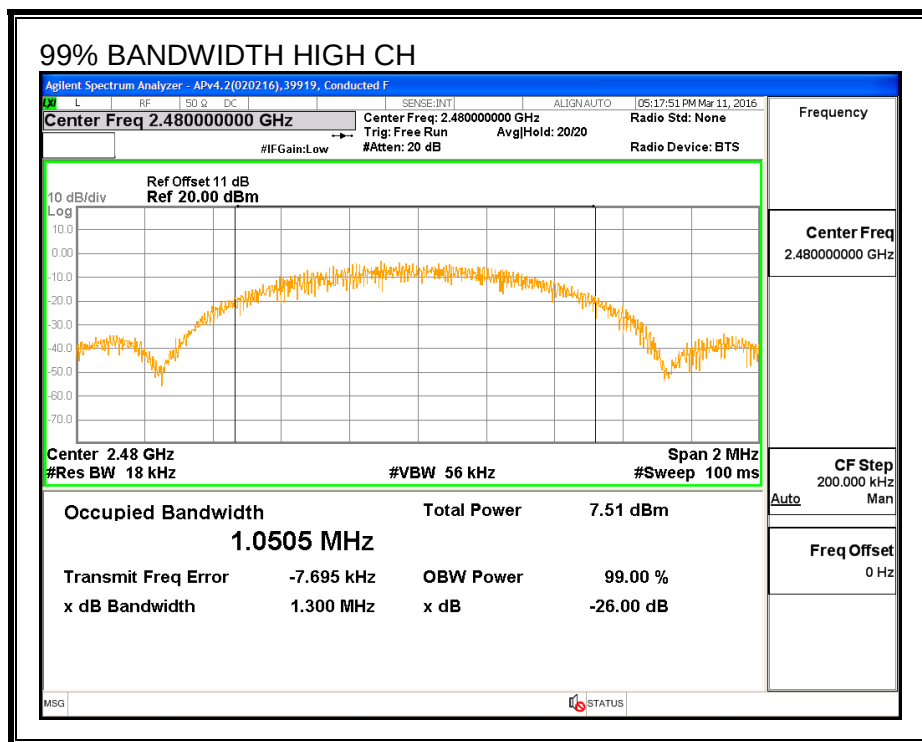

**99% BANDWIDTH HIGH POWER**

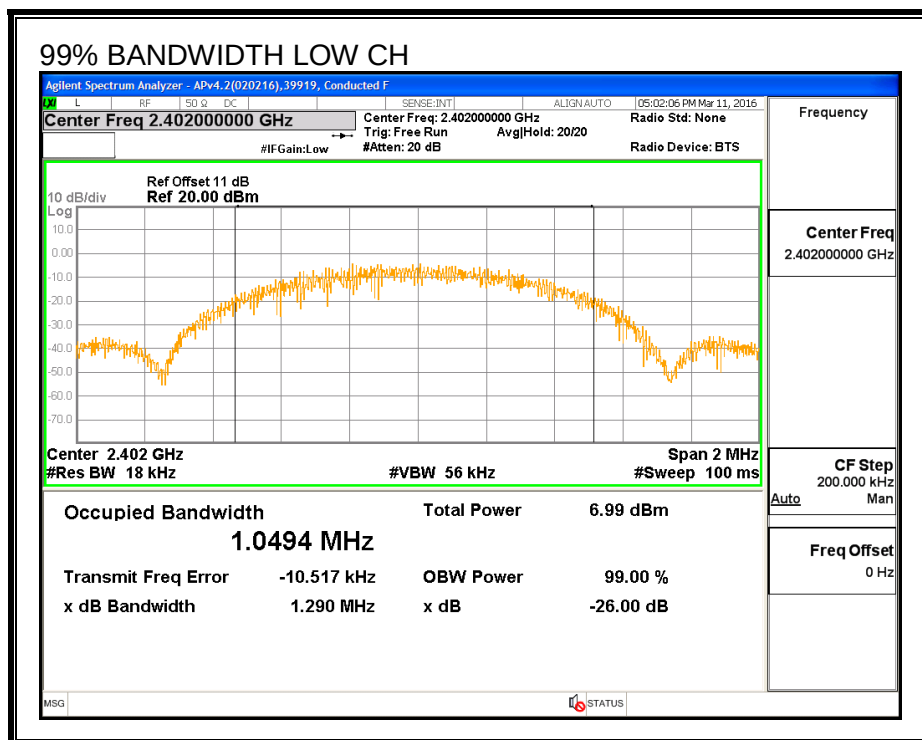

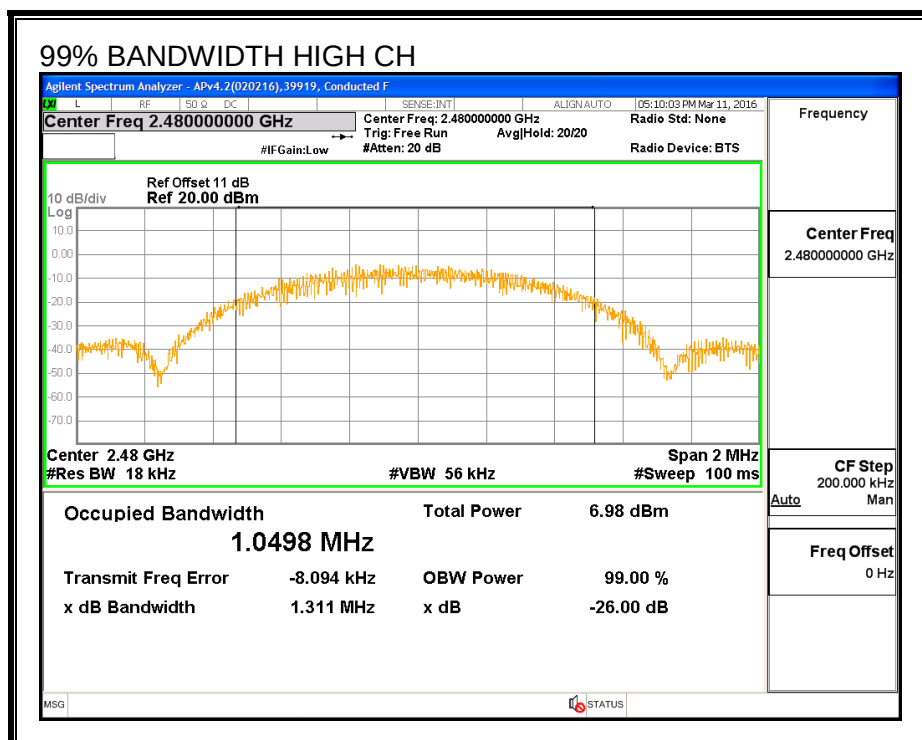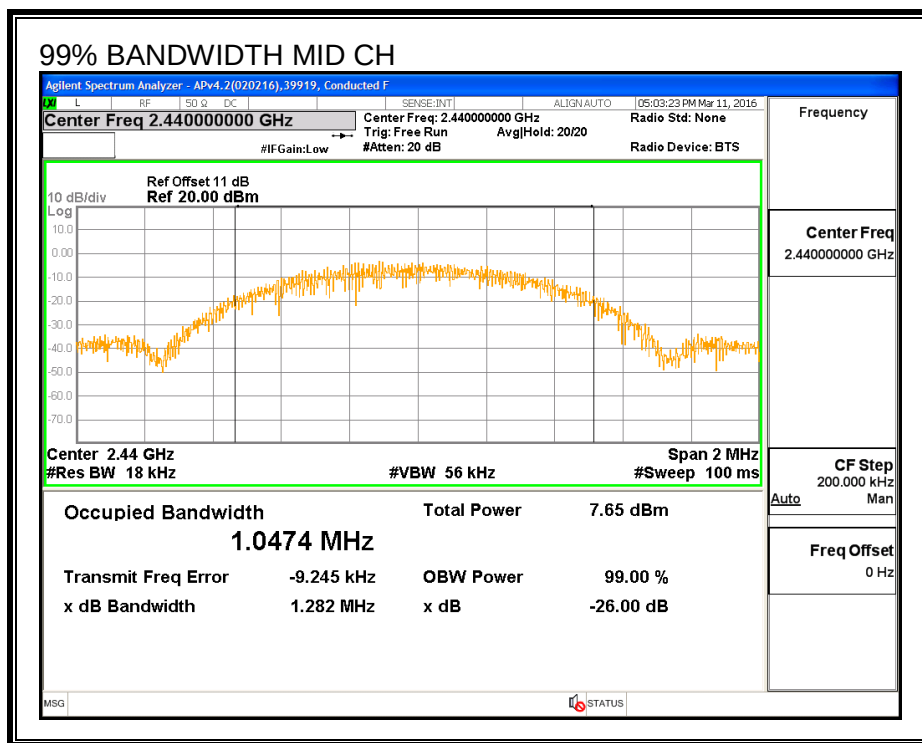

## 7.5. AVERAGE POWER

### LIMITS

None; for reporting purposes only.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

|            |       |              |         |
|------------|-------|--------------|---------|
| <b>ID:</b> | 30606 | <b>Date:</b> | 8/24/16 |
|------------|-------|--------------|---------|

#### LOW POWER

| Channel | Frequency (MHz) | AV power (dBm) |
|---------|-----------------|----------------|
| Low     | 2402            | 9.51           |
| Middle  | 2440            | 9.61           |
| High    | 2480            | 9.96           |

#### HIGH POWER

| Channel | Frequency (MHz) | AV power (dBm) |
|---------|-----------------|----------------|
| Low     | 2402            | 16.48          |
| Middle  | 2440            | 16.45          |
| High    | 2480            | 16.50          |

## 7.6. OUTPUT POWER

### LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (4)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

### RESULTS

|            |       |              |         |
|------------|-------|--------------|---------|
| <b>ID:</b> | 30606 | <b>Date:</b> | 8/24/16 |
|------------|-------|--------------|---------|

#### LOW POWER

| Channel | Frequency<br>(MHz) | Peak Power<br>Reading<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------------|----------------|----------------|
| Low     | 2402               | 9.63                           | 30             | -20.370        |
| Middle  | 2440               | 9.76                           | 30             | -20.240        |
| High    | 2480               | 10.10                          | 30             | -19.900        |

#### HIGH POWER

| Channel | Frequency<br>(MHz) | Peak Power<br>Reading<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------------|----------------|----------------|
| Low     | 2402               | 16.59                          | 30             | -13.410        |
| Middle  | 2440               | 16.55                          | 30             | -13.450        |
| High    | 2480               | 16.62                          | 30             | -13.380        |

## 7.7. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)

IC RSS-247 (5.2) (2)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS



#### LOW POWER


| Channel | Frequency (MHz) | PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|-----------|-------------|-------------|
| Low     | 2402            | -8.31     | 8           | -16.31      |
| Middle  | 2440            | -7.00     | 8           | -15.00      |
| High    | 2480            | -7.75     | 8           | -15.75      |

#### HIGH POWER


| Channel | Frequency (MHz) | PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|-----------|-------------|-------------|
| Low     | 2402            | 0.62      | 8           | -7.38       |
| Middle  | 2440            | 0.49      | 8           | -7.51       |
| High    | 2480            | 0.85      | 8           | -7.15       |

**POWER SPECTRAL DENSITY LOW POWER**

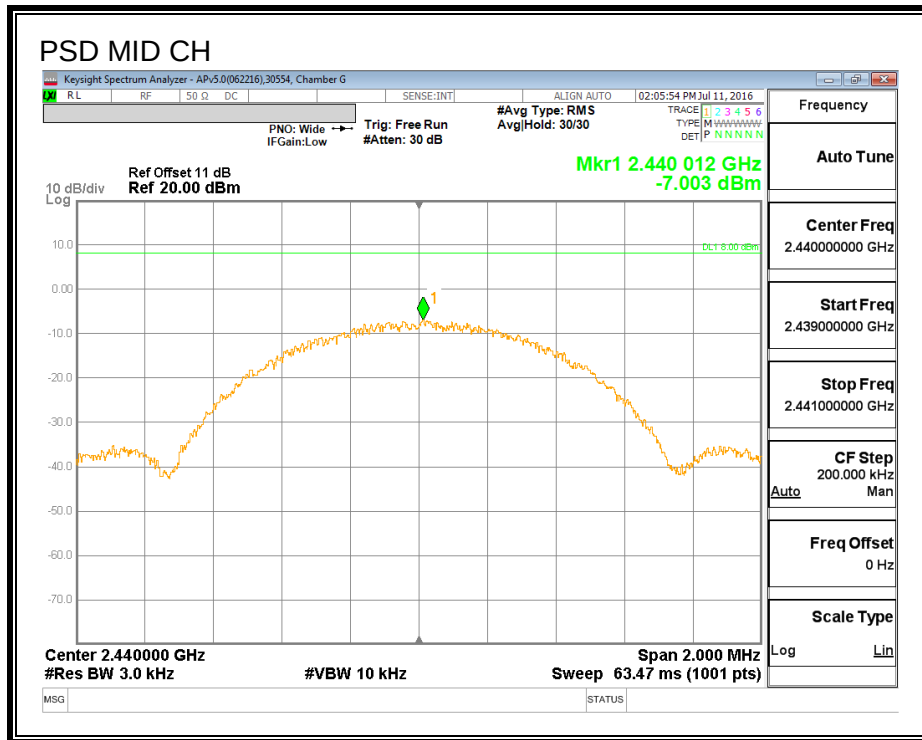
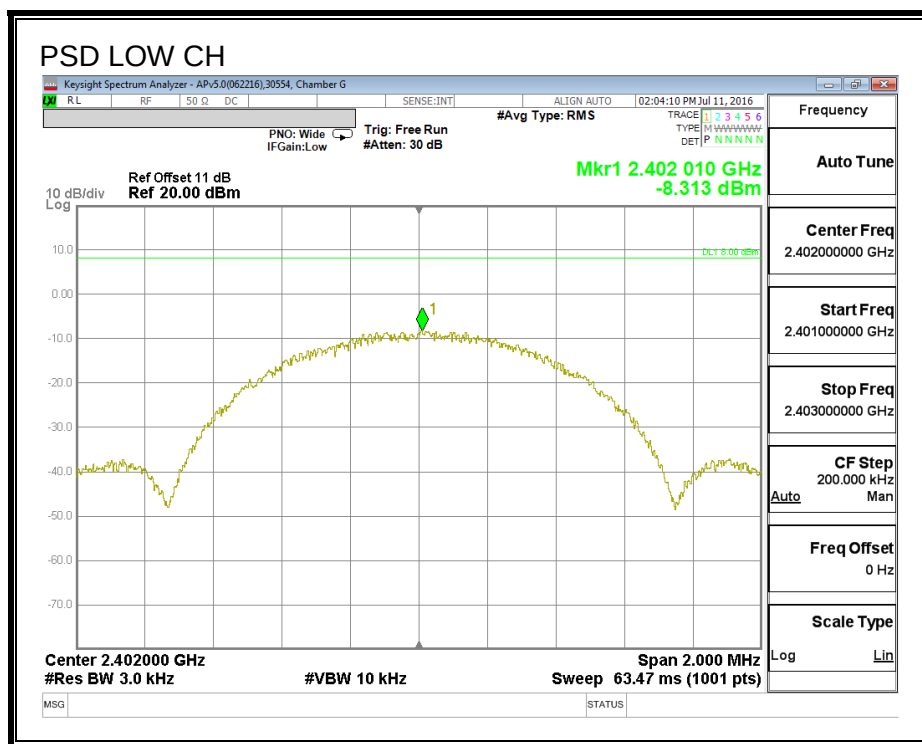


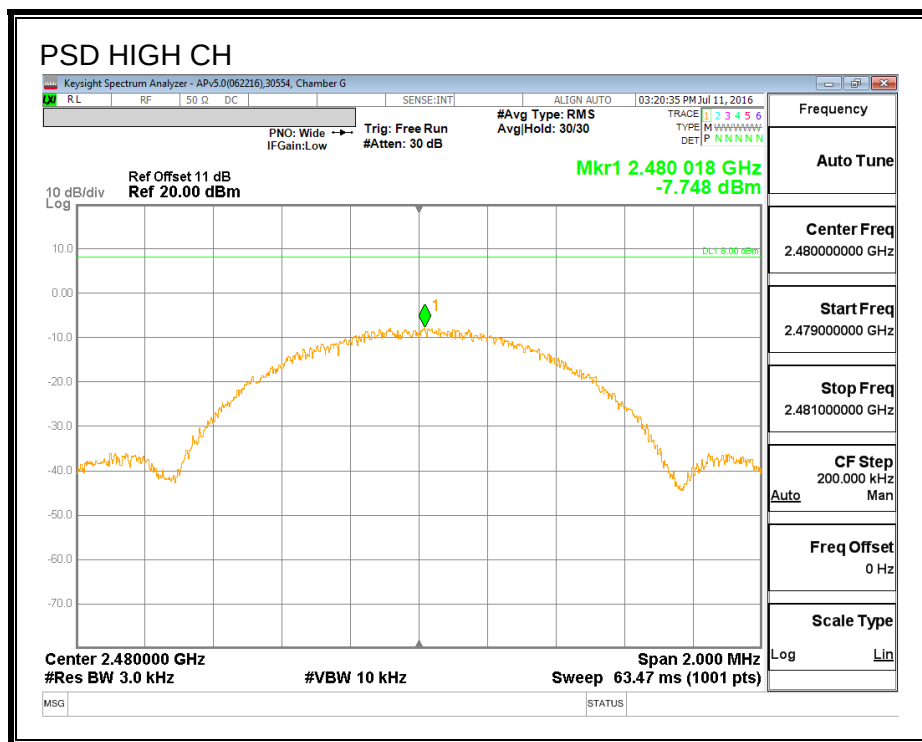

## POWER SPECTRAL DENSITY HIGH POWER

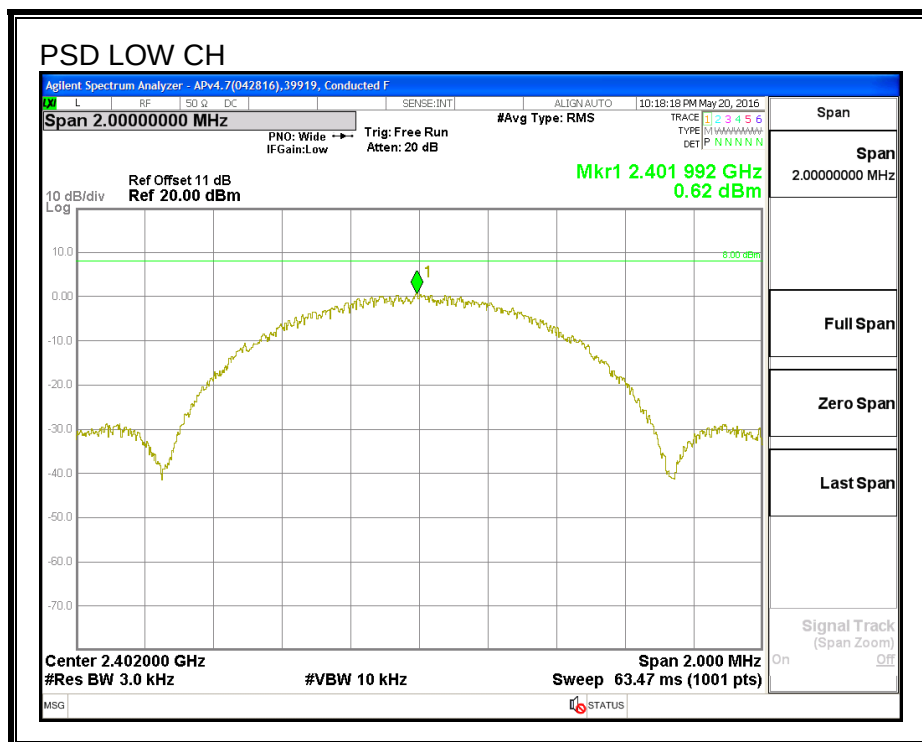



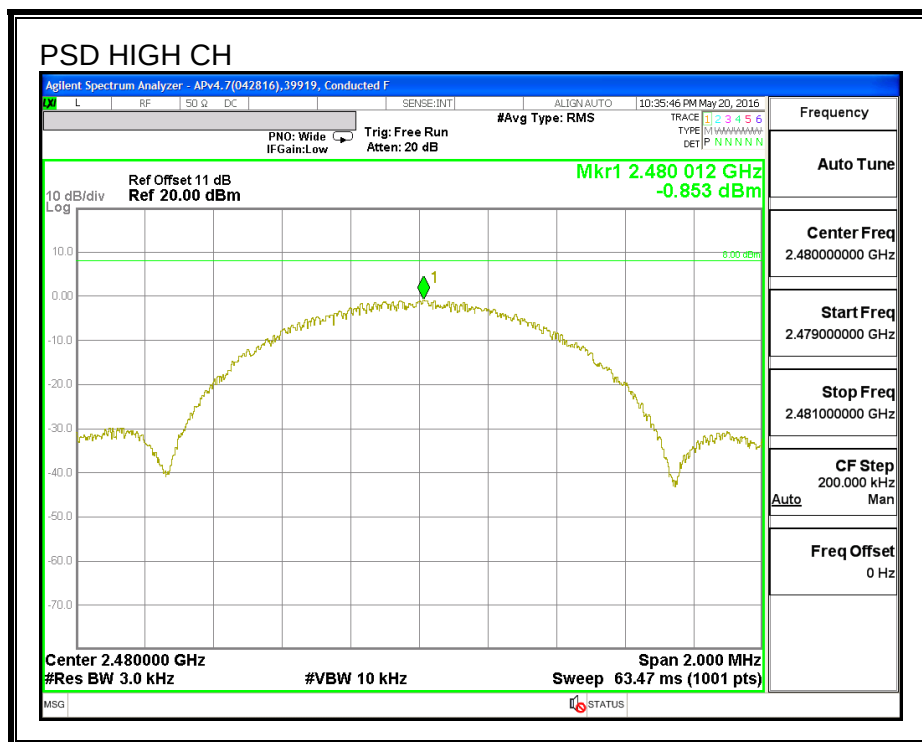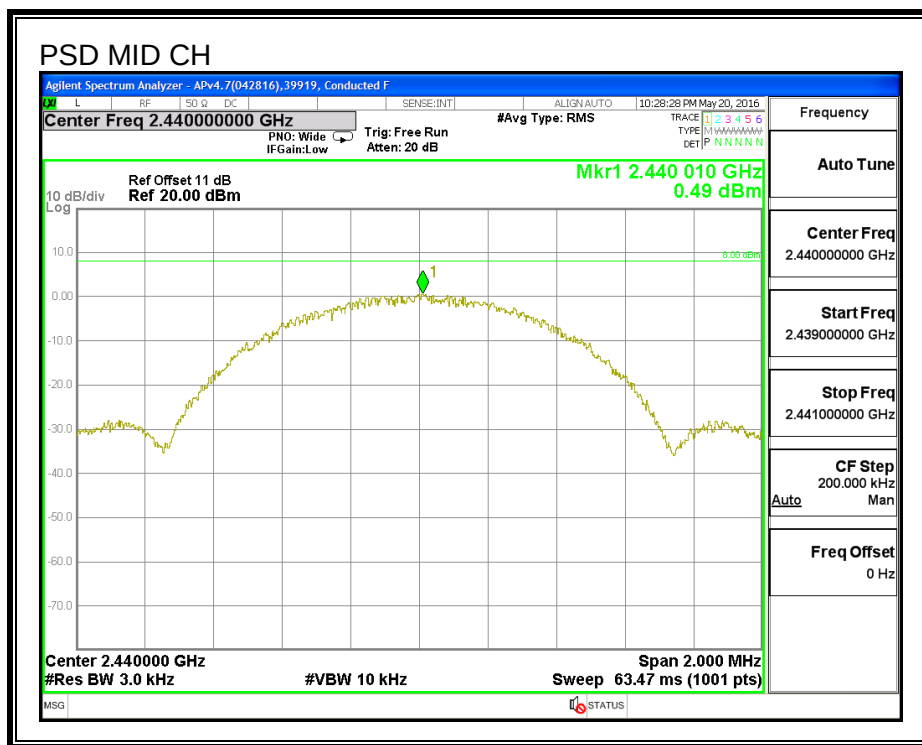

## **7.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-247 (5.5)



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

### **RESULTS**



Note: Conducted Spurious Emissions to the high power mode was originally tested with high power than recorded power data of average power table.

## LOW POWER



## SPURIOUS EMISSIONS, LOW CHANNEL

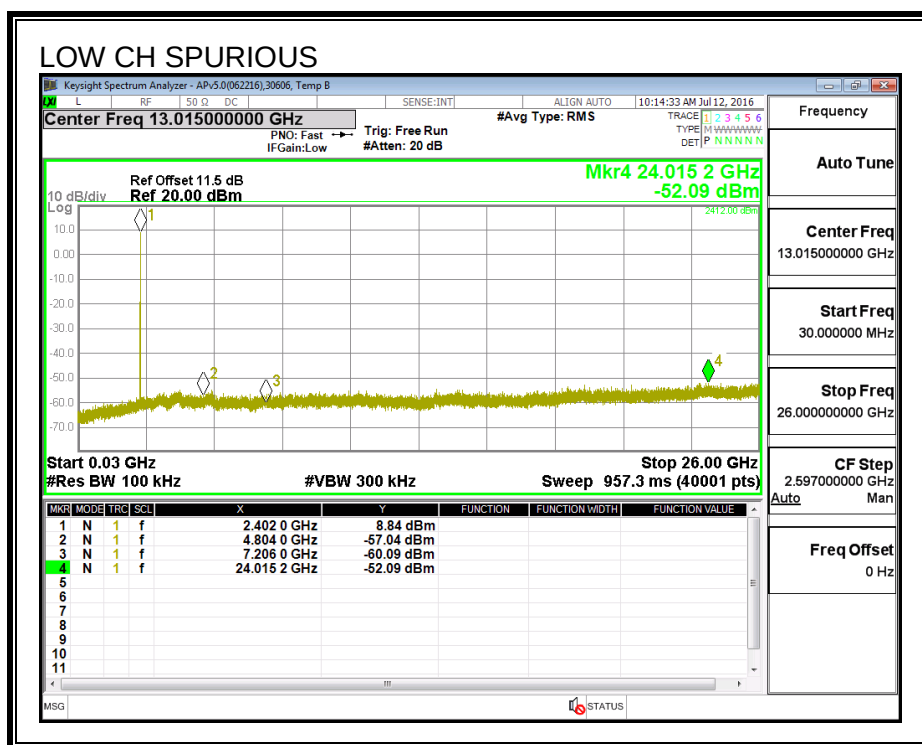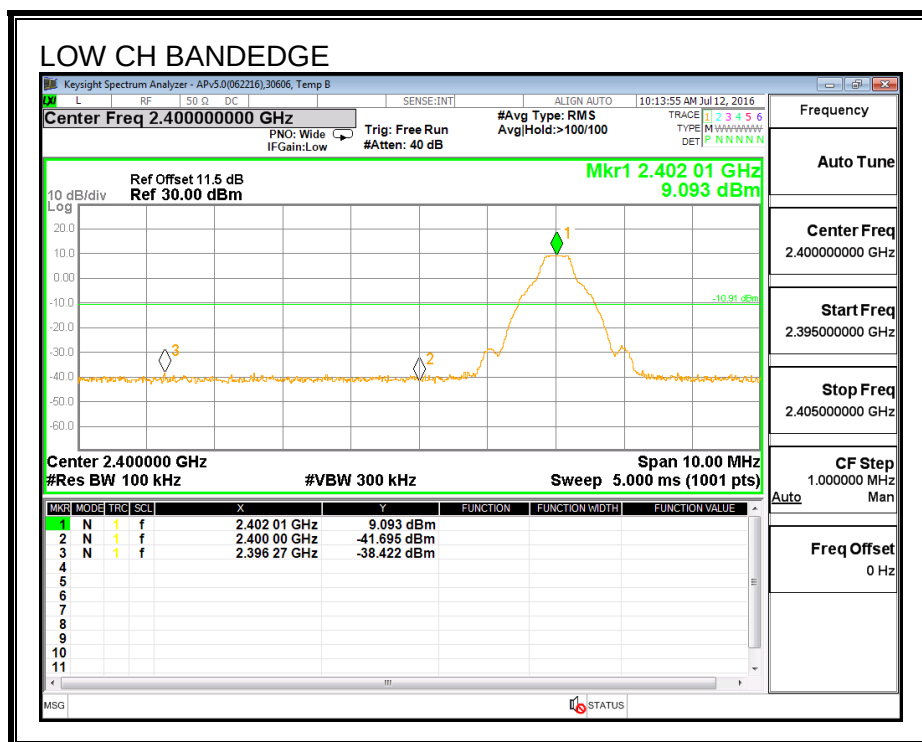

# SPURIOUS EMISSIONS, MID CHANNEL

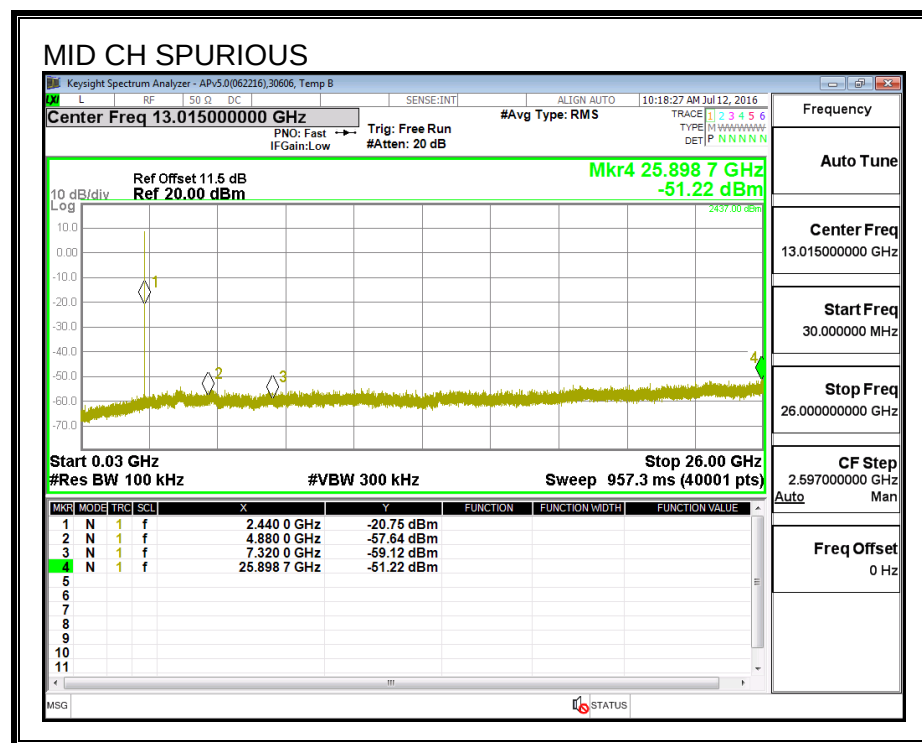
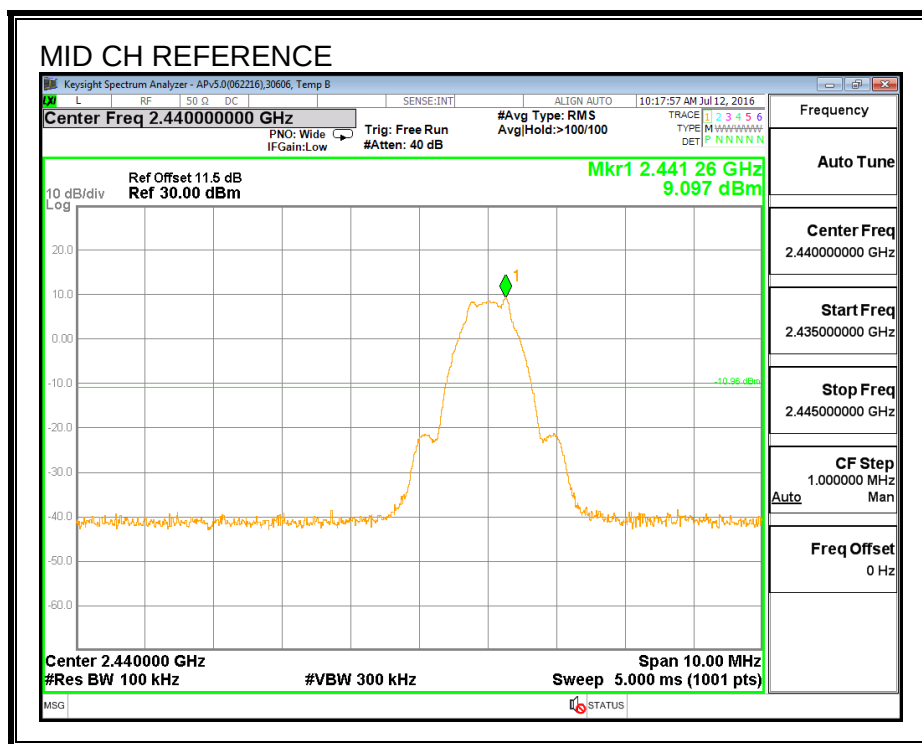


# SPURIOUS EMISSIONS, HIGH CHANNEL

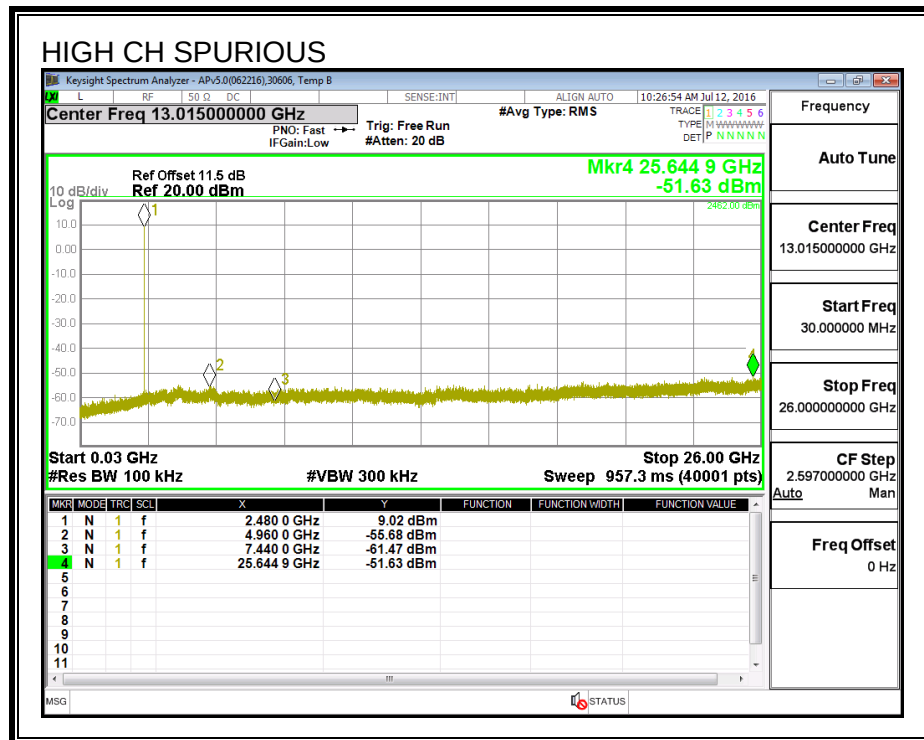
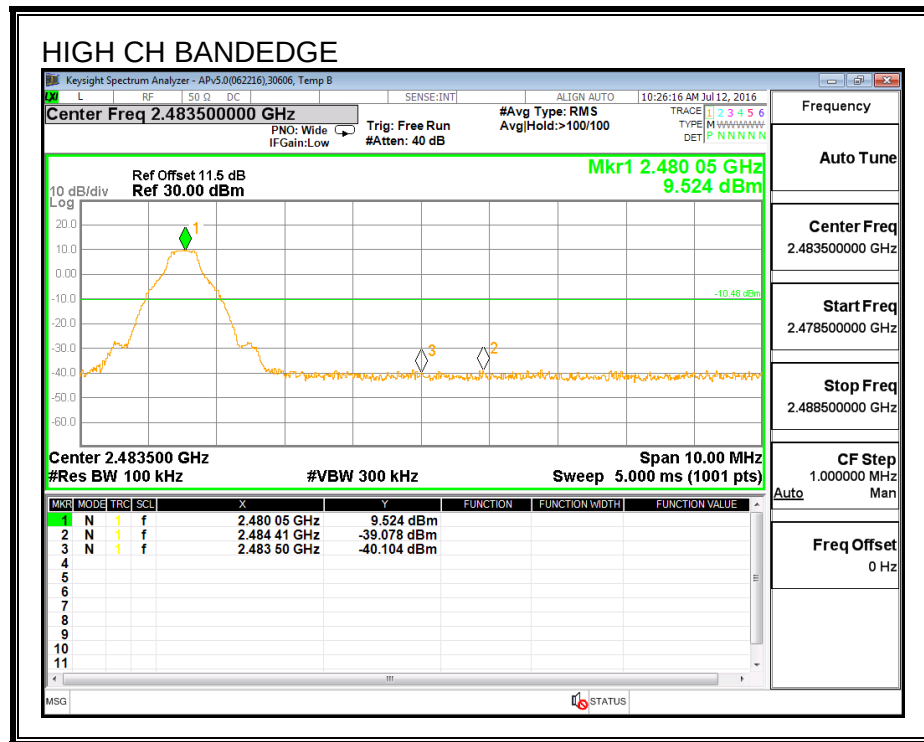


## HIGH POWER



### SPURIOUS EMISSIONS, LOW CHANNEL

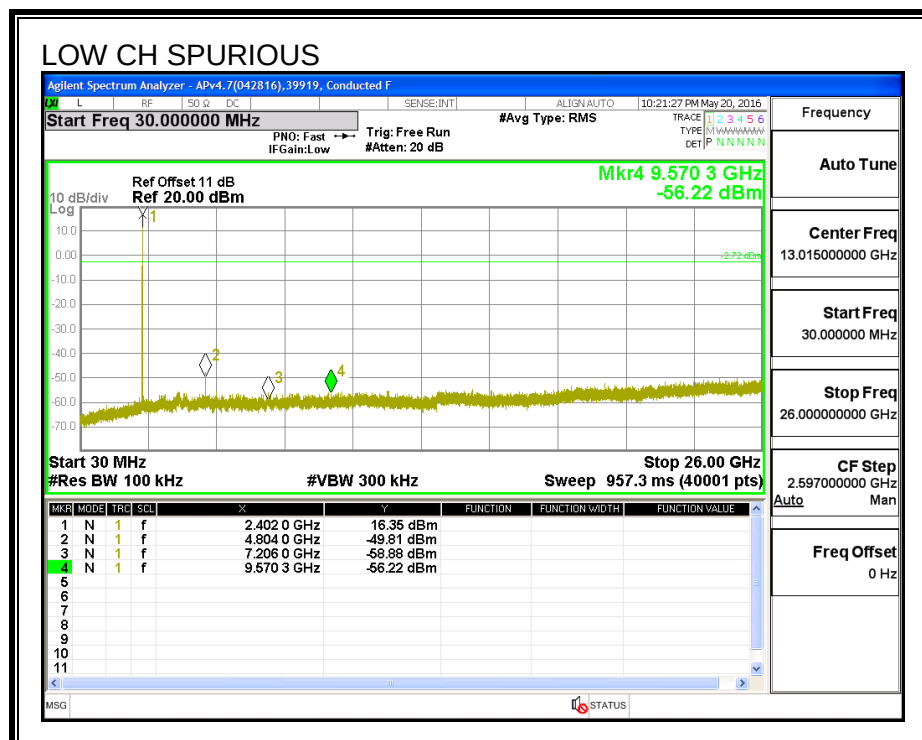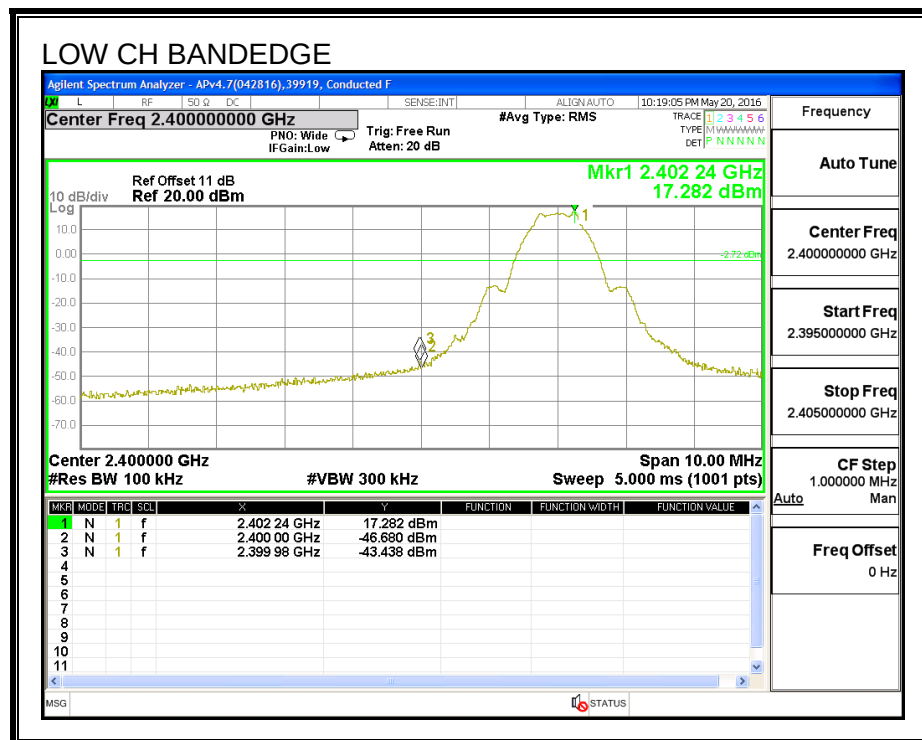

## SPURIOUS EMISSIONS, MID CHANNEL

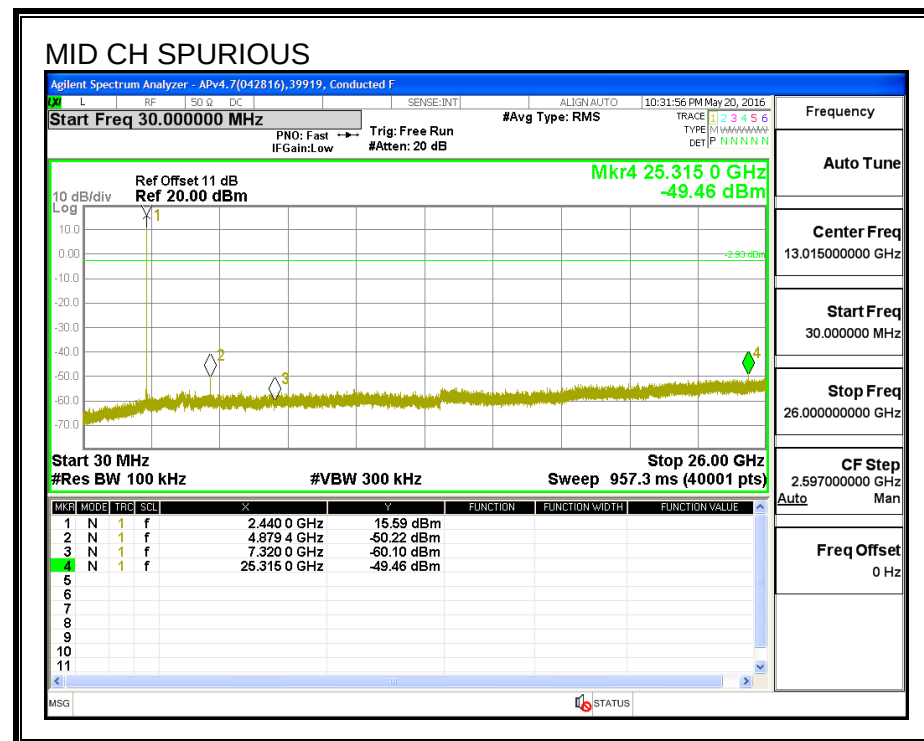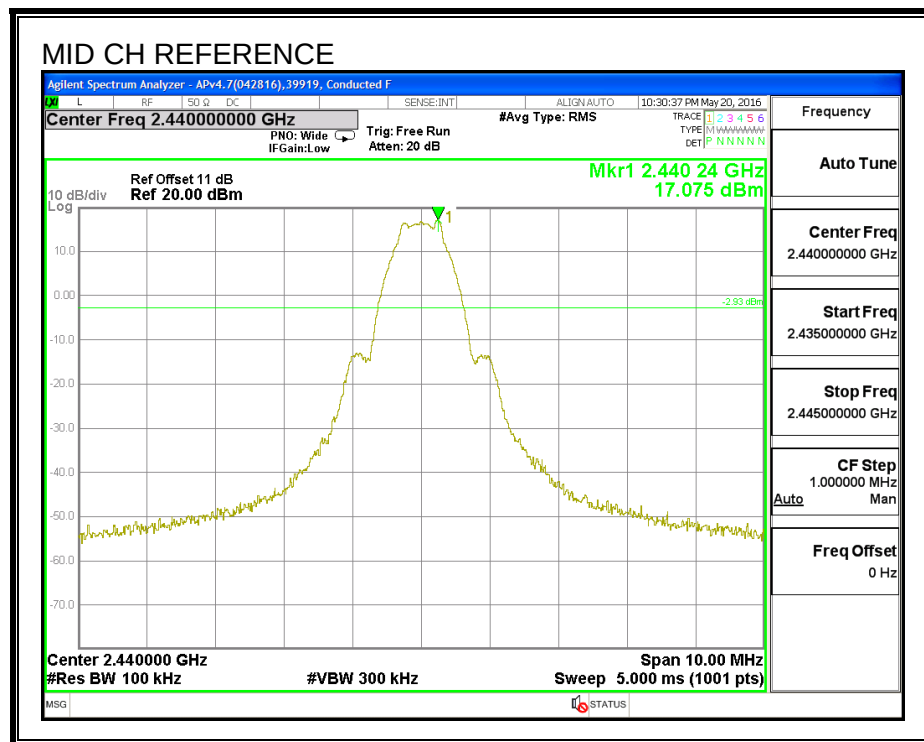

# **SPURIOUS EMISSIONS, HIGH CHANNEL**

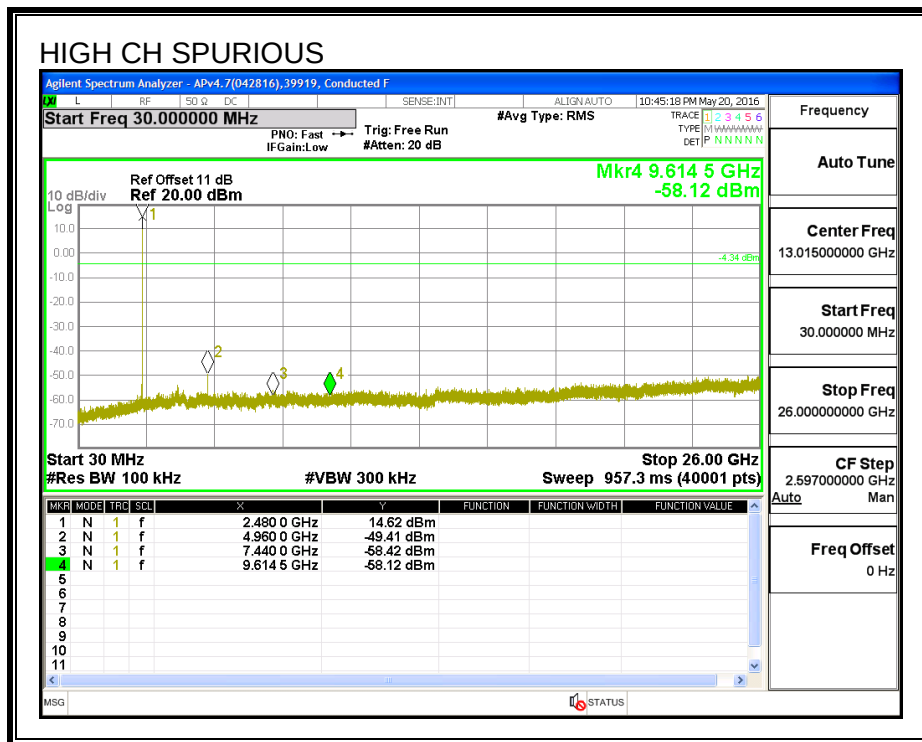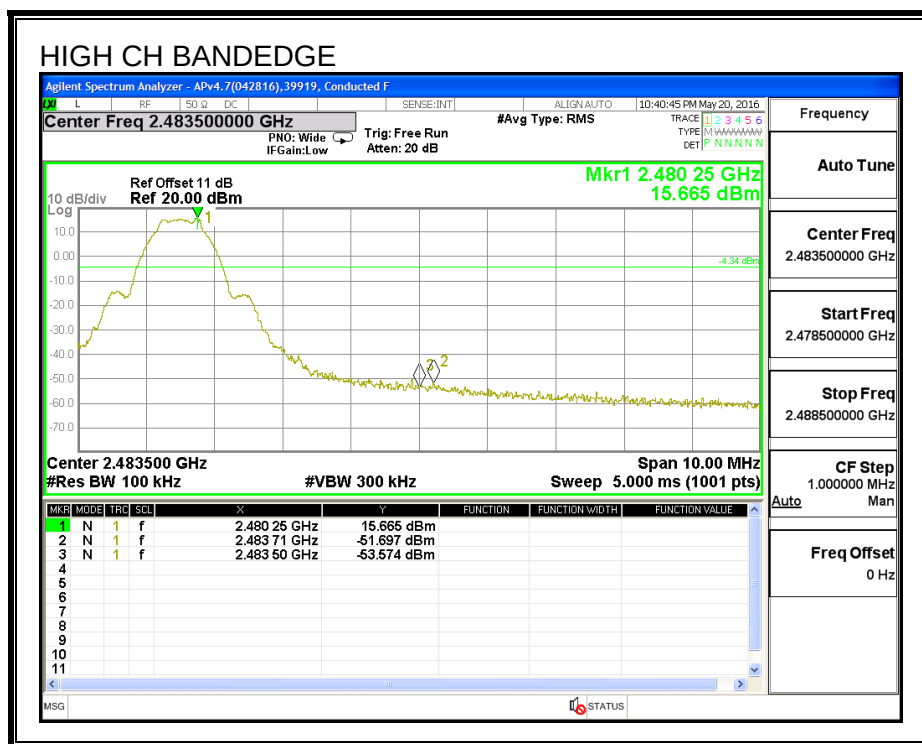



## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-GEN, Section 8.9 and 8.10.

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. LOW POWER

#### RESTRICTED BANDEDGE

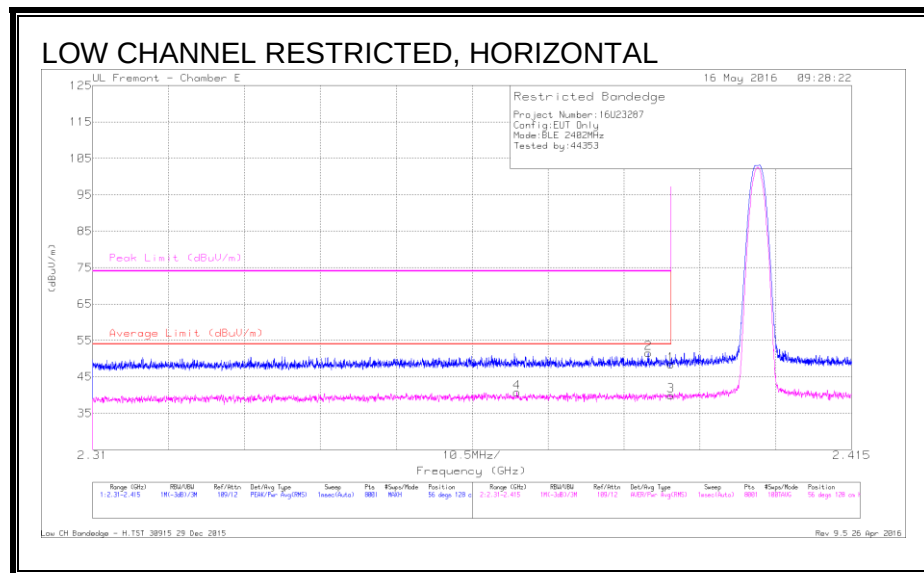

#### DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cb/Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|---------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 4      | * 2.369         | 28.81                | RMS | 31.9           | -20                 | 40.71                      | 54                     | -13.29      | -                   | -              | 56             | 128         | H        |
| 2      | * 2.387         | 39.3                 | Pk  | 32.1           | -19.9               | 51.5                       | -                      | -           | 74                  | -22.5          | 56             | 128         | H        |
| 1      | * 2.39          | 36.27                | Pk  | 32.1           | -19.9               | 48.47                      | -                      | -           | 74                  | -25.53         | 56             | 128         | H        |
| 3      | * 2.39          | 27.61                | RMS | 32.1           | -19.9               | 39.81                      | 54                     | -14.19      | -                   | -              | 56             | 128         | H        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

Low CH Bandedge - H.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016

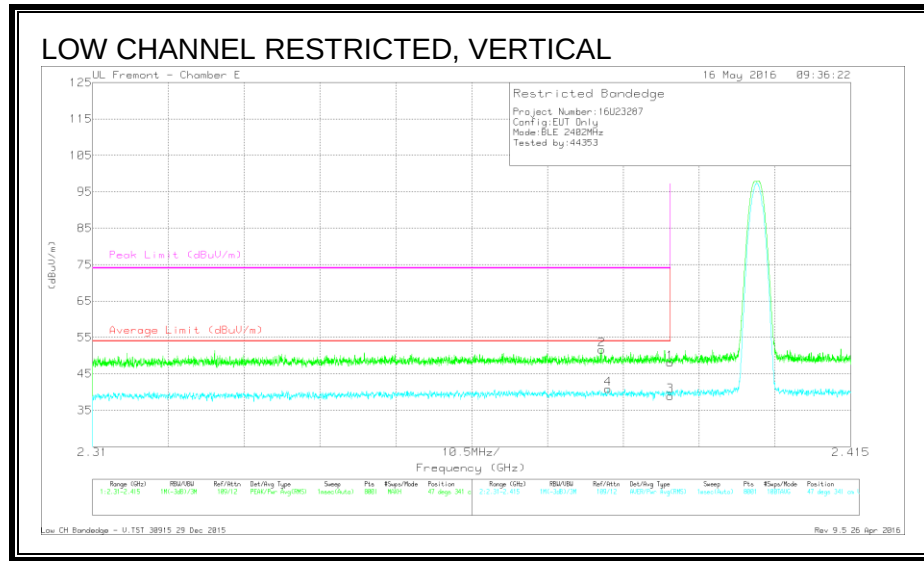

## DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cbl/Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.381         | 39.55                | Pk  | 32             | -19.9                 | 51.65                      | -                      | -           | 74                  | -22.35         | 47             | 341         | V        |
| 4      | * 2.381         | 28.71                | RMS | 32             | -19.9                 | 40.81                      | 54                     | -13.19      | -                   | -              | 47             | 341         | V        |
| 1      | * 2.39          | 35.87                | Pk  | 32.1           | -19.9                 | 48.07                      | -                      | -           | 74                  | -25.93         | 47             | 341         | V        |
| 3      | * 2.39          | 26.73                | RMS | 32.1           | -19.9                 | 38.93                      | 54                     | -15.07      | -                   | -              | 47             | 341         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

Low CH Bandedge - V.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016

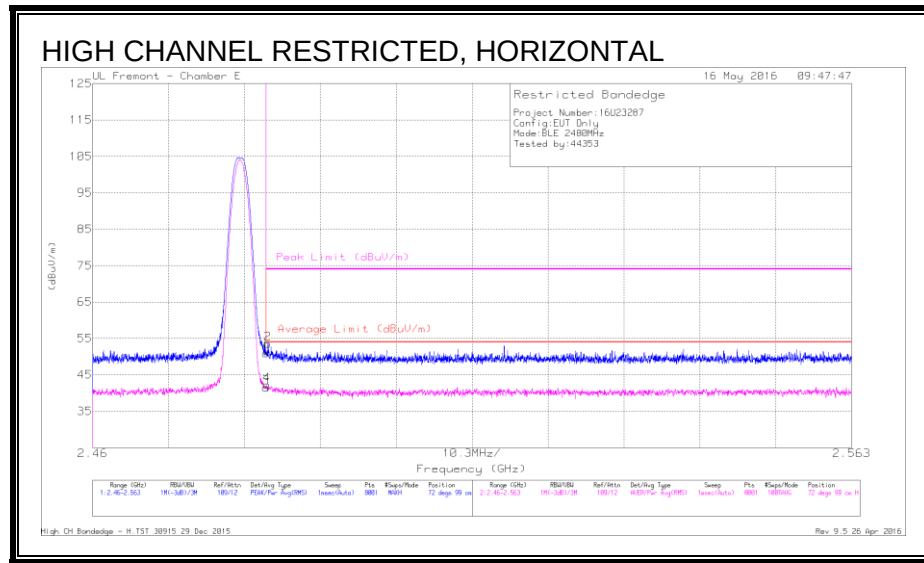

## DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cbl/Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 38.66                | Pk  | 32.3           | -20                  | 50.96                      | -                      | -           | 74                  | -23.04         | 72             | 99          | H        |
| 2      | * 2.484         | 41.25                | Pk  | 32.3           | -20                  | 53.55                      | -                      | -           | 74                  | -20.45         | 72             | 99          | H        |
| 3      | * 2.484         | 29.13                | RMS | 32.3           | -20                  | 41.43                      | 54                     | -12.57      | -                   | -              | 72             | 99          | H        |
| 4      | * 2.484         | 29.89                | RMS | 32.3           | -20                  | 42.19                      | 54                     | -11.81      | -                   | -              | 72             | 99          | H        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

High CH Bandedge - H.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016

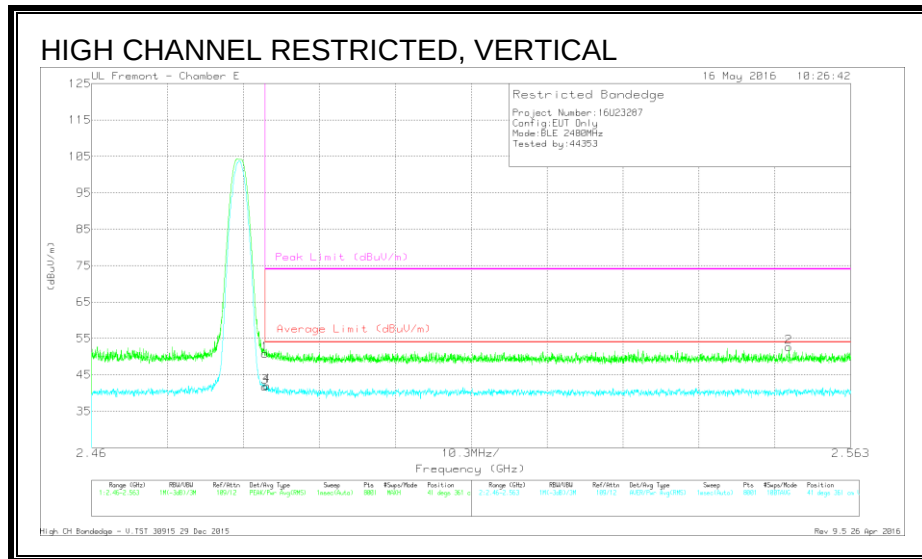

## DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cb/Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 38.49                | Pk  | 32.3           | -20                  | 50.79                      | -                      | -           | 74                  | -23.21         | 41             | 361         | V        |
| 3      | * 2.484         | 29.38                | RMS | 32.3           | -20                  | 41.68                      | 54                     | -12.32      | -                   | -              | 41             | 361         | V        |
| 4      | * 2.484         | 29.62                | RMS | 32.3           | -20                  | 41.92                      | 54                     | -12.08      | -                   | -              | 41             | 361         | V        |
| 2      | 2.555           | 40.41                | Pk  | 32.4           | -20.2                | 52.61                      | -                      | -           | 74                  | -21.39         | 41             | 361         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



Pk - Peak detector

RMS - RMS detection

High CH Bandedge - V.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016

## 8.2.2. HARMONICS AND SPURIOUS EMISSIONS

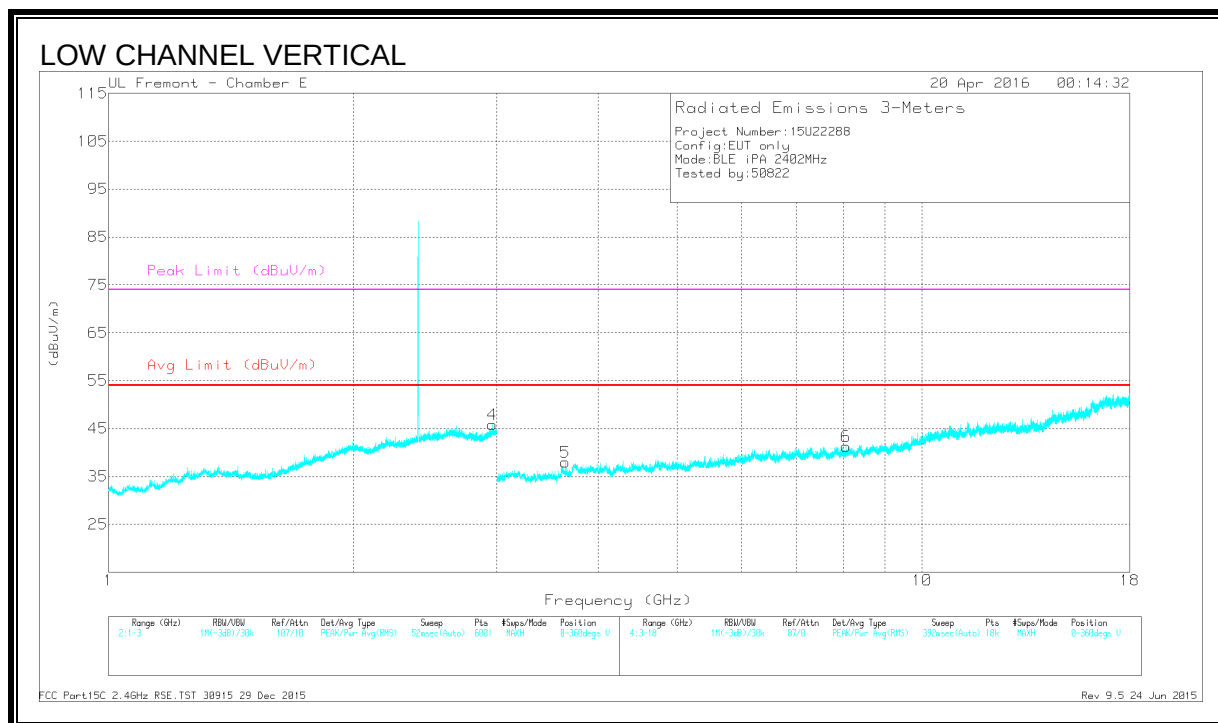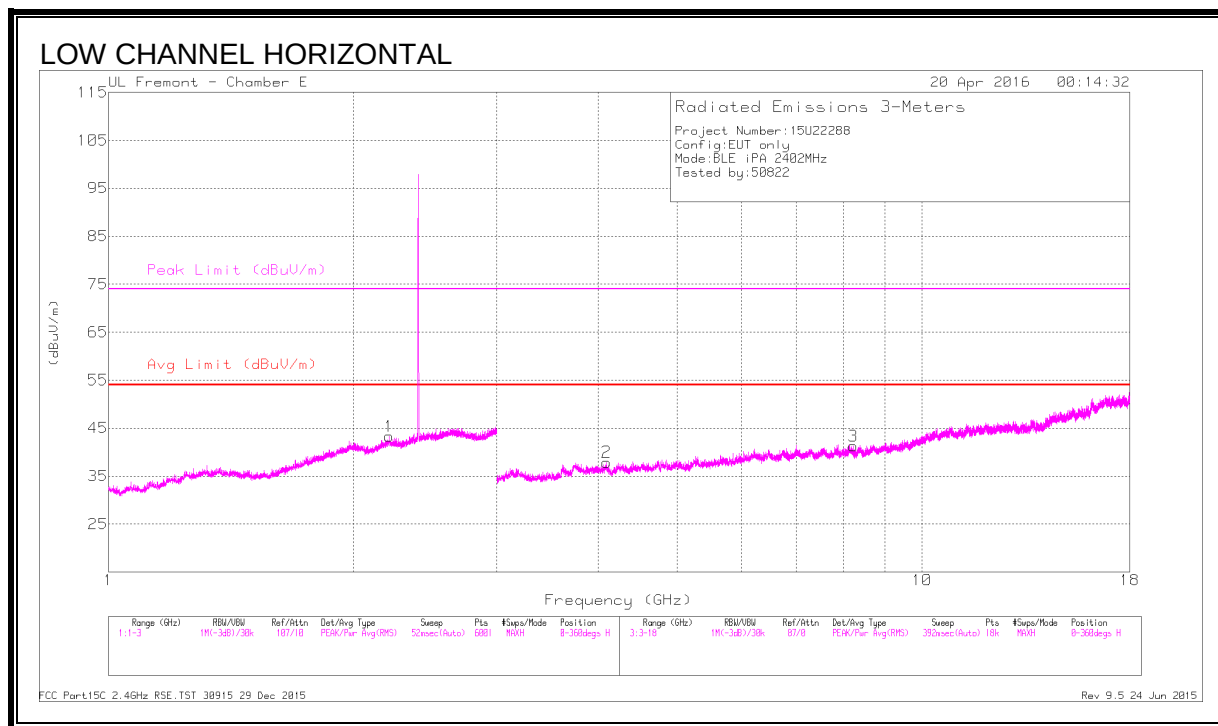



**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.212         | 37.92                | PK2  | 31.8           | -20                    | 49.72                      | -                  | -           | 74                  | -24.28         | 271            | 173         | H        |
|        | * 2.212         | 25.5                 | MAv1 | 31.8           | -20                    | 37.3                       | 54                 | -16.7       | -                   | -              | 271            | 173         | H        |
| 2      | * 4.096         | 41.53                | PK2  | 33.4           | -30.8                  | 44.13                      | -                  | -           | 74                  | -29.87         | 163            | 236         | H        |
|        | * 4.094         | 29.82                | MAv1 | 33.4           | -30.8                  | 32.42                      | 54                 | -21.58      | -                   | -              | 163            | 236         | H        |
| 3      | * 8.234         | 39.67                | PK2  | 35.8           | -27                    | 48.47                      | -                  | -           | 74                  | -25.53         | 238            | 151         | H        |
|        | * 8.235         | 27.04                | MAv1 | 35.8           | -27                    | 35.84                      | 54                 | -18.16      | -                   | -              | 238            | 151         | H        |
| 5      | * 3.643         | 41.99                | PK2  | 33.1           | -30.4                  | 44.69                      | -                  | -           | 74                  | -29.31         | 162            | 156         | V        |
|        | * 3.644         | 29.84                | MAv1 | 33.1           | -30.4                  | 32.54                      | 54                 | -21.46      | -                   | -              | 162            | 156         | V        |
| 6      | * 8.067         | 38.28                | PK2  | 35.7           | -26.7                  | 47.28                      | -                  | -           | 74                  | -26.72         | 190            | 204         | V        |
|        | * 8.068         | 26.96                | MAv1 | 35.7           | -26.7                  | 35.96                      | 54                 | -18.04      | -                   | -              | 190            | 204         | V        |
| 4      | 2.963           | 38.01                | PK2  | 32.3           | -19.3                  | 51.01                      | -                  | -           | -                   | -              | 332            | 171         | V        |
|        | 2.964           | 26.29                | MAv1 | 32.3           | -19.3                  | 39.29                      | -                  | -           | -                   | -              | 332            | 171         | V        |

\* Indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

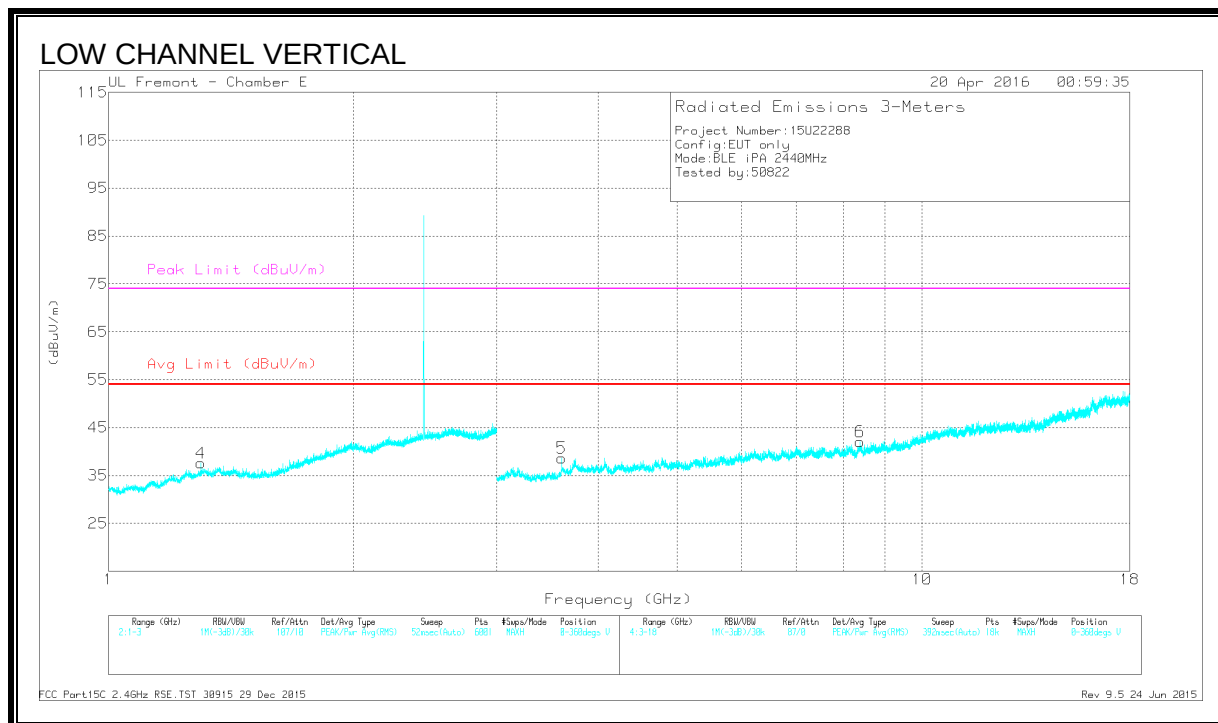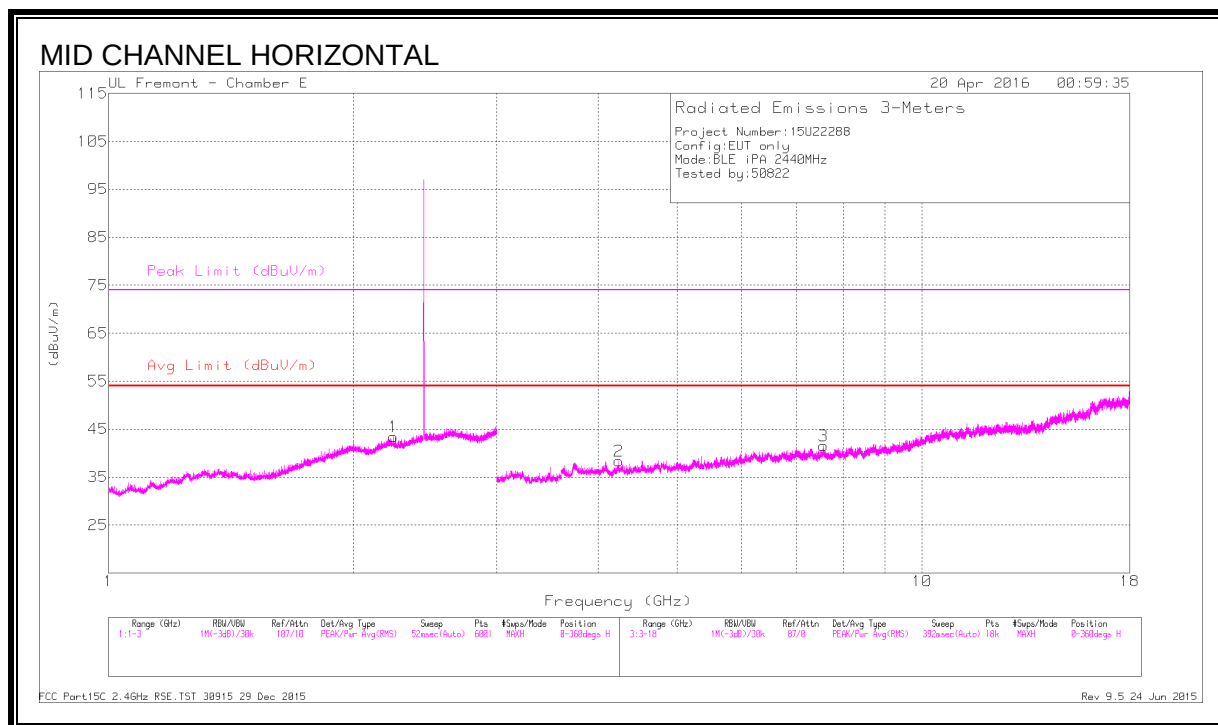





**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.24          | 37.3                 | PK2  | 31.7           | -20                    | 49                         | -                  | -           | 74                  | -25            | 85             | 243         | H        |
|        | * 2.24          | 25.45                | MAv1 | 31.7           | -20                    | 37.15                      | 54                 | -16.85      | -                   | -              | 85             | 243         | H        |
| 4      | * 1.297         | 36.71                | PK2  | 29.3           | -22.6                  | 43.41                      | -                  | -           | 74                  | -30.59         | 60             | 252         | V        |
|        | * 1.3           | 24.76                | MAv1 | 29.3           | -22.5                  | 31.56                      | 54                 | -22.44      | -                   | -              | 60             | 252         | V        |
| 2      | * 4.239         | 41.56                | PK2  | 33.3           | -29                    | 45.86                      | -                  | -           | 74                  | -28.14         | 311            | 264         | H        |
|        | * 4.239         | 28.76                | MAv1 | 33.3           | -29                    | 33.06                      | 54                 | -20.94      | -                   | -              | 311            | 264         | H        |
| 3      | * 7.566         | 38.24                | PK2  | 35.6           | -25.8                  | 48.04                      | -                  | -           | 74                  | -25.96         | 6              | 260         | H        |
|        | * 7.567         | 26.25                | MAv1 | 35.6           | -25.7                  | 36.15                      | 54                 | -17.85      | -                   | -              | 6              | 260         | H        |
| 5      | * 3.606         | 42.14                | PK2  | 33             | -30.6                  | 44.54                      | -                  | -           | 74                  | -29.46         | 59             | 387         | V        |
|        | * 3.607         | 30.26                | MAv1 | 33             | -30.5                  | 32.76                      | 54                 | -21.24      | -                   | -              | 59             | 387         | V        |
| 6      | * 8.389         | 38.96                | PK2  | 35.7           | -25.5                  | 49.16                      | -                  | -           | 74                  | -24.84         | 224            | 246         | V        |
|        | * 8.391         | 26.79                | MAv1 | 35.7           | -25.4                  | 37.09                      | 54                 | -16.91      | -                   | -              | 224            | 246         | V        |

\* Indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

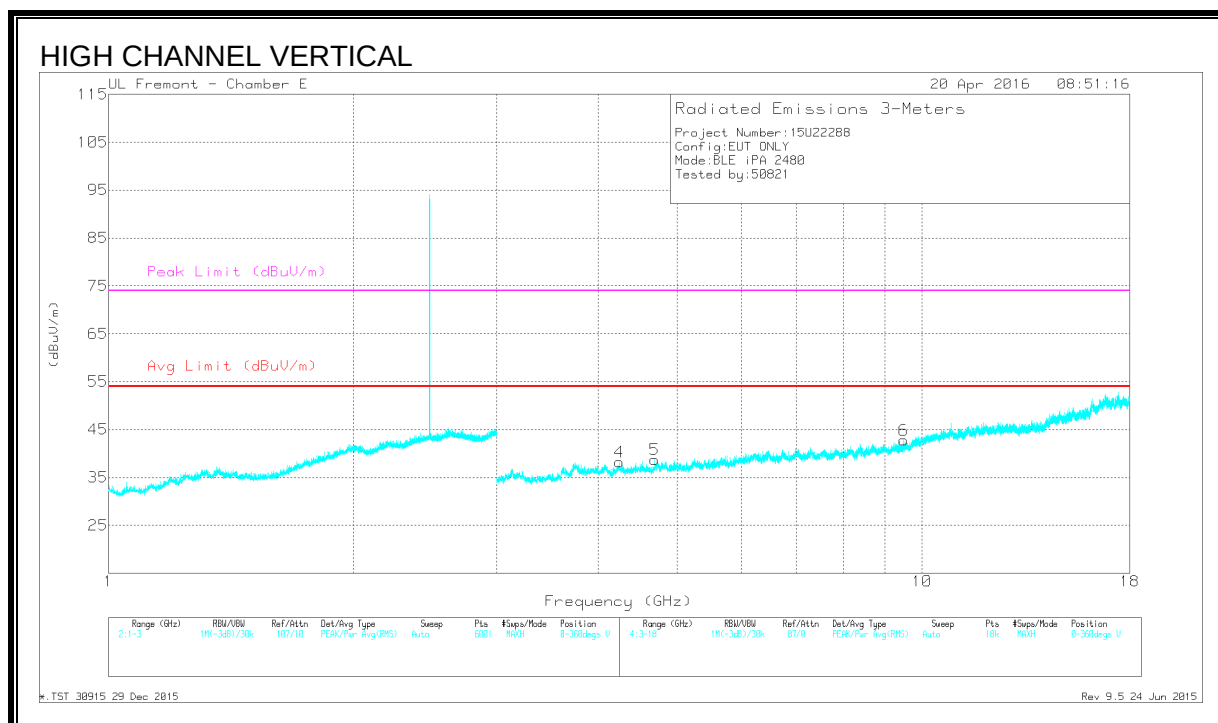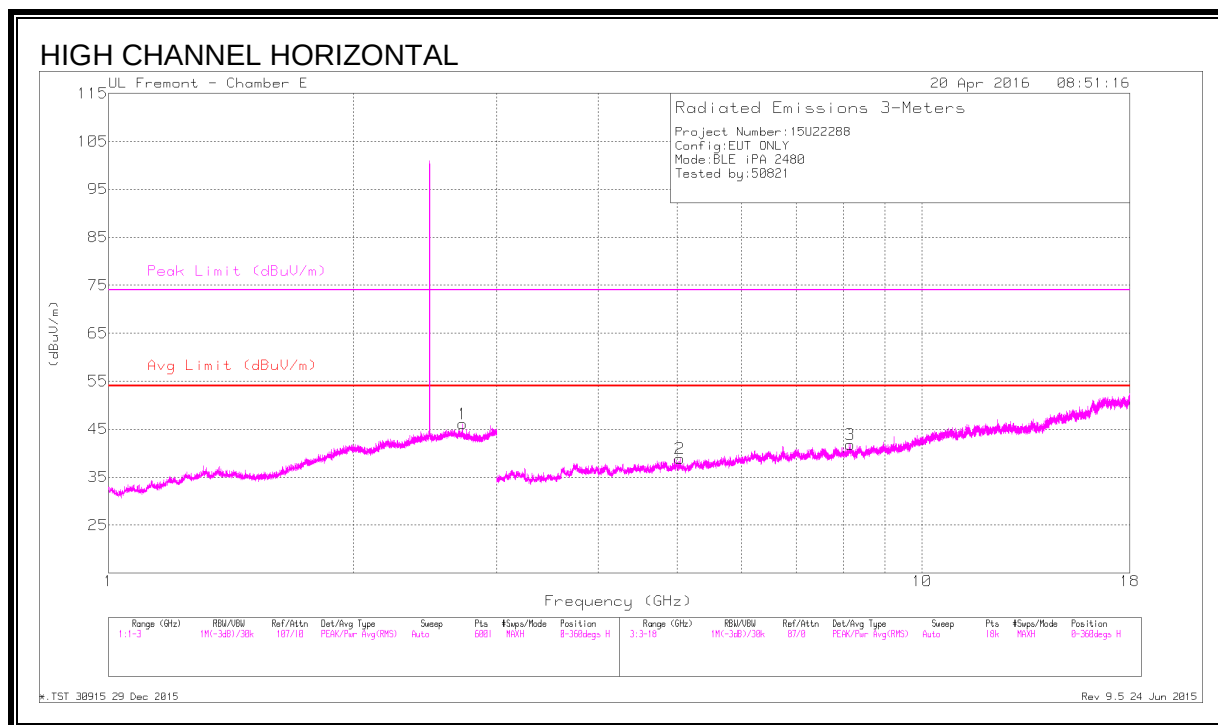

**DATA**


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.721         | 38.21                | PK2  | 32.6           | -19.7                  | 51.11                      | -                  | -           | 74                  | -22.89         | 211            | 232         | H        |
|        | * 2.723         | 24.97                | MAv1 | 32.5           | -19.7                  | 37.77                      | 54                 | -16.23      | -                   | -              | 211            | 232         | H        |
| 2      | * 5.039         | 41.57                | PK2  | 34             | -29.8                  | 45.77                      | -                  | -           | 74                  | -28.23         | 167            | 152         | H        |
|        | * 5.039         | 28.71                | MAv1 | 34             | -29.8                  | 32.91                      | 54                 | -21.09      | -                   | -              | 167            | 152         | H        |
| 3      | * 8.153         | 38.14                | PK2  | 35.7           | -25.6                  | 48.24                      | -                  | -           | 74                  | -25.76         | 0              | 101         | H        |
|        | * 8.154         | 25.28                | MAv1 | 35.7           | -25.7                  | 35.28                      | 54                 | -18.72      | -                   | -              | 0              | 101         | H        |
| 4      | * 4.243         | 40.84                | PK2  | 33.3           | -29                    | 45.14                      | -                  | -           | 74                  | -28.86         | 360            | 319         | V        |
|        | * 4.247         | 27.45                | MAv1 | 33.3           | -29                    | 31.75                      | 54                 | -22.25      | -                   | -              | 360            | 319         | V        |
| 5      | * 4.692         | 41.52                | PK2  | 34             | -29.7                  | 45.82                      | -                  | -           | 74                  | -28.18         | 324            | 107         | V        |
|        | * 4.69          | 28.59                | MAv1 | 34             | -29.7                  | 32.89                      | 54                 | -21.11      | -                   | -              | 324            | 107         | V        |
| 6      | * 9.485         | 37.49                | PK2  | 36.4           | -25                    | 48.89                      | -                  | -           | 74                  | -25.11         | 37             | 226         | V        |
|        | * 9.486         | 24.52                | MAv1 | 36.4           | -25                    | 35.92                      | 54                 | -18.08      | -                   | -              | 37             | 226         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average



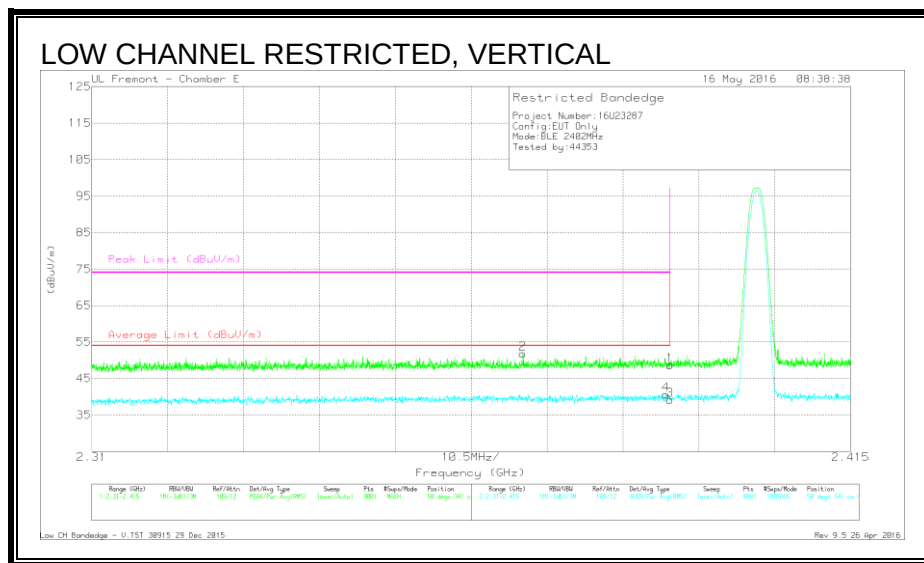

## DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cbl/Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.37          | 39.74                | Pk  | 32             | -20                   | 51.74                      | -                      | -           | 74                  | -22.26         | 50             | 341         | V        |
| 4      | * 2.389         | 28.44                | RMS | 32.1           | -19.9                 | 40.64                      | 54                     | -13.36      | -                   | -              | 50             | 341         | V        |
| 1      | * 2.39          | 36.51                | Pk  | 32.1           | -19.9                 | 48.71                      | -                      | -           | 74                  | -25.29         | 50             | 341         | V        |
| 3      | * 2.39          | 26.92                | RMS | 32.1           | -19.9                 | 39.12                      | 54                     | -14.88      | -                   | -              | 50             | 341         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


Low CH Bandedge - V.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cbl/Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 38.18                | Pk  | 32.3           | -20                   | 50.48                      | -                      | -           | 74                  | -23.52         | 76             | 99          | H        |
| 3      | * 2.484         | 28.99                | RMS | 32.3           | -20                   | 41.29                      | 54                     | -12.71      | -                   | -              | 76             | 99          | H        |
| 4      | * 2.484         | 29.66                | RMS | 32.3           | -20                   | 41.96                      | 54                     | -12.04      | -                   | -              | 76             | 99          | H        |
| 2      | 2.558           | 40.03                | Pk  | 32.4           | -20.1                 | 52.33                      | -                      | -           | 74                  | -21.67         | 76             | 99          | H        |

Rev 9.5 26 Apr 2016

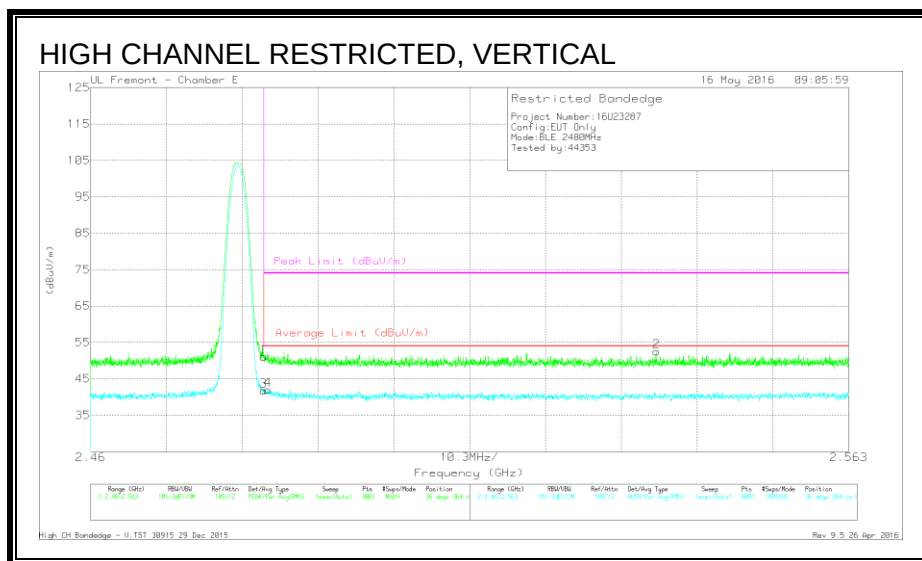

## DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T711 (dB/m) | Amp/Cbl/Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 38.76                | Pk  | 32.3           | -20                   | 51.06                      | -                      | -           | 74                  | -22.94         | 36             | 364         | V        |
| 3      | * 2.484         | 29.41                | RMS | 32.3           | -20                   | 41.71                      | 54                     | -12.29      | -                   | -              | 36             | 364         | V        |
| 4      | * 2.484         | 29.63                | RMS | 32.3           | -20                   | 41.93                      | 54                     | -12.07      | -                   | -              | 36             | 364         | V        |
| 2      | 2.537           | 40.28                | Pk  | 32.4           | -20.2                 | 52.48                      | -                      | -           | 74                  | -21.52         | 36             | 364         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



Pk - Peak detector

RMS - RMS detection

High CH Bandedge - V.TST 30915 29 Dec 2015

Rev 9.5 26 Apr 2016

## 8.2.4. HARMONICS AND SPURIOUS EMISSIONS

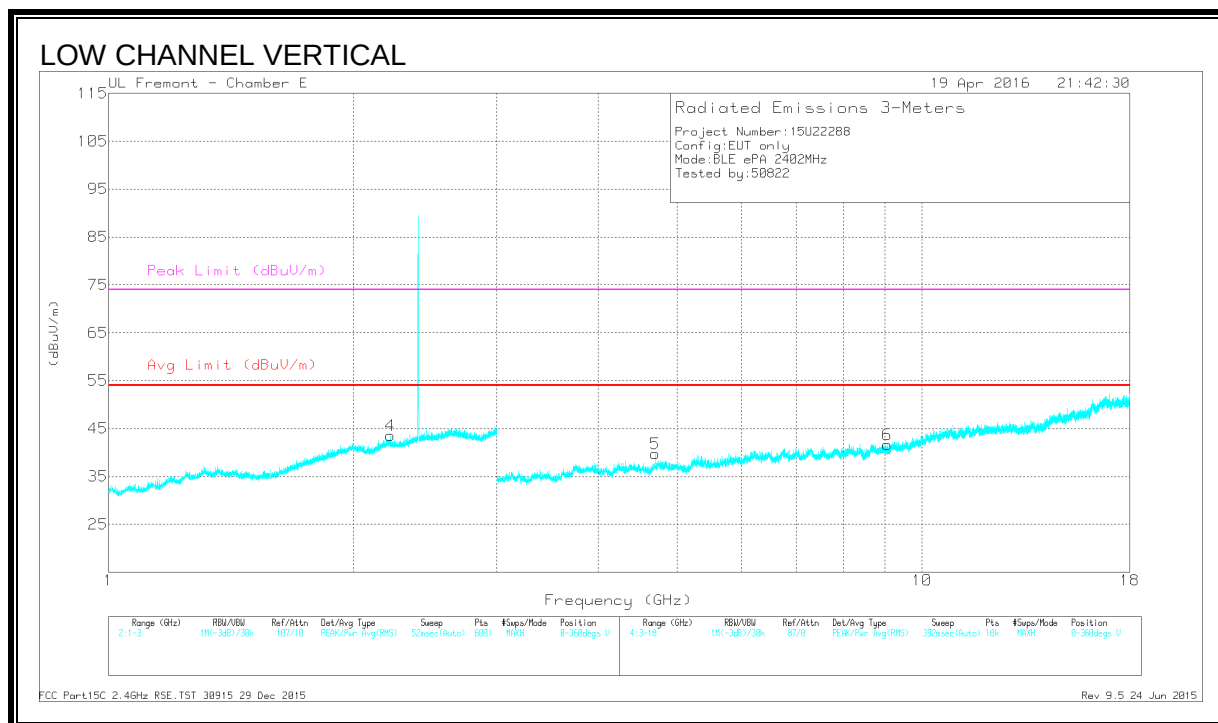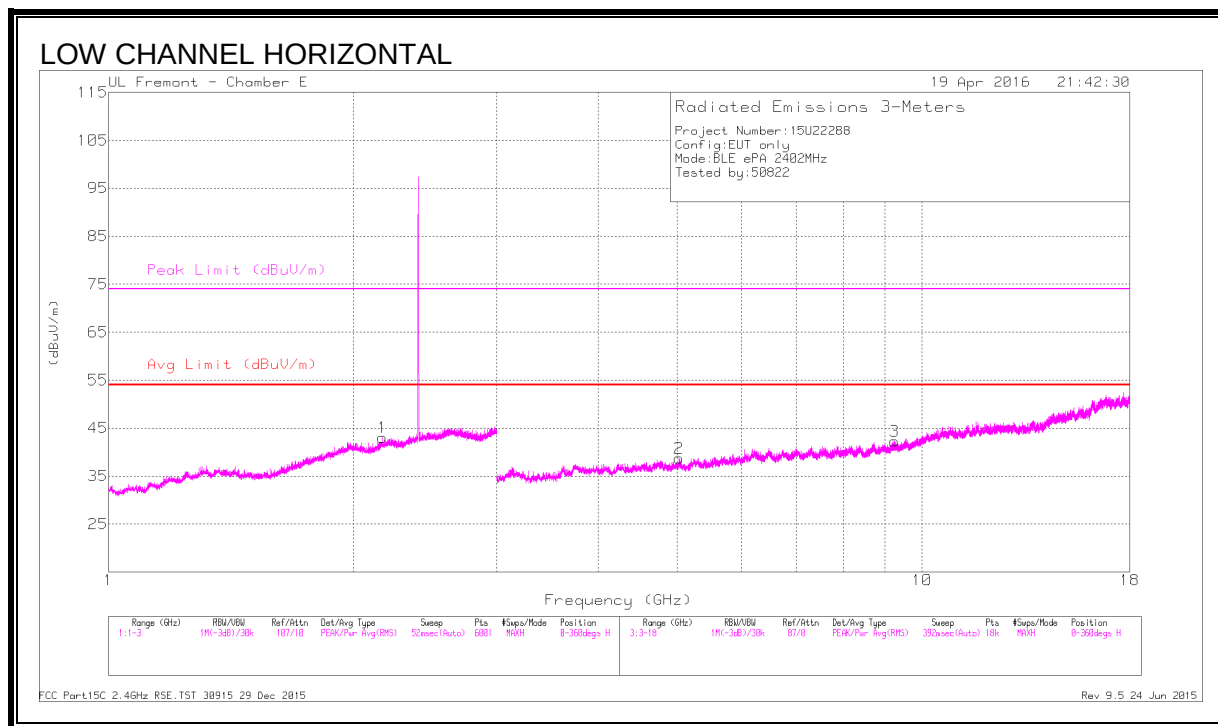





**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 4      | * 2.22          | 38.36                | PK2  | 31.8           | -20                    | 50.16                      | -                  | -           | 74                  | -23.84         | 129            | 119         | V        |
|        | * 2.22          | 25.53                | MAv1 | 31.8           | -20                    | 37.33                      | 54                 | -16.67      | -                   | -              | 129            | 119         | V        |
| 2      | * 5.028         | 41.33                | PK2  | 34             | -30                    | 45.33                      | -                  | -           | 74                  | -28.67         | 220            | 208         | H        |
|        | * 5.027         | 29.65                | MAv1 | 34             | -30                    | 33.65                      | 54                 | -20.35      | -                   | -              | 220            | 208         | H        |
| 5      | * 4.698         | 41.37                | PK2  | 34             | -29.6                  | 45.77                      | -                  | -           | 74                  | -28.23         | 194            | 144         | V        |
|        | * 4.699         | 29.86                | MAv1 | 34             | -29.6                  | 34.26                      | 54                 | -19.74      | -                   | -              | 194            | 144         | V        |
| 6      | * 9.066         | 37.09                | PK2  | 36.1           | -25.8                  | 47.39                      | -                  | -           | 74                  | -26.61         | 34             | 291         | V        |
|        | * 9.068         | 25.93                | MAv1 | 36.1           | -25.8                  | 36.23                      | 54                 | -17.77      | -                   | -              | 34             | 291         | V        |
| 1      | 2.172           | 37.47                | PK2  | 31.6           | -20.1                  | 48.97                      | -                  | -           | -                   | -              | 214            | 328         | H        |
|        | 2.172           | 25.63                | MAv1 | 31.6           | -20.1                  | 37.13                      | -                  | -           | -                   | -              | 214            | 328         | H        |
| 3      | 9.245           | 37.73                | PK2  | 36.2           | -25                    | 48.93                      | -                  | -           | -                   | -              | 269            | 393         | H        |
|        | 9.245           | 25.7                 | MAv1 | 36.2           | -25                    | 36.9                       | -                  | -           | -                   | -              | 269            | 393         | H        |

\* Indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

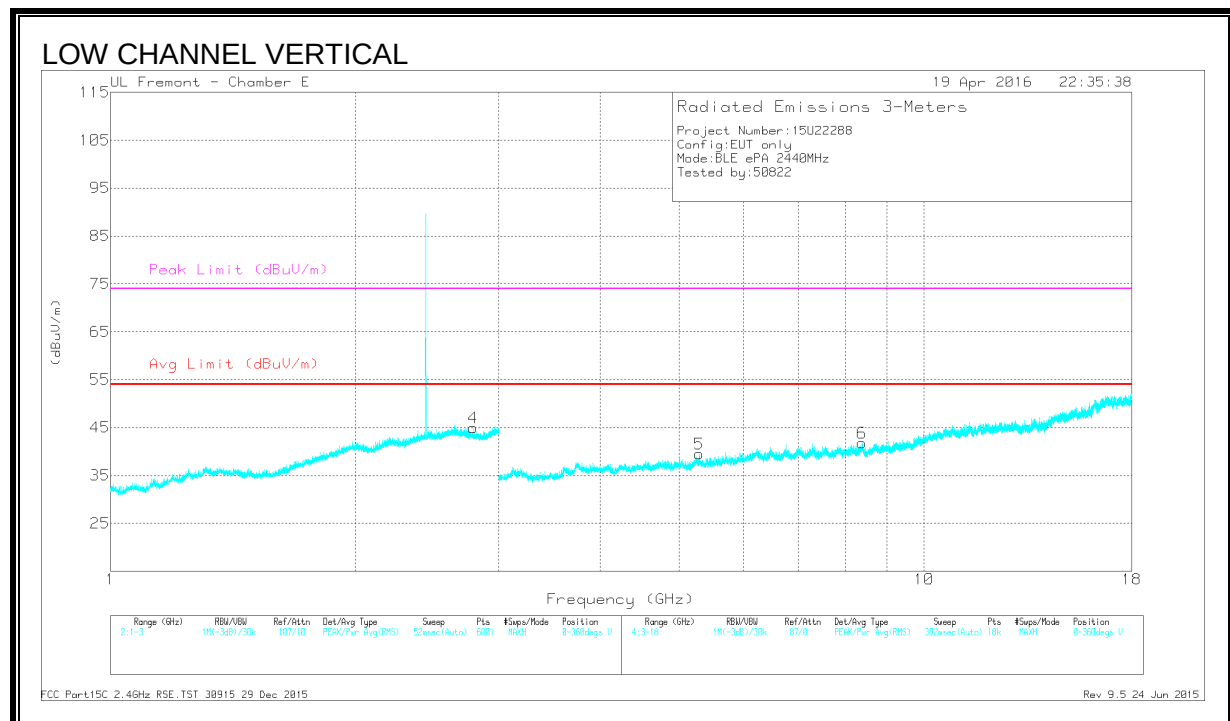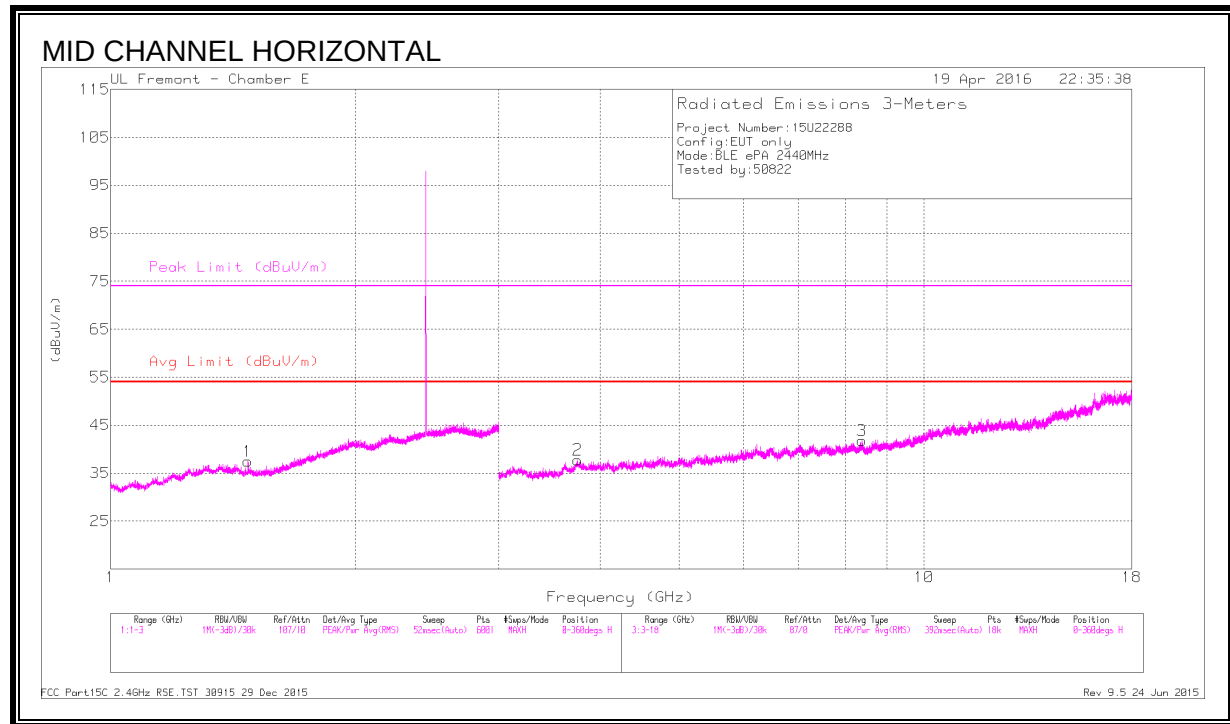



**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.474         | 36.73                | PK2  | 28.1           | -21.6                  | 43.23                      | -                  | -           | 74                  | -30.77         | 127            | 234         | H        |
|        | * 1.477         | 24.61                | MAv1 | 28             | -21.5                  | 31.11                      | 54                 | -22.89      | -                   | -              | 127            | 234         | H        |
| 4      | * 2.794         | 38.25                | PK2  | 32.4           | -20.1                  | 50.55                      | -                  | -           | 74                  | -23.45         | 277            | 147         | V        |
|        | * 2.792         | 26.19                | MAv1 | 32.4           | -20                    | 38.59                      | 54                 | -15.41      | -                   | -              | 277            | 147         | V        |
| 2      | * 3.751         | 41.53                | PK2  | 33.1           | -30.1                  | 44.53                      | -                  | -           | 74                  | -29.47         | 151            | 367         | H        |
|        | * 3.75          | 29.87                | MAv1 | 33.1           | -30.1                  | 32.87                      | 54                 | -21.13      | -                   | -              | 151            | 367         | H        |
| 3      | * 8.393         | 38.8                 | PK2  | 35.7           | -25.4                  | 49.1                       | -                  | -           | 74                  | -24.9          | 52             | 157         | H        |
|        | * 8.391         | 26.77                | MAv1 | 35.7           | -25.4                  | 37.07                      | 54                 | -16.93      | -                   | -              | 52             | 157         | H        |
| 6      | * 8.392         | 38.11                | PK2  | 35.7           | -25.4                  | 48.41                      | -                  | -           | 74                  | -25.59         | 74             | 299         | V        |
|        | * 8.391         | 26.8                 | MAv1 | 35.7           | -25.4                  | 37.1                       | 54                 | -16.9       | -                   | -              | 74             | 299         | V        |
| 5      | 5.29            | 29.86                | MAv1 | 34.3           | -29.9                  | 34.26                      | -                  | -           | -                   | -              | 96             | 132         | V        |
|        | 5.291           | 41.35                | PK2  | 34.3           | -29.9                  | 45.75                      | -                  | -           | -                   | -              | 96             | 132         | V        |

\* Indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

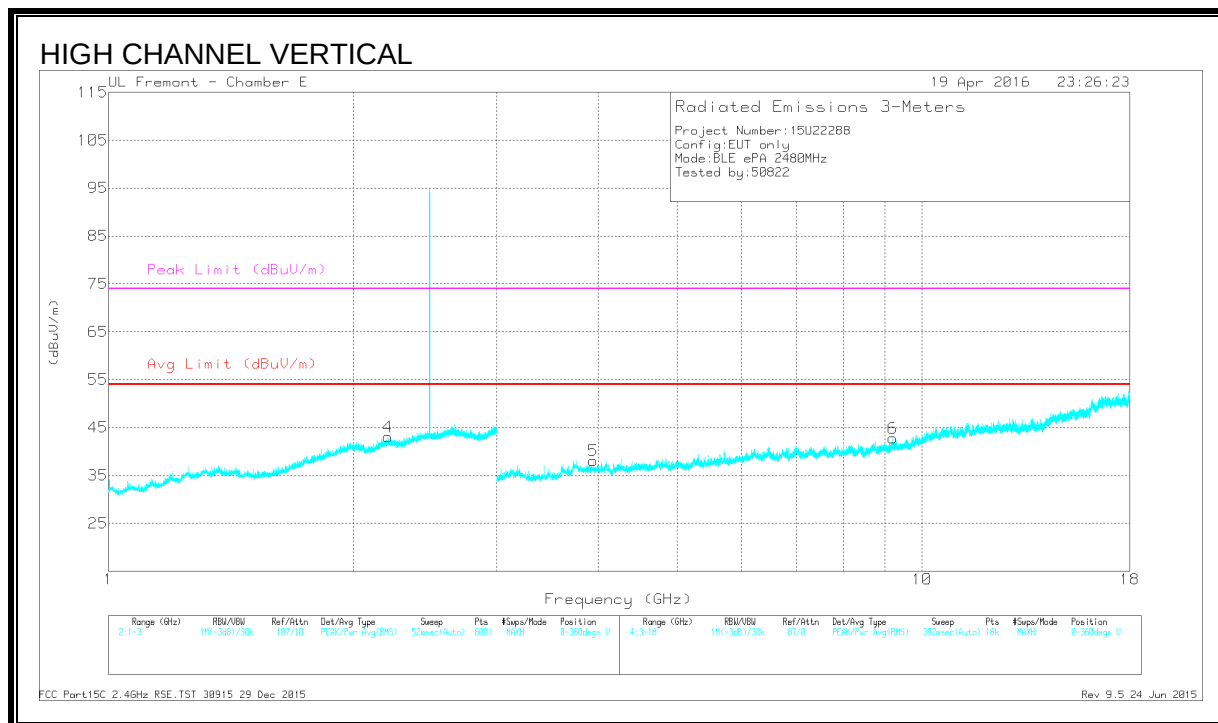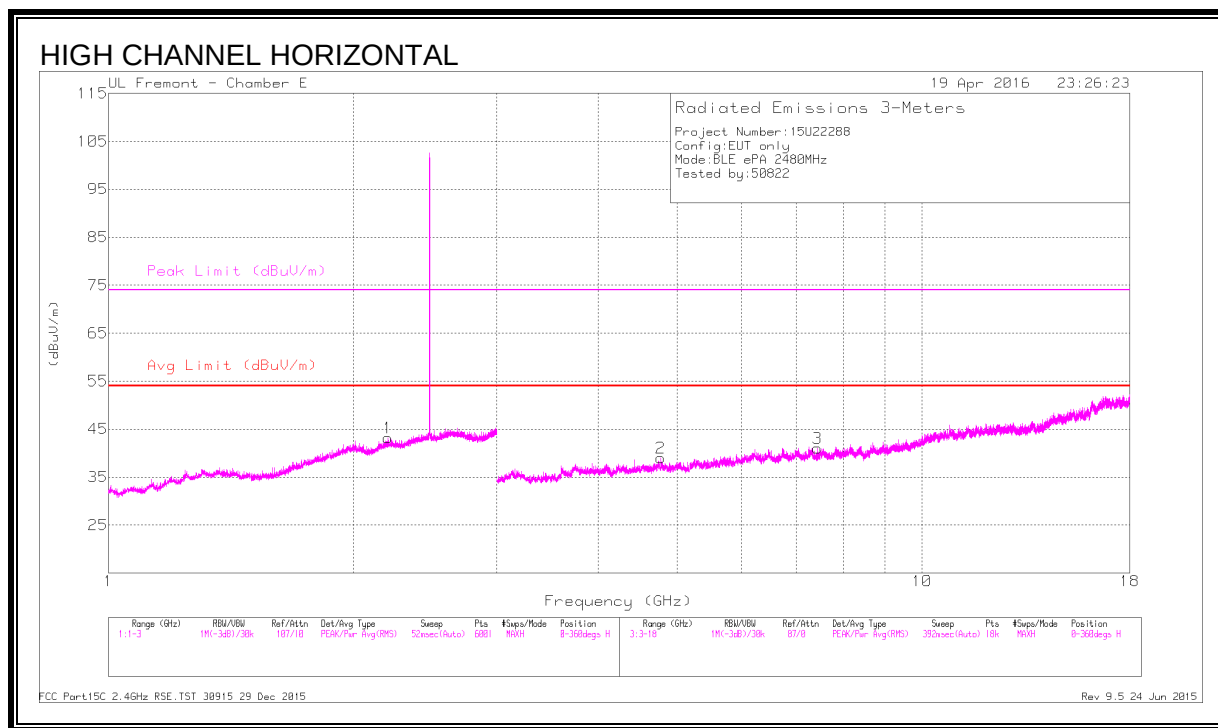

# DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T711 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.205         | 37.97                | PK2  | 31.8           | -20                    | 49.77                      | -                  | -           | 74                  | -24.23         | 161            | 349         | H        |
|        | * 2.206         | 25.51                | MAv1 | 31.8           | -20                    | 37.31                      | 54                 | -16.69      | -                   | -              | 161            | 349         | H        |
| 4      | * 2.204         | 37.54                | PK2  | 31.8           | -20                    | 49.34                      | -                  | -           | 74                  | -24.66         | 164            | 204         | V        |
|        | * 2.203         | 25.44                | MAv1 | 31.8           | -20                    | 37.24                      | 54                 | -16.76      | -                   | -              | 164            | 204         | V        |
| 2      | * 4.775         | 42.56                | PK2  | 34             | -29.3                  | 47.26                      | -                  | -           | 74                  | -26.74         | 74             | 125         | H        |
|        | * 4.774         | 29.42                | MAv1 | 34             | -29.3                  | 34.12                      | 54                 | -19.88      | -                   | -              | 74             | 125         | H        |
| 3      | * 7.436         | 39.09                | PK2  | 35.5           | -27.6                  | 46.99                      | -                  | -           | 74                  | -27.01         | 295            | 343         | H        |
|        | * 7.435         | 27.12                | MAv1 | 35.5           | -27.6                  | 35.02                      | 54                 | -18.98      | -                   | -              | 295            | 343         | H        |
| 5      | * 3.945         | 40.58                | PK2  | 33.2           | -29.6                  | 44.18                      | -                  | -           | 74                  | -29.82         | 342            | 359         | V        |
|        | * 3.947         | 29.21                | MAv1 | 33.2           | -29.6                  | 32.81                      | 54                 | -21.19      | -                   | -              | 342            | 359         | V        |
| 6      | * 9.198         | 38.05                | PK2  | 36.2           | -25.5                  | 48.75                      | -                  | -           | 74                  | -25.25         | 219            | 211         | V        |
|        | * 9.198         | 26.09                | MAv1 | 36.2           | -25.5                  | 36.79                      | 54                 | -17.21      | -                   | -              | 219            | 211         | V        |



\* Indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

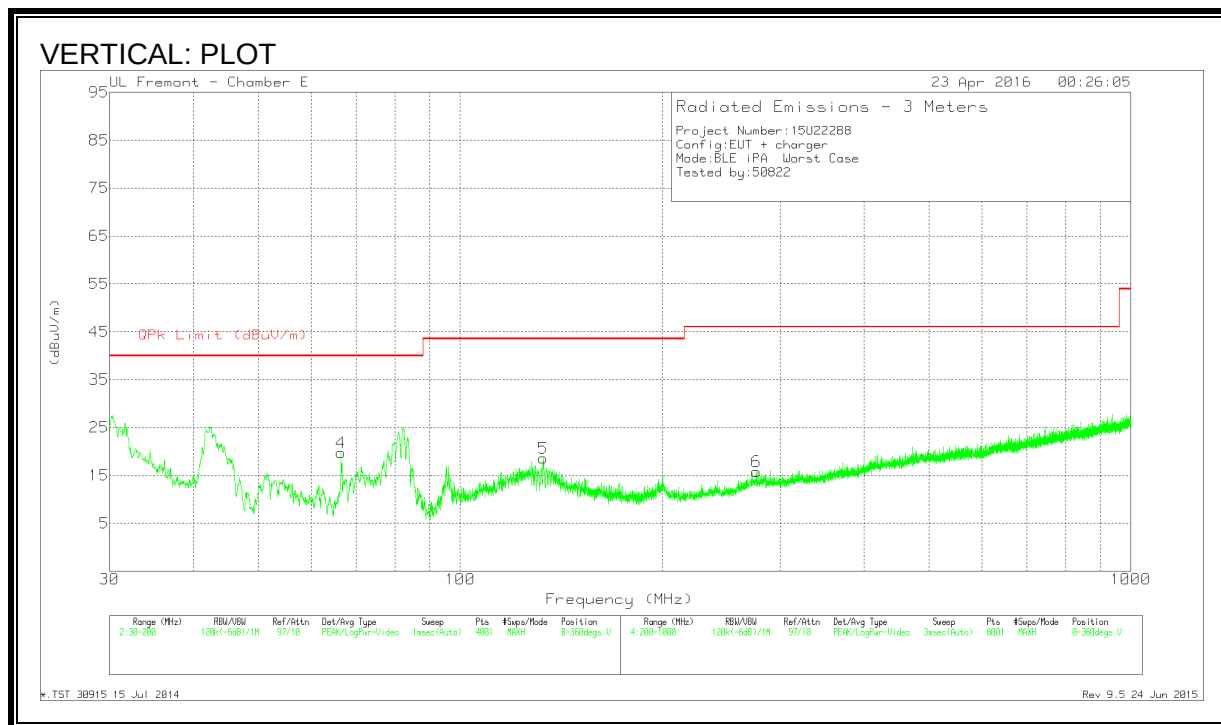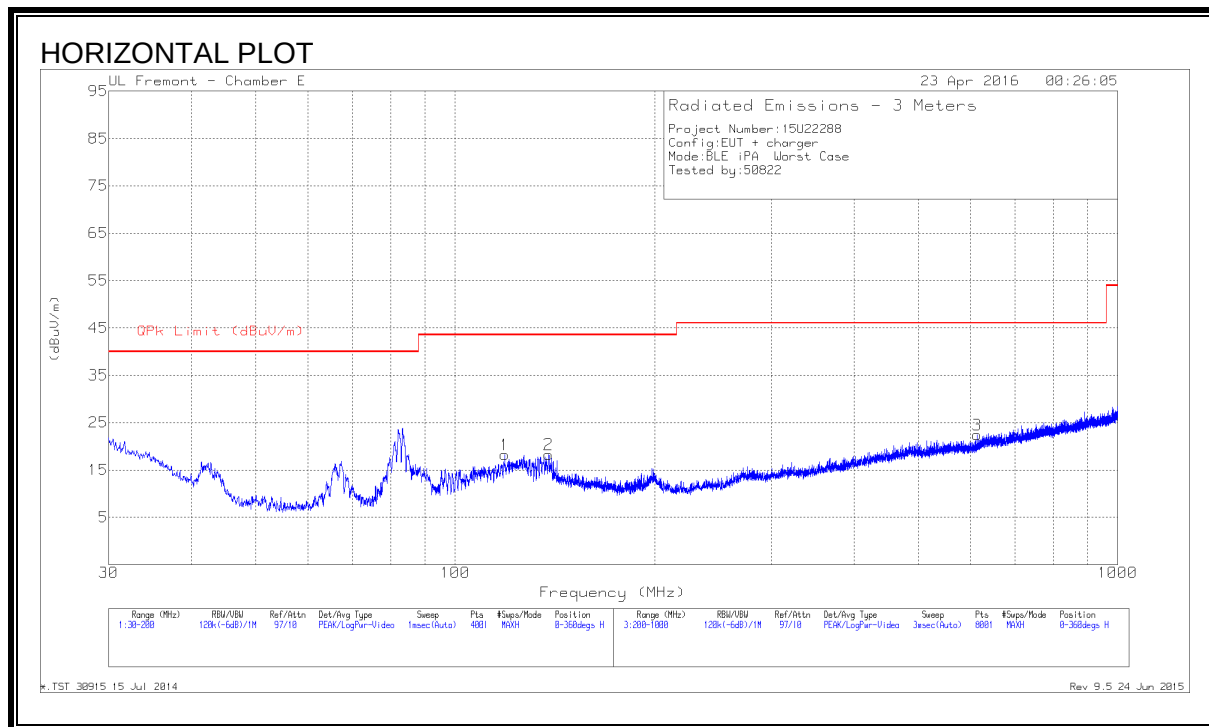

## DATA

### Trace Markers



| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T243 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | * 118.825       | 31.59                | Pk  | 17.9           | -31.2        | 18.29                      | 43.52              | -25.23      | 0-360          | 301         | H        |
| 5      | * 133.105       | 32.04                | Pk  | 17.7           | -31.1        | 18.64                      | 43.52              | -24.88      | 0-360          | 100         | V        |
| 3      | * 613.8         | 28.96                | Pk  | 22.9           | -29.4        | 22.46                      | 46.02              | -23.56      | 0-360          | 201         | H        |
| 6      | * 276.8         | 28.79                | Pk  | 17.4           | -30.4        | 15.79                      | 46.02              | -30.23      | 0-360          | 301         | V        |
| 4      | 66.4225         | 39.42                | Pk  | 11.8           | -31.5        | 19.72                      | 40                 | -20.28      | 0-360          | 100         | V        |
| 2      | 138.5025        | 32.2                 | Pk  | 17.2           | -31.1        | 18.3                       | 43.52              | -25.22      | 0-360          | 201         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

## 8.4. WORST-CASE 18 to 26 GHz

### SPURIOUS EMISSIONS 18 to 26 GHz

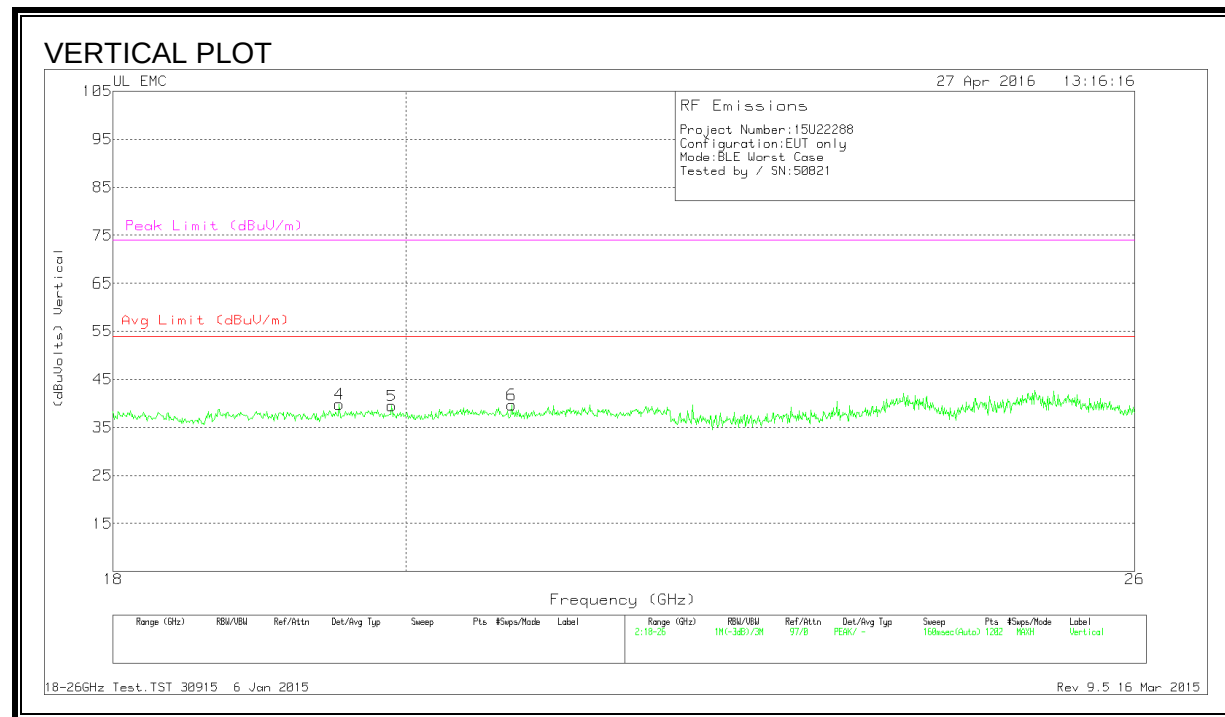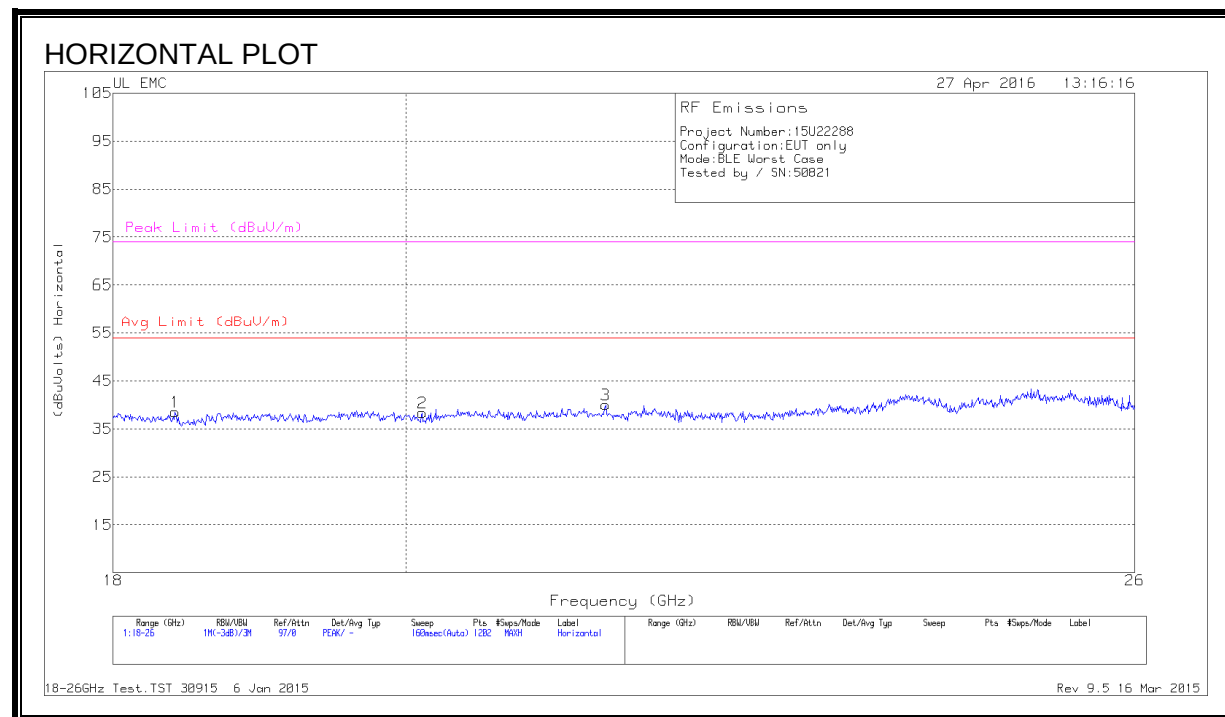



## **DATA**

### Trace Markers

| Marker | Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det | T477 AF<br>(dB/m) | Amp/Cbl<br>(dB) | Dist Corr<br>(dB) | Corrected<br>Reading<br>(dBuVolts) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) |
|--------|--------------------|----------------------------|-----|-------------------|-----------------|-------------------|------------------------------------|-----------------------|----------------|------------------------|-------------------|
| 1      | 18.406             | 40.8                       | Pk  | 32.3              | -25.1           | -9.5              | 38.5                               | 54                    | -15.5          | 74                     | -35.5             |
| 2      | 20.118             | 40.43                      | Pk  | 32.6              | -25.2           | -9.5              | 38.33                              | 54                    | -15.67         | 74                     | -35.67            |
| 3      | 21.49              | 41.7                       | Pk  | 33.1              | -25.3           | -9.5              | 40                                 | 54                    | -14            | 74                     | -34               |
| 4      | 19.525             | 41.83                      | Pk  | 32.7              | -25.2           | -9.5              | 39.83                              | 54                    | -14.17         | 74                     | -34.17            |
| 5      | 19.898             | 41.3                       | Pk  | 32.7              | -25             | -9.5              | 39.5                               | 54                    | -14.5          | 74                     | -34.5             |
| 6      | 20.778             | 41.17                      | Pk  | 32.9              | -24.9           | -9.5              | 39.67                              | 54                    | -14.33         | 74                     | -34.33            |

Pk - Peak detector

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dBμV) |            |
|-----------------------------|------------------------|------------|
|                             | Quasi-peak             | Average    |
| 0.15-0.5                    | 66 to 56 *             | 56 to 46 * |
| 0.5-5                       | 56                     | 46         |
| 5-30                        | 60                     | 50         |

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10-2013


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

## 9.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE

### LINE 1 RESULTS

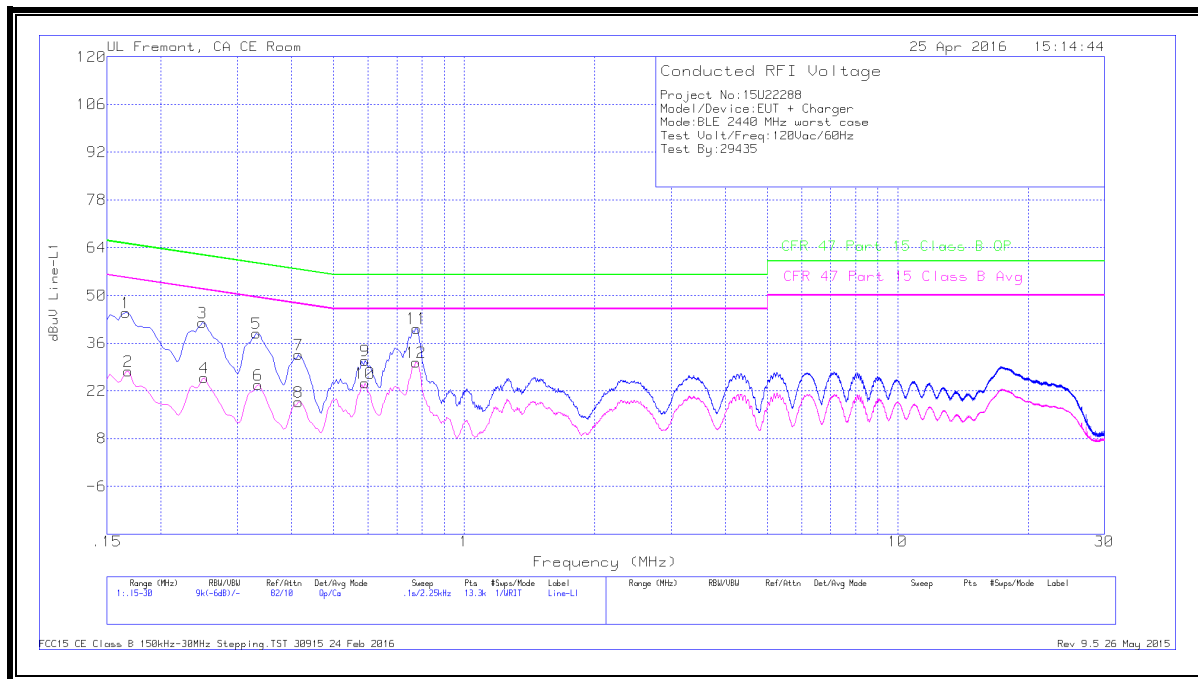

### LINE 2 RESULTS

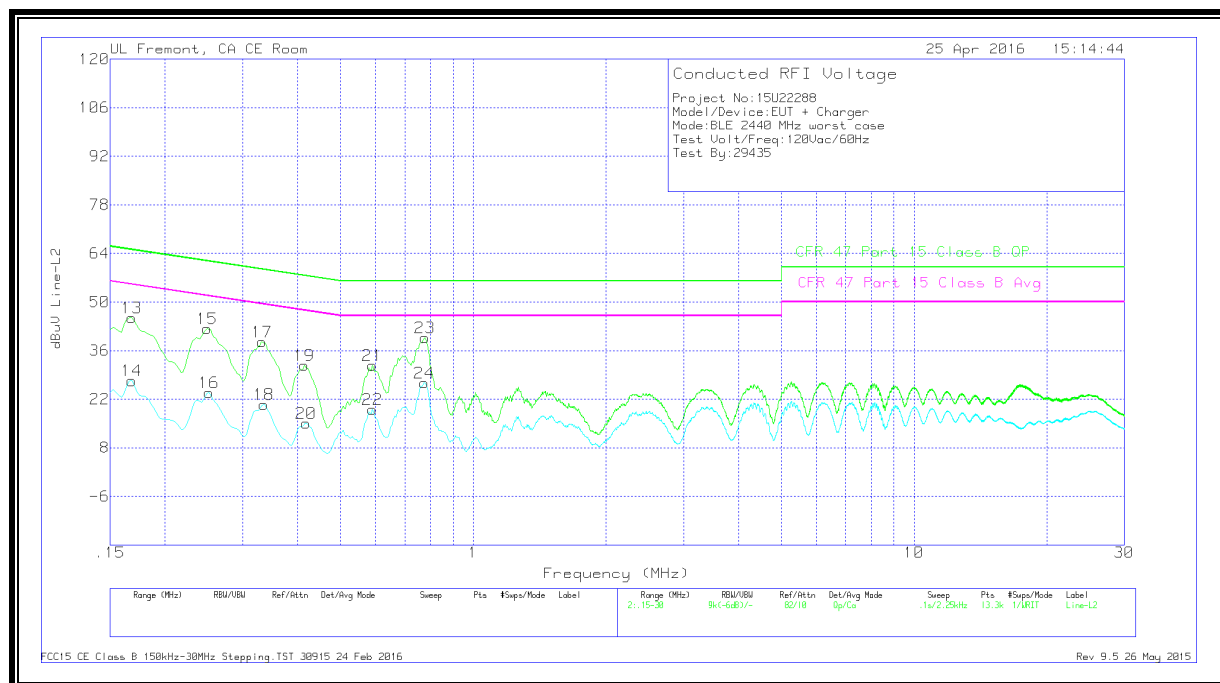

**WORST EMISSIONS**

| Range 1: Line-L1 .15 - 30MHz |                 |                      |     |           |               |              |                        |                           |                |                            |                       |
|------------------------------|-----------------|----------------------|-----|-----------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR) Margin (dB) |
| 1                            | .16575          | 33.61                | Qp  | 1.2       | 0             | 10.1         | 44.91                  | 65.17                     | -20.26         | -                          | -                     |
| 2                            | .168            | 16.4                 | Ca  | 1.2       | 0             | 10.1         | 27.7                   | -                         | -              | 55.06                      | -27.36                |
| 3                            | .249            | 31.2                 | Qp  | .7        | 0             | 10.1         | 42                     | 61.79                     | -19.79         | -                          | -                     |
| 4                            | .25125          | 15.04                | Ca  | .7        | 0             | 10.1         | 25.84                  | -                         | -              | 51.72                      | -25.88                |
| 5                            | .33225          | 28.28                | Qp  | .5        | 0             | 10.1         | 38.88                  | 59.39                     | -20.51         | -                          | -                     |
| 6                            | .3345           | 13.23                | Ca  | .5        | 0             | 10.1         | 23.83                  | -                         | -              | 49.34                      | -25.51                |
| 7                            | .4155           | 22.06                | Qp  | .4        | 0             | 10.1         | 32.56                  | 57.54                     | -24.98         | -                          | -                     |
| 8                            | .4155           | 8.25                 | Ca  | .4        | 0             | 10.1         | 18.75                  | -                         | -              | 47.54                      | -28.79                |
| 9                            | .591            | 20.54                | Qp  | .3        | 0             | 10.1         | 30.94                  | 56                        | -25.06         | -                          | -                     |
| 10                           | .591            | 13.92                | Ca  | .3        | 0             | 10.1         | 24.32                  | -                         | -              | 46                         | -21.68                |
| 11                           | .77775          | 29.95                | Qp  | .3        | 0             | 10.1         | 40.35                  | 56                        | -15.65         | -                          | -                     |
| 12                           | .7755           | 20                   | Ca  | .3        | 0             | 10.1         | 30.4                   | -                         | -              | 46                         | -15.6                 |


| Range 2: Line-L2 .15 - 30MHz |                 |                      |     |           |               |              |                        |                           |                |                            |                       |
|------------------------------|-----------------|----------------------|-----|-----------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR) Margin (dB) |
| 13                           | .168            | 34.07                | Qp  | 1.3       | 0             | 10.1         | 45.47                  | 65.06                     | -19.59         | -                          | -                     |
| 14                           | .168            | 15.92                | Ca  | 1.3       | 0             | 10.1         | 27.32                  | -                         | -              | 55.06                      | -27.74                |
| 15                           | .249            | 31.54                | Qp  | .7        | 0             | 10.1         | 42.34                  | 61.79                     | -19.45         | -                          | -                     |
| 16                           | .25125          | 13.15                | Ca  | .7        | 0             | 10.1         | 23.95                  | -                         | -              | 51.72                      | -27.77                |
| 17                           | .33225          | 27.97                | Qp  | .5        | 0             | 10.1         | 38.57                  | 59.39                     | -20.82         | -                          | -                     |
| 18                           | .3345           | 9.93                 | Ca  | .5        | 0             | 10.1         | 20.53                  | -                         | -              | 49.34                      | -28.81                |
| 19                           | .41325          | 21.22                | Qp  | .4        | 0             | 10.1         | 31.72                  | 57.58                     | -25.86         | -                          | -                     |
| 20                           | .41775          | 4.53                 | Ca  | .4        | 0             | 10.1         | 15.03                  | -                         | -              | 47.49                      | -32.46                |
| 21                           | .591            | 21.3                 | Qp  | .3        | 0             | 10.1         | 31.7                   | 56                        | -24.3          | -                          | -                     |
| 22                           | .591            | 8.67                 | Ca  | .3        | 0             | 10.1         | 19.07                  | -                         | -              | 46                         | -26.93                |
| 23                           | .77775          | 29.31                | Qp  | .3        | 0             | 10.1         | 39.71                  | 56                        | -16.29         | -                          | -                     |
| 24                           | .7755           | 16.35                | Ca  | .3        | 0             | 10.1         | 26.75                  | -                         | -              | 46                         | -19.25                |

Qp - Quasi-Peak detector


Ca - CISPR average detection

## 9.2. EUT POWERED BY HOST PC VIA USB CABLE

### LINE 1 RESULTS

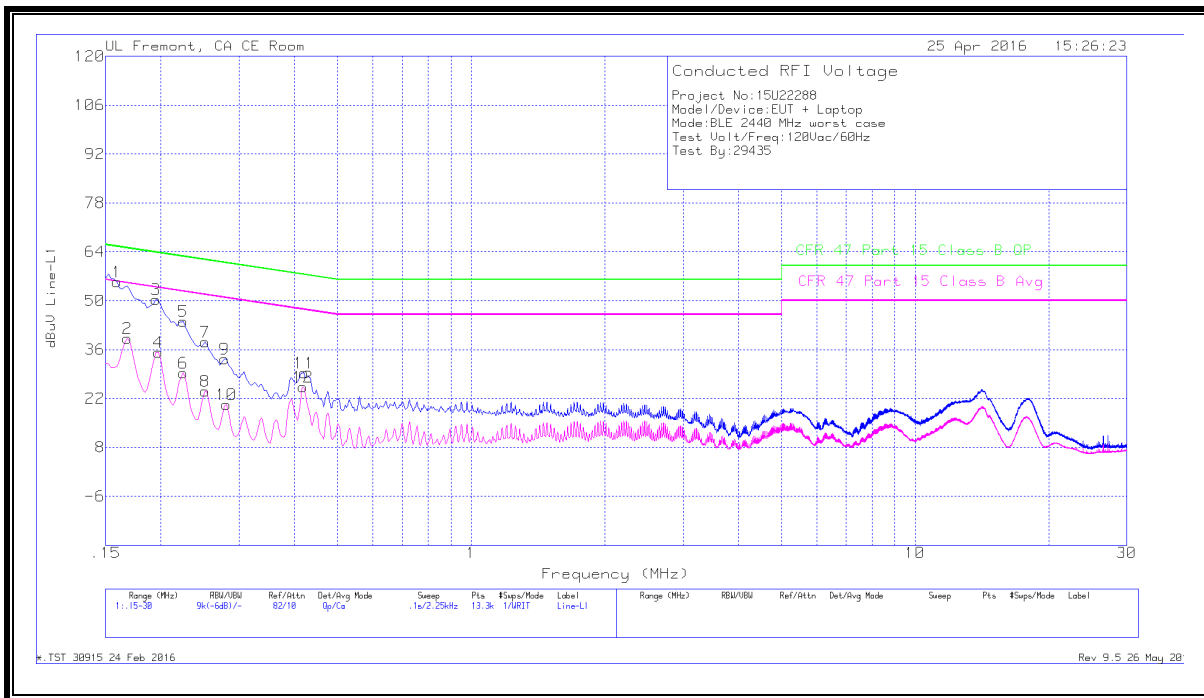

### LINE 2 RESULTS

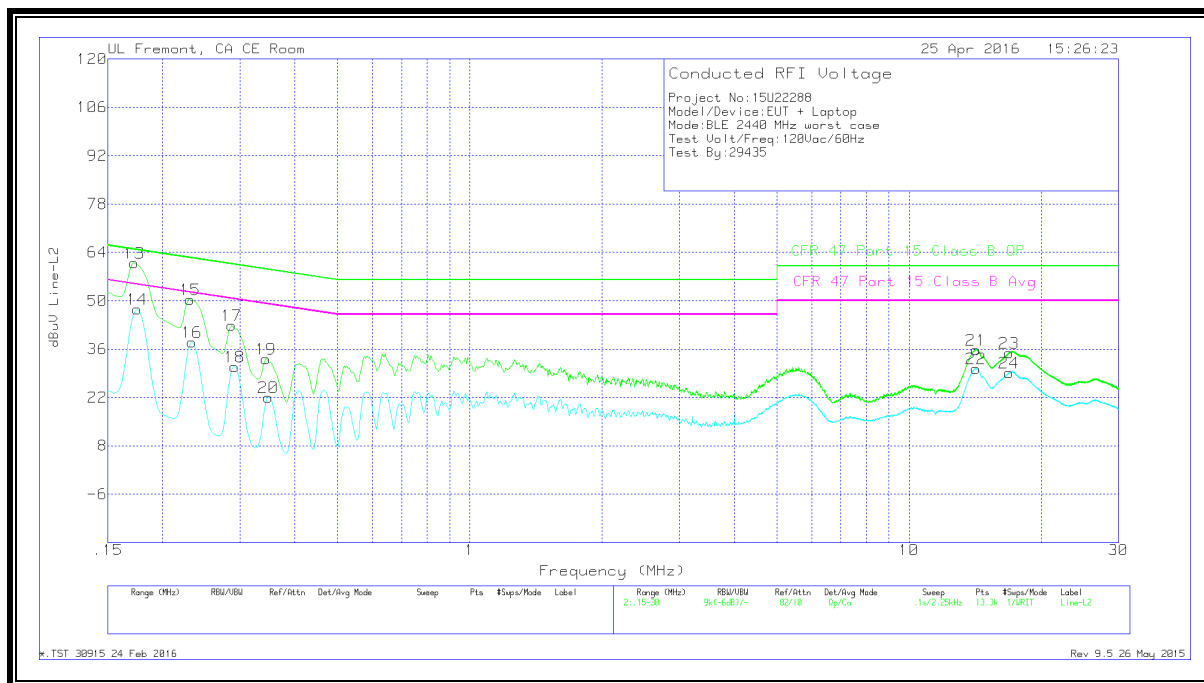

**WORST EMISSIONS**

| Range 1: Line-L1 .15 - 30MHz |                 |                      |     |           |               |              |                        |                           |                |                            |                       |
|------------------------------|-----------------|----------------------|-----|-----------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR) Margin (dB) |
| 1                            | .159            | 43.96                | Qp  | 1.3       | 0             | 10.1         | 55.36                  | 65.52                     | -10.16         | -                          | -                     |
| 2                            | .168            | 27.89                | Ca  | 1.2       | 0             | 10.1         | 39.19                  | -                         | -              | 55.06                      | -15.87                |
| 3                            | .195            | 39.31                | Qp  | 1         | 0             | 10.1         | 50.41                  | 63.82                     | -13.41         | -                          | -                     |
| 4                            | .19725          | 24.12                | Ca  | 1         | 0             | 10.1         | 35.22                  | -                         | -              | 53.73                      | -18.51                |
| 5                            | .22425          | 33.19                | Qp  | .8        | 0             | 10.1         | 44.09                  | 62.66                     | -18.57         | -                          | -                     |
| 6                            | .22425          | 18.37                | Ca  | .8        | 0             | 10.1         | 29.27                  | -                         | -              | 52.66                      | -23.39                |
| 7                            | .25125          | 27.4                 | Qp  | .7        | 0             | 10.1         | 38.2                   | 61.72                     | -23.52         | -                          | -                     |
| 8                            | .25125          | 13.36                | Ca  | .7        | 0             | 10.1         | 24.16                  | -                         | -              | 51.72                      | -27.56                |
| 9                            | .27825          | 22.65                | Qp  | .6        | 0             | 10.1         | 33.35                  | 60.87                     | -27.52         | -                          | -                     |
| 10                           | .2805           | 9.58                 | Ca  | .6        | 0             | 10.1         | 20.28                  | -                         | -              | 50.8                       | -30.52                |
| 11                           | .42             | 18.8                 | Qp  | .4        | 0             | 10.1         | 29.3                   | 57.45                     | -28.15         | -                          | -                     |
| 12                           | .41775          | 14.82                | Ca  | .4        | 0             | 10.1         | 25.32                  | -                         | -              | 47.49                      | -22.17                |

| Range 2: Line-L2 .15 - 30MHz |                 |                      |     |           |               |              |                        |                           |                |                            |                       |
|------------------------------|-----------------|----------------------|-----|-----------|---------------|--------------|------------------------|---------------------------|----------------|----------------------------|-----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR) Margin (dB) |
| 13                           | .1725           | 49.72                | Qp  | 1.2       | 0             | 10.1         | 61.02                  | 64.84                     | -3.82          | -                          | -                     |
| 14                           | .17475          | 36.28                | Ca  | 1.2       | 0             | 10.1         | 47.58                  | -                         | -              | 54.73                      | -7.15                 |
| 15                           | .231            | 39.49                | Qp  | .8        | 0             | 10.1         | 50.39                  | 62.41                     | -12.02         | -                          | -                     |
| 16                           | .23325          | 27.11                | Ca  | .8        | 0             | 10.1         | 38.01                  | -                         | -              | 52.33                      | -14.32                |
| 17                           | .28725          | 32.12                | Qp  | .6        | 0             | 10.1         | 42.82                  | 60.6                      | -17.78         | -                          | -                     |
| 18                           | .29175          | 20.24                | Ca  | .6        | 0             | 10.1         | 30.94                  | -                         | -              | 50.47                      | -19.53                |
| 19                           | .3435           | 22.6                 | Qp  | .5        | 0             | 10.1         | 33.2                   | 59.12                     | -25.92         | -                          | -                     |
| 20                           | .348            | 11.39                | Ca  | .5        | 0             | 10.1         | 21.99                  | -                         | -              | 49.01                      | -27.02                |
| 21                           | 14.2125         | 25.2                 | Qp  | .2        | .2            | 10.2         | 35.8                   | 60                        | -24.2          | -                          | -                     |
| 22                           | 14.20575        | 19.73                | Ca  | .2        | .2            | 10.2         | 30.33                  | -                         | -              | 50                         | -19.67                |
| 23                           | 16.8855         | 24.08                | Qp  | .3        | .2            | 10.3         | 34.88                  | 60                        | -25.12         | -                          | -                     |
| 24                           | 16.88663        | 18.3                 | Ca  | .3        | .2            | 10.3         | 29.1                   | -                         | -              | 50                         | -20.9                 |

Qp - Quasi-Peak detector

Ca - CISPR average detection