


LINE 2 RESULTS

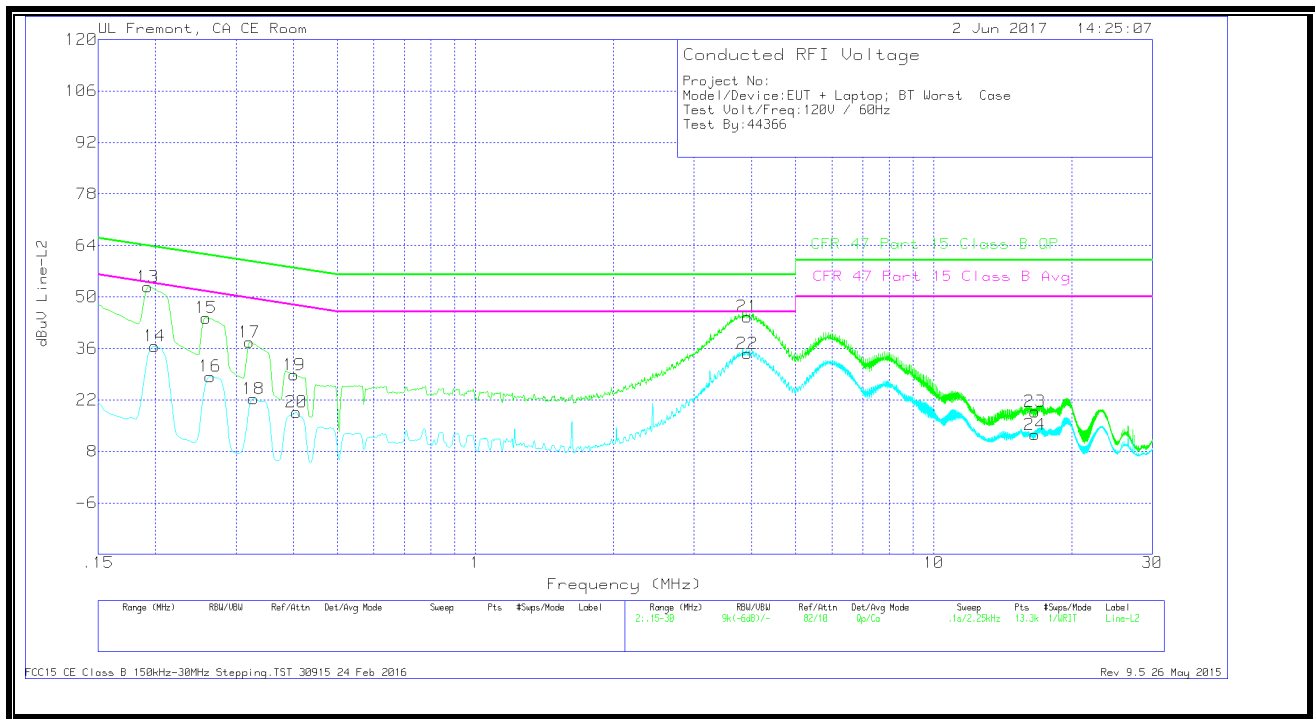

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.19275	42.55	Qp	0	.1	10.1	52.75	63.92	-11.17	-	-
14	.1995	26.39	Ca	0	.1	10.1	36.59	-	-	53.63	-17.04
15	.258	34.1	Qp	0	.1	10.1	44.3	61.5	-17.2	-	-
16	.26363	18.17	Ca	0	.1	10.1	28.37	-	-	51.32	-22.95
17	.321	27.51	Qp	0	.1	10.1	37.71	59.68	-21.97	-	-
18	.32775	12.08	Ca	0	.1	10.1	22.28	-	-	49.51	-27.23
19	.402	18.6	Qp	0	.1	10.1	28.8	57.81	-29.01	-	-
20	.4065	8.43	Ca	0	.1	10.1	18.63	-	-	47.72	-29.09
21	3.91875	34.42	Qp	0	.1	10.1	44.62	56	-11.38	-	-
22	3.921	24.42	Ca	0	.1	10.1	34.62	-	-	46	-11.38
23	16.6245	8.32	Qp	0	.2	10.3	18.82	60	-41.18	-	-
24	16.6234	2.04	Ca	0	.2	10.3	12.54	-	-	50	-37.46