



CERTIFICATION TEST REPORT

Report Number. : 12901678-E2V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2161, A2219, AND A2220

FCC ID : BCG-E3306A

IC : 579C-E3306A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
August 22, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	8/19/2019	Initial Issue	Chin Pang
V2	8/22/2019	Addressed TCB Feedback on 5, 7,8 , 11	Tony Li

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	8
4.2. <i>SAMPLE CALCULATION</i>	8
4.3. <i>MEASUREMENT UNCERTAINTY</i>	8
5. EQUIPMENT UNDER TEST	9
5.1. <i>EUT DESCRIPTION</i>	9
5.2. <i>MAXIMUM OUTPUT POWER</i>	9
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	9
5.4. <i>SOFTWARE AND FIRMWARE</i>	9
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	10
5.6. <i>DESCRIPTION OF TEST SETUP</i>	11
6. MEASUREMENT METHOD.....	16
7. TEST AND MEASUREMENT EQUIPMENT	17
8. ANTENNA PORT TEST RESULTS	18
8.1. <i>ON TIME AND DUTY CYCLE</i>	18
8.2. <i>99% BANDWIDTH</i>	20
8.2.1. High Power BLE (1Mbps)	21
8.2.2. High Power BLE (2Mbps)	23
8.2.3. Low Power BLE (1Mbps)	25
8.2.4. BLE (2Mbps)	27
8.3. <i>6 dB BANDWIDTH</i>	29
8.3.1. High Power BLE (1Mbps)	30
8.3.2. High Power BLE (2Mbps)	32
8.3.3. Low Power BLE (1Mbps)	34
8.3.4. Low Power BLE (2Mbps)	36
8.4. <i>OUTPUT POWER</i>	38
8.4.1. High Power BLE (1Mbps)	39
8.4.2. High Power BLE (2Mbps)	40
8.4.3. Low Power BLE (1Mbps)	41
8.4.4. Low Power BLE (2Mbps)	42
8.5. <i>AVERAGE POWER</i>	43
8.5.1. High Power BLE (1Mbps)	44

8.5.2. High Power BLE (2Mbps)	45
8.5.3 Low Power BLE (1Mbps)	46
8.5.4 Low Power BLE (2Mbps)	47
8.6. POWER SPECTRAL DENSITY	48
8.6.1. High Power BLE (1Mbps)	49
8.6.2. High Power BLE (2Mbps)	51
8.6.3. Low Power BLE (1Mbps)	53
8.6.4. Low Power BLE (2Mbps)	55
8.6 CONDUCTED SPURIOUS EMISSIONS.....	57
8.6.1 High Power BLE (1Mbps)	58
8.6.2 High Power BLE (2Mbps)	60
8.6.3 Low Power BLE (1Mbps)	62
8.6.4 Low Power BLE (2Mbps)	64
8.7 BEAMFORMING, 99% BANDWIDTH	66
8.7.1 HIGH POWER BLE (1Mbps).....	66
8.7.2 HIGH POWER BLE (2Mbps).....	68
8.7.3 LOW POWER BLE (1Mbps)	70
8.7.4 LOW POWER BLE (2Mbps)	72
8.8 BEAMFORMING, 6dB BANDWIDTH	74
8.8.1 HIGH POWER BLE (1Mbps).....	74
8.8.2 HIGH POWER BLE (2Mbps).....	76
8.8.3 LOW POWER BLE (1Mbps)	78
8.8.4 LOW POWER BLE (2Mbps)	80
8.9 BEAMFORMING OUTPUT POWER.....	82
8.9.1 HIGH POWER BLE (1Mbps).....	82
8.9.2 HIGH POWER BLE (2Mbps).....	82
8.9.3 LOW POWER BLE (1Mbps)	83
8.9.4 LOW POWER BLE (2Mbps)	83
8.10 BEAMFORMING AVERAGE POWER	84
8.10.1 HIGH POWER BLE (1Mbps).....	84
8.10.2 HIGH POWER BLE (2Mbps).....	84
8.10.3 LOW POWER BLE (1Mbps)	85
8.10.4 LOW POWER BLE (2Mbps)	85
8.11 BEAMFORMING, POWER SPECTRAL DENSITY.....	86
8.11.1 HIGH POWER BLE (1Mbps).....	86
8.11.2 HIGH POWER BLE (2Mbps).....	88
8.11.3 LOW POWER BLE (1Mbps)	90
8.11.4 LOW POWER BLE (2Mbps)	92
8.12 BEAMFORMING, CONDUCTED SPURIOUS	94
8.12.1 HIGH POWER BLE (1Mbps).....	94
8.12.2 HIGH POWER BLE (2Mbps).....	96
8.12.3 LOW POWER BLE (1Mbps)	98
8.12.4 LOW POWER BLE (2Mbps)	100
9 RADIATED TEST RESULTS.....	102
9.1 LIMITS AND PROCEDURE.....	102
9.2 TRANSMITTER ABOVE 1 GHz	105

9.2.1	High Power BLE (1Mbps)	105
9.2.2	High Power BLE (2Mbps)	125
9.2.3	Low Power BLE (1Mbps)	145
9.2.4	Low Power BLE (2Mbps)	165
9.2.5	BEAMFORMING, HIGH POWER BLE (1Mbps)	185
9.2.6	BEAMFORMING, HIGH POWER BLE (2Mbps)	195
9.2.7	BEAMFORMING, LOW POWER BLE (1Mbps)	205
9.2.8	BEAMFORMING, LOW POWER BLE (2Mbps)	215
9.3	<i>WORST CASE BELOW 1 GHZ</i>	225
9.4	<i>WORST CASE 18-26 GHZ</i>	227
10.	AC POWER LINE CONDUCTED EMISSIONS	229
10.1.	<i>AC Power Line Host</i>	230
10.2.	<i>AC Power Line Norm</i>	232
11.	SETUP PHOTOS	234

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2161, A2219, AND A2220

SERIAL NUMBER: G6TYW007N397, G6TYW009N395

DATE TESTED: JUNE 06 – AUGUST 13, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, RSS-GEN Issue 5, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
<input checked="" type="checkbox"/> Chamber A (IC:2324B-1)	<input checked="" type="checkbox"/> Chamber D (IC:22541-1)	<input type="checkbox"/> Chamber I (IC: 2324A-5)
<input checked="" type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC:22541-2)	<input type="checkbox"/> Chamber J (IC: 2324A-6)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input checked="" type="checkbox"/> Chamber F (IC:22541-3)	<input type="checkbox"/> Chamber K (IC: 2324A-1)
	<input checked="" type="checkbox"/> Chamber G (IC:22541-4)	<input type="checkbox"/> Chamber L (IC: 2324A-3)
	<input checked="" type="checkbox"/> Chamber H (IC:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Configuration	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
Ant 4	High Power	2402-2480	BLE 1M	17.28	53.46
	Low Power			12.75	18.84
	High Power		BLE 2M	17.22	52.72
	Low Power			12.77	18.92
Ant 3	High Power	2402-2480	BLE 1M	19.75	94.41
	Low Power			12.78	18.97
	High Power		BLE 2M	19.71	93.54
	Low Power			12.74	18.79
BF, Ant 4 + Ant 3	High Power	2402-2480	BLE 1M	20.27	106.41
	Low Power			15.73	37.41
	High Power		BLE 2M	20.24	105.68
	Low Power			15.75	37.58

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant. 4 (dBi)	Ant. 3 (dBi)
2.4	-0.9	-2.3

5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was v1.29.99992

The test utility software used during testing was QRCT v3.0.264.0.

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on Ant 4 (Antenna 4) and Ant 3 (Antenna 3), it was determined that X(Flatbed) orientation was the worst-case orientation for both Ant 4, Ant 3 and beamforming 2TX.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario.

Below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop. There were no emissions found below 30MHz within 20dB of the limit

For simultaneous transmission of multiple channels in the 2.4GHz BLE and 5GHz bands. No noticeable new emission was found.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	A1398	C02PM012G3QD	QDS-BRCM1069
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D29325SM03XDHLHC9	NA

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

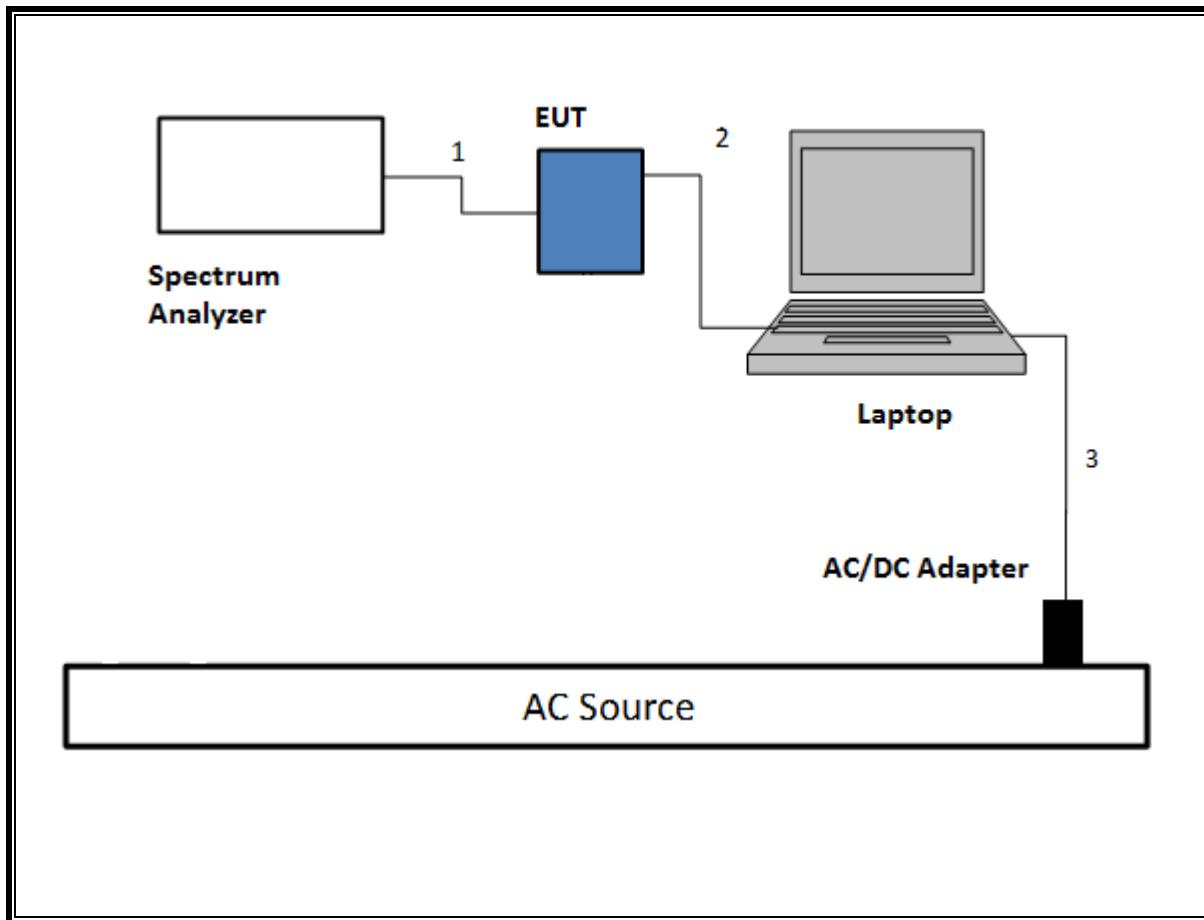


SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz

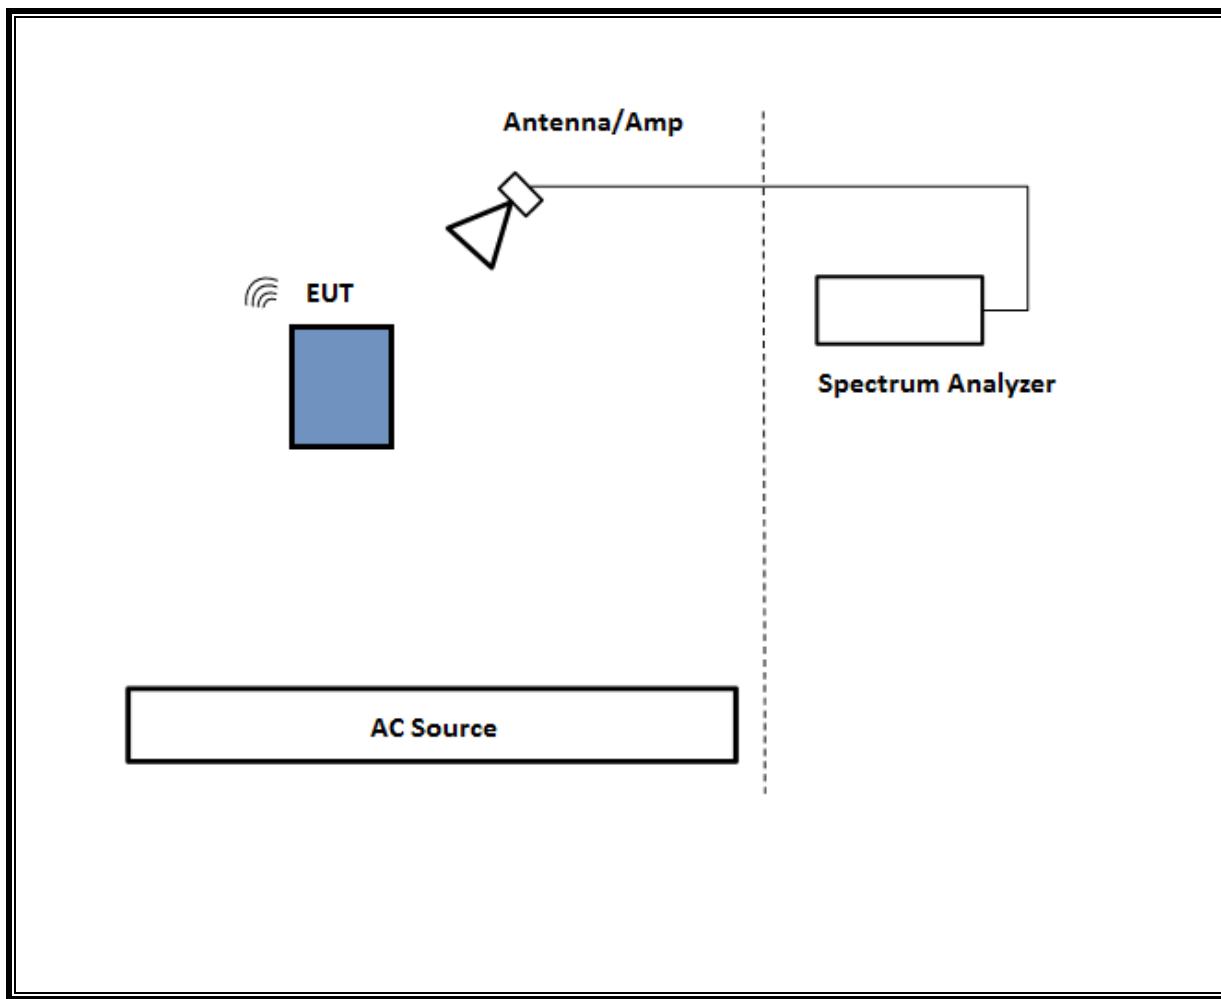

SETUP DIAGRAM FOR Below 1GHz and AC LINE CONDUCTED TEST

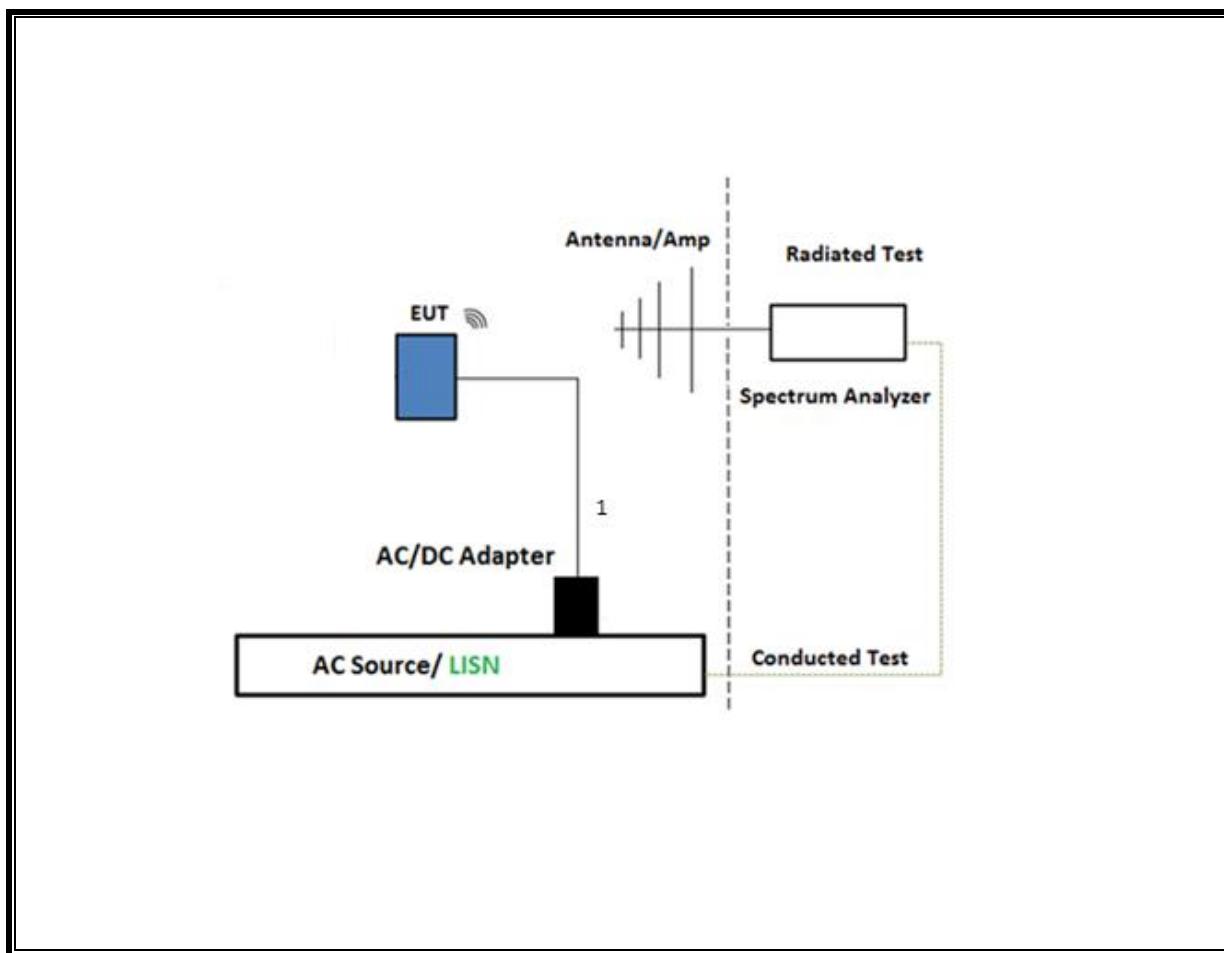

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

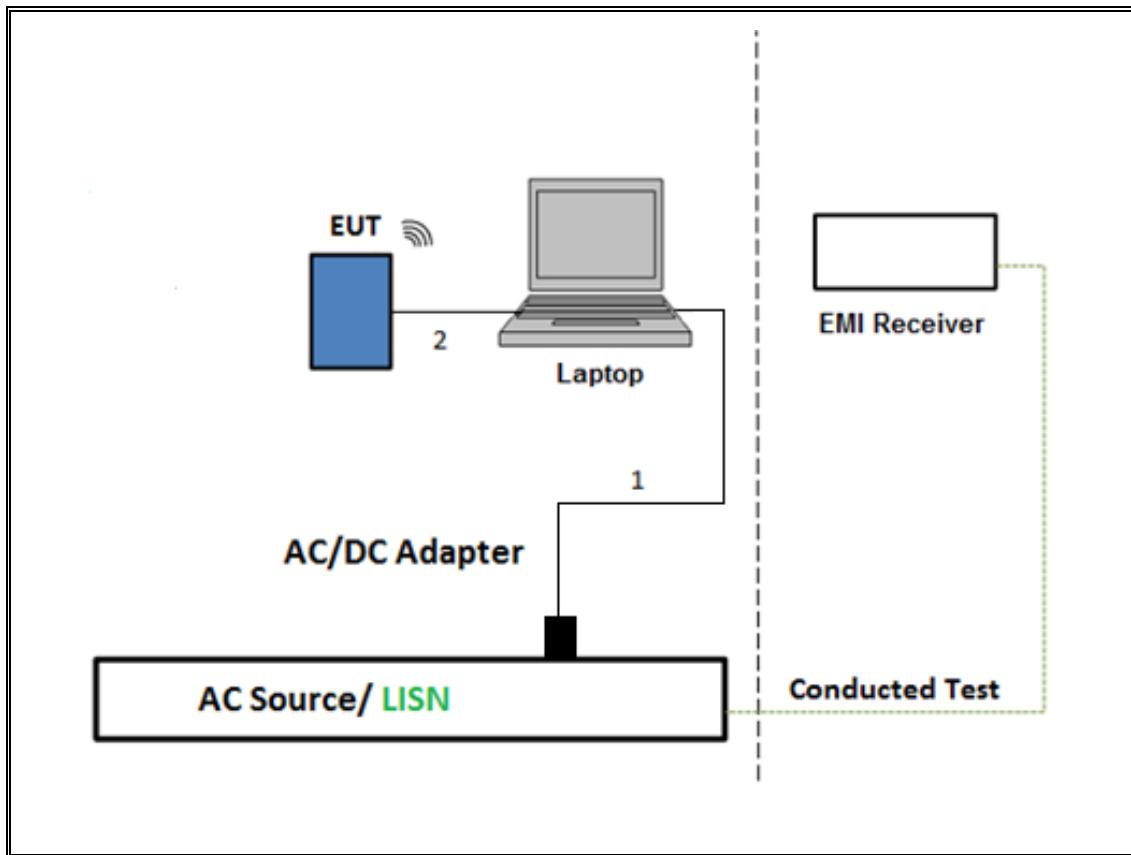

6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v05r02, Section 6.

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW \geq DTS BW

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Measurement using gated average power meter

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.12.1

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10 Subclause -11.13.3.2 Integration method -Peak detection

Band-edge: ANSI C63.10 Subclause -11.13.3.3 Integration method -Trace averaging with continuous transmission at full power

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

NOTE: All conducted antenna port tests for Beamforming applied the same test procedures as BLE 1Mbps and BLE 2Mbps normal modes.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	05/07/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T136	06/14/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	05/24/2020
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	T122	03/21/2020
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T493	08/30/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	05/31/2020
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T835	01/02/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T345	04/20/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T119	03/22/2020
Power Meter, P-series single channel	Keysight	N1912A	T1244	01/30/2020
*Power Sensor	Keysight	N1921A	T1228	07/10/2019
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	06/16/2019
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	03/23/2020
Antenna, Active Loop 9KHz to 30MHz	ETS-Lindgren	6502	T757	09/25/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T908	01/24/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T905	01/24/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	01/24/2020

AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	02/14/2020
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	01/24/2020
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE, 1Mbps	2.569	2.569	1.000	100.00%	0.00	0.010
BLE, 2Mbps	2.569	2.569	1.000	100.00%	0.00	0.010
BLE, TXBF, 1Mbps	2.569	2.569	1.000	100.00%	0.00	0.010
BLE, TXBF, 2Mbps	2.569	2.569	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

DUTY CYCLE BLE

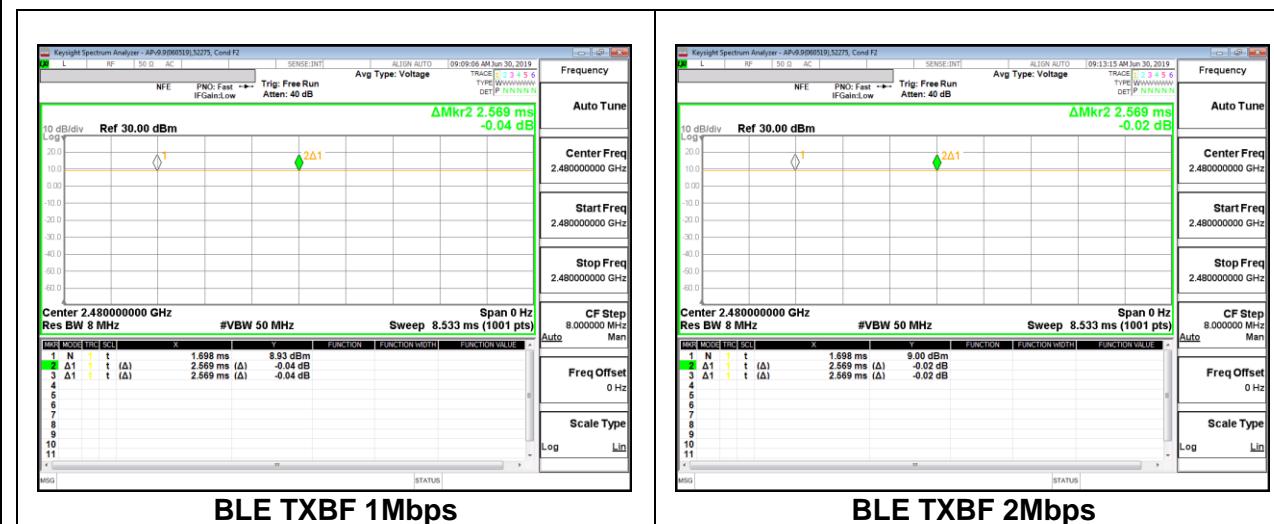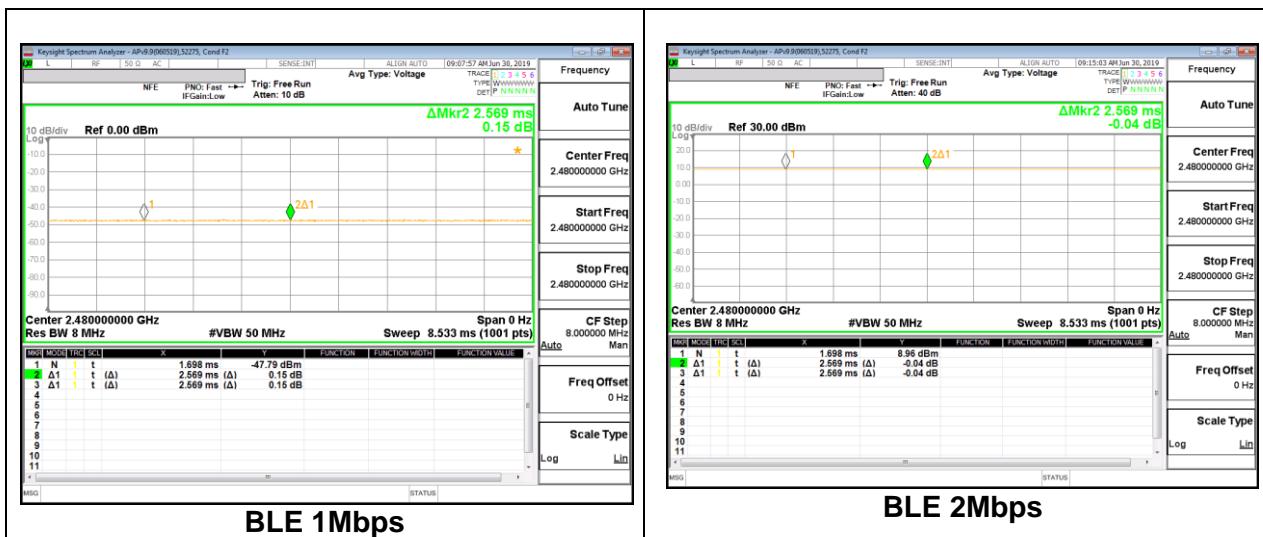

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

8.2.1. High Power BLE (1Mbps)


Antenna 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0520
Middle	2440	1.0508
High	2480	1.0526



Antenna 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0492
Middle	2440	1.0502
High	2480	1.0483

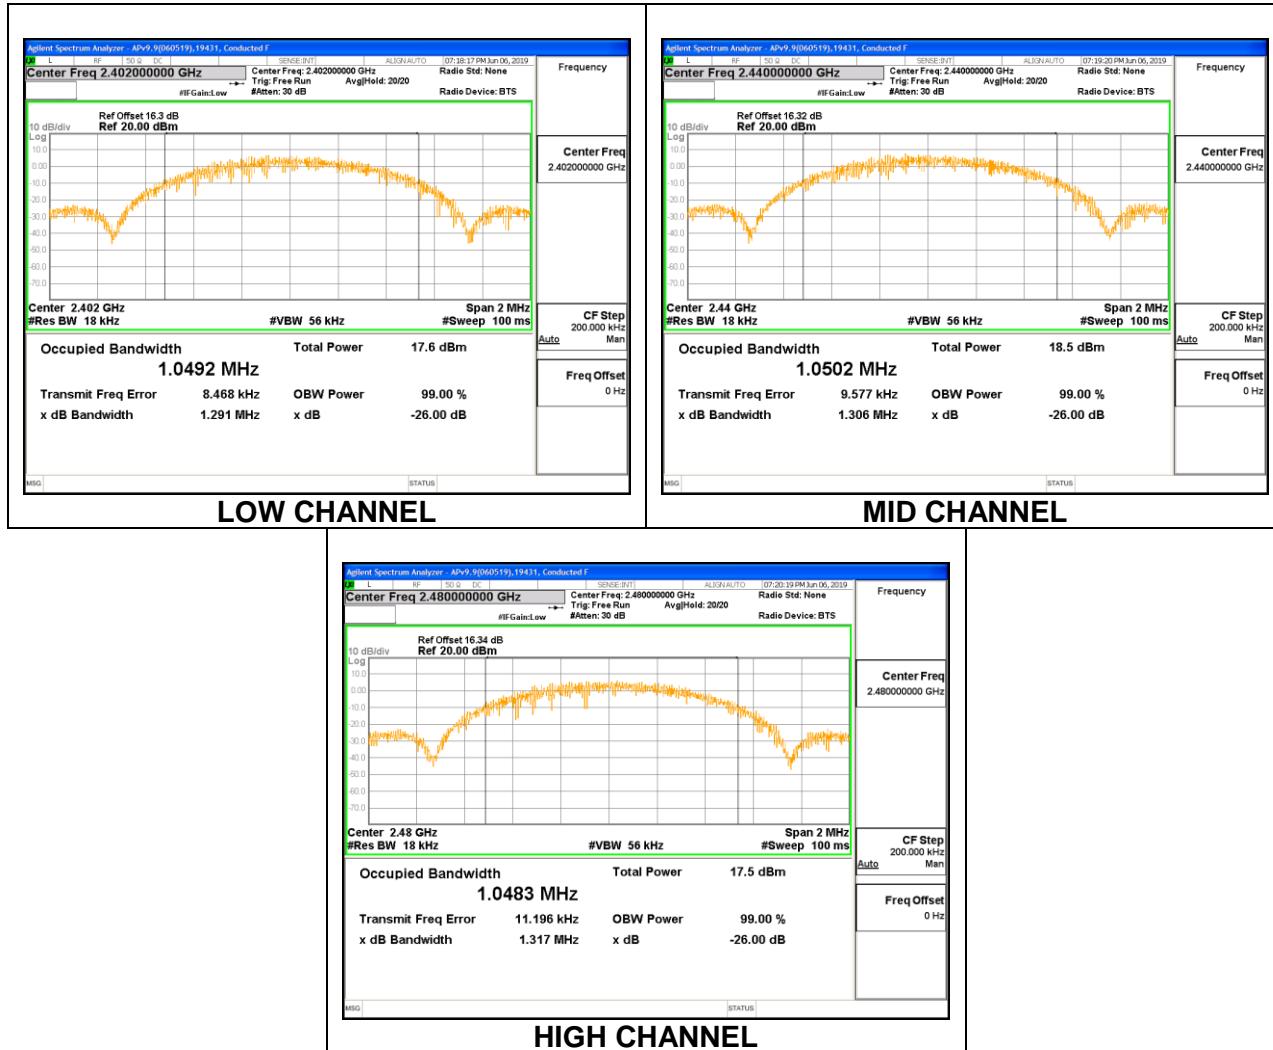

8.2.2. High Power BLE (2Mbps)

Antenna 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0128
Middle	2440	2.0102
High	2480	2.0107

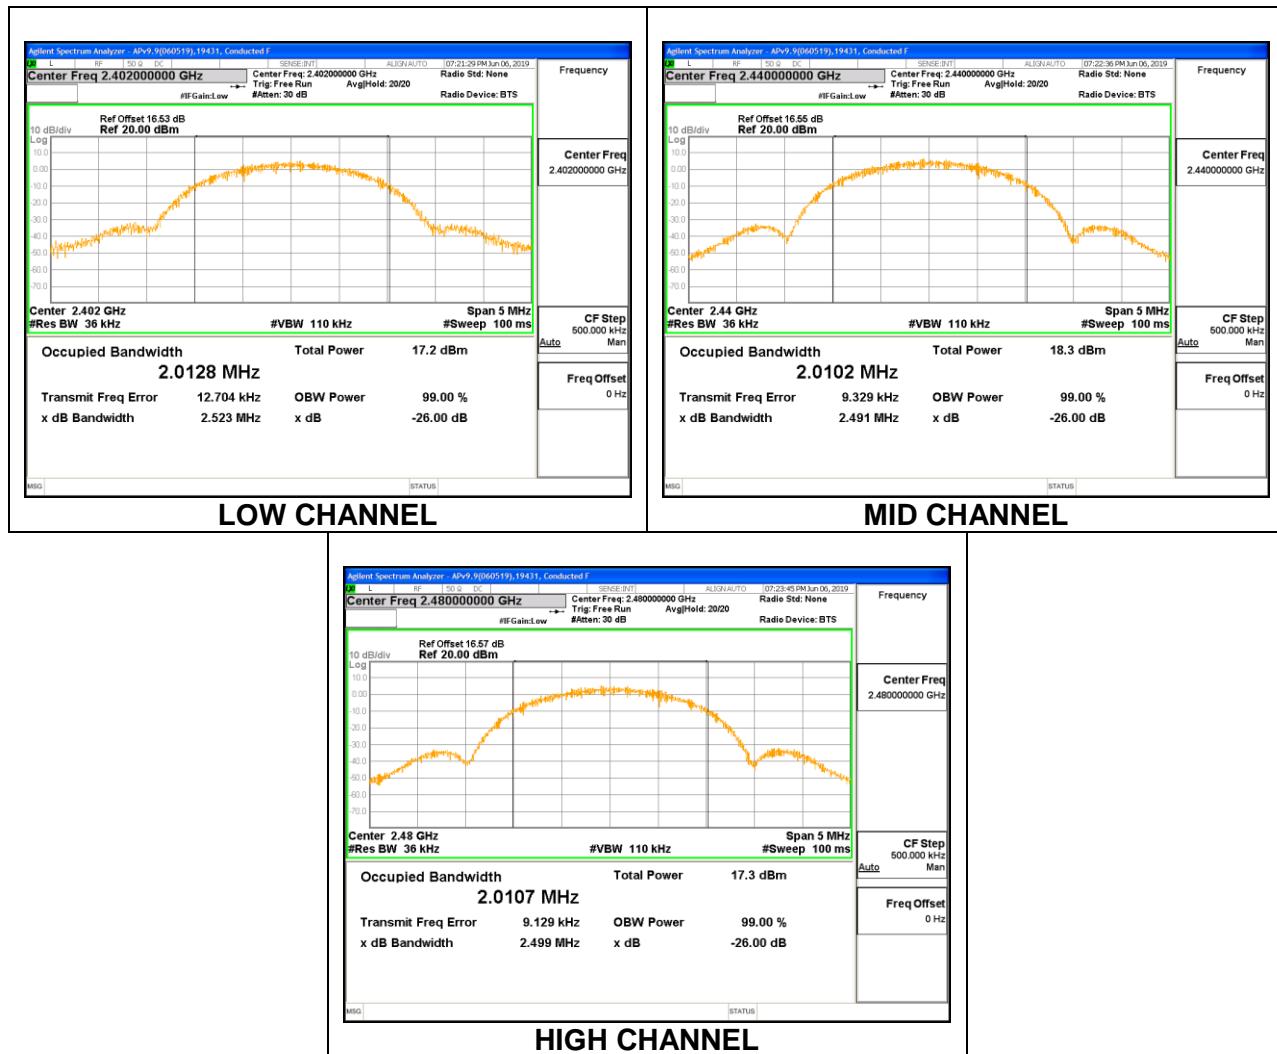

Antenna 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0220
Middle	2440	2.0294
High	2480	2.0260



8.2.3 Low Power BLE (1Mbps)


Antenna 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0524
Middle	2440	1.0486
High	2480	1.0508

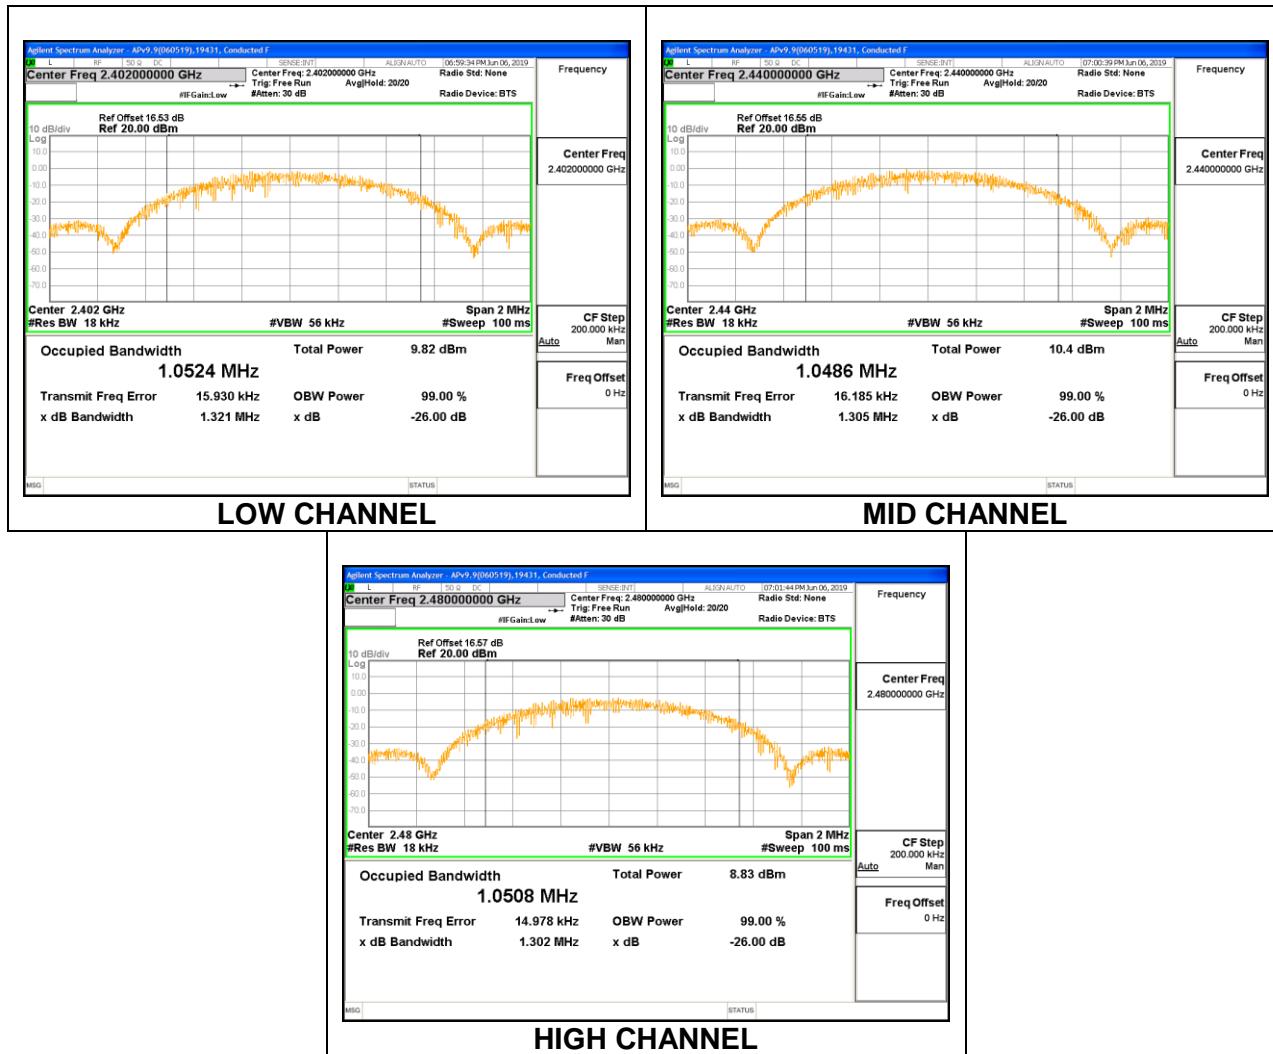

Antenna 3


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0437
Middle	2440	1.0559
High	2480	1.0499

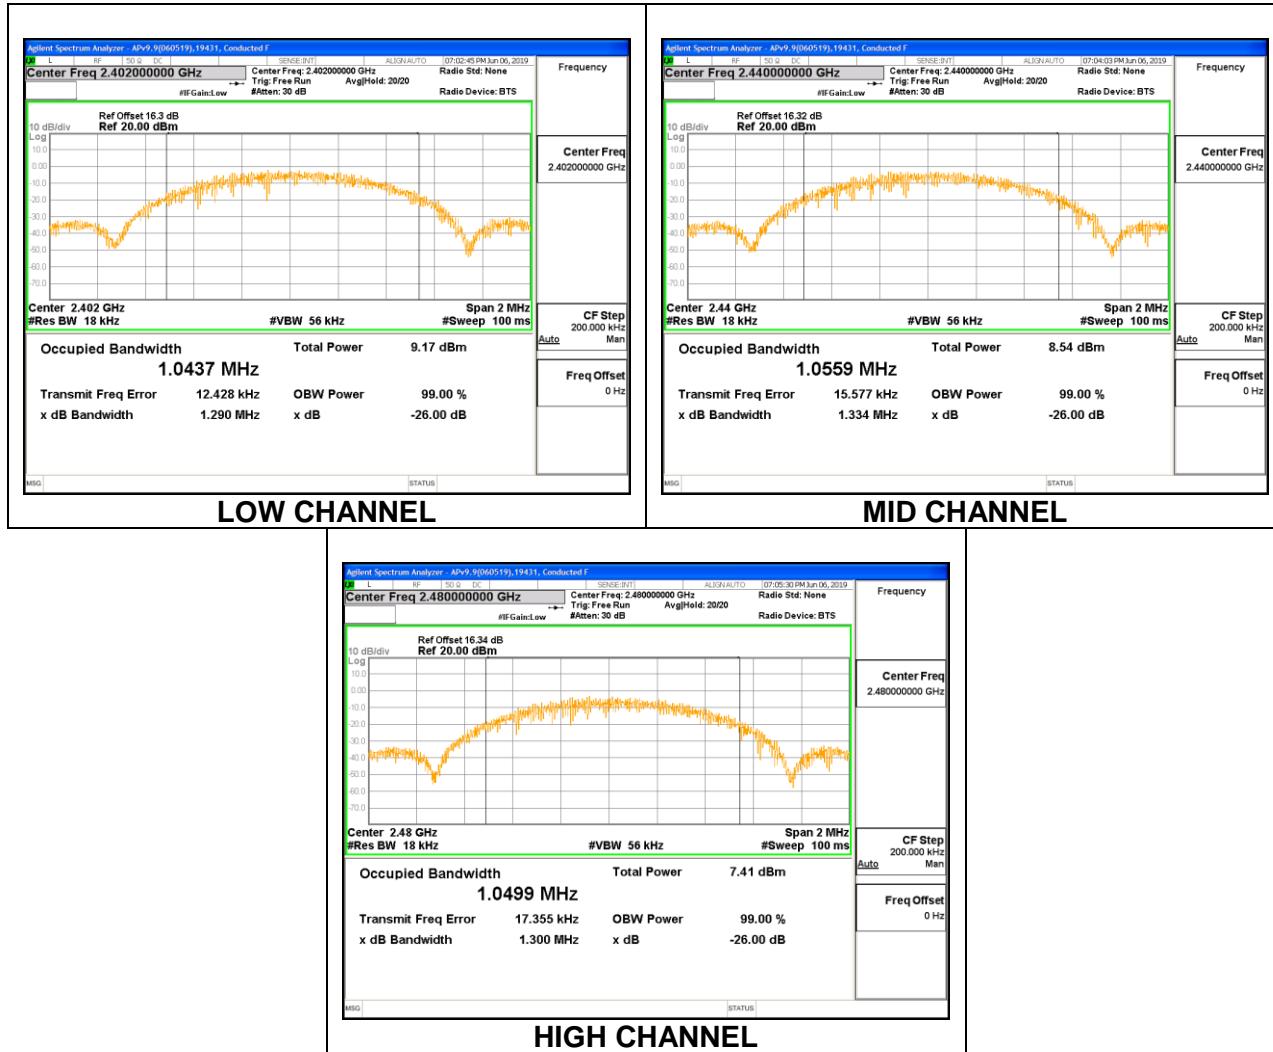

8.2.4 BLE (2Mbps)

Antenna 4

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0177
Middle	2440	2.0251
High	2480	2.0234

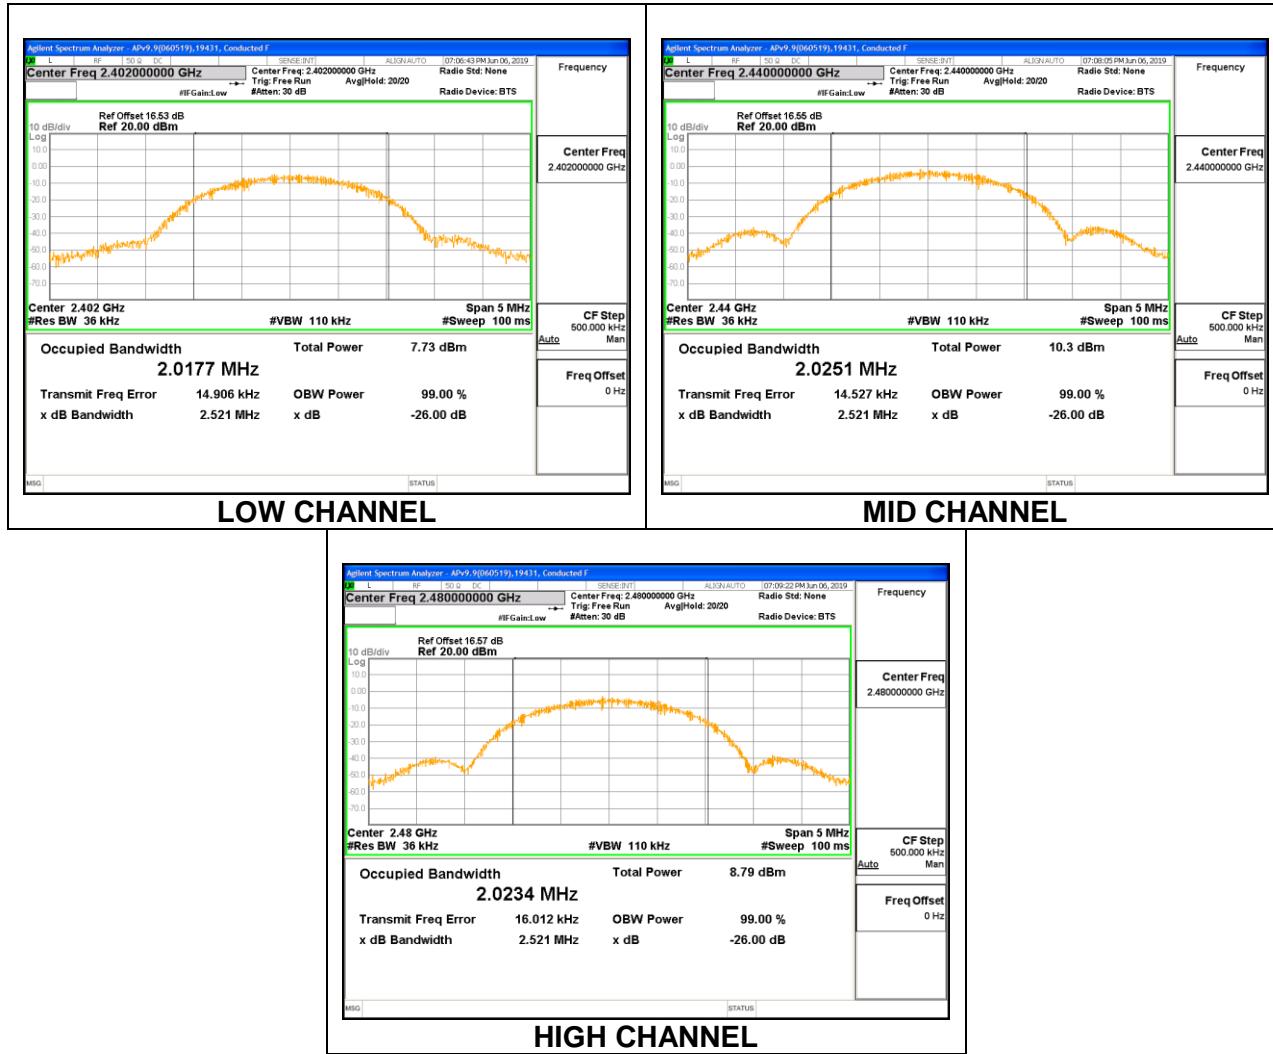

Antenna 3

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	2.0174
Middle	2440	2.0198
High	2480	2.0231



8.3. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 5.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

8.3.1. High Power BLE (1Mbps)


Antenna 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.666	0.5
Middle	2440	0.690	0.5
High	2480	0.726	0.5

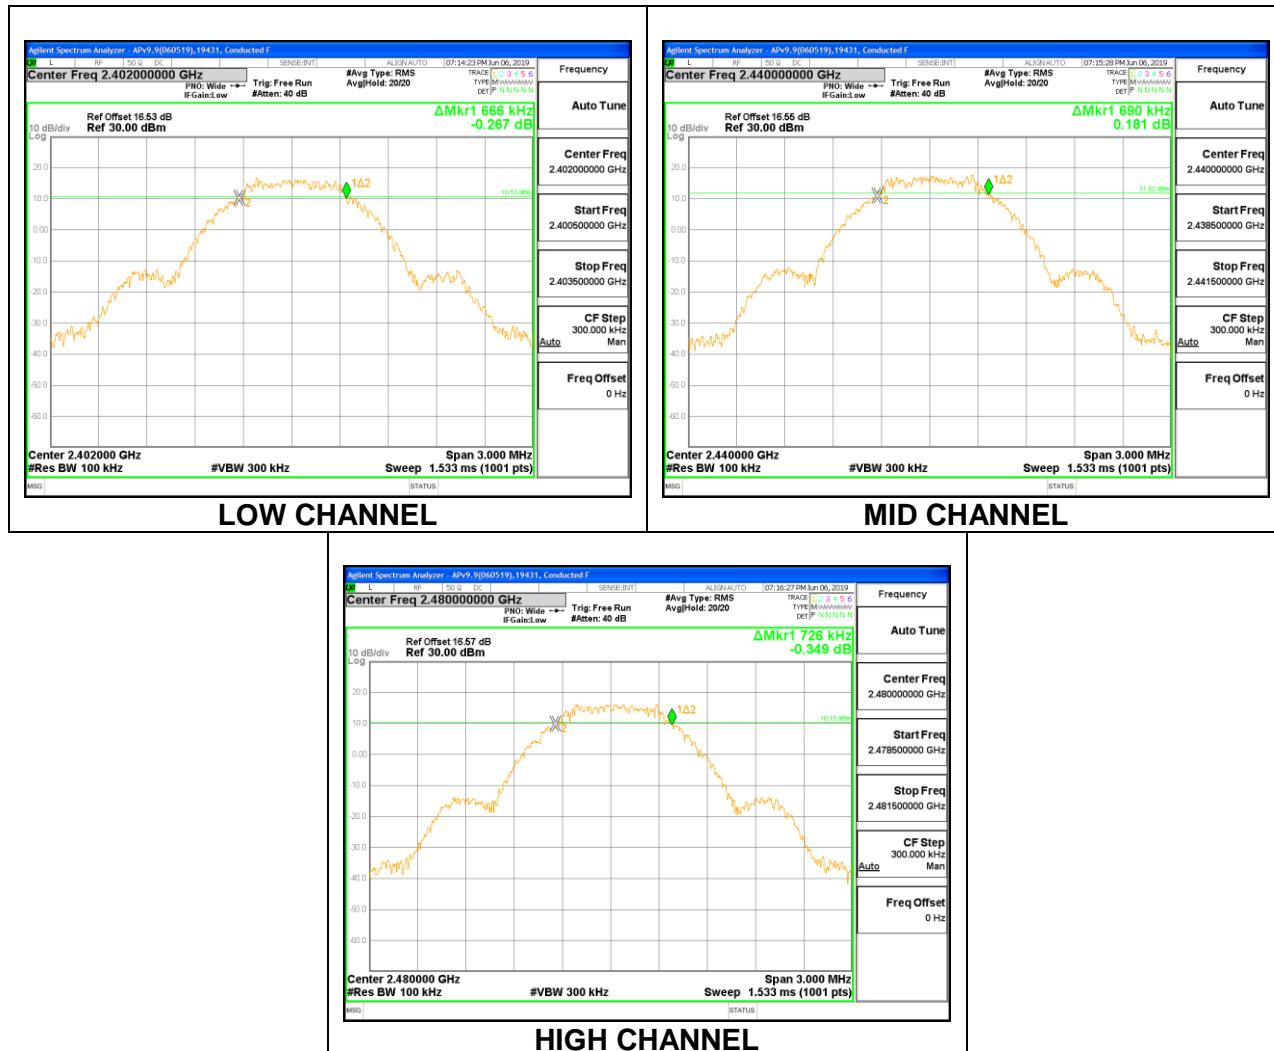

Antenna 3


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.678	0.5
Middle	2440	0.681	0.5
High	2480	0.675	0.5

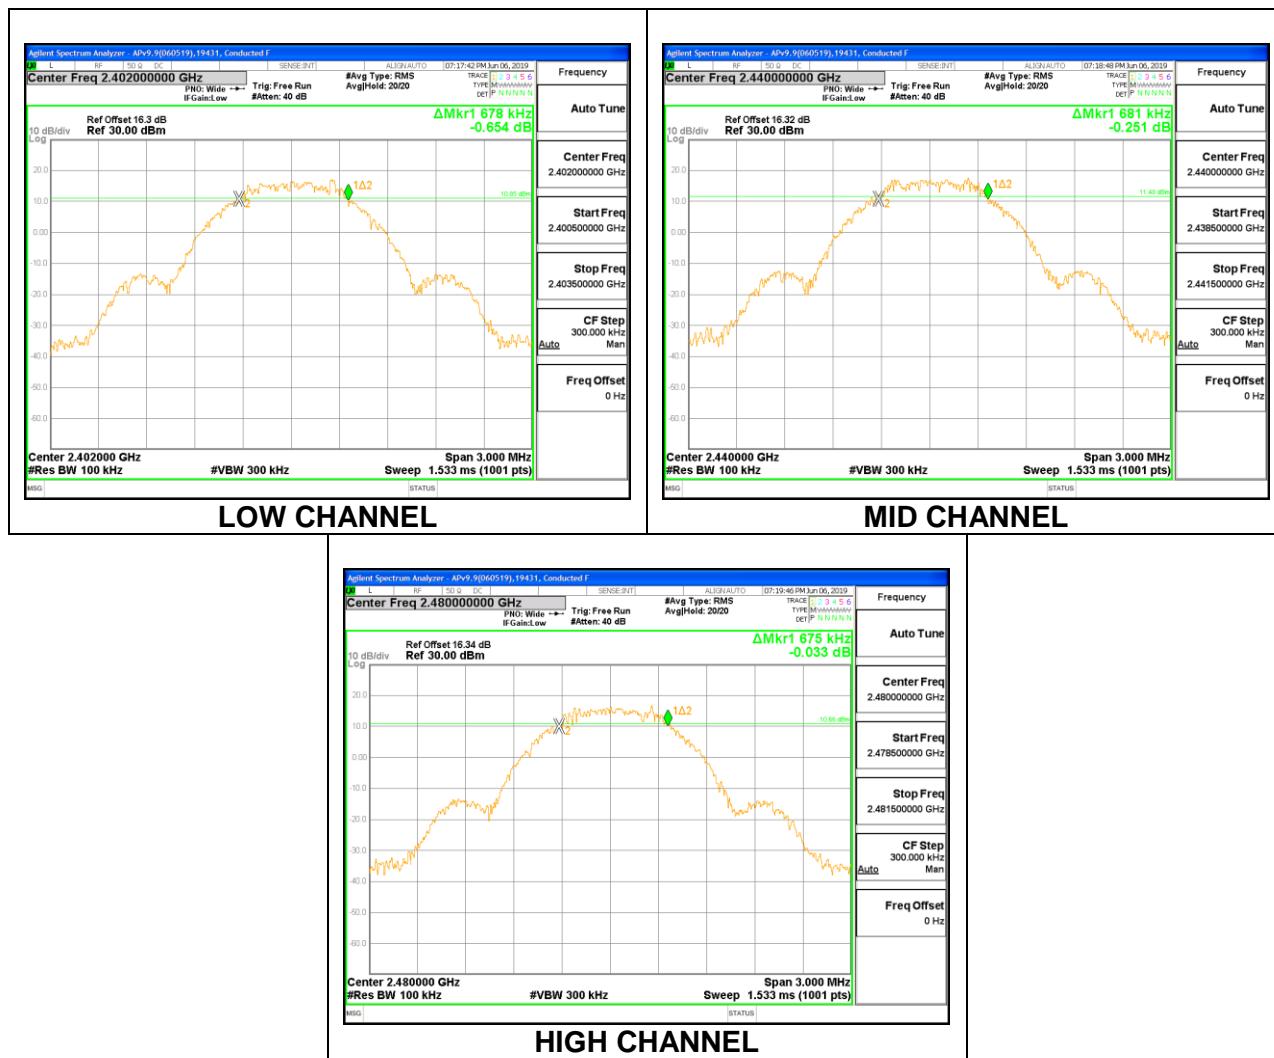

8.3.2. High Power BLE (2Mbps)


Antenna 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.251	0.5
Middle	2440	1.305	0.5
High	2480	1.281	0.5

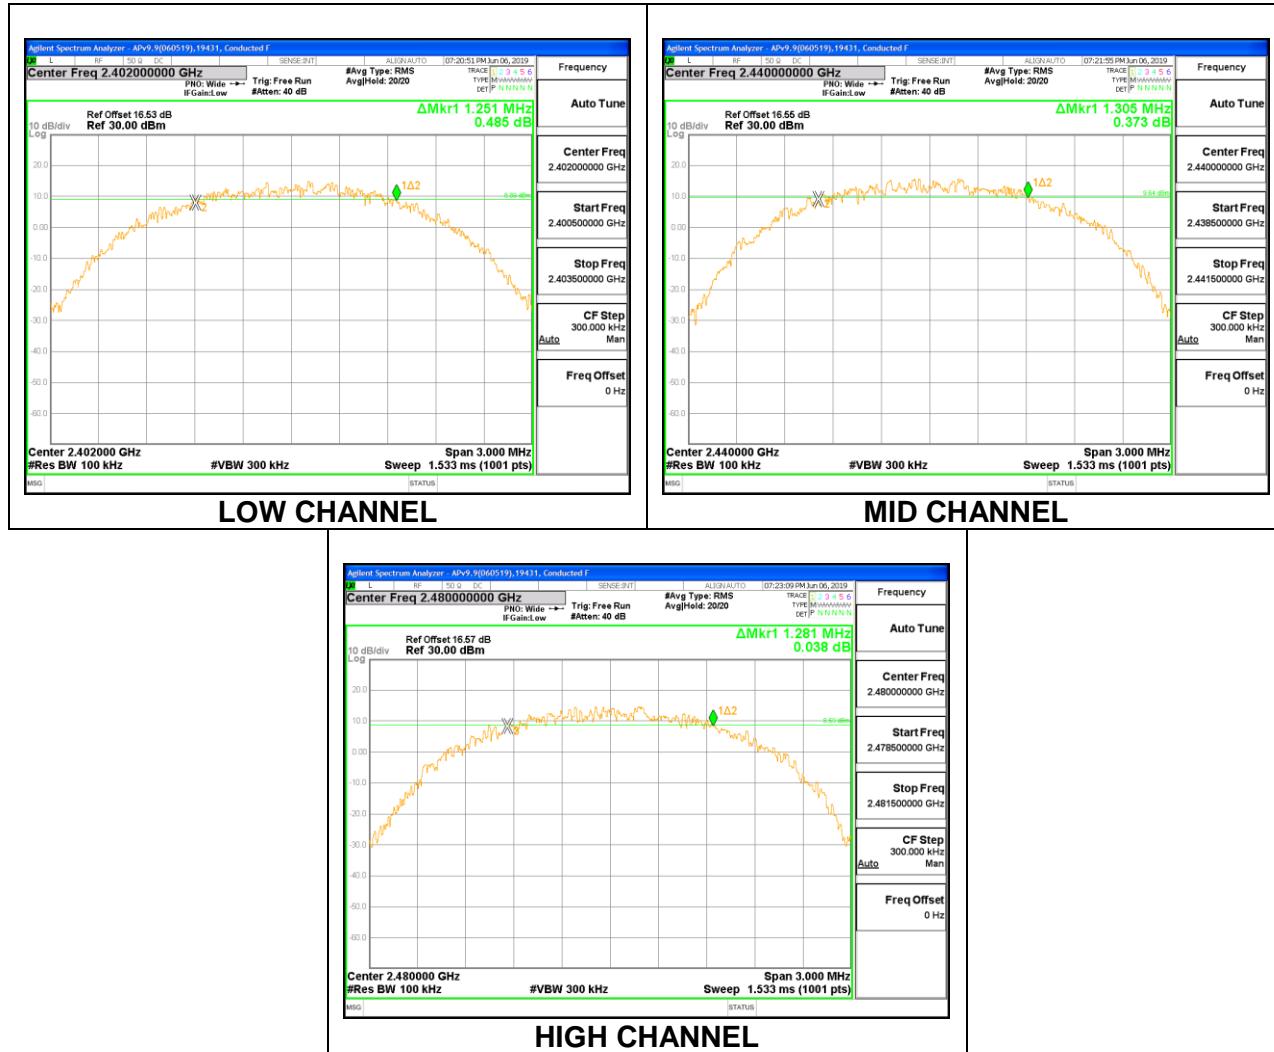

Antenna 3


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.305	0.5
Middle	2440	1.323	0.5
High	2480	1.317	0.5

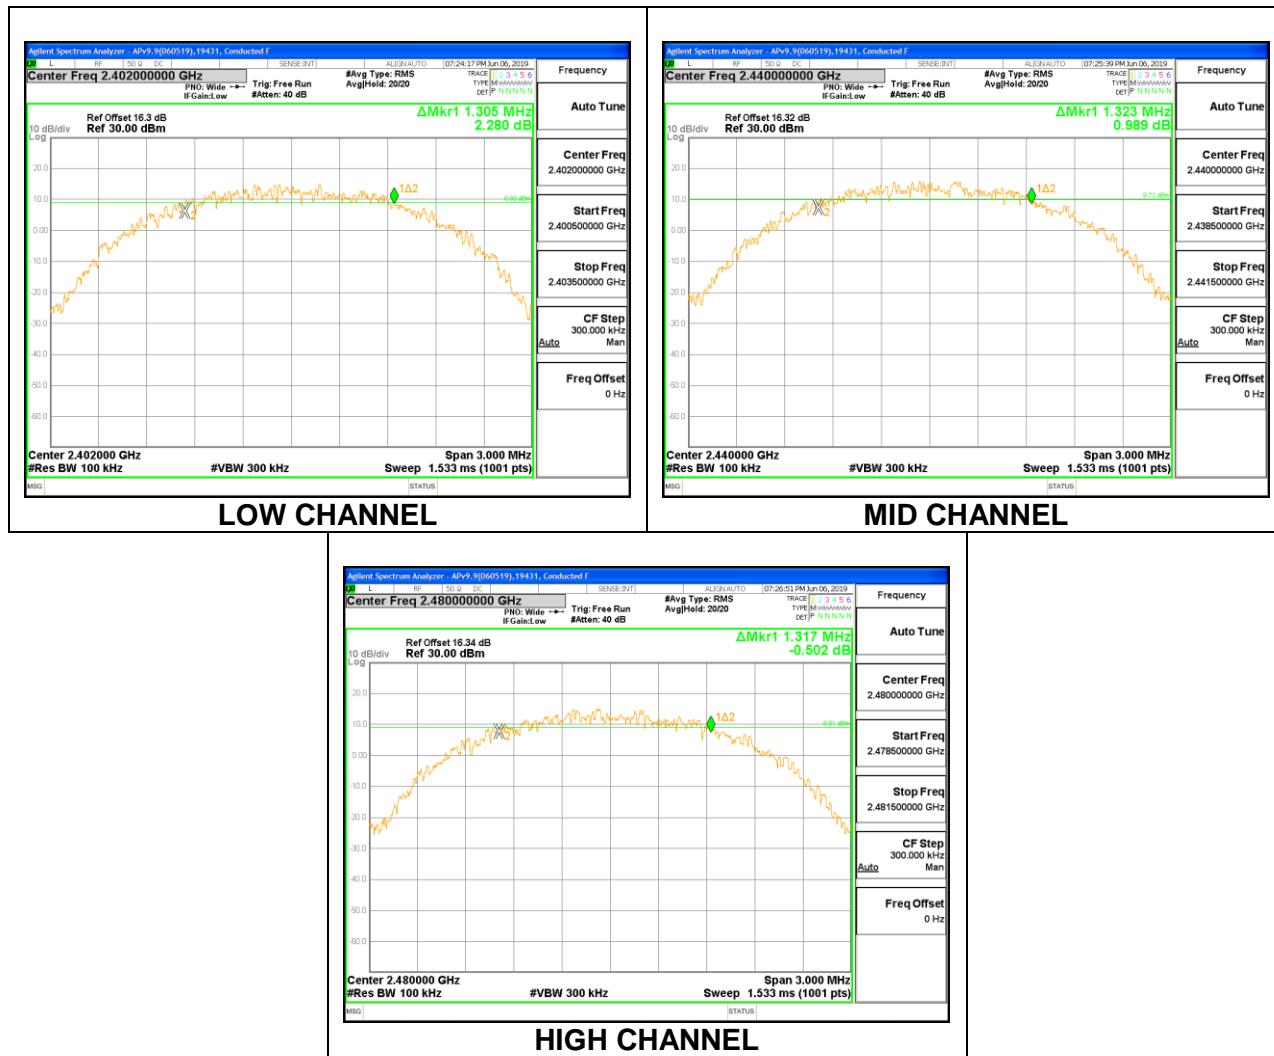

8.3.3. Low Power BLE (1Mbps)


Antenna 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.690	0.5
Middle	2440	0.684	0.5
High	2480	0.681	0.5

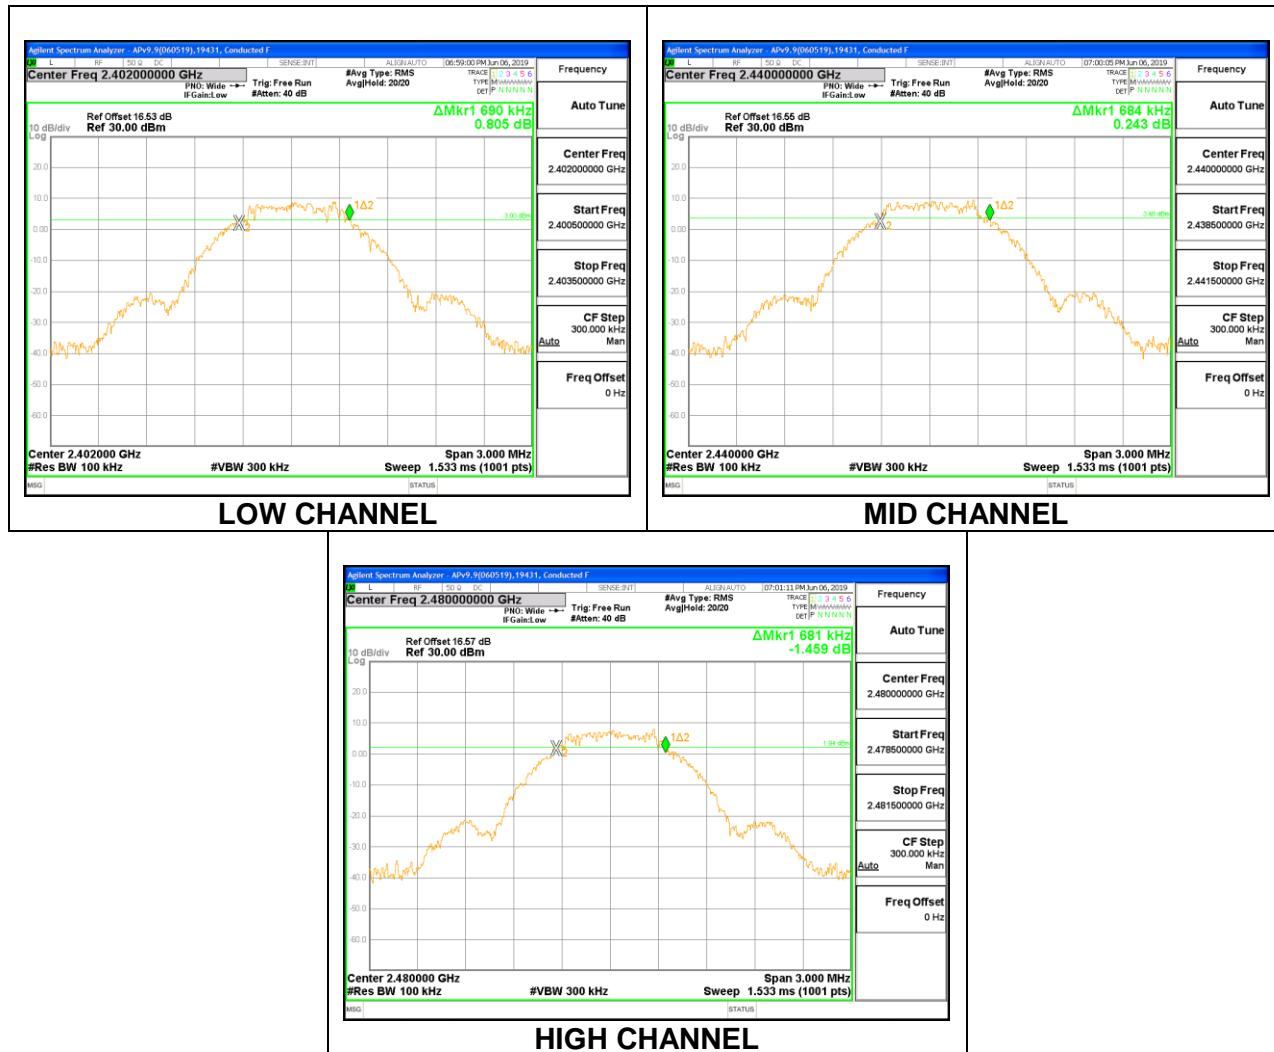

Antenna 3


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.702	0.5
Middle	2440	0.741	0.5
High	2480	0.693	0.5

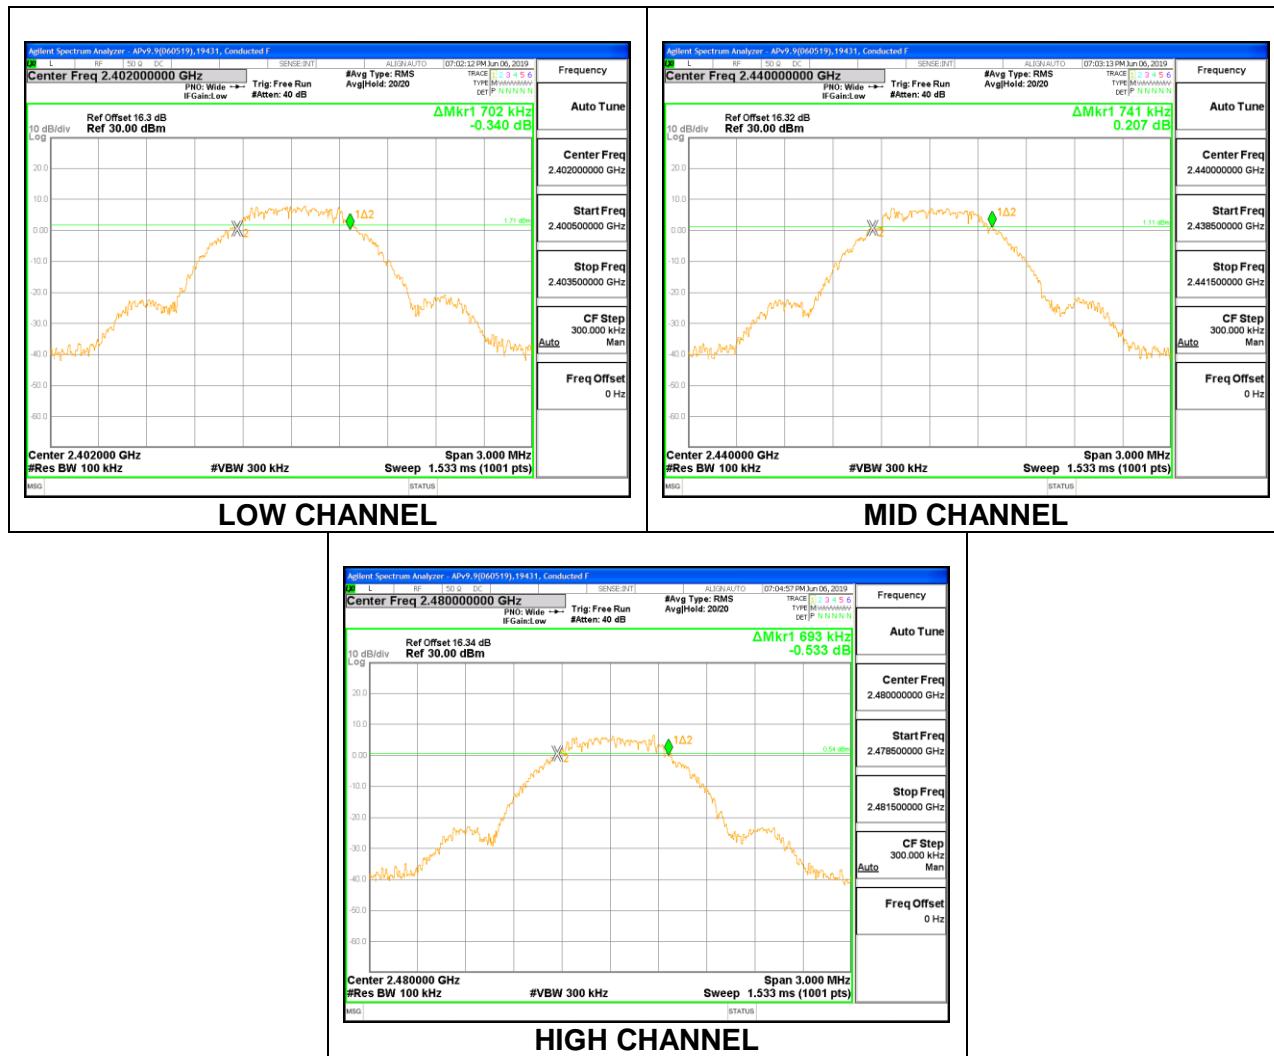

8.3.4. Low Power BLE (2Mbps)


Antenna 4

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.305	0.5
Middle	2440	1.302	0.5
High	2480	1.269	0.5

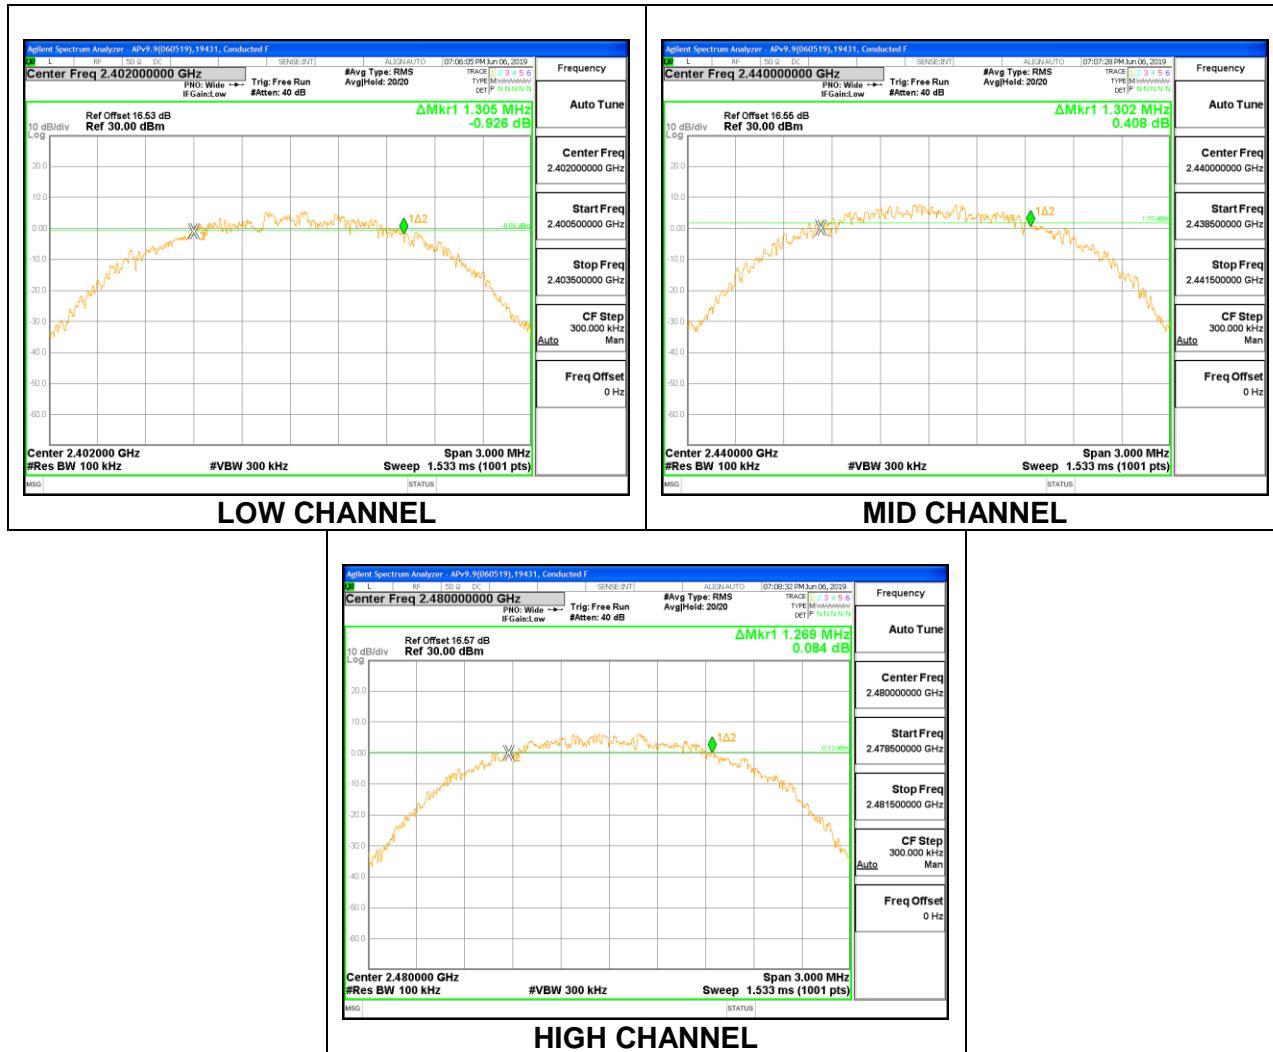

Antenna 3

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	1.293	0.5
Middle	2440	1.287	0.5
High	2480	1.377	0.5

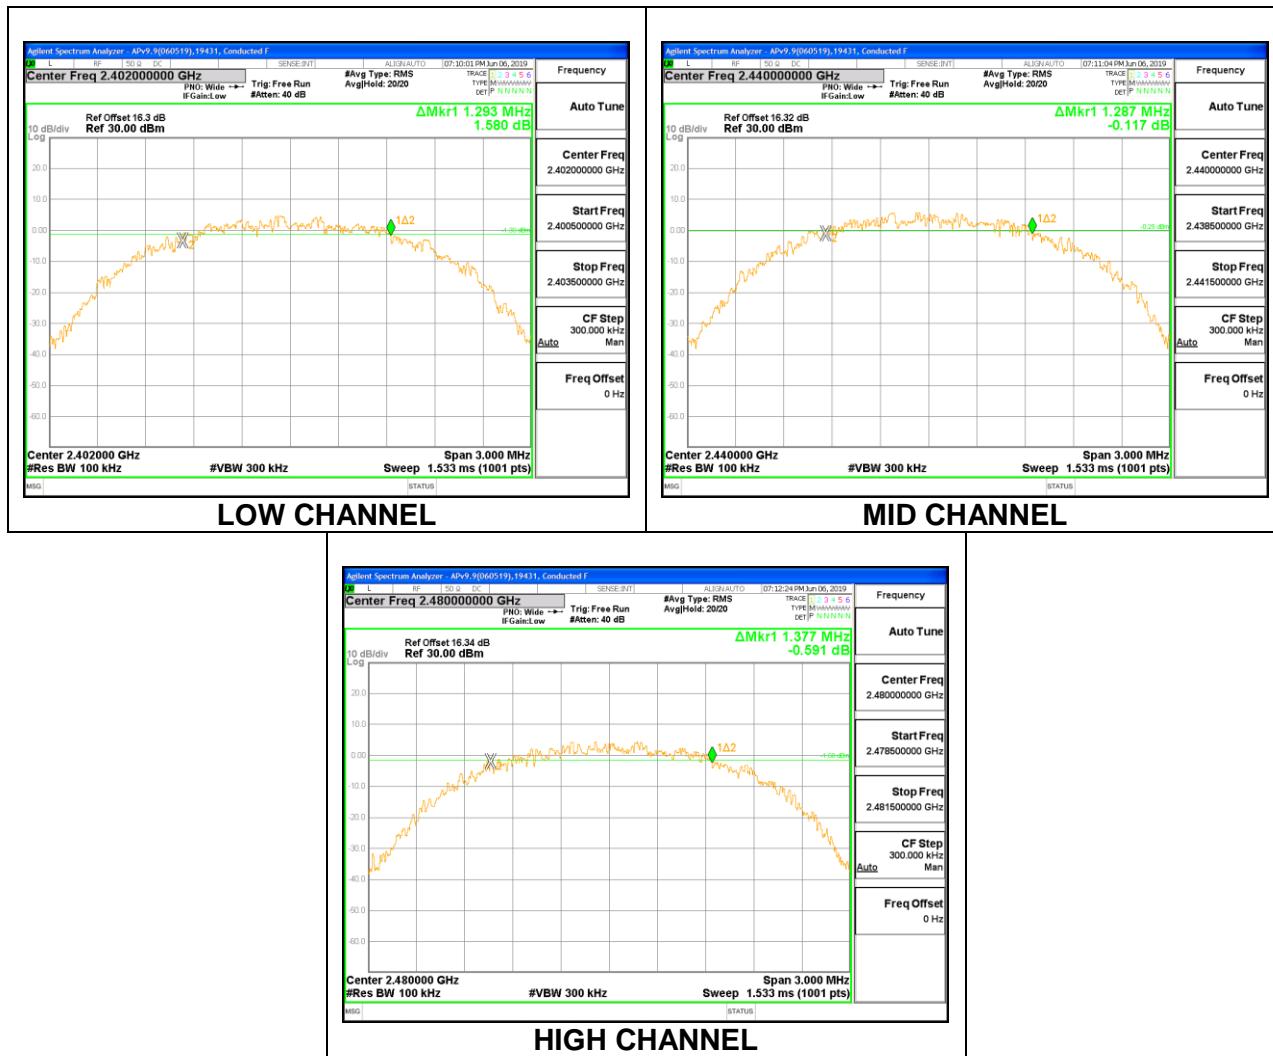

8.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS

8.4.1. High Power BLE (1Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.13	30	-12.870
Middle	2440	17.28	30	-12.720
High	2480	17.16	30	-12.840

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.75	30	-10.250
Middle	2440	19.72	30	-10.280
High	2480	19.69	30	-10.310

8.4.2. High Power BLE (2Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.20	30	-12.800
Middle	2440	17.22	30	-12.780
High	2480	17.15	30	-12.850

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.70	30	-10.300
Middle	2440	19.67	30	-10.330
High	2480	19.71	30	-10.290

8.4.3. Low Power BLE (1Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.71	30	-17.290
Middle	2440	12.73	30	-17.270
High	2480	12.75	30	-17.250

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.77	30	-17.230
Middle	2440	12.78	30	-17.220
High	2480	12.72	30	-17.280

8.4.4. Low Power BLE (2Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.77	30	-17.230
Middle	2440	12.69	30	-17.310
High	2480	12.71	30	-17.290

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.69	30	-17.310
Middle	2440	12.74	30	-17.260
High	2480	12.67	30	-17.330

8.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for a gated average reading of power.

RESULTS

8.5.1. High Power BLE (1Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	16.87
Middle	2440	16.92
High	2480	16.89

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.46
Middle	2440	19.42
High	2480	19.40

8.5.2. High Power BLE (2Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	16.93
Middle	2440	16.96
High	2480	16.89

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	19.42
Middle	2440	19.38
High	2480	19.47

8.5.3 Low Power BLE (1Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	12.40
Middle	2440	12.42
High	2480	12.43

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	12.40
Middle	2440	12.44
High	2480	12.39

8.5.4 Low Power BLE (2Mbps)

Antenna 4

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	12.44
Middle	2440	12.41
High	2480	12.43

Antenna 3

Tested By:	12492
Date:	7/24/2019

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	12.41
Middle	2440	12.44
High	2480	12.38

8.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

8.6.1. High Power BLE (1Mbps)


Antenna 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	2.769	8	-5.23
Middle	2440	3.329	8	-4.67
High	2480	3.280	8	-4.72

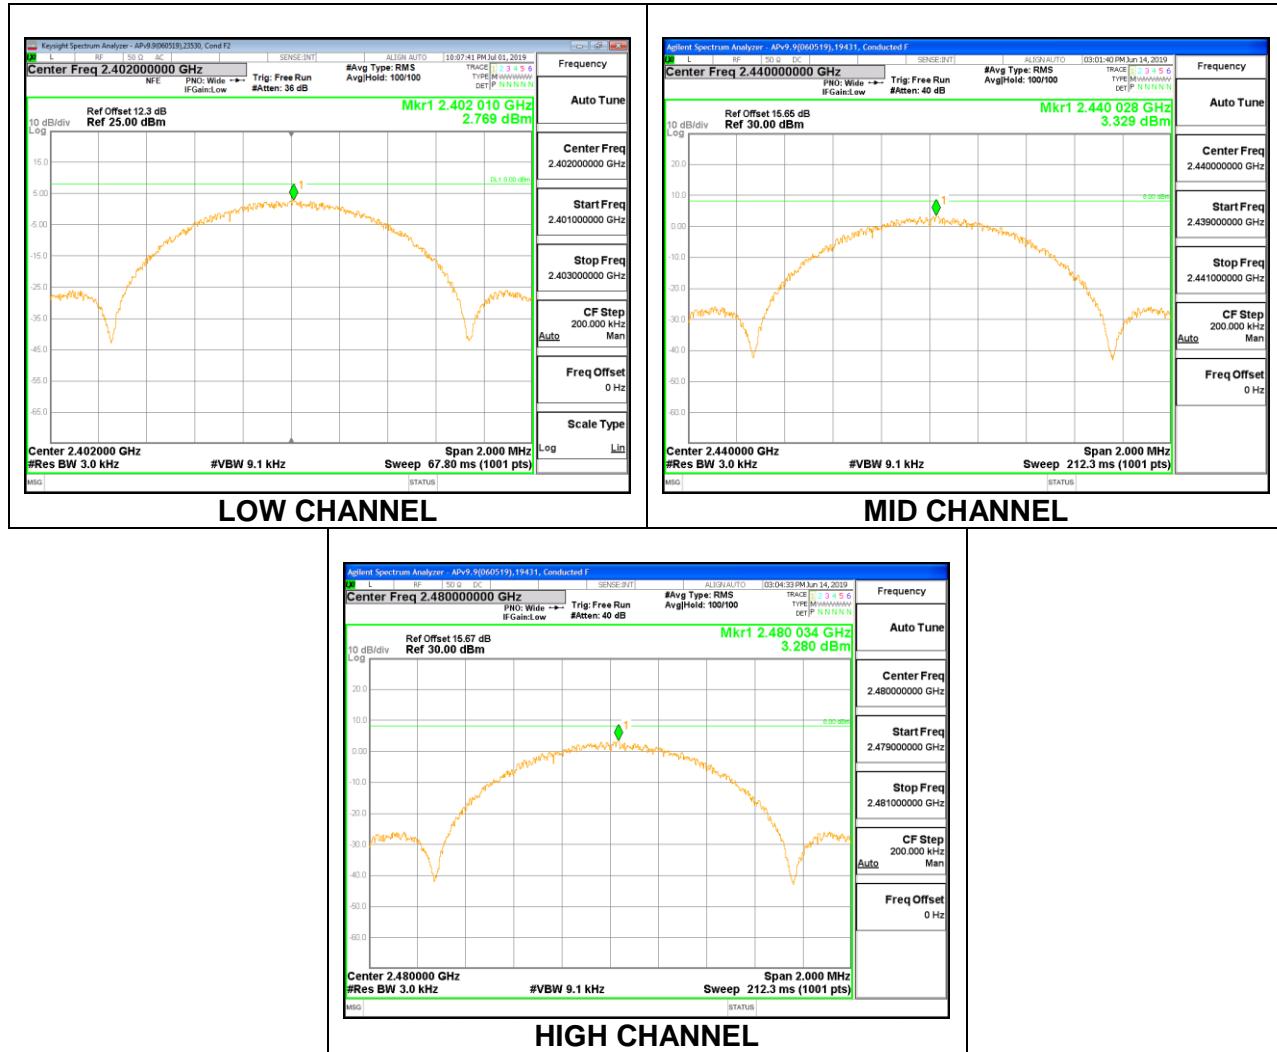

Antenna 3


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	2.770	8	-5.23
Middle	2440	2.842	8	-5.16
High	2480	2.823	8	-5.18

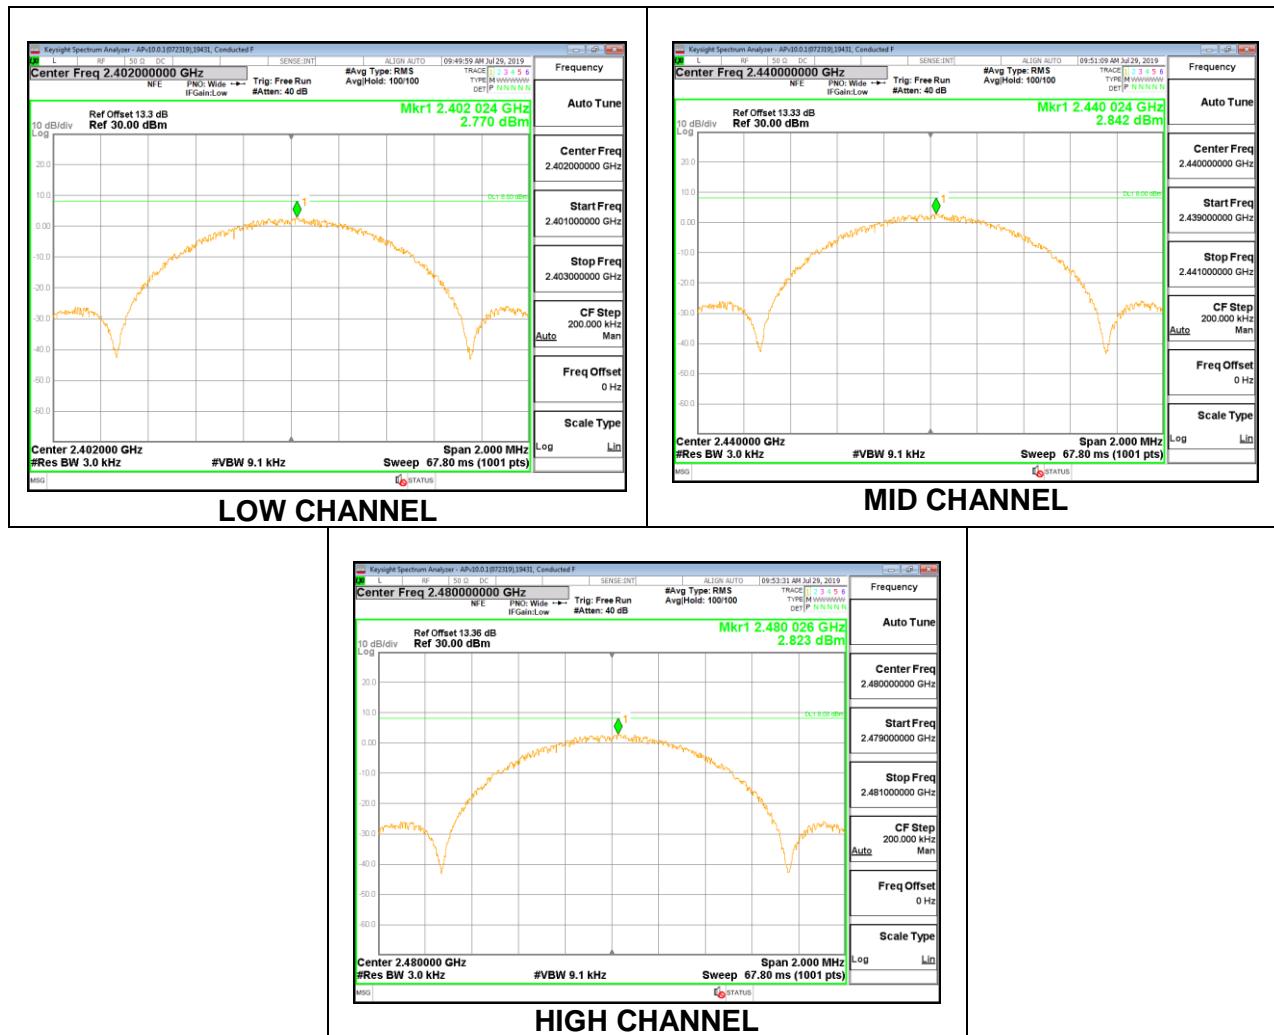

8.6.2. High Power BLE (2Mbps)


Antenna 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-0.689	8	-8.69
Middle	2440	-0.379	8	-8.38
High	2480	-0.726	8	-8.73

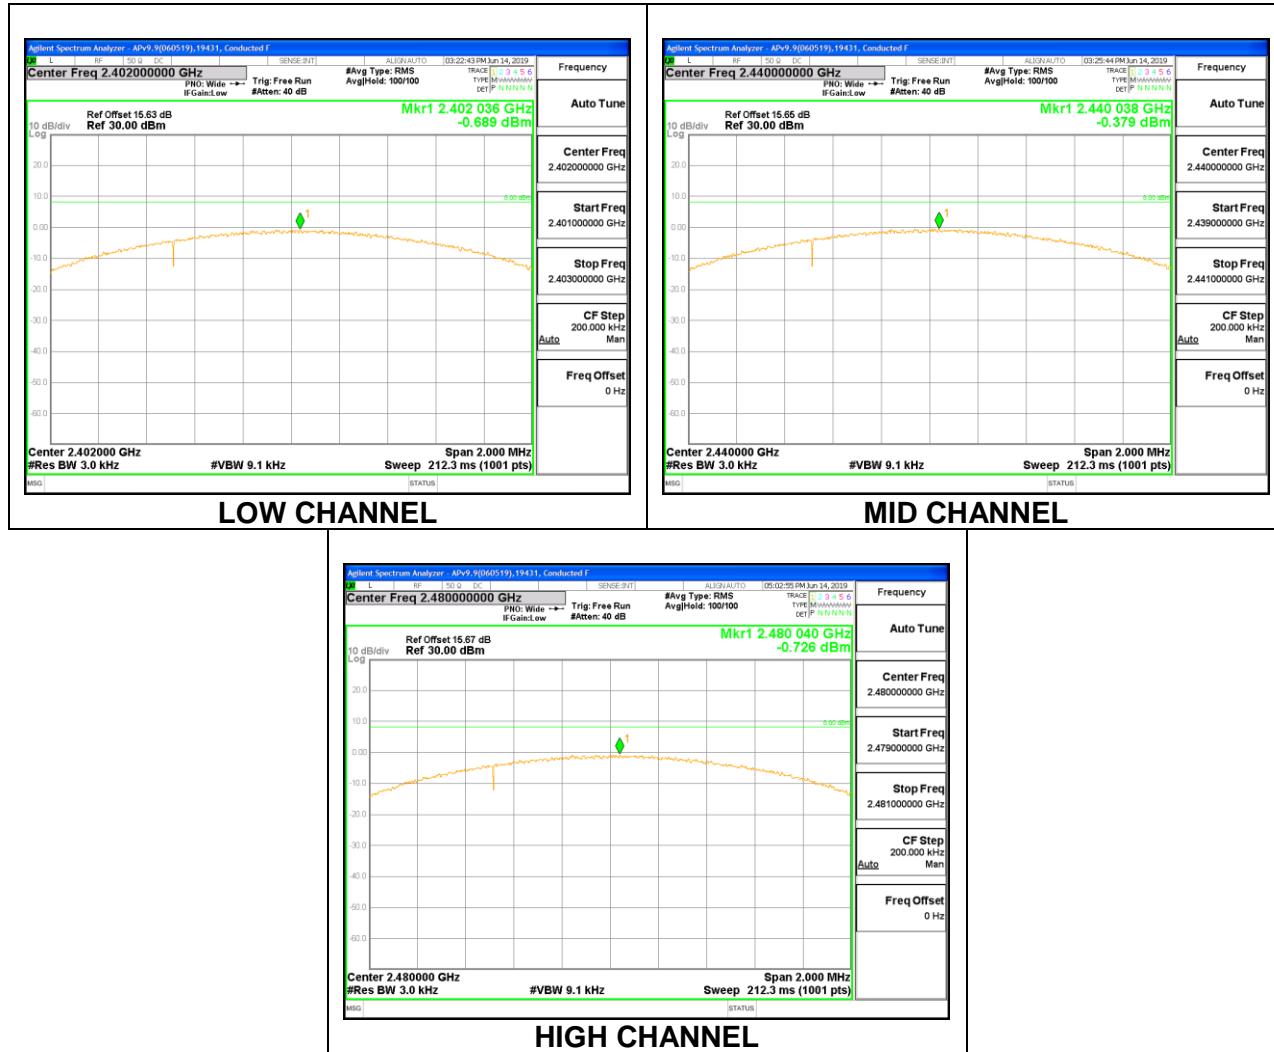

Antenna 3


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	0.104	8	-7.90
Middle	2440	-1.009	8	-9.01
High	2480	0.379	8	-7.62

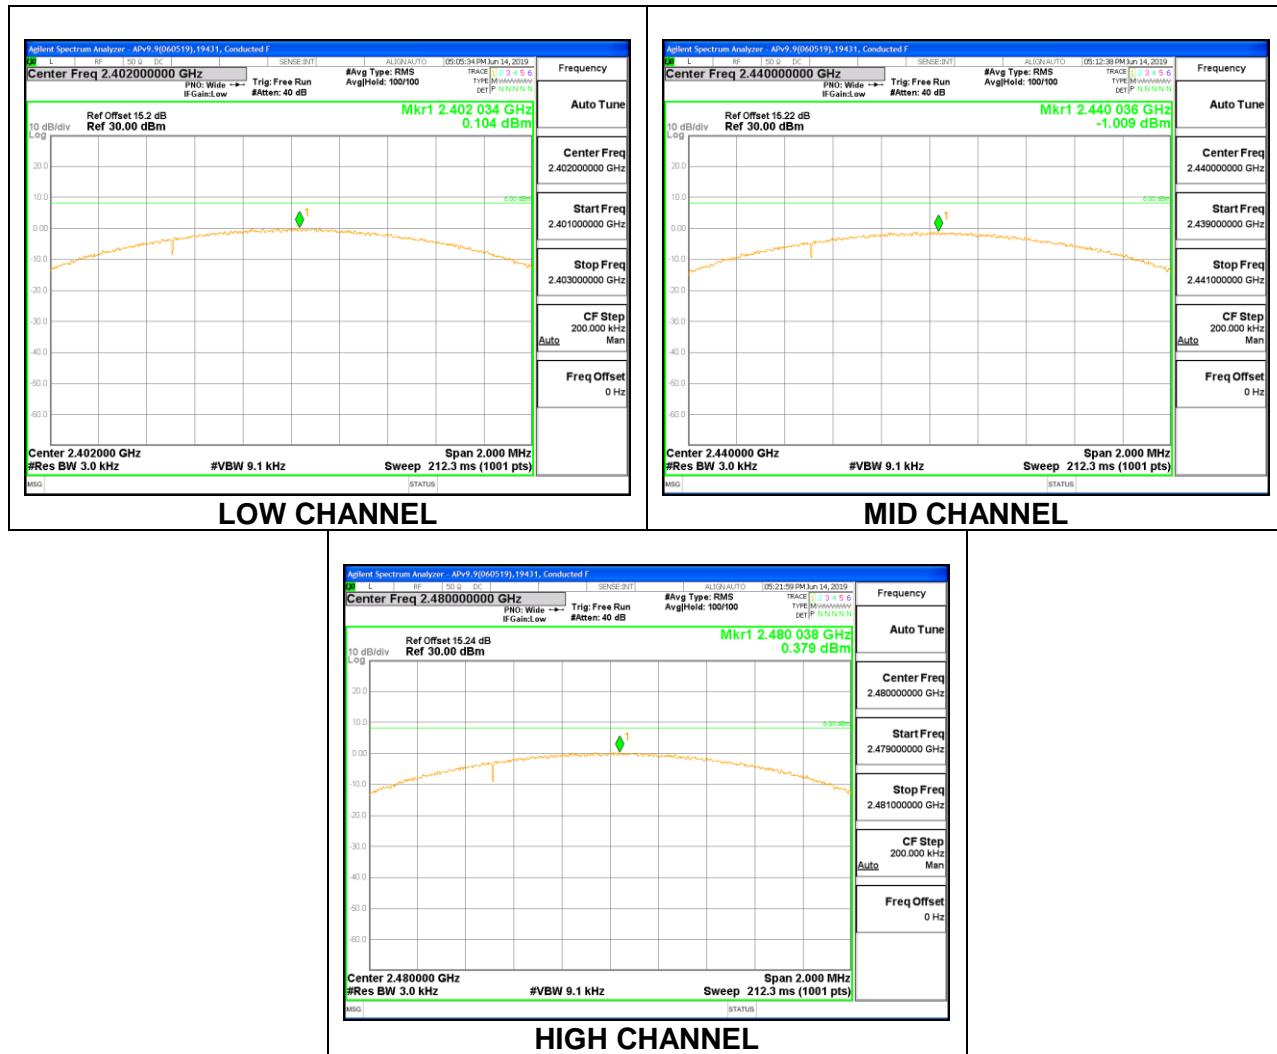

8.6.3. Low Power BLE (1Mbps)

Antenna 4

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-4.473	8	-12.47
Middle	2440	-4.403	8	-12.40
High	2480	-3.441	8	-11.44

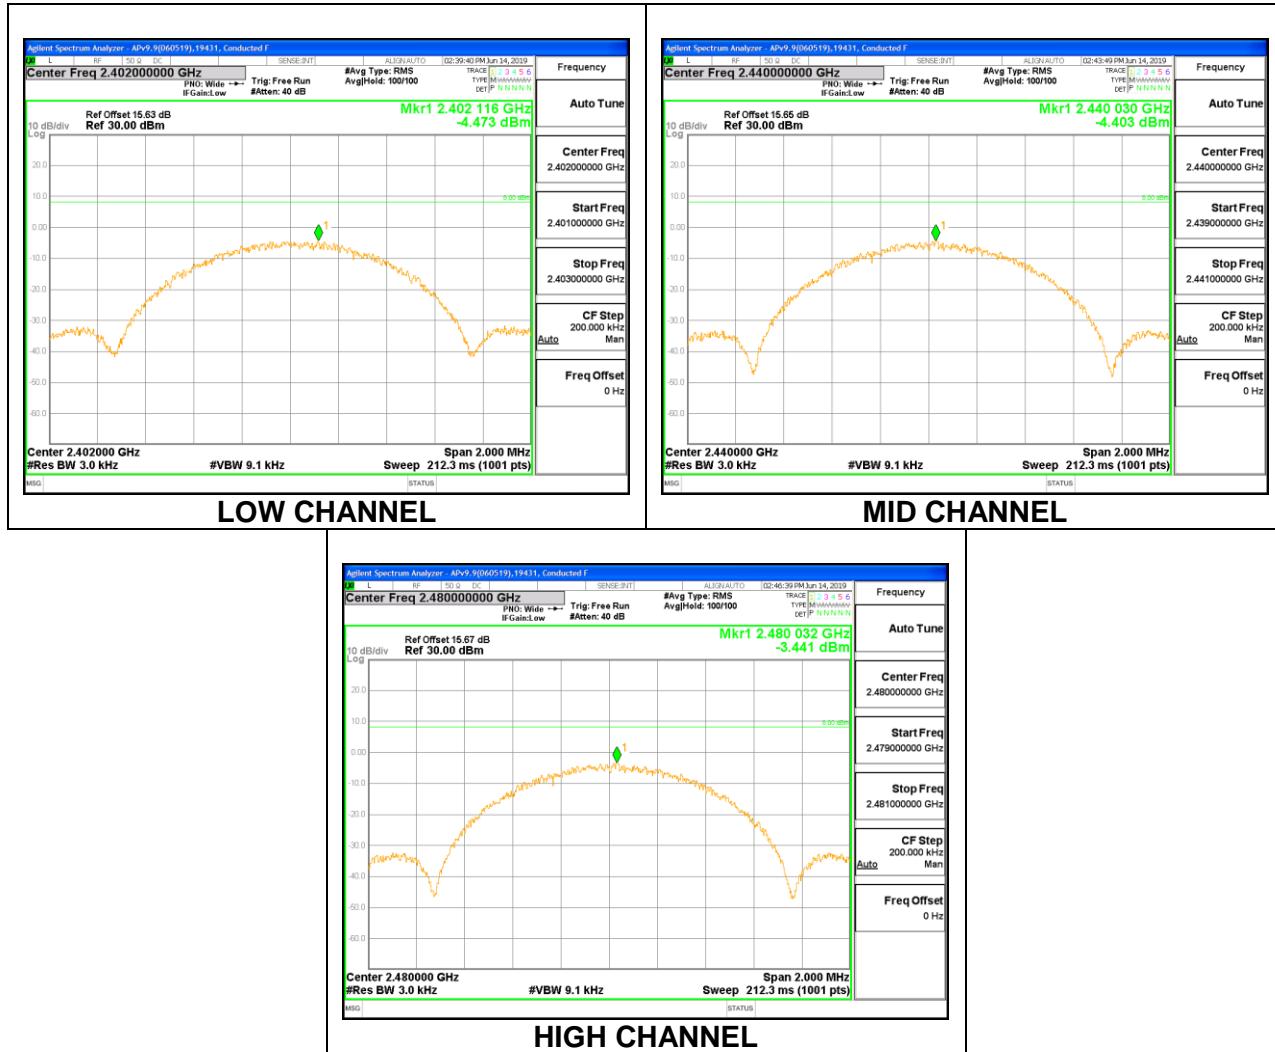

Antenna 3

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-3.729	8	-11.73
Middle	2440	-3.631	8	-11.63
High	2480	-4.294	8	-12.29

