



FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1

CERTIFICATION TEST REPORT

FOR

TABLET DEVICE

MODEL NUMBER: A1674, A1675

**FCC ID: BCGA1674
IC: 579C-A1674**

REPORT NUMBER: 15U22428-E3V3

ISSUE DATE: FEBRUARY 11, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	02/03/16	Initial Issue	M. Mekuria
V2	02/09/16	Addressed TCB's Questions	E. Yu
V3	02/11/16	Addressed TCB's Questions	E. Yu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY</i>	8
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	9
5.2. <i>DESCRIPTION OF MODELS DIFFERENCES</i>	9
5.3. <i>MAXIMUM OUTPUT POWER</i>	9
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	9
5.5. <i>SOFTWARE AND FIRMWARE</i>	9
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i>	10
5.7. <i>DESCRIPTION OF TEST SETUP</i>	11
6. TEST AND MEASUREMENT EQUIPMENT	17
7. MEASUREMENT METHODS	18
8. ANTENNA PORT TEST RESULTS	19
8.1. <i>ON TIME AND DUTY CYCLE</i>	19
8.2. <i>802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)</i>	22
8.2.1. 6 dB BANDWIDTH.....	22
8.2.2. 99% BANDWIDTH.....	26
8.2.3. AVERAGE POWER	30
8.2.4. OUTPUT POWER	31
8.2.5. POWER SPECTRAL DENSITY	33
8.2.6. OUT-OF-BAND EMISSIONS	37
8.3. <i>802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA A)</i>	44
8.3.1. 6 dB BANDWIDTH.....	44
8.3.2. 99% BANDWIDTH.....	48
8.3.3. AVERAGE POWER	52
8.3.4. OUTPUT POWER	53
8.3.5. POWER SPECTRAL DENSITY	55
8.3.6. OUT-OF-BAND EMISSIONS	59
8.4. <i>802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA D)</i>	65
8.4.1. 6 dB BANDWIDTH.....	65
8.4.2. 99% BANDWIDTH.....	69
8.4.3. AVERAGE POWER	73

8.4.4. OUTPUT POWER	74
8.4.5. POWER SPECTRAL DENSITY	76
8.4.6. OUT-OF-BAND EMISSIONS	80
8.5. 802.11g SISO MODE IN THE 2.4 GHz BAND (ANTENNA B).....	86
8.6. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)	87
8.6.1. 6 dB BANDWIDTH.....	87
8.6.2. 99% BANDWIDTH.....	91
8.6.3. AVERAGE POWER	95
8.6.4. OUTPUT POWER	96
8.6.5. POWER SPECTRAL DENSITY	98
8.6.6. OUT-OF-BAND EMISSIONS	102
8.7. 802.11g SISO MODE IN THE 2.4 GHz BAND (ANTENNA A).....	109
8.8. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA A)	110
8.8.1. 6 dB BANDWIDTH.....	110
8.8.2. 99% BANDWIDTH.....	114
8.8.3. AVERAGE POWER	118
8.8.4. OUTPUT POWER	119
8.8.5. POWER SPECTRAL DENSITY	121
8.8.6. OUT-OF-BAND EMISSIONS	125
8.9. 802.11g SISO MODE IN THE 2.4 GHz BAND (ANTENNA D).....	132
8.10. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA D).....	133
8.10.1. 6 dB BANDWIDTH	133
8.10.2. 99% BANDWIDTH	137
8.10.3. AVERAGE POWER	141
8.10.4. OUTPUT POWER	142
8.10.5. POWER SPECTRAL DENSITY	144
8.10.6. OUT-OF-BAND EMISSIONS.....	148
8.11. 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA B)...	154
8.12. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA B)	155
8.12.1. 6 dB BANDWIDTH	155
8.12.2. 99% BANDWIDTH	163
8.12.3. AVERAGE POWER	171
8.12.4. OUTPUT POWER	172
8.12.5. POWER SPECTRAL DENSITY	174
8.12.6. OUT-OF-BAND EMISSIONS.....	182
8.13. 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA D) ..	197
8.14. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA D)	198
8.14.1. 6 dB BANDWIDTH	198
8.14.2. 99% BANDWIDTH	206
8.14.3. AVERAGE POWER	214
8.14.4. OUTPUT POWER	215
8.14.5. POWER SPECTRAL DENSITY	217
8.14.6. OUT-OF-BAND EMISSIONS.....	225
9. RADIATED TEST RESULTS.....	240

9.1. LIMITS AND PROCEDURE	240
9.2. TRANSMITTER ABOVE 1 GHz	241
9.2.1. 802.11b 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA B)	241
9.2.2. 802.11b 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA A)	259
9.2.3. 802.11b 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA D)	277
9.2.4. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA B)	295
9.2.5. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA A)	315
9.2.6. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND (ANTENNA D)	335
9.2.7. 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA B)	357
9.2.8. 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA D)	379
9.3. WORST-CASE BELOW 1 GHz	401
9.4. WORST-CASE 18 to 26 GHz	403
10. AC POWER LINE CONDUCTED EMISSIONS	405
10.1. <i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i>	<i>406</i>
10.2. <i>EUT POWERED BY HOST PC VIA USB CABLE</i>	<i>408</i>
11. SETUP PHOTOS	410

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1674, A1675

SERIAL NUMBER: DLXQ00ZH0JF (Conducted); DLXQL01HH0JF (Radiated)


DATE TESTED: NOVEMBER 03, 2015 TO JANUARY 20, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Tested By:



MENGISTU MEKURIA
PROJECT LEADER
UL VERIFICATION SERVICES INC.

ERIC YU
EMC ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r04, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +

Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1xRTT/1xAdvanced/EVDO Rev.A /WCDMA/HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation/TDD/TD-SCDMA radio, IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF MODELS DIFFERENCES

Model tested: A1674. The Models A1674 & A1675 have one FCC ID: BCGA1674 and IC ID: 579C-A1674

Both Model A1674 and A1675 have identical PCB layout, design and functionality, except that A1674 supports second electronic-UICC based SIM or "soft SIM" (called eSIM) beside the regular UICC based SIM and A1675 will come with eSIM removed.

RF and electromagnetic characteristic are independent of the eSIM element. Both models have exactly same technology and band support.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 1TX	19.98	99.54
2412 - 2472	802.11g 1TX	Covered by HT20 1TX	
2412 - 2472	802.11g 2TX	Covered by HT20 2TX	
2412 - 2472	802.11n HT20 1TX	24.59	287.74
2412 - 2472	802.11n HT20 2TX	27.22	527.23

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)		
	Antenna A	Antenna B	Antenna D
2.4	-0.18	-1.75	0.96

5.5. SOFTWARE AND FIRMWARE

The software installed in the EUT during testing was 13E31820k.

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y orientation was the worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

The target power for 802.11g and 802.11n HT20 1TX are the same and use the same modulation (OFDM).

For radiated tests, channel 1 and channel 13 were set to highest power to ensure worst case emissions were measured.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4 GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found. Simultaneous transmission does not support BT/BLE High Power Mode.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number		FCC ID
Laptop	Dell	Latitude 3540	6LNG802		N/A
Laptop AC/DC adapter	Dell	FA90PE1-00	CN-0CM889-73245-95L-4954-A00		N/A
Earphone	Apple	NA	NA		N/A
EUT AC/DC adapter	Apple	A1385	D293062F3WVDHLHCF		N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

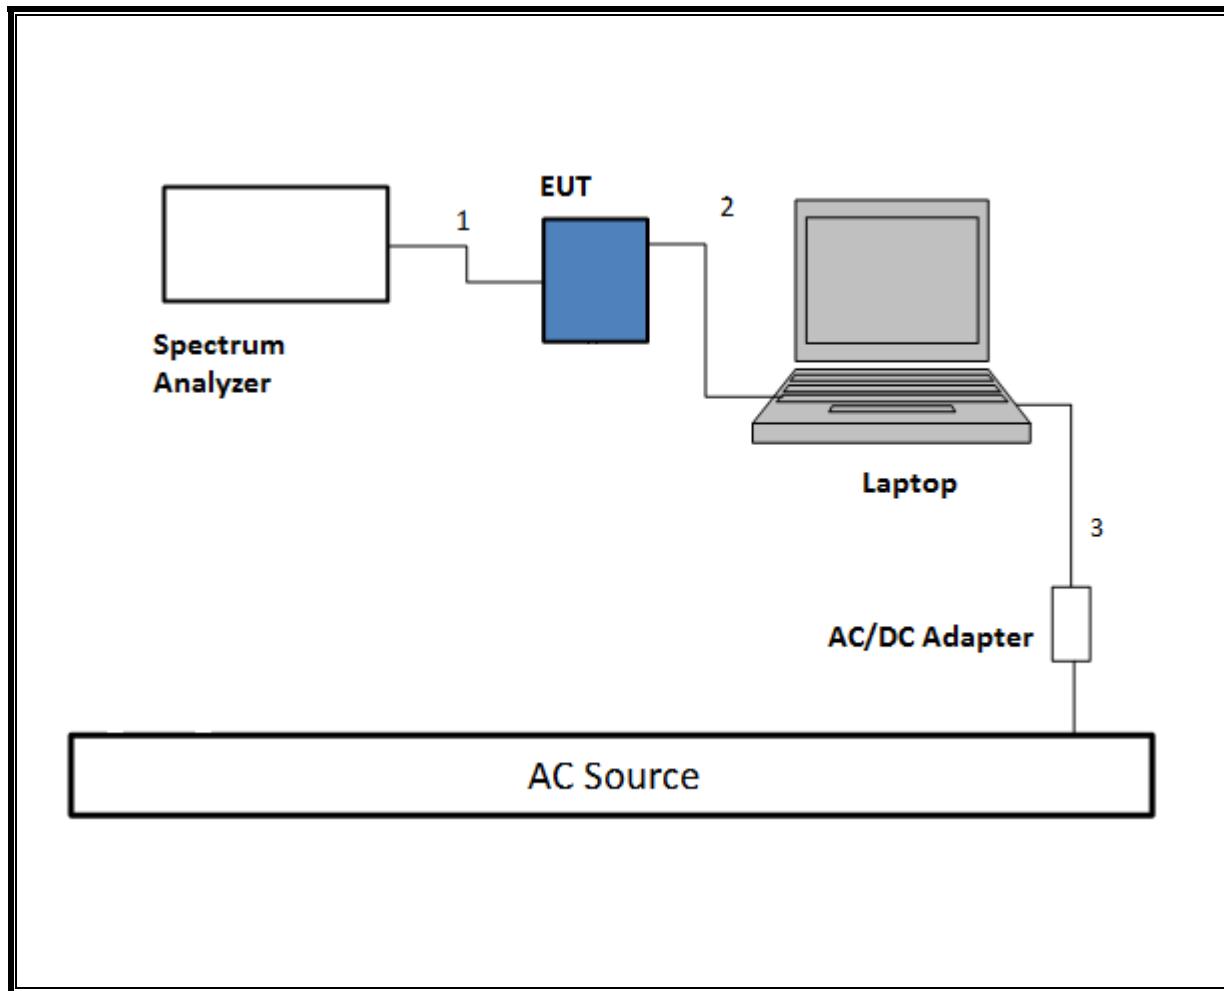

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.


SETUP DIAGRAM

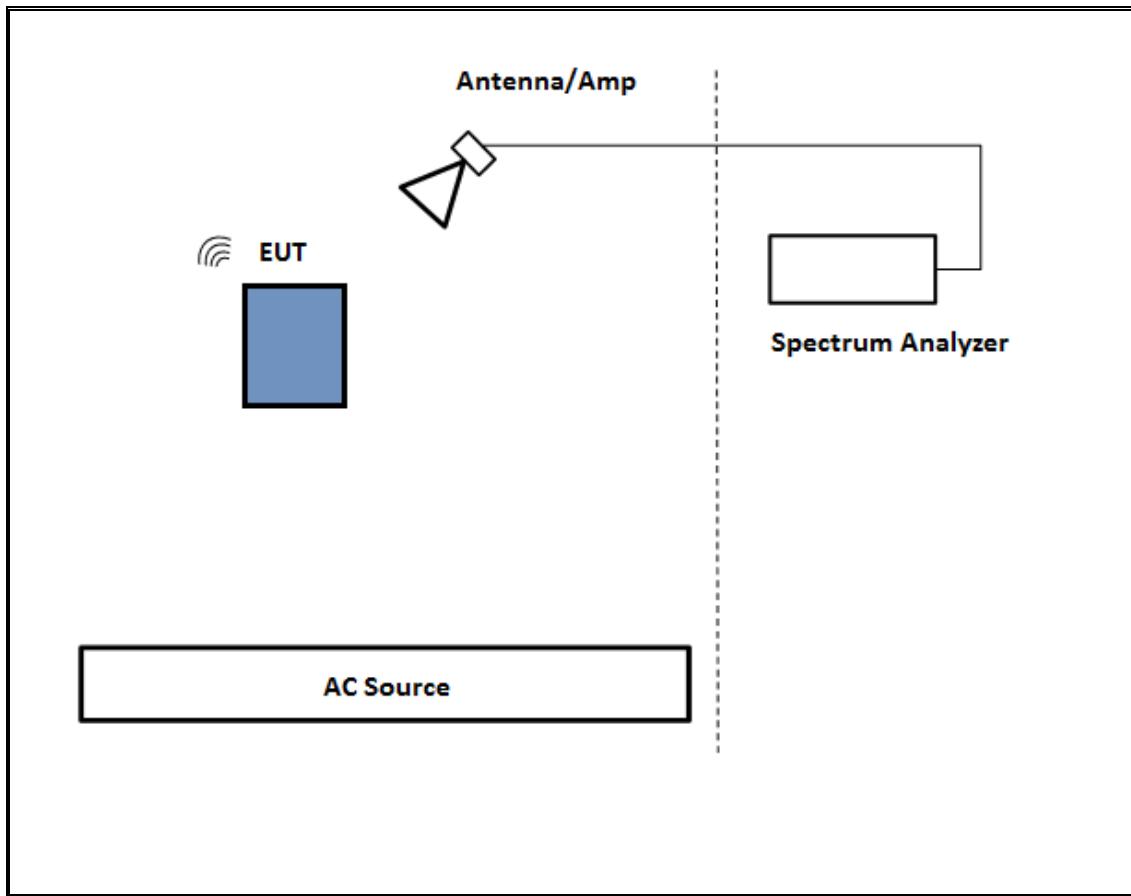

TEST SETUP- BELOW 1GHz

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.


SETUP DIAGRAM

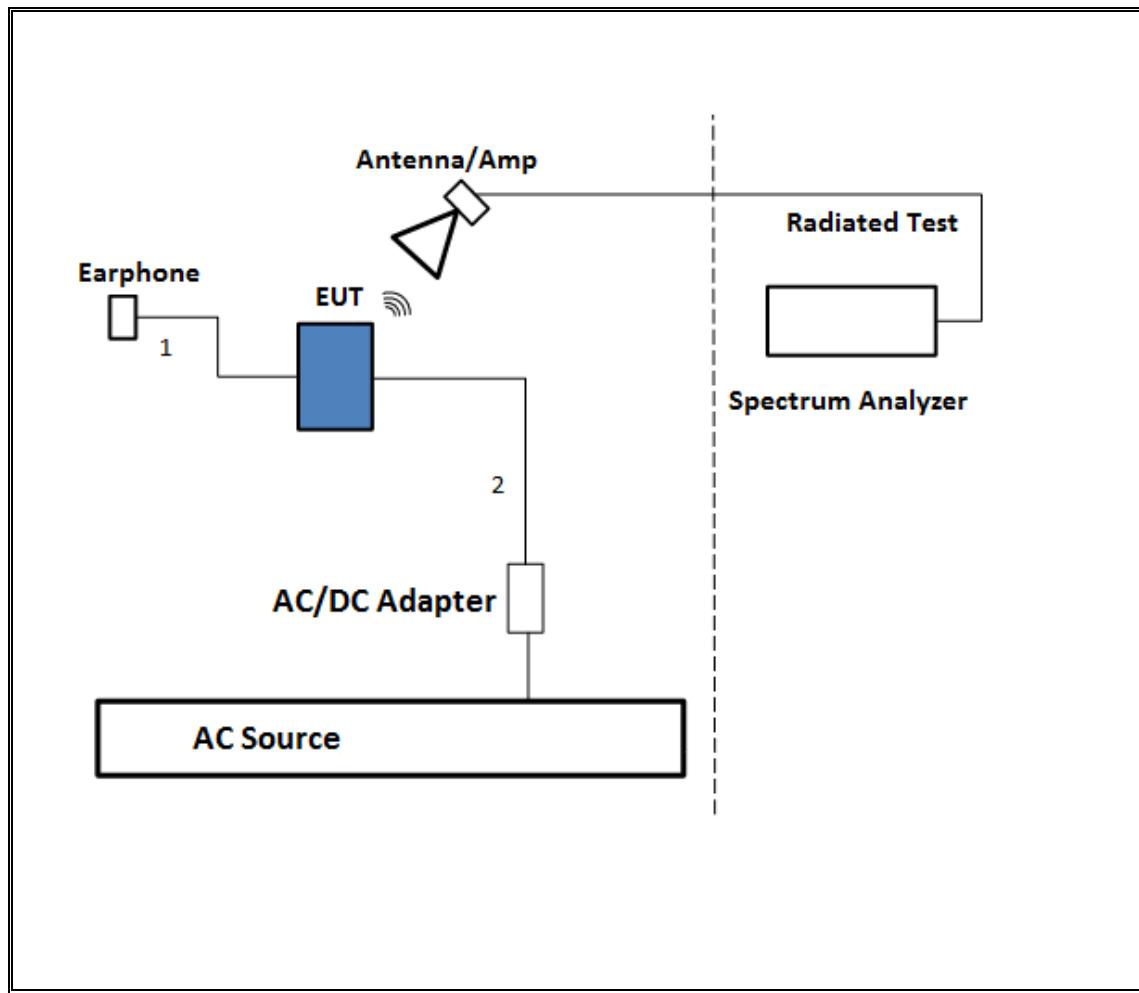

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

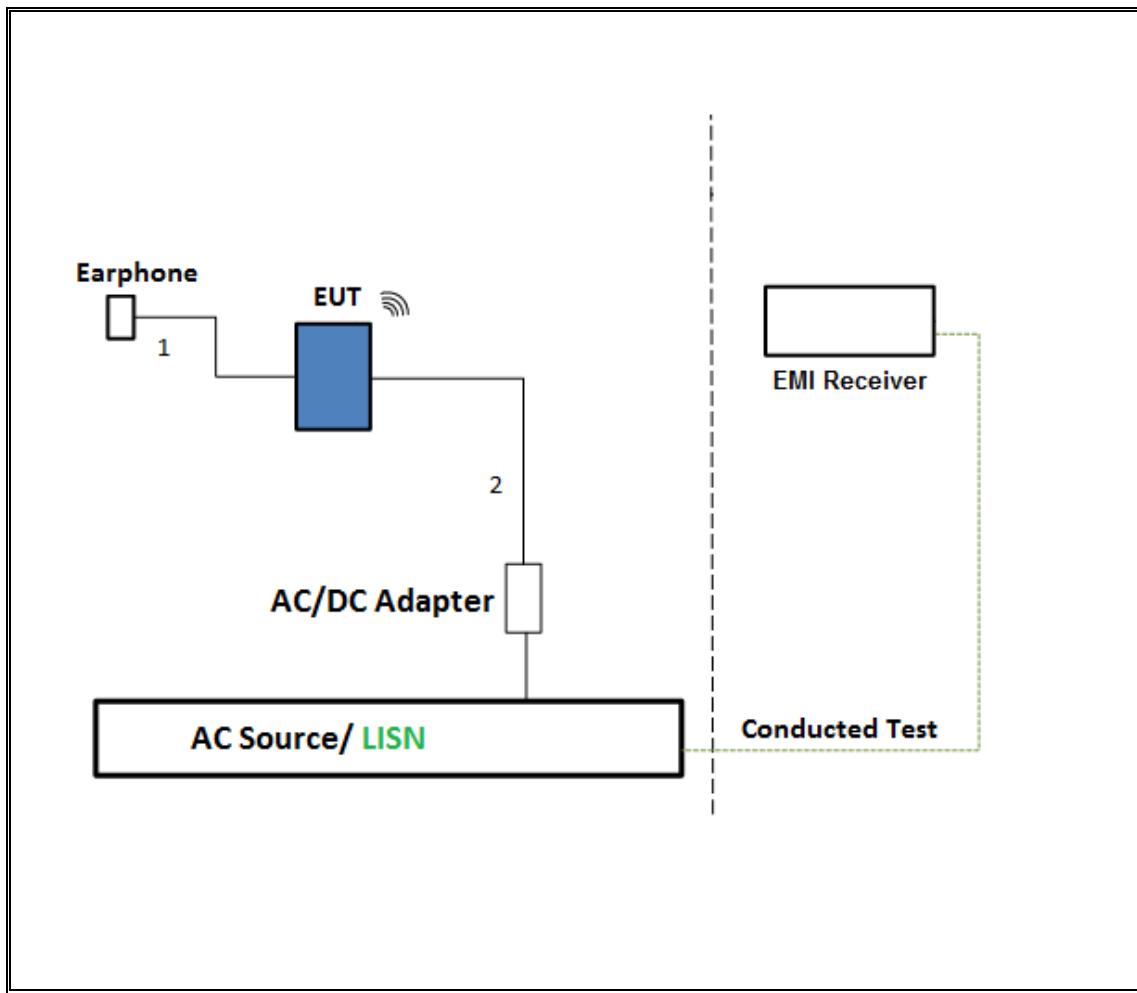

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

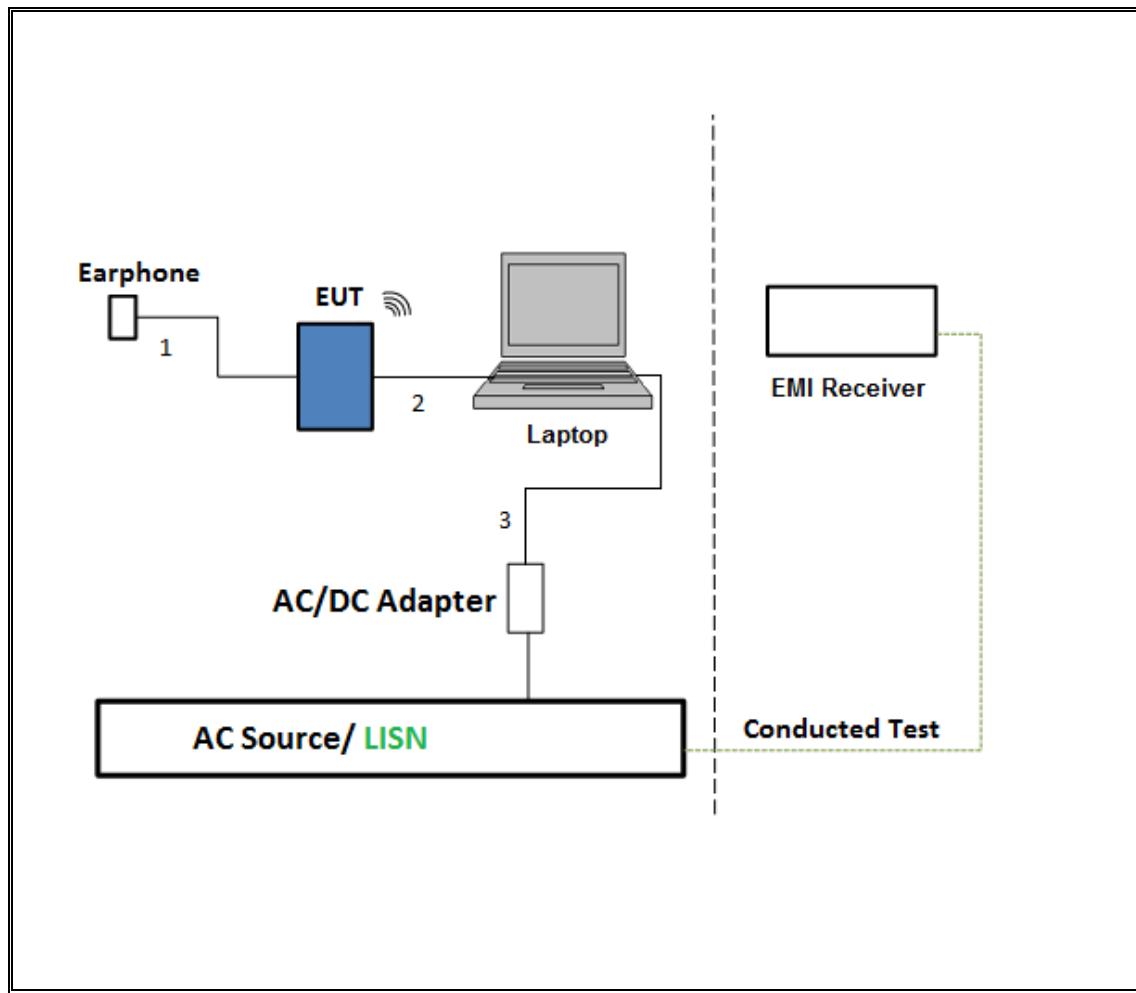

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Cal Date	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	2/10/2015	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	9/25/2015	9/25/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	8/12/2015	8/12/2016
Amplifier, 1 - 18GHz	Miteq	AMF-4D-01000800-30-29P	8/12/2015	8/12/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	6/9/2015	6/9/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	3/31/2015	3/31/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	11/19/2015	11/19/2016
Power Meter, P-series single channel	Agilent	N1911A	4/7/2015	4/7/2016
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	2/27/2015	2/27/2016
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	5/12/2015	5/12/2016
Spectrum Analyzer, 40 GHz	Agilent	8564E	8/14/2015	8/14/2016
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	6/29/2015	6/29/2016
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ECSI7	08/07/15	08/07/16
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	01/16/15	01/16/16
LISN for Conducted Emissions CISPR-16	Fisher	50/250-2-01	09/16/15	09/16/16
Power Cable, Line Conducted Emissions	UL	PG1	7/28/2015	7/28/2016
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
* Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r04, Section 8.1.

Output Power: KDB 558074 D01 v03r04, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r04, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r04, Section 12.1.

Band-edge: KDB 558074 D01 v03r04, Section 12.1.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX	5.000	5.000	1.000	100.00%	0.00	0.010
802.11n HT20 1TX	1.917	1.941	0.988	98.76%	0.00	0.010
802.11n HT20 CDD	1.920	1.944	0.988	98.77%	0.00	0.010

DUTY CYCLE PLOTS

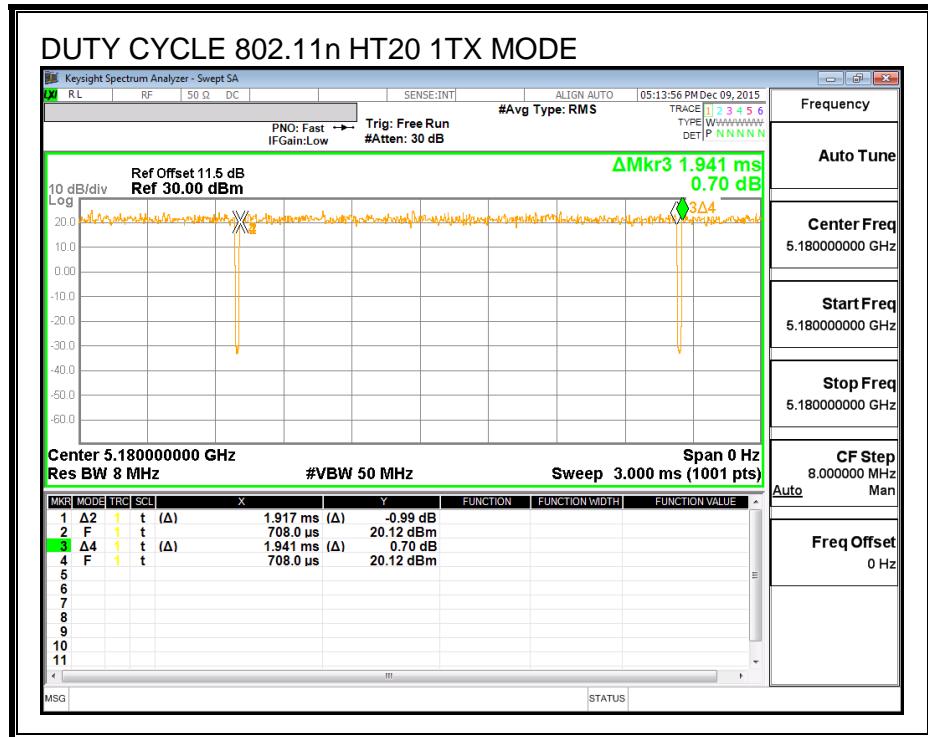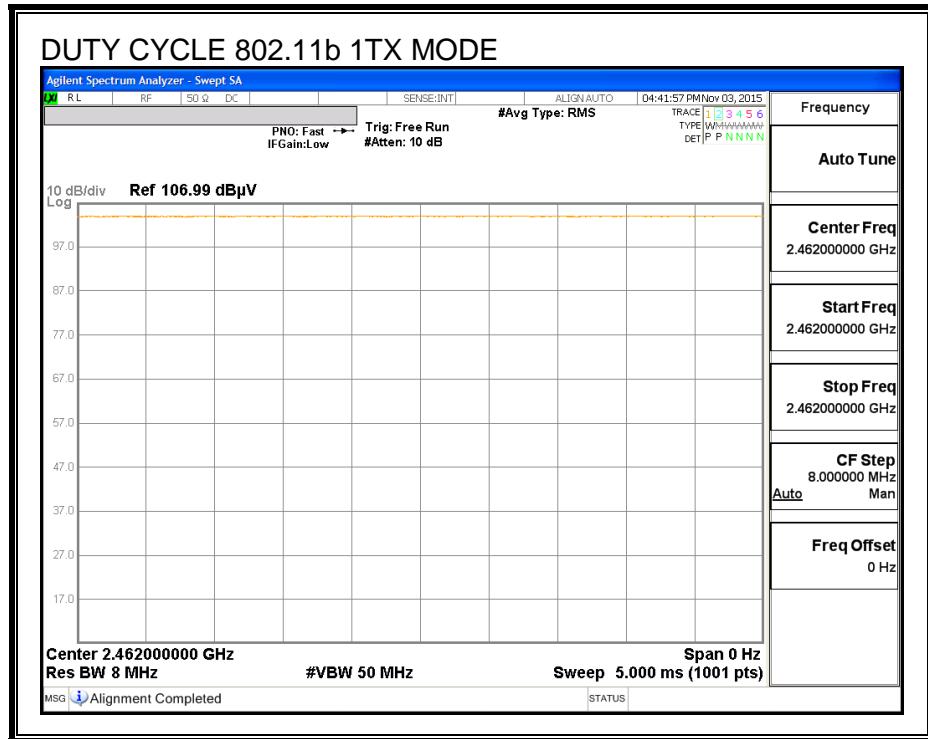

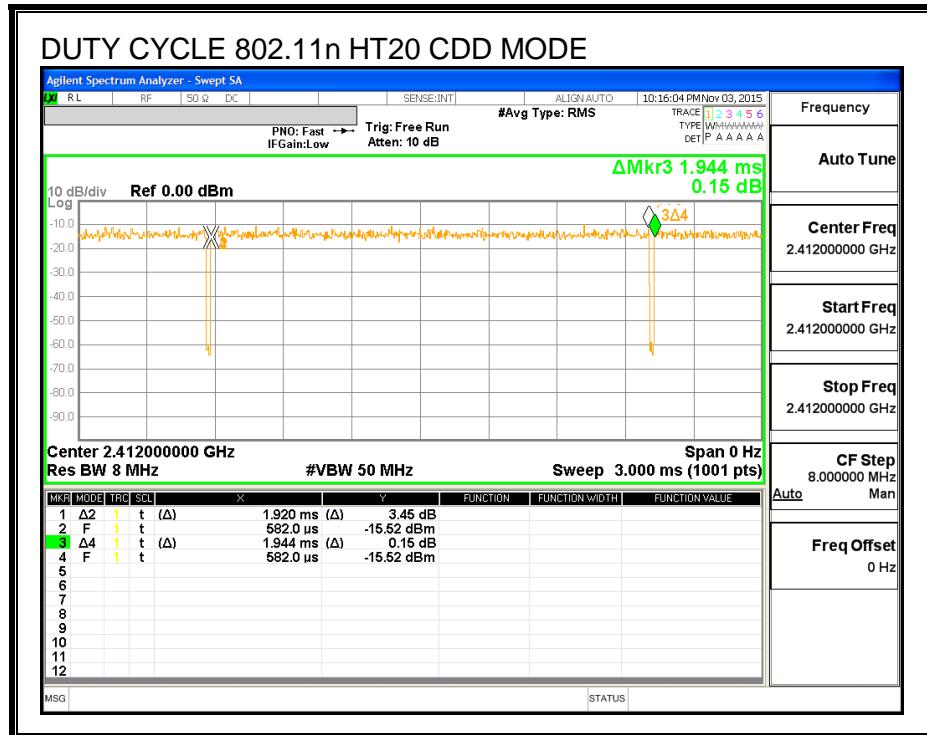

8.2. 802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)

8.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.086	0.5
Mid	2437	8.086	0.5
High_11	2462	8.008	0.5
High_12	2467	8.086	0.5
High_13	2472	8.554	0.5

6 dB BANDWIDTH

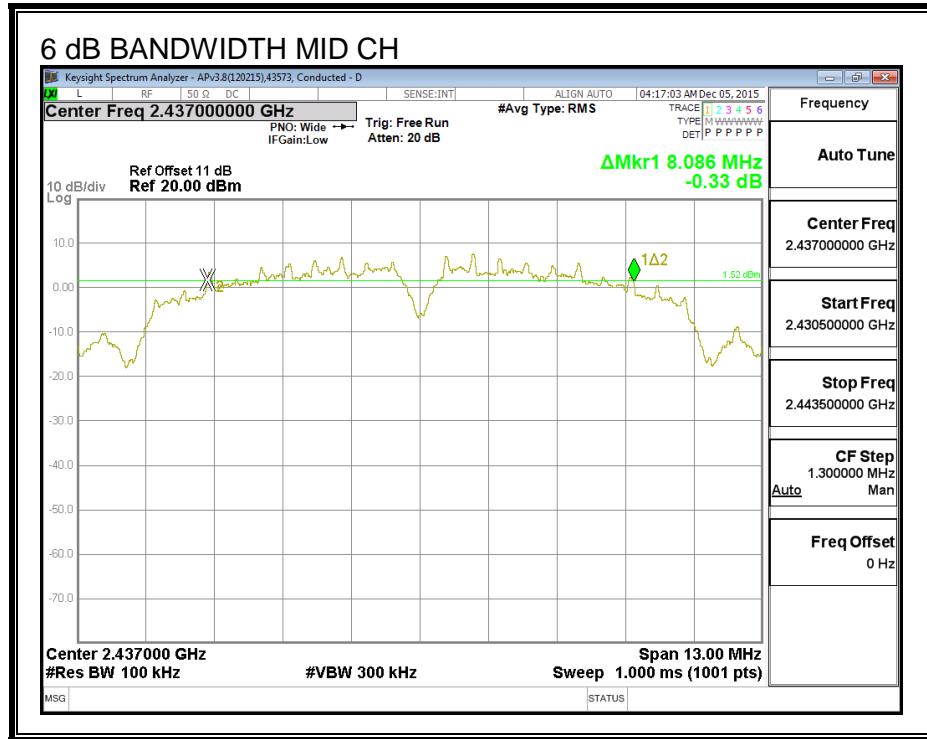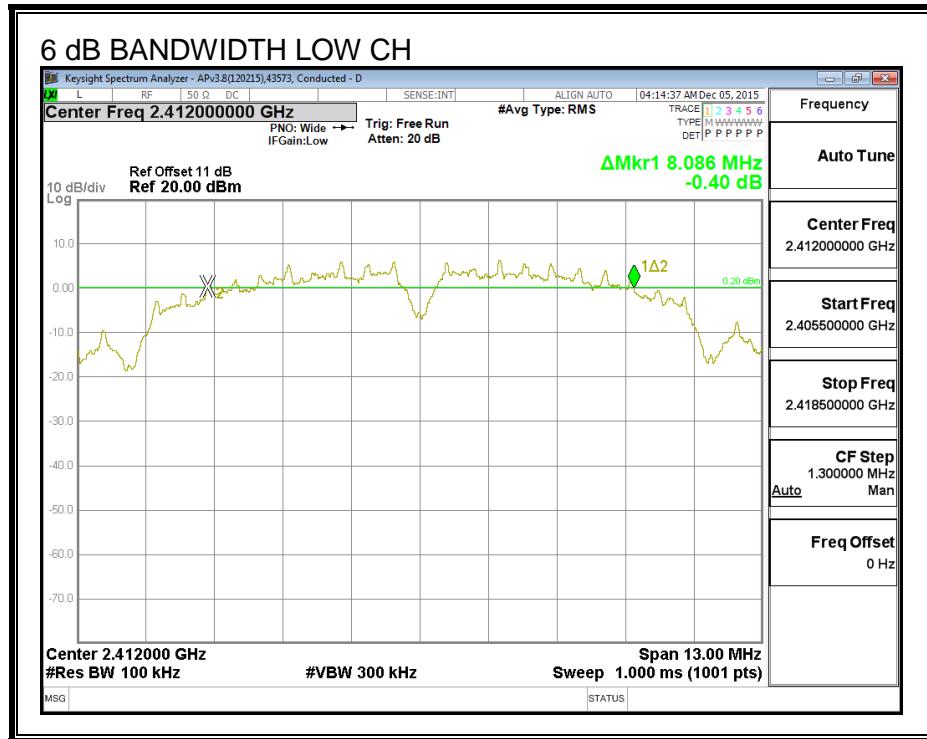

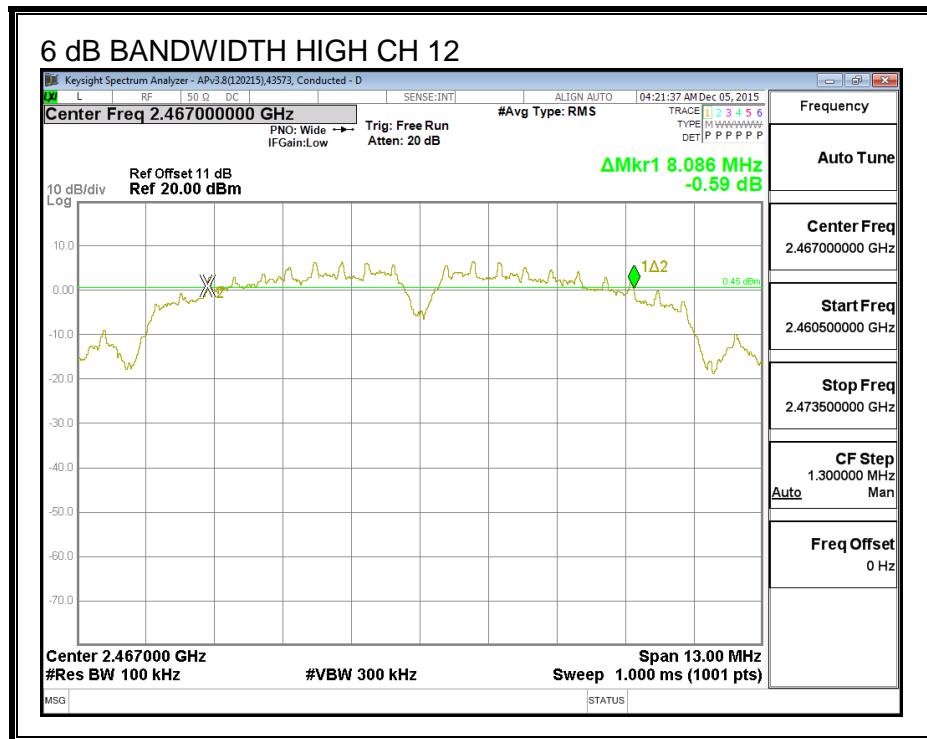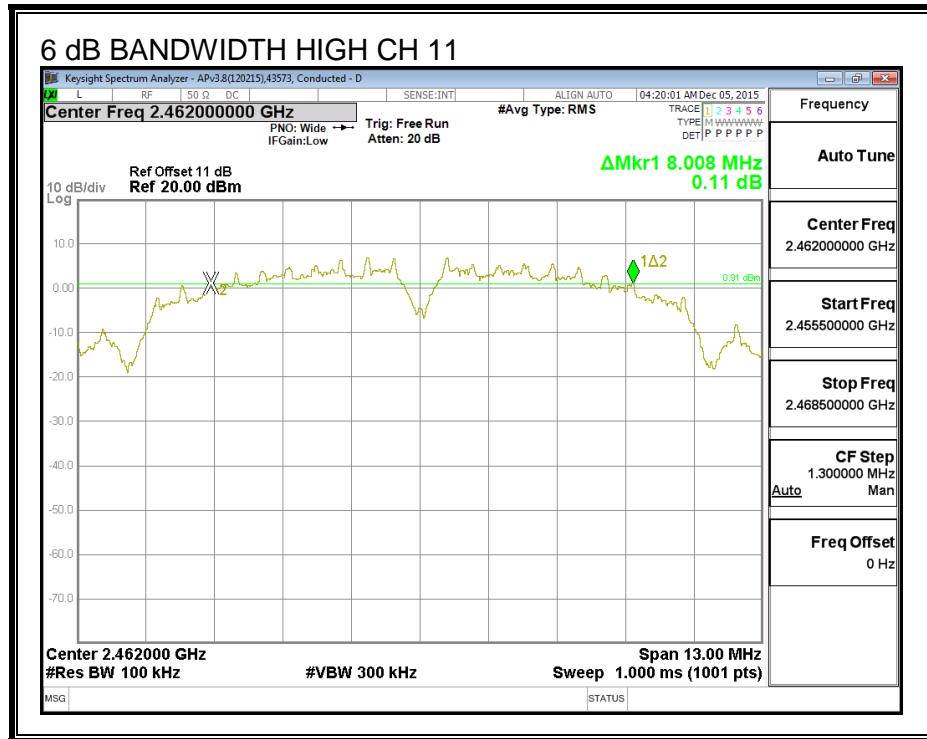

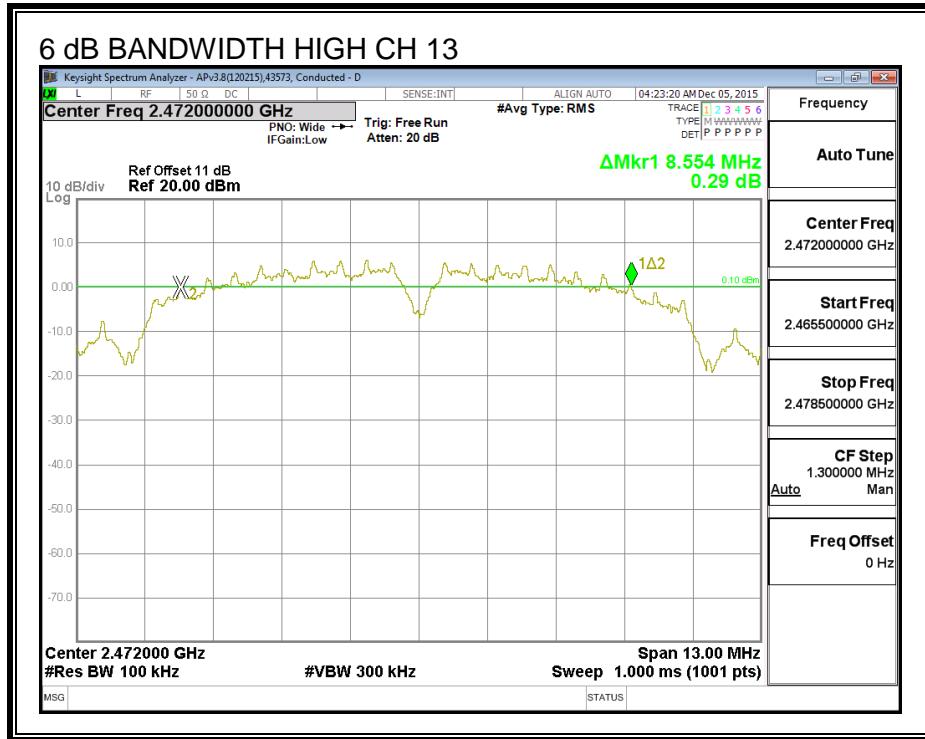

8.2.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	10.675
Mid	2437	10.127
High_11	2462	10.367
High_12	2467	10.513
High_13	2472	10.646

99% BANDWIDTH

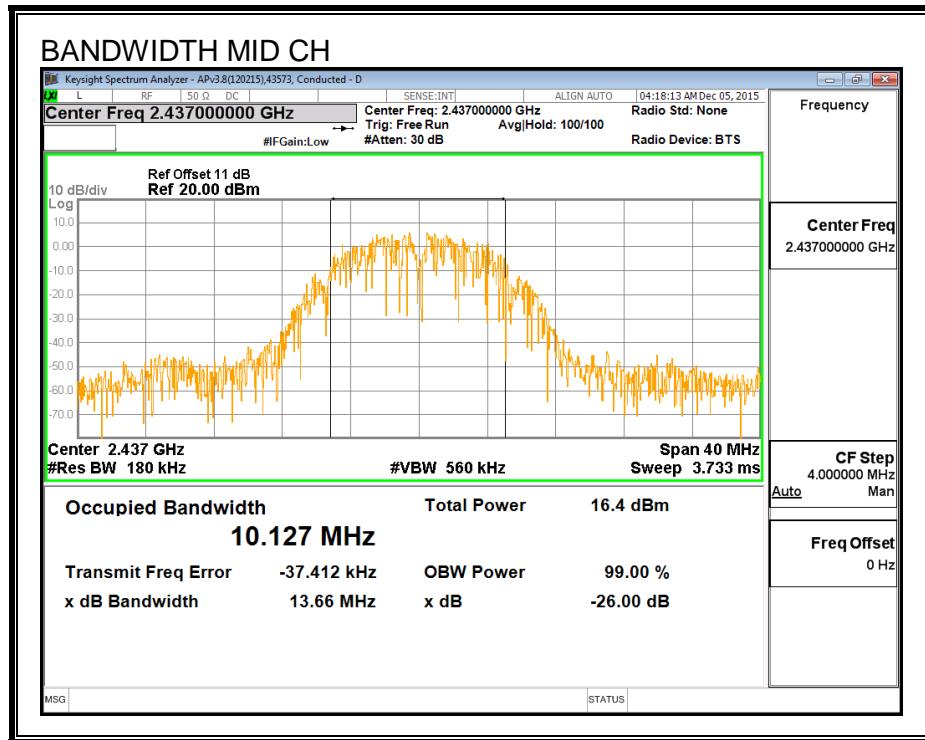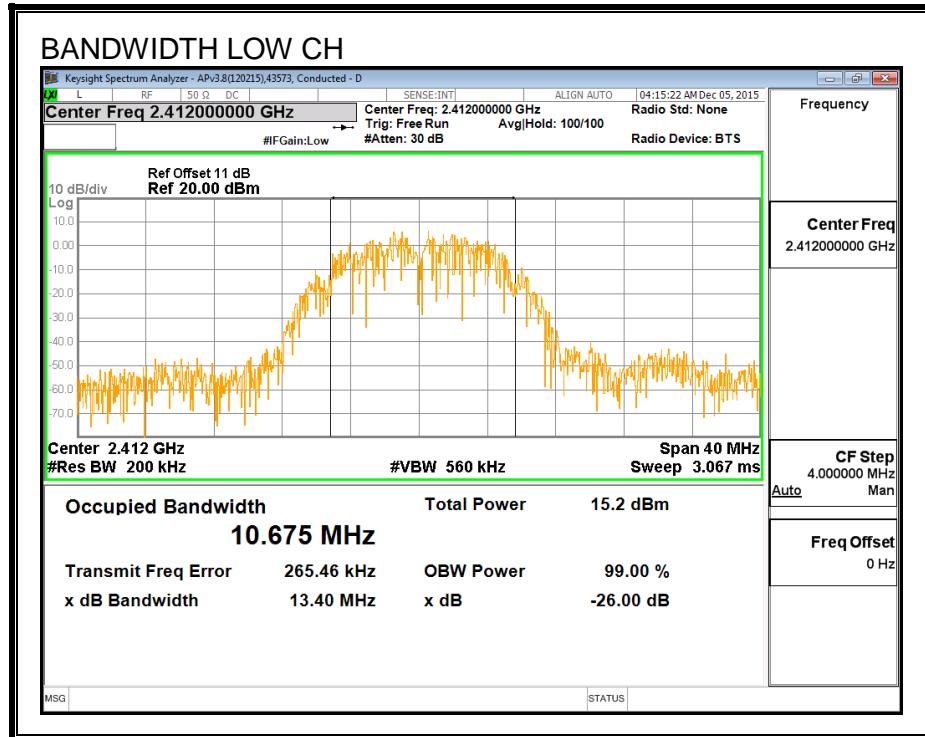

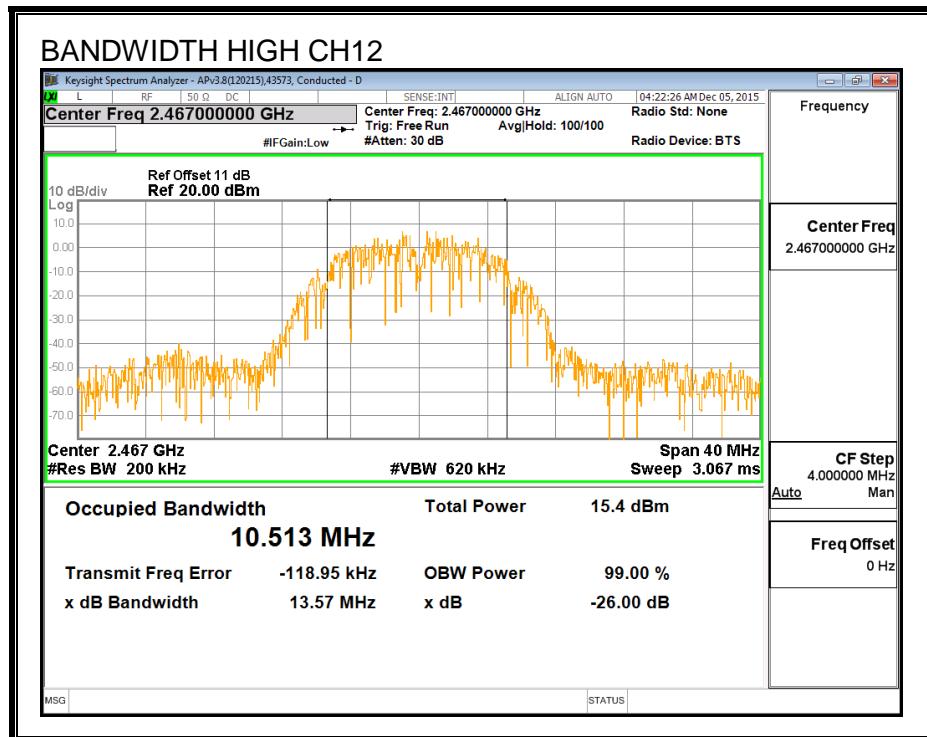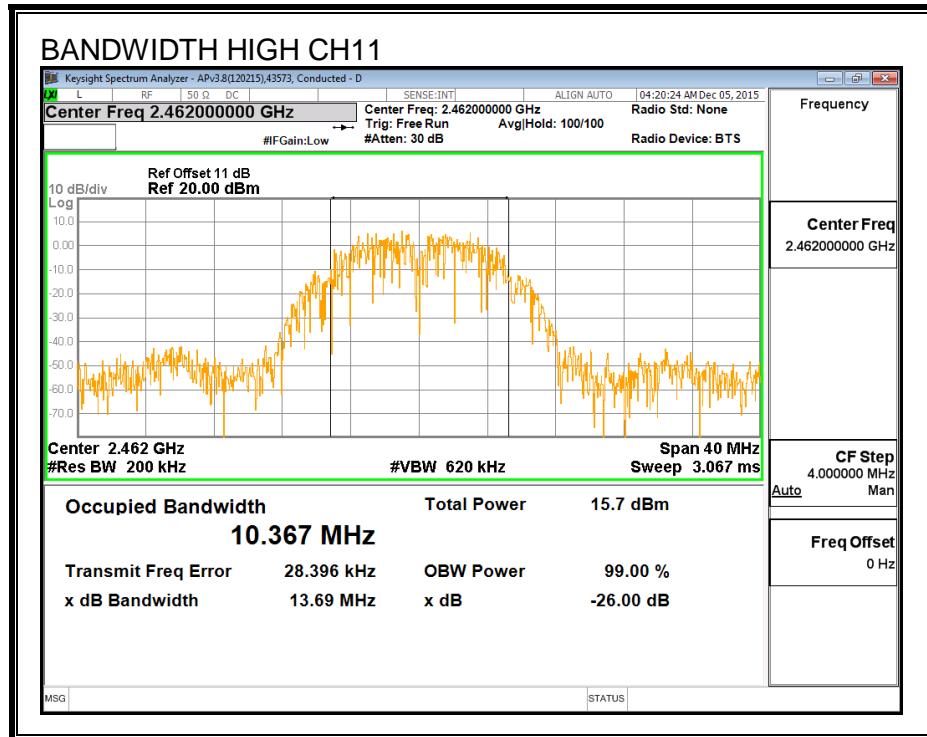

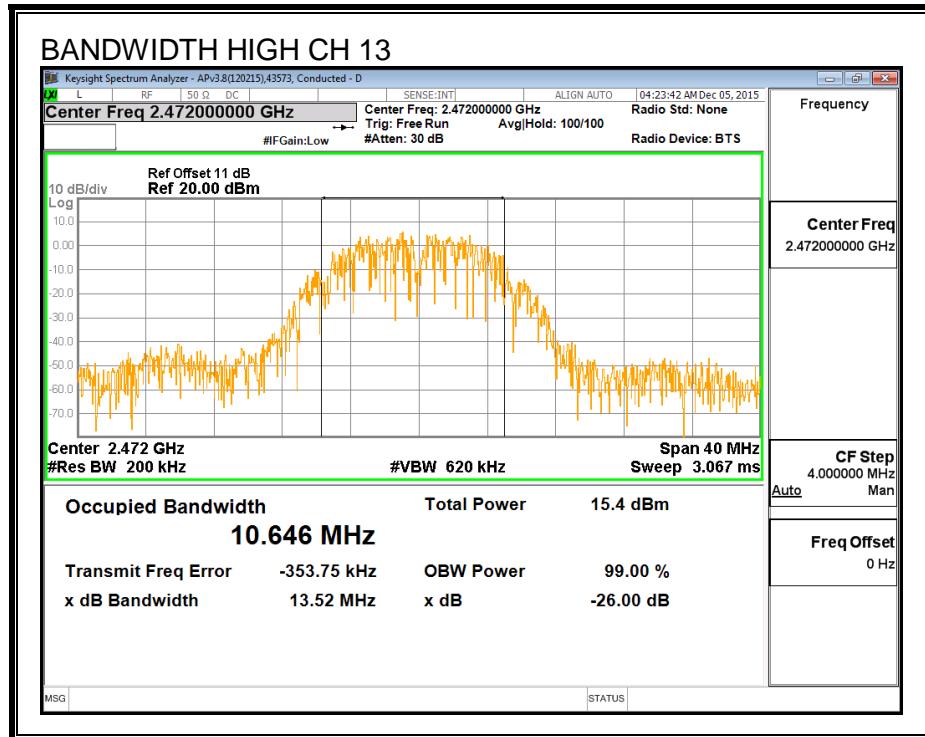

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.86
Mid	2437	15.93
High_11	2462	15.78
High_12	2467	16.00
High_13	2472	13.82

8.2.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-1.75	30.00	30	36	30.00
Mid	2437	-1.75	30.00	30	36	30.00
High_11	2462	-1.75	30.00	30	36	30.00
High_12	2467	-1.75	30.00	30	36	30.00
High_13	2472	-1.75	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.32	19.32	30.00	-10.68
Mid	2437	19.39	19.39	30.00	-10.61
High_11	2462	19.16	19.16	30.00	-10.84
High_12	2467	19.38	19.38	30.00	-10.62
High_13	2472	17.25	17.25	30.00	-12.75

8.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
--------------------	--	------	--	--	--


PSD Results

Channel	Frequency (MHz)	Antenna B Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.30	-6.30	8.0	-14.3
Mid	2437	-6.35	-6.35	8.0	-14.4
High_11	2462	-6.80	-6.80	8.0	-14.8
High_12	2467	-6.15	-6.15	8.0	-14.2
High_13	2472	-8.83	-8.83	8.0	-16.8

PSD

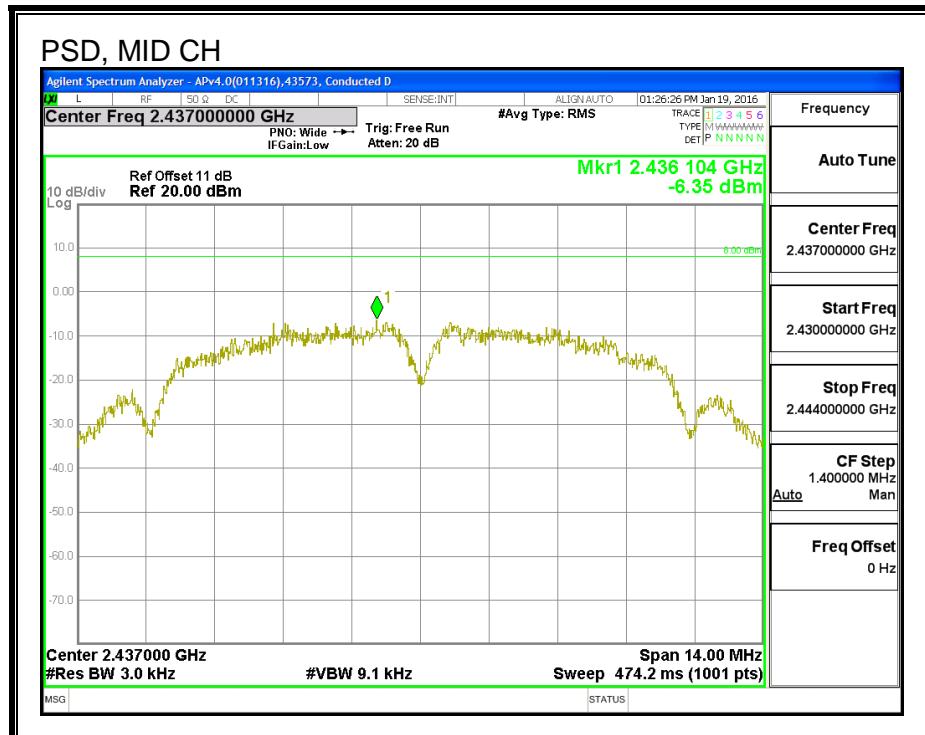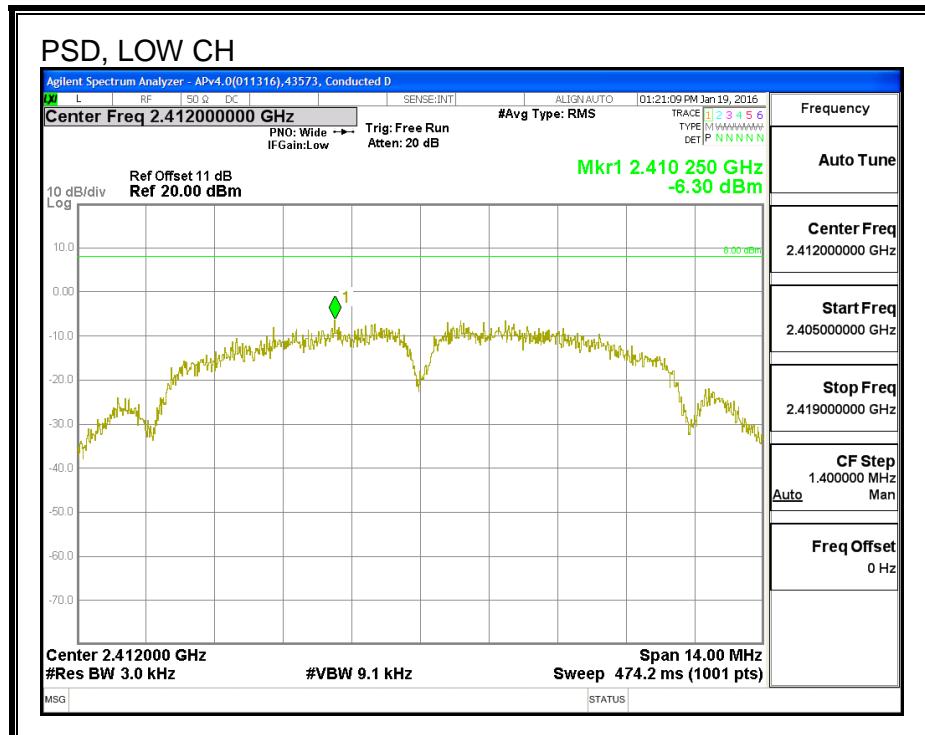

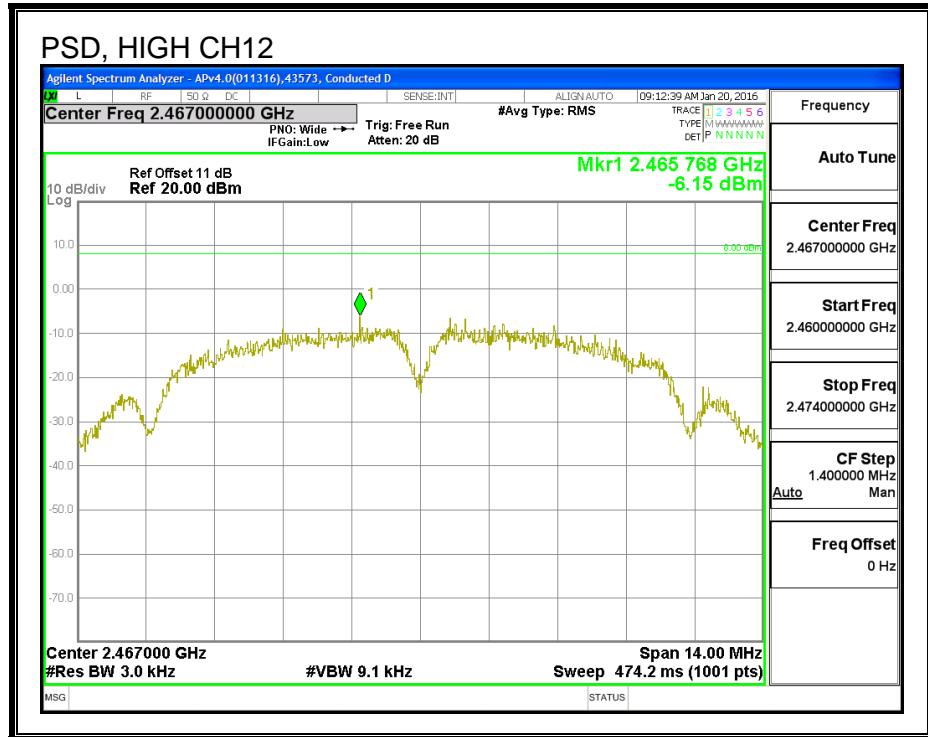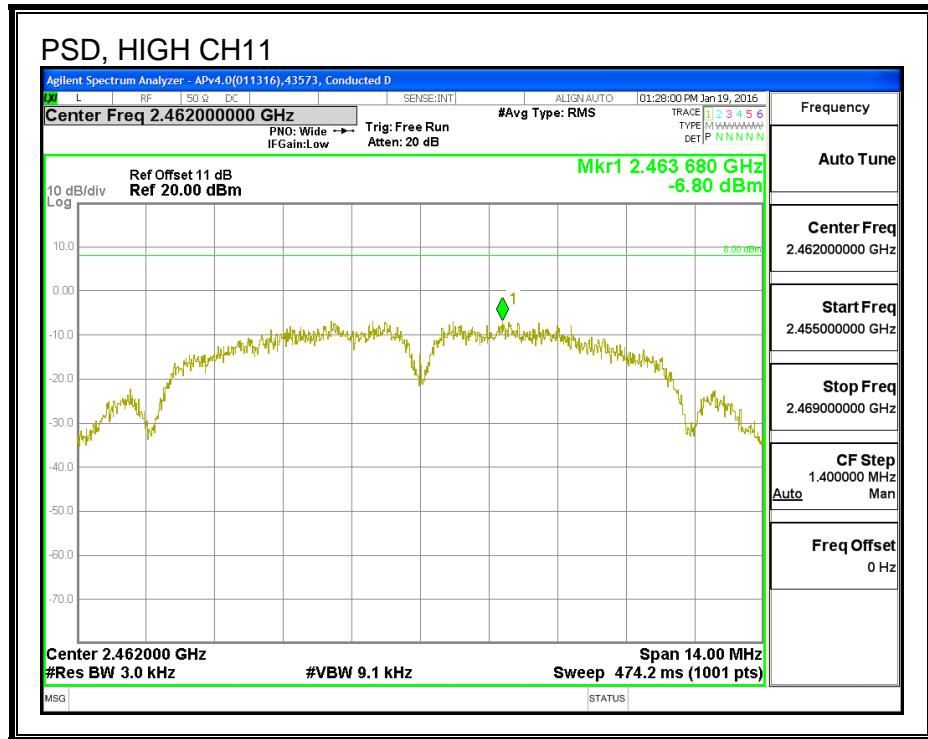

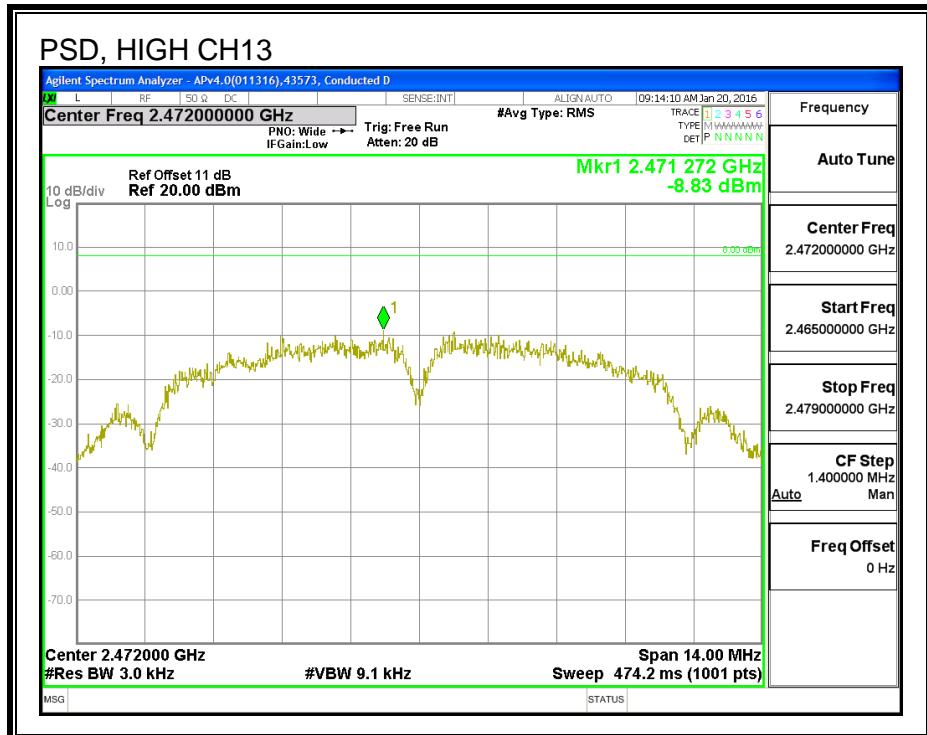

8.2.6. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


LOW CHANNEL BANDEDGE


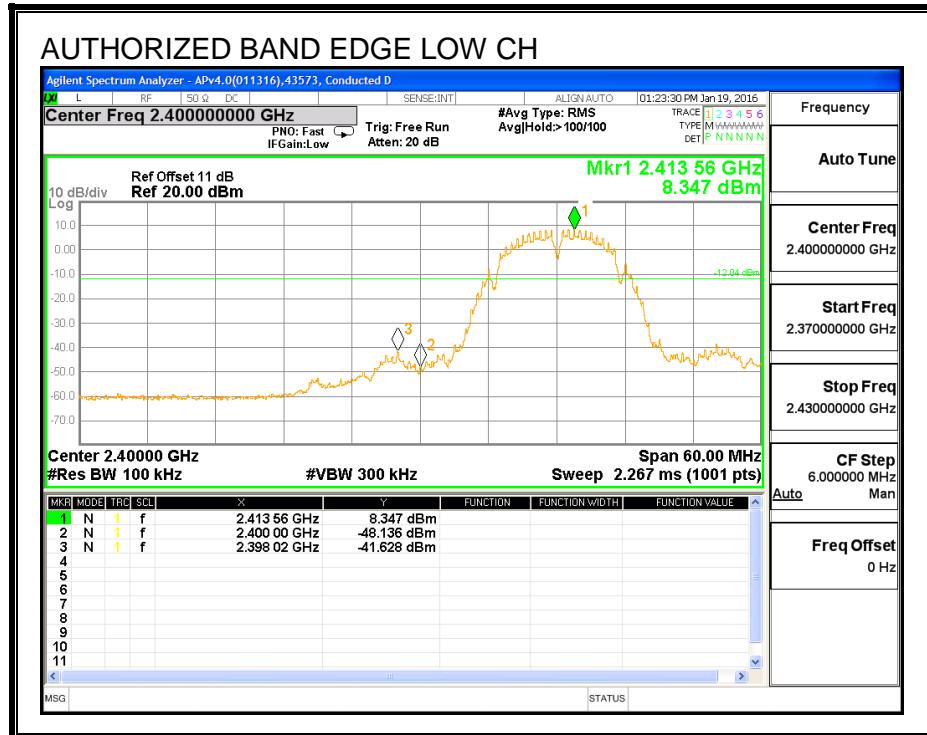


MID CHANNEL BANDEDGE


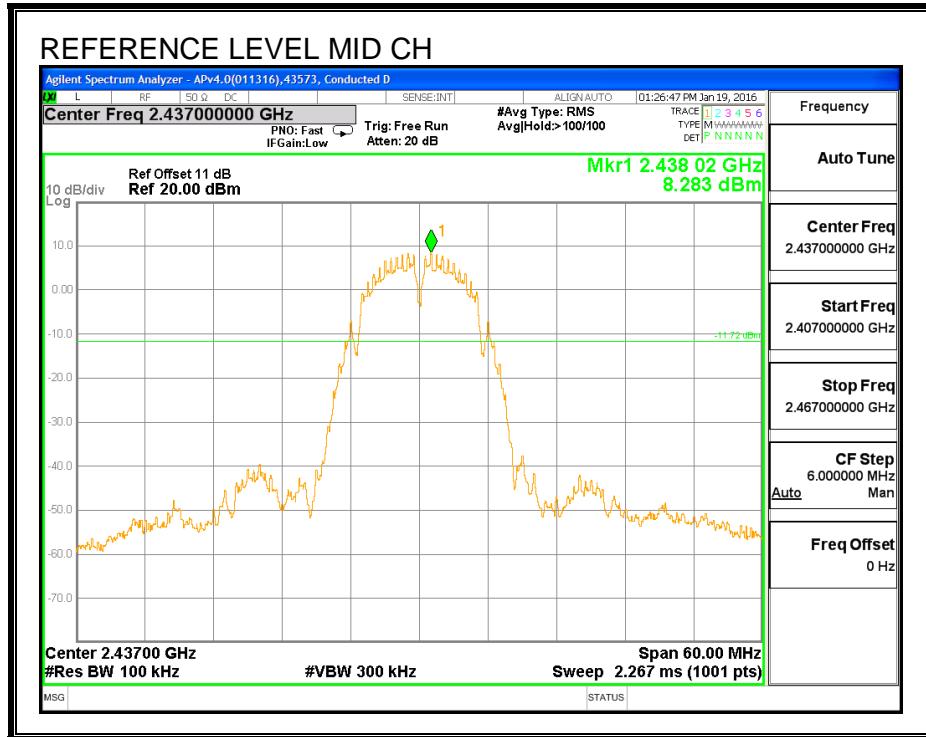




HIGH CHANNEL BANDEDGE

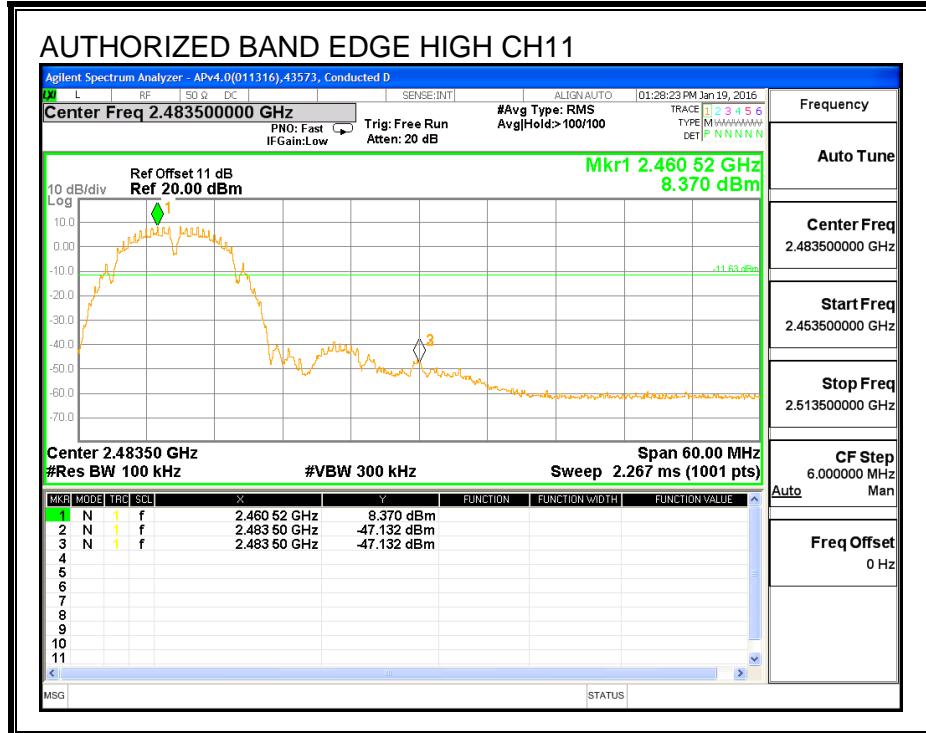


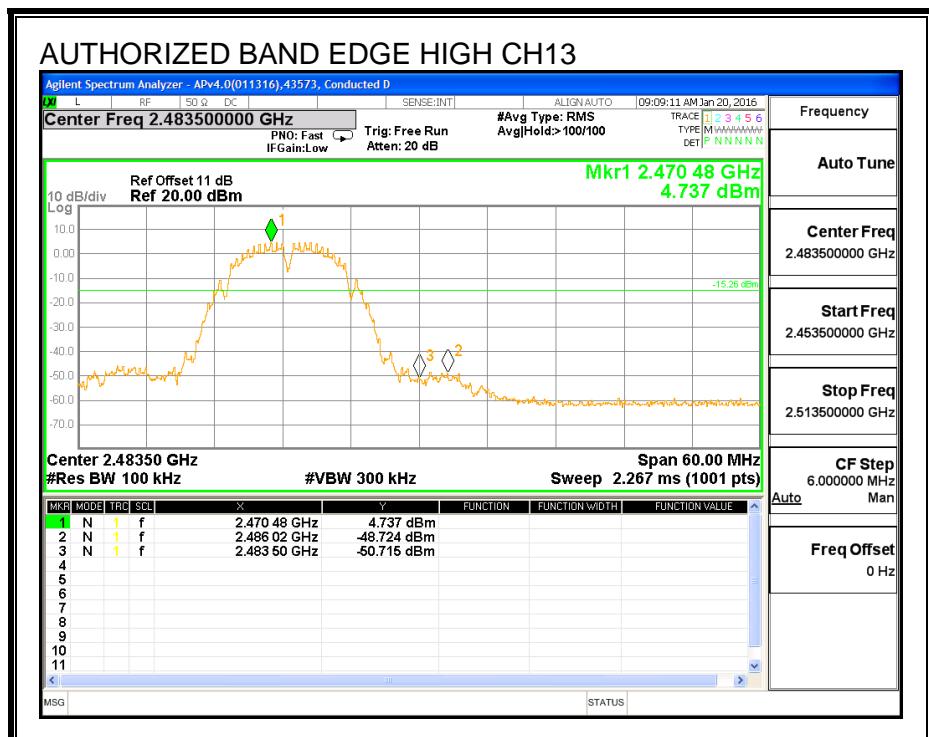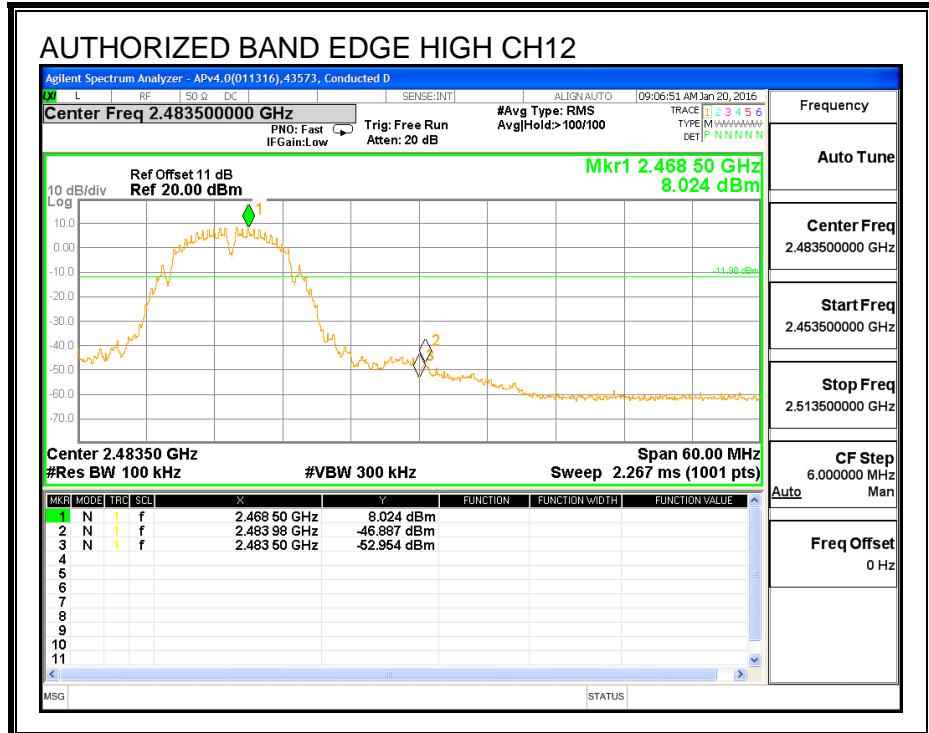

OUT-OF-BAND EMISSIONS

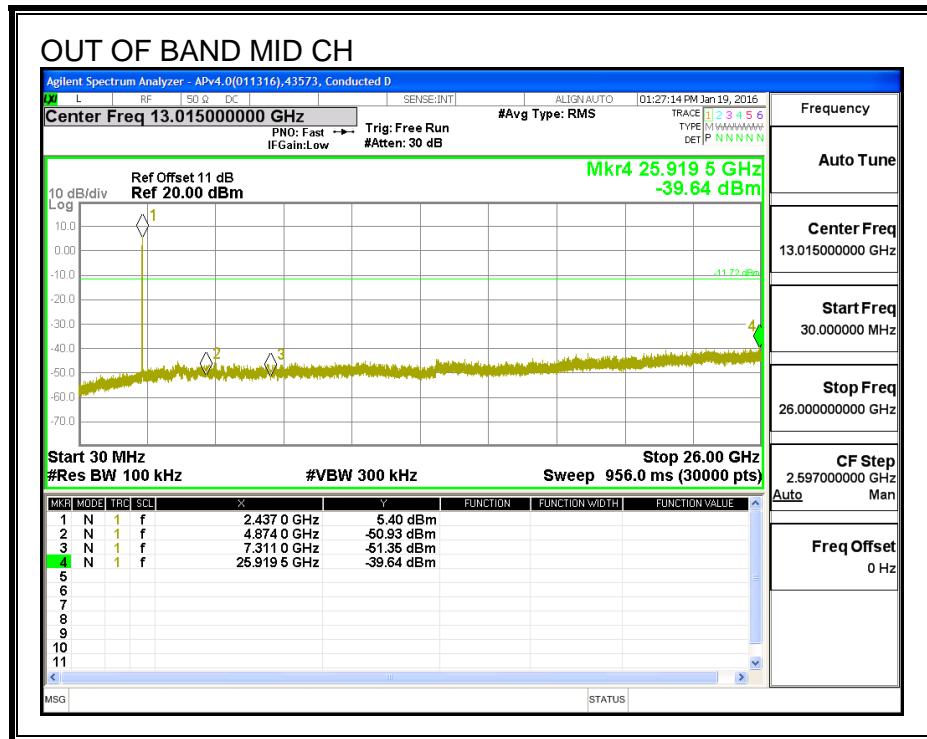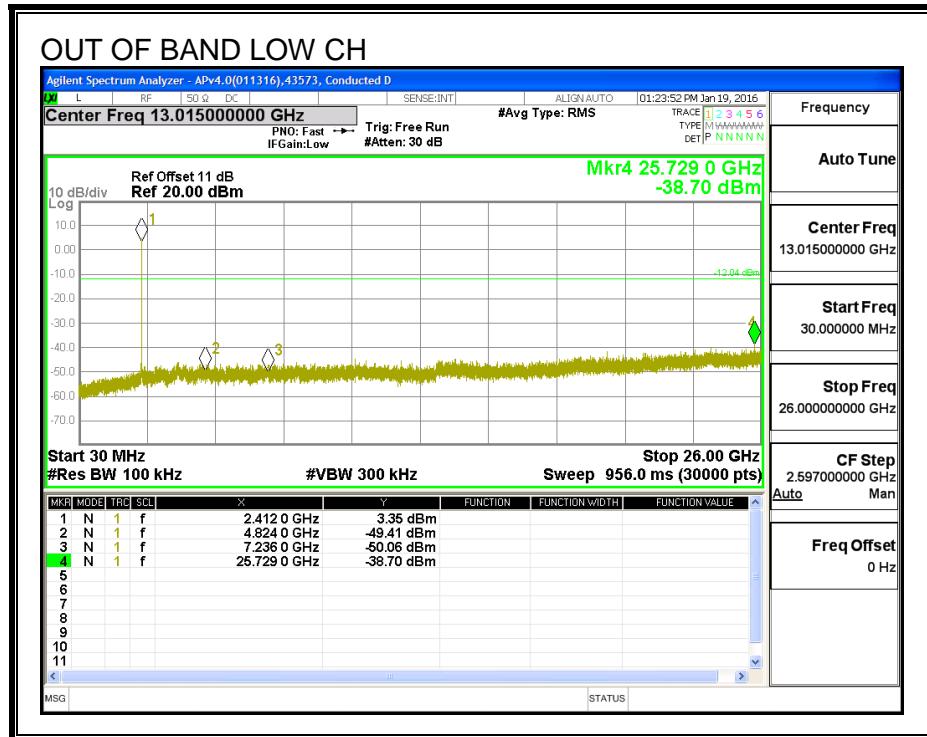

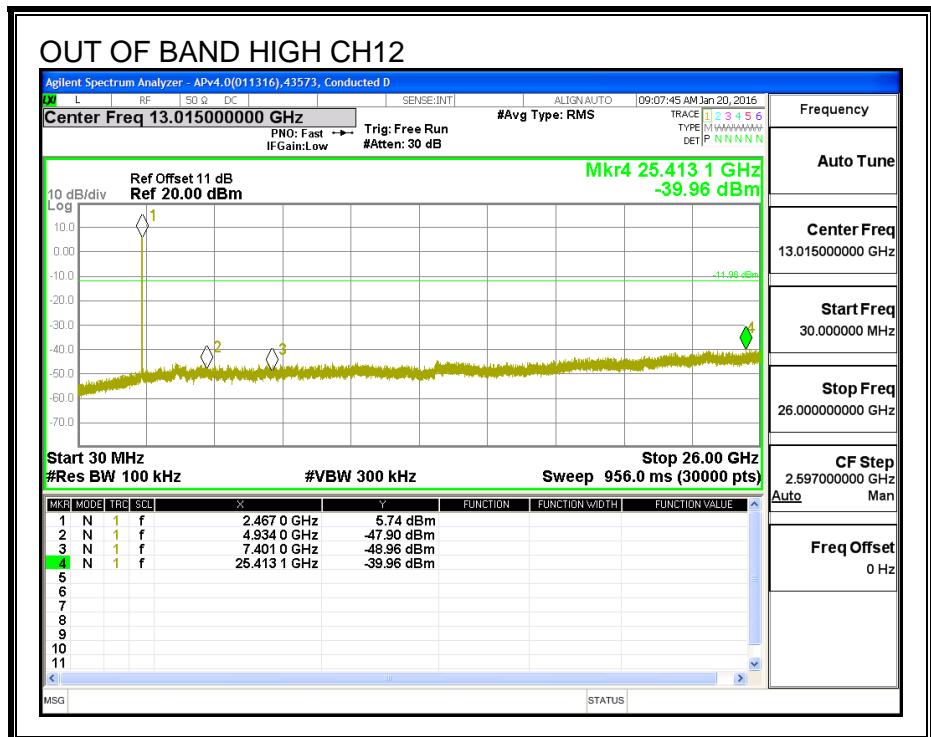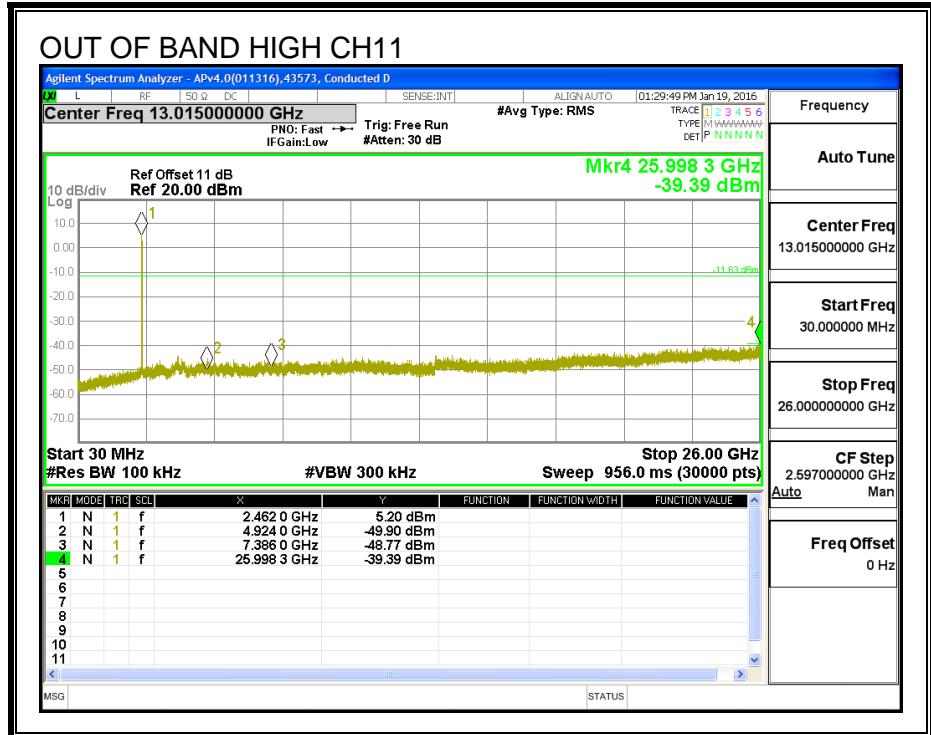

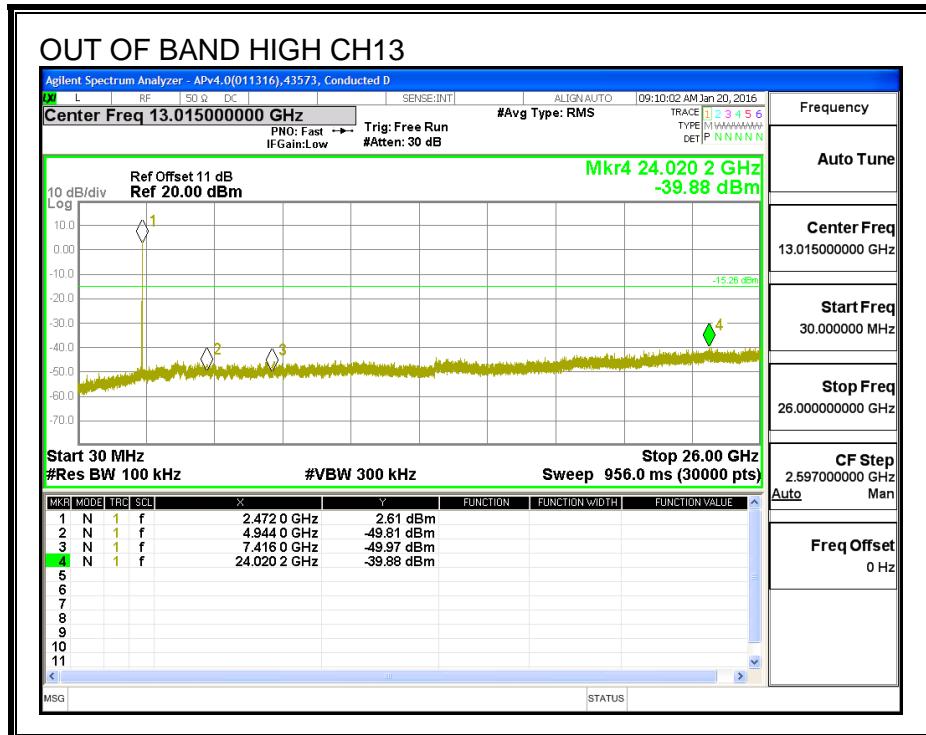

8.3. 802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA A)

8.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.528	0.5
Mid	2437	8.060	0.5
High_11	2462	8.021	0.5
High_12	2467	8.073	0.5
High_13	2472	8.073	0.5

6 dB BANDWIDTH

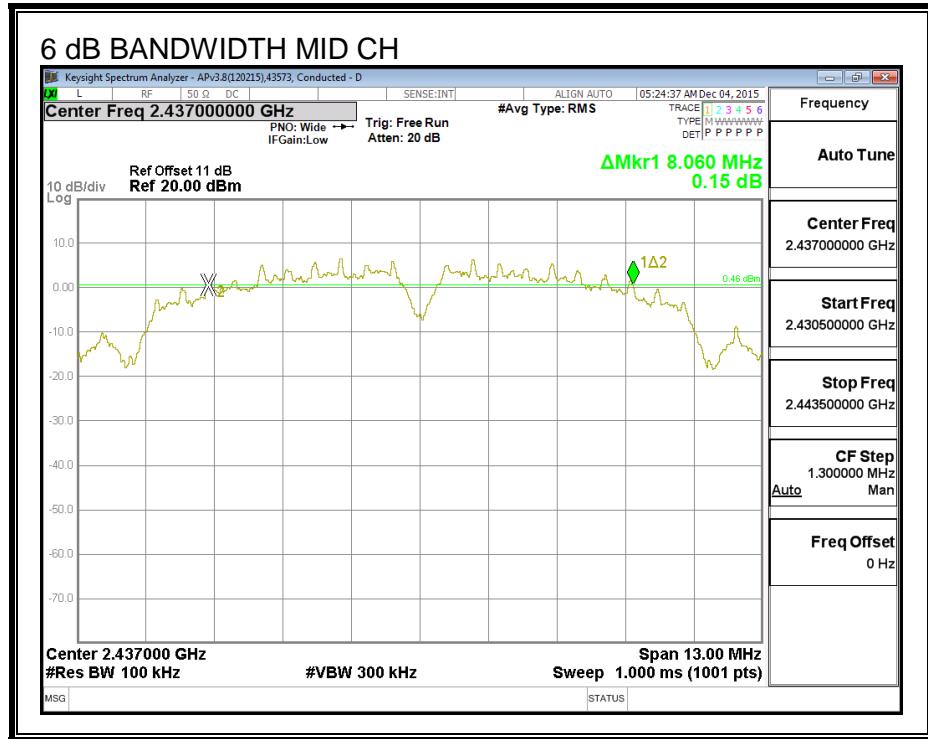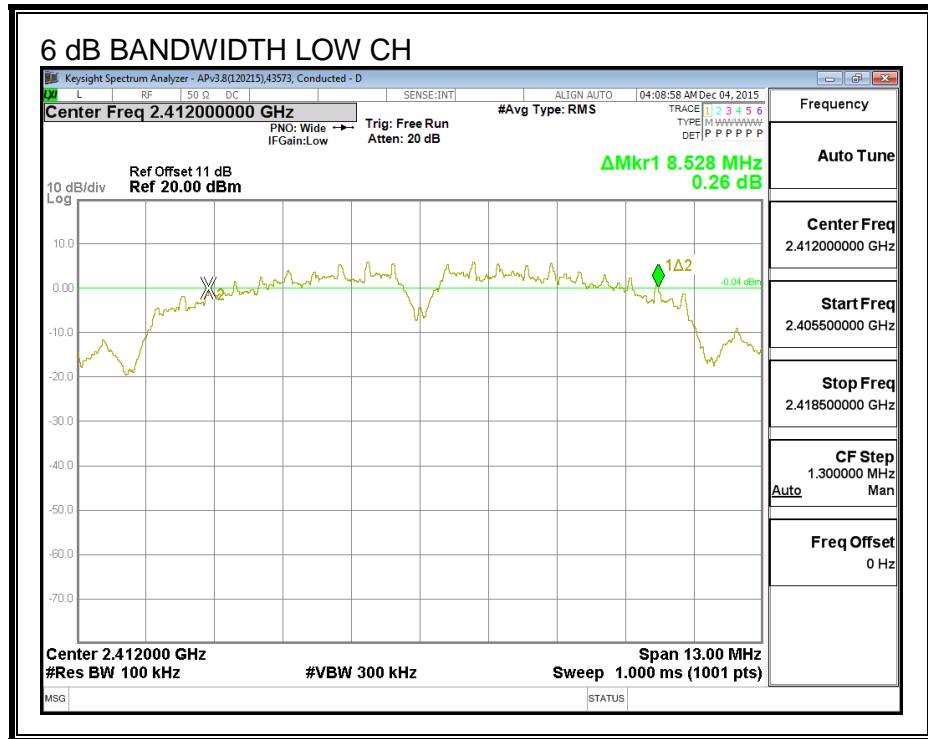

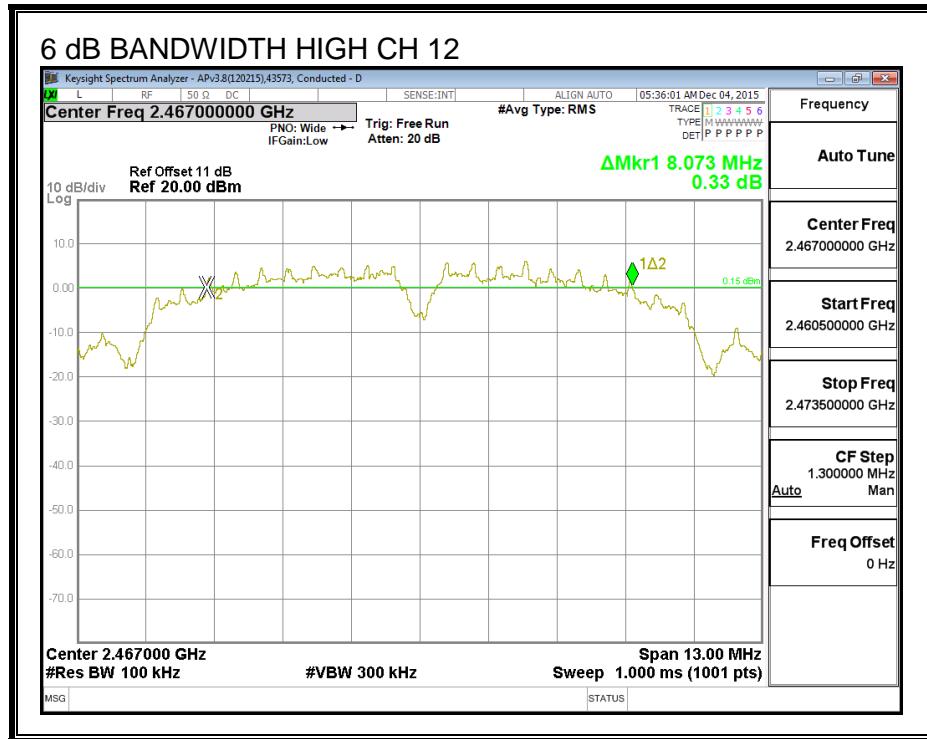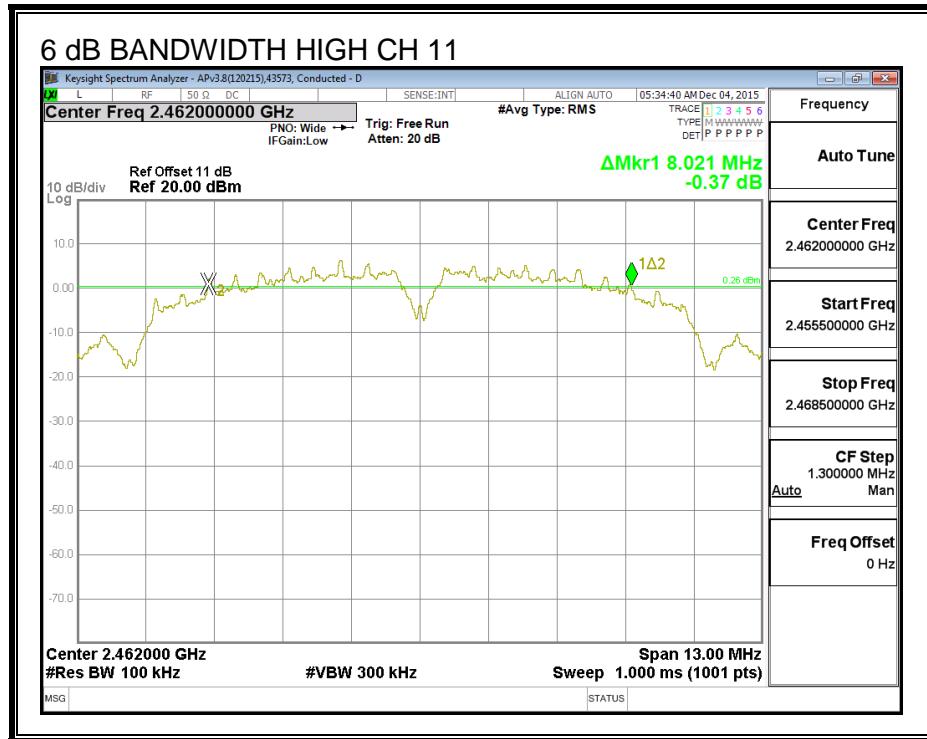

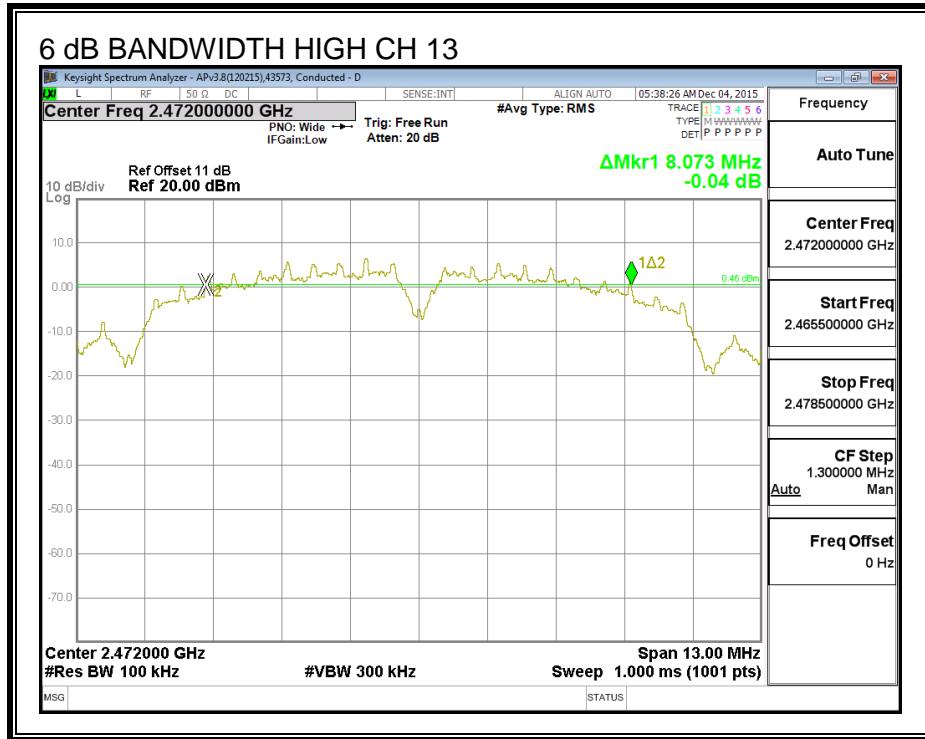

8.3.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	10.672
Mid	2437	10.332
High_11	2462	10.359
High_12	2467	10.392
High_13	2472	10.670

99% BANDWIDTH

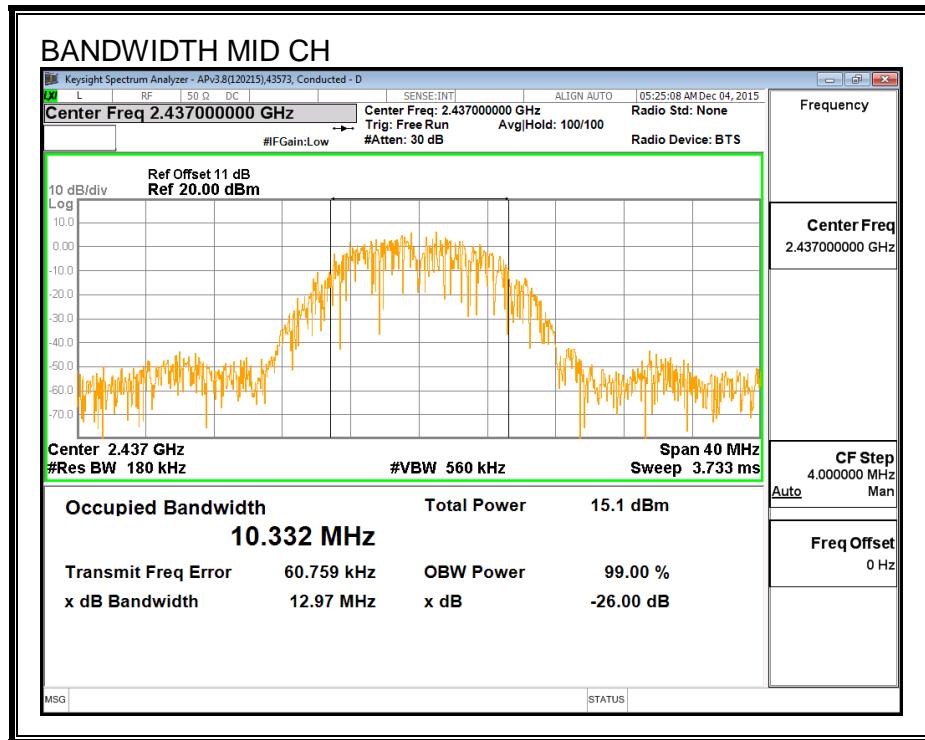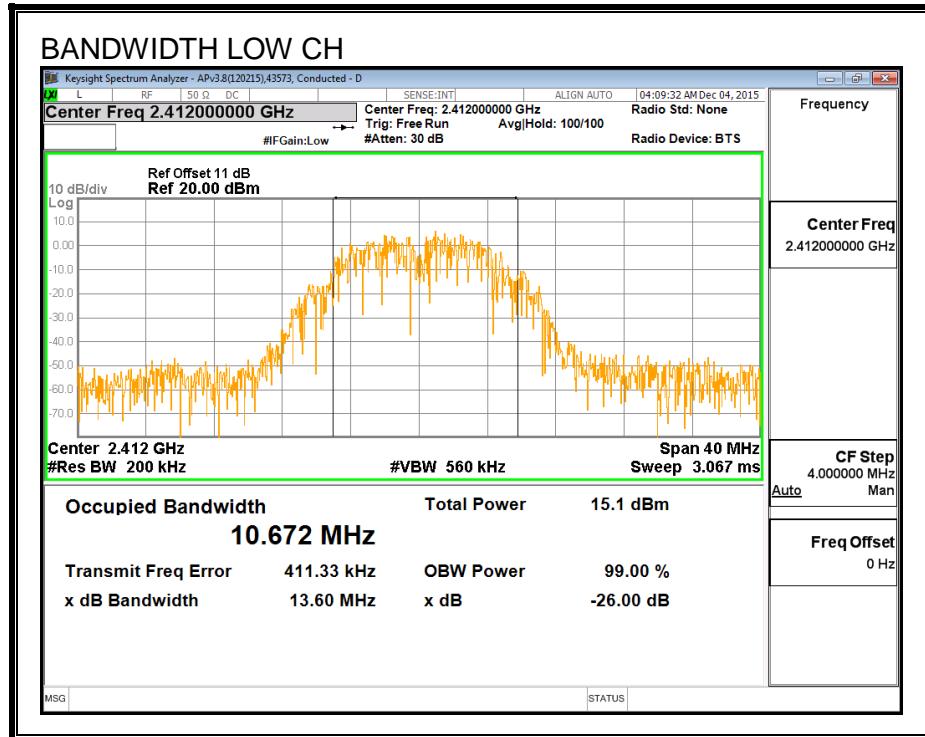

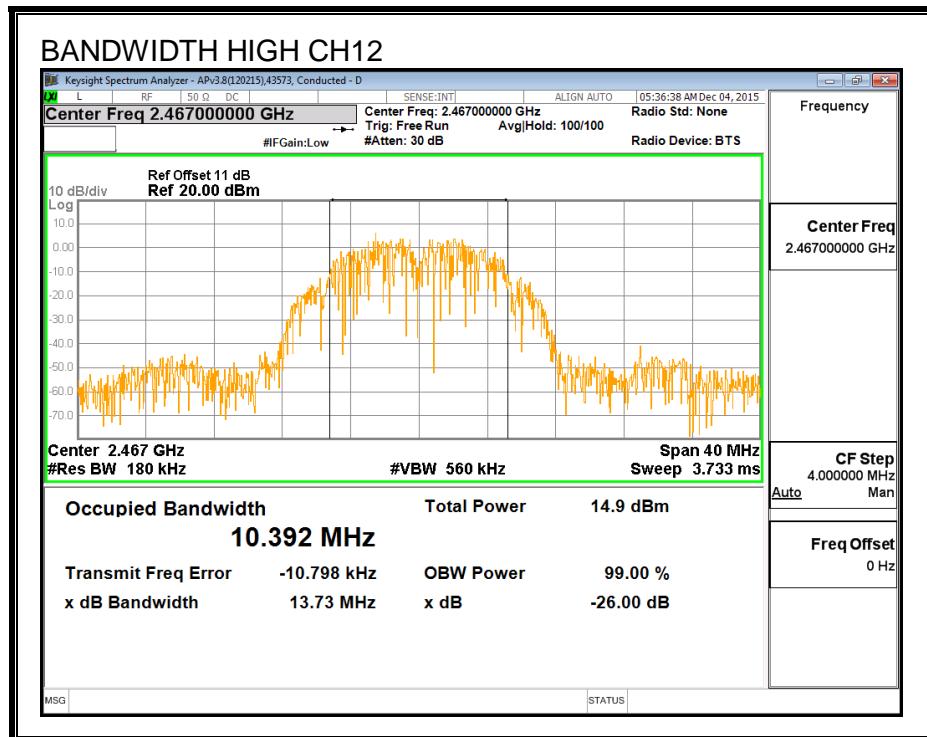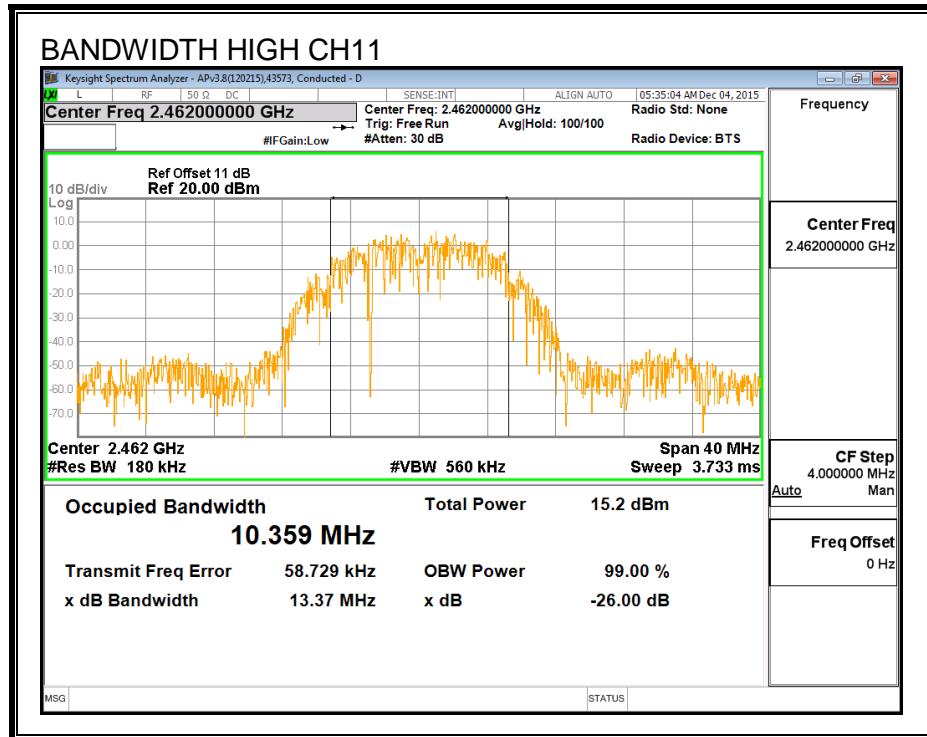

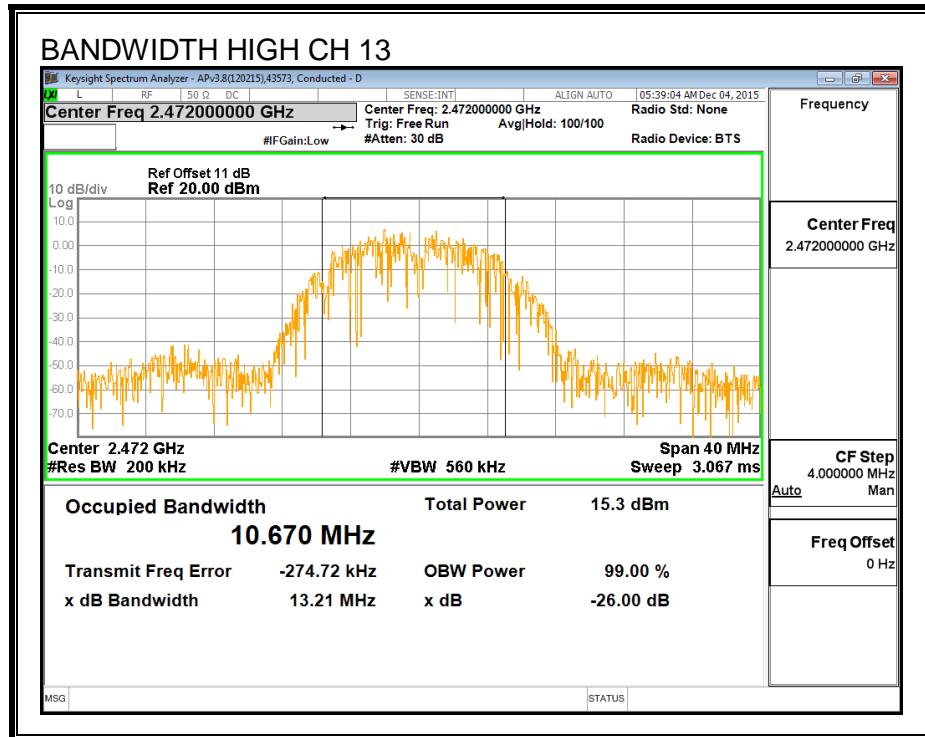

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.44
Mid	2437	16.40
High_11	2462	16.38
High_12	2467	16.43
High_13	2472	13.95

8.3.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-0.18	30.00	30	36	30.00
Mid	2437	-0.18	30.00	30	36	30.00
High_11	2462	-0.18	30.00	30	36	30.00
High_12	2467	-0.18	30.00	30	36	30.00
High_13	2472	-0.18	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.98	19.98	30.00	-10.02
Mid	2437	19.92	19.92	30.00	-10.08
High_11	2462	19.89	19.89	30.00	-10.11
High_12	2467	19.96	19.96	30.00	-10.04
High_13	2472	17.34	17.34	30.00	-12.66

8.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD		
--------------------	--	------	--	--	--


PSD Results

Channel	Frequency (MHz)	Antenna A Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.54	-5.54	8.0	-13.5
Mid	2437	-5.85	-5.85	8.0	-13.9
High_11	2462	-6.16	-6.16	8.0	-14.2
High_12	2467	-6.08	-6.08	8.0	-14.1
High_13	2472	-8.89	-8.89	8.0	-16.9

PSD

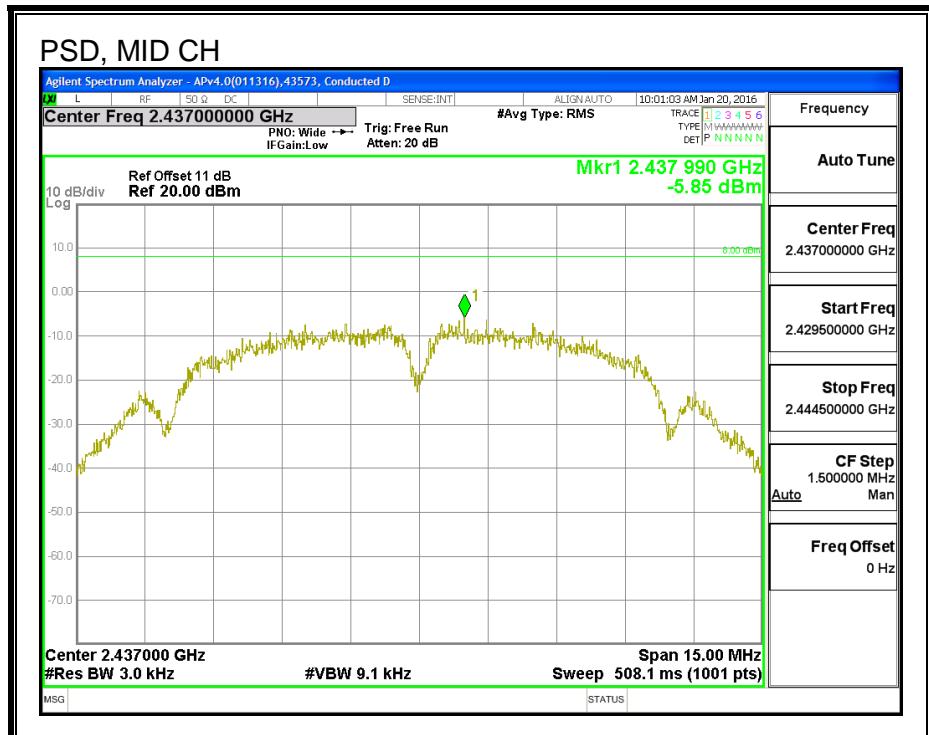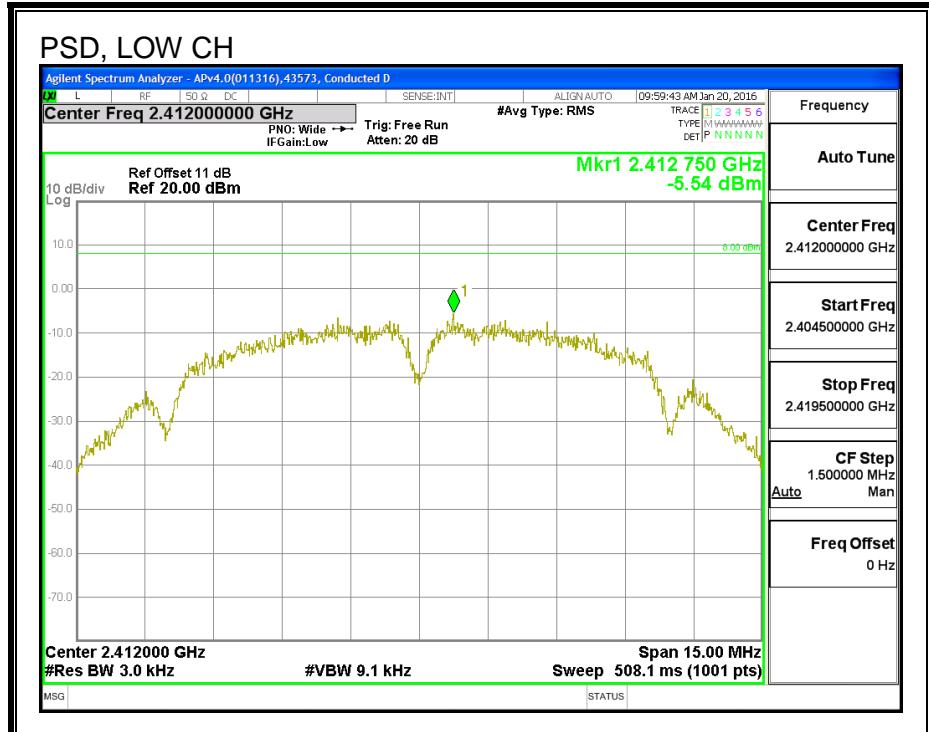

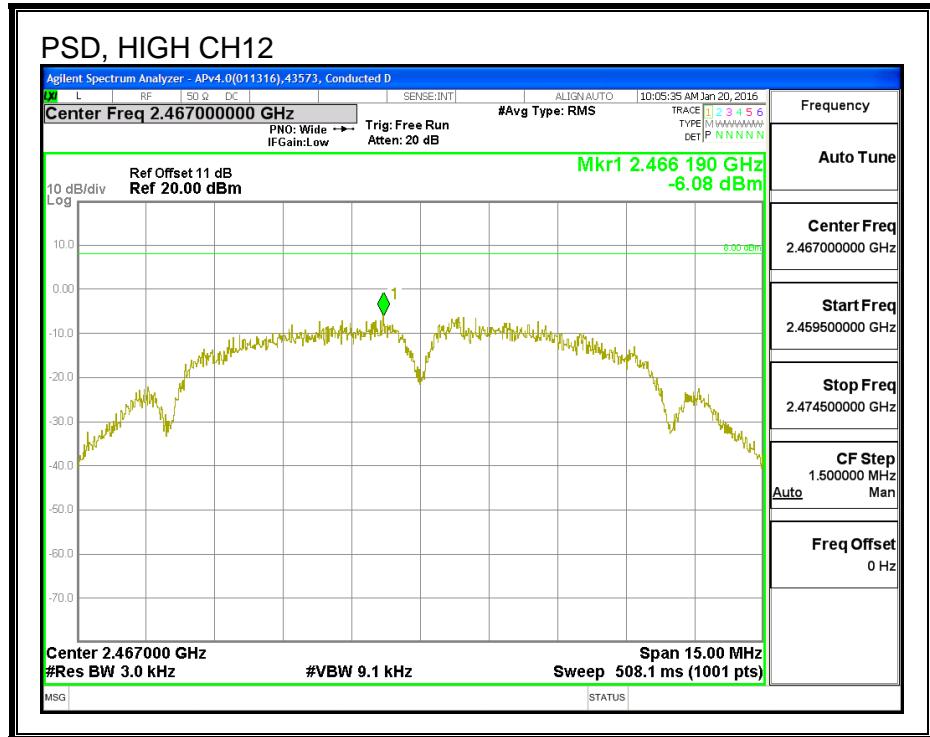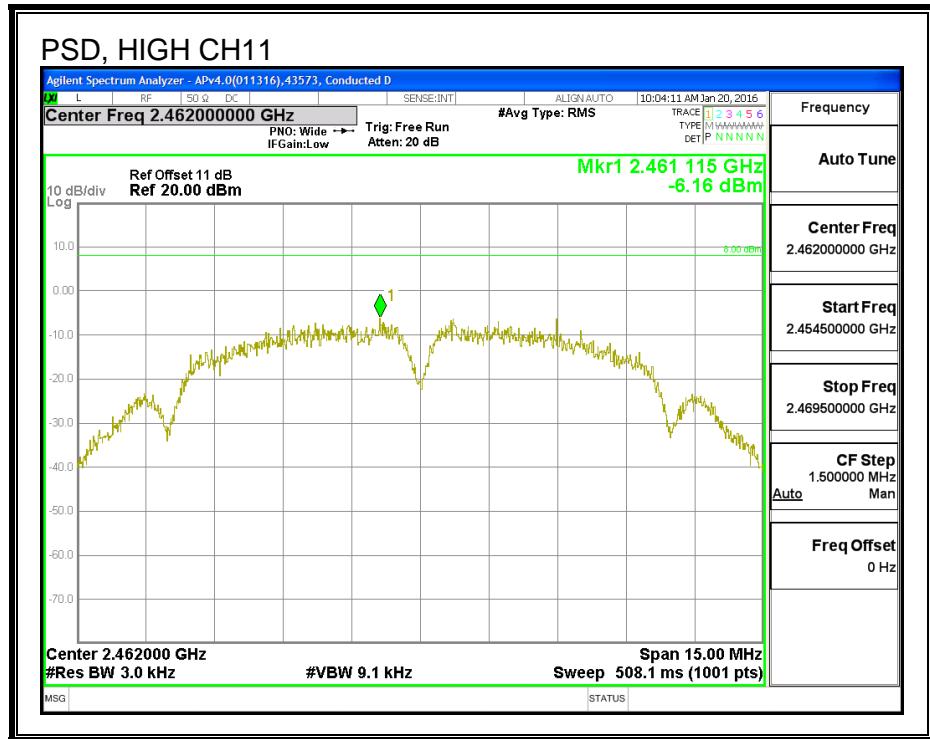

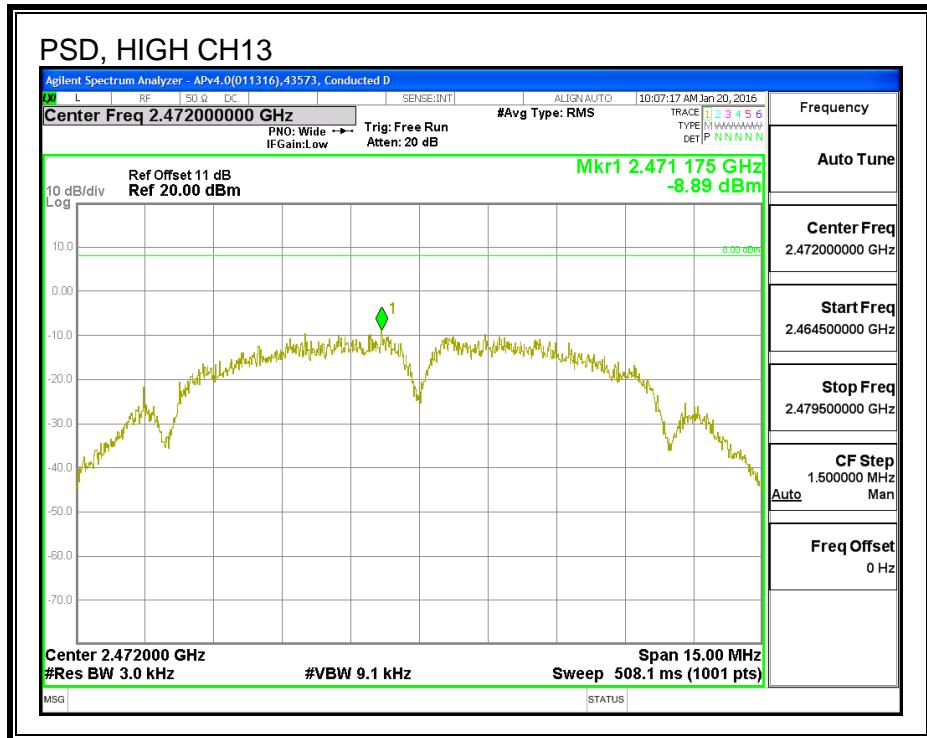

8.3.6. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


LOW CHANNEL BANDEDGE


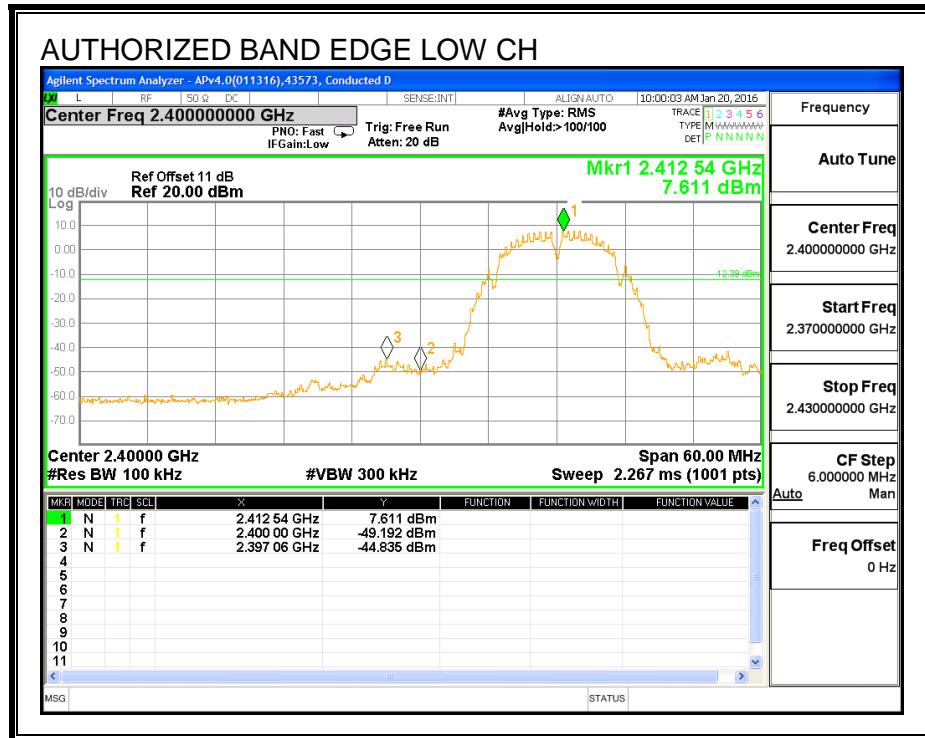


MID CHANNEL BANDEDGE


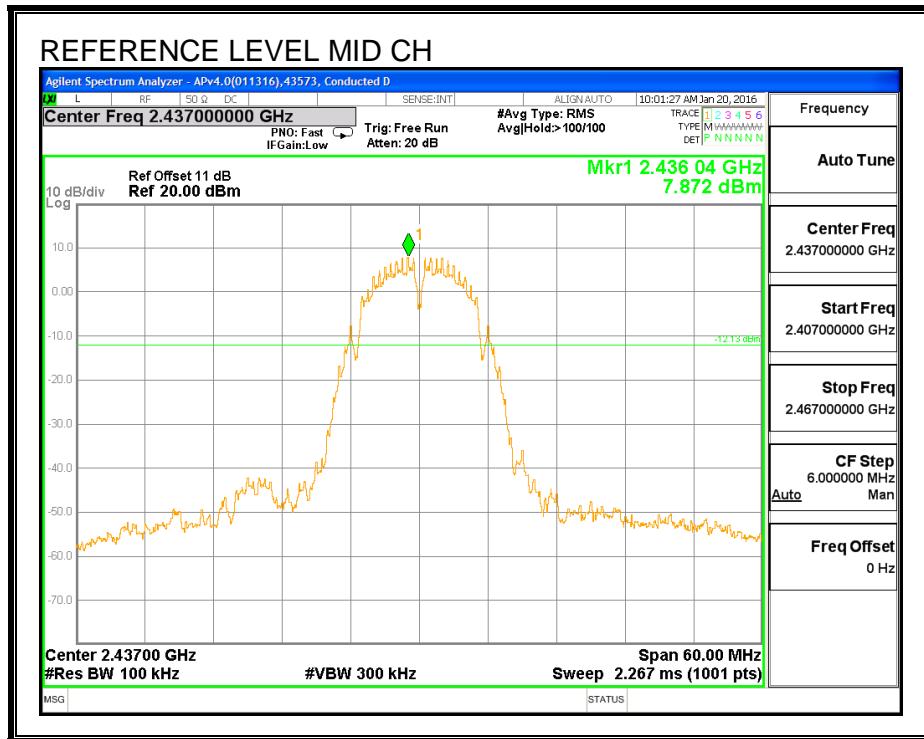




HIGH CHANNEL BANDEDGE

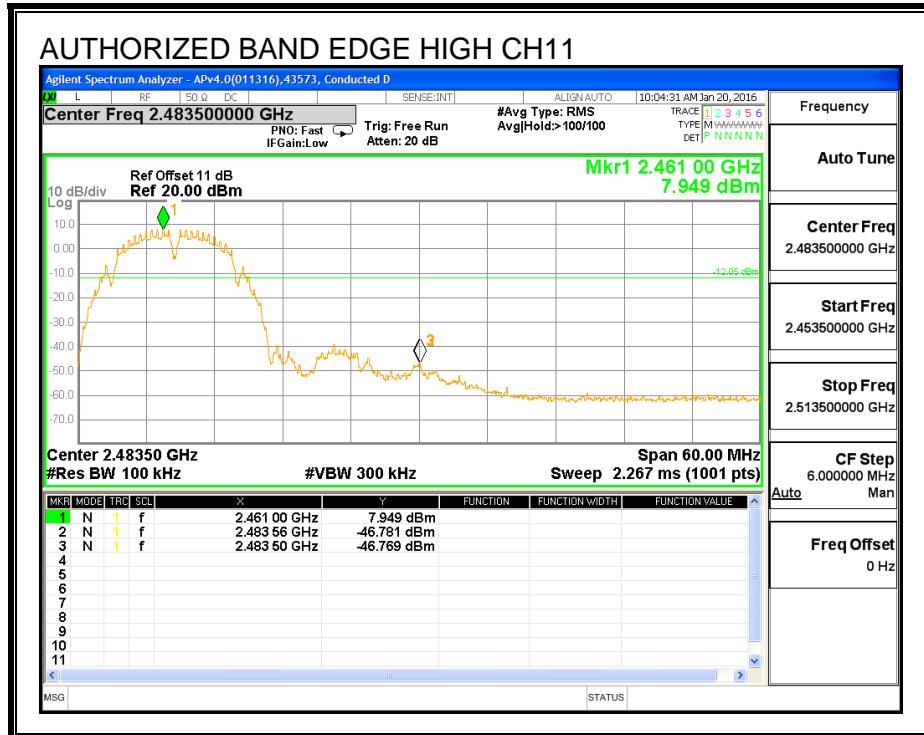


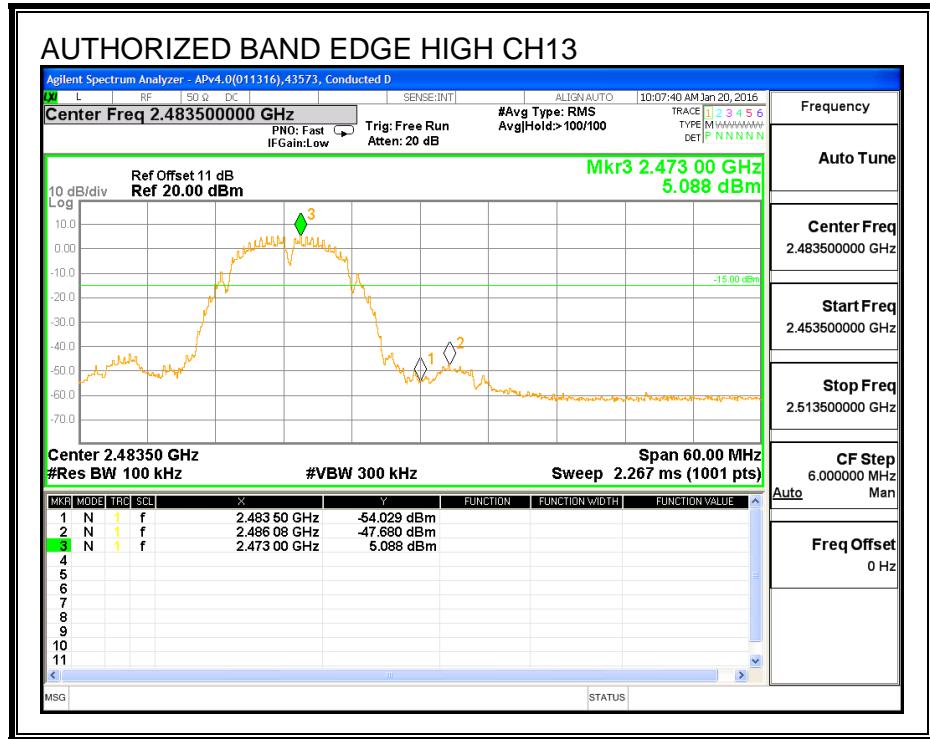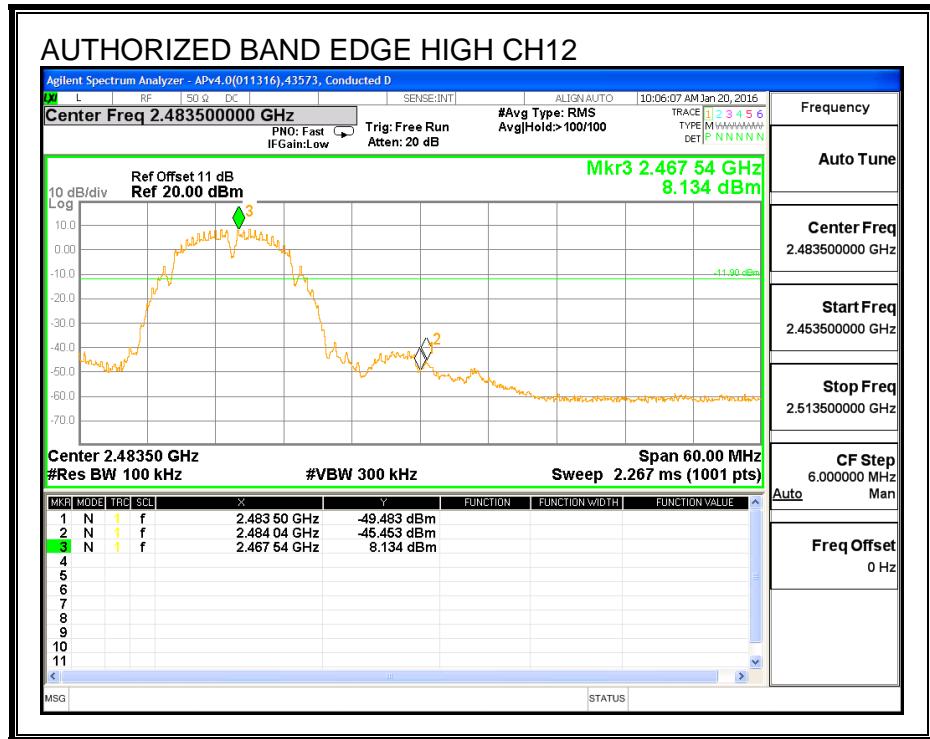

OUT-OF-BAND EMISSIONS

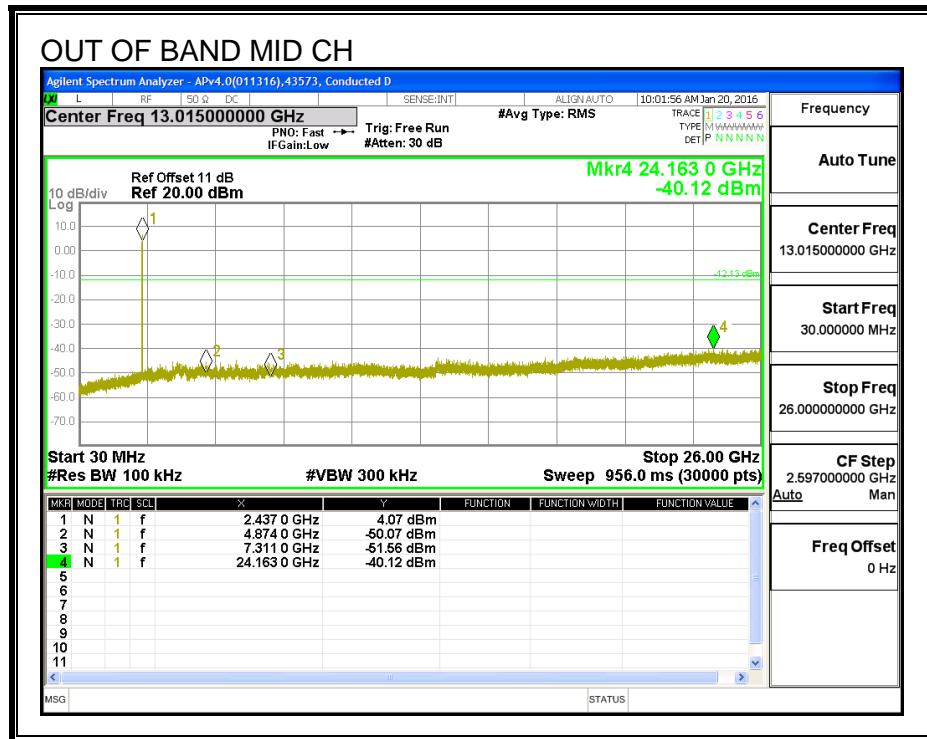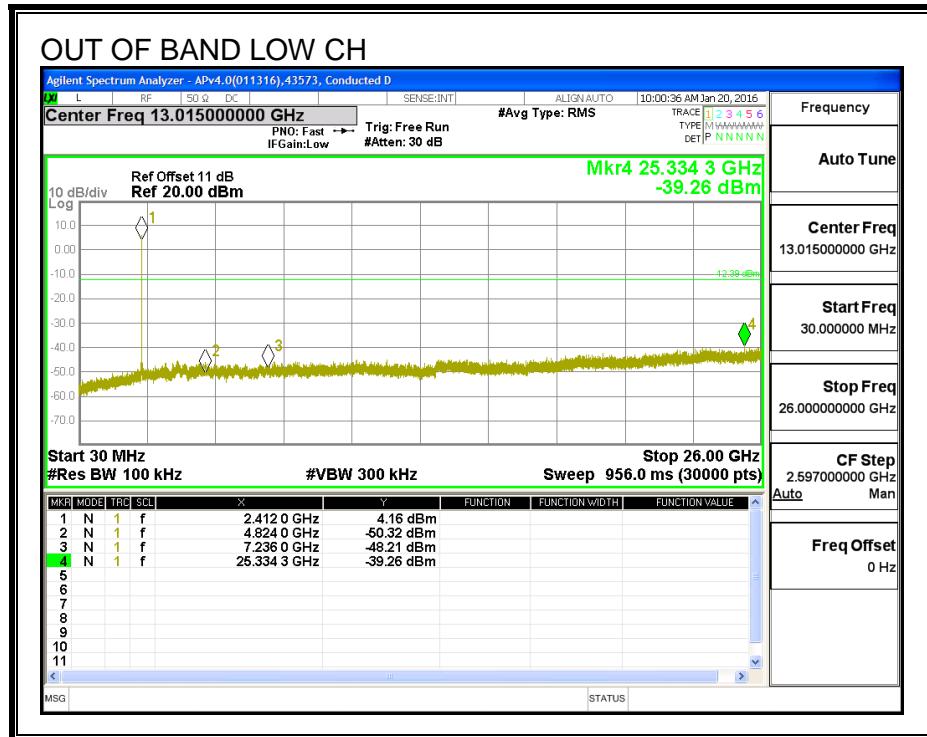

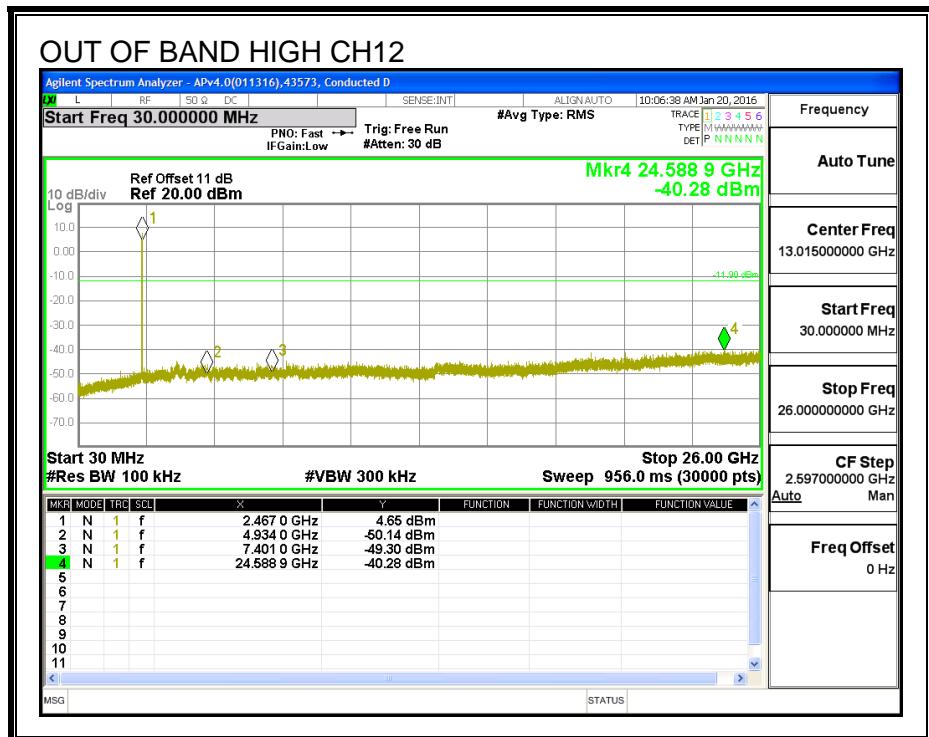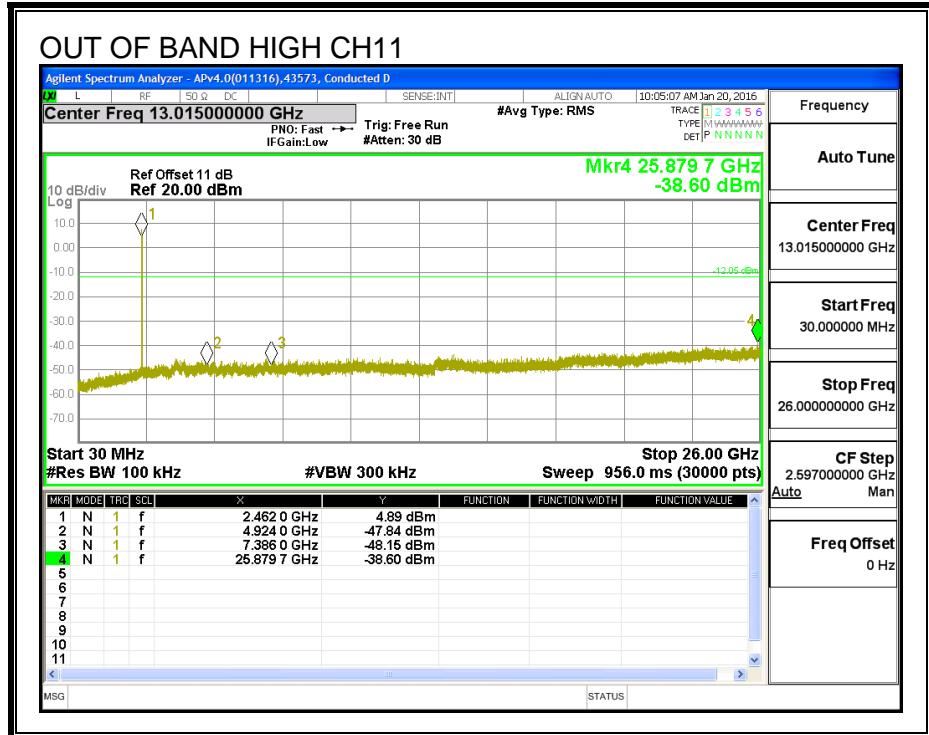

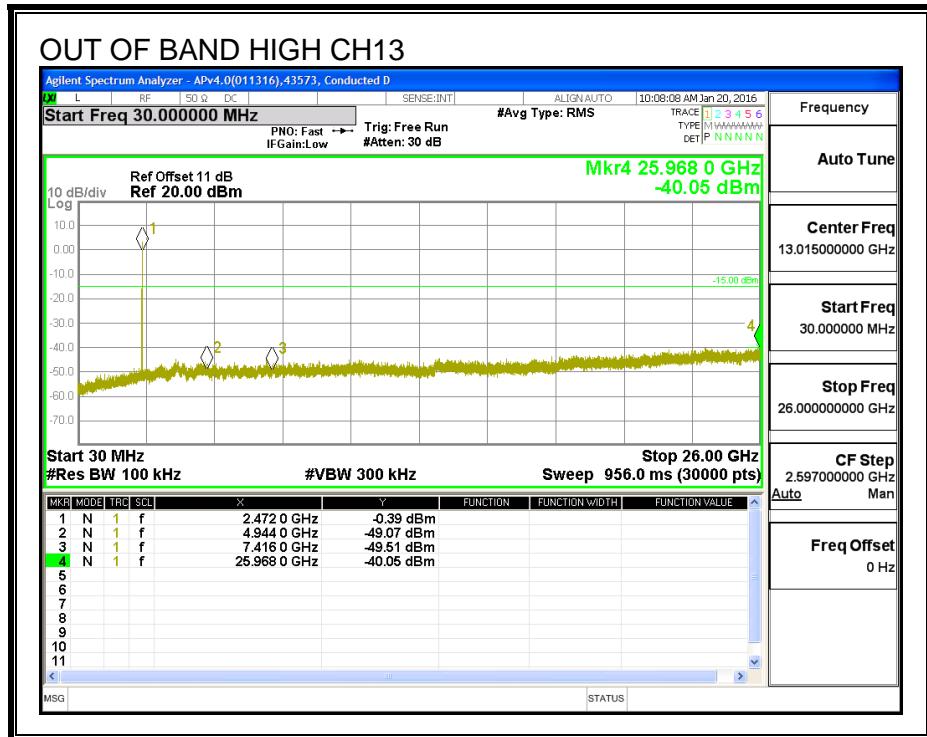

8.4. 802.11b SISO MODE IN THE 2.4 GHz BAND (ANTENNA D)

8.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.515	0.5
Mid	2437	8.806	0.5
High_11	2462	8.060	0.5
High_12	2467	8.060	0.5
High_13	2472	8.073	0.5

6 dB BANDWIDTH

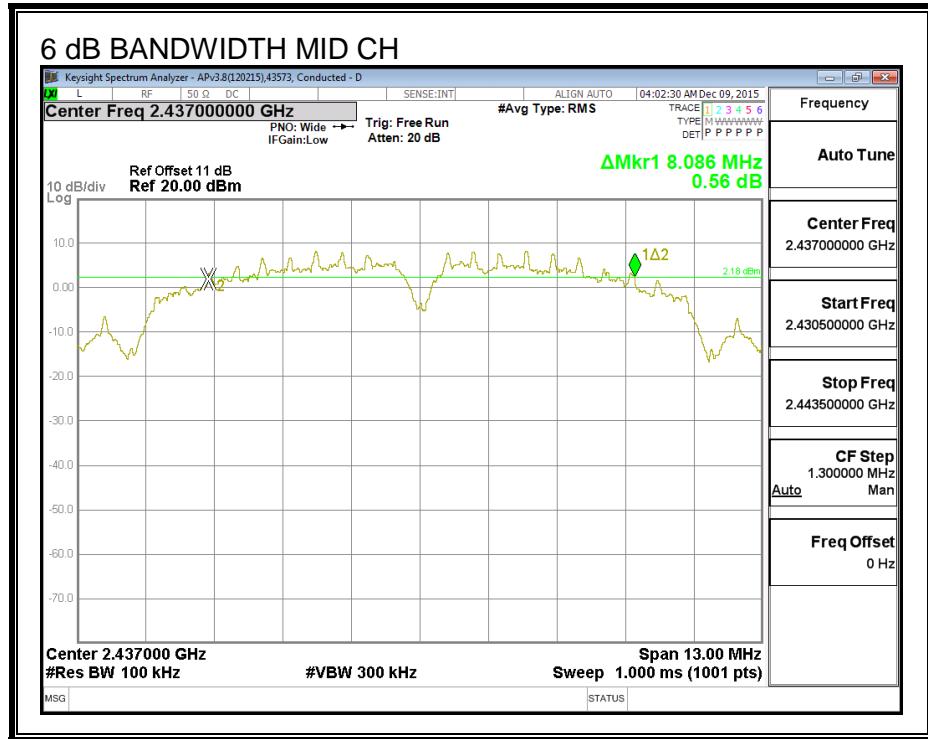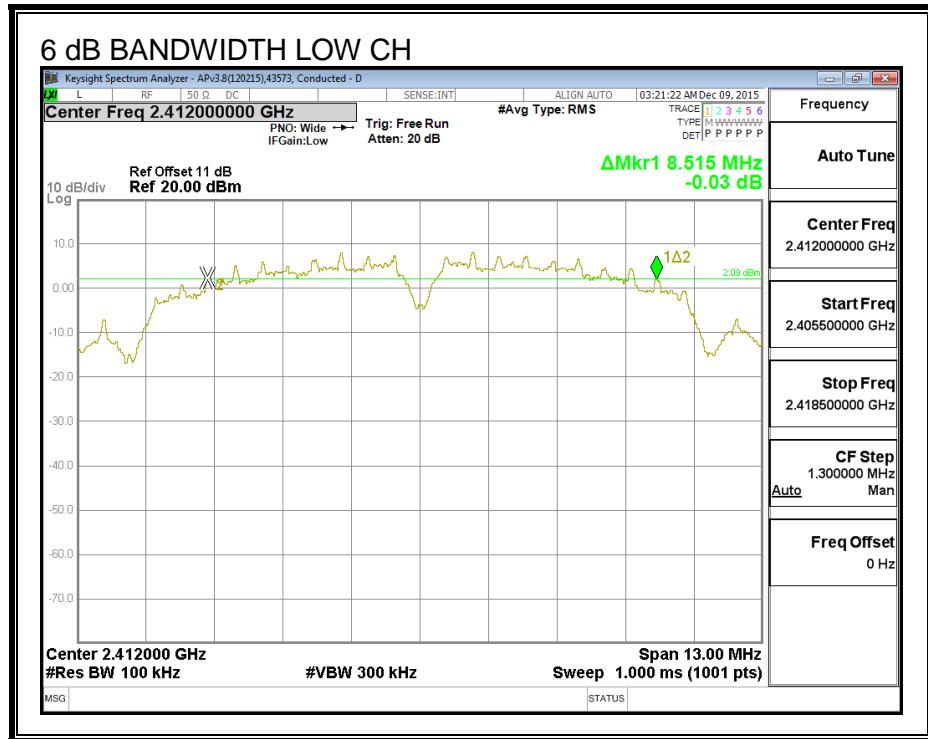

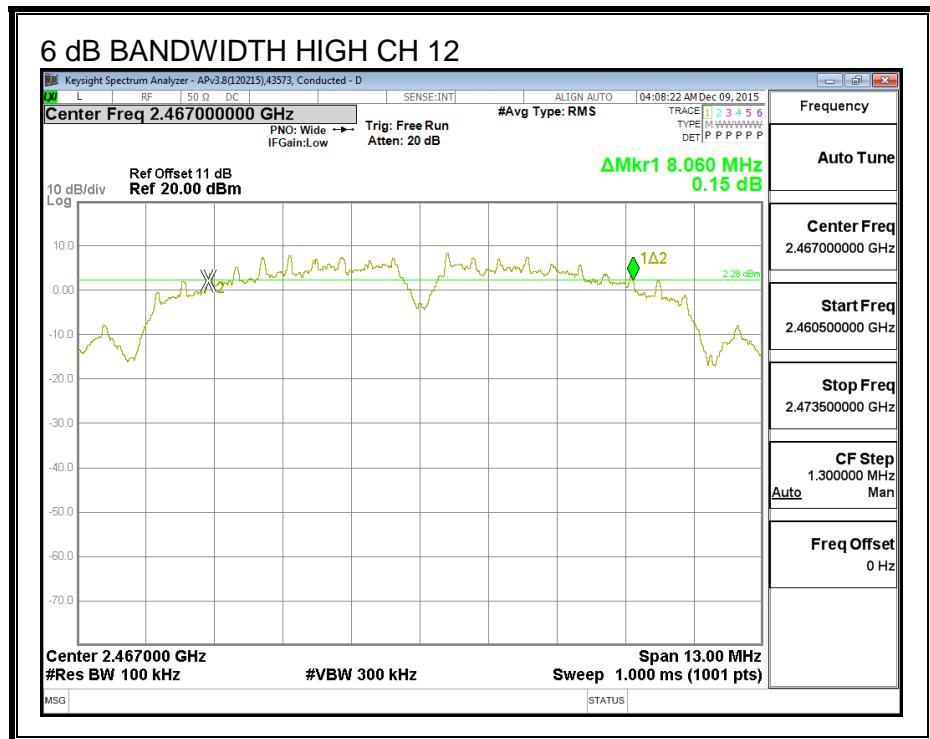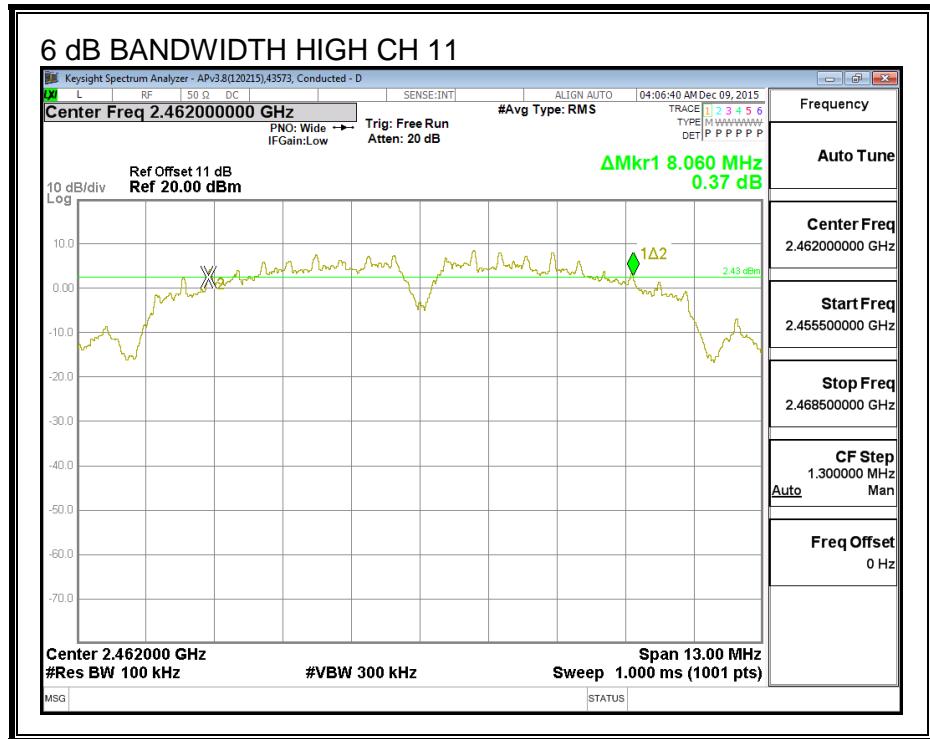

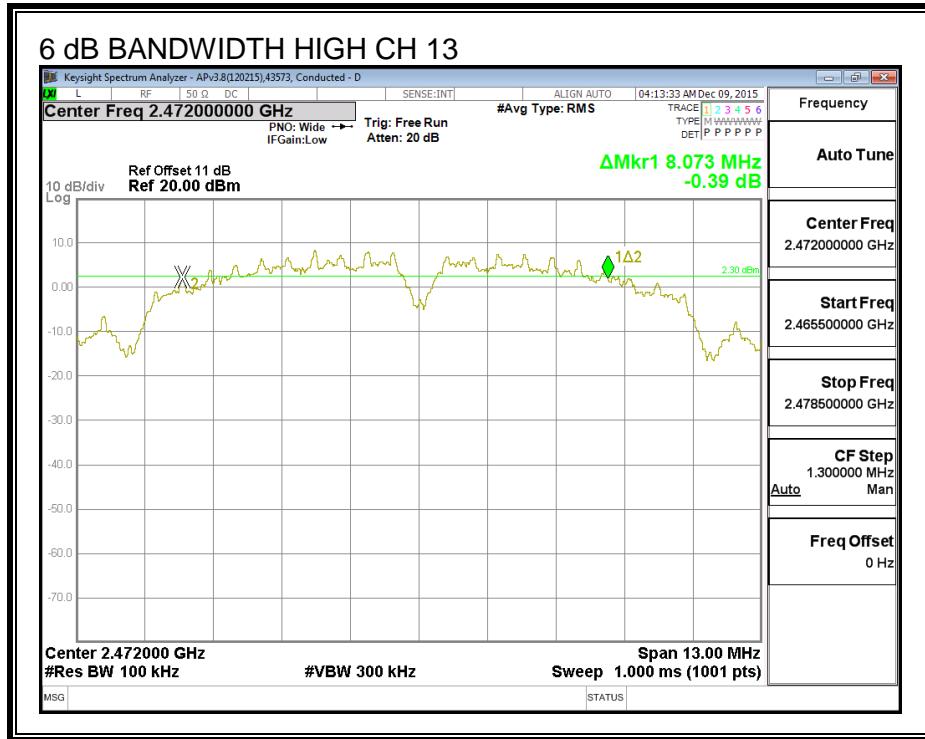

8.4.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	10.801
Mid	2437	10.646
High_11	2462	10.523
High_12	2467	10.542
High_13	2472	10.098

99% BANDWIDTH

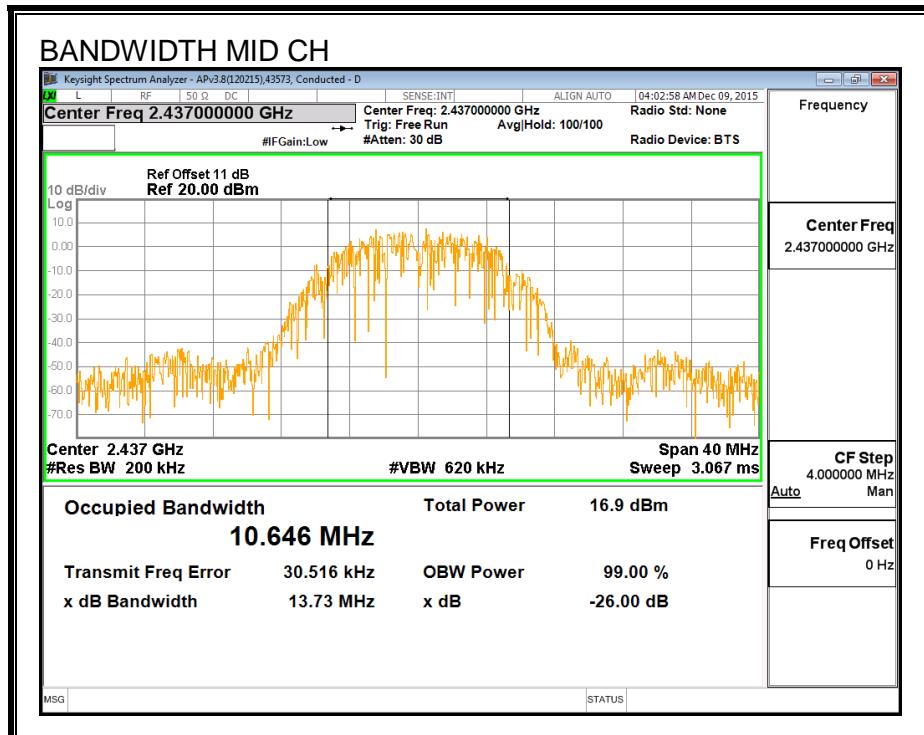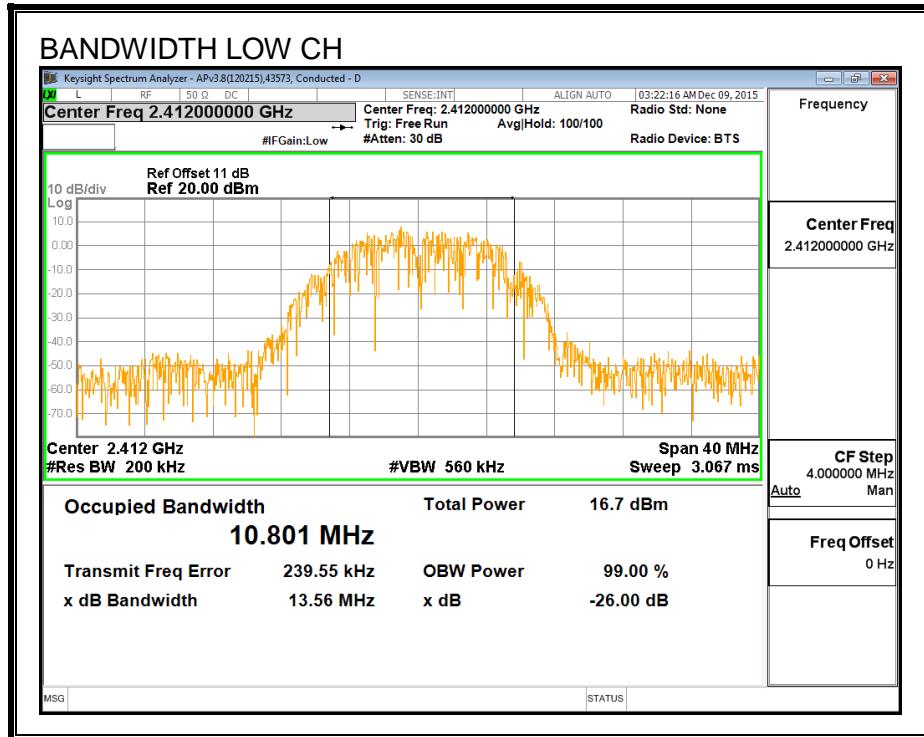

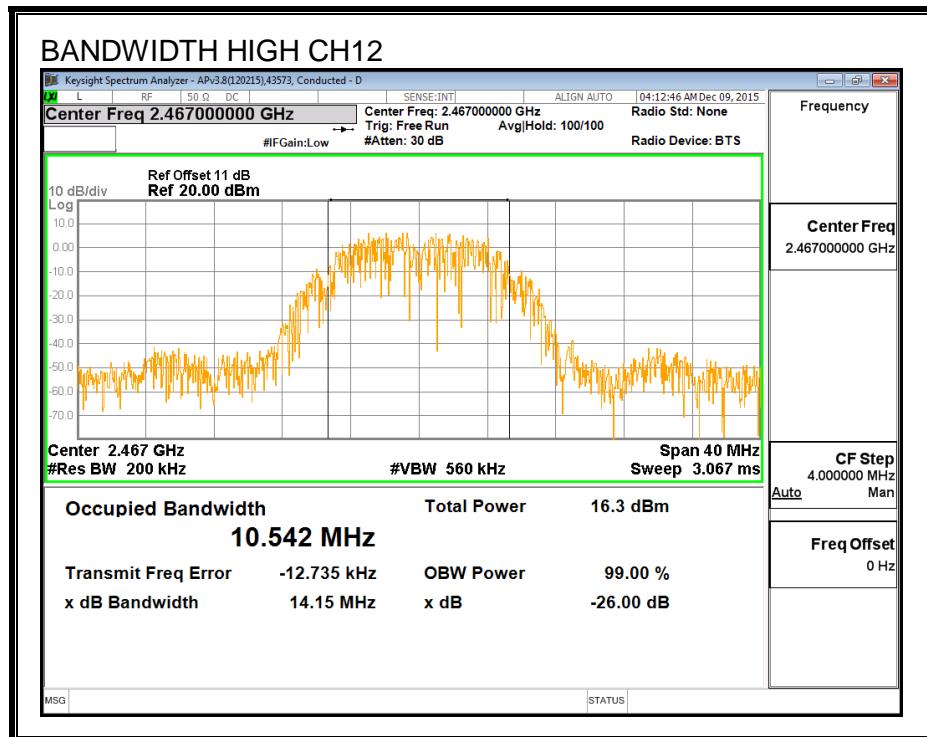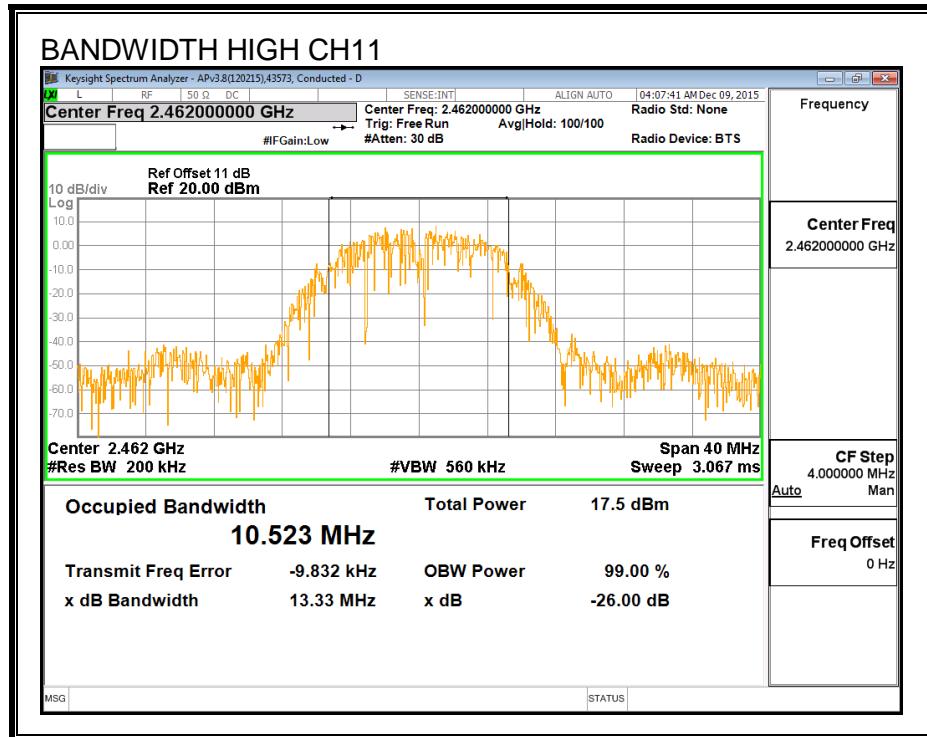

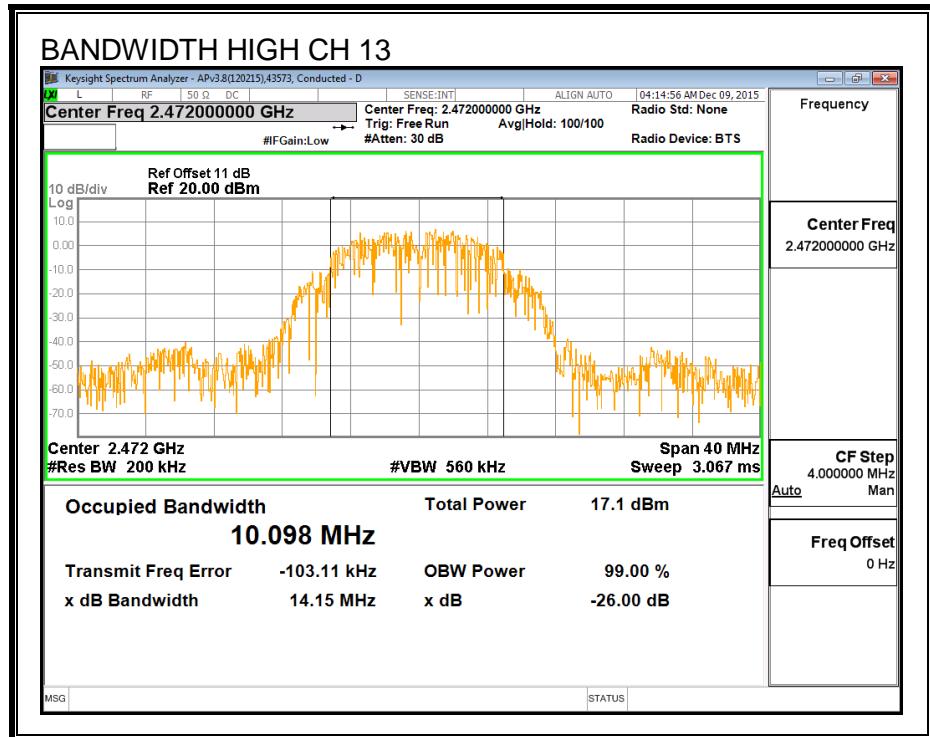

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	10.78
Mid	2437	10.82
High_11	2462	10.95
High_12	2467	10.79
High_13	2472	10.92

8.4.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.96	30.00	30	36	30.00
Mid	2437	0.96	30.00	30	36	30.00
High_11	2462	0.96	30.00	30	36	30.00
High_12	2467	0.96	30.00	30	36	30.00
High_13	2472	0.96	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Antenna D Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.23	14.23	30.00	-15.77
Mid	2437	14.27	14.27	30.00	-15.73
High_11	2462	14.41	14.41	30.00	-15.59
High_12	2467	14.26	14.26	30.00	-15.74
High_13	2472	14.36	14.36	30.00	-15.64

8.4.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


PSD Results

Channel	Frequency (MHz)	Antenna D Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.78	-11.78	8.0	-19.8
Mid	2437	-11.87	-11.87	8.0	-19.9
High_11	2462	-11.49	-11.49	8.0	-19.5
High_12	2467	-11.88	-11.88	8.0	-19.9
High_13	2472	-11.99	-11.99	8.0	-20.0

PSD

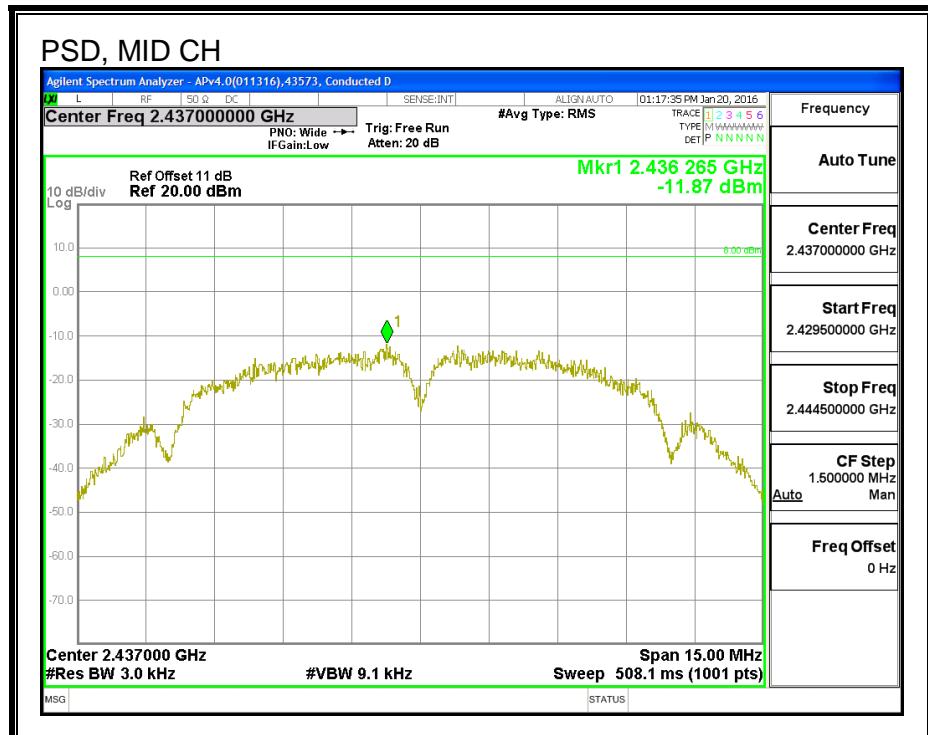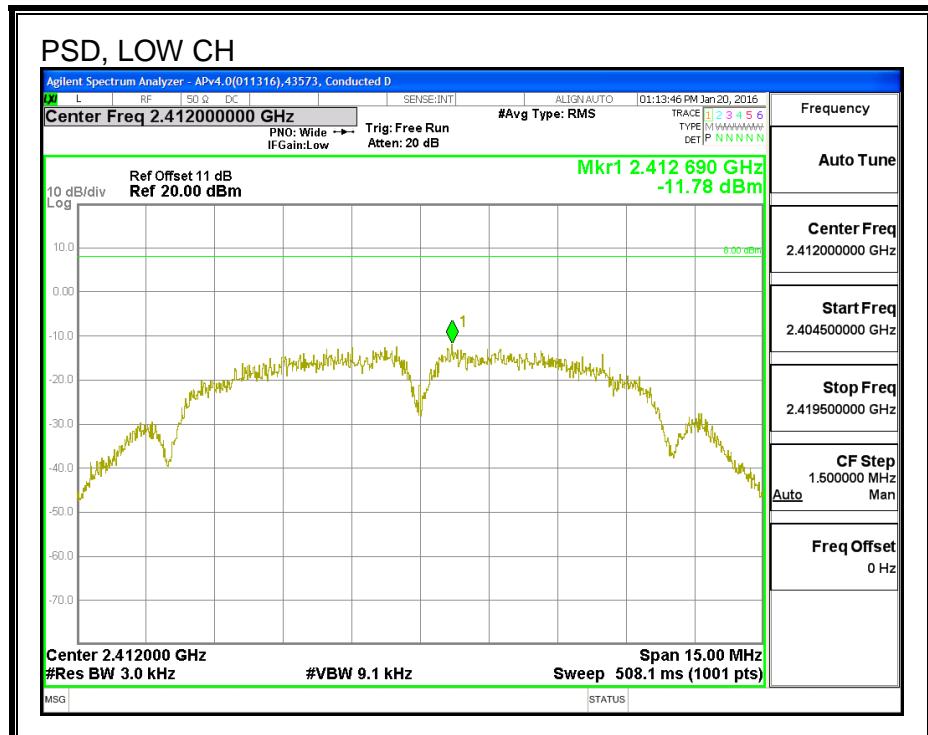

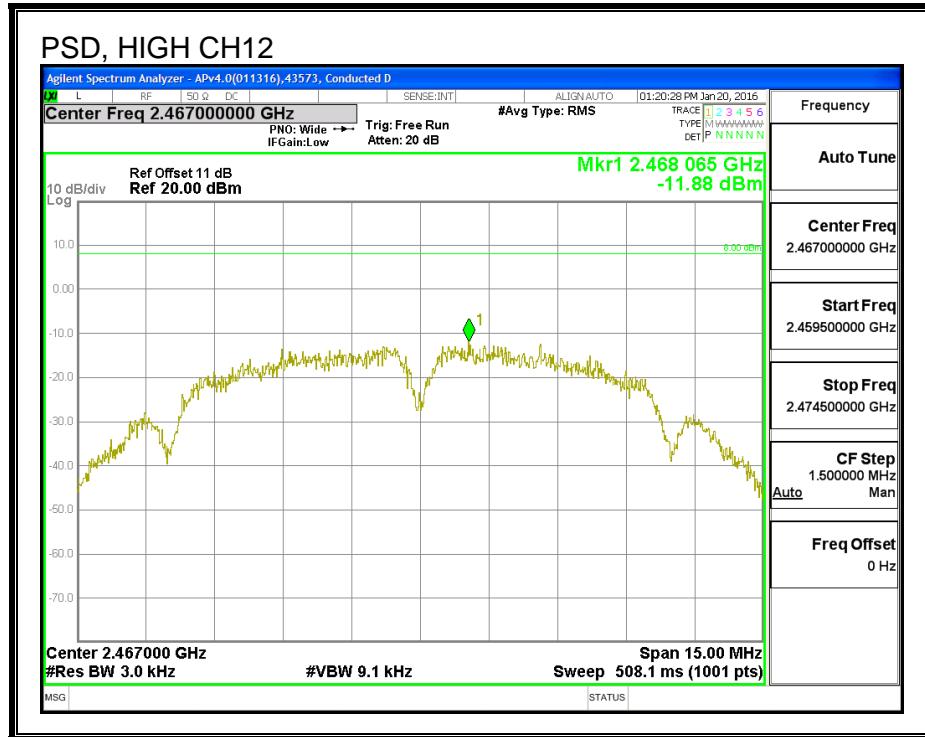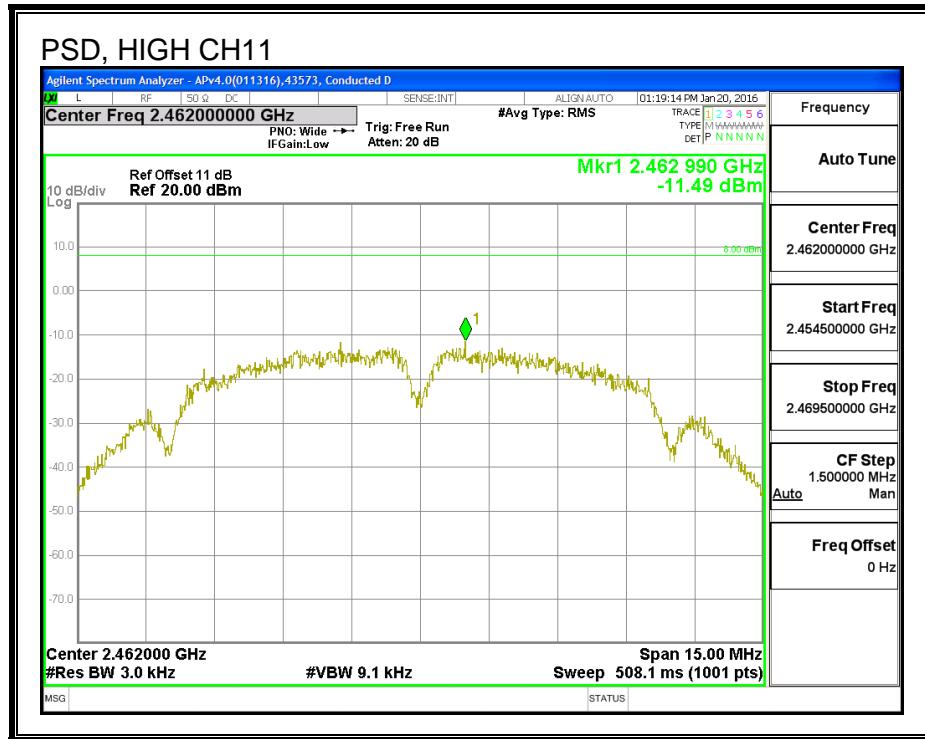

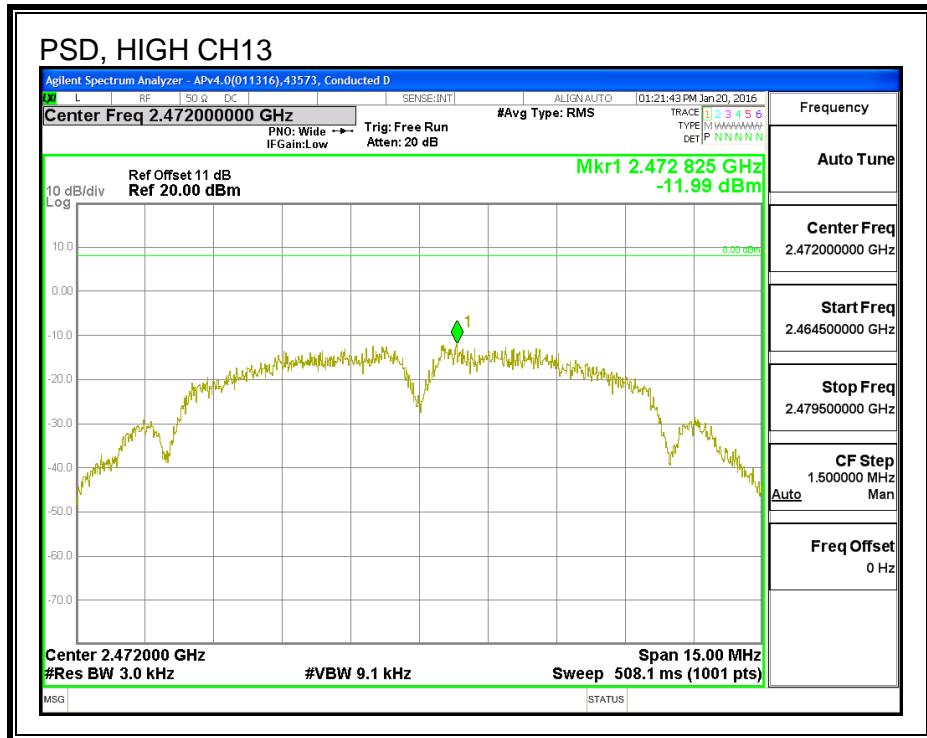

8.4.6. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


LOW CHANNEL BANDEDGE


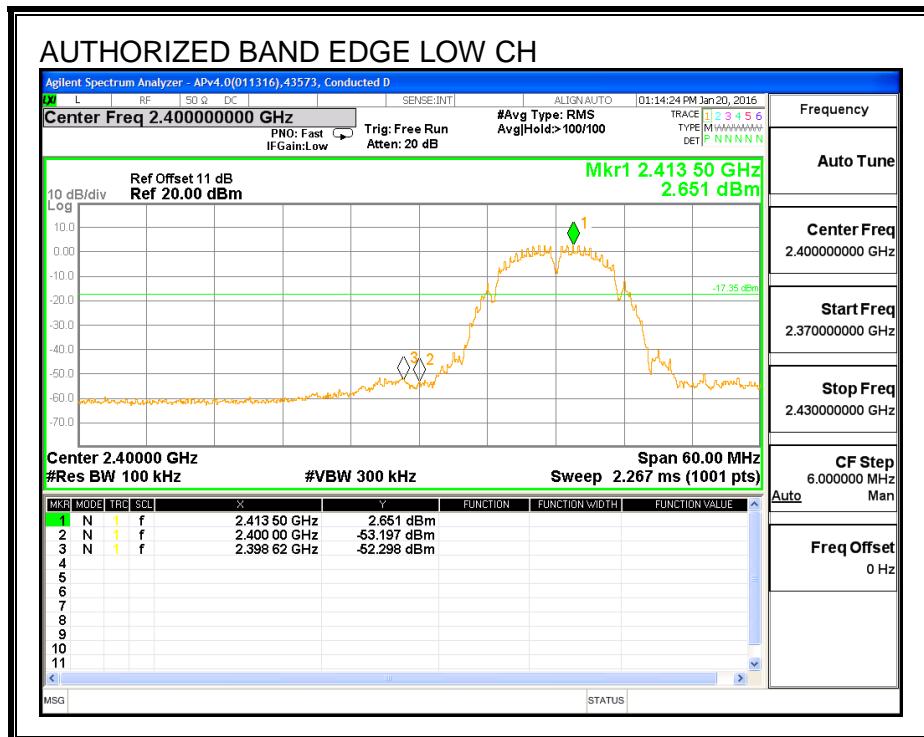


MID CHANNEL BANDEDGE


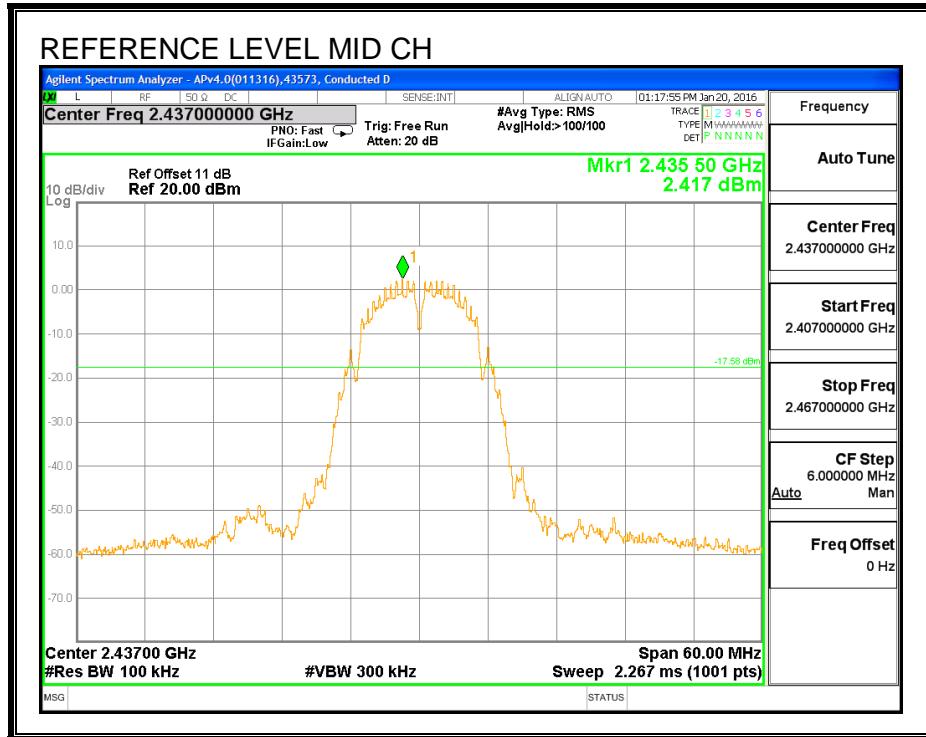




HIGH CHANNEL BANDEDGE

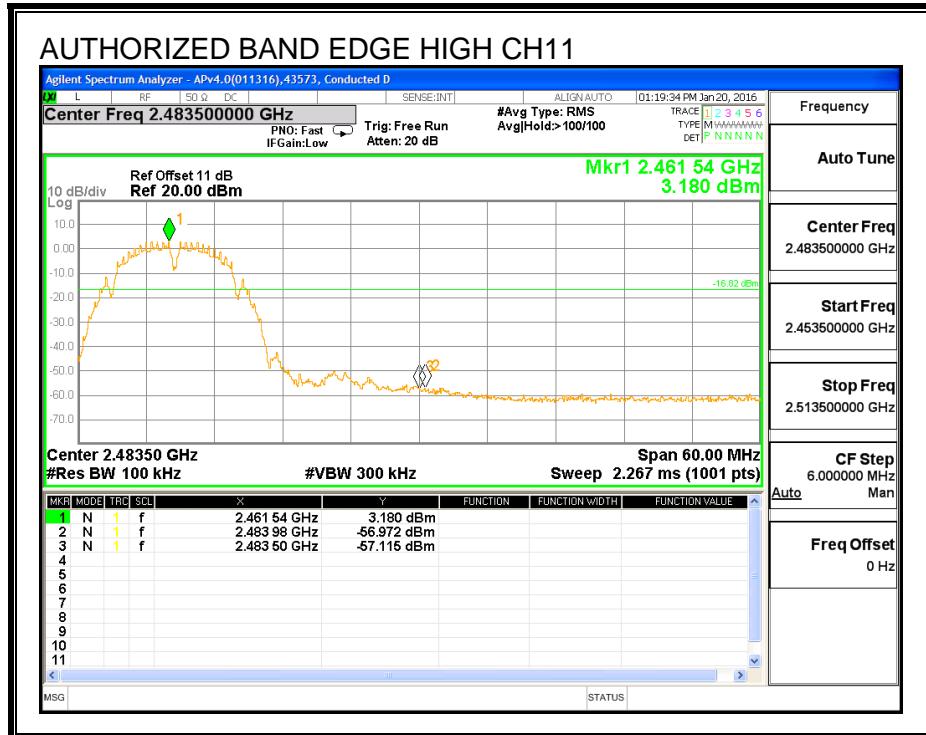


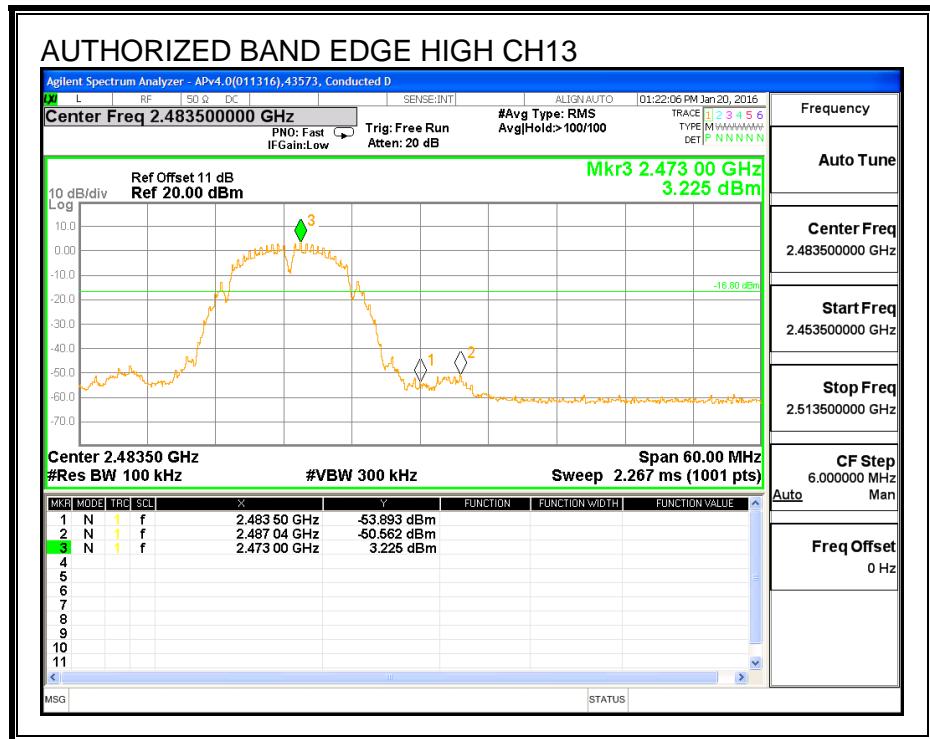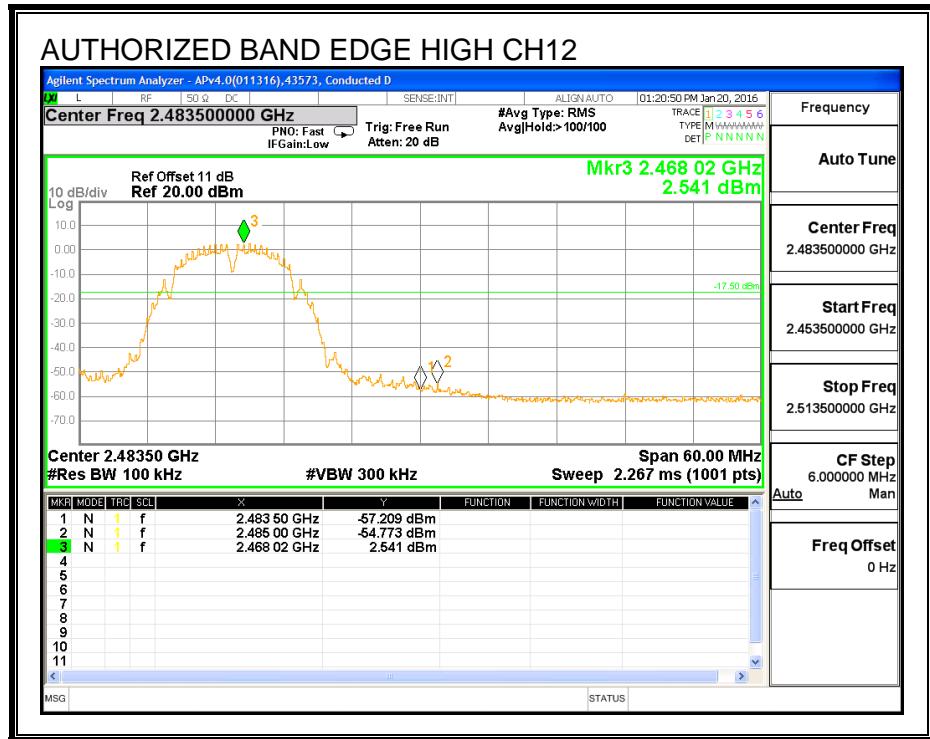

OUT-OF-BAND EMISSIONS

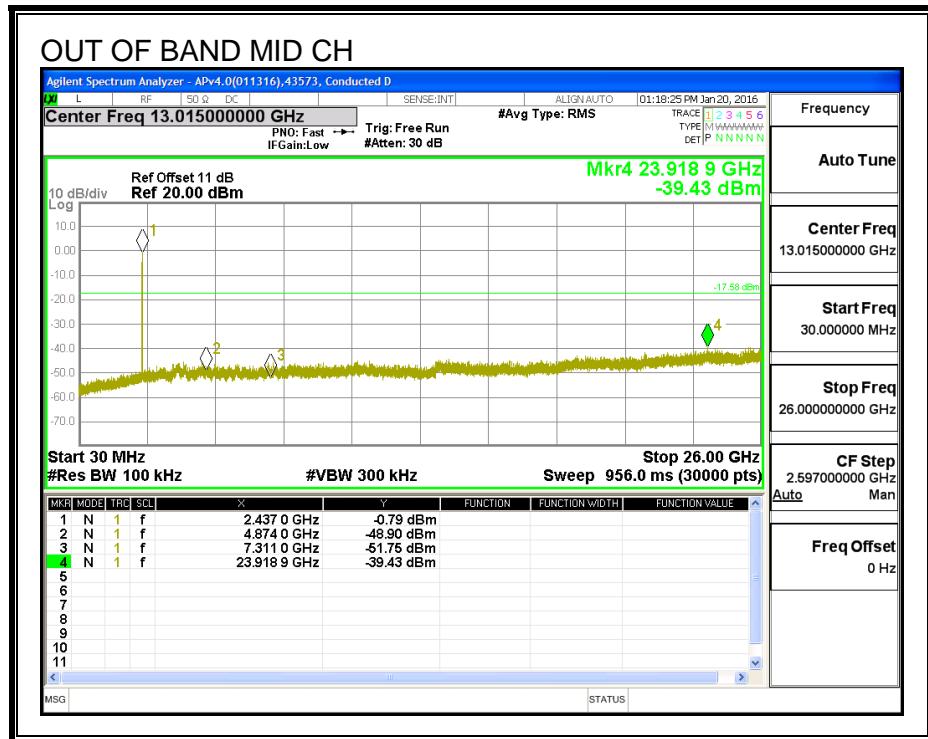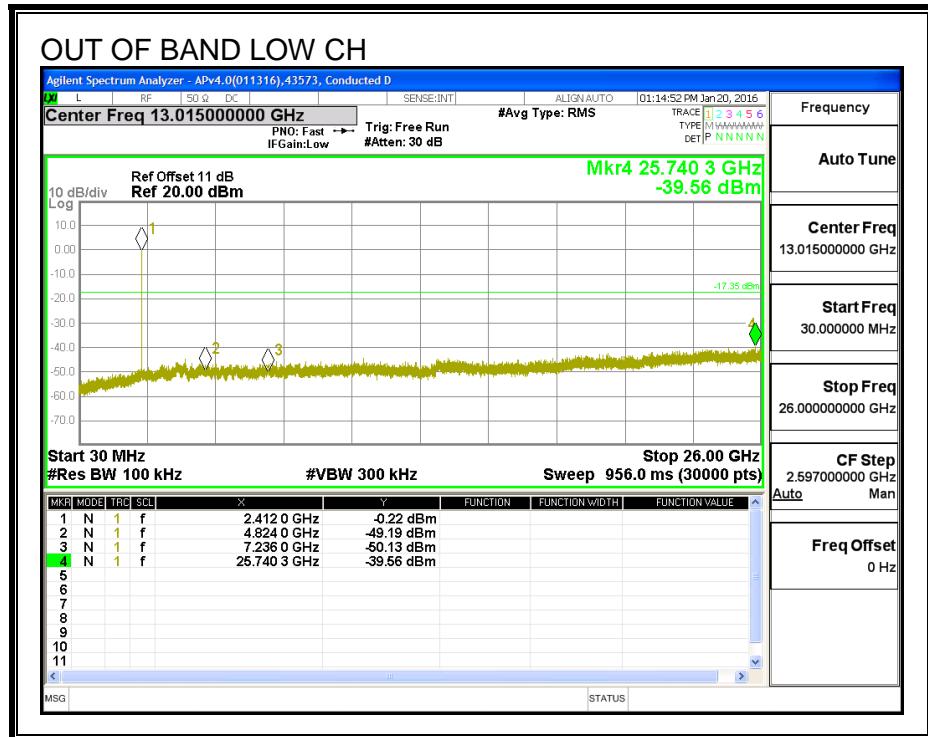

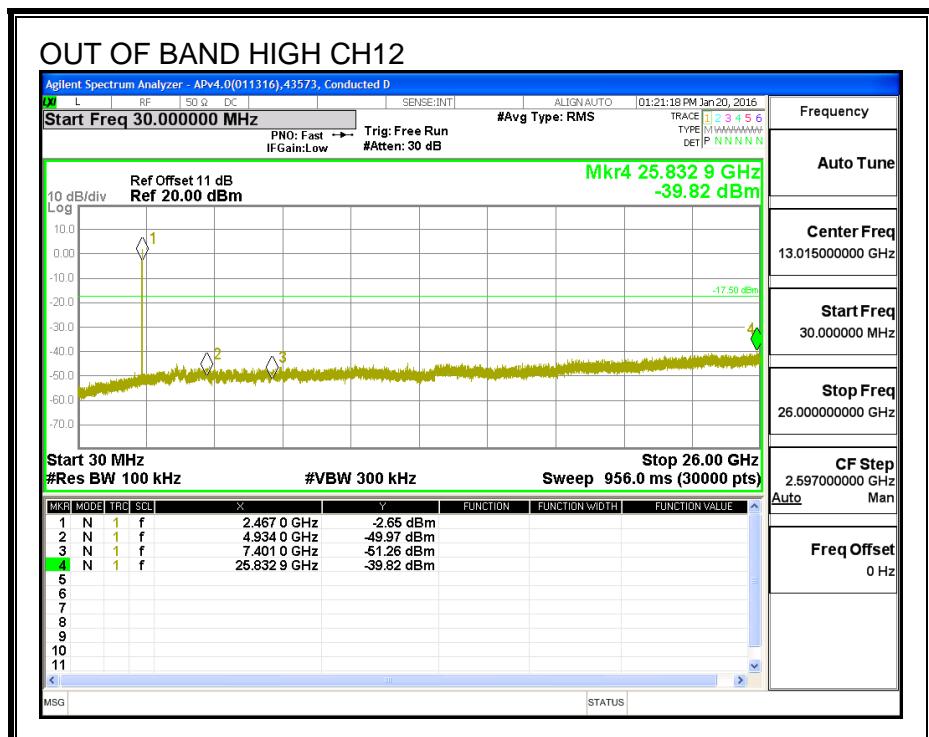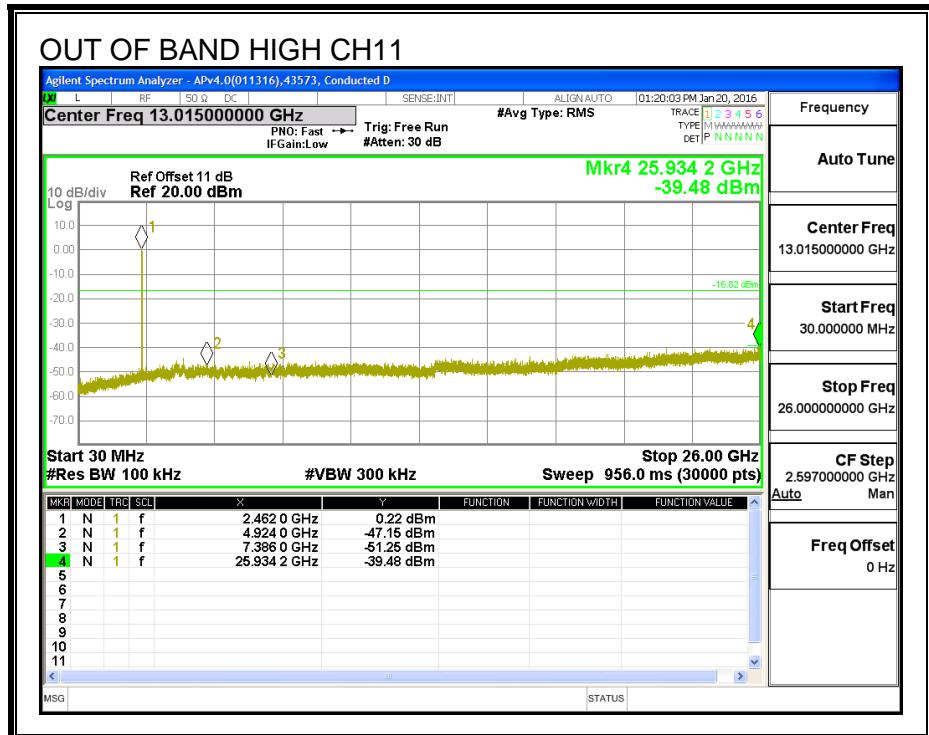

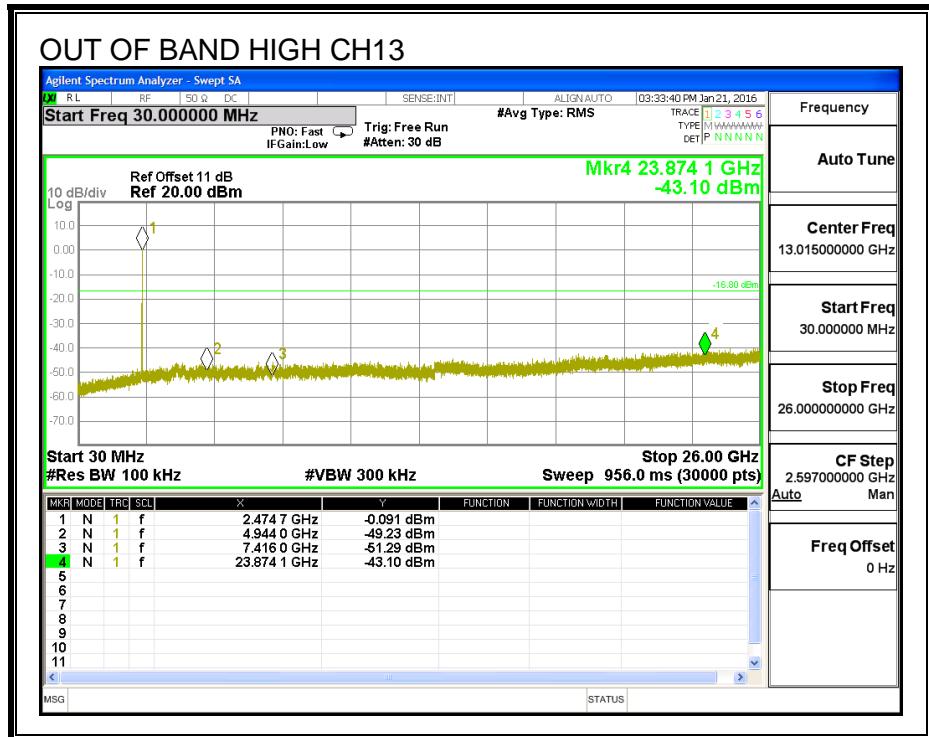

8.5. 802.11g SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)

Noted: Covered by 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)

8.6. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND (ANTENNA B)

8.6.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.93	0.5
Mid	2437	17.55	0.5
High_10	2457	17.58	0.5
High_11	2462	17.55	0.5
High_12	2467	17.16	0.5
High_13	2472	17.58	0.5

6 dB BANDWIDTH

