



CERTIFICATION TEST REPORT

Report Number. : 16U23817-E2V4

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1701

FCC ID : BCGA1701

IC : 579C-A1701

EUT Description : TABLET DEVICE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 1

Date Of Issue:
March 03, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]
TESTING
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	02/03/2017	Initial Review	Chin Pang
V2	03/01/2017	Address TCB's Questions	Chin Pang
V3	03/02/2017	Address TCB's Questions	Mengistu Mekuria
V4	03/03/2017	Address TCB's Question	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	8
4.2. <i>SAMPLE CALCULATION</i>	8
4.3. <i>MEASUREMENT UNCERTAINTY</i>	8
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	9
5.2. <i>MAXIMUM OUTPUT POWER</i>	9
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	9
5.4. <i>SOFTWARE AND FIRMWARE</i>	9
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	10
5.6. <i>DESCRIPTION OF TEST SETUP</i>	11
6. TEST AND MEASUREMENT EQUIPMENT	17
7. MEASUREMENT METHODS	18
8. ANTENNA PORT TEST RESULTS	19
8.1. <i>ON TIME AND DUTY CYCLE</i>	19
8.1.1. <i>HIGH POWER MODE</i>	20
8.1.2. <i>LOW POWER MODE</i>	21
8.2. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i>	22
8.2.1. <i>20 dB AND 99% BANDWIDTH</i>	22
8.2.2. <i>HOPPING FREQUENCY SEPARATION</i>	27
8.2.3. <i>NUMBER OF HOPPING CHANNELS</i>	28
8.2.4. <i>AVERAGE TIME OF OCCUPANCY</i>	31
8.2.5. <i>OUTPUT POWER</i>	35
8.2.6. <i>AVERAGE POWER</i>	36
8.2.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i>	37
8.3. <i>HIGH POWER ENHANCED DATA RATE DQPSK MODULATION</i>	41
8.3.1. <i>OUTPUT POWER</i>	41
8.3.2. <i>AVERAGE POWER</i>	42
8.4. <i>HIGH POWER ENHANCED DATA RATE 8PSK MODULATION</i>	43
8.4.1. <i>20 dB AND 99% BANDWIDTH</i>	43
8.4.2. <i>HOPPING FREQUENCY SEPARATION</i>	48
8.4.3. <i>NUMBER OF HOPPING CHANNELS</i>	49

8.4.4. AVERAGE TIME OF OCCUPANCY	52
8.4.5. OUTPUT POWER	56
8.4.6. AVERAGE POWER	57
8.4.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	58
8.5. <i>LOW POWER BASIC DATA RATE GFSK MODULATION</i>	62
8.5.1. 20 dB AND 99% BANDWIDTH	62
8.5.2. HOPPING FREQUENCY SEPARATION	67
8.5.3. NUMBER OF HOPPING CHANNELS.....	68
8.5.4. AVERAGE TIME OF OCCUPANCY	71
8.5.5. OUTPUT POWER	75
8.5.6. AVERAGE POWER	76
8.5.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	77
8.6. <i>LOW POWER ENHANCED DATA RATE DQPSK MODULATION</i>	81
8.6.1. OUTPUT POWER	81
8.6.2. AVERAGE POWER	82
8.7. <i>LOW POWER ENHANCED DATA RATE 8PSK MODULATION</i>	83
8.7.1. 20 dB AND 99% BANDWIDTH	83
8.7.2. HOPPING FREQUENCY SEPARATION	88
8.7.3. NUMBER OF HOPPING CHANNELS.....	89
8.7.4. AVERAGE TIME OF OCCUPANCY	92
8.7.5. OUTPUT POWER	96
8.7.6. AVERAGE POWER	97
8.7.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	98
9. RADIATED TEST RESULTS.....	102
9.1. <i>LIMITS AND PROCEDURE</i>	102
9.2. <i>HIGH POWER BASIC DATA RATE GFSK MODULATION</i>	103
9.2.1. RESTRICTED BANDEDGE (LOW CHANNEL).....	103
9.2.2. AUTHORIZED BANDEDGE (HIGH CHANNEL).....	105
9.2.3. HARMONICS AND SPURIOUS EMISSIONS	107
9.3. <i>HIGH POWER ENHANCED DATA RATE 8PSK MODULATION</i>	113
9.3.1. RESTRICTED BANDEDGE (LOW CHANNEL).....	113
9.3.2. AUTHORIZED BANDEDGE (HIGH CHANNEL).....	115
9.3.3. HARMONICS AND SPURIOUS EMISSIONS	116
9.4. <i>LOW POWER BASIC DATA RATE GFSK MODULATION</i>	122
9.4.1. RESTRICTED BANDEDGE (LOW CHANNEL).....	122
9.4.2. AUTHORIZED BANDEDGE (HIGH CHANNEL).....	124
9.4.3. HARMONICS AND SPURIOUS EMISSIONS	126
9.5. <i>LOW POWER ENHANCED DATA RATE 8PSK MODULATION</i>	132
9.5.1. RESTRICTED BANDEDGE (LOW CHANNEL).....	132
9.5.2. AUTHORIZED BANDEDGE (HIGH CHANNEL).....	134
9.5.3. HARMONICS AND SPURIOUS EMISSIONS	136
9.6. <i>WORST-CASE CO-LOCATION</i>	142
9.7. <i>WORST-CASE BELOW 1 GHz</i>	144
9.8. <i>WORST-CASE ABOVE 18 GHz</i>	146
10. AC POWER LINE CONDUCTED EMISSIONS.....	148
10.1. <i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i>	149

10.2. <i>EUT POWERED BY HOST PC VIA USB CABLE</i>	151
11. SETUP PHOTOS	153

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1701

SERIAL NUMBER: CONDUCTED (DLXSQ00GHQFD),
RADIATED (DLXSQ02WHQFC)

DATE TESTED: DECEMBER 11, 2016 – JANUARY 17, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



FRANCISCO GUARNERO
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input type="checkbox"/> Chamber D (IC:2324B-4)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC:2324B-5)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input checked="" type="checkbox"/> Chamber F (IC:2324B-6)
	<input checked="" type="checkbox"/> Chamber G (IC:2324B-7)
	<input type="checkbox"/> Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	20.38	109.14
	DQPSK	19.49	88.92
	Enhanced 8PSK	19.61	91.41

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)
2.4	1.00

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

5.5. WORST-CASE CONFIGURATION AND MODE

For below 1G, 18-26GHz radiated emission, and power line conducted emissions were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y (Landscape) orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.

Worst-case data rates were:

GFSK mode: DH5

8PSK mode: 3-DH5

DQPSK mode has been verified to have the lowest power.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None						

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

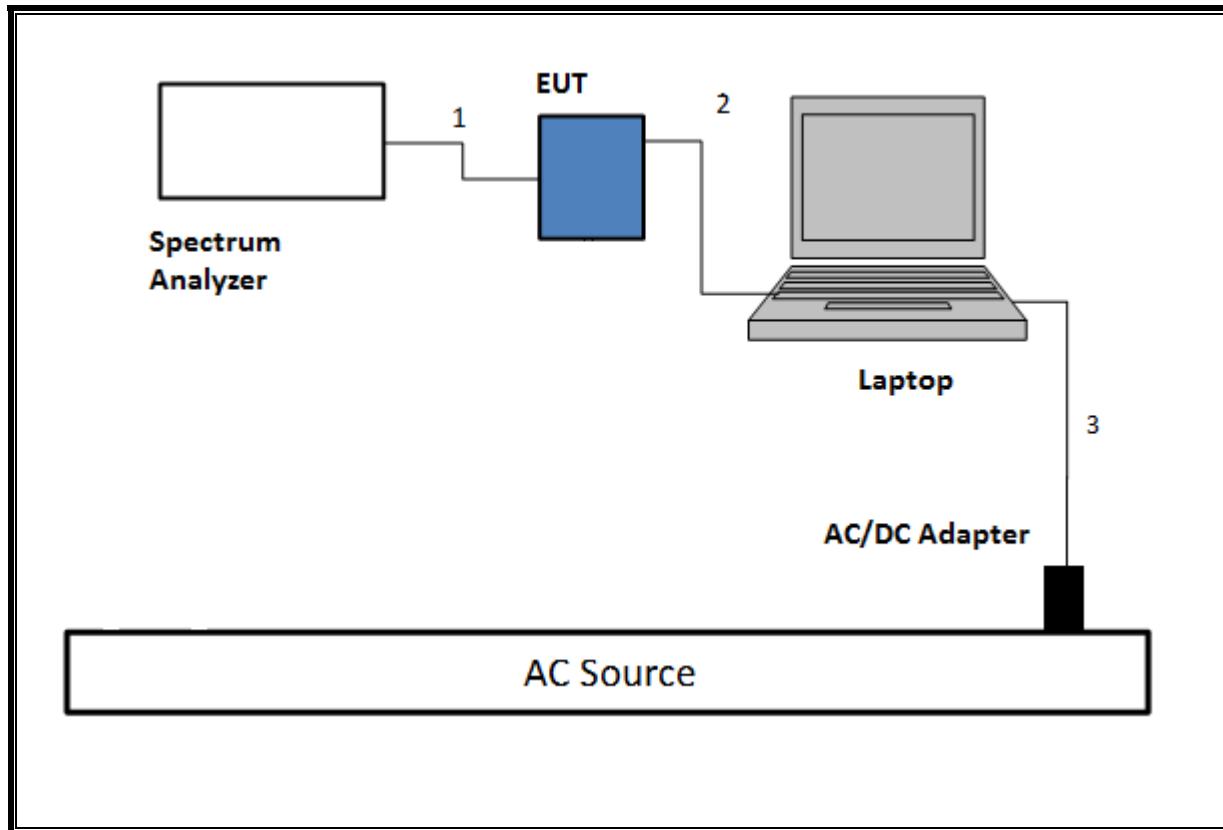

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

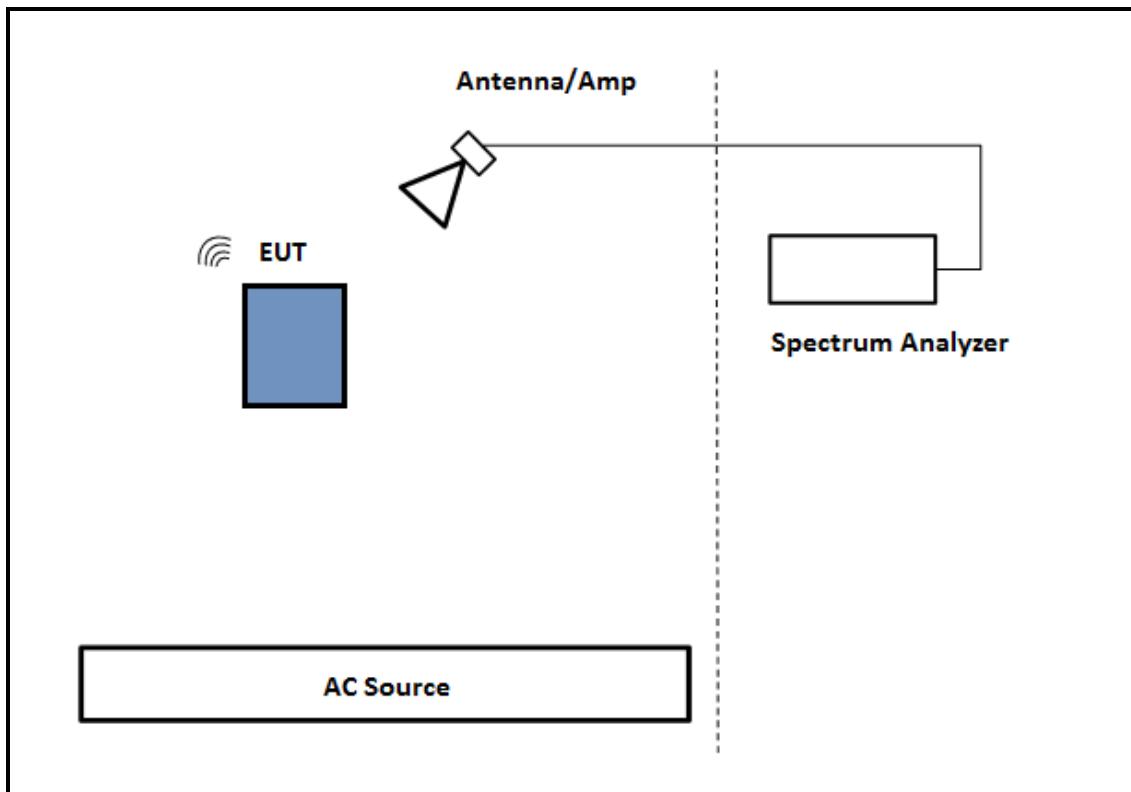

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.


SETUP DIAGRAM

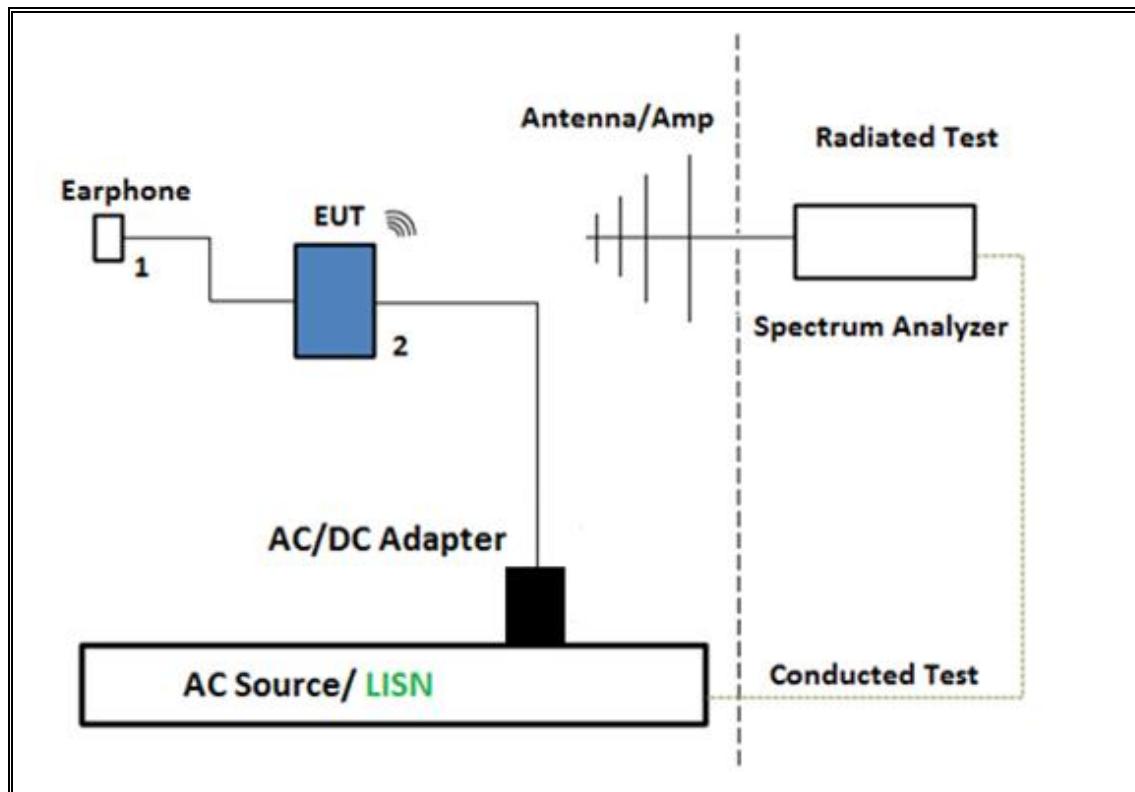

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

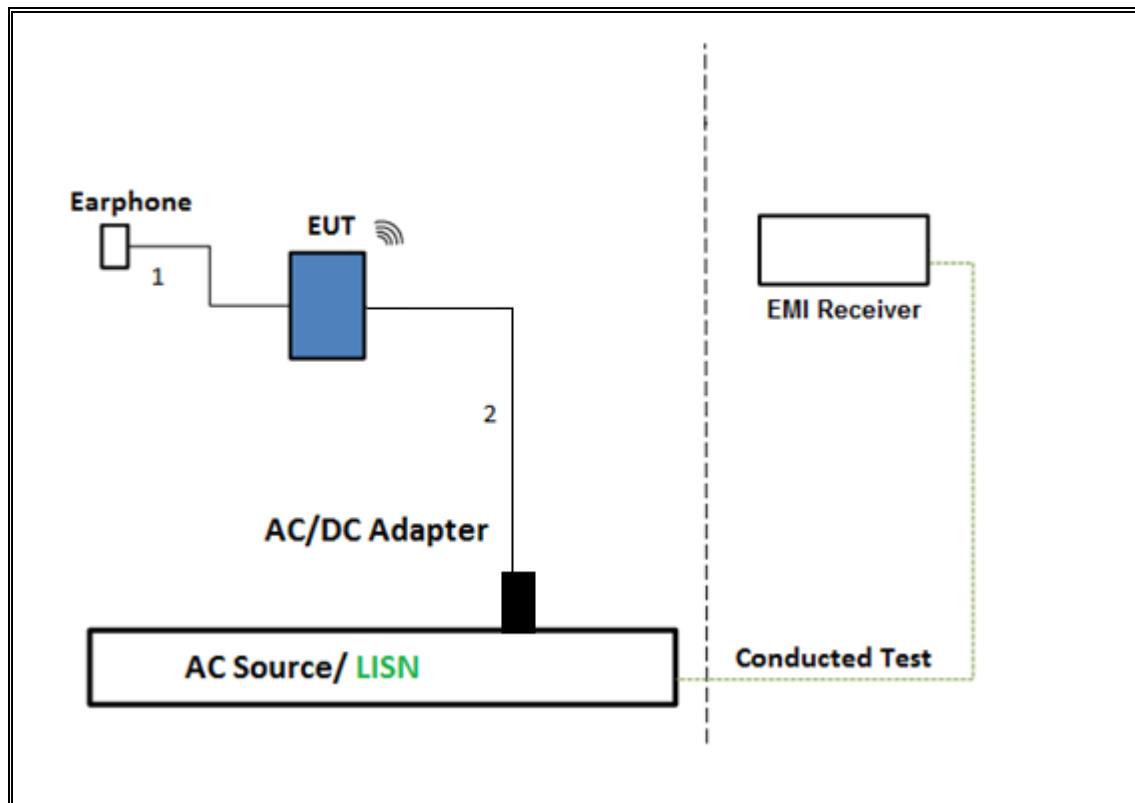

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

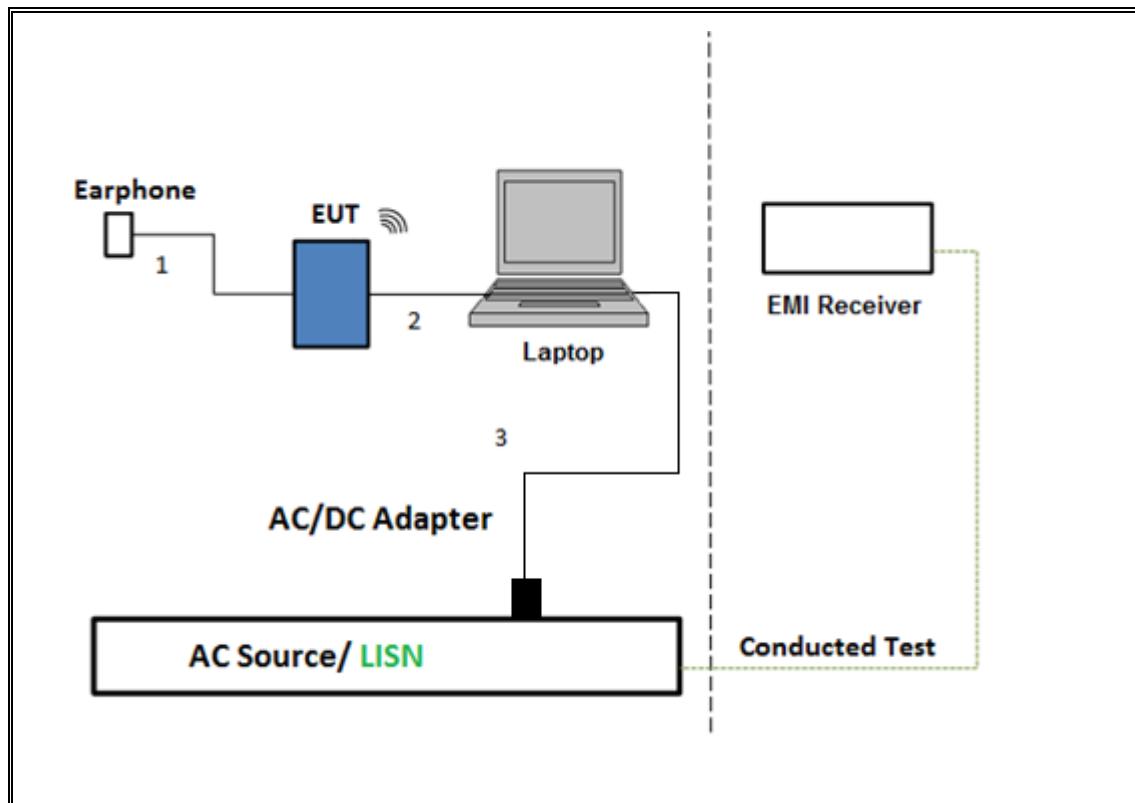

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T300	11/10/17
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T426	9/23/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T243	10/11/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T285	6/20/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1613	9/23/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T300	11/10/17
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	4/5/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T122	1/29/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	11/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	6/17/2017
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/18/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	5/26/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	5/31/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	6/17/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T1210	6/30/2017
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T227	10/11/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T1226	05/18/2017
Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	6/16/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
Amplifier, 1 to 26.5GHz 23.5dB gain Minimum	Keysight	8449B	T402	7/5/2017
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1124	10/7/2017
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3 and 6.5

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3 and 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE



ANSI C63.10, Section 11.6: Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
GFSK HIGH POWER	1.000	1.000	1.000	100.00%	0.00	0.010
8PSK HIGH POWER	1.000	1.000	1.000	100.00%	0.00	0.010
GFSK LOW POWER	1.000	1.000	1.000	100.00%	0.00	0.010
8PSK LOW POWER	1.000	1.000	1.000	100.00%	0.00	0.010

DUTY CYCLE PLOTS

8.1.1. HIGH POWER MODE

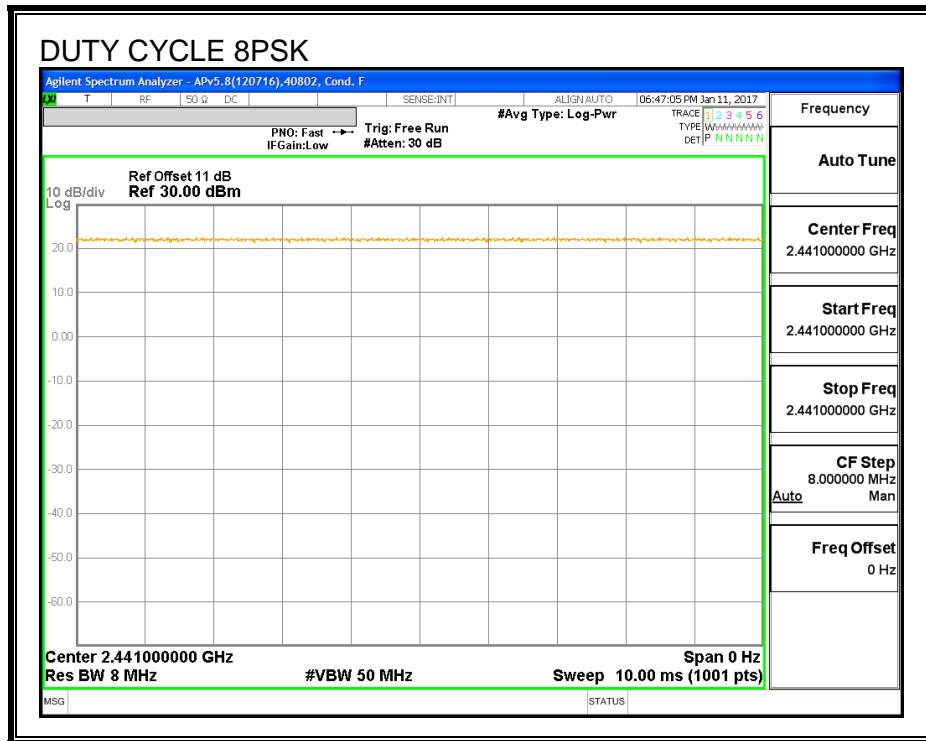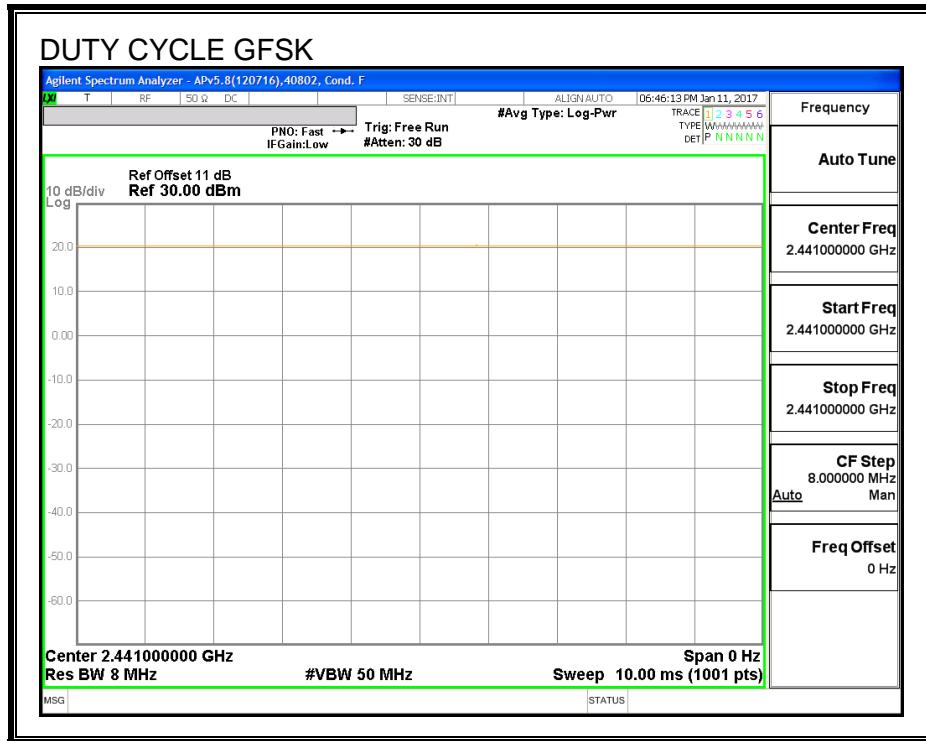

8.1.2. LOW POWER MODE

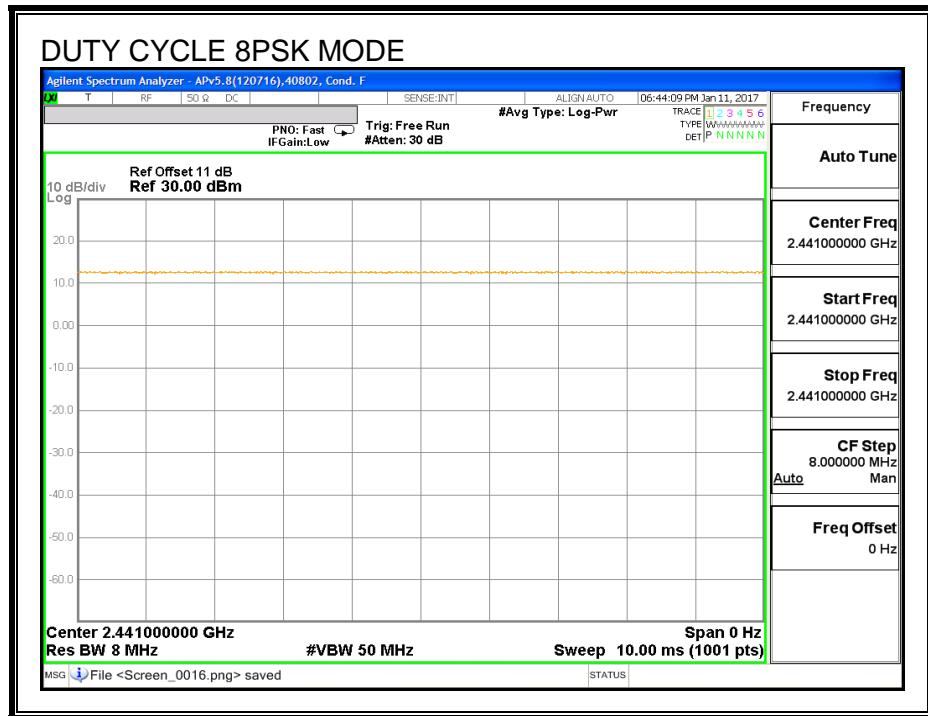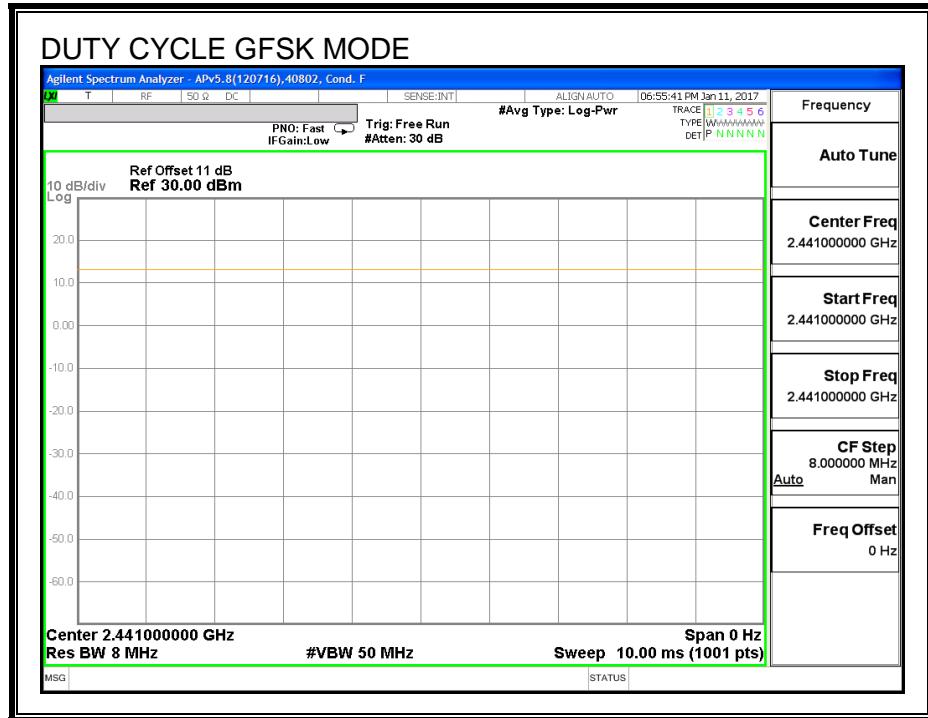

8.2. HIGH POWER BASIC DATA RATE GFSK MODULATION

8.2.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	922	854.78
Middle	2441	916	906.44
High	2480	942	860.54

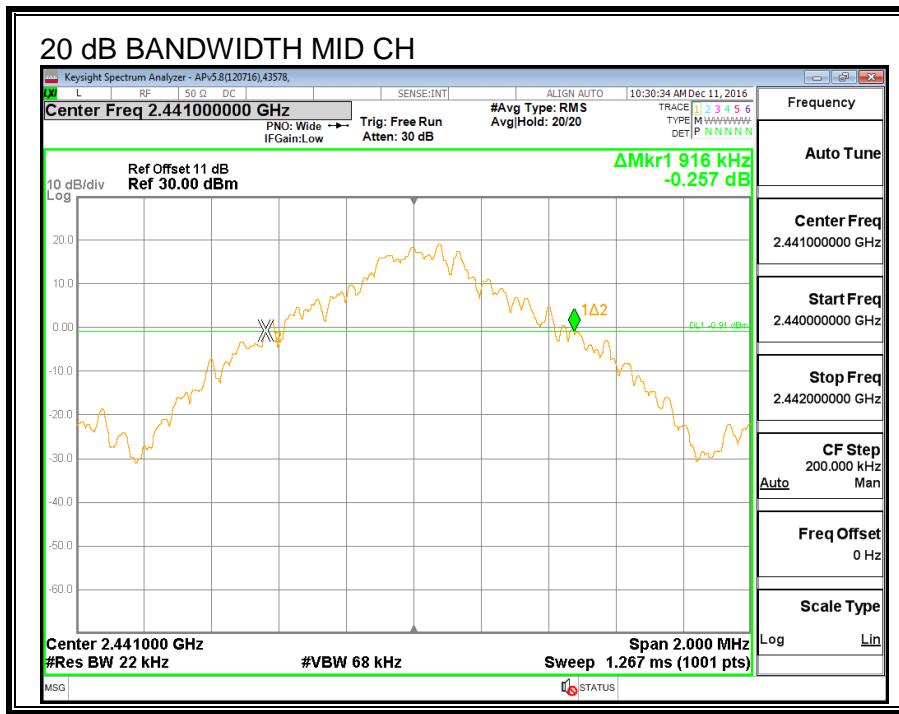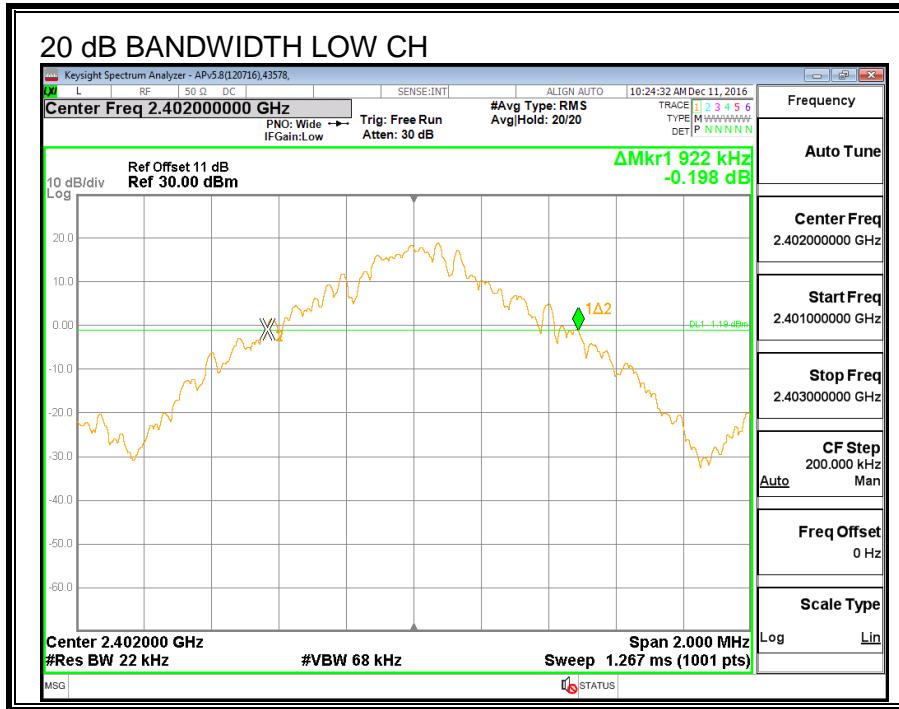20dB BANDWIDTH

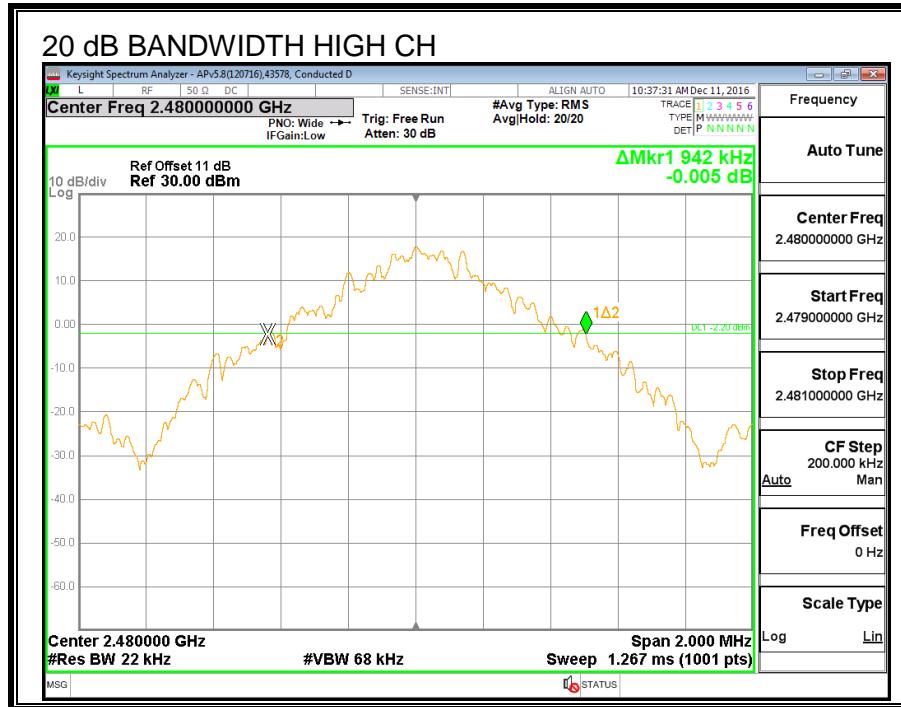

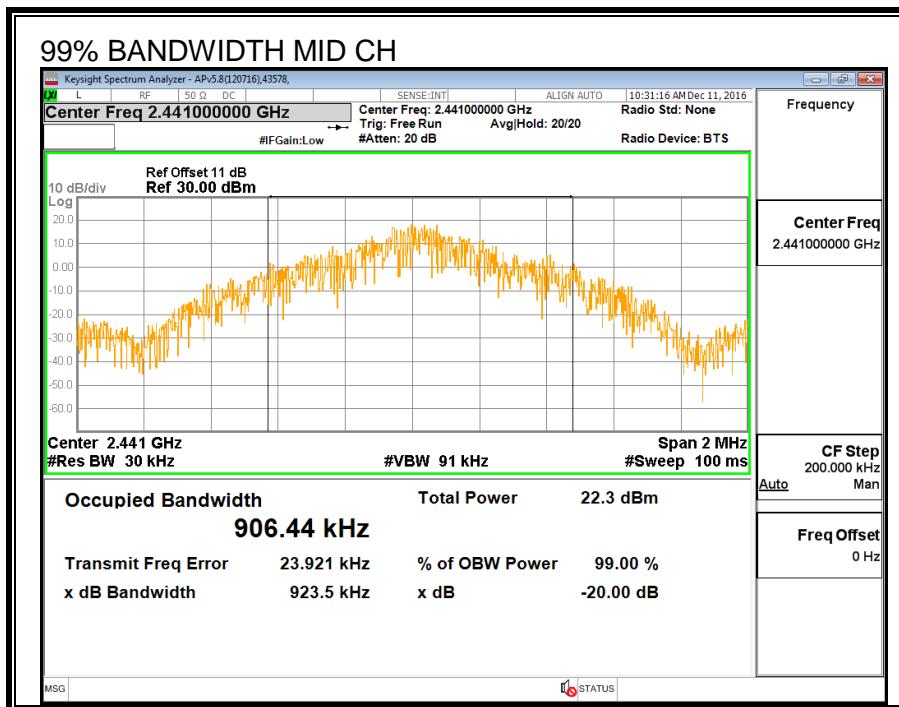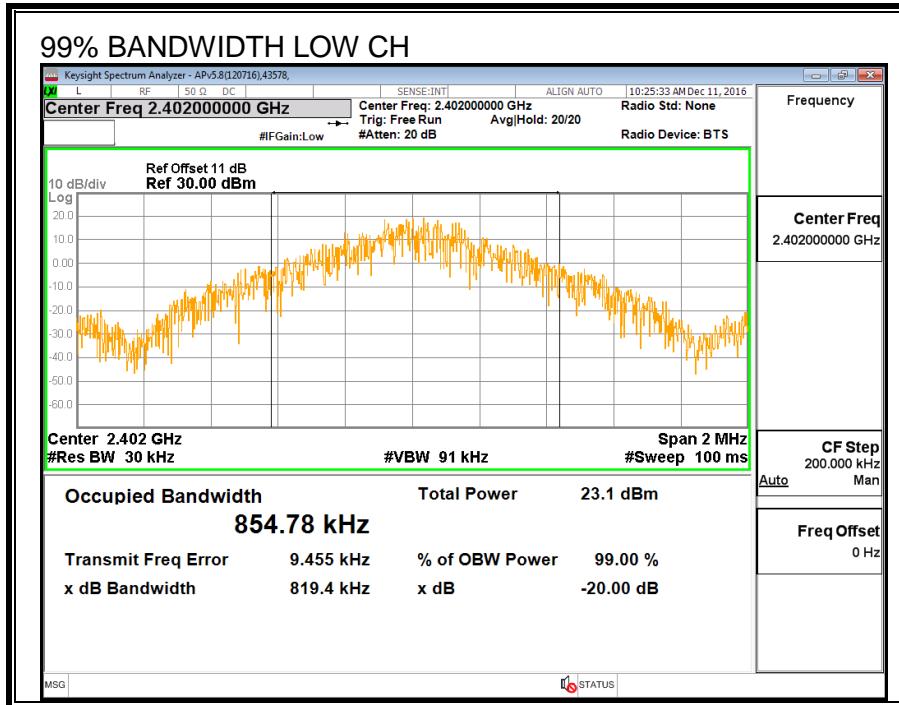

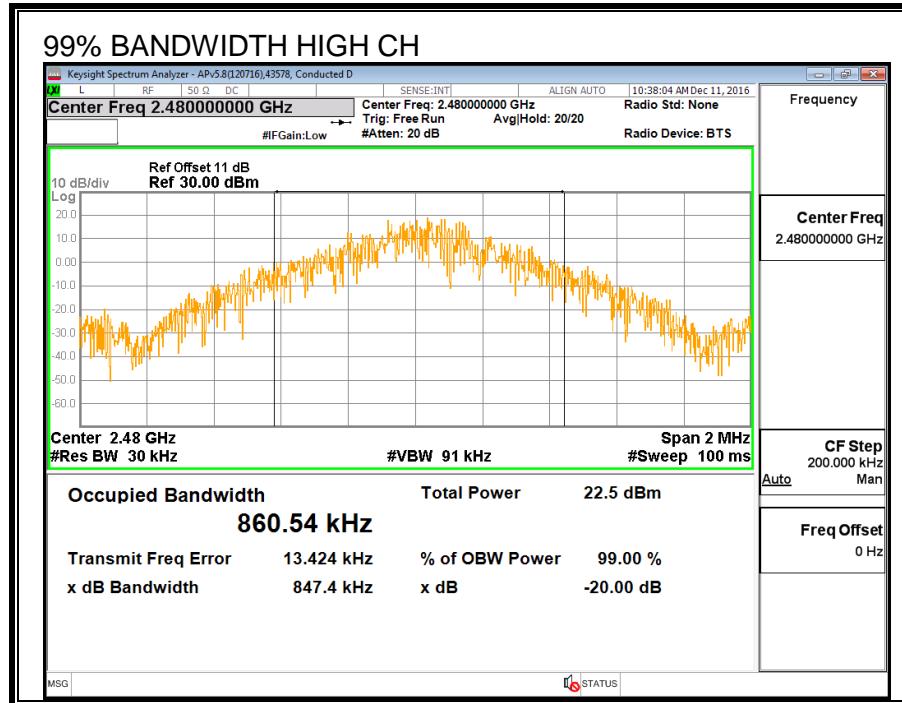

8.2.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

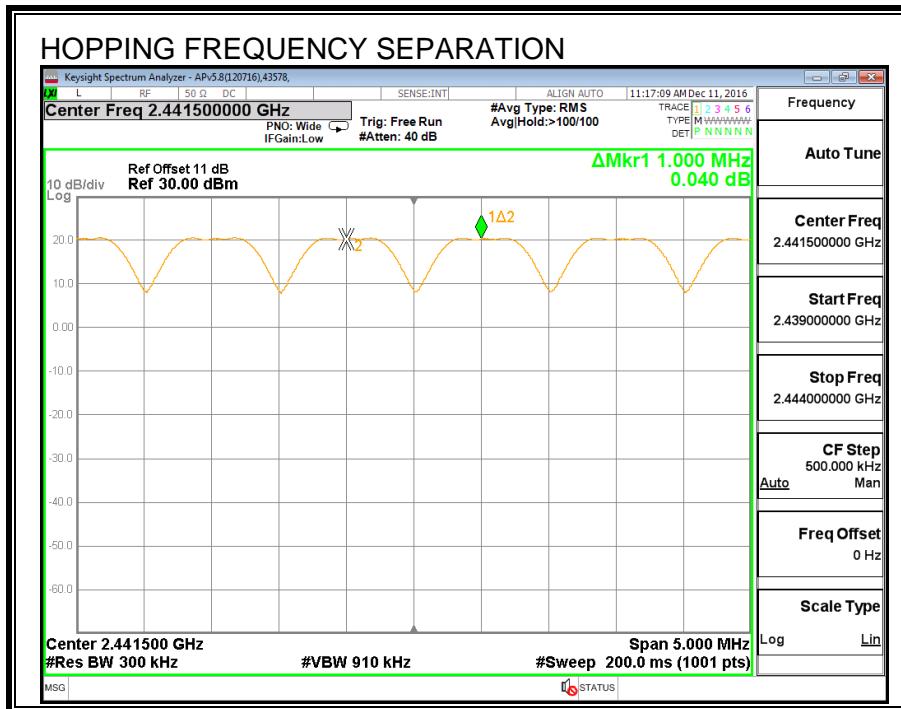

8.2.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

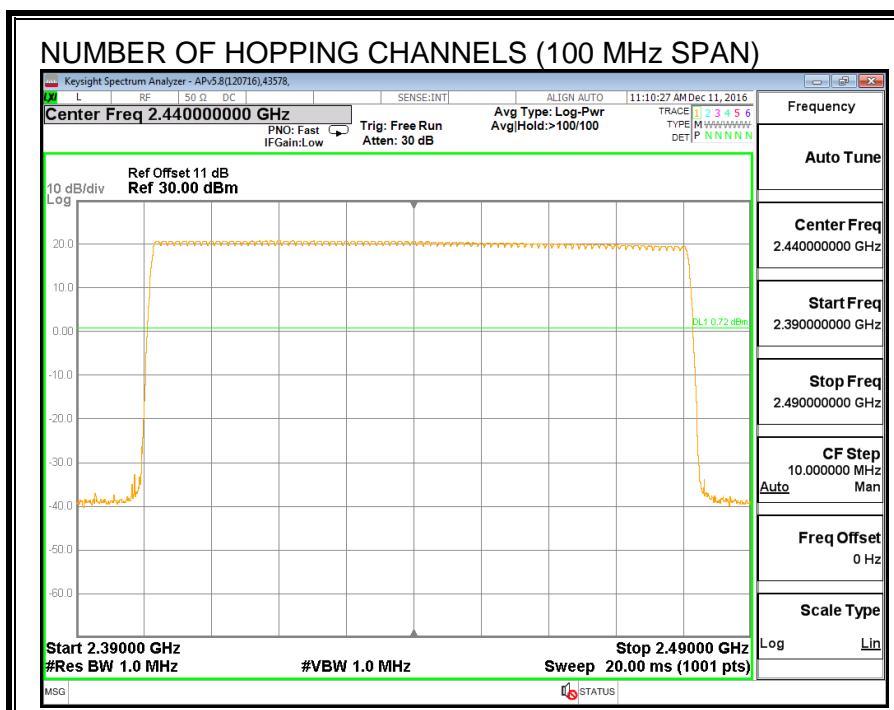

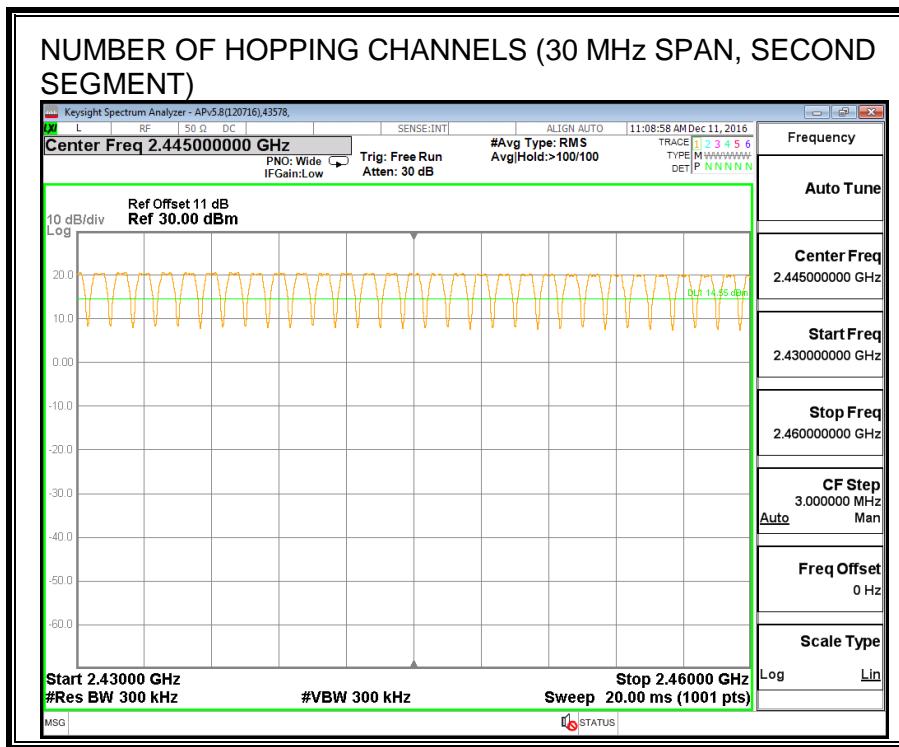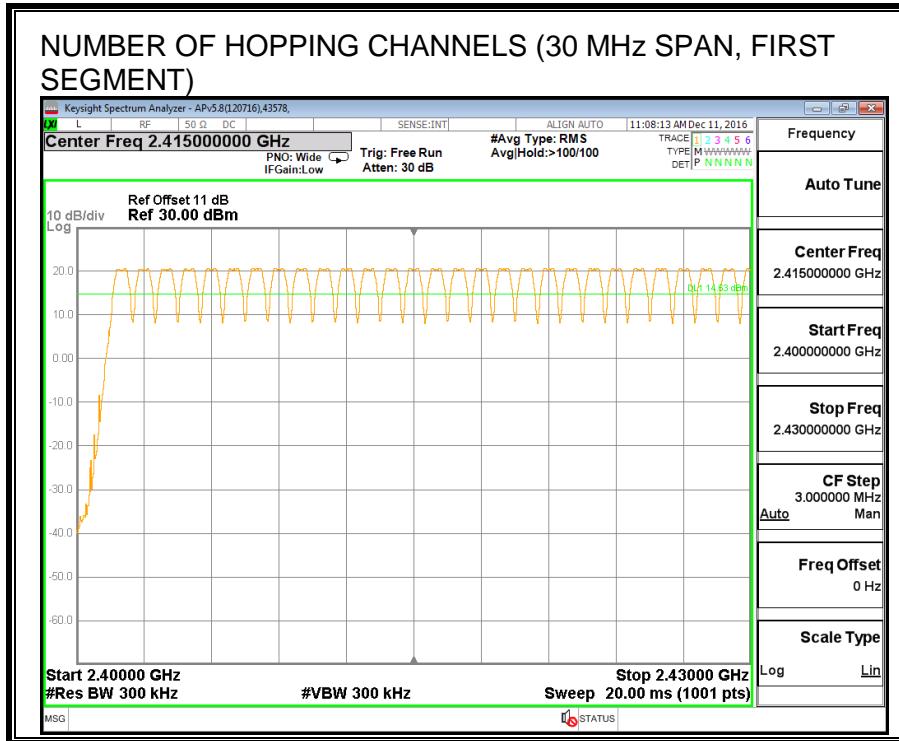

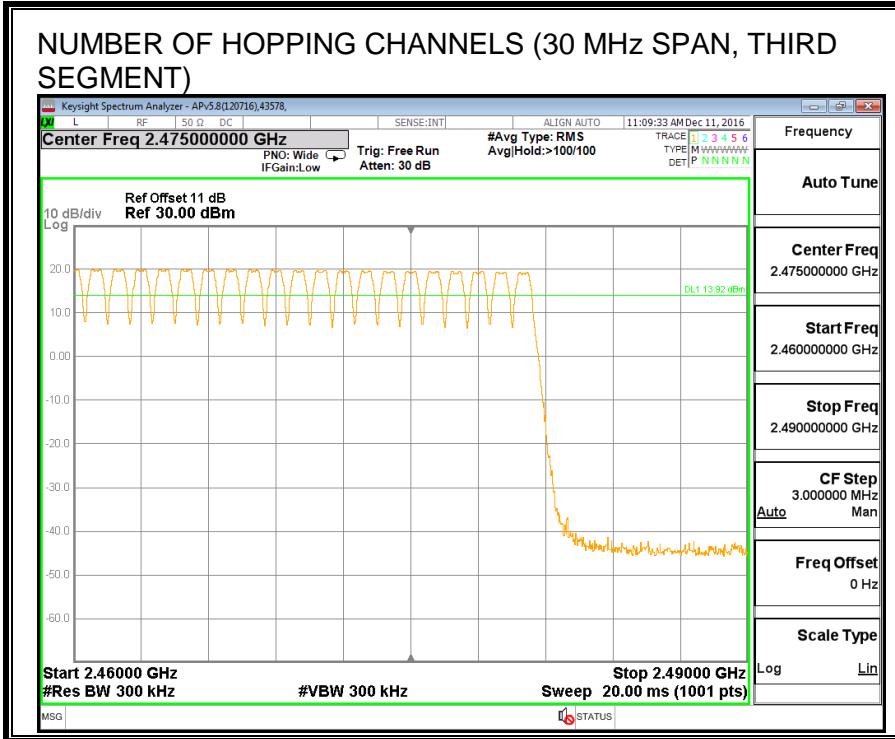

8.2.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.



The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.



For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.385	32	0.123	0.4	-0.277
DH3	1.640	15	0.246	0.4	-0.154
DH5	2.888	10	0.289	0.4	-0.111
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.385	8	0.031	0.4	-0.369
DH3	1.64	3.75	0.062	0.4	-0.339
DH5	2.888	2.5	0.072	0.4	-0.328

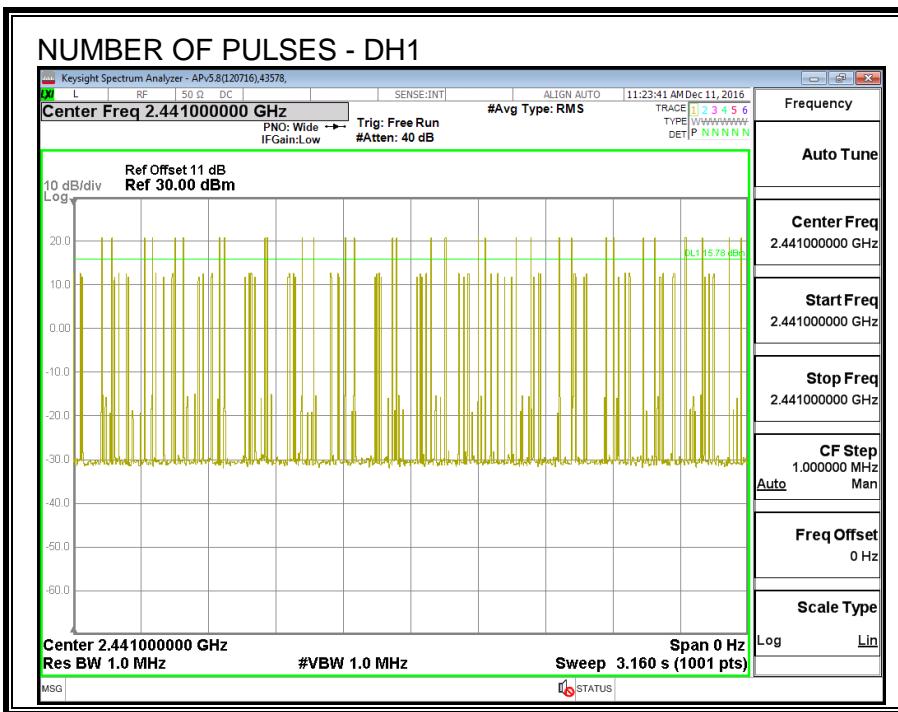

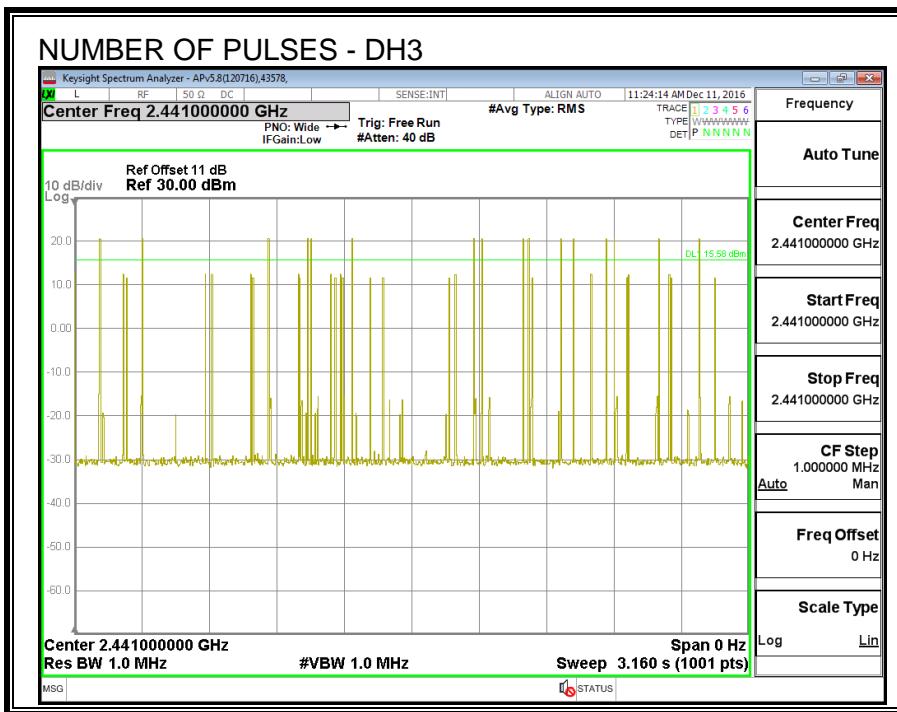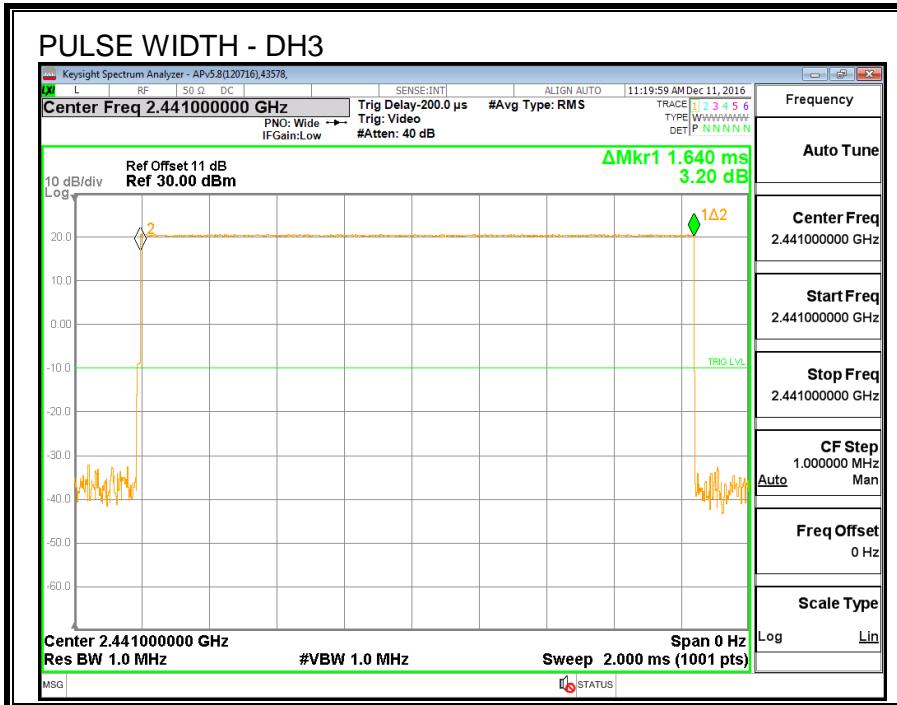

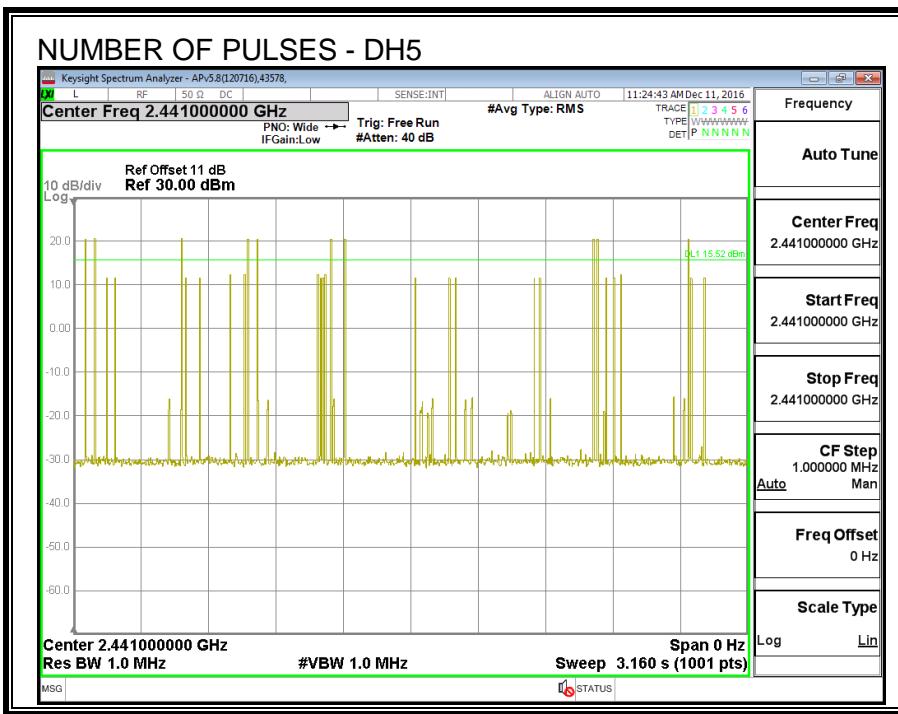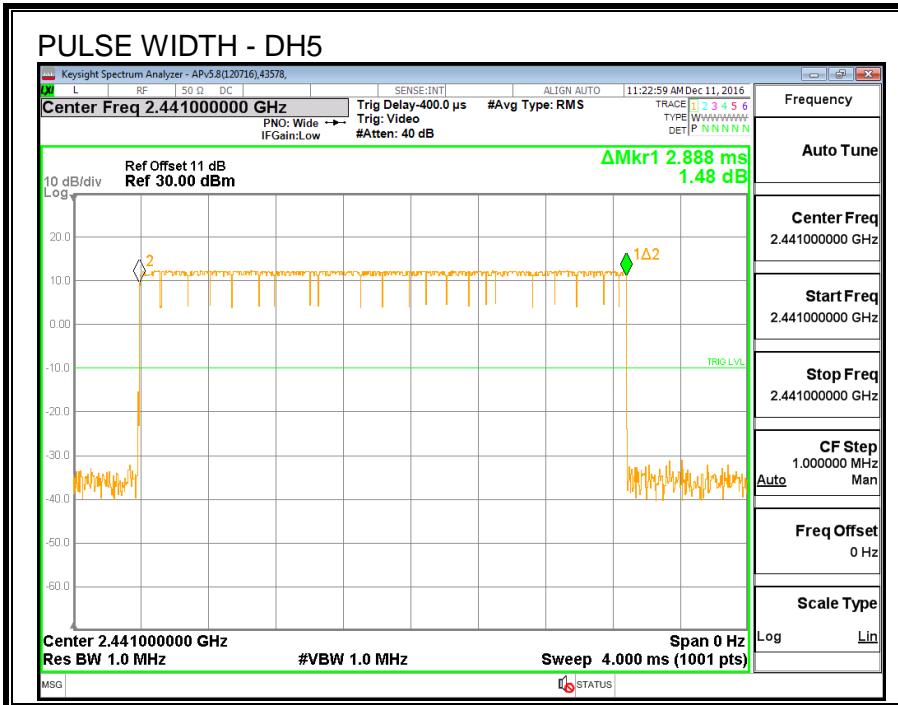

8.2.5. OUTPUT POWER

ID:	40802	Date:	01/11/2017
------------	-------	--------------	------------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.37	30	-9.63
Middle	2441	20.34	30	-9.66
High	2480	20.38	30	-9.62

8.2.6. AVERAGE POWER

ID:	40802	Date:	01/11/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter output is connected to a power meter.



RESULTS



The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.



Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.99
Middle	2441	19.98
High	2480	20.00

8.2.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

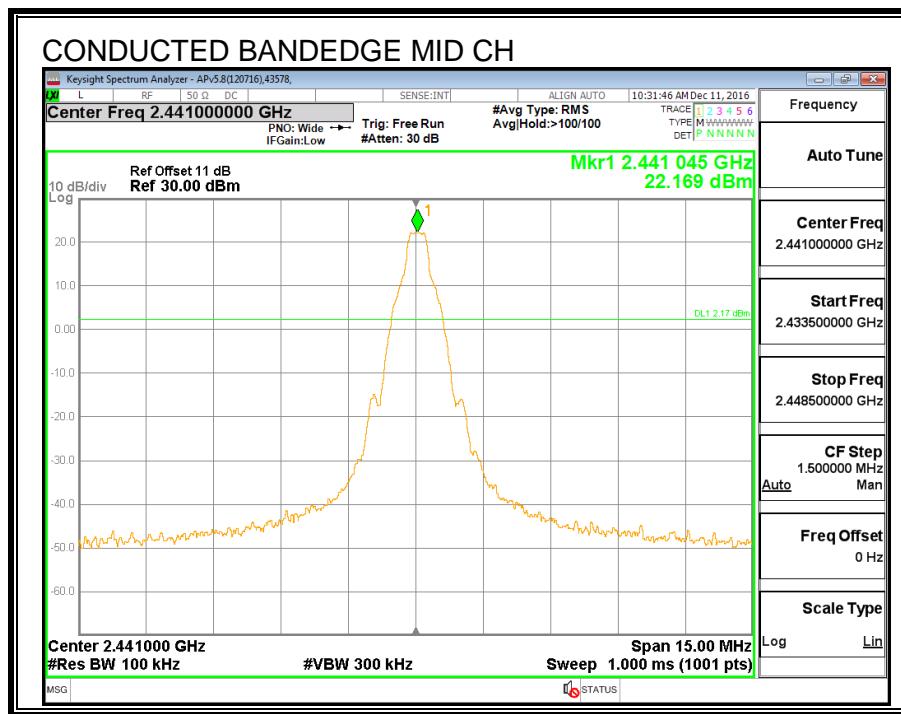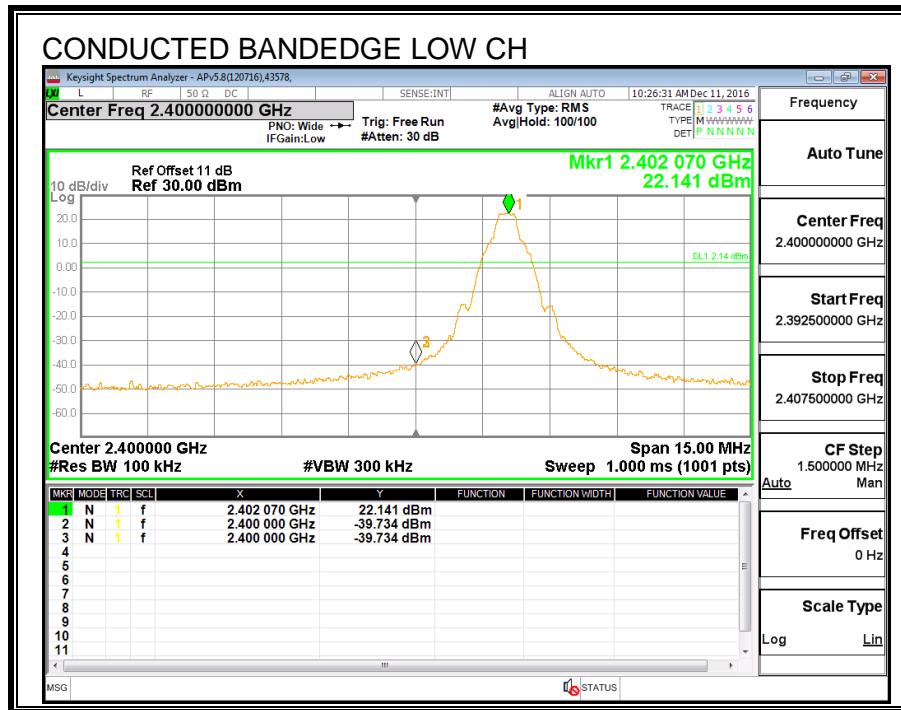

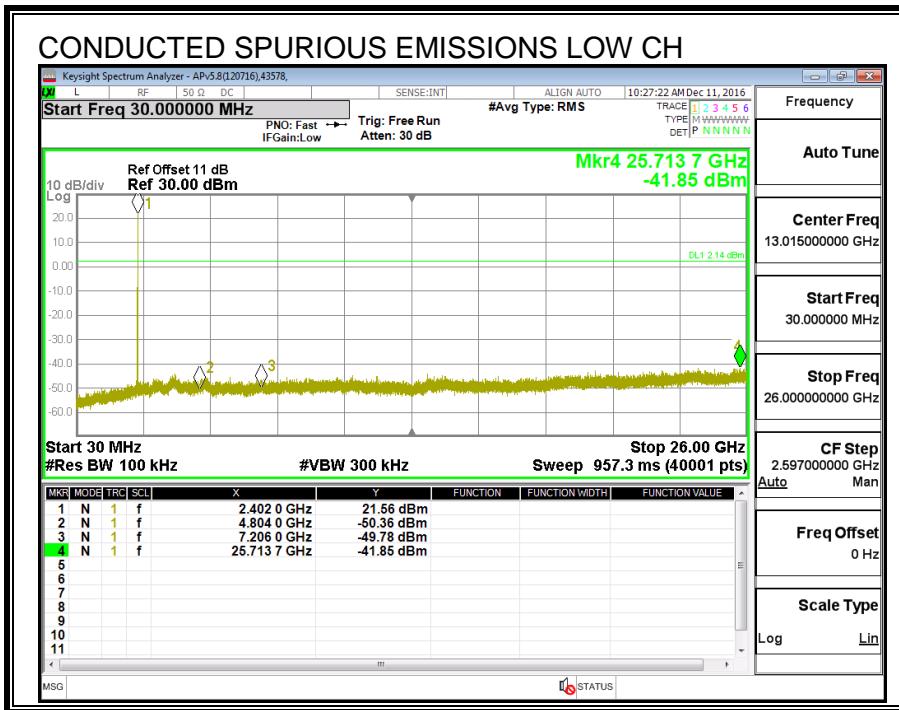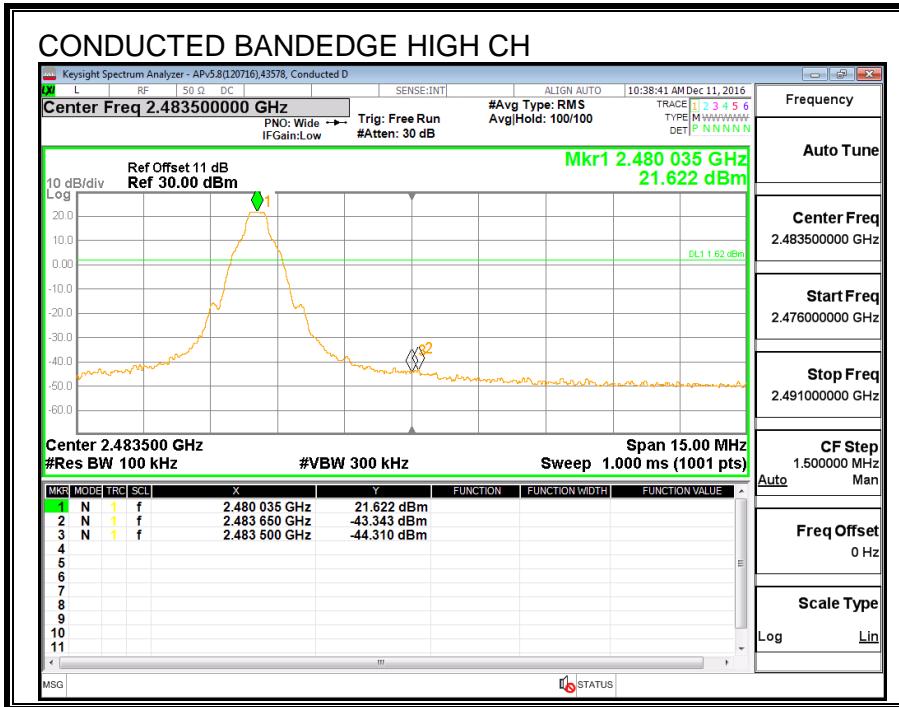

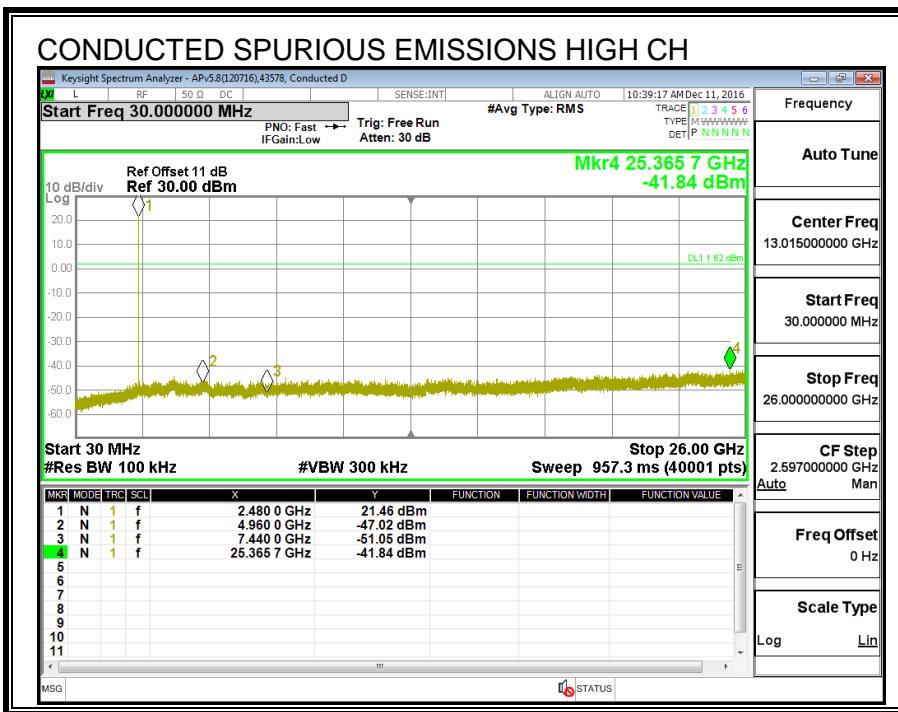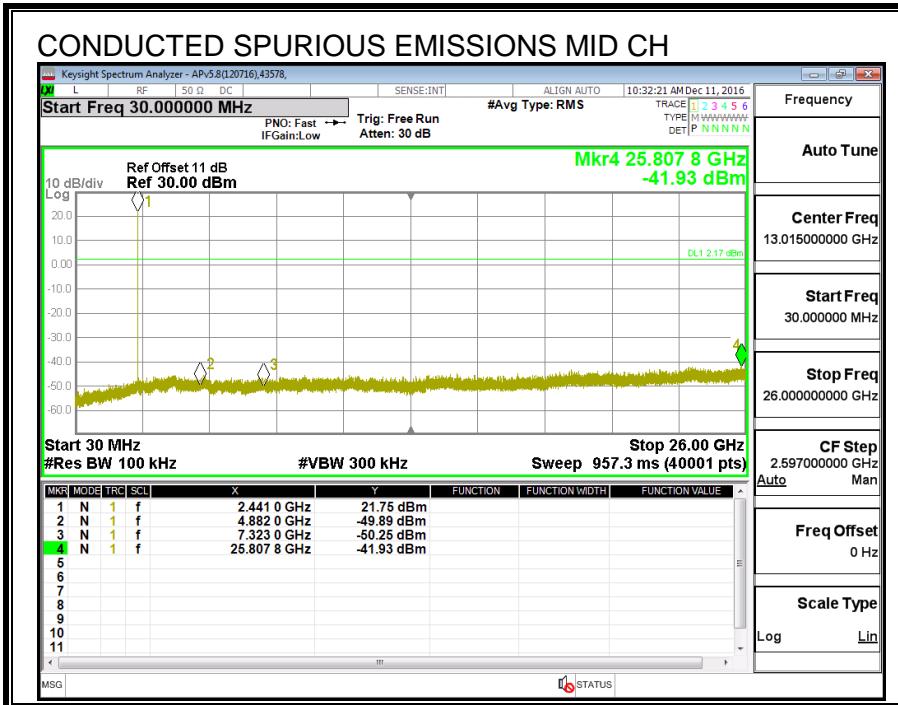

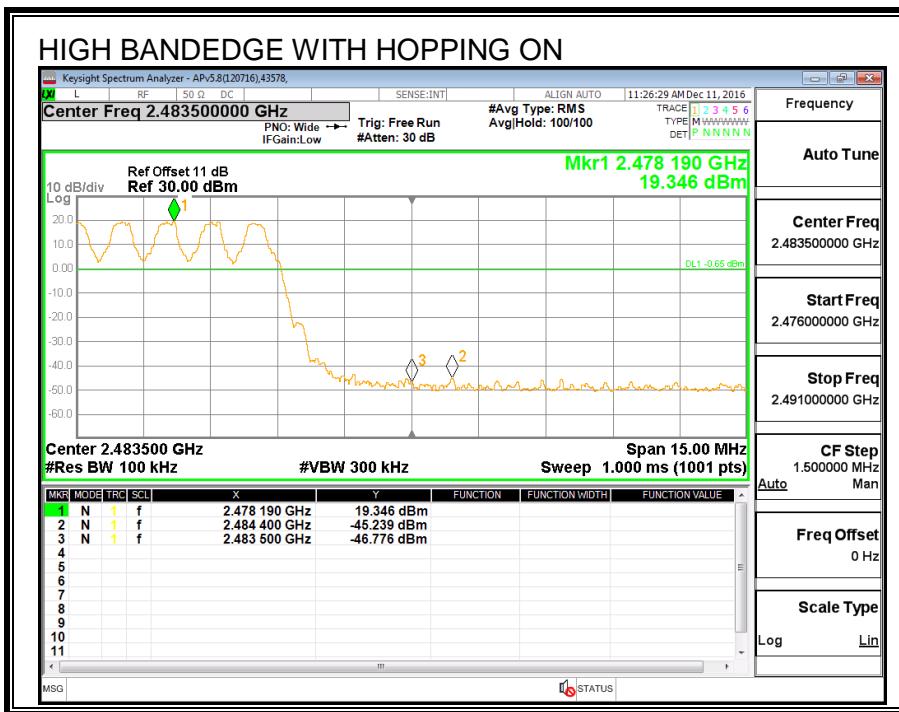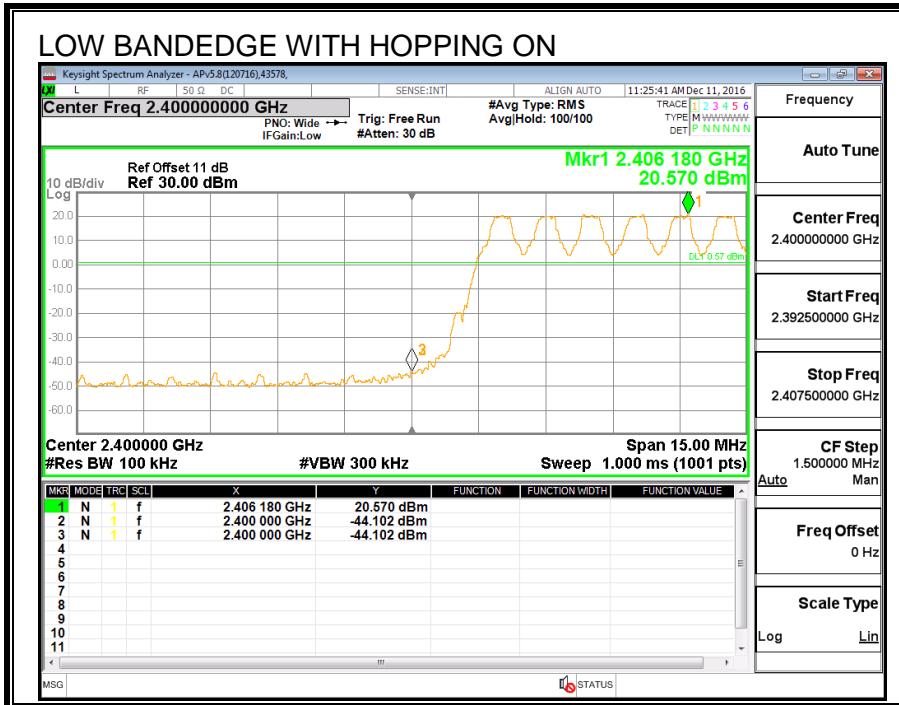

8.3. HIGH POWER ENHANCED DATA RATE DQPSK MODULATION

8.3.1. OUTPUT POWER

ID:	40802	Date:	01/11/2017
-----	-------	-------	------------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.40	21	-1.60
Middle	2441	19.49	21	-1.51
High	2480	19.21	21	-1.79

8.3.2. AVERAGE POWER

ID:	40802	Date:	1/11/2017
------------	-------	--------------	-----------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.92
Middle	2441	15.88
High	2480	15.80

8.4. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

8.4.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	1368	1219.9
Middle	2441	1376	1220.4
High	2480	1378	1226.6

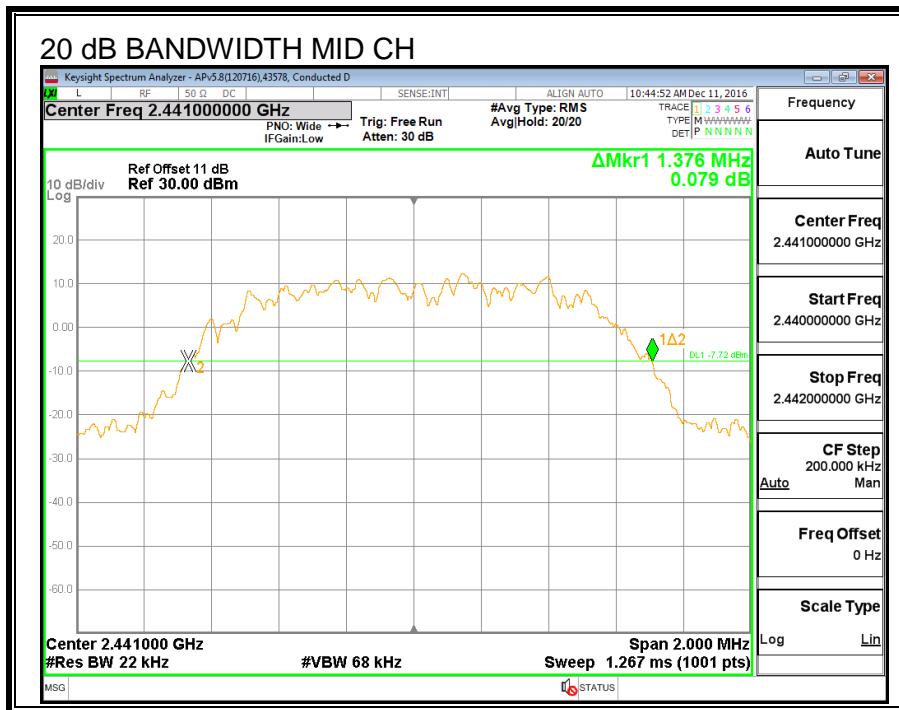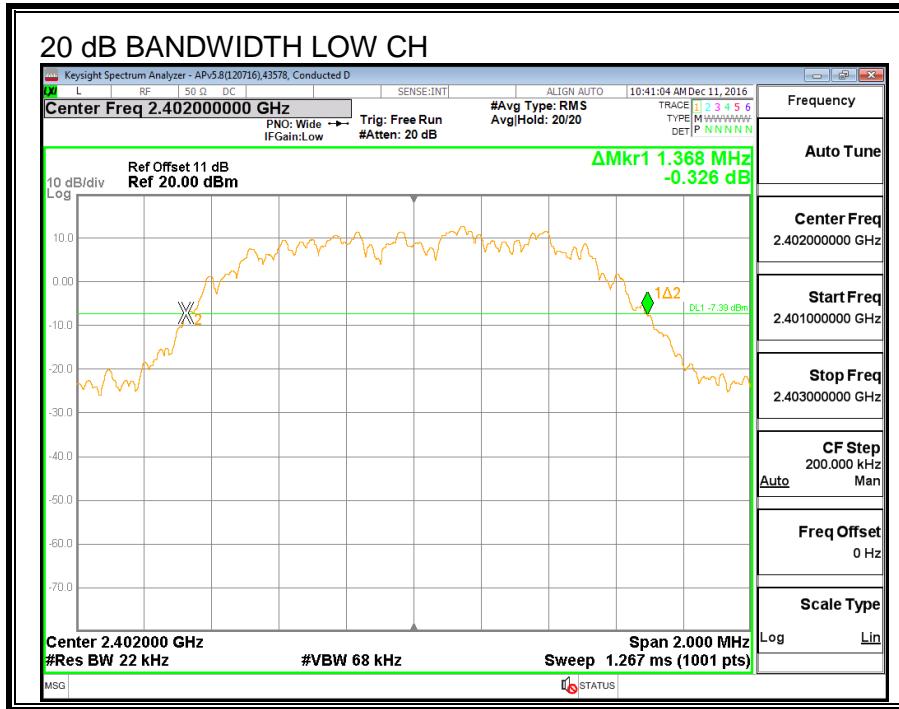20dB BANDWIDTH

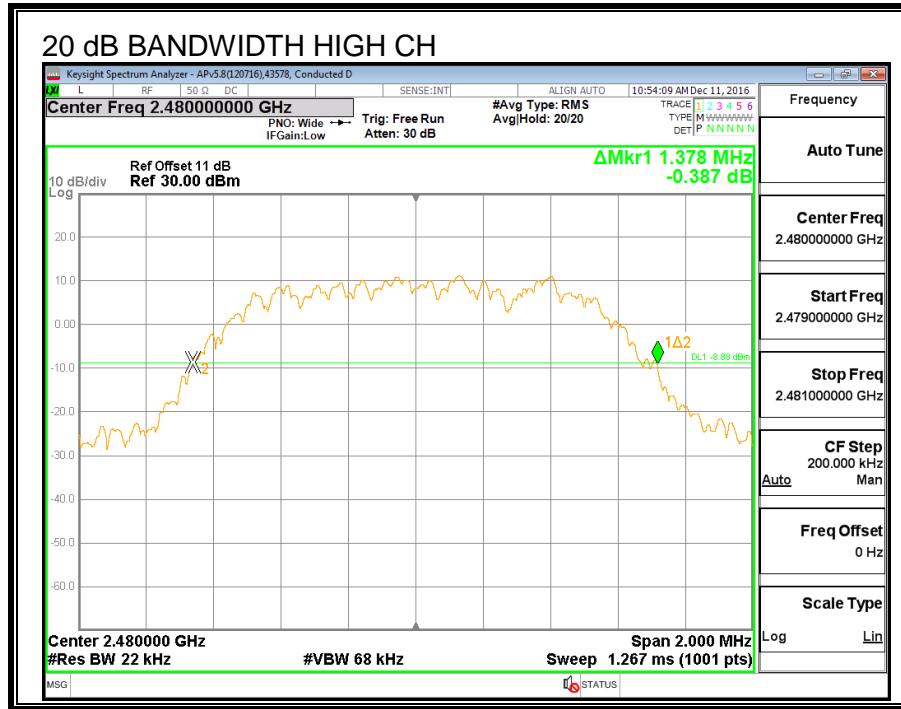

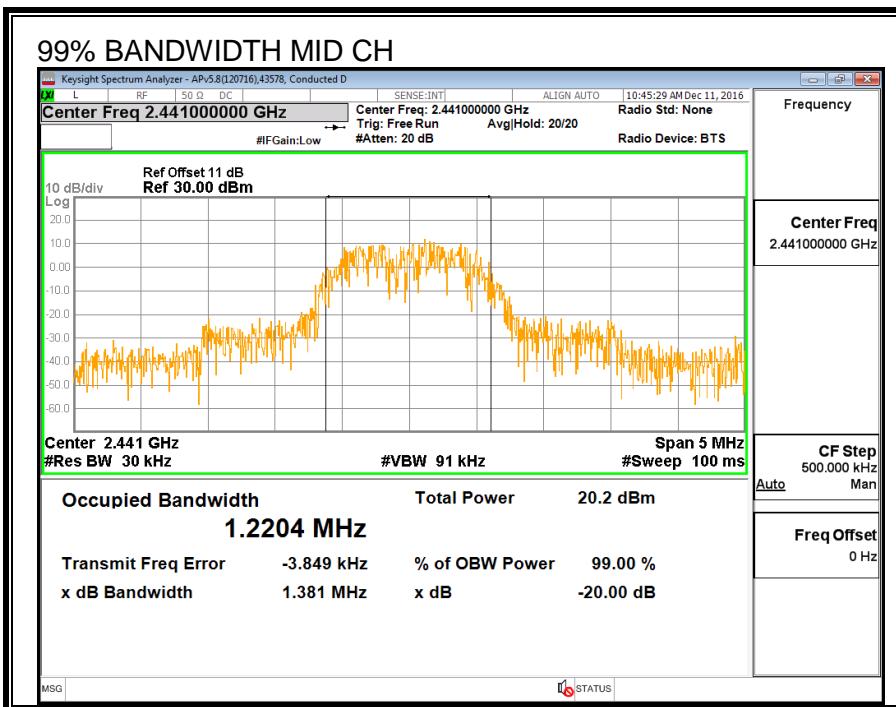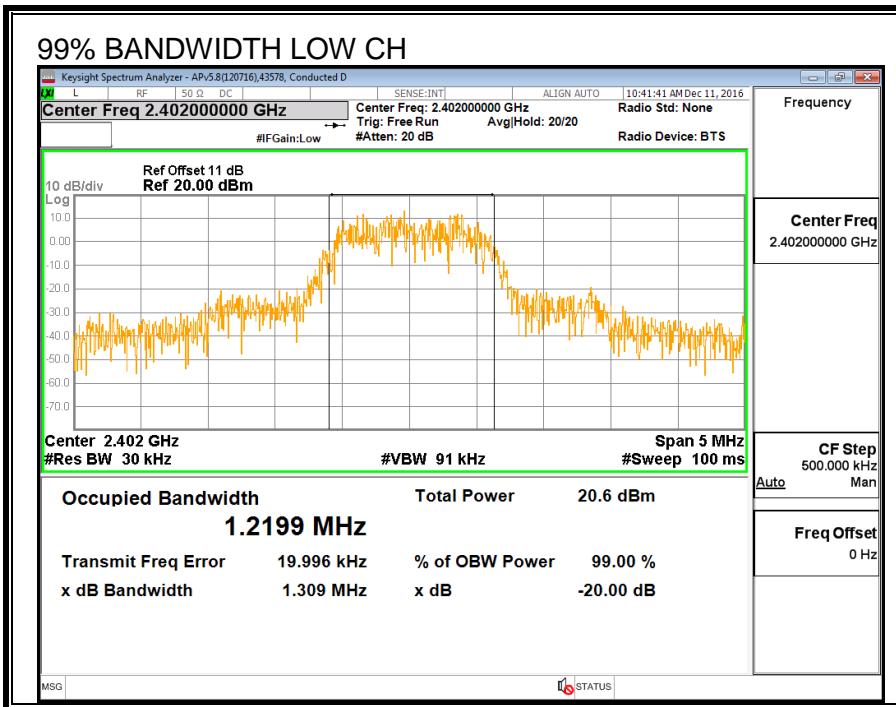

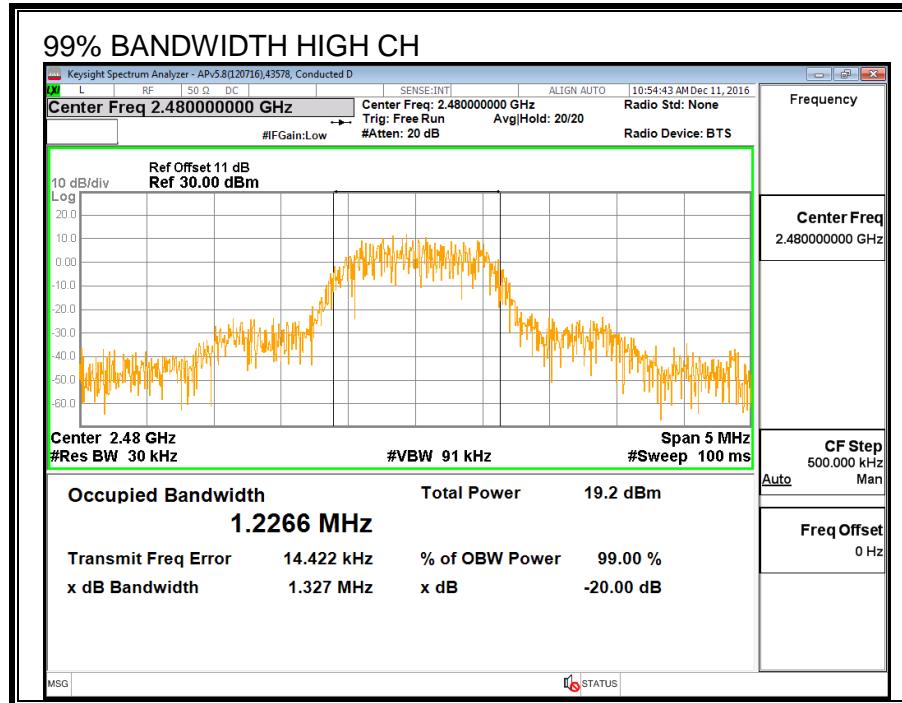

8.4.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

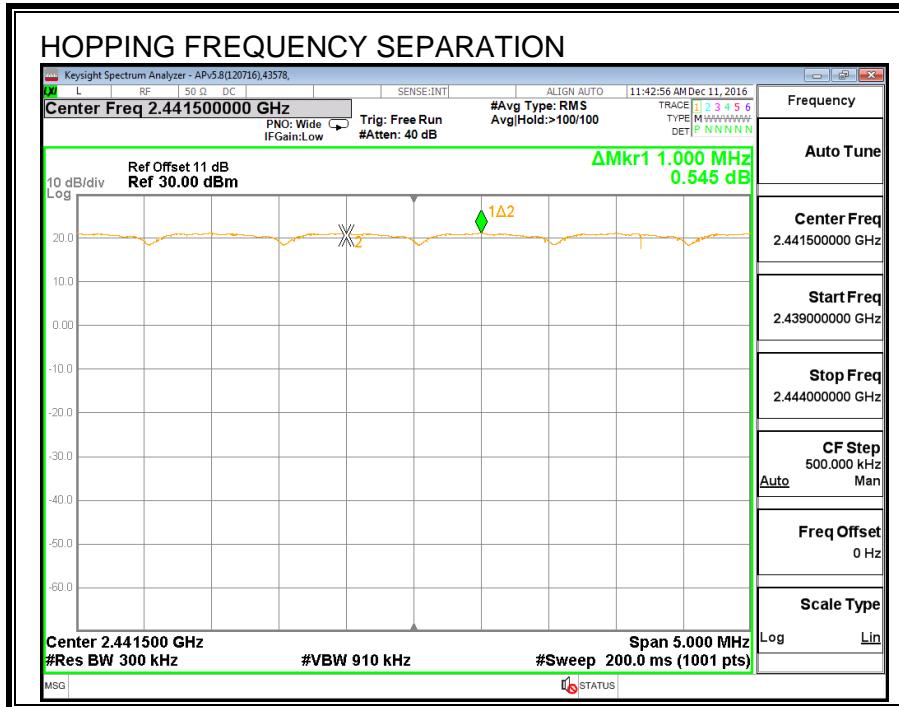

8.4.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

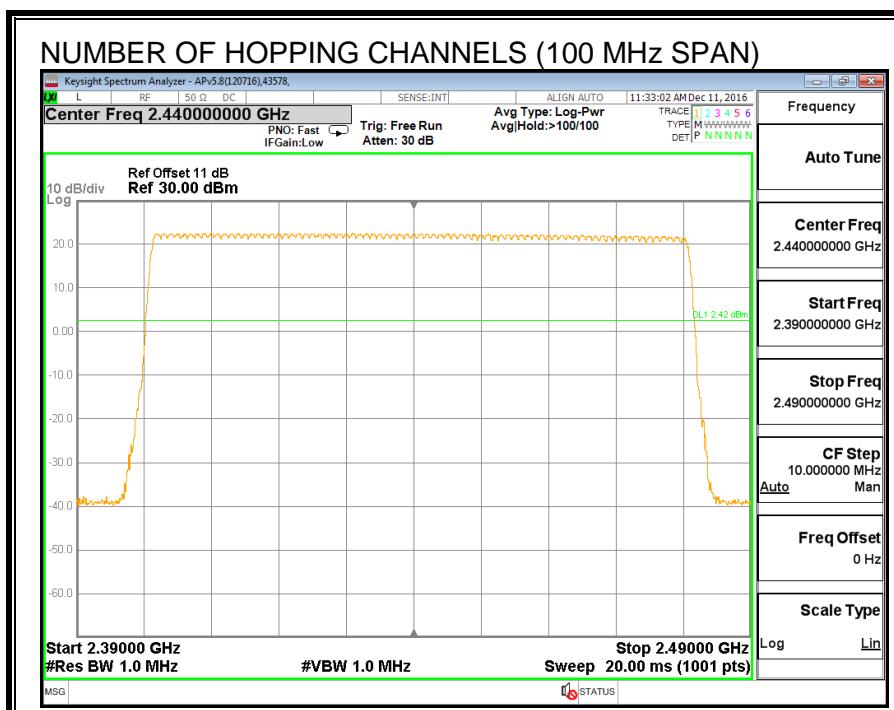

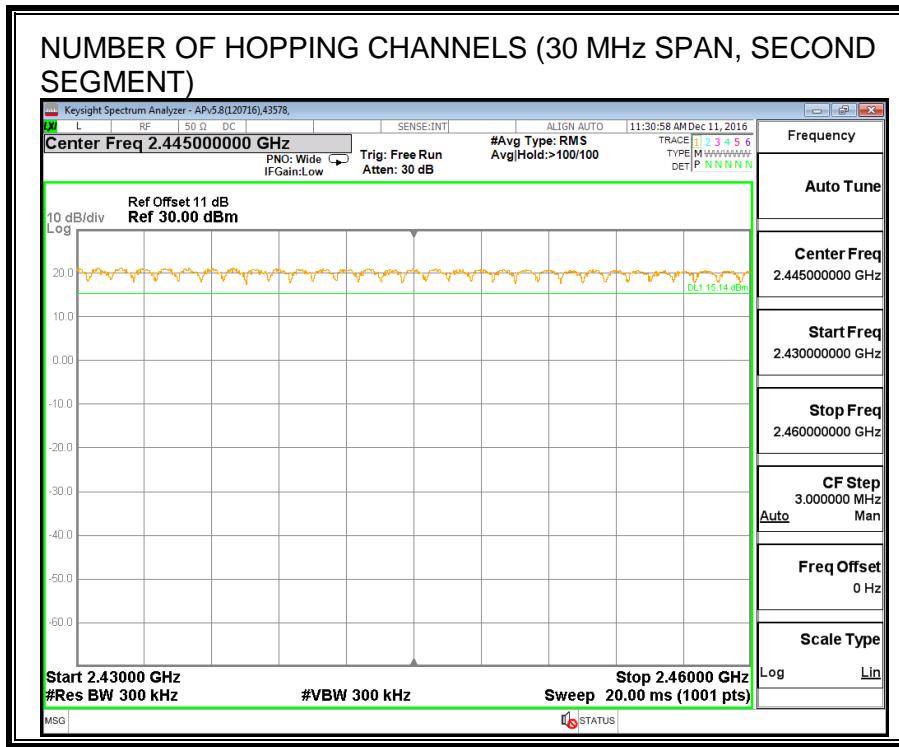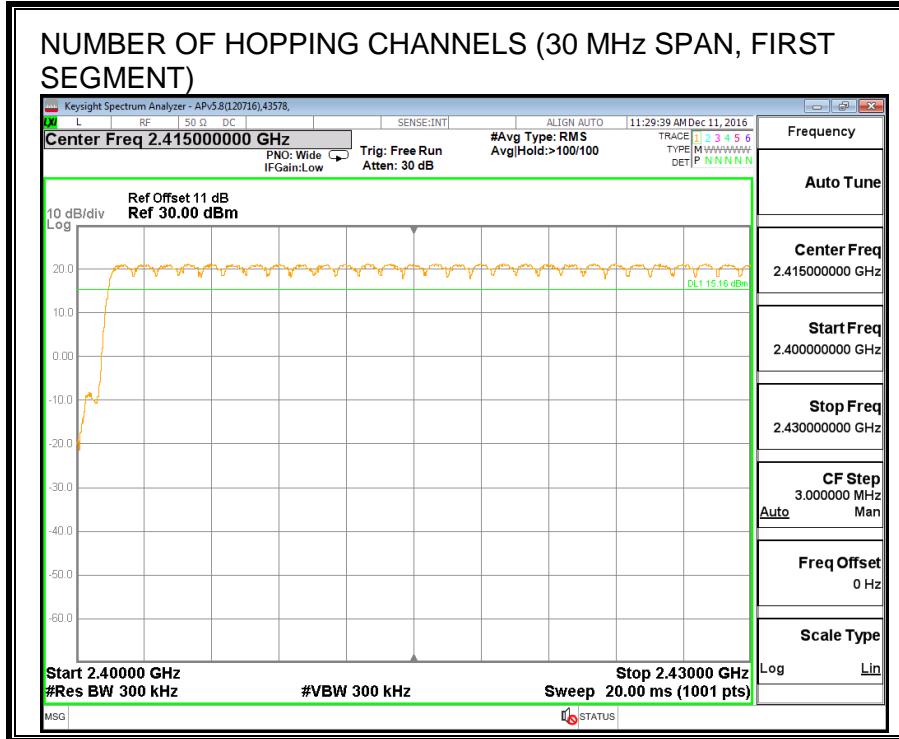

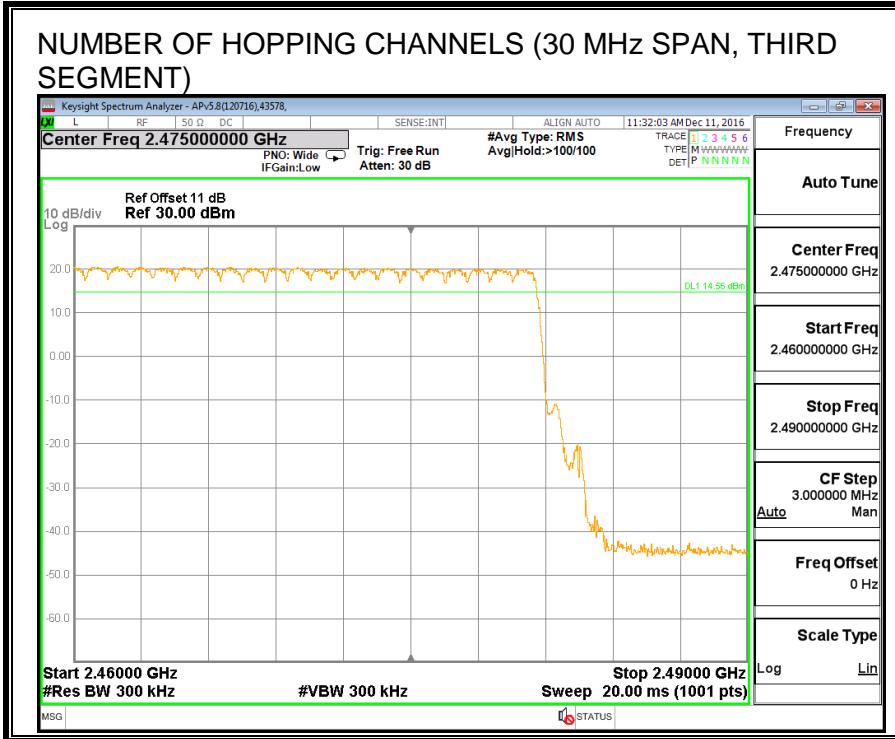

8.4.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.



The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.



RESULTS

8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
3DH1	0.401	33	0.132	0.4	-0.268
3DH3	1.074	15	0.161	0.4	-0.239
3DH5	2.892	10	0.289	0.4	-0.111

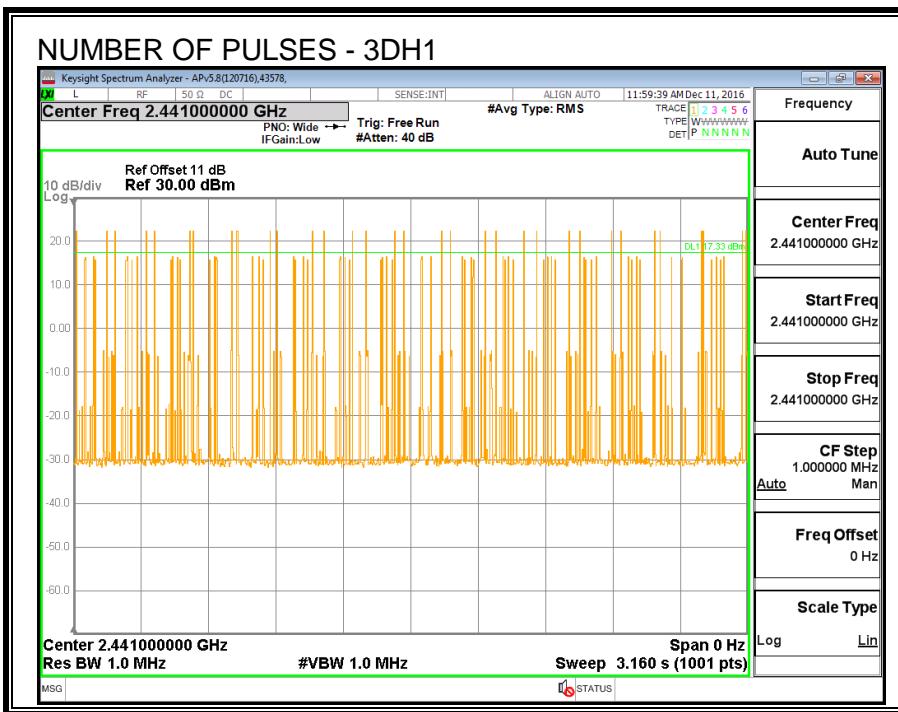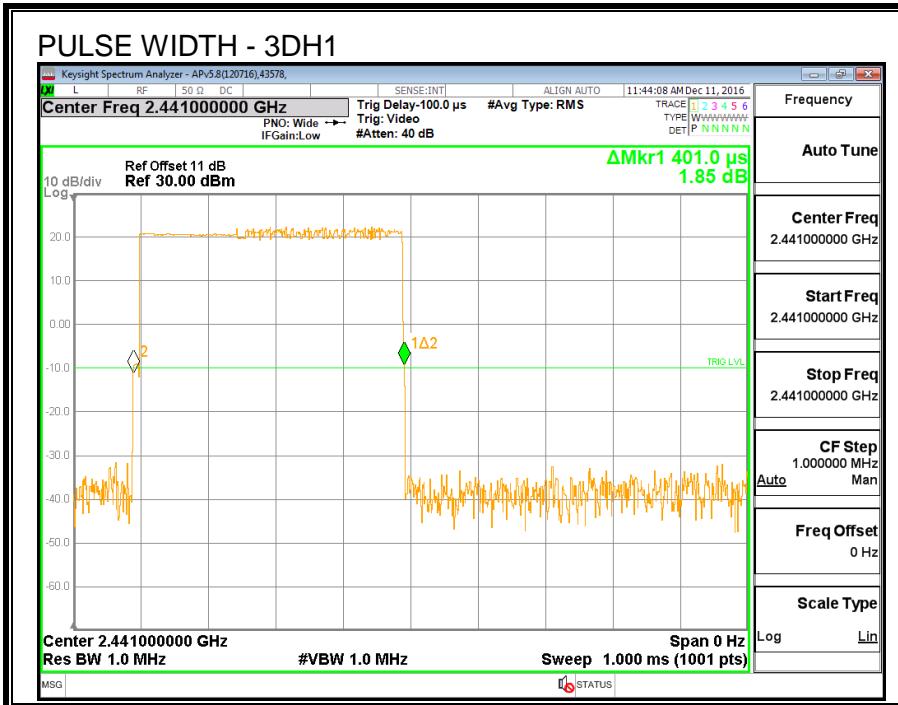

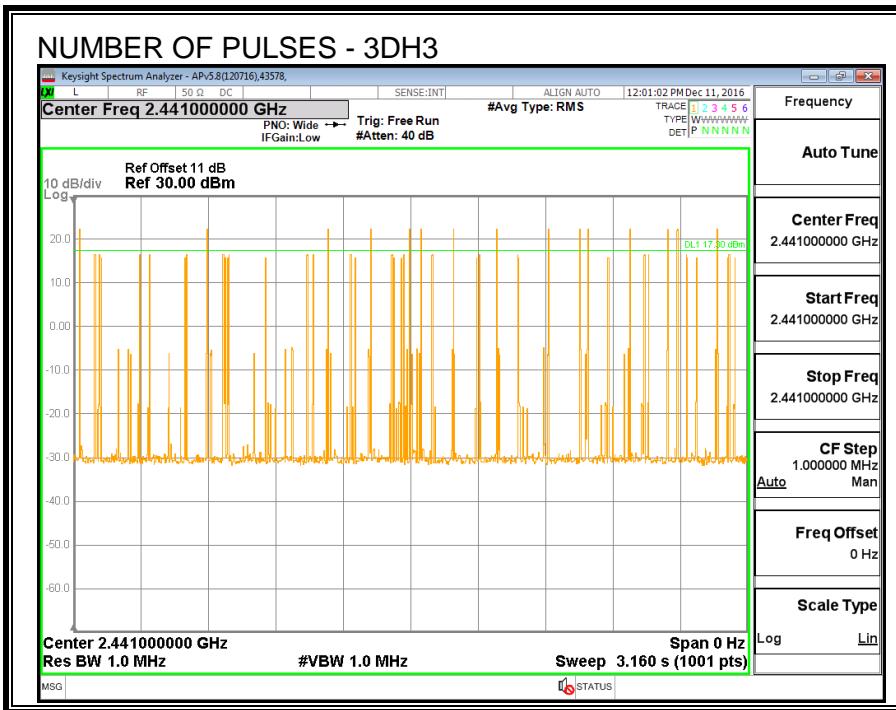

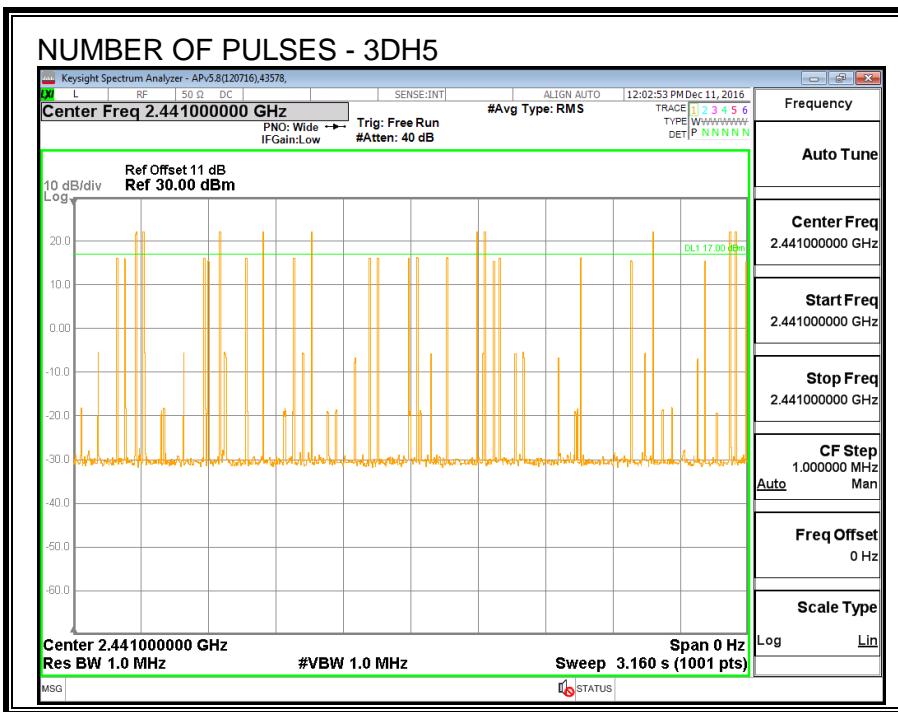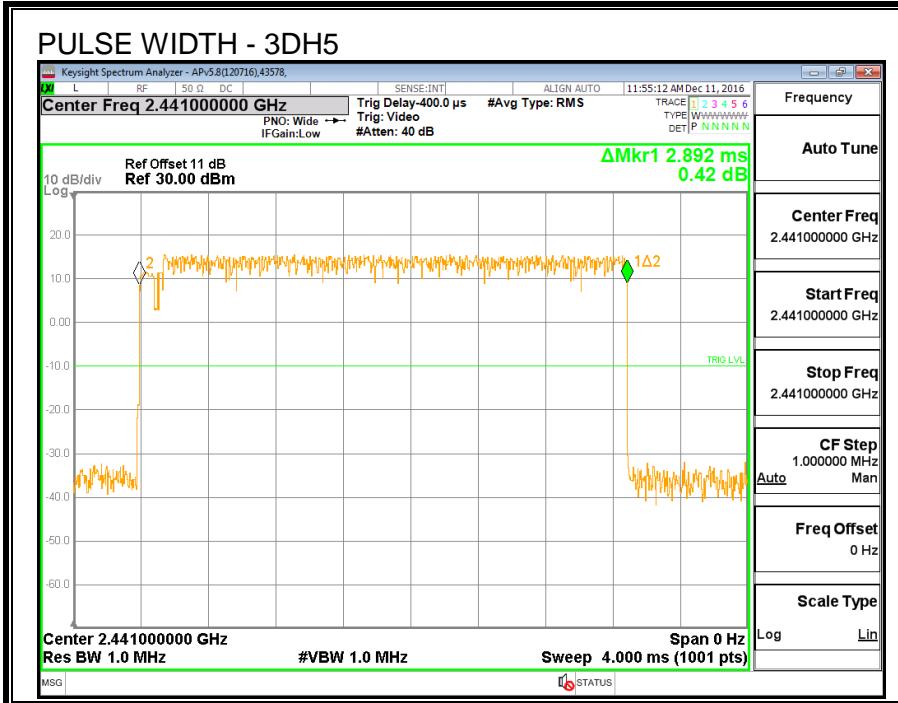

8.4.5. OUTPUT POWER

ID:	39472	Date:	01/24/2017
------------	-------	--------------	------------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.47	21	-1.53
Middle	2441	19.61	21	-1.39
High	2480	19.35	21	-1.65

8.4.6. AVERAGE POWER

ID:	39472	Date:	01/24/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter output is connected to a power meter.



RESULTS



The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.



Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	15.99
Middle	2441	16.00
High	2480	15.90

8.4.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

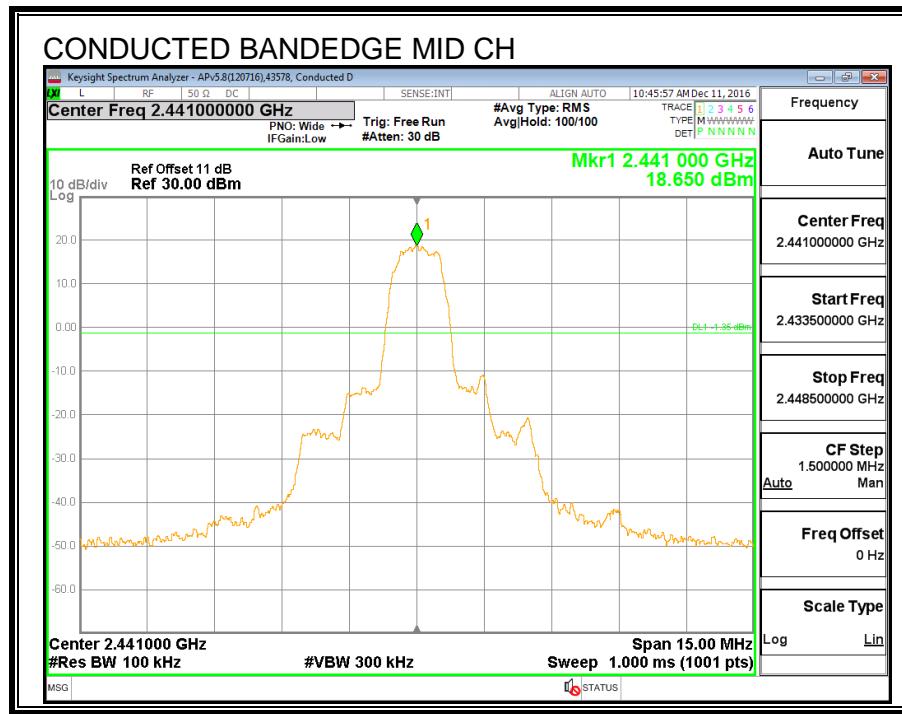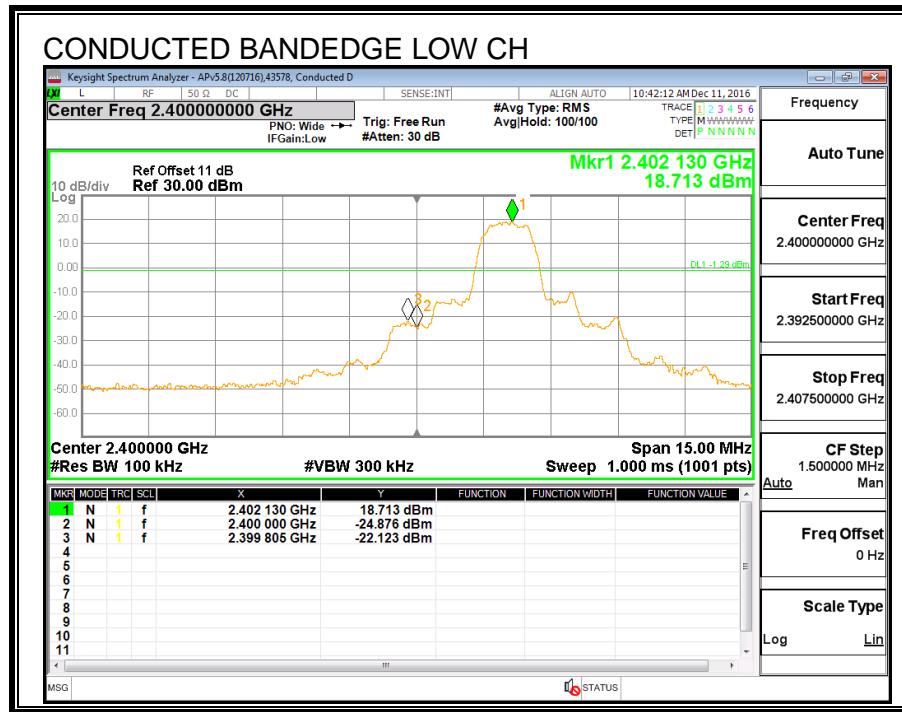

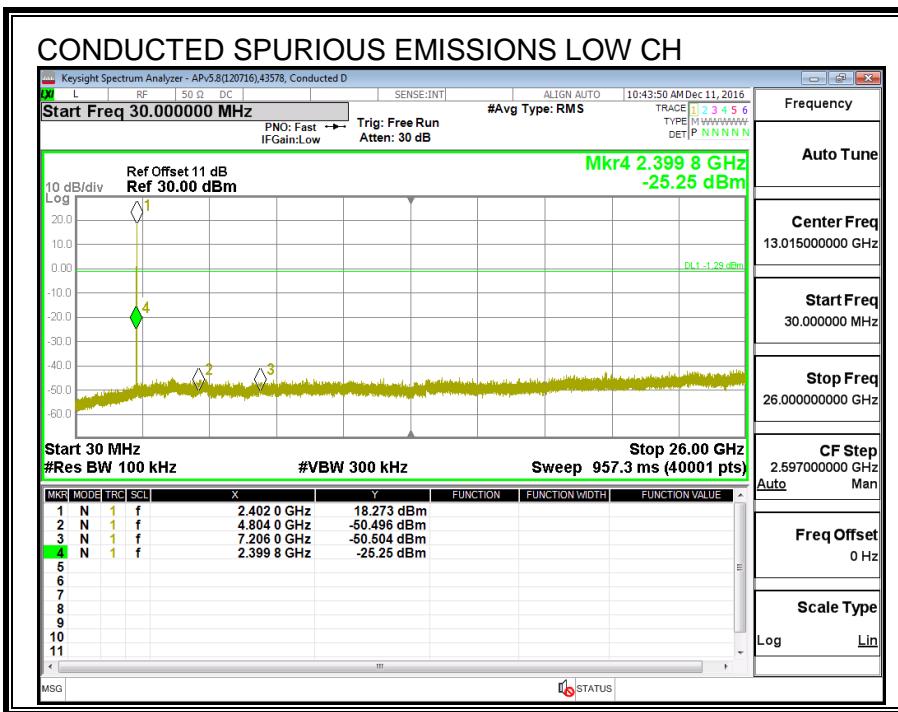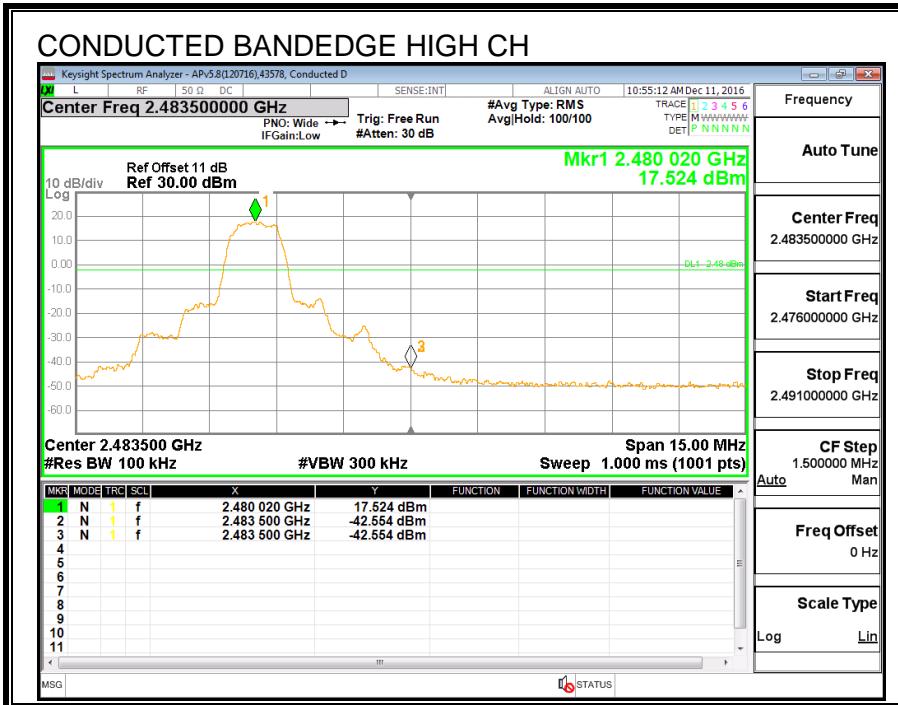

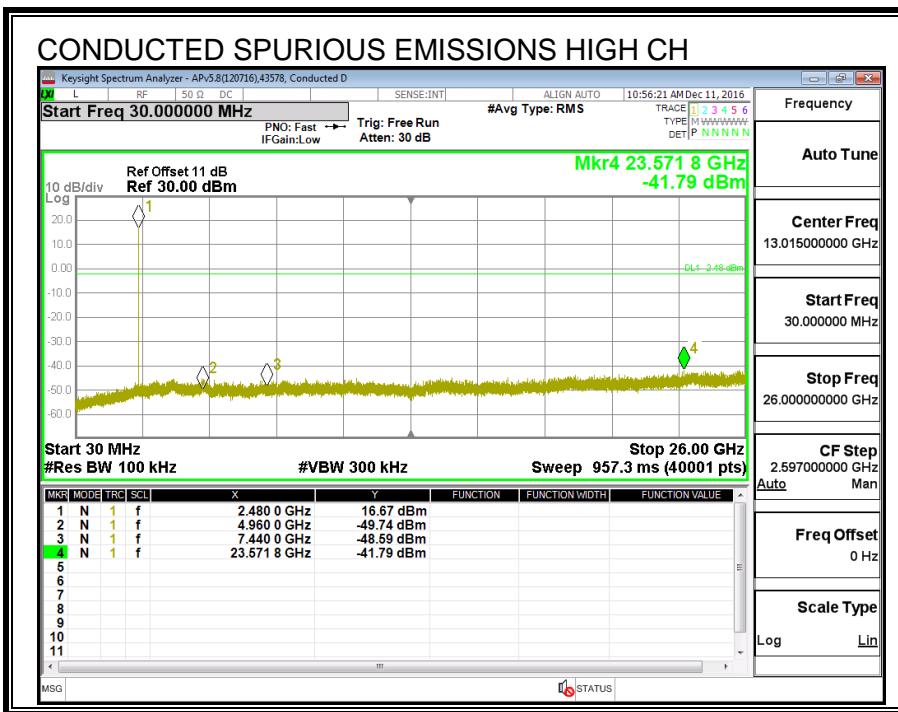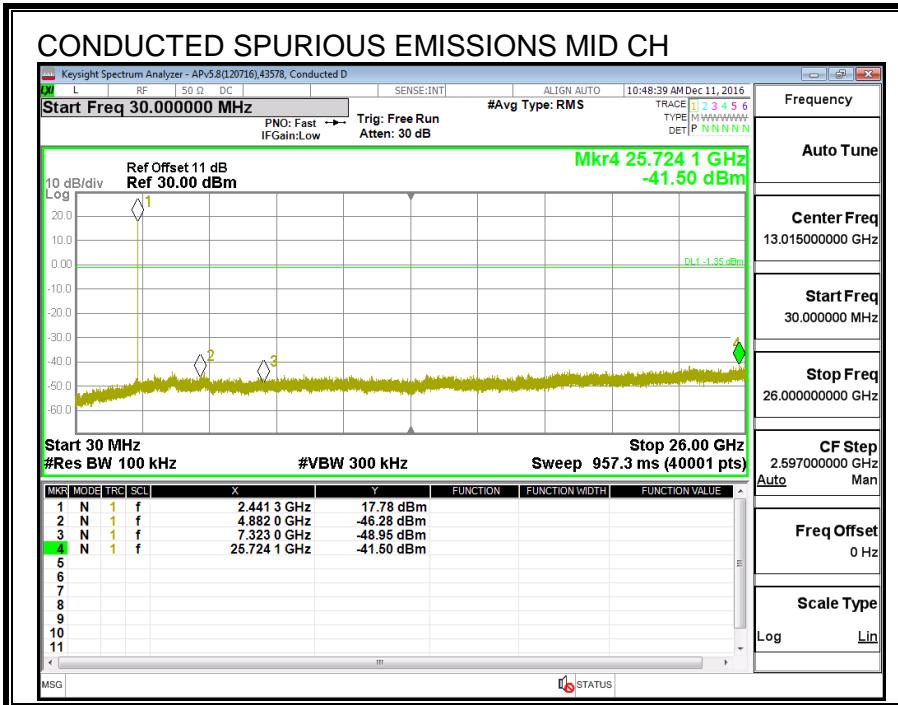

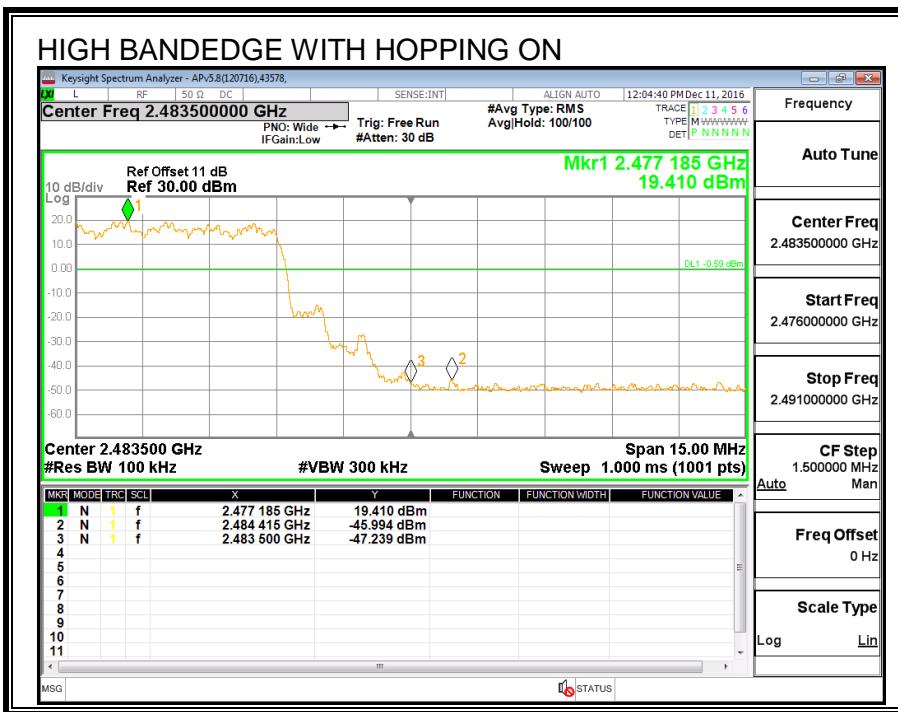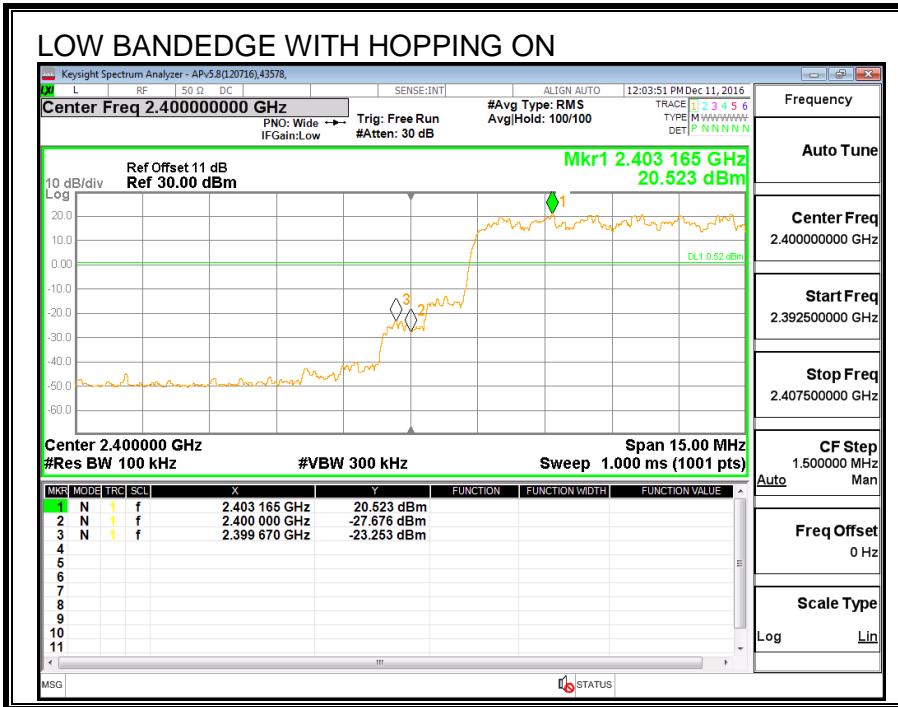

8.5. LOW POWER BASIC DATA RATE GFSK MODULATION

8.5.1. 20 dB AND 99% BANDWIDTH

LIMITS



None; for reporting purposes only.


TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	928	908.48
Middle	2441	946	898.53
High	2480	878	926.92

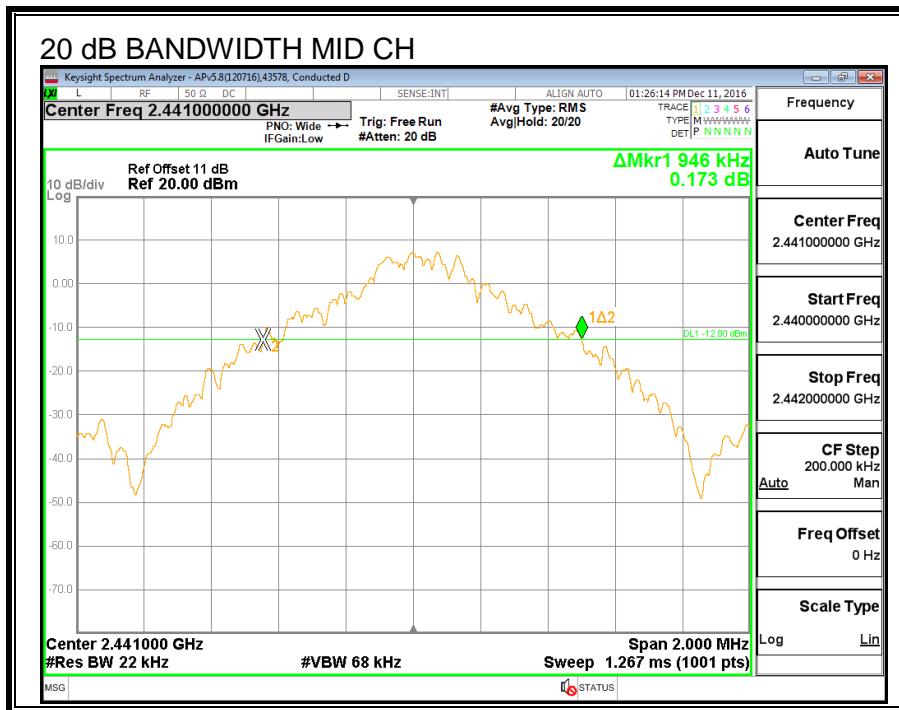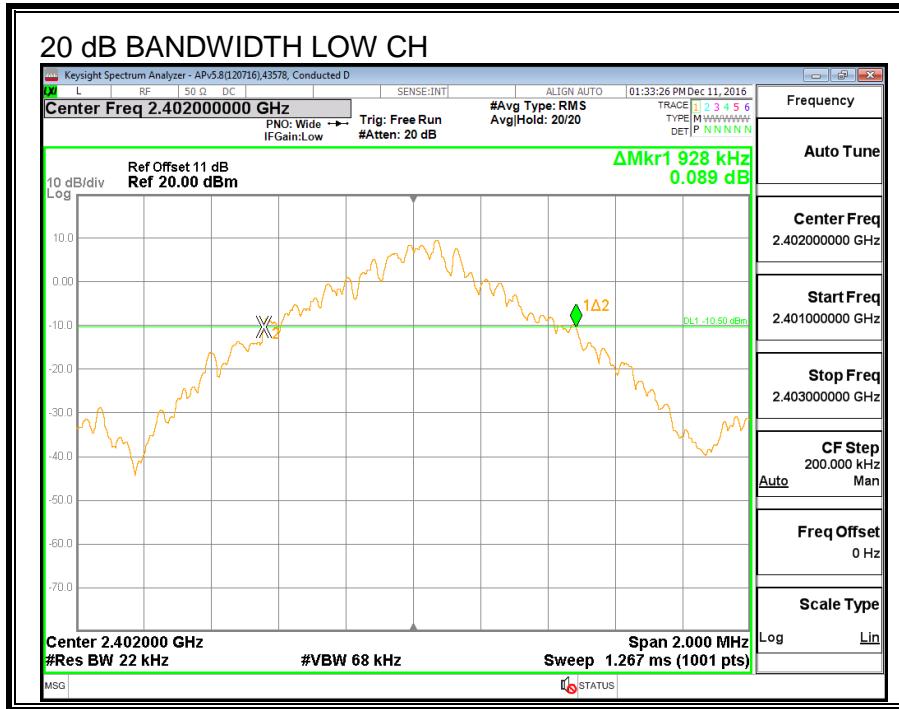20 dB BANDWIDTH

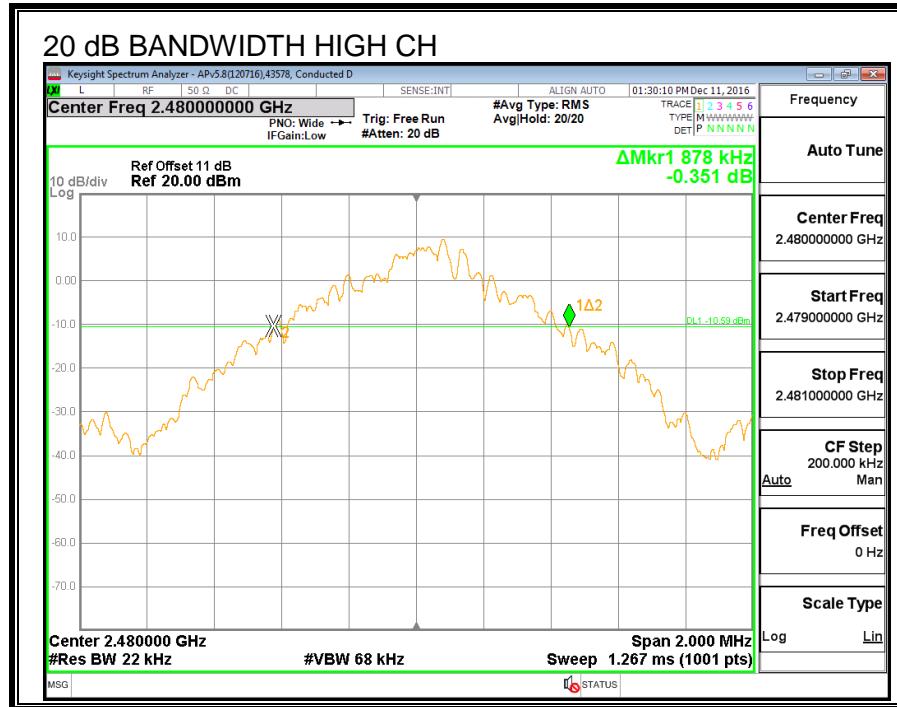

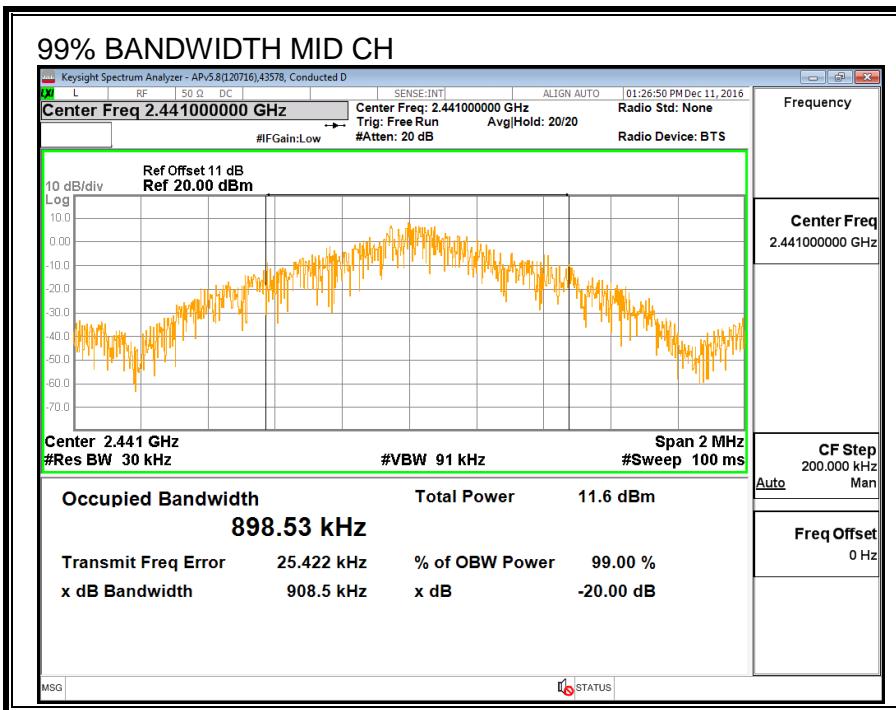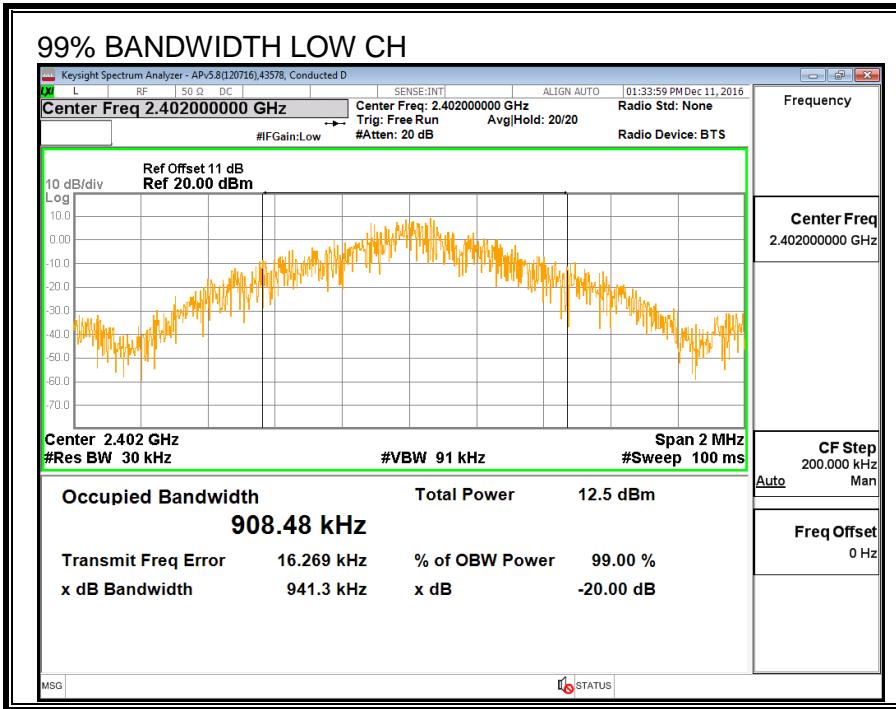

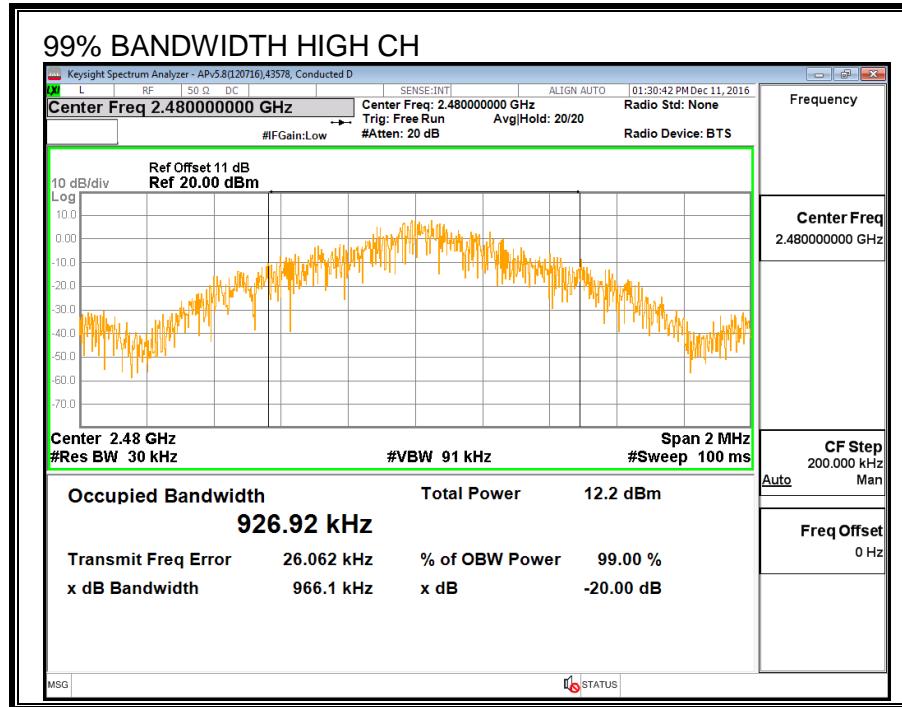

8.5.2. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

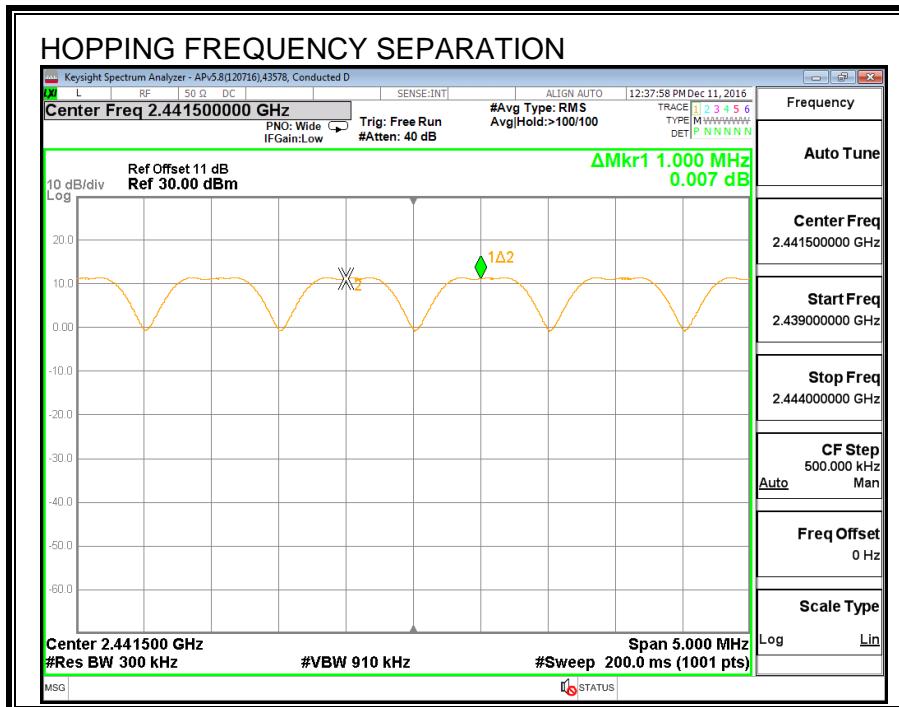

8.5.3. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

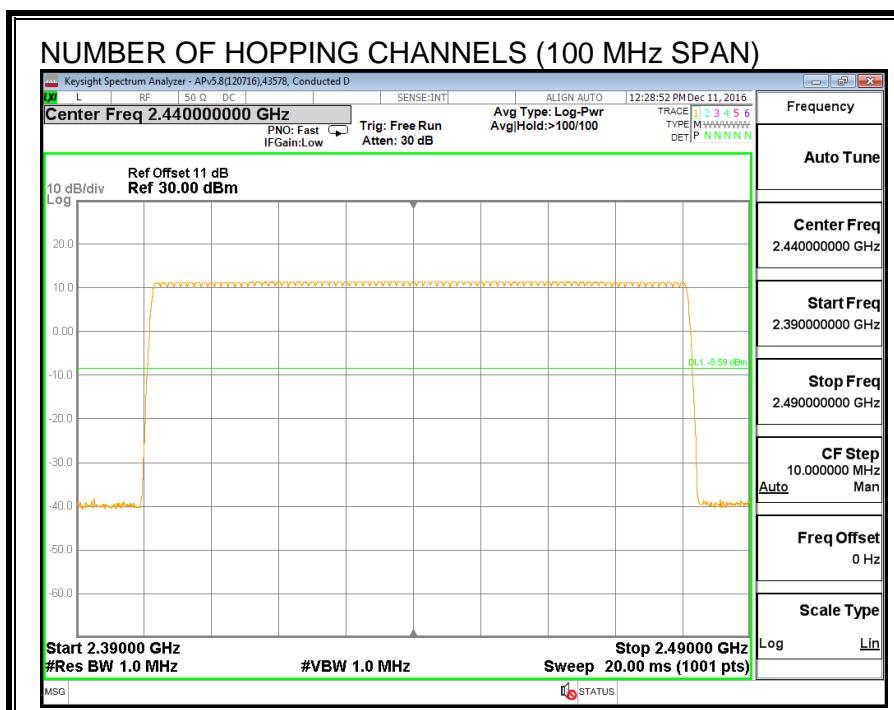

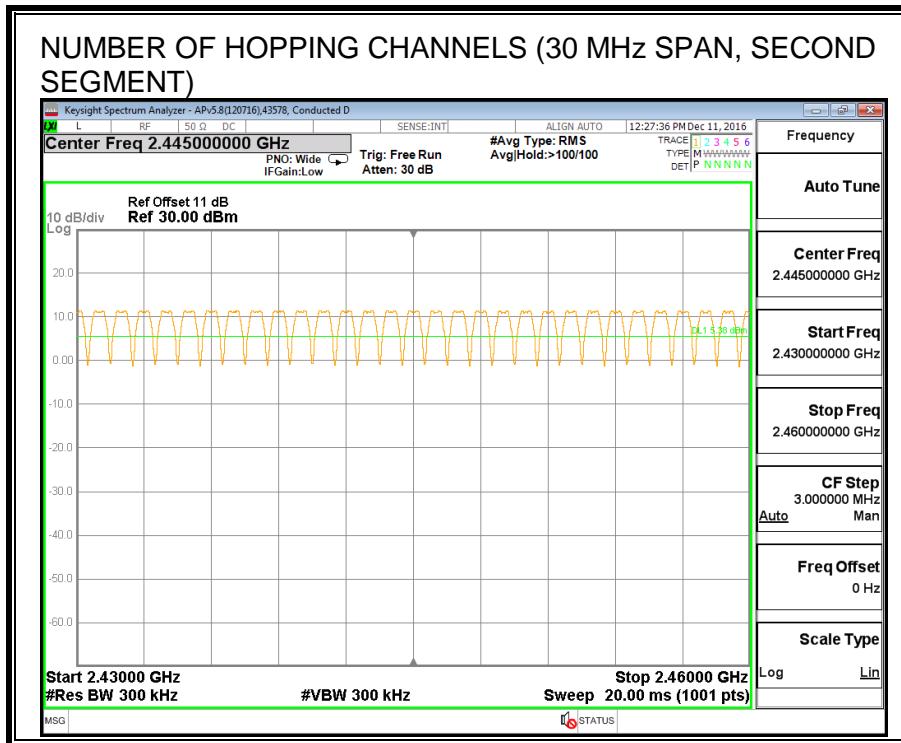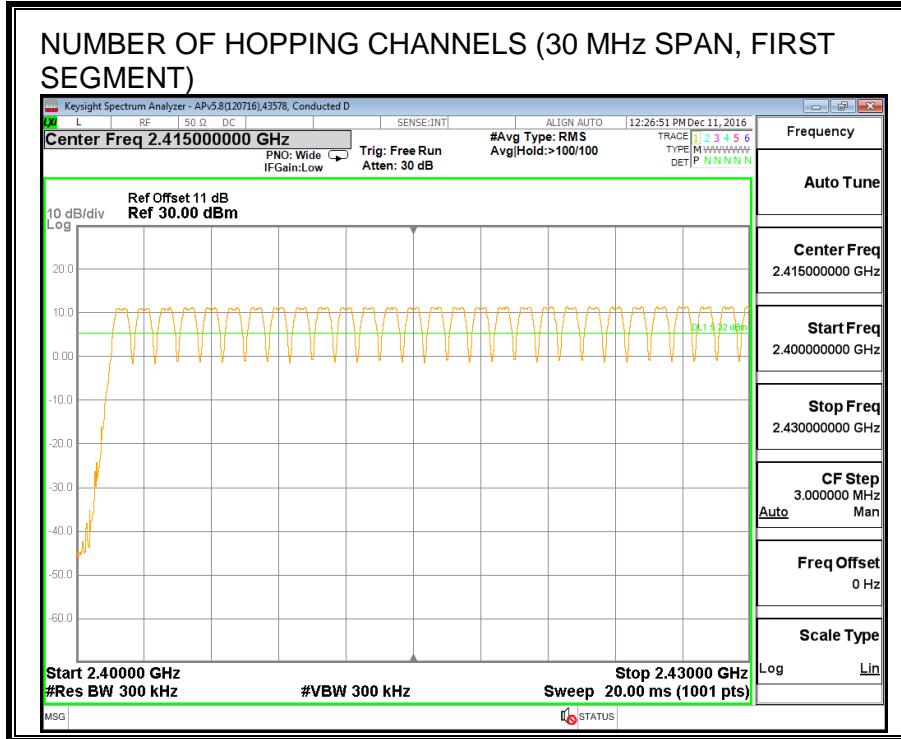

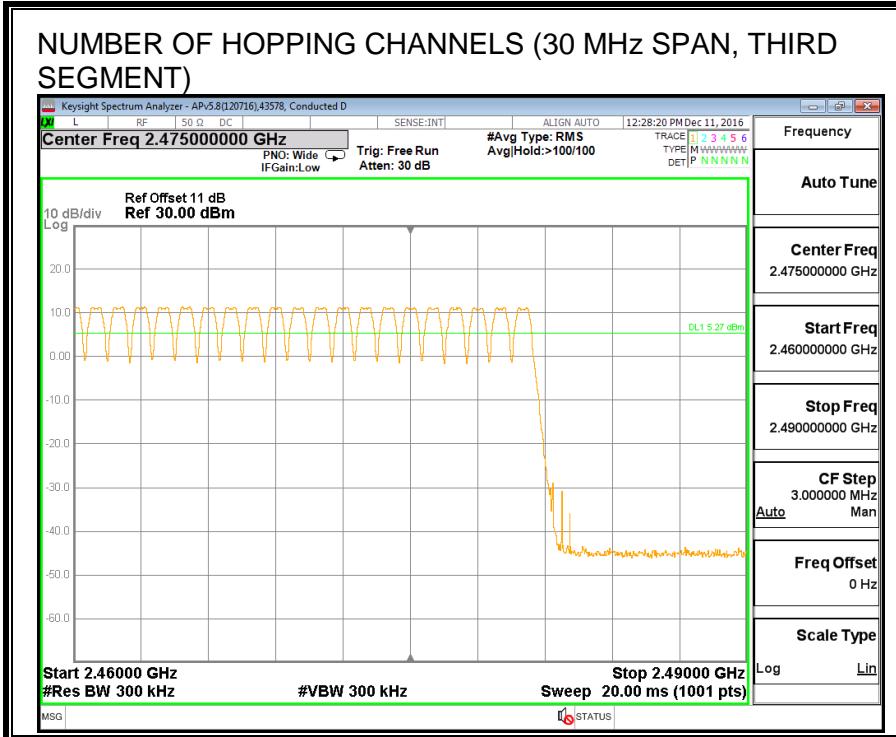

8.5.4. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.



The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.



For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.384	32	0.123	0.4	-0.277
DH3	1.640	16	0.262	0.4	-0.138
DH5	2.888	11	0.318	0.4	-0.082
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.384	8	0.031	0.4	-0.369
DH3	1.64	4	0.066	0.4	-0.334
DH5	2.888	2.75	0.079	0.4	-0.321

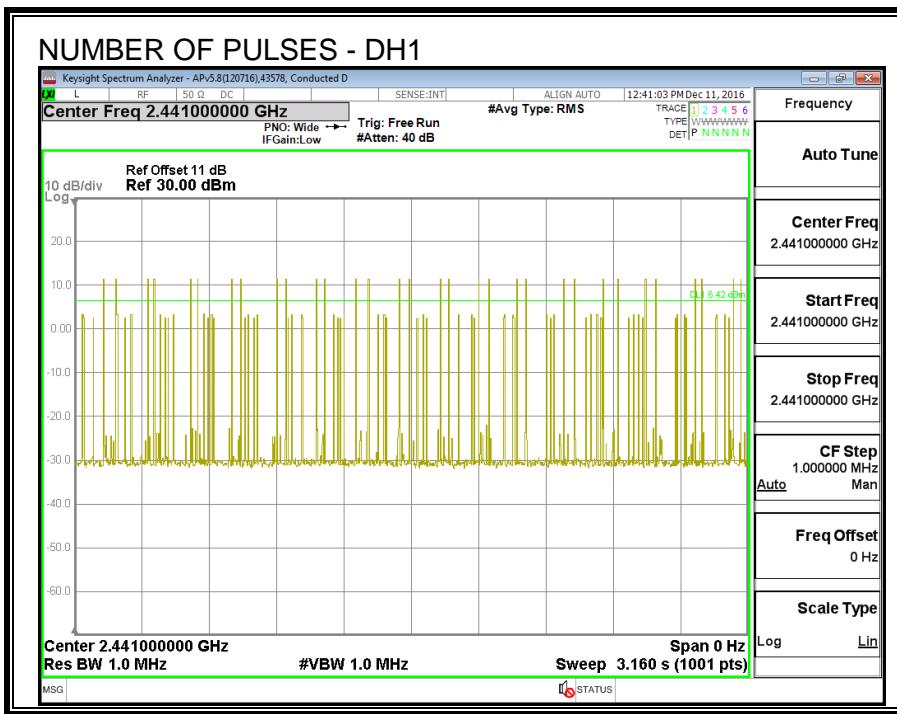

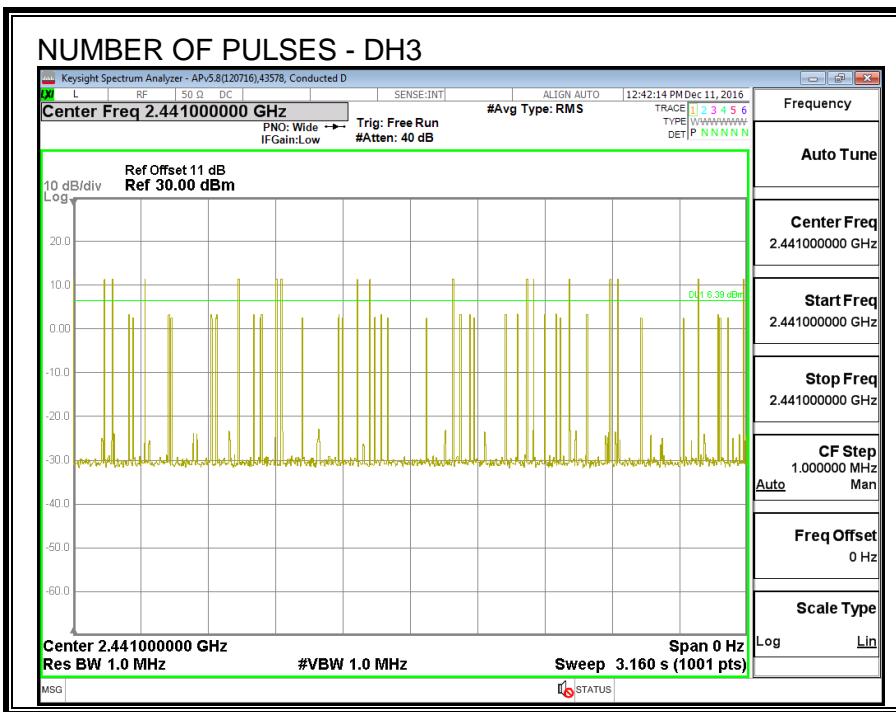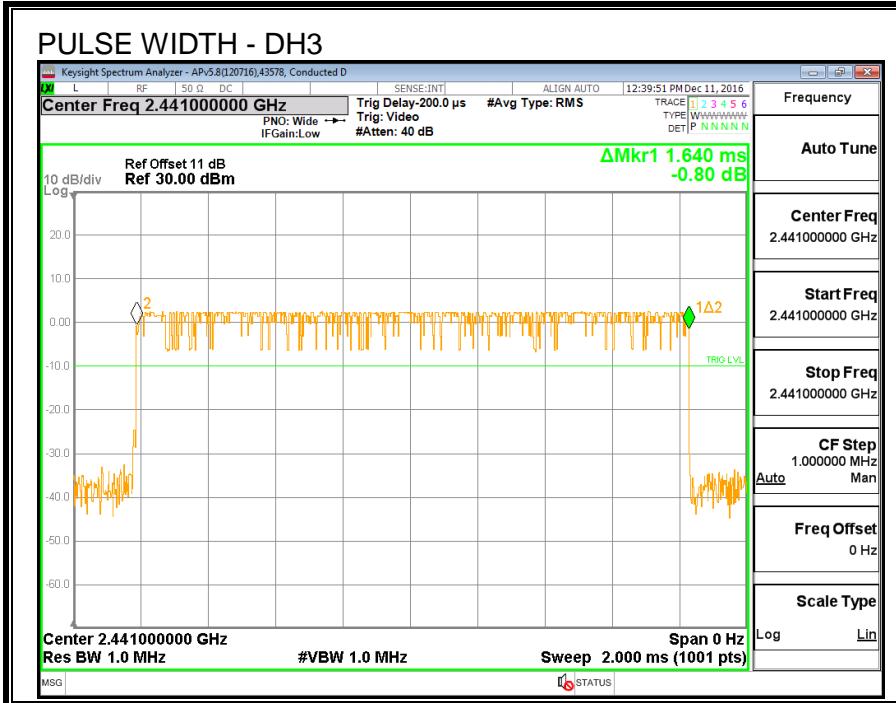

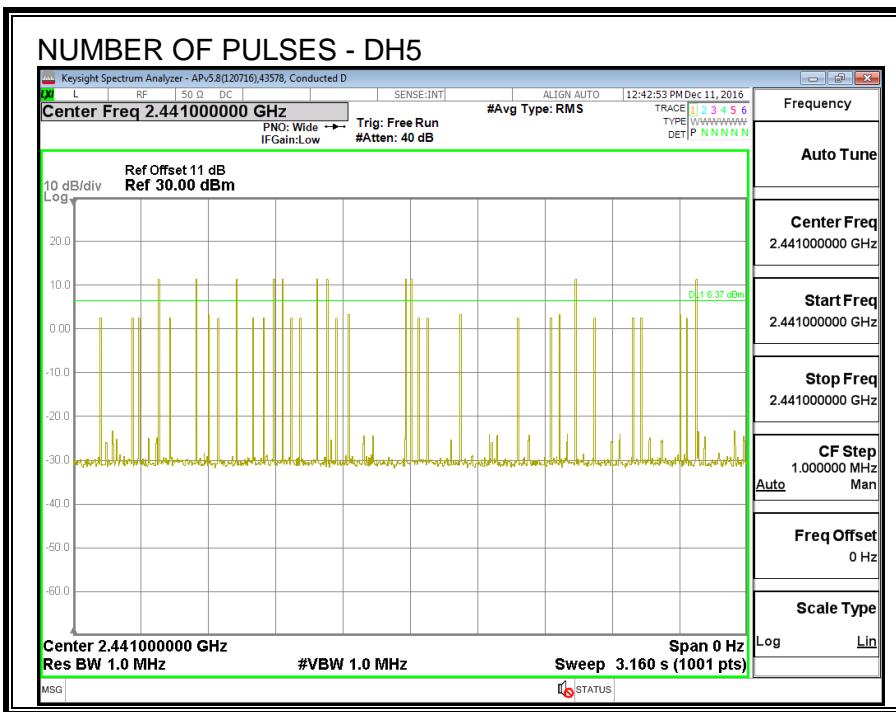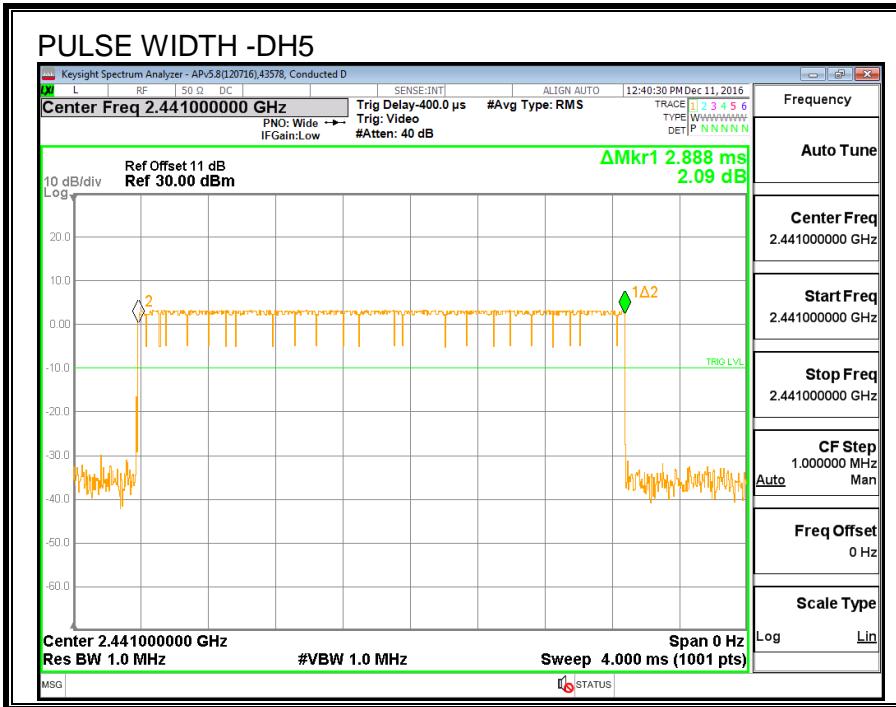

8.5.5. OUTPUT POWER

ID:	40802	Date:	01/11/2017
------------	-------	--------------	------------

LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.95	30	-17.05
Middle	2441	13.06	30	-16.94
High	2480	13.14	30	-16.86

8.5.6. AVERAGE POWER

ID:	40802	Date:	01/11/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	12.39
Middle	2441	12.42
High	2480	12.38

8.5.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

