



## MEASUREMENT REPORT

### FCC PART 15.247 / ISED RSS-247 WLAN 802.11b/g/n

**Applicant Name:**

Apple Inc.  
 1 Infinite Loop  
 Cupertino, CA 95014  
 United States

**Date of Testing:**

10/31-2/19/2018

**Test Site/Location:**

PCTEST Lab., Morgan Hill, CA, USA

**Test Report Serial No.:**

1C1710060005-02-R1.BCG

<b>FCC ID:</b>	<b>BCGA1893</b>
<b>IC:</b>	<b>579C-A1893</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:**

Certification

**Model/HVIN:**

A1893

**EUT Type:**

Tablet Device

**Frequency Range:**

2412 – 2472MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**

RSS-247 Issue 2

**Test Procedure(s):**

ANSI C63.10-2013, KDB 558074 D01 v04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C1710060005-02-R1.BCG) supersedes and replaces the previously issued test report (S/N: 1C1710060005-02.BCG) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 Randy Ortanez  
 President


FCC ID: BCGA1893	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device		Page 1 of 173

## T A B L E   O F   C O N T E N T S

1.0	INTRODUCTION .....	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration.....	7
2.6	Software and Firmware .....	7
2.7	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	AC Line Conducted Emissions .....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY .....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS .....	13
7.1	Summary.....	13
7.2	6dB Bandwidth Measurement .....	14
7.3	Output Power Measurement.....	32
7.3.1	Average Output Power Measurement .....	33
7.3.2	Peak Output Power Measurement .....	34
7.4	Power Spectral Density .....	36
7.5	Conducted Emissions at the Band Edge .....	72
7.6	Conducted Spurious Emissions.....	93
7.7	Radiated Spurious Emission Measurements – Above 1 GHz .....	107
7.7.1	Antenna-1 Radiated Spurious Emission Measurements.....	110
7.7.2	Antenna-2 Radiated Spurious Emission Measurements.....	114
7.7.3	MIMO Radiated Spurious Emission Measurements.....	118
7.7.4	Antenna-1 Radiated Restricted Band Edge Measurements .....	122
7.7.5	Antenna-2 Radiated Restricted Band Edge Measurements .....	128
7.7.6	MIMO Radiated Restricted Band Edge Measurements .....	157
7.8	Radiated Spurious Emissions Measurements – Below 1GHz .....	163
7.9	Line-Conducted Test Data.....	169
8.0	CONCLUSION .....	173

FCC ID: BCGA1893	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 2 of 173

## MEASUREMENT REPORT

Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)										
802.11b	2412 - 2472	35.481	15.50	71.945	18.57	35.481	15.50	75.683	18.79	N/A			
802.11g	2412 - 2472	34.514	15.38	147.571	21.69	35.481	15.50	211.349	23.25	69.427	18.42	413.048	26.16
802.11n	2412 - 2472	35.481	15.50	186.209	22.70	35.481	15.50	199.526	23.00	69.758	18.44	364.754	25.62

### EUT Overview

FCC ID: BCGA1893	 <b>PCTEST®</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device				Page 3 of 173

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA1893	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 4 of 173

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA1893**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** F9FVT018JM4F, F9FVL030JJQH

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
2.4GHz	b	100.0	100.0	99.9
	g	98.7	98.8	99.0
	n	98.8	98.6	98.8

**Table 2-1. Measured Duty Cycles**

FCC ID: BCGA1893	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 5 of 173

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CCD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✓	✓	✓	✓
	11n	✓	✓	✓	✓	✓	✓

**Table 2-2. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)  
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,  
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

## 2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna A	Antenna B
2.4	1.91	0.56

**Table 2-3. Antenna Peak Gain**

## 2.4 Test Support Equipment

Test Support Equipment Used					
1	Apple MacBook	Model:	A1502	S/N:	C02P4004G1R8
	w/ AC/DC Adapter	Model:	A1435	S/N:	C04325505K1F288BG
2	Apple USB Cable	Model:	Kanzi	S/N:	3251F5
3	Apple Earphone	Model:	N/A	S/N:	N/A
4	USB Lightning Cable	Model:	N/A	S/N:	N/A
5	w/ 12 W AC Adapter	Model:	A1401	S/N:	N/A
6	DC Power Supply	Model:	EP20571-110V	S/N:	N/A

**Table 2-4. Test Support Equipment Used**

FCC ID: BCGA1893	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device			Page 6 of 173

## 2.5 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be Y-orientation (landscape).

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB cable with wire charger
- EUT powered by host PC via USB cable with wire charger

## 2.6 Software and Firmware

The test was conducted with firmware version 15E61570I installed on the EUT.

For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.4.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA1893	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 7 of 173

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: BCGA1893	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 8 of 173

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA1893	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 9 of 173

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: BCGA1893	 <b>PCTEST</b> <sup>®</sup> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 10 of 173

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA1893	 <b>PCTEST®</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 11 of 173

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AM WN25	WLAN Cable Set	3/17/2017	Annual	3/17/2018	AM WN25
-	EMI 3117-ESW1	Radiated Cable Set	3/1/2017	Biennial	3/1/2018	N/A
-	EMI HLS62E-ESW1	Radiated Cable Set	2/28/2017	Biennial	2/28/2018	N/A
Anritsu	MA2411B	Pulse Power Sensor	11/28/2017	Biennial	11/28/2018	1027293
Anritsu	ML2495A	Power Meter	11/28/2017	Biennial	11/28/2018	1039008
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna(18 -40GHz)	2/24/2017	Annual	2/24/2018	T058701-03
COM-POWER	LIN-120A	LISN	2/22/2017	Annual	2/22/2018	241296
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2017	Annual	3/13/2018	MY49430244
Rohde & Schwarz	ESW26	ESW26 EMI Test Receiver	7/15/2017	Annual	7/15/2018	101299
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	4/24/2017	Annual	4/24/2018	104093
Rohde & Schwarz	ESW44	EMI Test Receiver	11/14/2017	Annual	11/14/2018	101570
Rohde & Schwarz	HLS62E	Bi-Log Antenna (30MHz - 6GHz)	3/27/2017	Annual	3/27/2018	100810
Rohde & Schwarz	SFUNIT-RX	TS-SFUNIT SHIELDED FILTER UNIT	9/11/2017	Annual	9/11/2018	102132
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	2/3/2017	Annual	2/3/2018	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	1/3/2017	Annual	1/3/2018	100052
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	2/3/2017	Annual	2/3/2018	102325
Rohde & Schwarz	TC-TA18	CROSS POL. VIVALDI ANT (400MHz - 18GHz)	11/13/2017	Annual	11/13/2018	101056-AE
Traceable	1208T91	Humidity/Temperature/Dew Point Meter	9/27/2017	Biennial	9/27/2018	160838829

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device		Page 12 of 173

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA1893

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 13 of 173

## 7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

**The minimum permissible 6dB bandwidth is 500 kHz.**

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2  
KDB 558074 D01 v04 – Section 8.2 Option 2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: BCGA1893	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 14 of 173

## Antenna-1 6 dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	8.595	0.500	Pass
2442	7	b	1	9.033	0.500	Pass
2472	13	b	1	9.069	0.500	Pass
2412	1	g	6	16.06	0.500	Pass
2442	7	g	6	16.04	0.500	Pass
2472	13	g	6	16.06	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.30	0.500	Pass
2442	7	n	6.5/7.2 (MCS0)	17.22	0.500	Pass
2472	13	n	6.5/7.2 (MCS0)	17.29	0.500	Pass

Table 7-2. Conducted Bandwidth Measurements

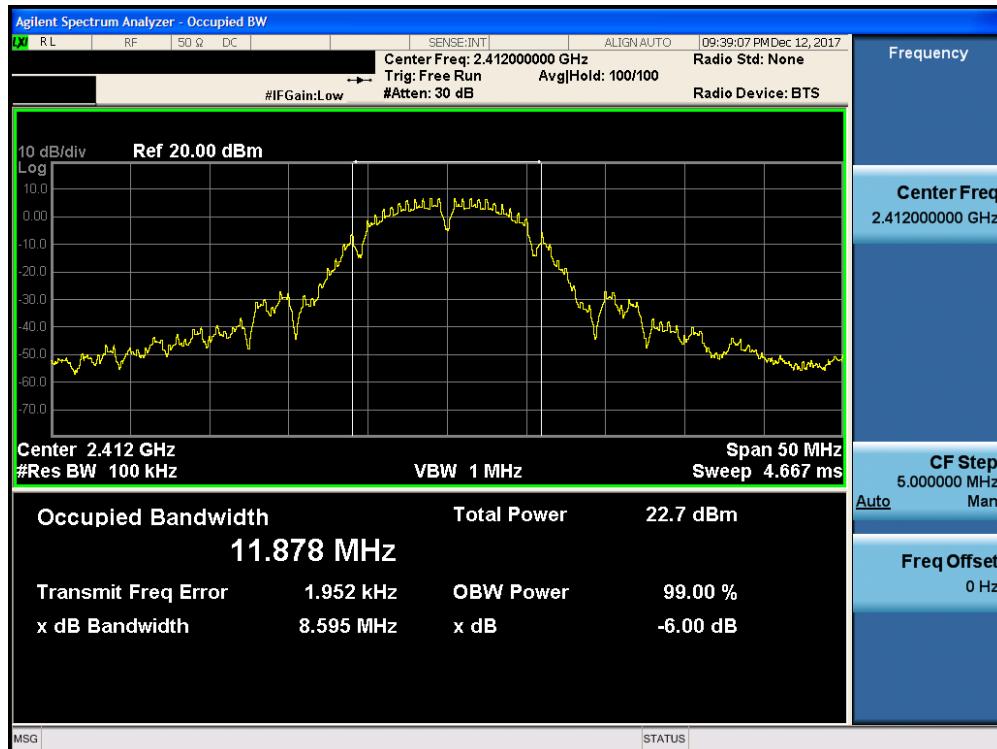

Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 1)

FCC ID: BCGA1893	 PCTEST <sup>®</sup> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 15 of 173



Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 7)




Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 16 of 173




Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 1)

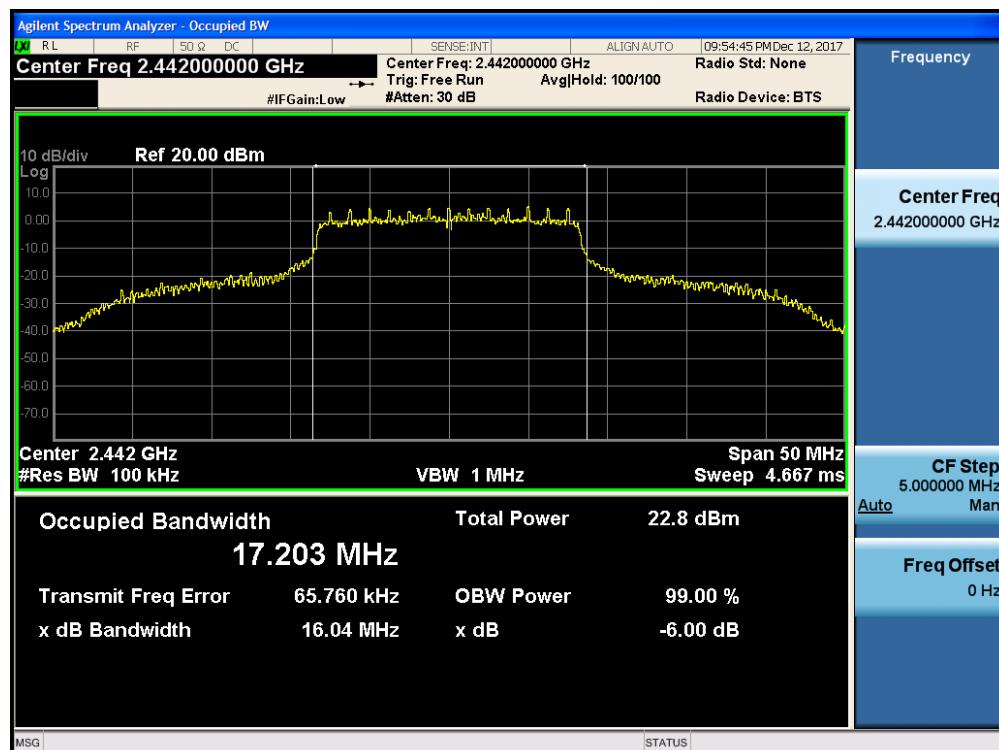


Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 7)

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 17 of 173

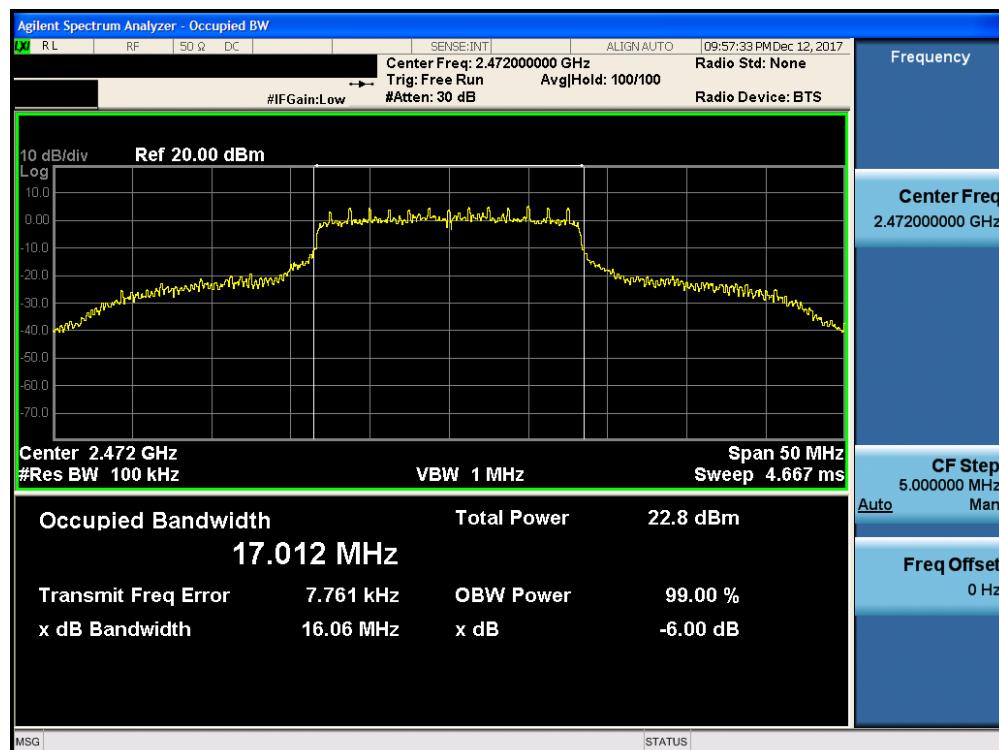


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 13)

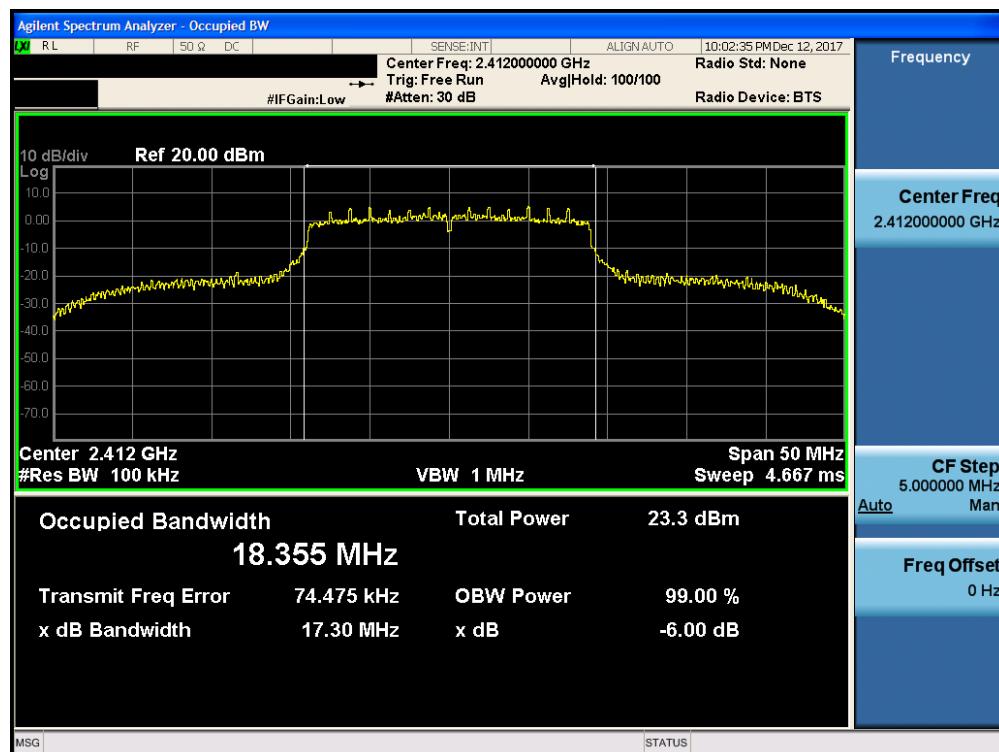


Plot 7-7. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 18 of 173

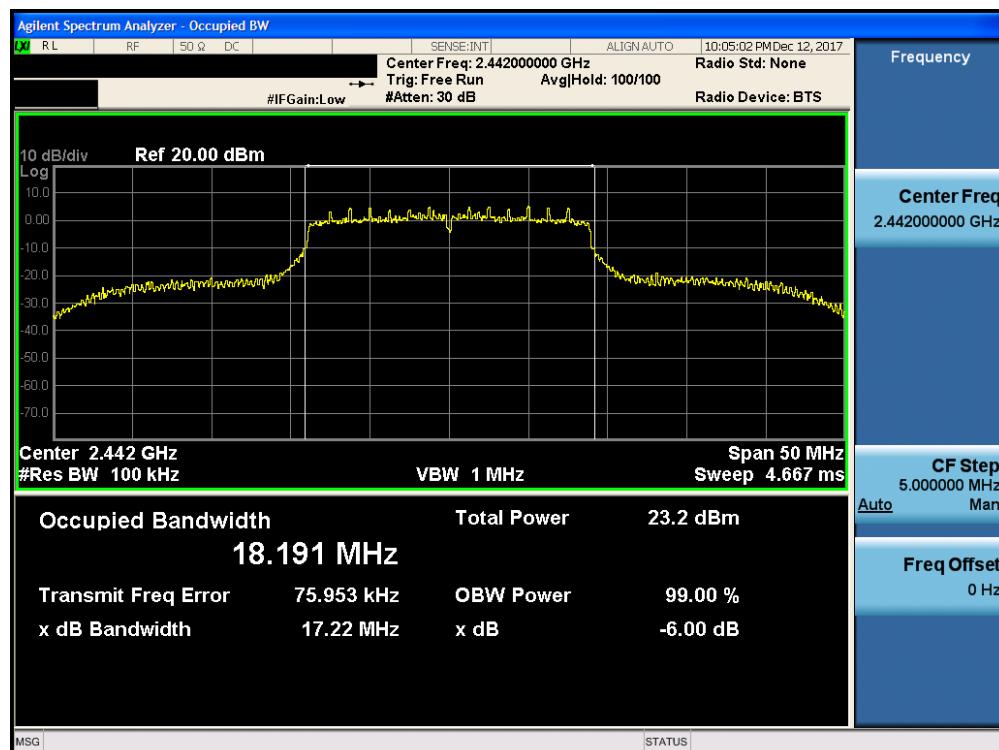

Plot 7-8. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 7)

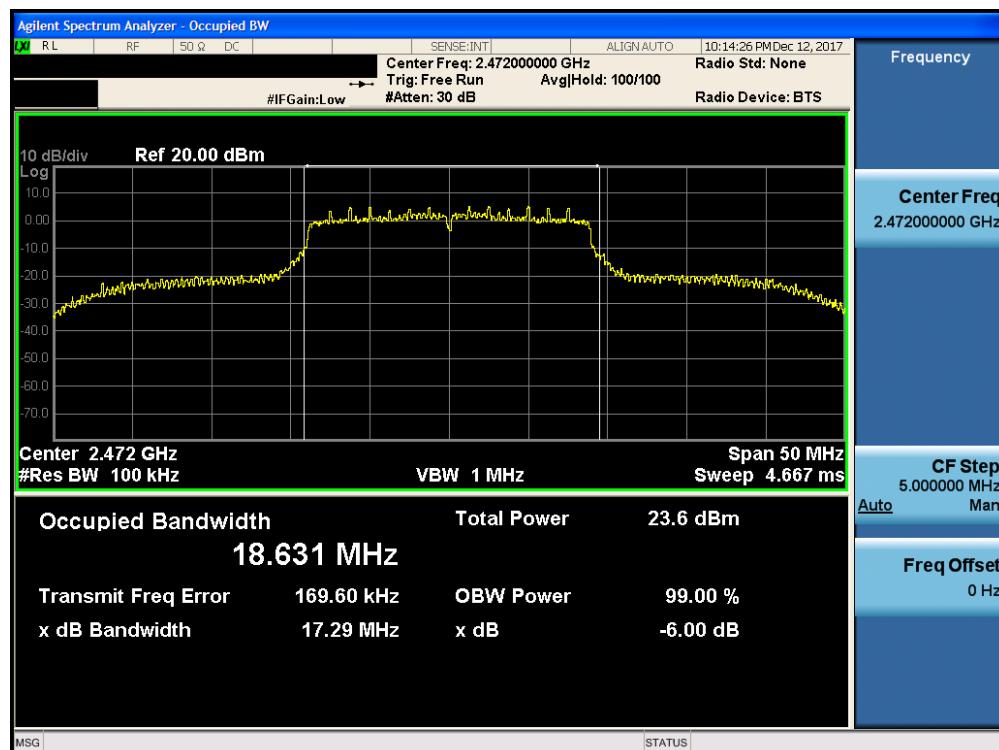

Plot 7-9. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 19 of 173

## Antenna-2 6 dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	8.569	0.500	Pass
2442	7	b	1	8.595	0.500	Pass
2472	13	b	1	8.134	0.500	Pass
2412	1	g	6	16.06	0.500	Pass
2442	7	g	6	16.07	0.500	Pass
2472	13	g	6	16.06	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.09	0.500	Pass
2442	7	n	6.5/7.2 (MCS0)	17.53	0.500	Pass
2472	13	n	6.5/7.2 (MCS0)	16.99	0.500	Pass

Table 7-3. Conducted Bandwidth Measurements




Plot 7-10. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)

FCC ID: BCGA1893	 PCTEST <sup>®</sup> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 20 of 173




Plot 7-11. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 7)

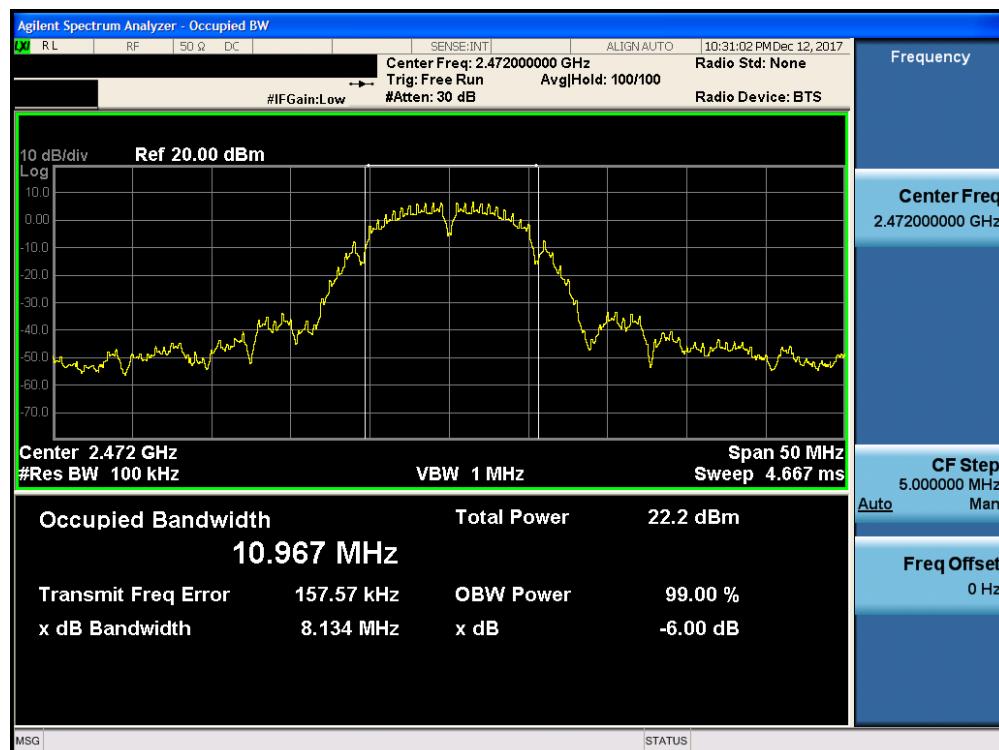


Plot 7-12. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 13)

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 21 of 173

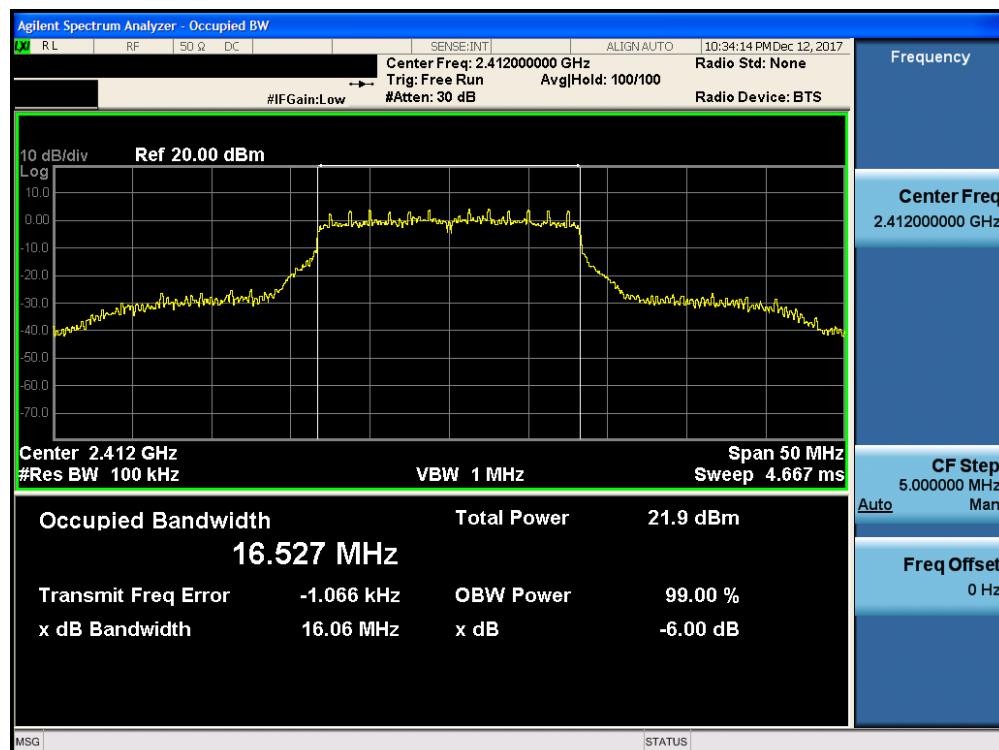


Plot 7-13. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 1)

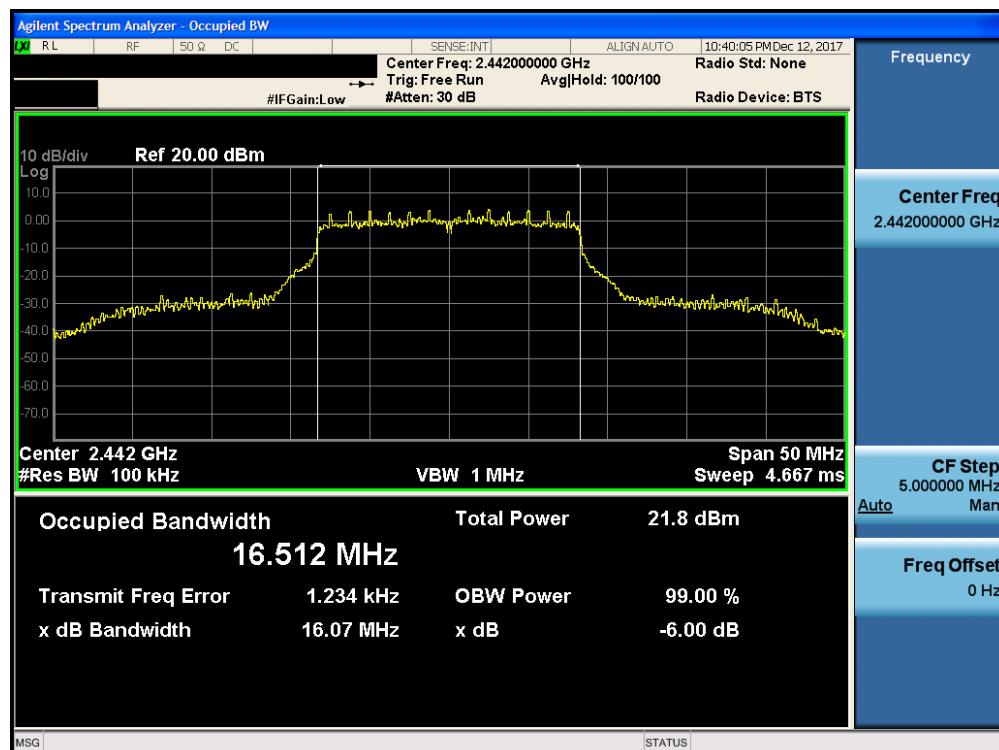


Plot 7-14. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 7)

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 22 of 173

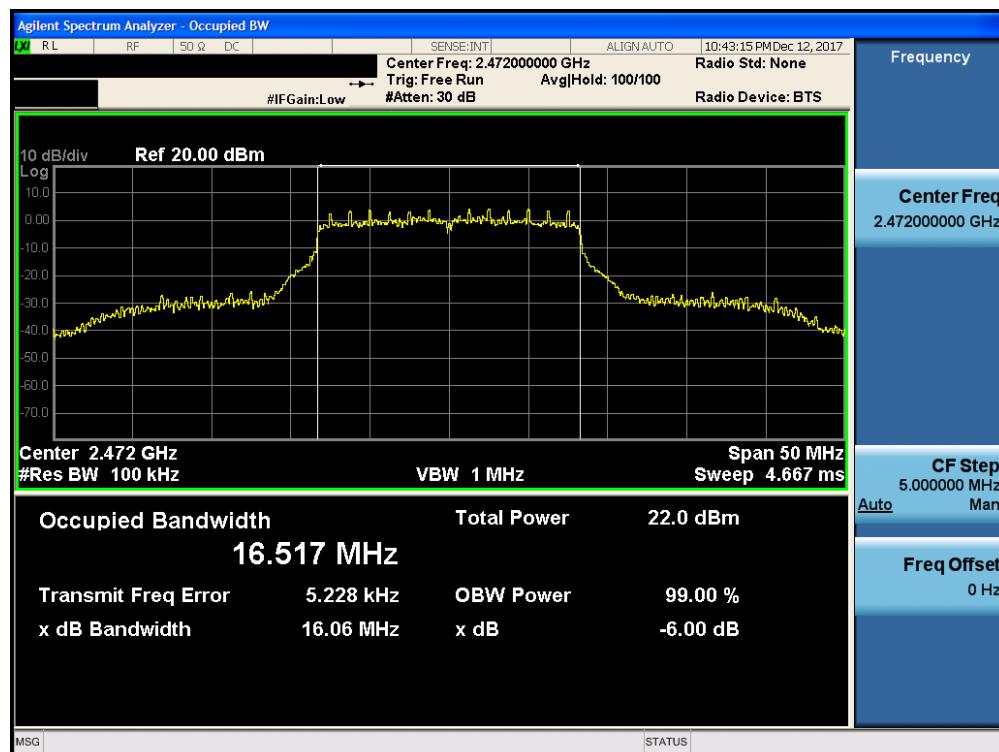


Plot 7-15. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 13)

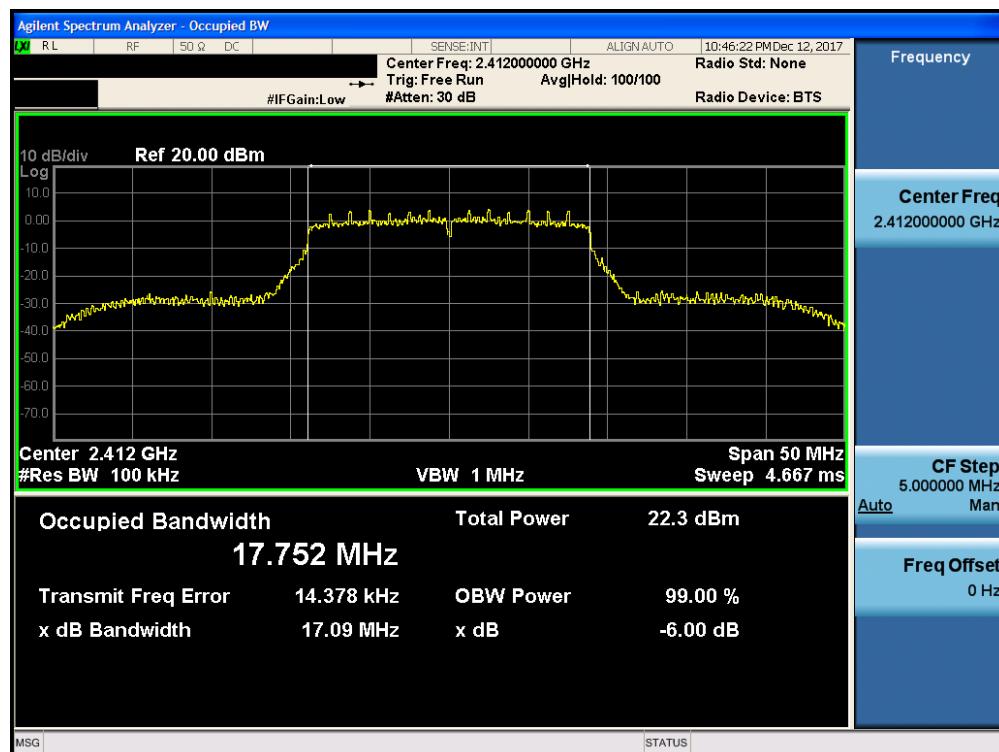


Plot 7-16. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 23 of 173

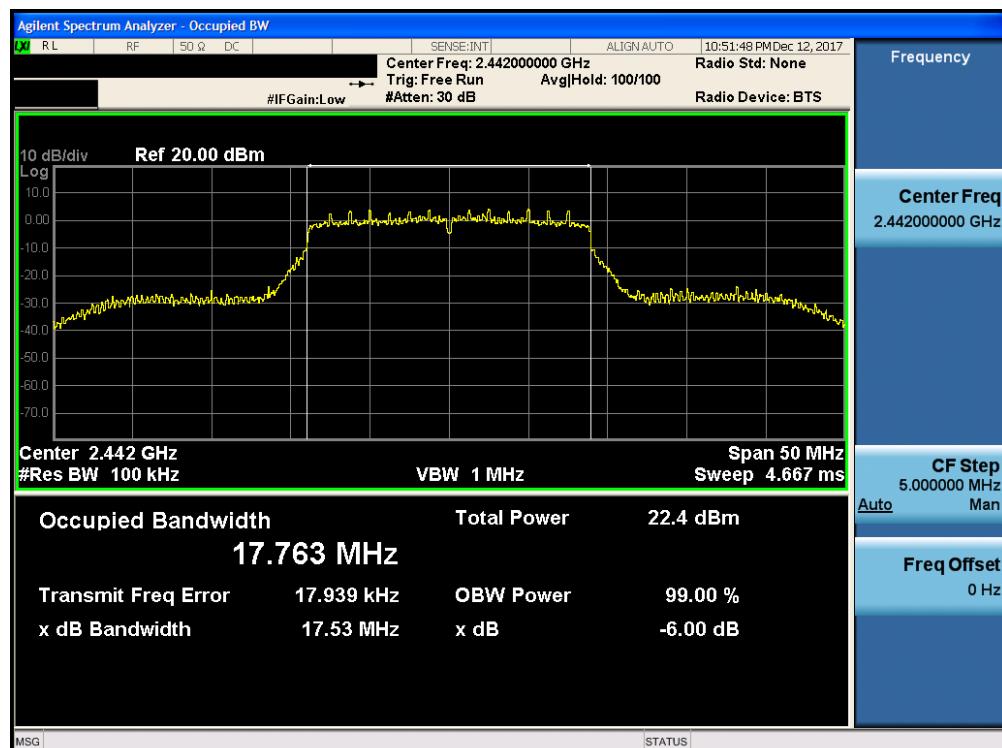

Plot 7-17. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 7)

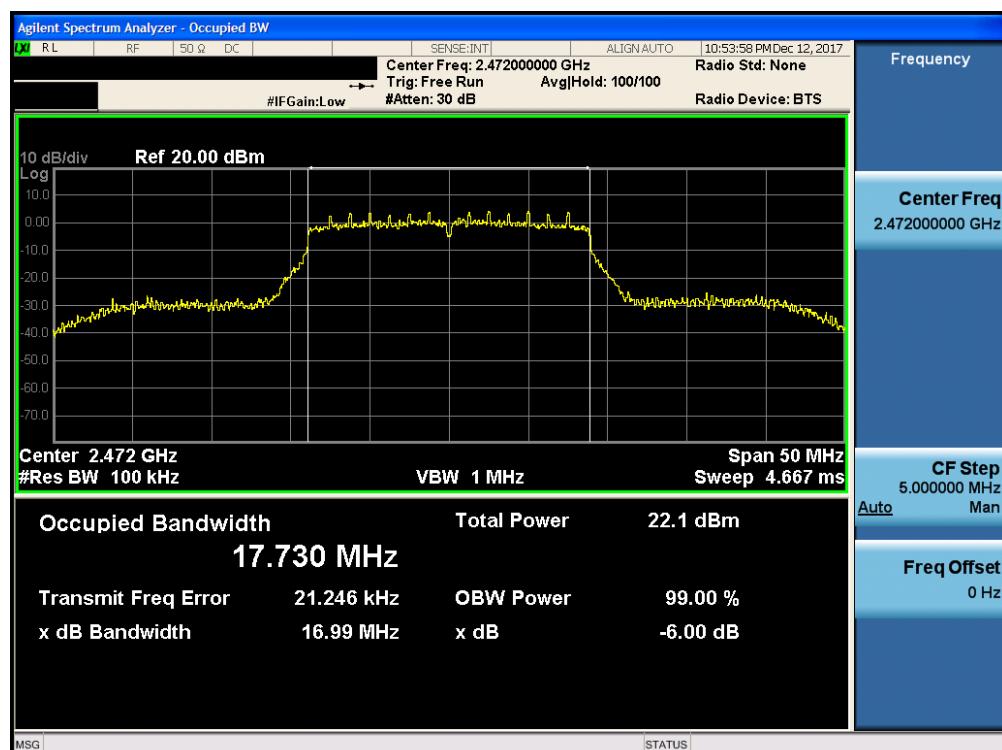

Plot 7-18. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)


FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 24 of 173

## MIMO 6 dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]		Minimum Bandwidth [MHz]	Pass / Fail
				ANT1	ANT2		
2412	1	g	6	16.30	16.33	0.500	Pass
2442	7	g	6	16.31	16.33	0.500	Pass
2472	13	g	6	16.32	16.35	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.53	17.59	0.500	Pass
2442	7	n	6.5/7.2 (MCS0)	17.52	17.61	0.500	Pass
2472	13	n	6.5/7.2 (MCS0)	17.30	17.59	0.500	Pass

**Table 7-4. Conducted Bandwidth Measurements**

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device		

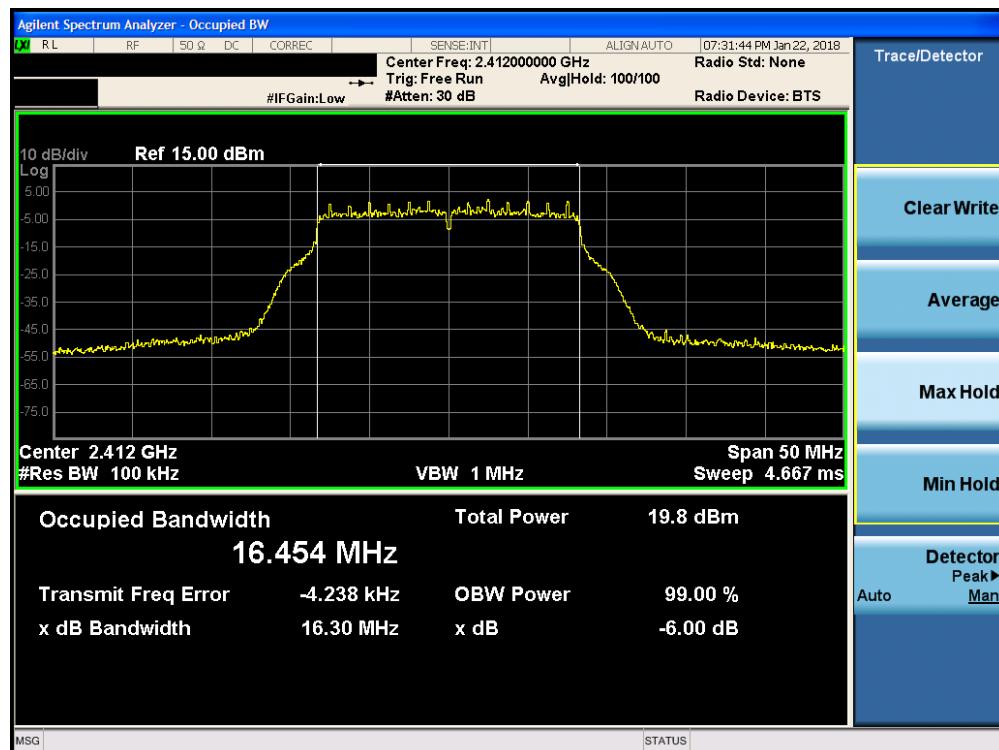


**Plot 7-19. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 1)**




**Plot 7-20. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 1)**

FCC ID: BCGA1893	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT    (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 26 of 173

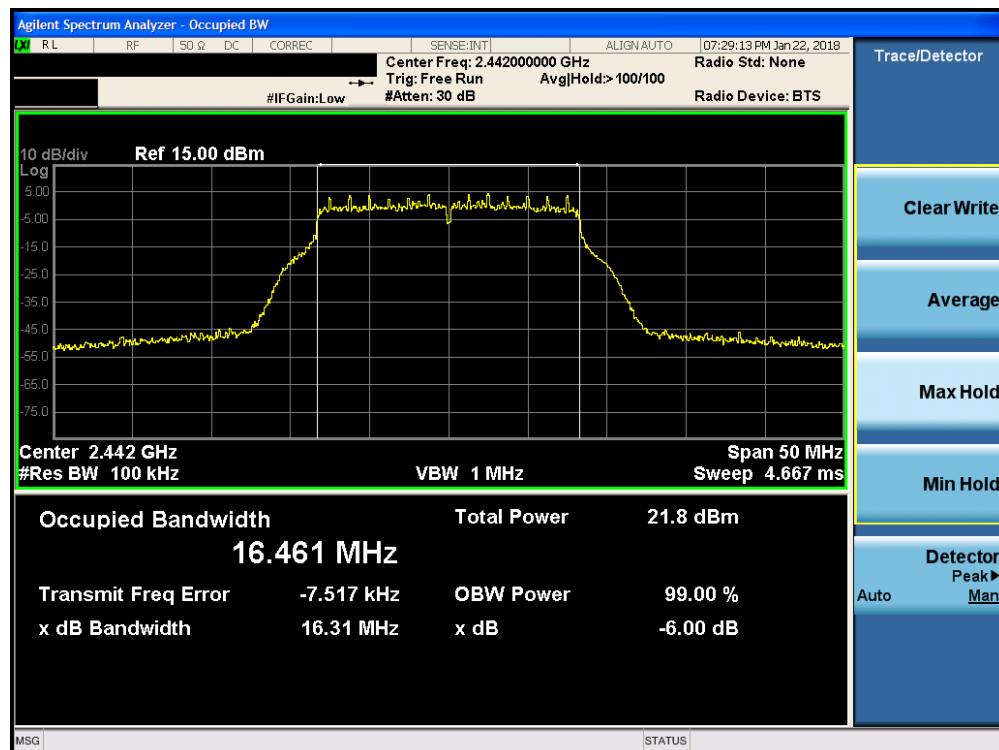


Plot 7-21. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 7)

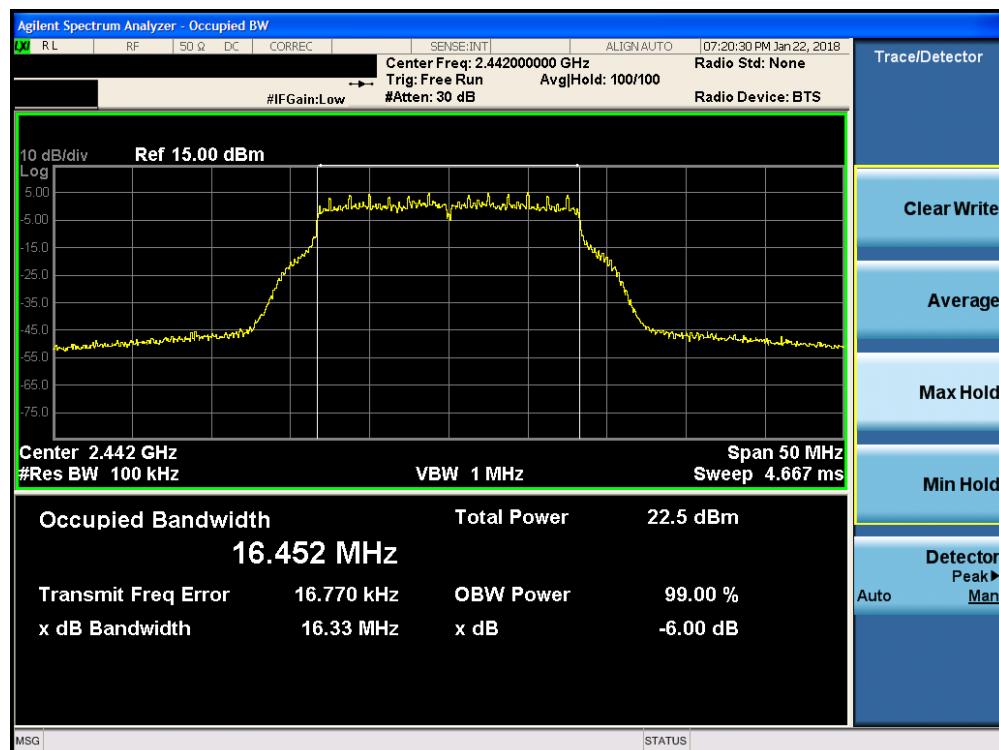


Plot 7-22. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 7)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 27 of 173

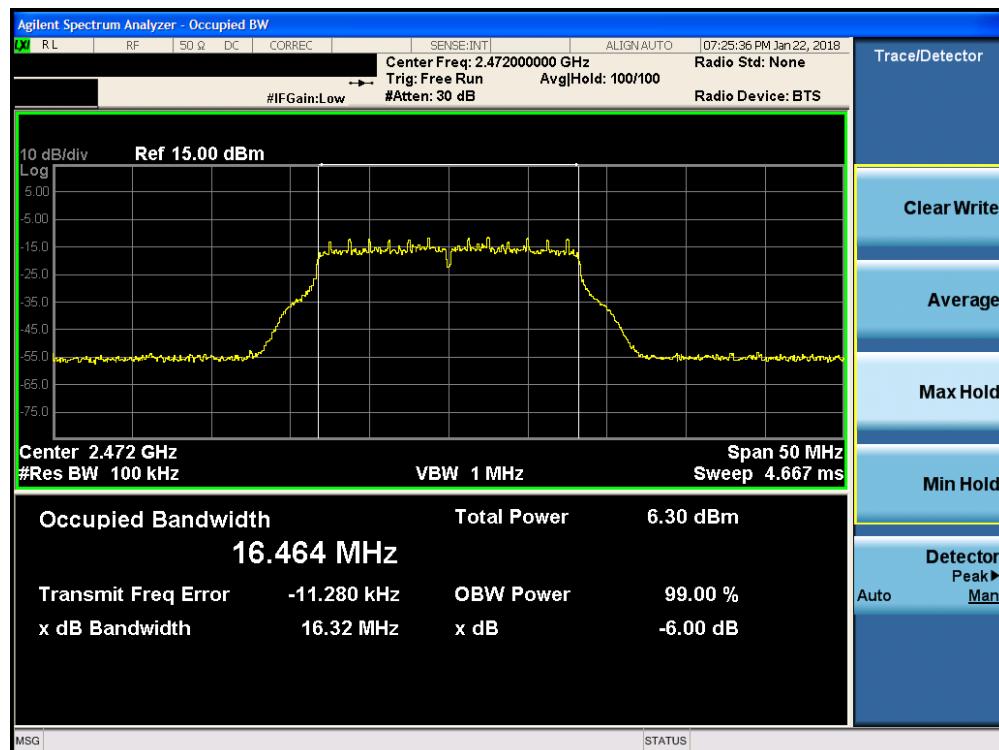


Plot 7-23. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 13)

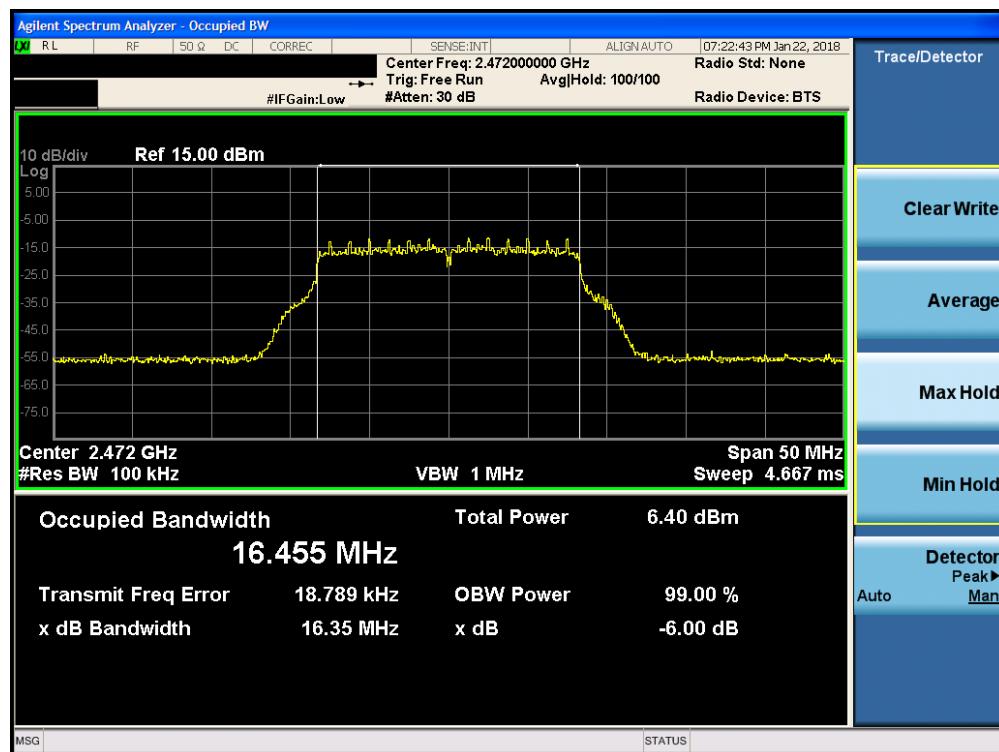


Plot 7-24. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 13)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 28 of 173

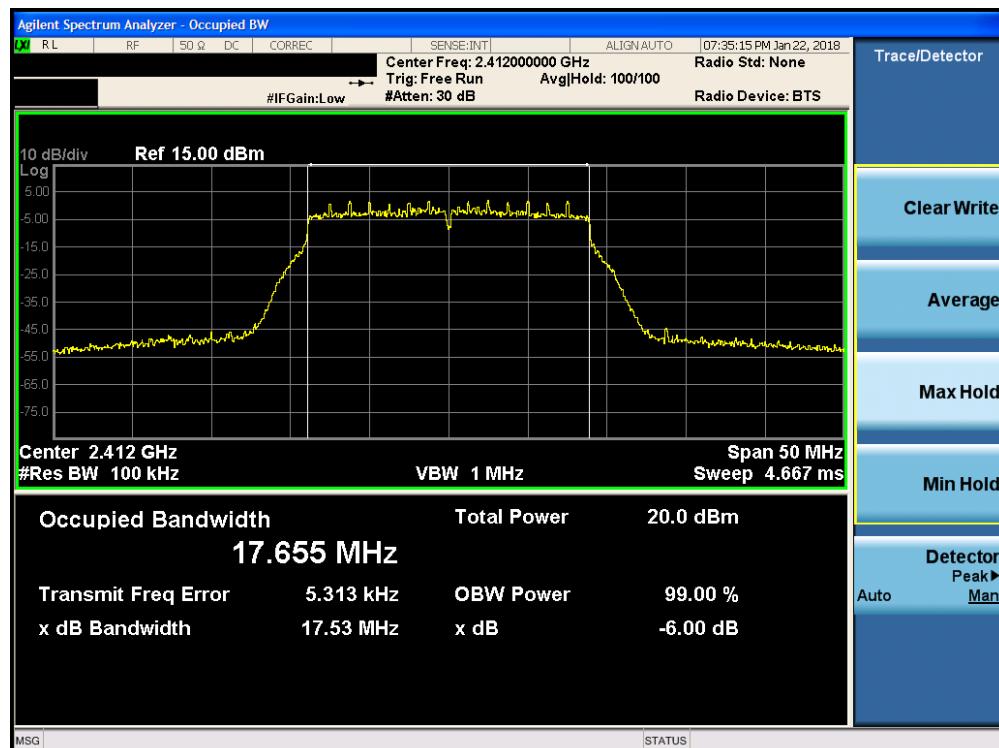


Plot 7-25. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

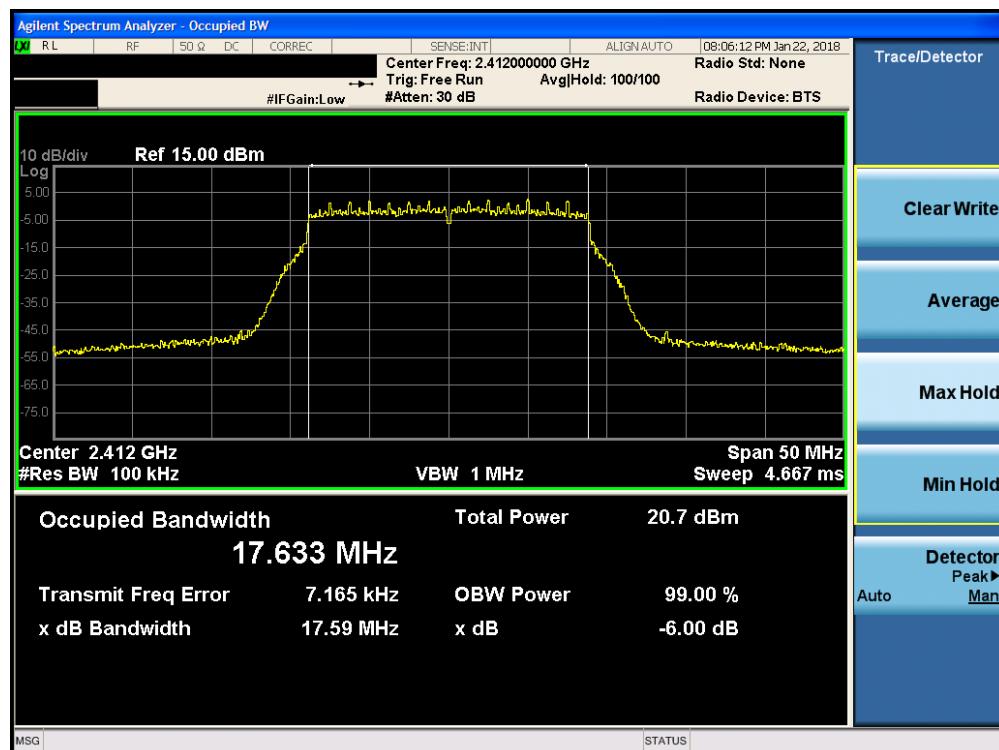


Plot 7-26. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 29 of 173

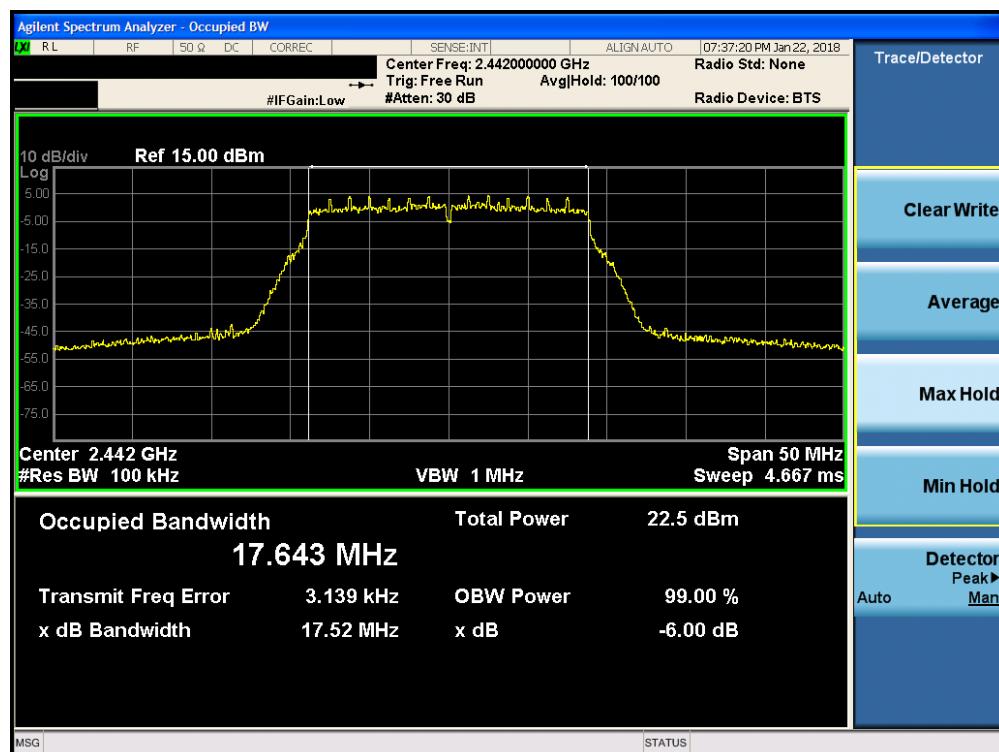


Plot 7-27. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 7)

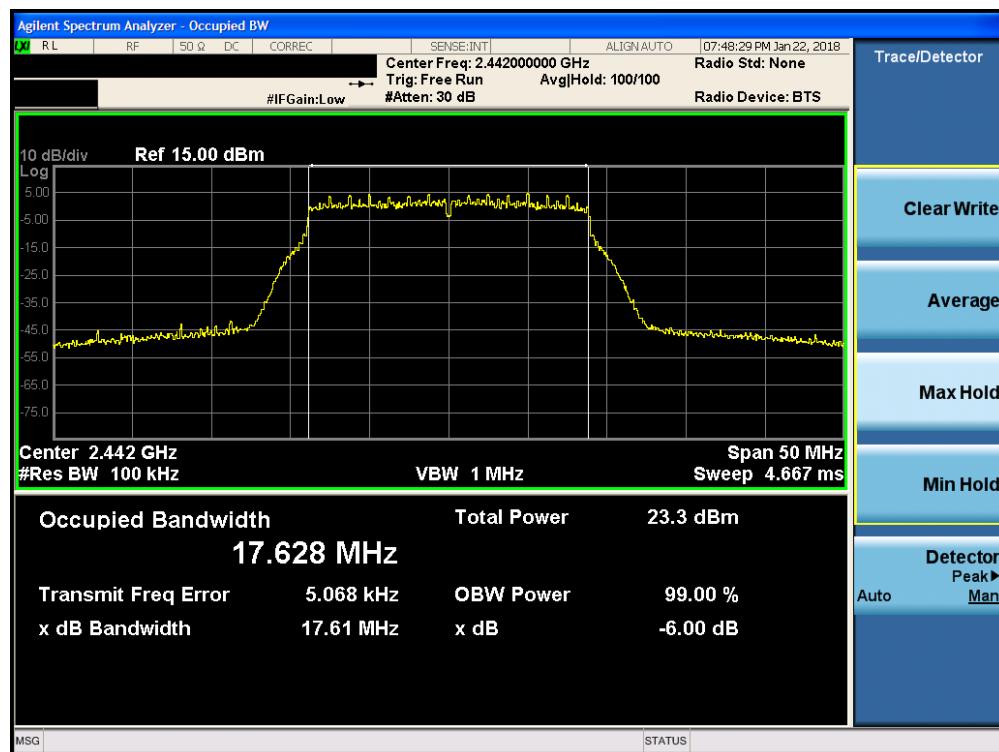


Plot 7-28. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 7)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 30 of 173

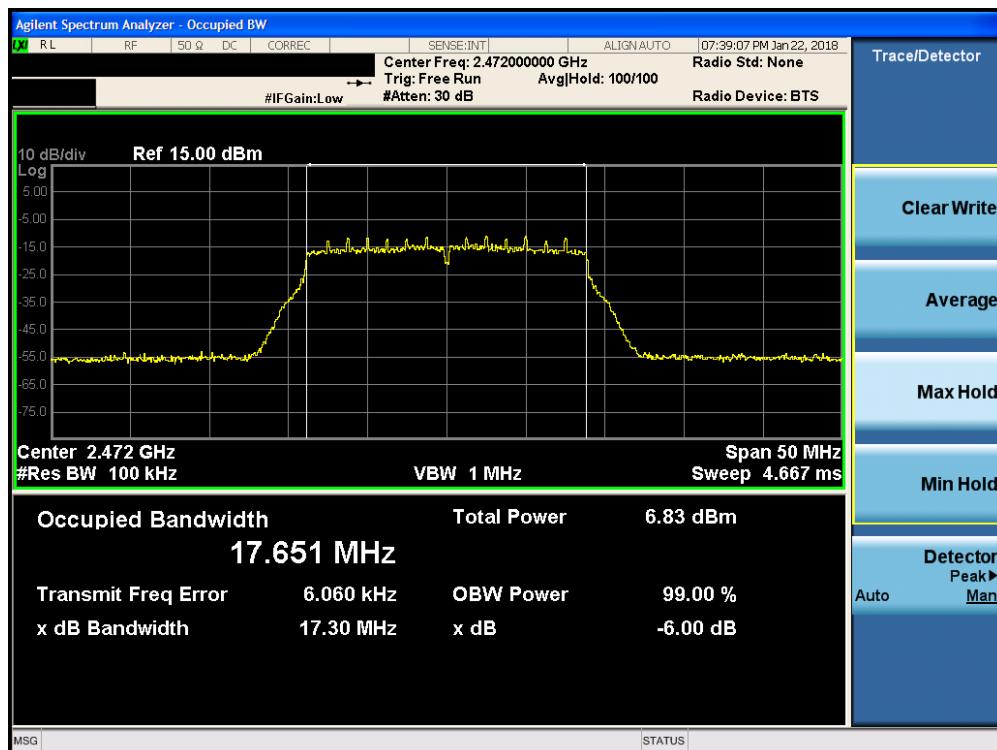

Plot 7-29. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 13)

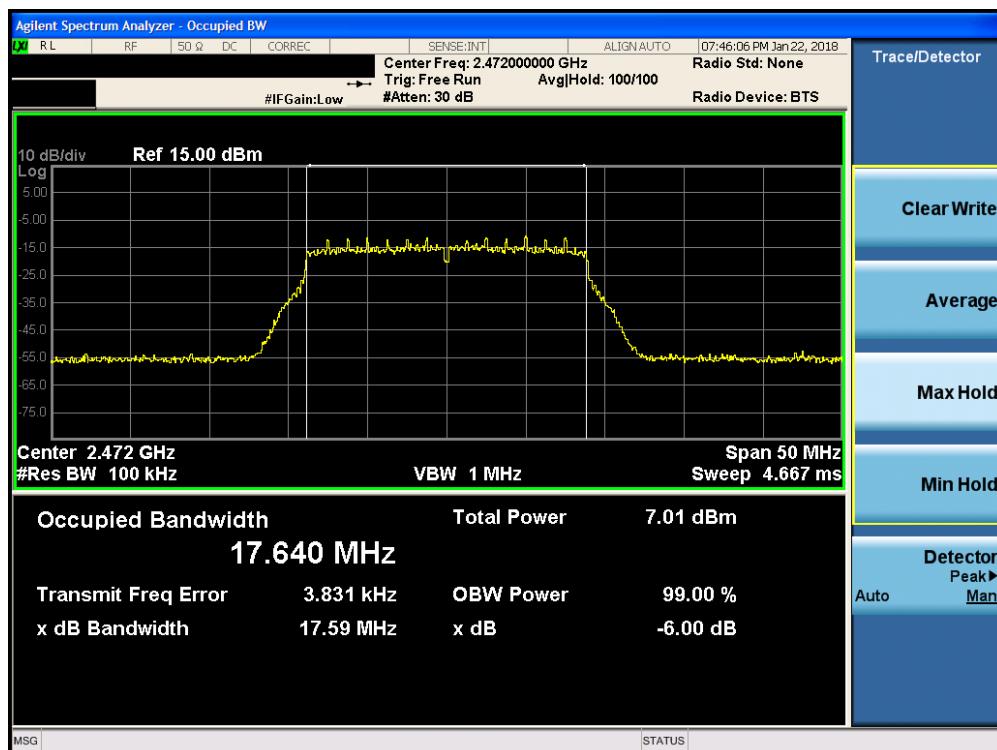

Plot 7-30. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 31 of 173

## 7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

**RSS-247 [5.4] section d. The maximum e.i.r.p. shall not exceed 4 Watt.**

### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

KDB 558074 D01 v04 – Section 9.1.3 PKPM1 Peak Power Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

KDB 558074 D01 v04 – Section 9.2.3.2 Method AVGPM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E1) Measure-and-Sum Technique

### Test Settings

#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

### Test Notes

The highest antenna gain is not exceeding 6dBi.

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 32 of 173

### 7.3.1 Average Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				802.11b	802.11g	802.11n	EIRP								
2412	1	AVG	1.91	15.50	14.79	14.70	17.41	30.00	-14.50	36.02	-18.61				
2437	6	AVG	1.89	15.41	15.38	15.50	17.39	30.00	-14.50	36.02	-18.63				
2442	7	AVG	1.89	15.33	15.32	15.40	17.29	30.00	-14.60	36.02	-18.73				
2457	10	AVG	1.54	15.27	15.26	15.40	16.94	30.00	-14.60	36.02	-19.08				
2462	11	AVG	1.49	15.50	13.46	13.47	16.99	30.00	-14.50	36.02	-19.03				
2467	12	AVG	1.41	15.26	11.98	11.82	16.67	30.00	-14.74	36.02	-19.35				
2472	13	AVG	1.41	14.00	1.47	1.43	15.41	30.00	-16.00	36.02	-20.61				

Table 7-5. SISO ANT1 Average Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				802.11b	802.11g	802.11n	EIRP								
2412	1	AVG	0.41	15.50	14.92	14.94	15.91	30.00	-14.50	36.02	-20.11				
2437	6	AVG	0.34	15.35	15.50	15.31	15.84	30.00	-14.50	36.02	-20.18				
2442	7	AVG	0.34	15.36	15.44	15.50	15.84	30.00	-14.50	36.02	-20.18				
2457	10	AVG	-0.16	15.35	15.26	15.23	15.19	30.00	-14.65	36.02	-20.83				
2462	11	AVG	-0.42	15.50	13.46	13.42	15.08	30.00	-14.50	36.02	-20.94				
2467	12	AVG	-0.91	15.40	11.98	12.00	14.49	30.00	-14.60	36.02	-21.53				
2472	13	AVG	-0.91	13.96	1.40	1.34	13.05	30.00	-16.04	36.02	-22.97				

Table 7-6. SISO ANT2 Average Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				ANT1	ANT2	MIMO	EIRP								
2412	1	AVG	4.20	12.85	12.96	15.92	20.12	30.00	-17.04	36.02	-15.90				
2437	6	AVG	4.16	15.26	15.50	18.39	22.55	30.00	-14.50	36.02	-13.47				
2442	7	AVG	4.16	15.40	15.41	18.42	22.58	30.00	-14.59	36.02	-13.45				
2457	10	AVG	3.74	15.32	15.32	18.33	22.07	30.00	-14.68	36.02	-13.95				
2462	11	AVG	3.60	12.36	12.50	15.44	19.04	30.00	-17.50	36.02	-16.98				
2467	12	AVG	3.34	10.00	10.00	13.01	16.35	30.00	-20.00	36.02	-19.67				
2472	13	AVG	3.34	-0.05	-0.19	2.89	6.23	30.00	-26.66	36.02	-29.79				

Table 7-7. CDD g-mode Average Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				ANT1	ANT2	MIMO	EIRP								
2412	1	AVG	4.20	12.82	13.00	15.92	20.12	30.00	-17.00	36.02	-15.90				
2437	6	AVG	4.16	15.35	15.50	18.44	22.60	30.00	-14.50	36.02	-13.42				
2442	7	AVG	4.16	15.34	15.48	18.42	22.58	30.00	-14.52	36.02	-13.44				
2457	10	AVG	3.74	15.28	15.33	18.32	22.06	30.00	-14.67	36.02	-13.96				
2462	11	AVG	3.60	12.50	12.50	15.51	19.11	30.00	-17.50	36.02	-16.91				
2467	12	AVG	3.34	9.94	9.80	12.88	16.22	30.00	-20.06	36.02	-19.80				
2472	13	AVG	3.34	0.00	-0.09	2.97	6.30	30.00	-26.66	36.02	-29.72				

Table 7-8. MIMO n-mode Average Conducted Output Power Measurements

FCC ID: BCGA1893	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 33 of 173

### 7.3.2 Peak Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				802.11b	802.11g	802.11n	EIRP								
2412	1	PEAK	1.91	18.51	21.02	21.76	23.67	30.00	-8.24	36.02	-12.35				
2437	6	PEAK	1.89	18.52	21.69	22.70	24.59	30.00	-7.30	36.02	-11.43				
2442	7	PEAK	1.89	18.57	21.65	22.60	24.49	30.00	-7.40	36.02	-11.53				
2457	10	PEAK	1.54	18.53	21.56	22.49	24.03	30.00	-7.51	36.02	-11.99				
2462	11	PEAK	1.49	18.56	19.85	19.74	21.34	30.00	-10.15	36.02	-14.68				
2467	12	PEAK	1.41	18.51	18.33	19.50	20.91	30.00	-10.50	36.02	-15.11				
2472	13	PEAK	1.41	17.26	9.30	8.87	18.67	30.00	-12.74	36.02	-17.35				

Table 7-9. SISO ANT1 Peak Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				802.11b	802.11g	802.11n	EIRP								
2412	1	PEAK	0.41	18.79	22.53	22.16	22.94	30.00	-7.47	36.02	-13.08				
2437	6	PEAK	0.34	18.41	23.25	22.80	23.59	30.00	-6.75	36.02	-12.43				
2442	7	PEAK	0.34	18.61	23.21	23.00	23.55	30.00	-6.79	36.02	-12.47				
2457	10	PEAK	-0.16	18.59	23.00	22.45	22.84	30.00	-7.00	36.02	-13.18				
2462	11	PEAK	-0.42	18.51	21.20	20.42	20.78	30.00	-8.80	36.02	-15.24				
2467	12	PEAK	-0.91	18.50	19.56	19.16	18.65	30.00	-10.44	36.02	-17.37				
2472	13	PEAK	-0.91	17.22	9.13	9.16	16.31	30.00	-12.78	36.02	-19.71				

Table 7-10. SISO ANT2 Peak Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Directional Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				ANT1	ANT2	MIMO	EIRP								
2412	1	PEAK	4.20	20.44	20.54	23.50	27.70	36.02	-15.48	36.02	-8.32				
2437	6	PEAK	4.16	22.83	23.39	26.13	30.29	36.02	-12.63	36.02	-5.73				
2442	7	PEAK	4.16	22.91	23.38	26.16	30.32	36.02	-12.64	36.02	-5.70				
2457	10	PEAK	3.74	22.85	23.18	26.03	29.77	36.02	-12.84	36.02	-6.25				
2462	11	PEAK	3.60	19.90	20.39	23.16	26.76	36.02	-15.63	36.02	-9.26				
2467	12	PEAK	3.34	17.89	17.71	20.81	24.15	36.02	-18.13	36.02	-11.87				
2472	13	PEAK	3.34	7.91	7.60	10.77	14.11	36.02	-21.92	36.02	-21.92				

Table 7-11. CDD g-mode Peak Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	Directional Ant. Gain [dBi]	2.4GHz Conducted Power [dBm]				Max Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Max e.i.r.p Limit [dBm]	e.i.r.p. Margin				
				IEEE Transmission Mode											
				ANT1	ANT2	MIMO	EIRP								
2412	1	PEAK	4.20	23.30	20.18	25.02	29.23	36.02	-6.79						
2437	6	PEAK	4.16	22.45	22.77	25.62	29.78	36.02	-6.24						
2442	7	PEAK	4.16	22.45	22.48	25.48	29.64	36.02	-6.39						
2457	10	PEAK	3.74	22.53	22.51	25.53	29.27	36.02	-6.75						
2462	11	PEAK	3.60	19.95	19.74	22.86	26.45	36.02	-9.57						
2467	12	PEAK	3.34	17.62	17.46	20.55	23.89	36.02	-12.13						
2472	13	PEAK	3.34	7.85	8.28	11.08	14.42	36.02	-21.60						

Table 7-12. MIMO n-mode Peak Conducted Output Power Measurements

FCC ID: BCGA1893	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 34 of 173

**Note:**

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted output power was measured to be 15.35 dBm for Antenna-1 and 15.51 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(15.35 \text{ dBm} + 15.51 \text{ dBm}) = (34.28 \text{ mW} + 35.56 \text{ mW}) = 69.84 \text{ mW} = 18.44 \text{ dBm}$$

FCC ID: BCGA1893			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device		Page 35 of 173

## 7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

**The maximum permissible power spectral density is 8 dBm in any 3 kHz band.**

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v04 – Section 10.2 Method PKPSD

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: BCGA1893		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 36 of 173

## Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-5.64	8.00	-13.64	Pass
2417	2	b	1	-5.75	8.00	-13.75	Pass
2442	7	b	1	-6.09	8.00	-14.09	Pass
2457	10	b	1	-5.66	8.00	-13.66	Pass
2462	11	b	1	-7.12	8.00	-15.12	Pass
2467	12	b	1	-5.81	8.00	-13.81	Pass
2472	13	b	1	-8.68	8.00	-16.68	Pass
2412	1	g	6	-9.57	8.00	-17.57	Pass
2442	7	g	6	-8.95	8.00	-16.95	Pass
2472	13	g	6	-23.36	8.00	-31.36	Pass
2412	1	n	6.5/7.2 (MCS0)	-7.21	8.00	-15.21	Pass
2417	2	n	6.5/7.2 (MCS0)	-9.11	9.00	-18.11	Pass
2422	3	n	6.5/7.2 (MCS0)	-9.90	10.00	-19.90	Pass
2427	4	n	6.5/7.2 (MCS0)	-8.26	11.00	-19.26	Pass
2437	6	n	6.5/7.2 (MCS0)	-9.27	12.00	-21.27	Pass
2442	7	n	6.5/7.2 (MCS0)	-8.13	8.00	-16.13	Pass
2447	8	n	6.5/7.2 (MCS0)	-9.54	9.00	-18.54	Pass
2452	9	n	6.5/7.2 (MCS0)	-8.79	10.00	-18.79	Pass
2457	10	n	6.5/7.2 (MCS0)	-9.49	11.00	-20.49	Pass
2462	11	n	6.5/7.2 (MCS0)	-10.84	12.00	-22.84	Pass
2467	12	n	6.5/7.2 (MCS0)	-12.79	13.00	-25.79	Pass
2472	13	n	6.5/7.2 (MCS0)	-23.65	8.00	-31.65	Pass

Table 7-13. Conducted Power Density Measurements

FCC ID: BCGA1893	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 37 of 173



Plot 7-31. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 1)

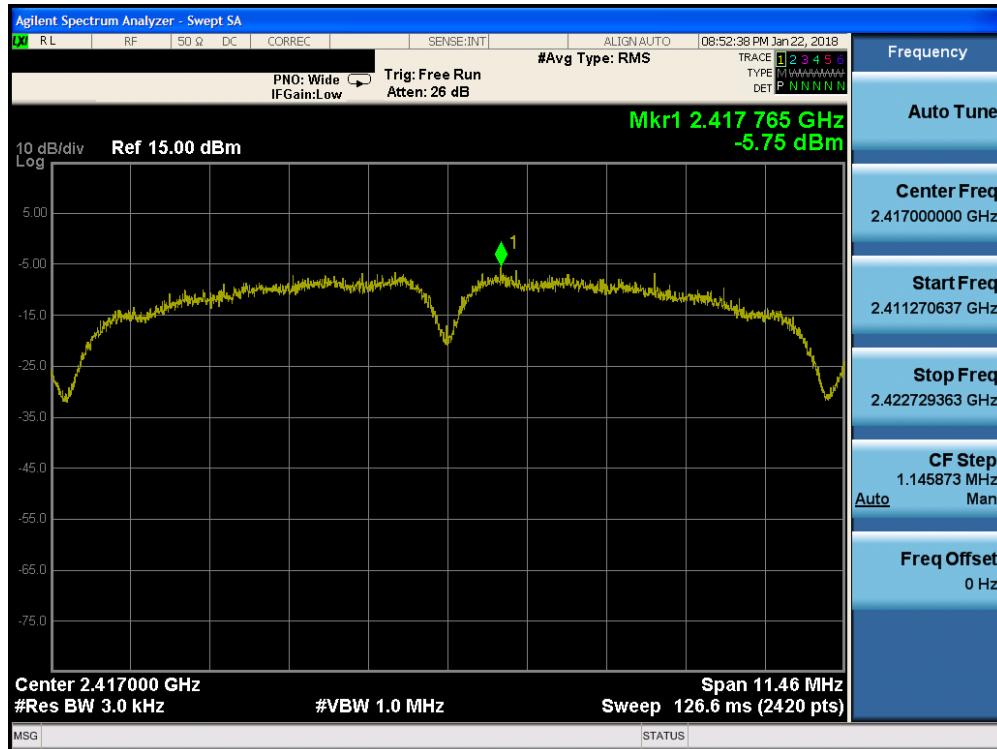


Plot 7-32. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 2)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 38 of 173



Plot 7-33. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 7)

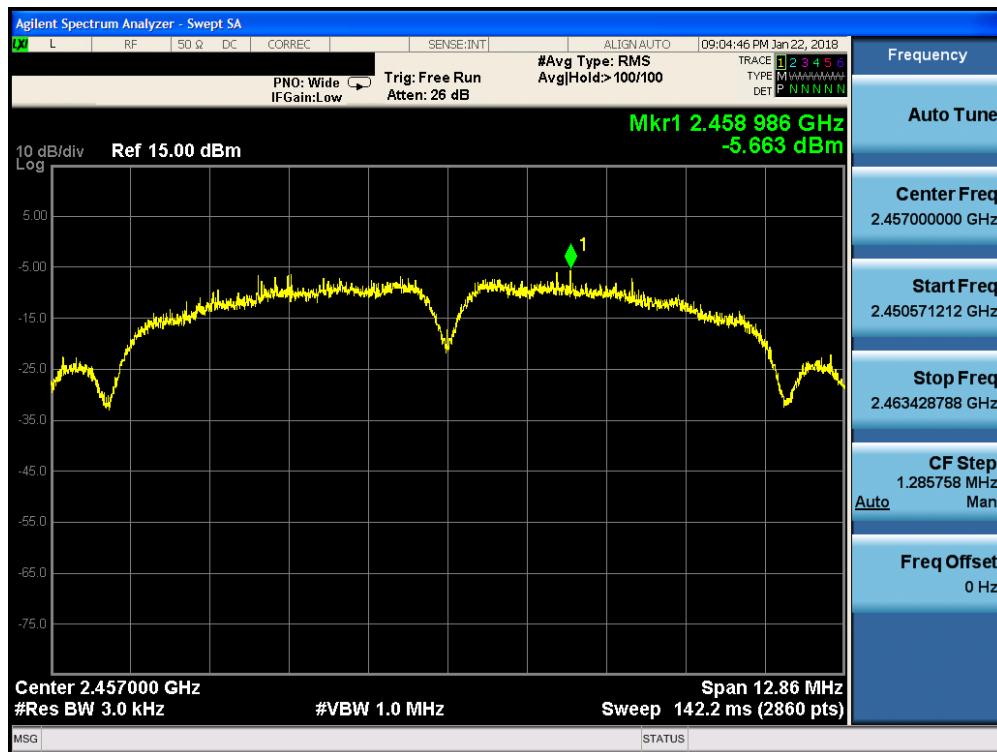

Plot 7-34. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 10)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 39 of 173



Plot 7-35. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)




Plot 7-36. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 12)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 40 of 173




Plot 7-37. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 13)

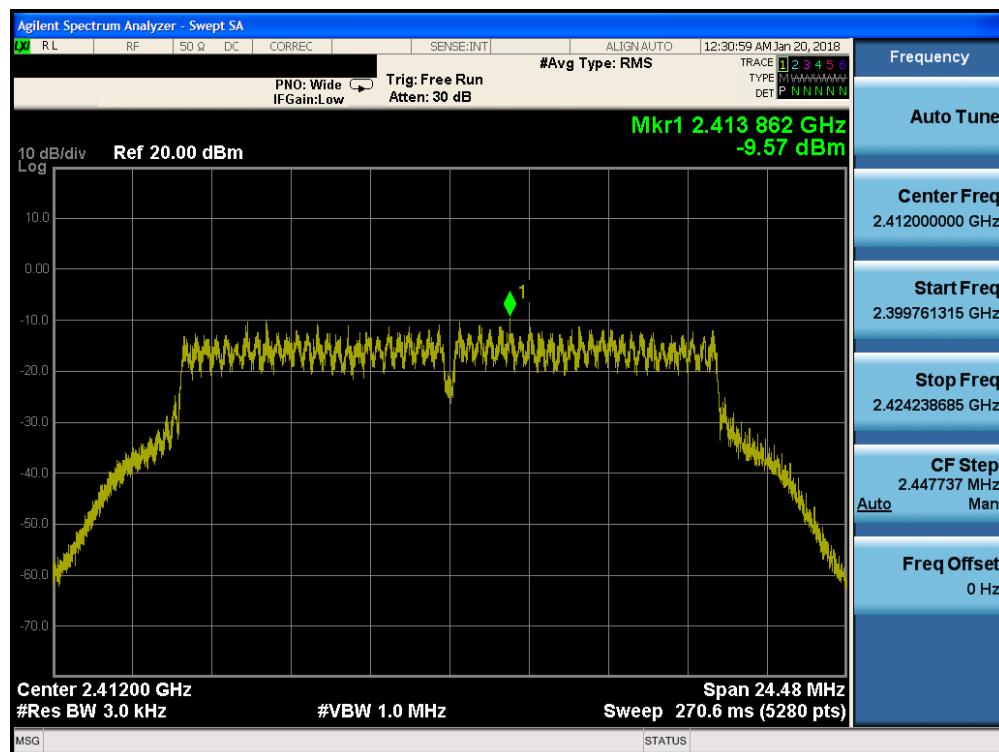


Plot 7-38. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 41 of 173

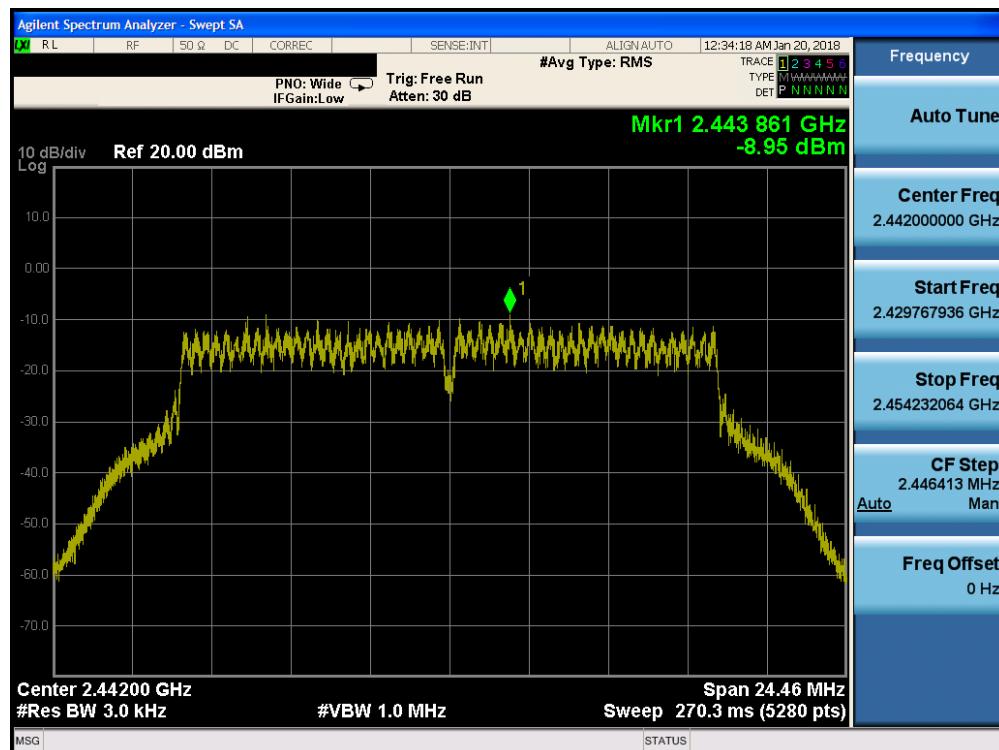


Plot 7-39. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 7)

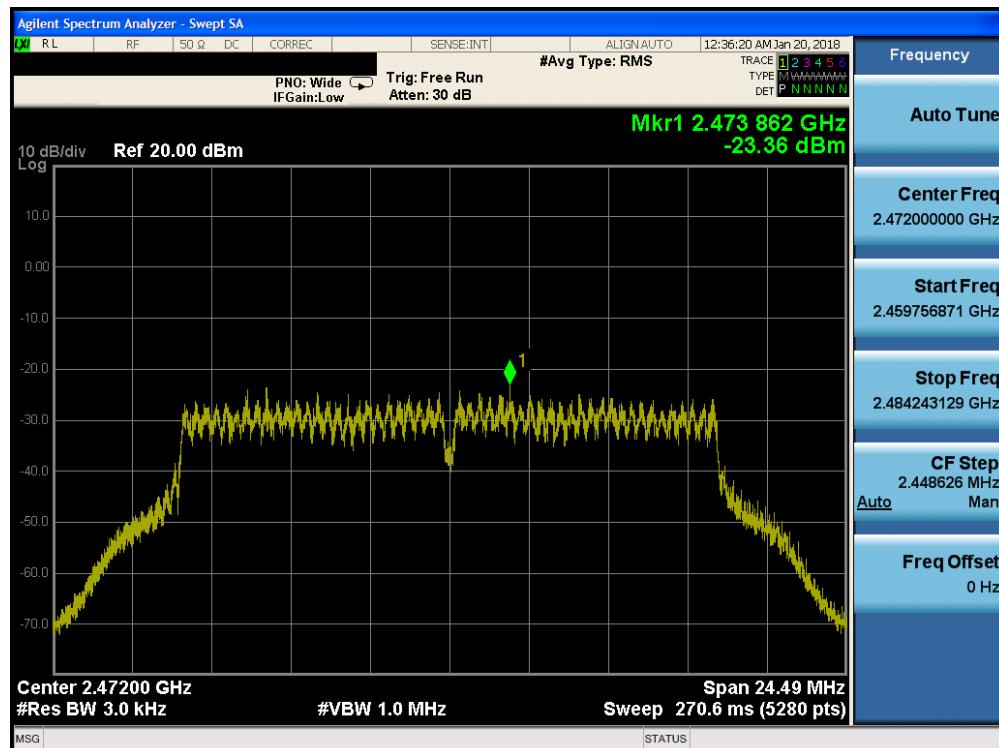


Plot 7-40. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 42 of 173

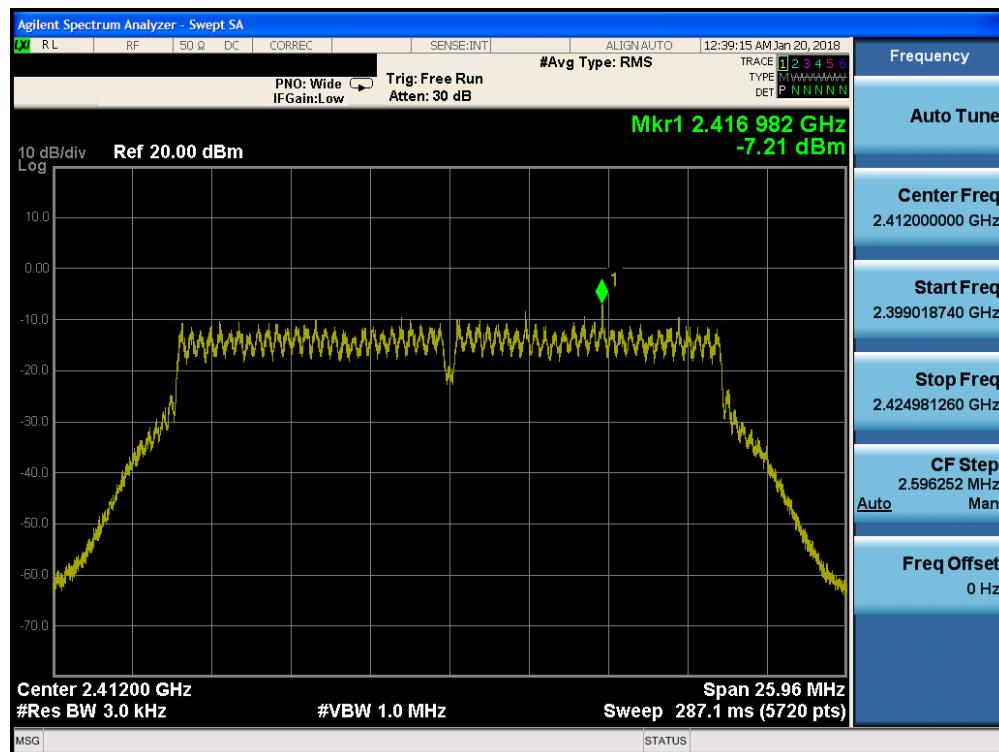


Plot 7-41. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

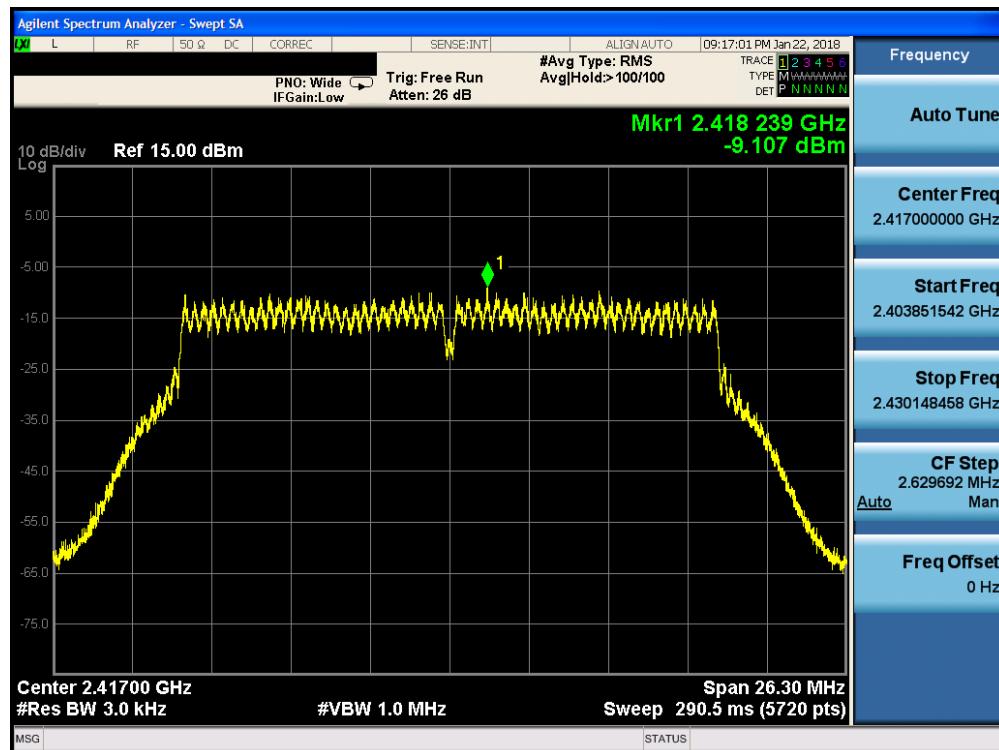


Plot 7-42. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 2)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 43 of 173

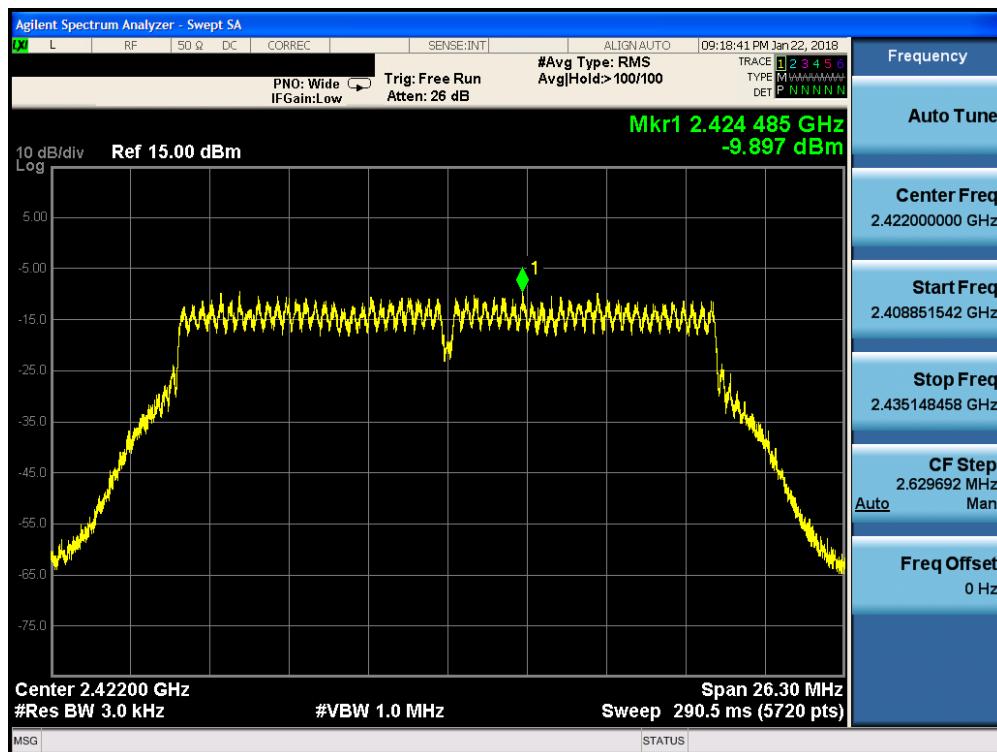


Plot 7-43. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 3)

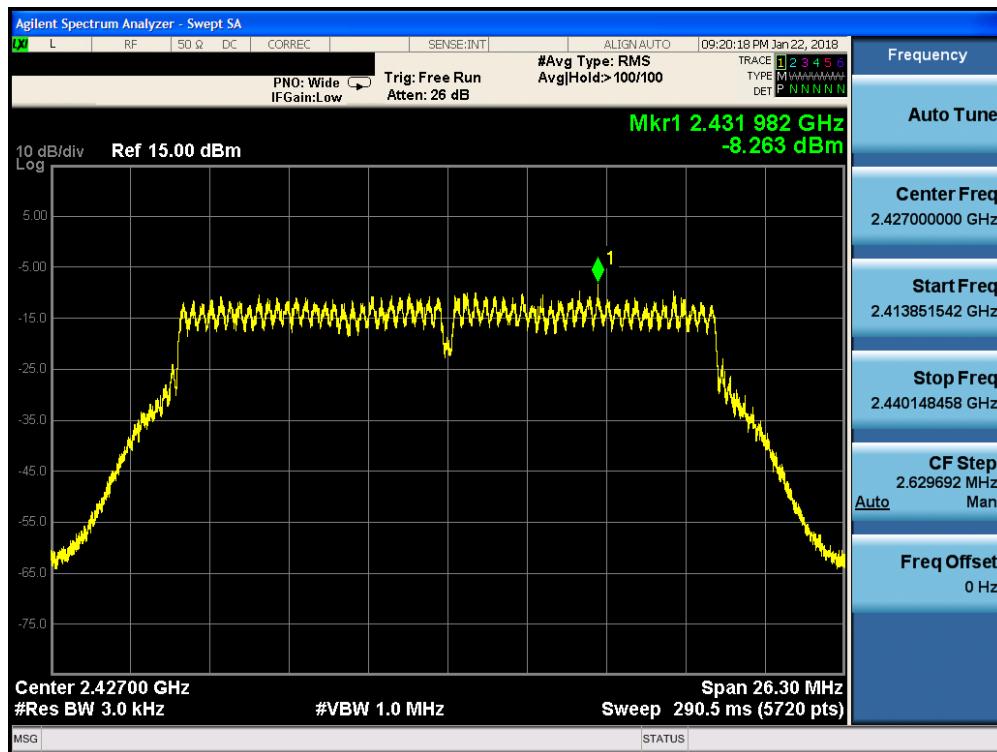


Plot 7-44. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 4)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 44 of 173

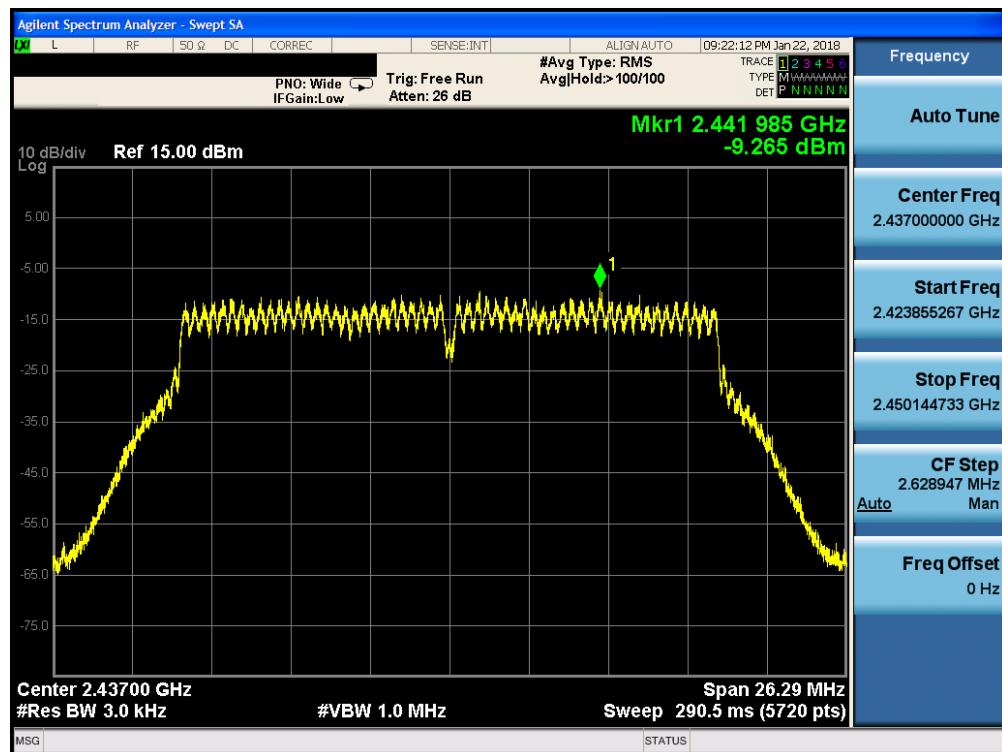


Plot 7-45. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 6)

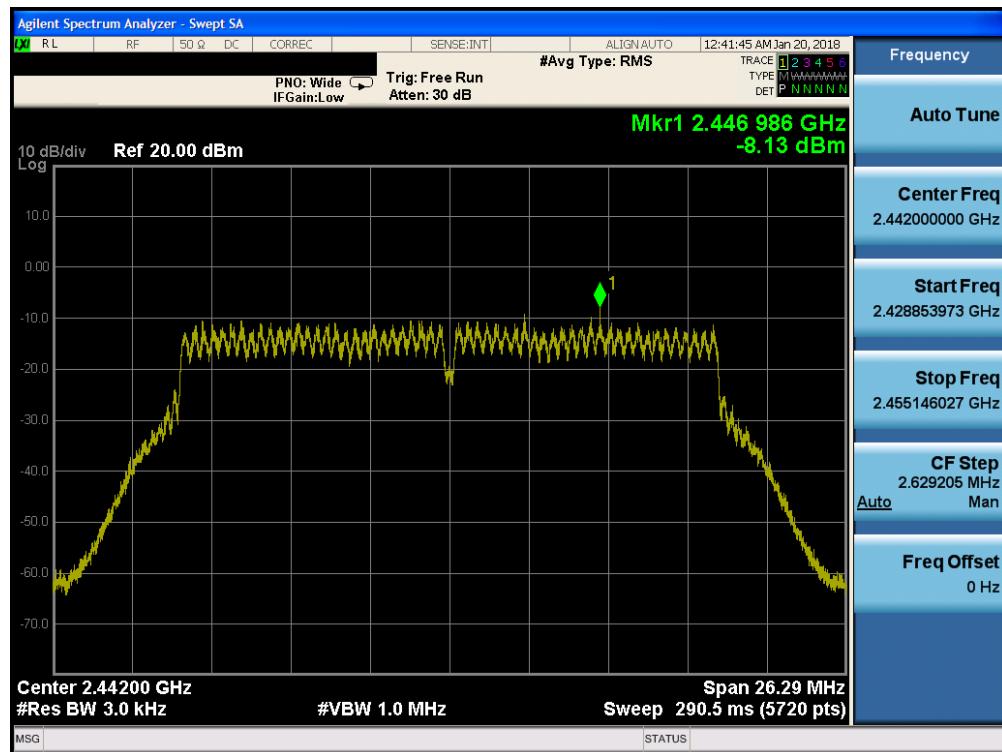


Plot 7-46. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 7)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 45 of 173

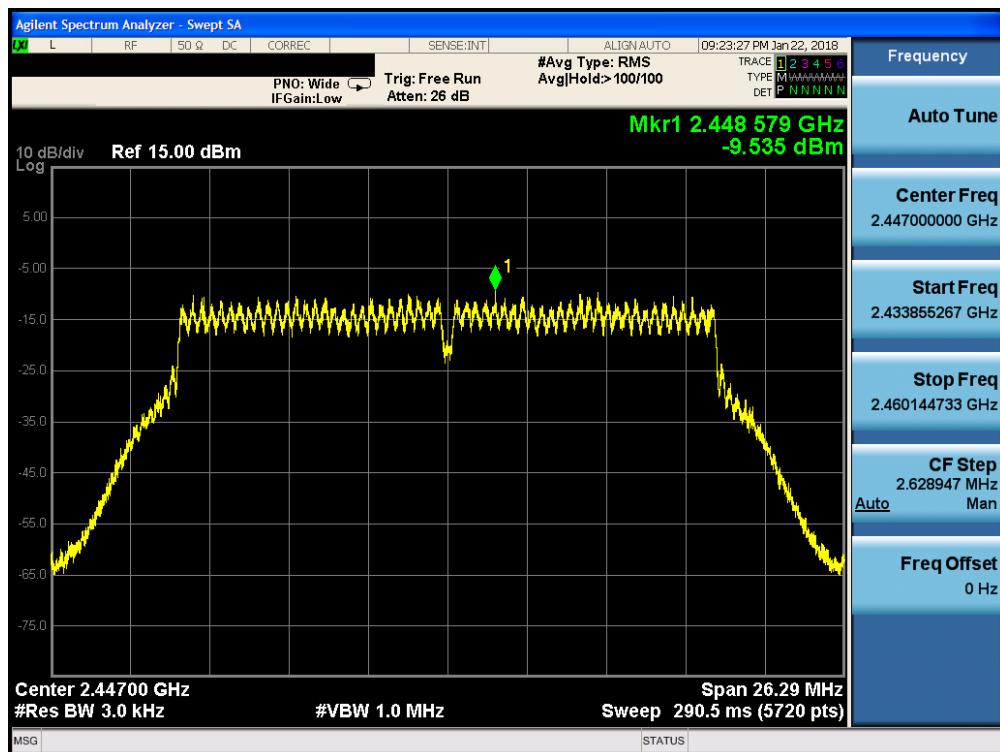


Plot 7-47. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 8)

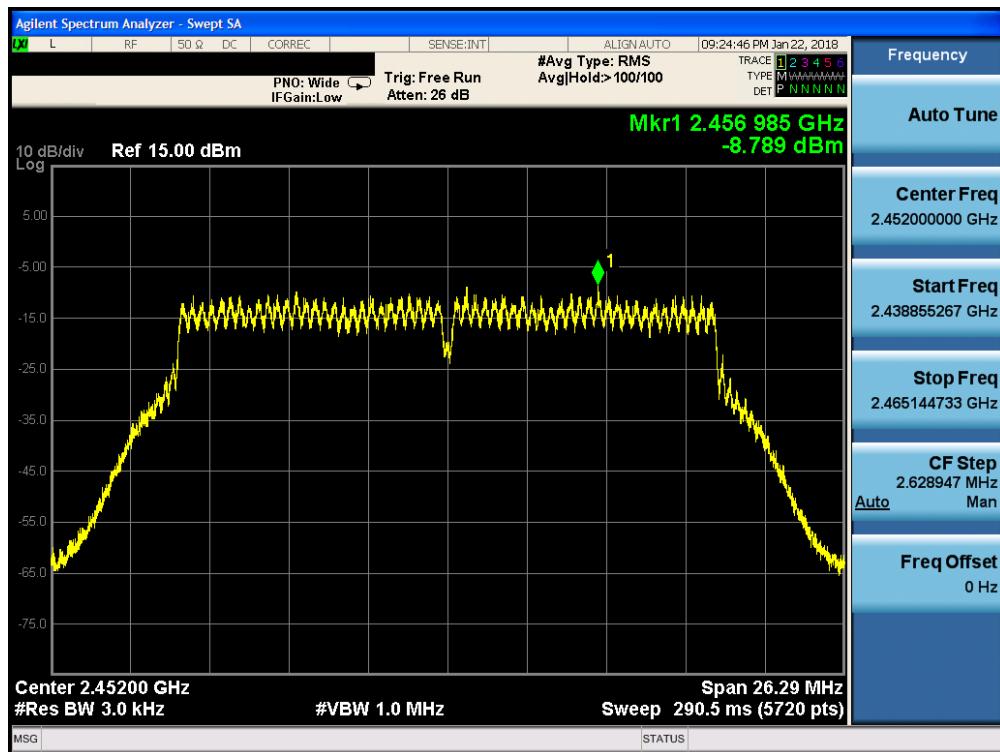


Plot 7-48. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 9)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 46 of 173

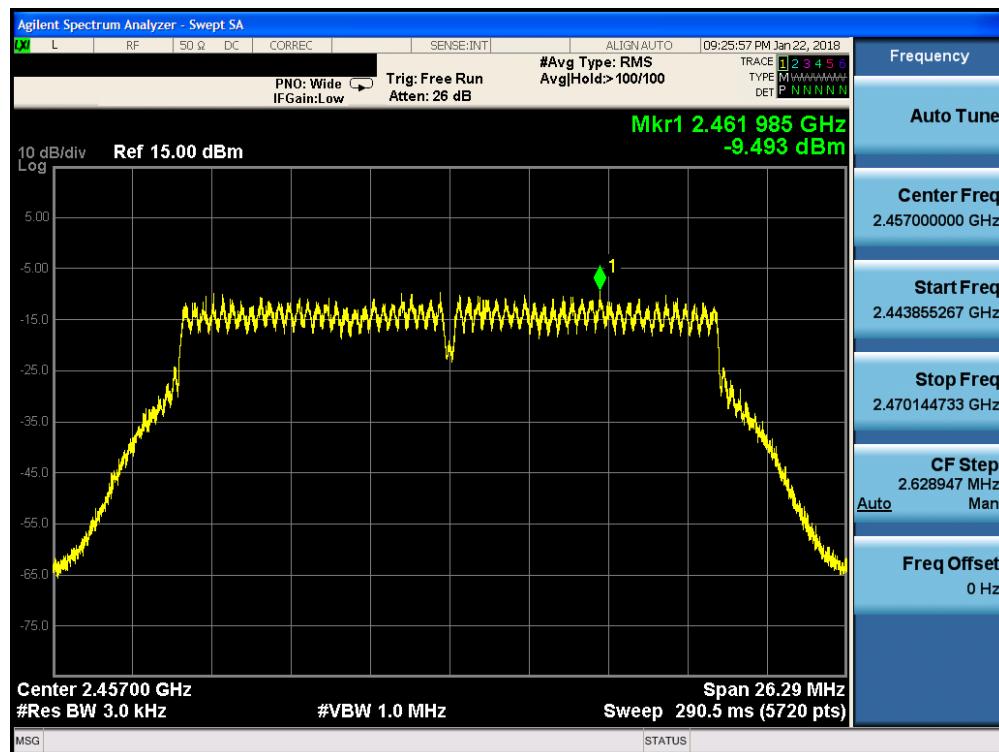


Plot 7-49. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 10)

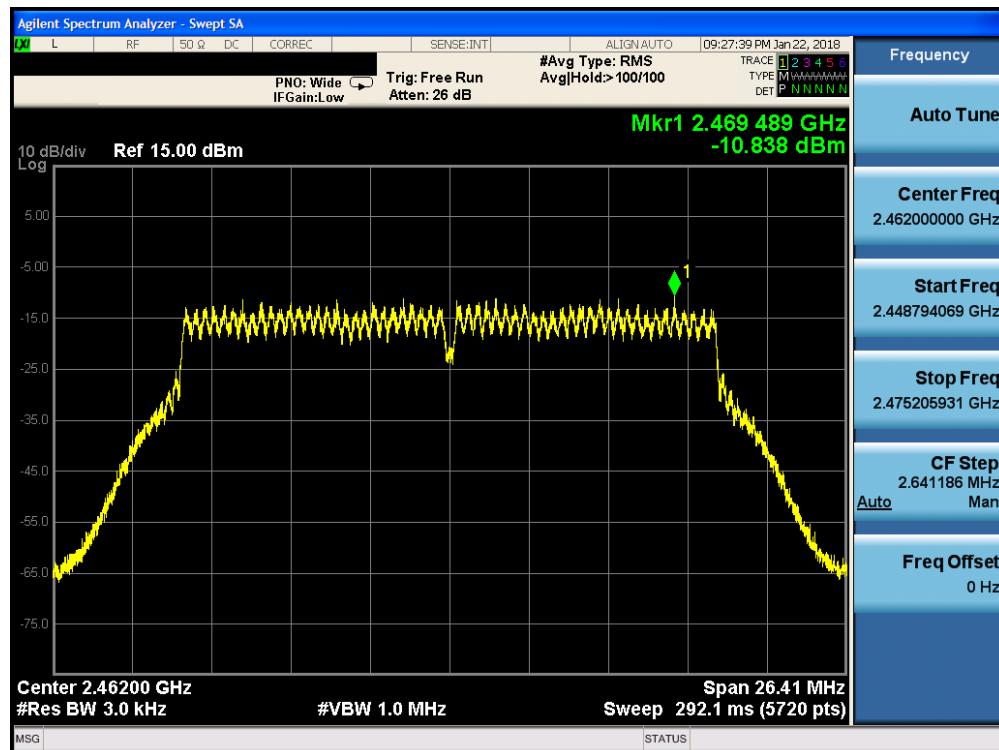


Plot 7-50. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 47 of 173

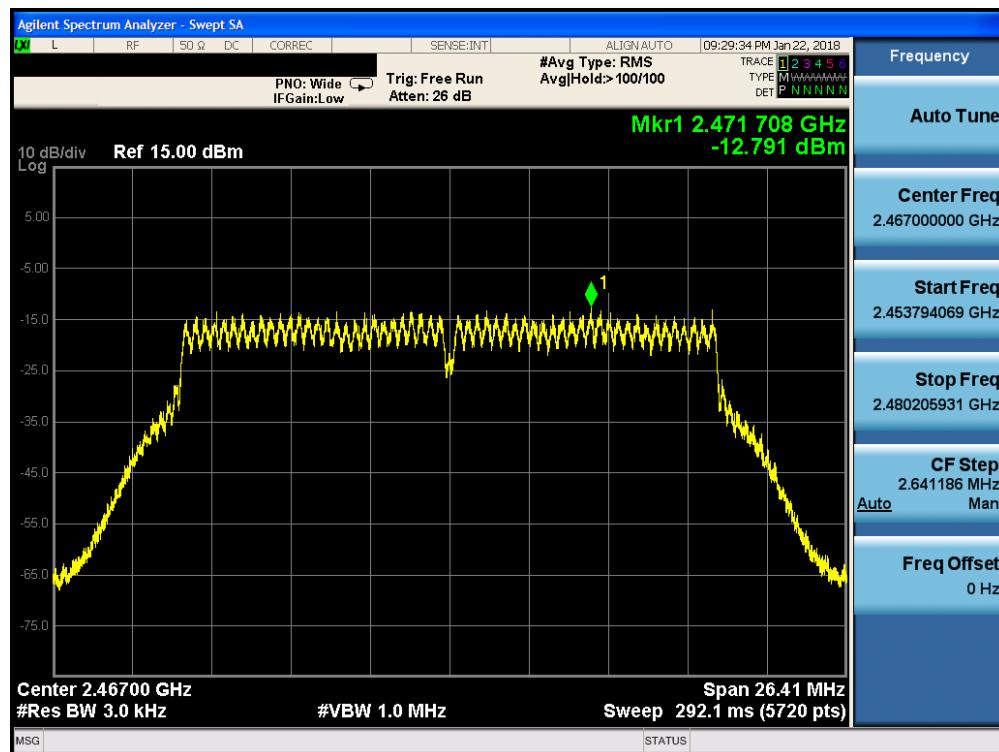

Plot 7-51. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 12)

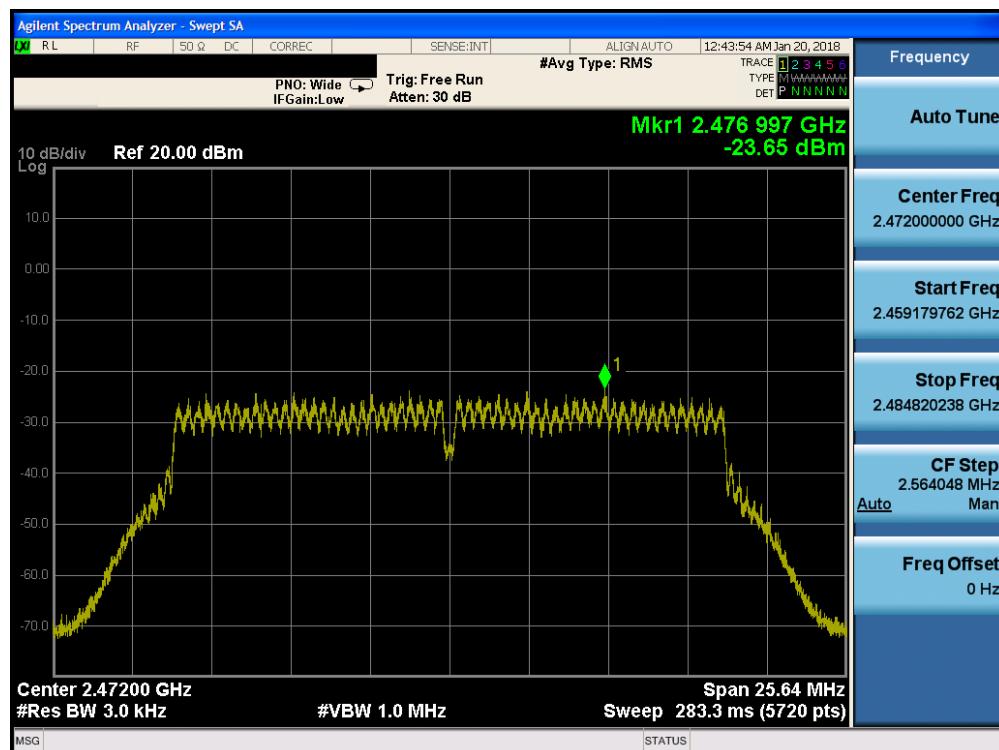

Plot 7-52. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 48 of 173

## Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-7.34	8.00	-15.34	Pass
2442	7	b	1	-7.45	8.00	-15.45	Pass
2457	10	b	1	-5.57	8.00	-13.57	Pass
2462	11	b	1	-6.84	8.00	-14.84	Pass
2467	12	b	1	-6.81	8.00	-14.81	Pass
2472	13	b	1	-8.11	8.00	-16.11	Pass
2412	1	g	6	-9.59	8.00	-17.59	Pass
2442	7	g	6	-9.31	8.00	-17.31	Pass
2472	13	g	6	-23.44	8.00	-31.44	Pass
2412	1	n	6.5/7.2 (MCS0)	-10.27	8.00	-18.27	Pass
2417	2	n	6.5/7.2 (MCS0)	-9.52	8.00	-17.52	Pass
2422	3	n	6.5/7.2 (MCS0)	-8.05	8.00	-16.05	Pass
2427	4	n	6.5/7.2 (MCS0)	-8.14	8.00	-16.14	Pass
2432	5	n	6.5/7.2 (MCS0)	-7.69	8.00	-15.69	Pass
2442	7	n	6.5/7.2 (MCS0)	-9.10	8.00	-17.10	Pass
2447	8	n	6.5/7.2 (MCS0)	-8.90	8.00	-16.90	Pass
2452	9	n	6.5/7.2 (MCS0)	-8.59	8.00	-16.59	Pass
2457	10	n	6.5/7.2 (MCS0)	-8.79	8.00	-16.79	Pass
2462	11	n	6.5/7.2 (MCS0)	-11.44	8.00	-19.44	Pass
2467	12	n	6.5/7.2 (MCS0)	-12.57	8.00	-20.57	Pass
2472	13	n	6.5/7.2 (MCS0)	-23.11	8.00	-31.11	Pass

Table 7-14. Conducted Power Density Measurements

FCC ID: BCGA1893	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 49 of 173



Plot 7-53. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

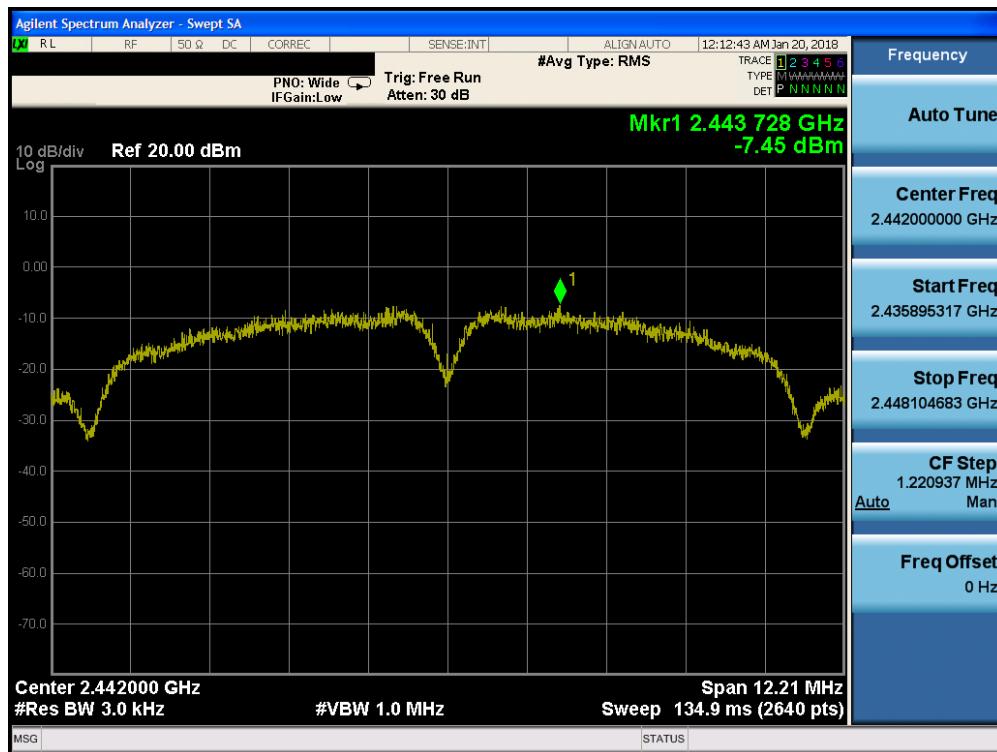

Plot 7-54. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 7)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 50 of 173



Plot 7-55. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 10)



Plot 7-56. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 51 of 173




Plot 7-57. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 12)




Plot 7-58. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 52 of 173

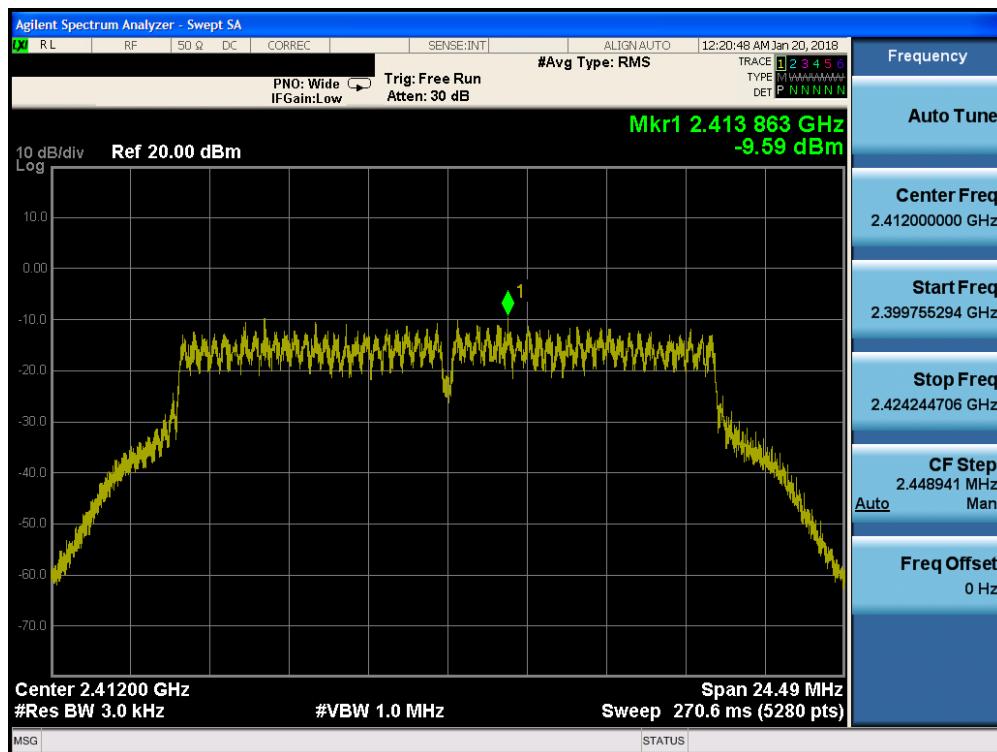


Plot 7-59. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 1)

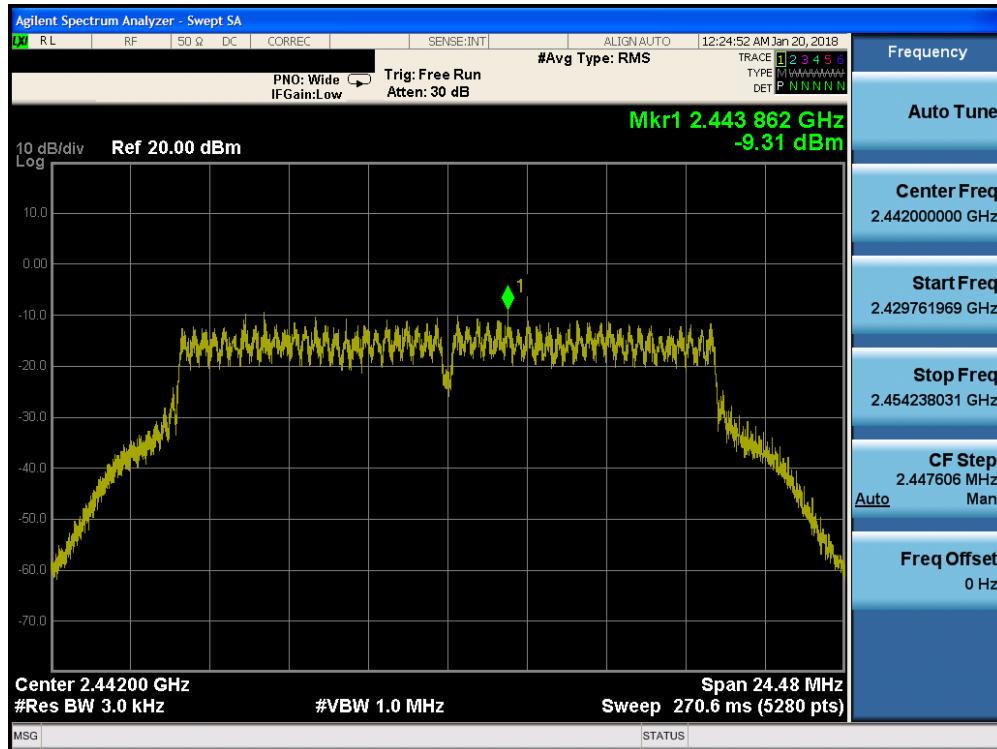


Plot 7-60. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 7)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 53 of 173

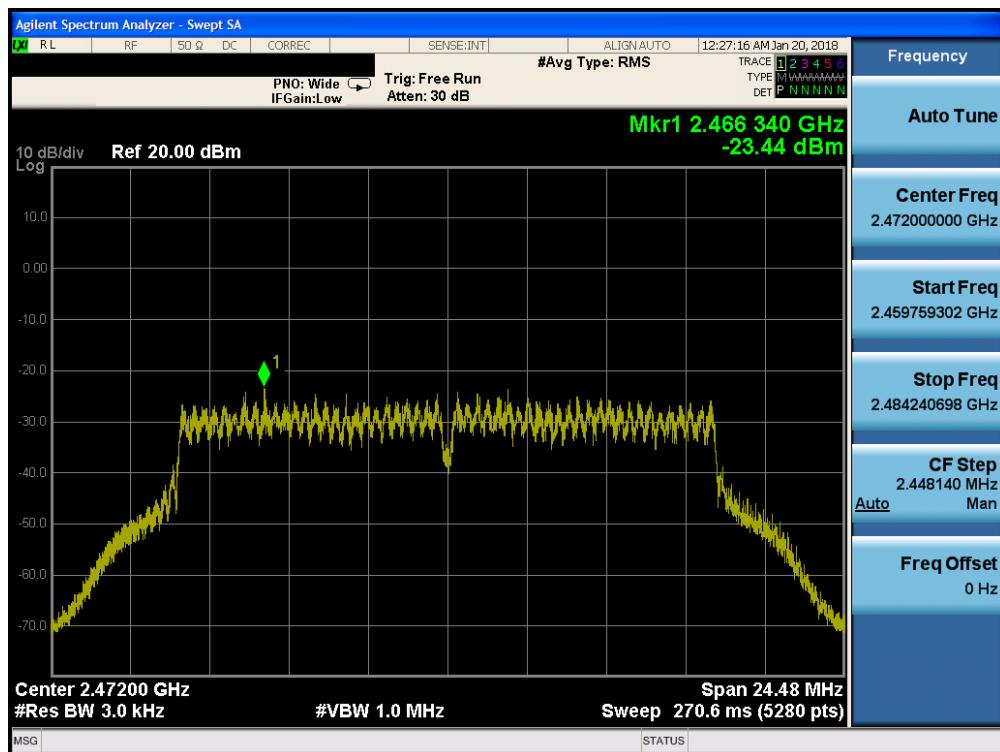


Plot 7-61. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 13)

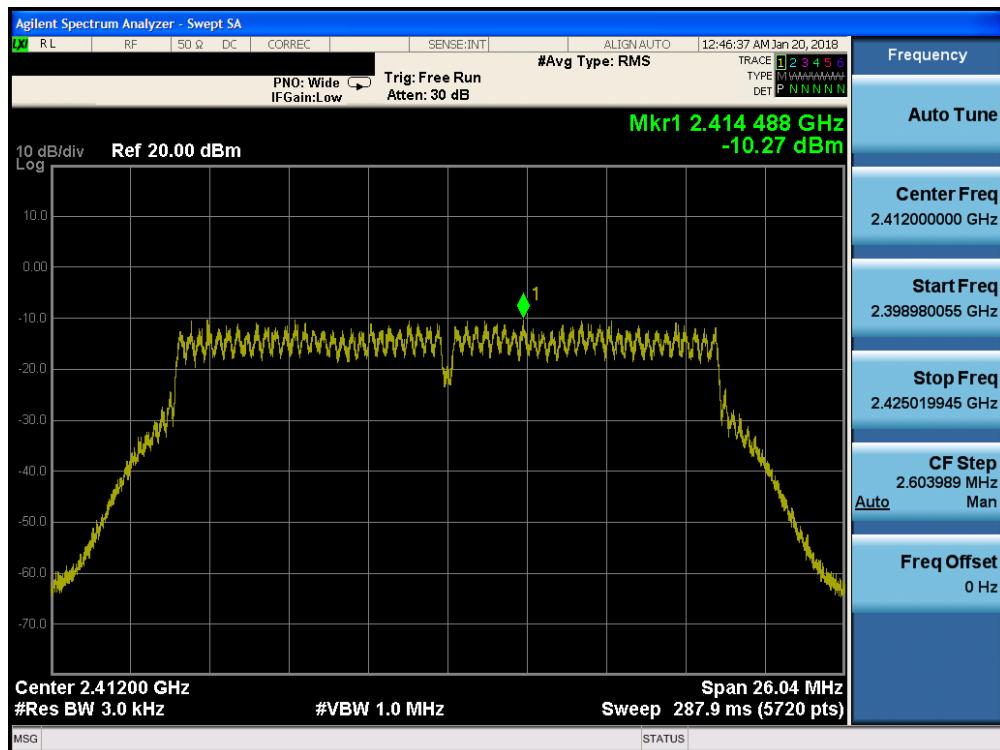


Plot 7-62. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 54 of 173

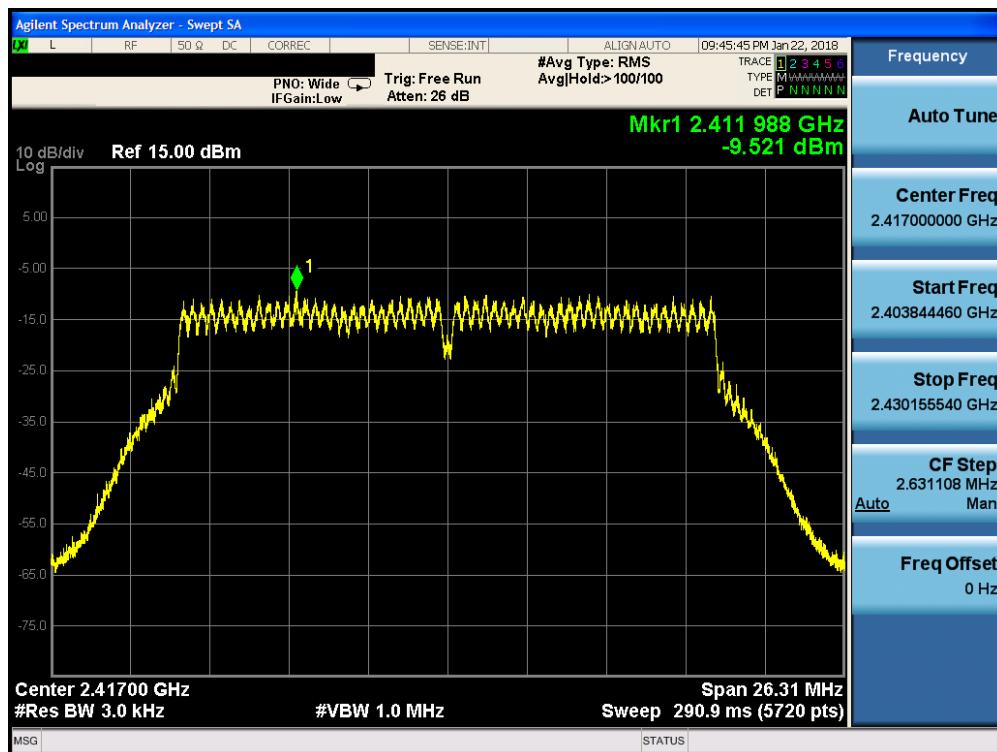


Plot 7-63. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 2)

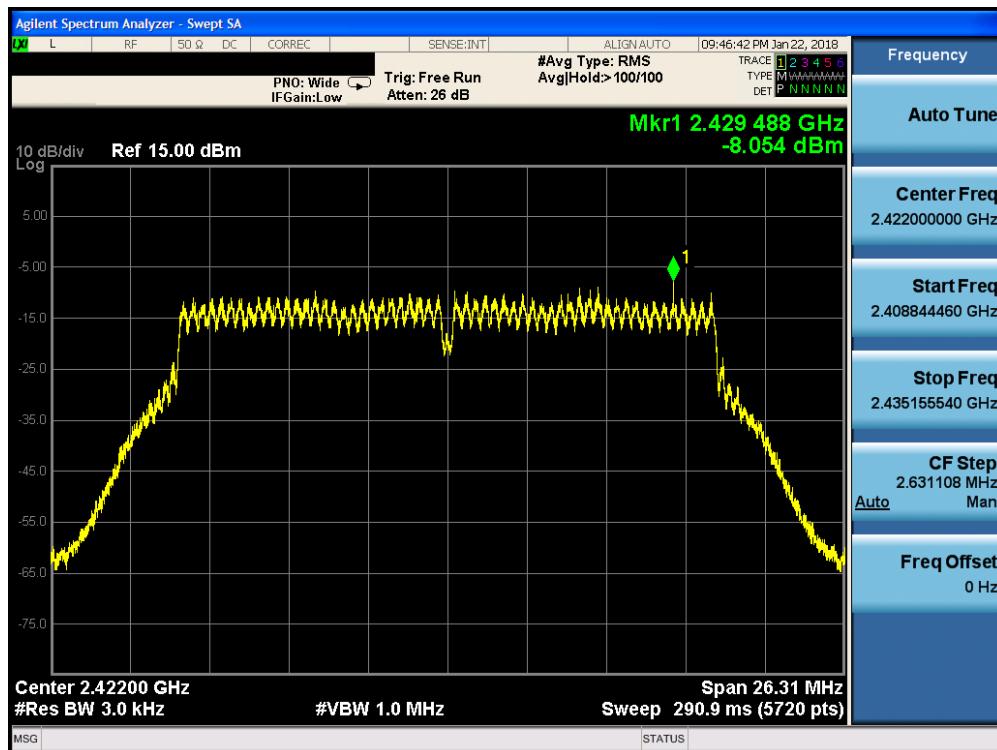


Plot 7-64. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 3)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 55 of 173

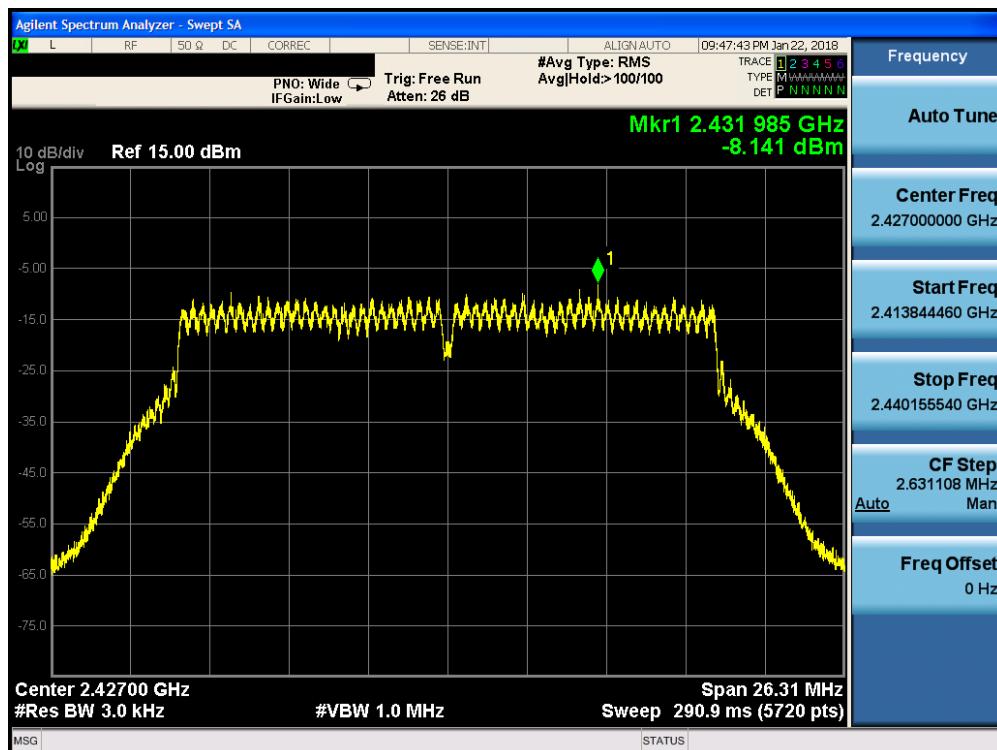


Plot 7-65. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 4)

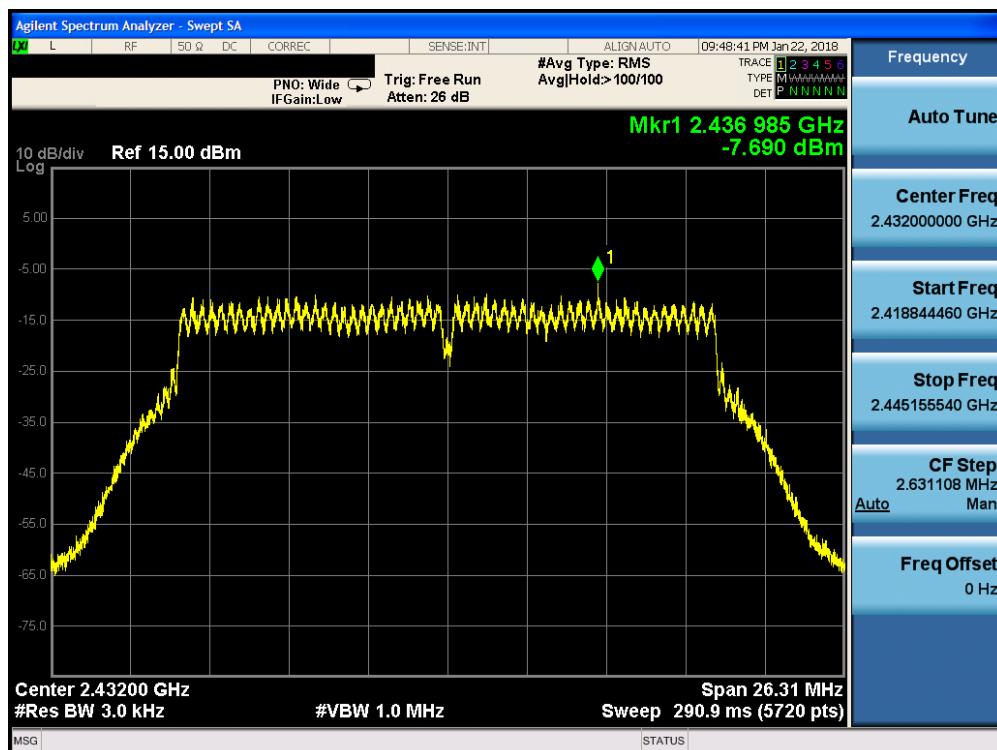


Plot 7-66. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 5)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 56 of 173

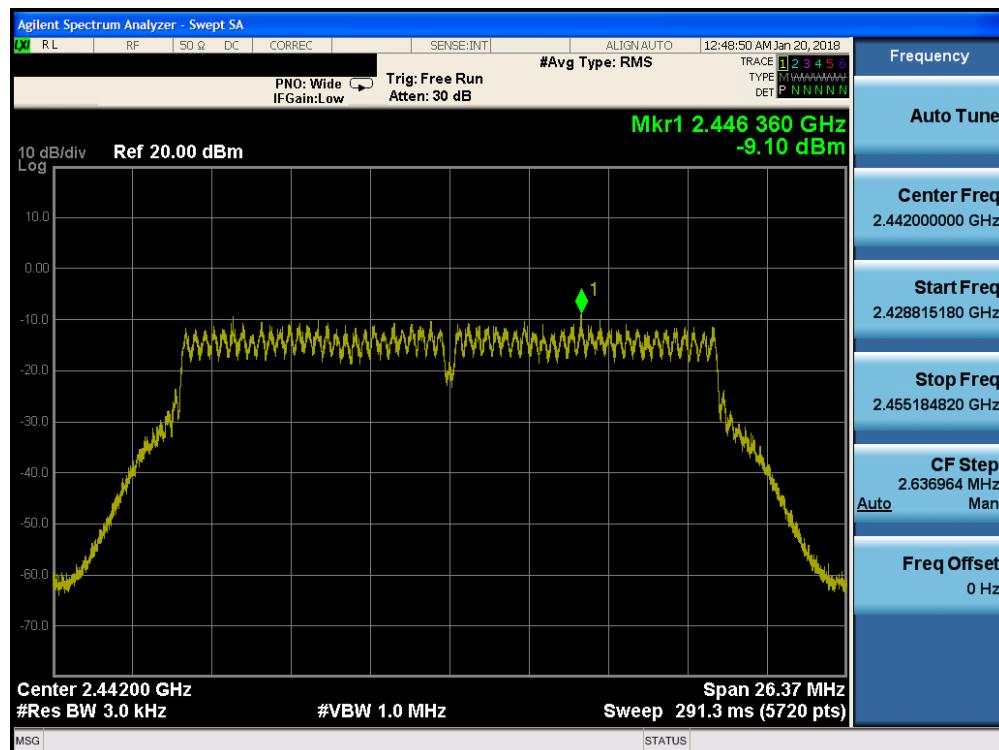


Plot 7-67. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 7)

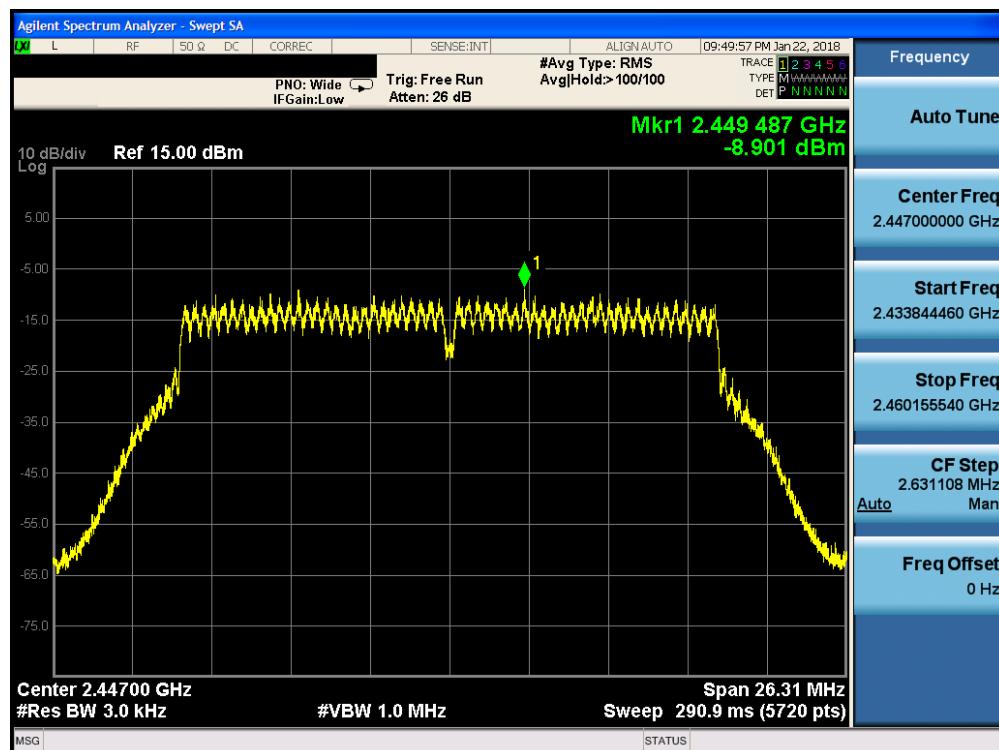


Plot 7-68. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 8)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 57 of 173

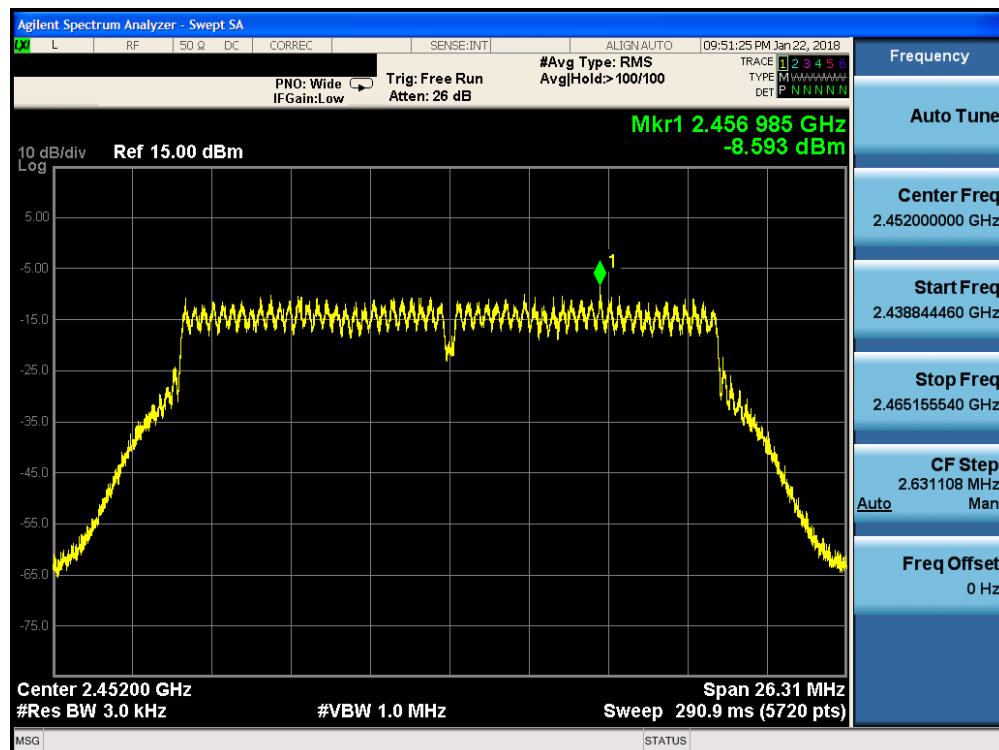


Plot 7-69. Power Spectral Density Plot SISO ANT2 (802.11n) (2.4GHz) – Ch. 9

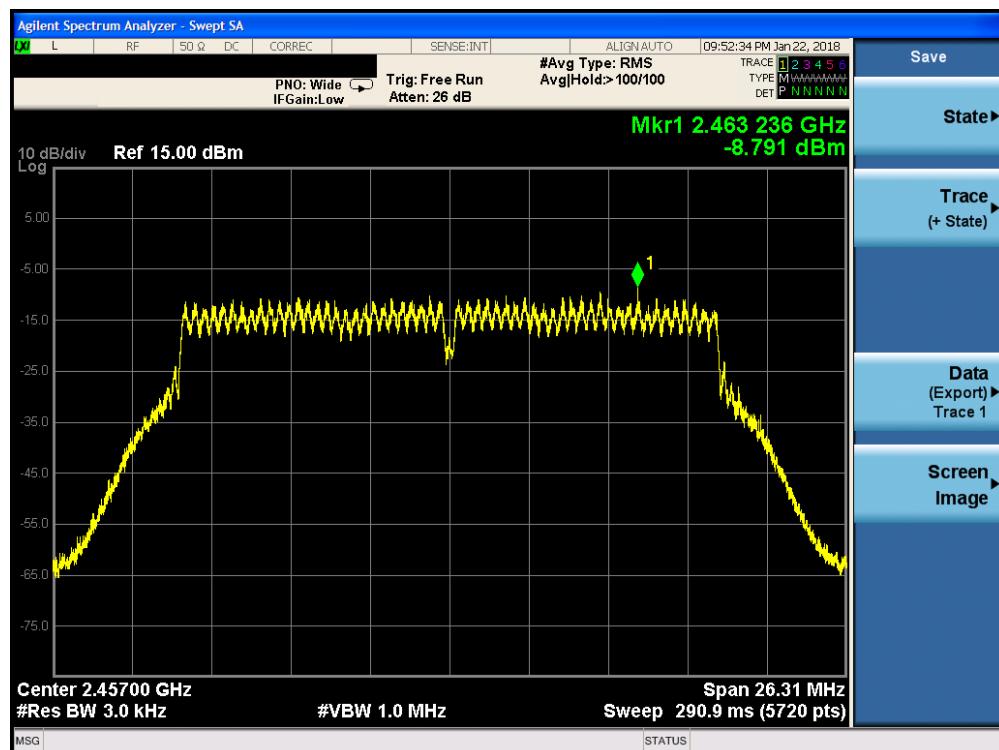


Plot 7-70. Power Spectral Density Plot SISO ANT2 (802.11n) (2.4GHz) – Ch. 10

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 58 of 173

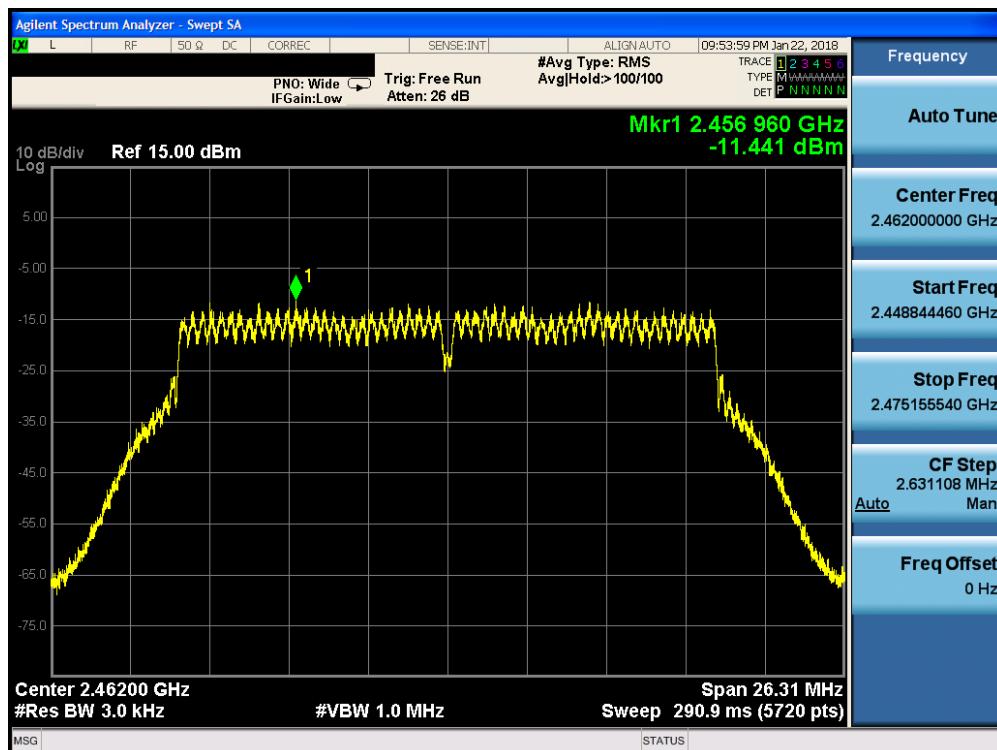


Plot 7-71. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

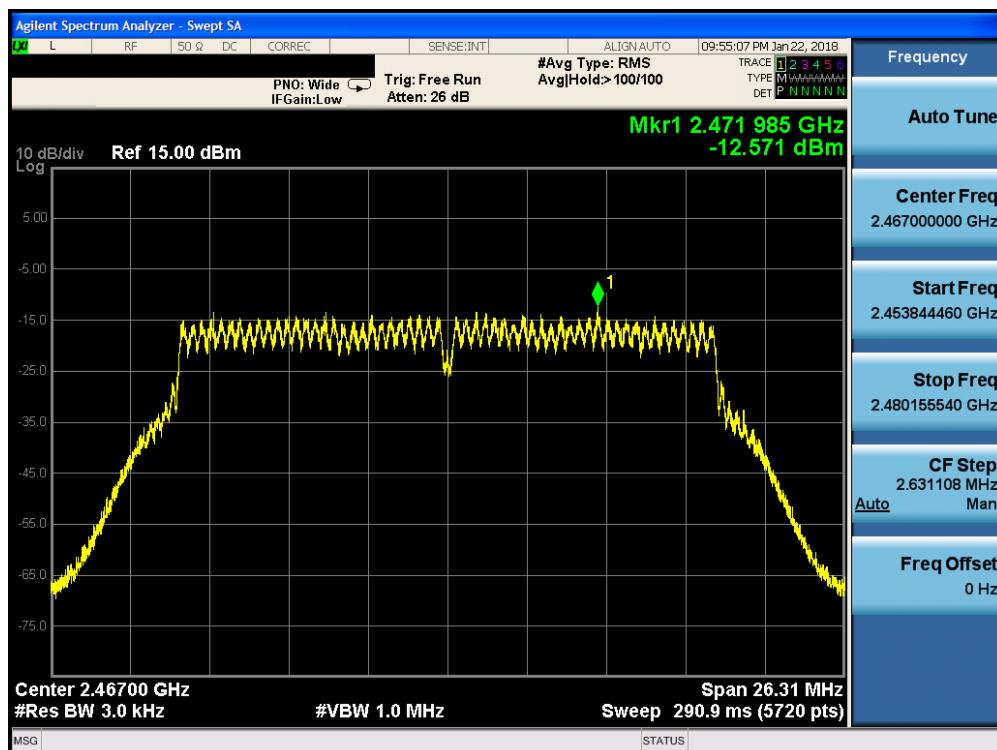

Plot 7-72. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 12)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 59 of 173

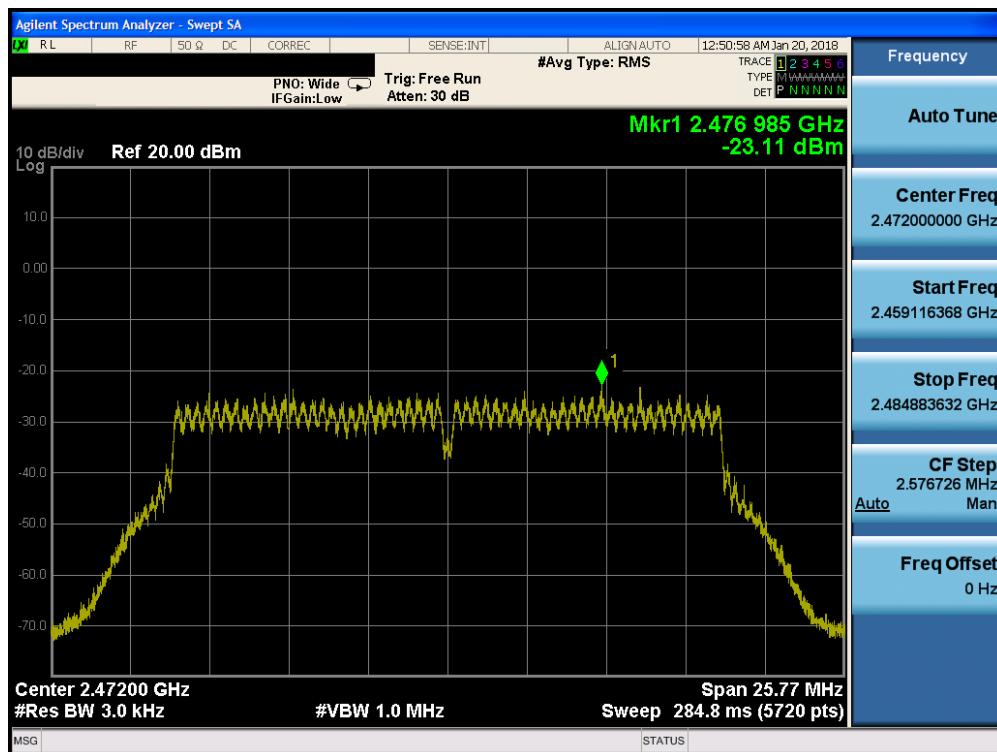

Plot 7-73. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 60 of 173

## MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	6.5/7.2 (MCS0)	-11.94	-12.00	-8.96	8.00	-16.96	Pass
2442	7	g	6.5/7.2 (MCS0)	-9.52	-9.45	-6.47	8.00	-14.47	Pass
2472	13	g	6.5/7.2 (MCS0)	-25.51	-25.64	-22.56	8.00	-30.56	Pass
2412	1	n	6.5/7.2 (MCS0)	-12.07	-11.17	-8.59	8.00	-16.59	Pass
2417	2	n	6.5/7.2 (MCS0)	-10.18	-9.14	-6.61	8.00	-14.61	Pass
2442	7	n	6.5/7.2 (MCS0)	-10.26	-7.15	-5.42	8.00	-13.42	Pass
2457	10	n	6.5/7.2 (MCS0)	-9.96	-8.28	-6.03	8.00	-14.03	Pass
2462	11	n	6.5/7.2 (MCS0)	-12.15	-12.89	-9.49	8.00	-17.49	Pass
2467	12	n	6.5/7.2 (MCS0)	-14.38	-15.56	-11.92	8.00	-19.92	Pass
2472	13	n	6.5/7.2 (MCS0)	-24.32	-25.50	-21.86	8.00	-29.86	Pass

**Table 7-15. MIMO Conducted Power Density Measurements**

**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.


**Sample MIMO Calculation:**

At 2412MHz the average conducted power spectral density was measured to be -12.07 dBm for Antenna-1 and -11.17 dBm for Antenna-2.


$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-12.07 \text{ dBm} + -11.17 \text{ dBm}) = (0.06 \text{ mW} + 0.08 \text{ mW}) = 0.14 \text{ mW} = -8.59 \text{ dBm}$$

FCC ID: BCGA1893	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device			Page 61 of 173

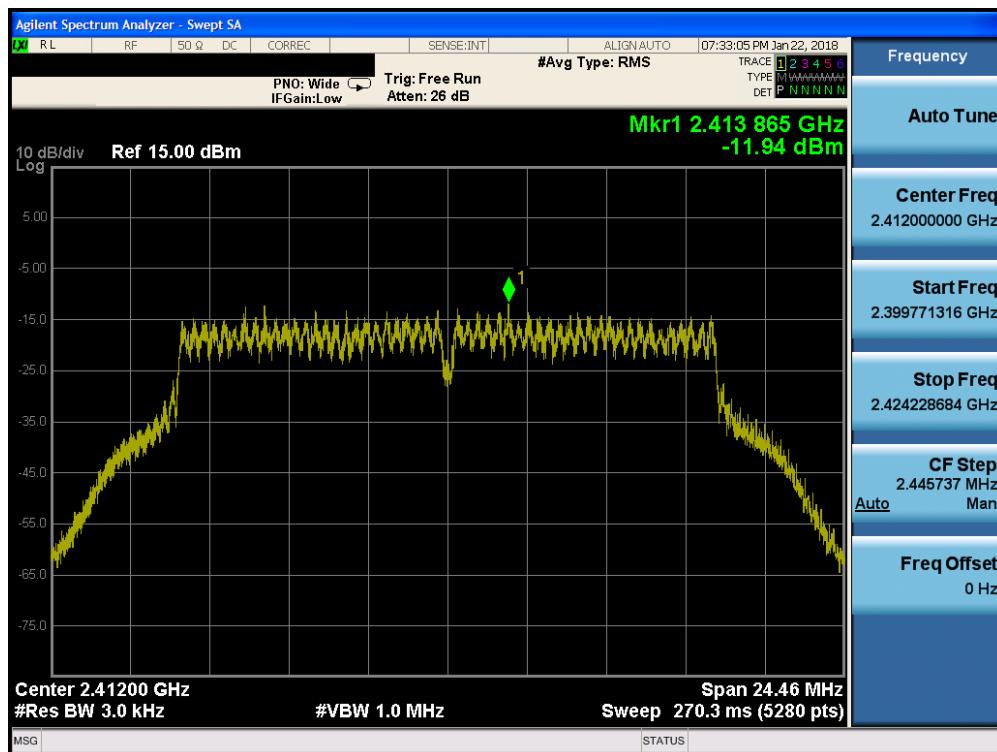


Plot 7-74. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 1)

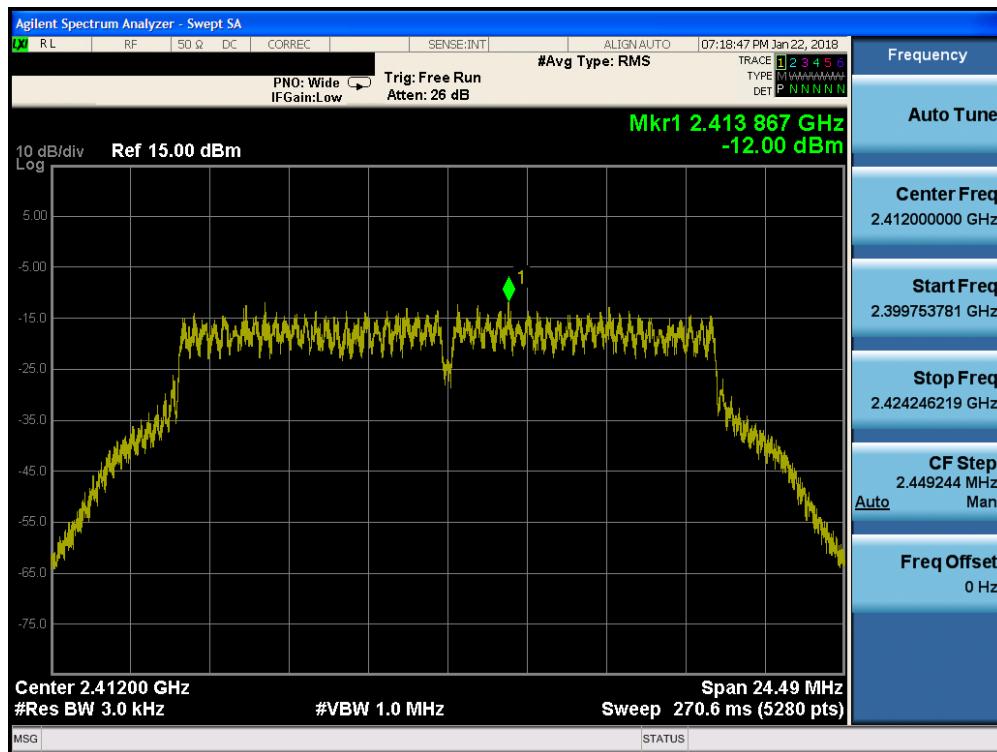


Plot 7-75. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 1)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 62 of 173

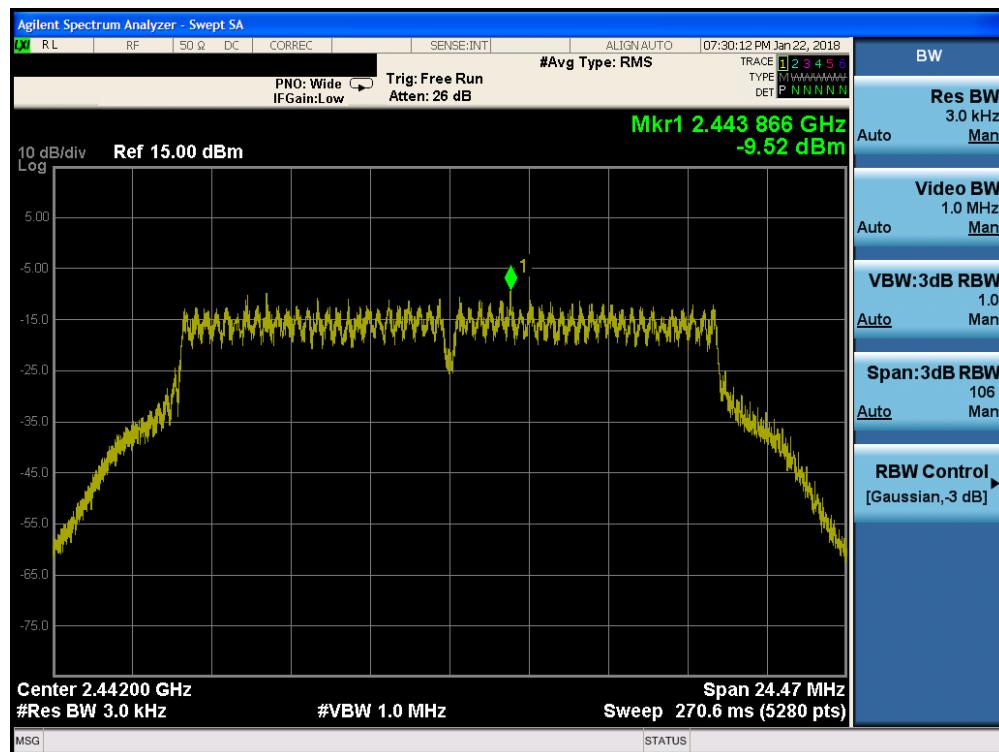


Plot 7-76. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 7)

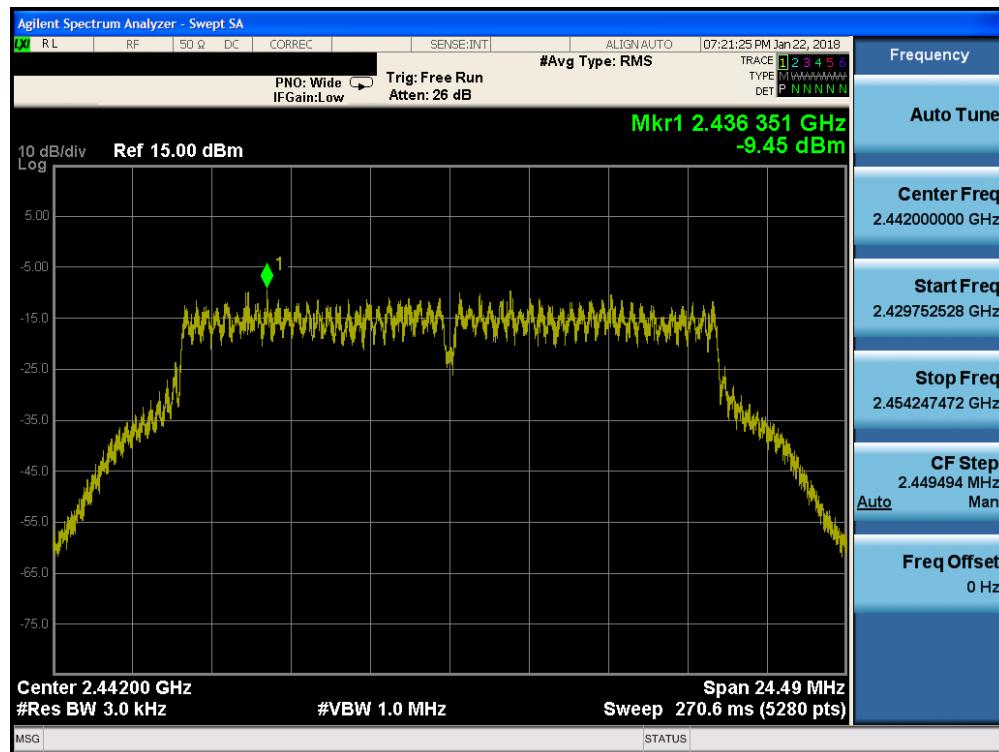


Plot 7-77. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 7)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 63 of 173

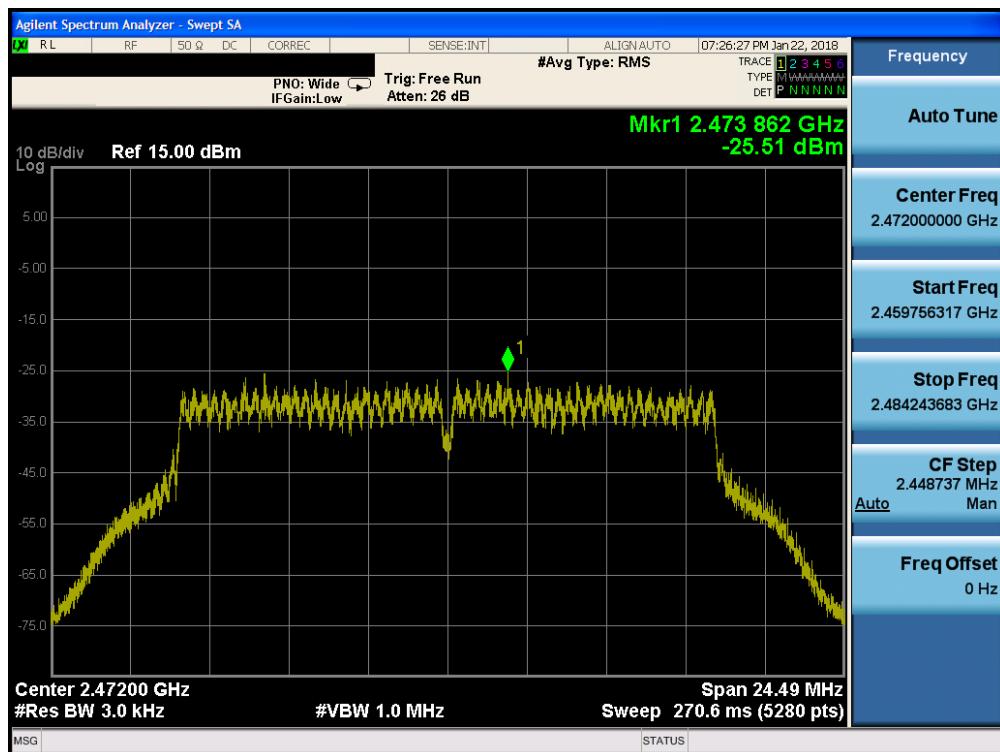


Plot 7-78. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 13)

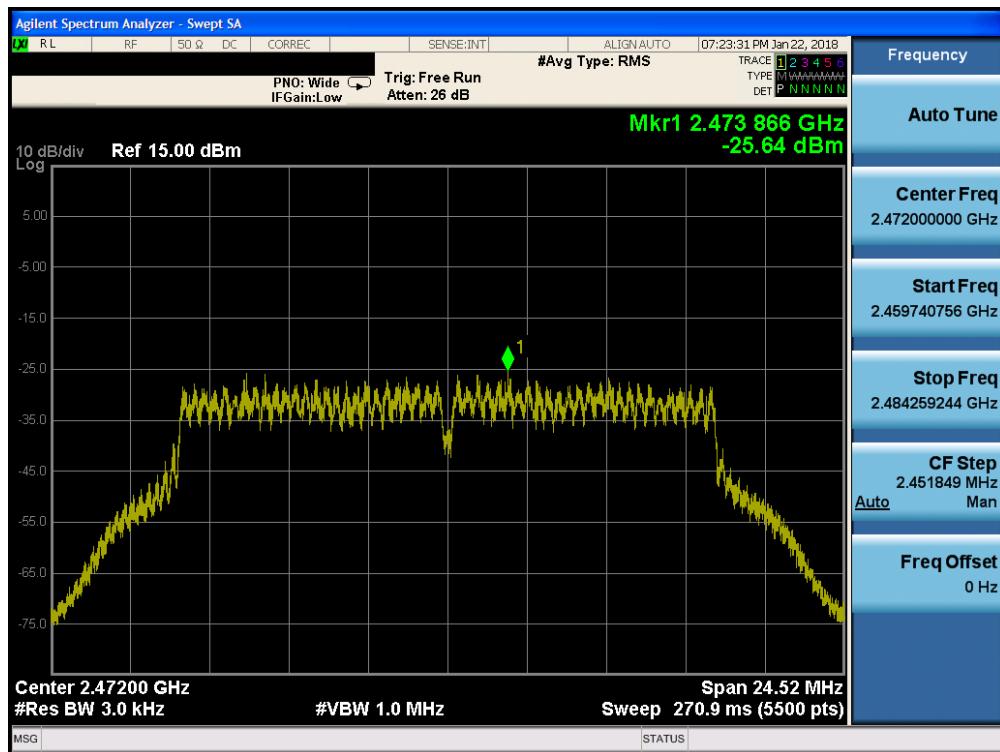


Plot 7-79. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 64 of 173

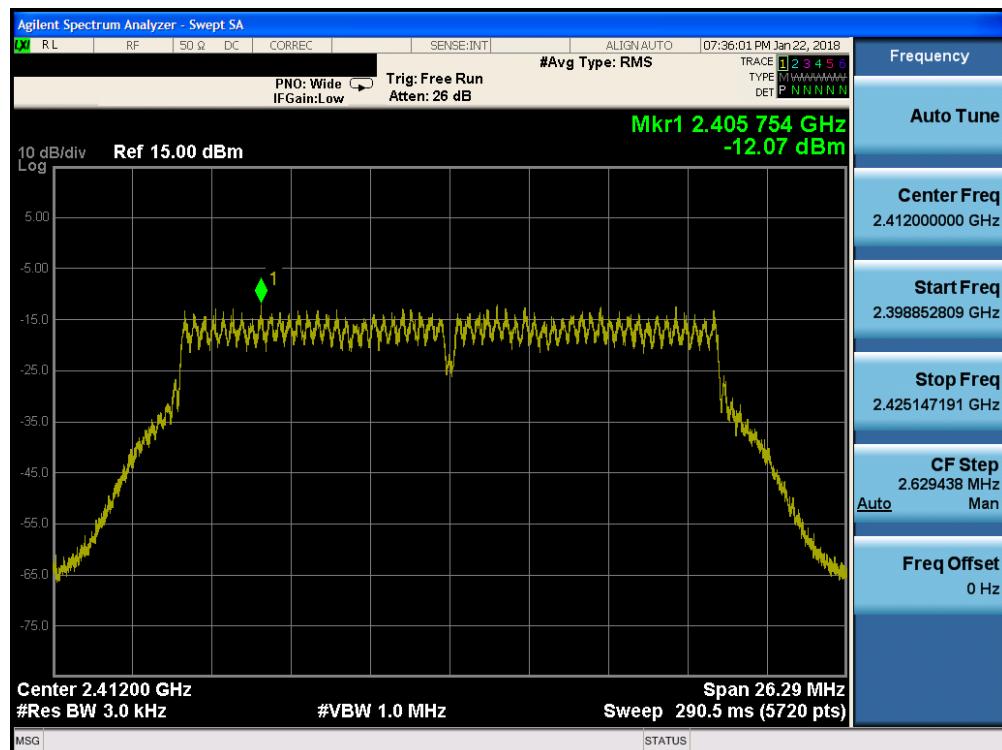


Plot 7-80. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

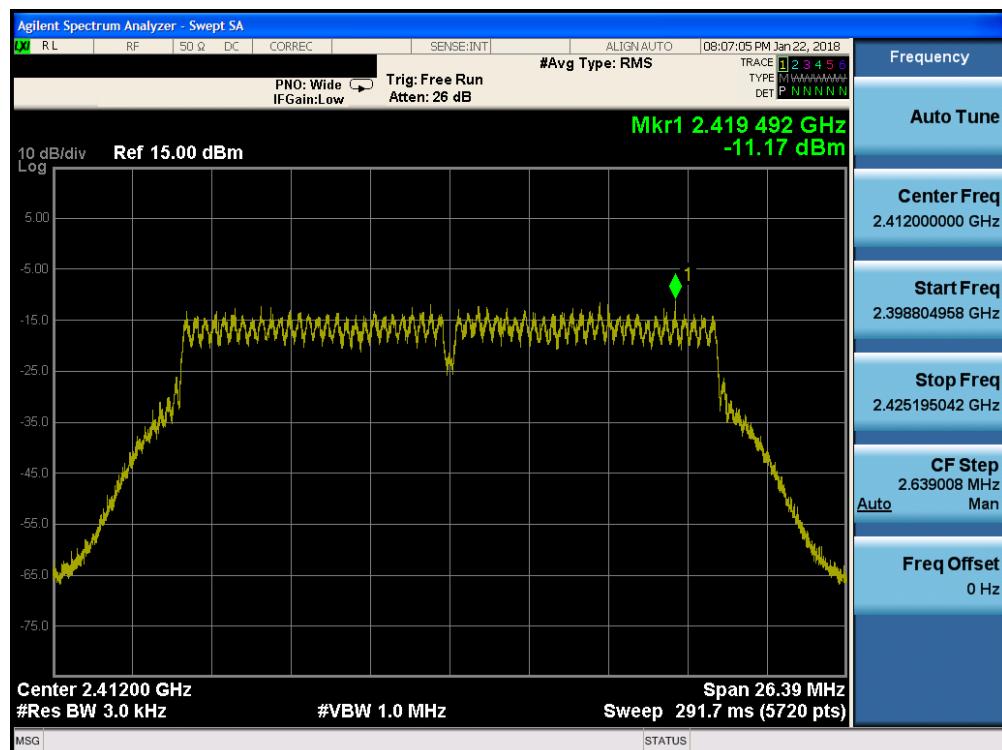


Plot 7-81. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 65 of 173

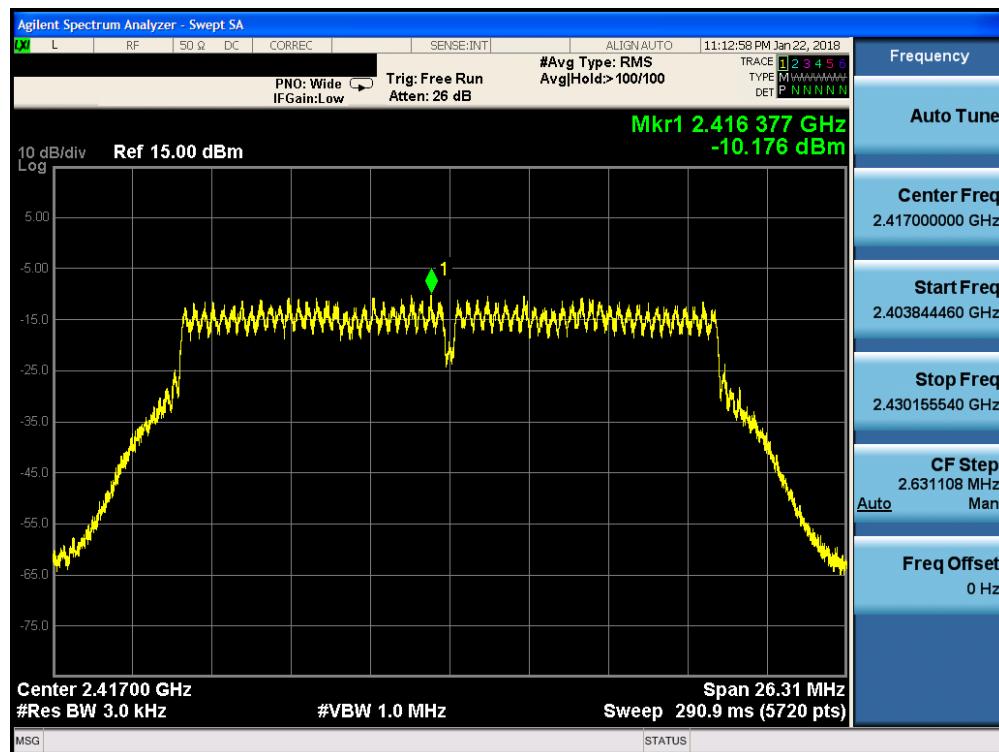


Plot 7-82. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 2)

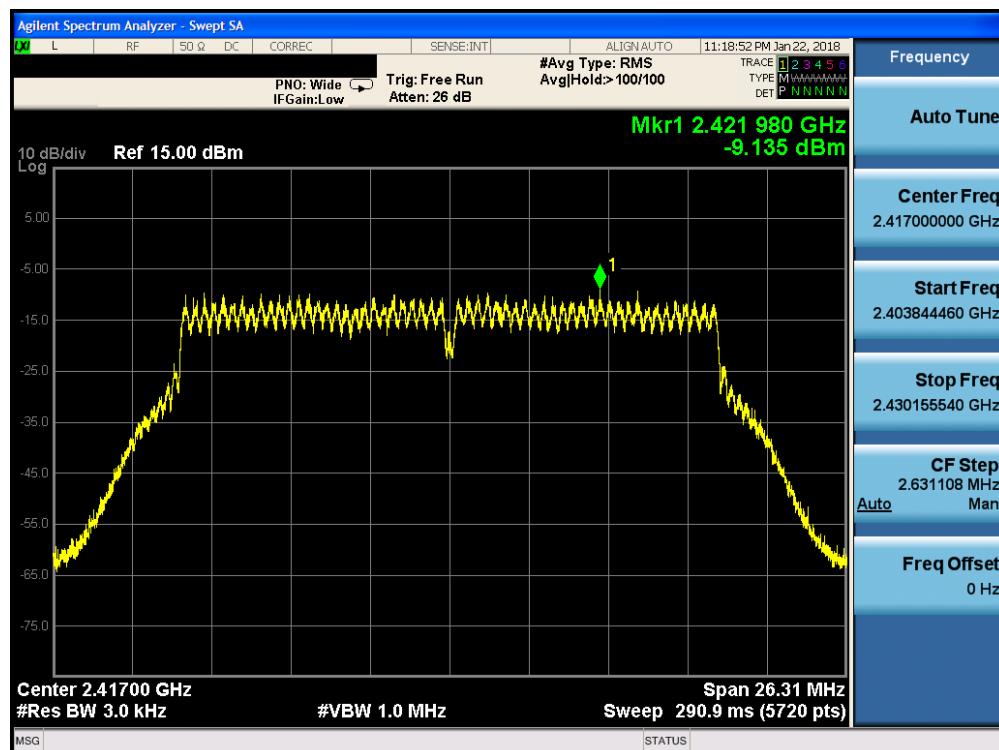


Plot 7-83. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 2)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 66 of 173

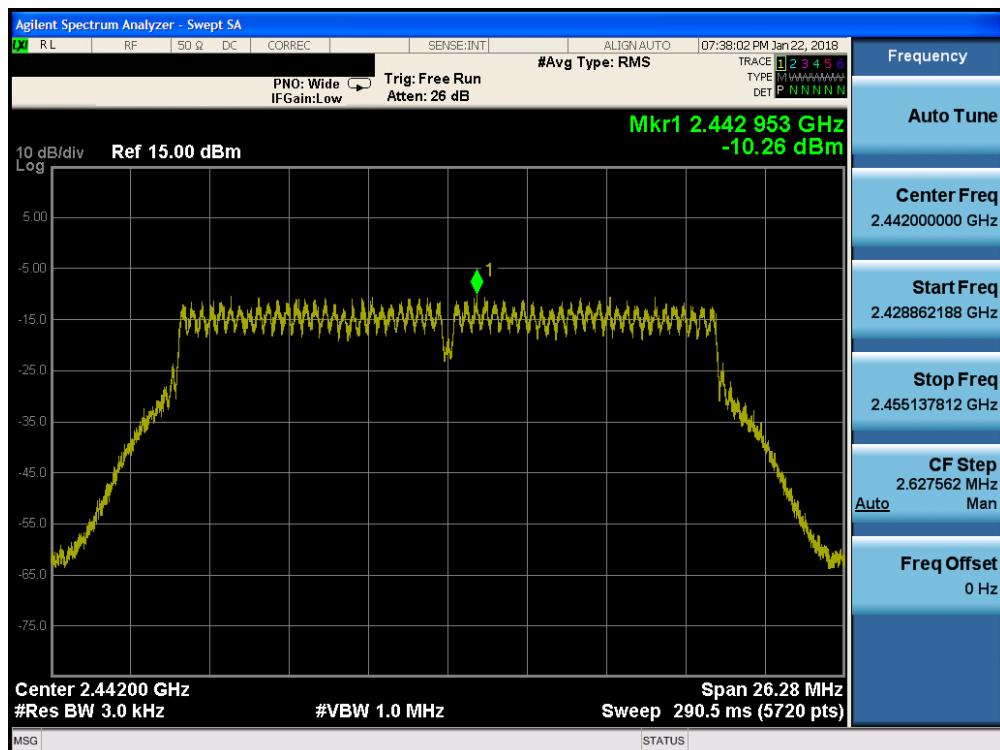


Plot 7-84. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 7)

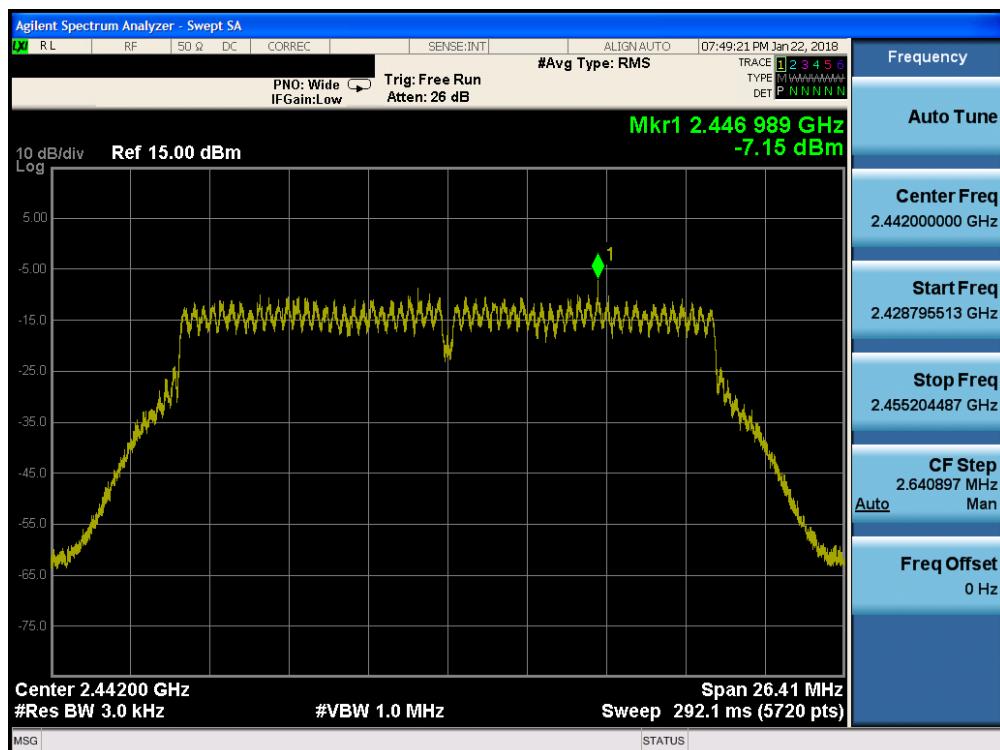


Plot 7-85. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 7)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 67 of 173

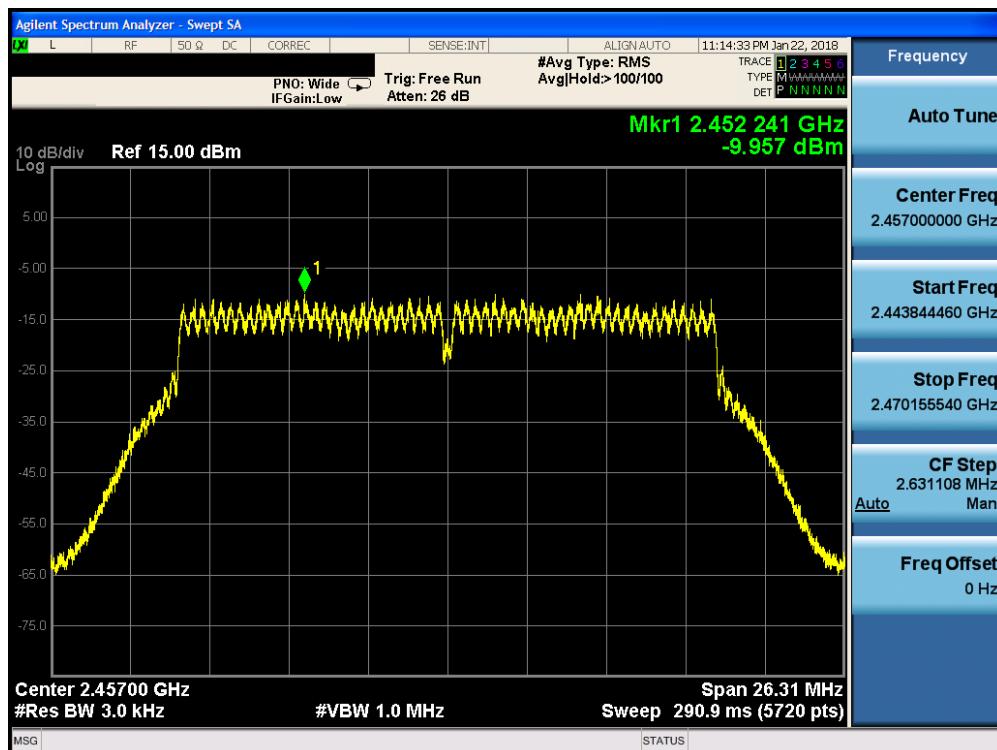


Plot 7-86. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 10)

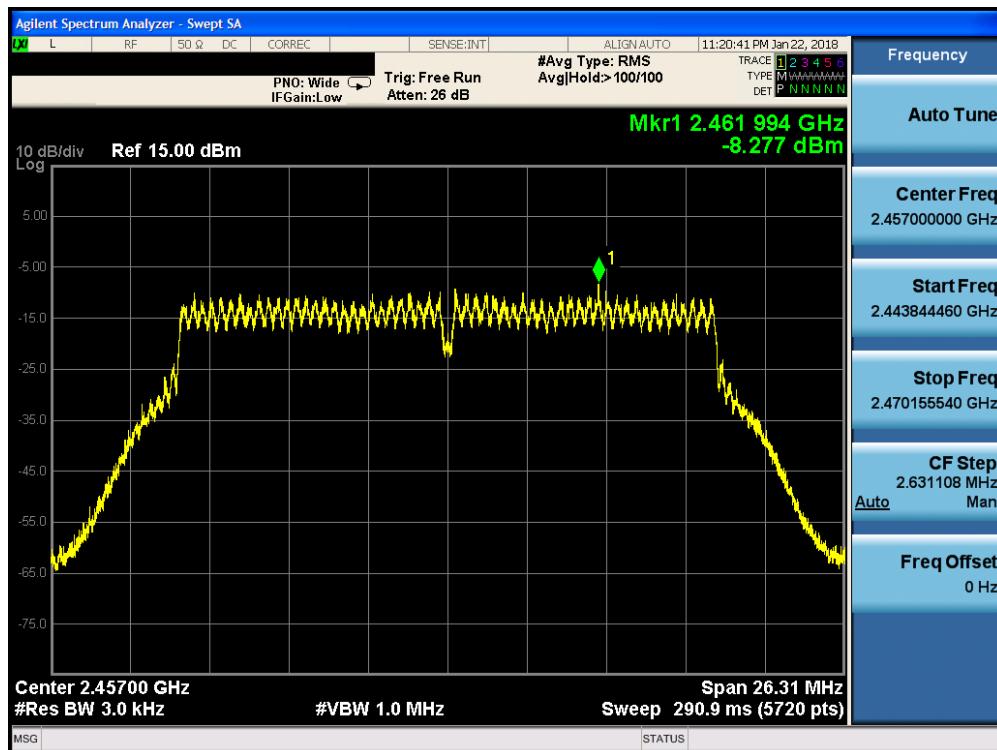


Plot 7-87. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 10)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 68 of 173

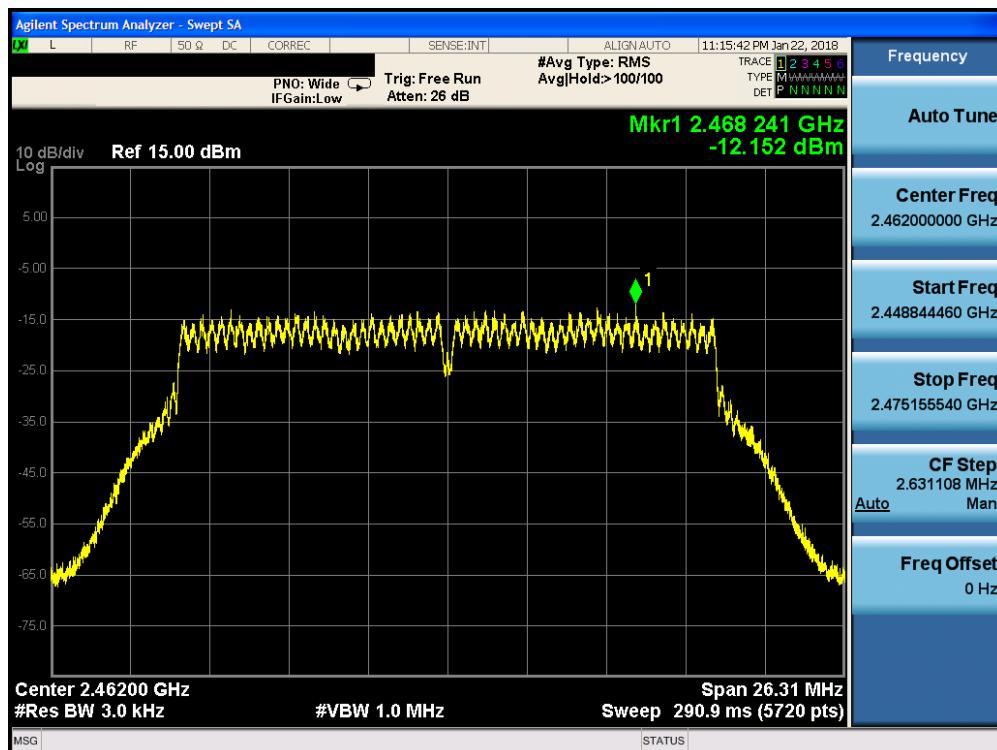


Plot 7-88. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 11)

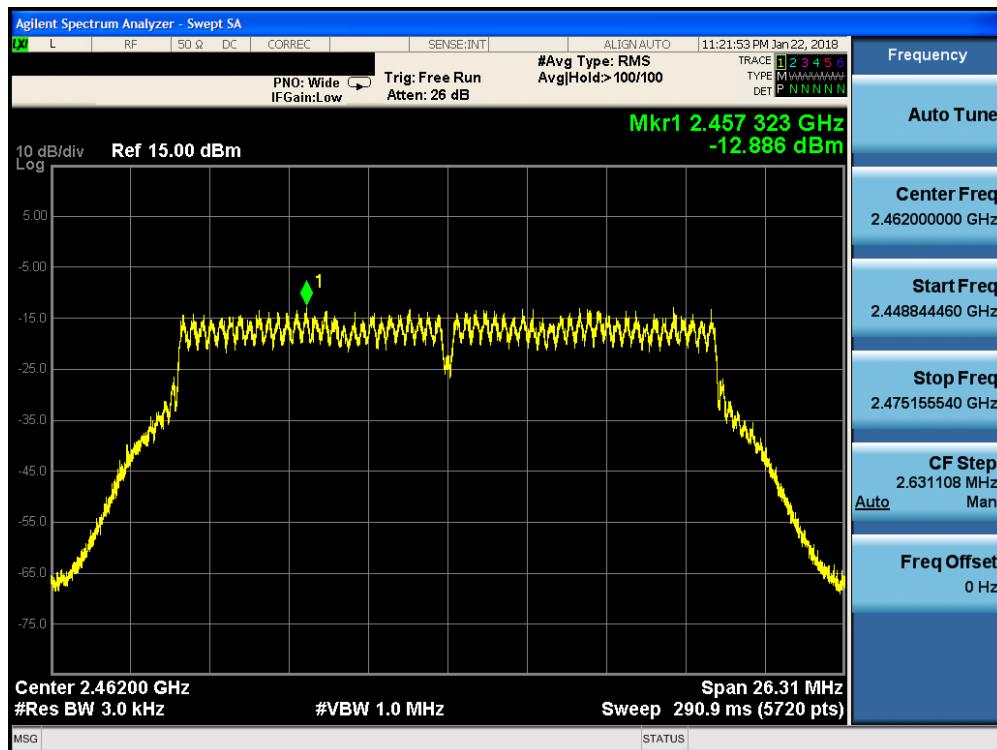


Plot 7-89. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 11)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 69 of 173

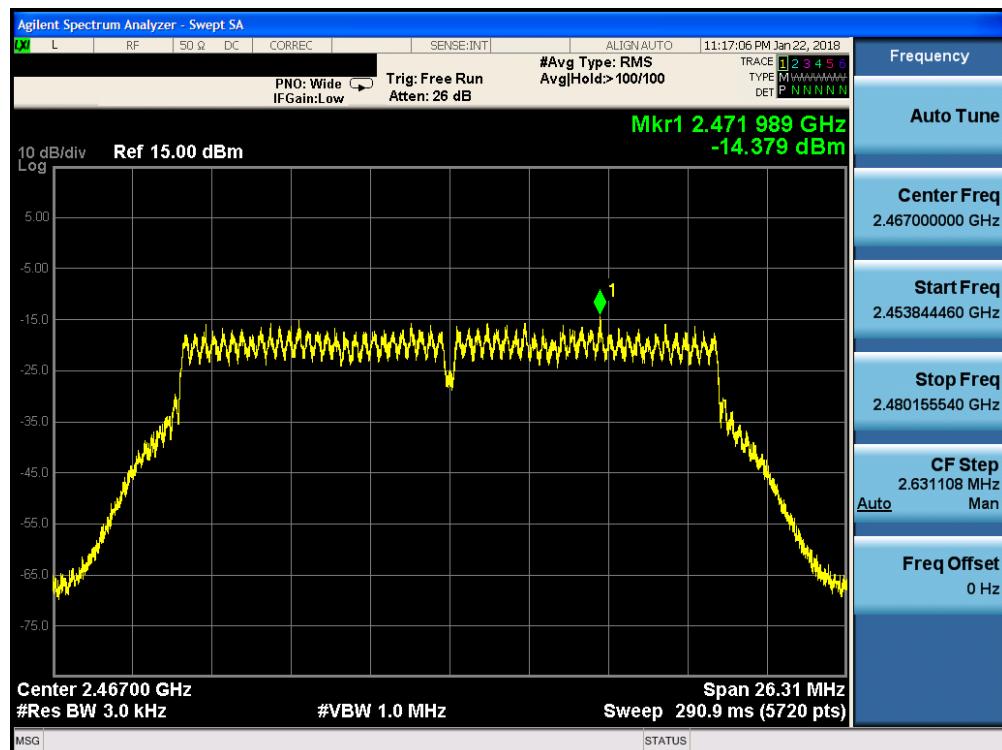


Plot 7-90. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 12)

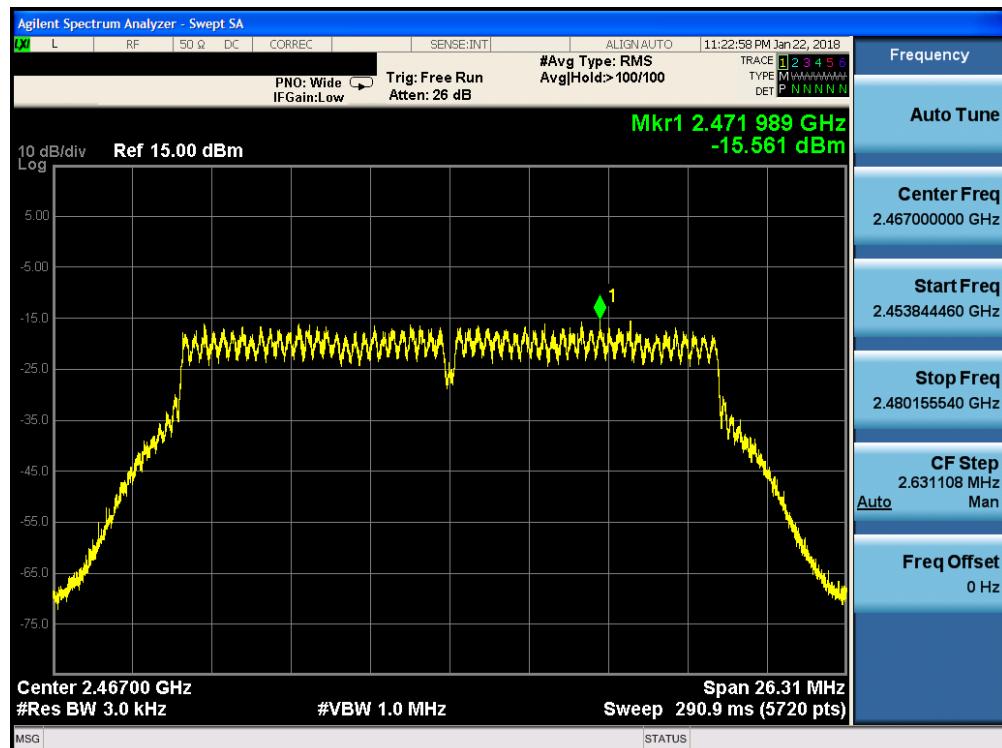


Plot 7-91. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 12)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 70 of 173

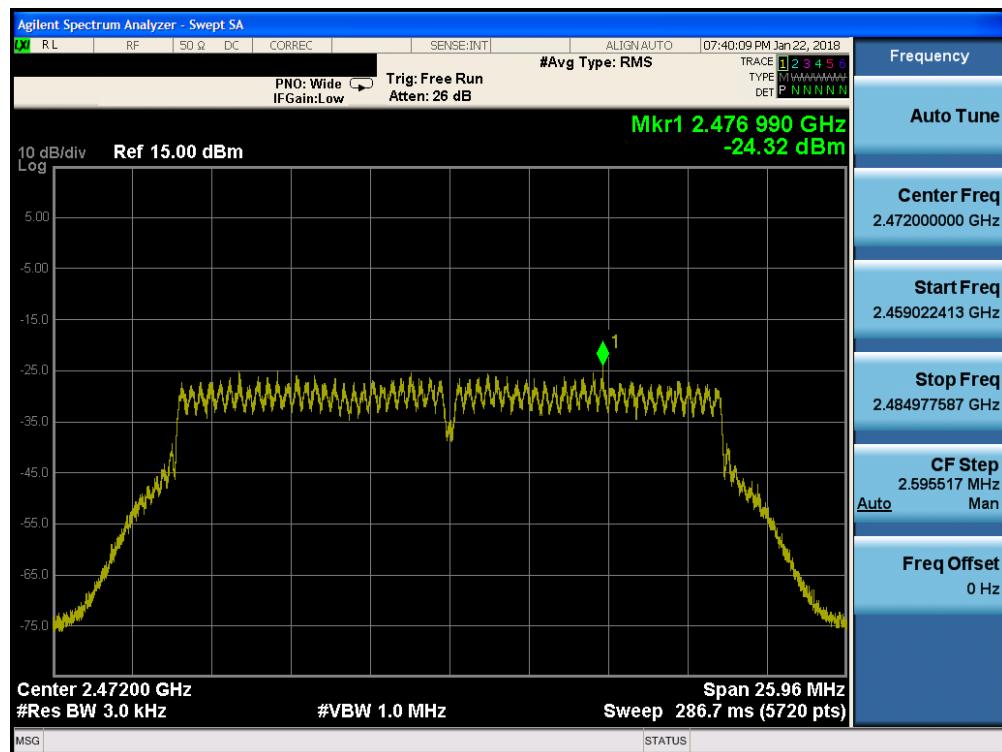

Plot 7-92. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 13)

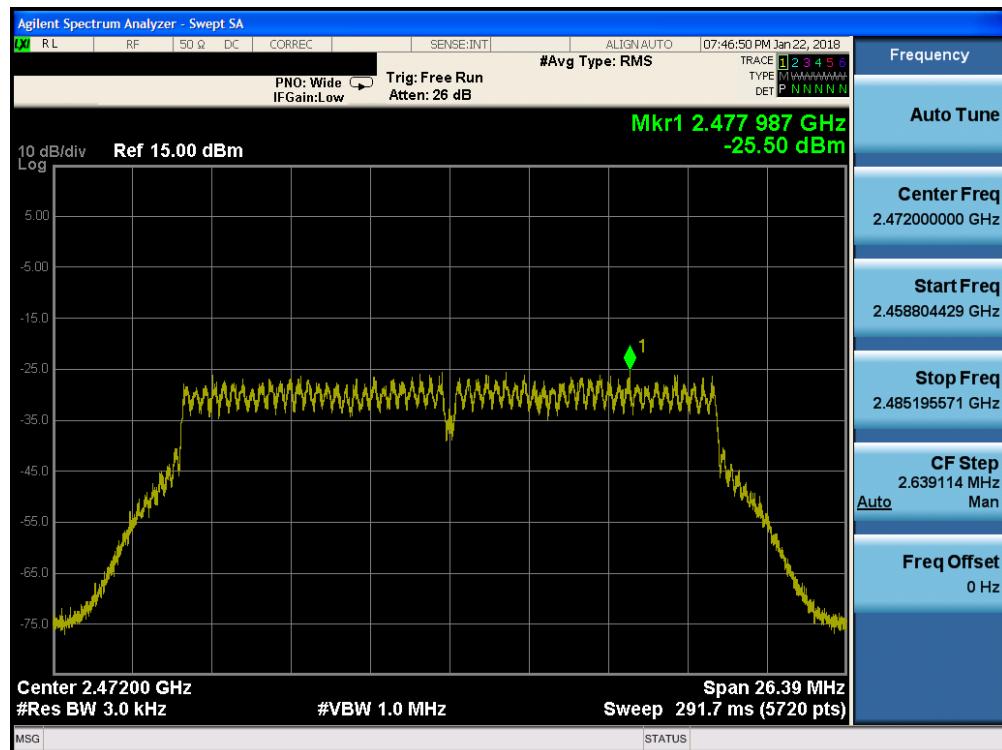

Plot 7-93. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 71 of 173

## 7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for "b" mode, 6 Mbps for "g" mode, and 6.5/7.2Mbps for "n" mode as these settings produced the worst-case emissions.

**The limit for out-of-band spurious emissions at the band edge is N/AdB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).**

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
 KDB 558074 D01 v04 – Section 11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: BCGA1893	 <b>PCTEST®</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CERTIFICATION)</small>	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 72 of 173

## Antenna-1 Conducted Emissions at the Band Edge

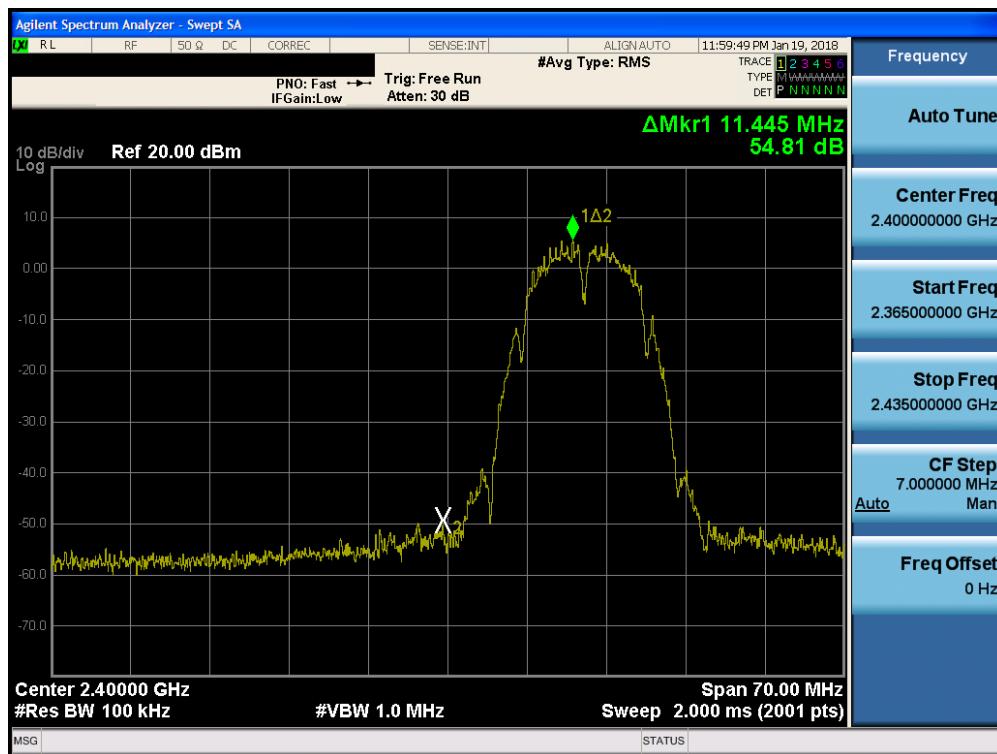


Plot 7-94. Band Edge Plot SISO ANT1 (802.11b – Ch. 1)

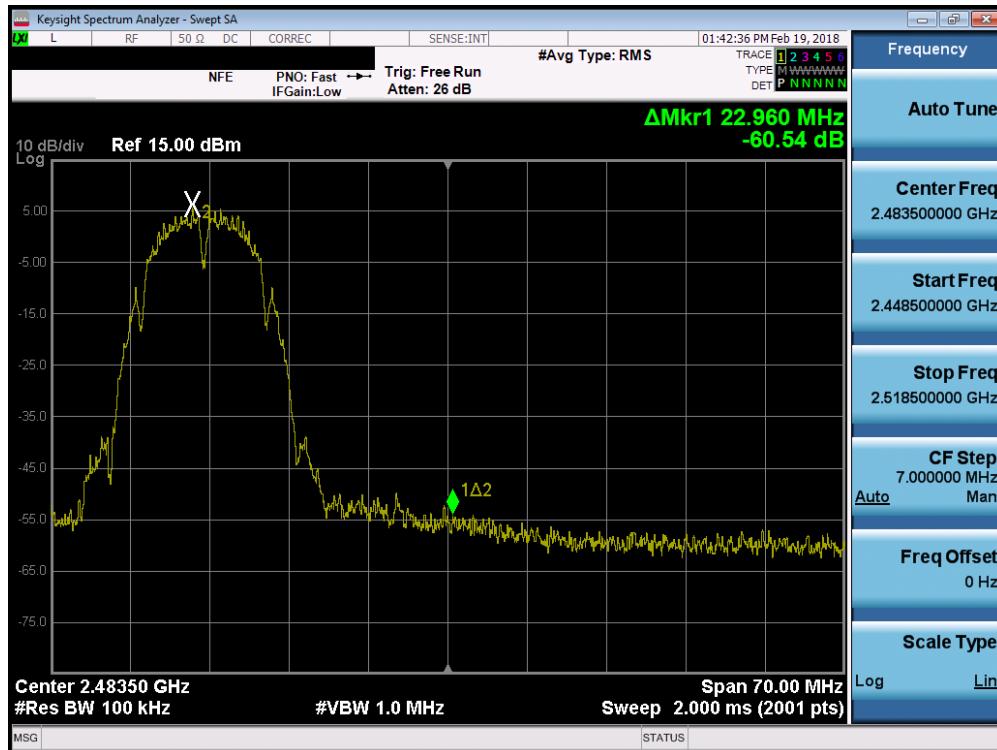


Plot 7-95. Band Edge Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 73 of 173

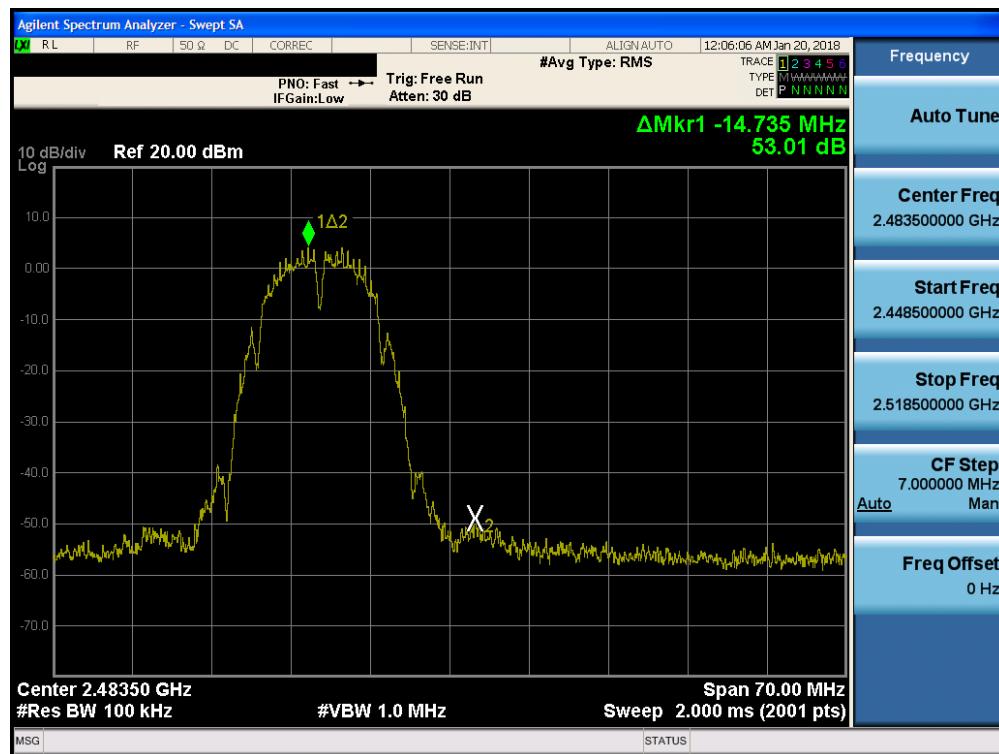


Plot 7-96. Band Edge Plot SISO ANT1 (802.11b – Ch. 13)

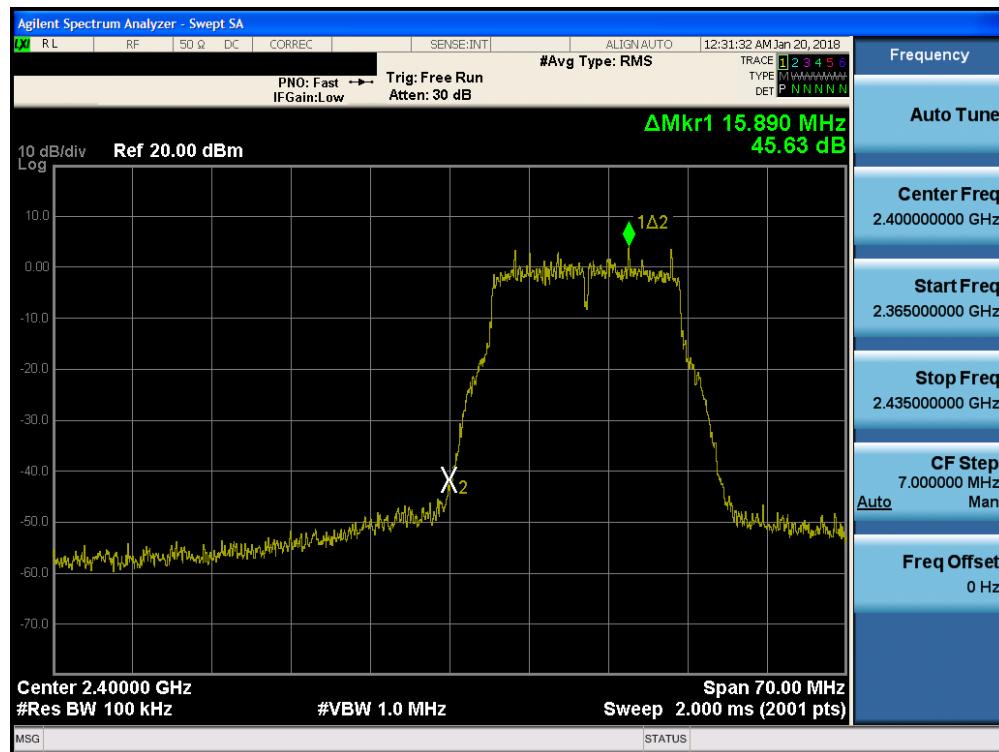


Plot 7-97. Band Edge Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 74 of 173

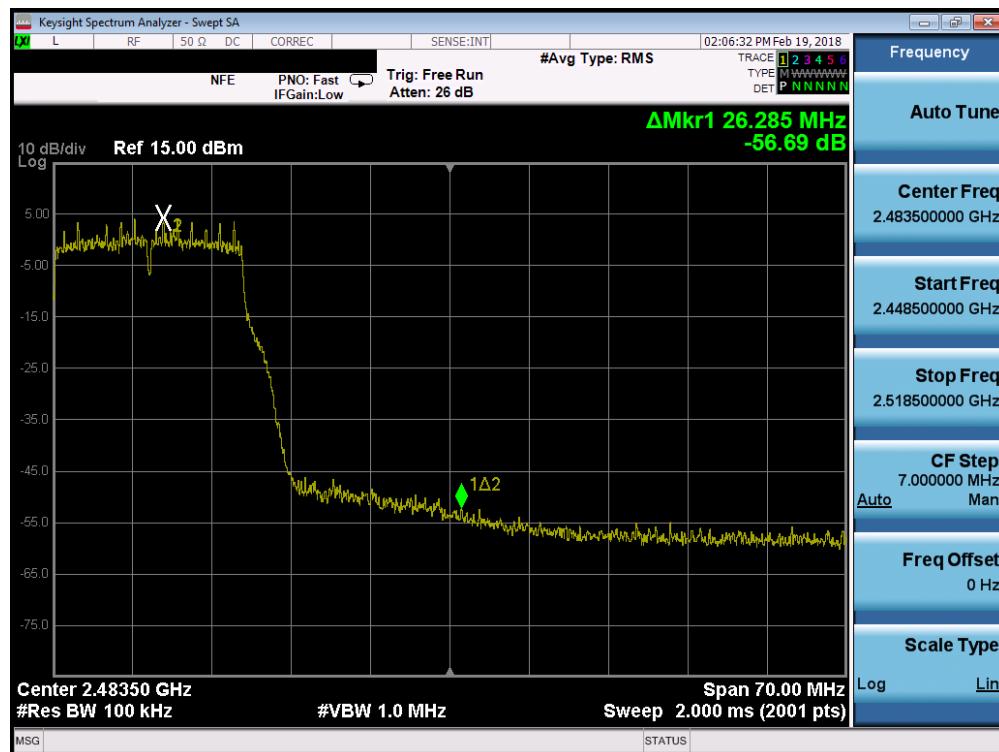


Plot 7-98. Band Edge Plot SISO ANT1 (802.11g- Ch. 10)

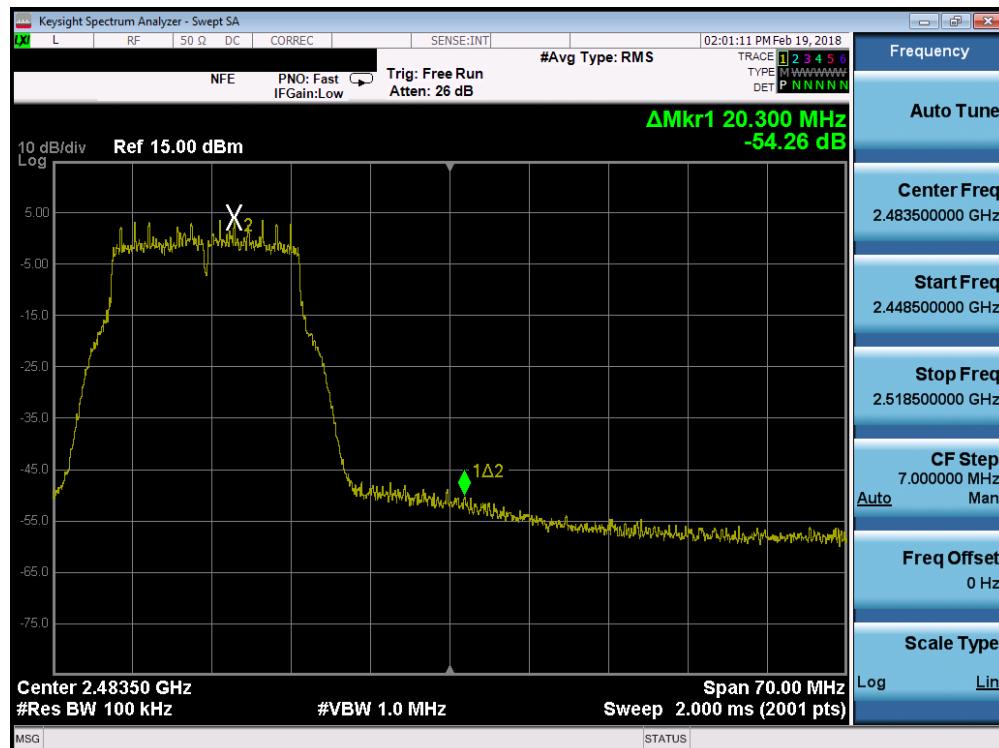


Plot 7-99. Band Edge Plot SISO ANT1 (802.11g- Ch. 11)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 75 of 173

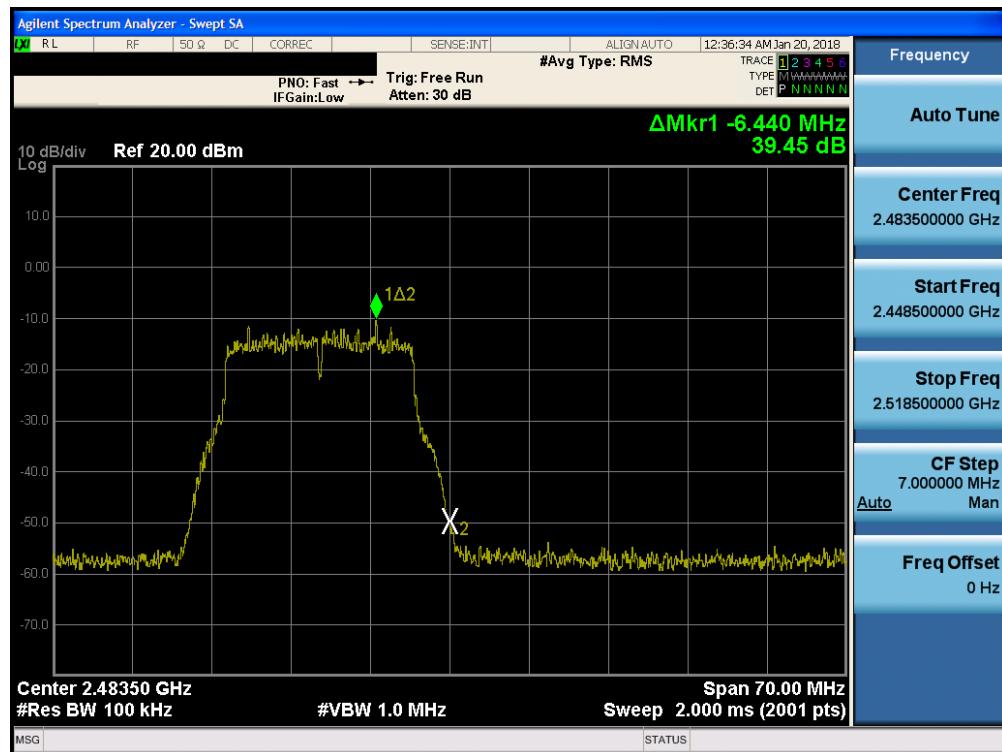


Plot 7-100. Band Edge Plot SISO ANT1 (802.11g – Ch. 13)

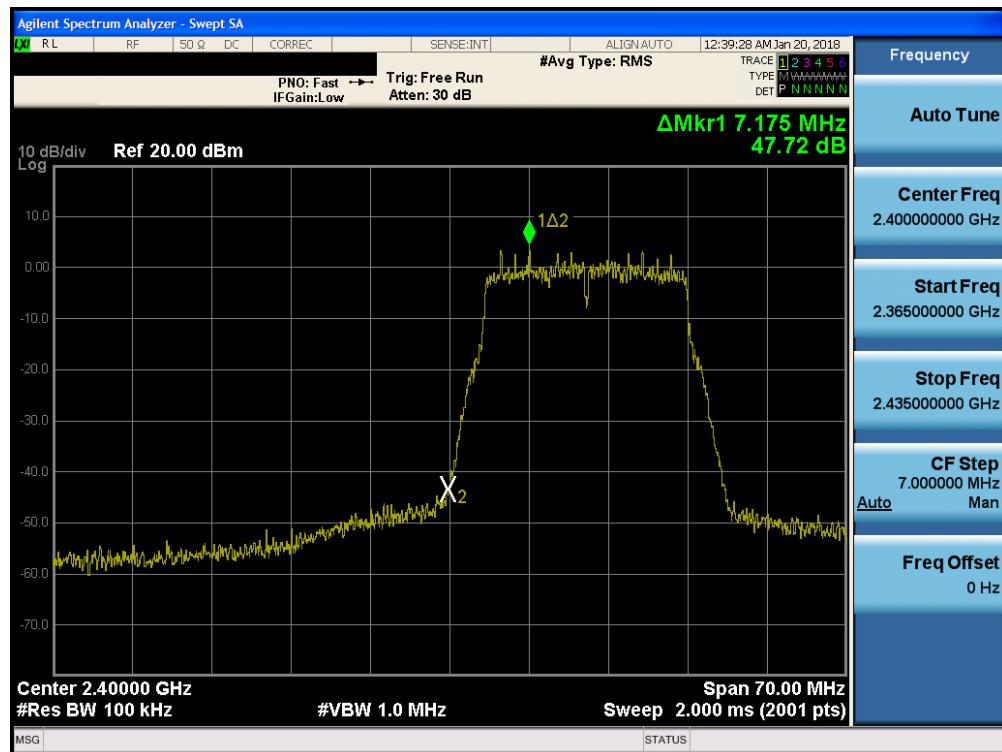

Plot 7-101. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 76 of 173

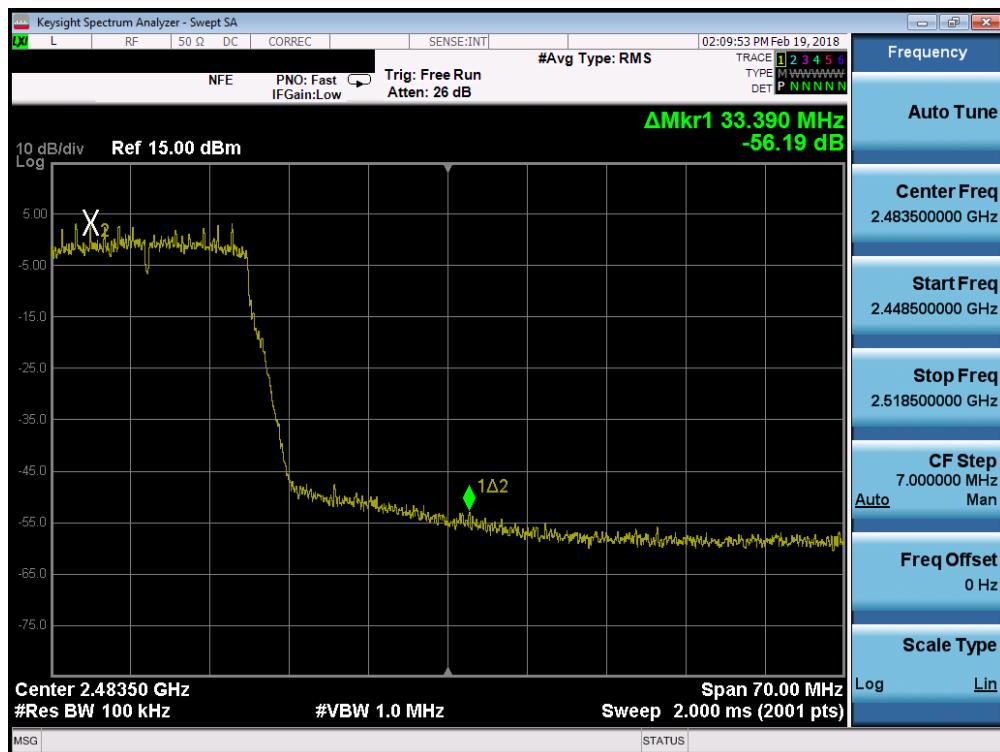


Plot 7-102. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 10)



Plot 7-103. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)


FCC ID: BCGA1893	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 77 of 173	

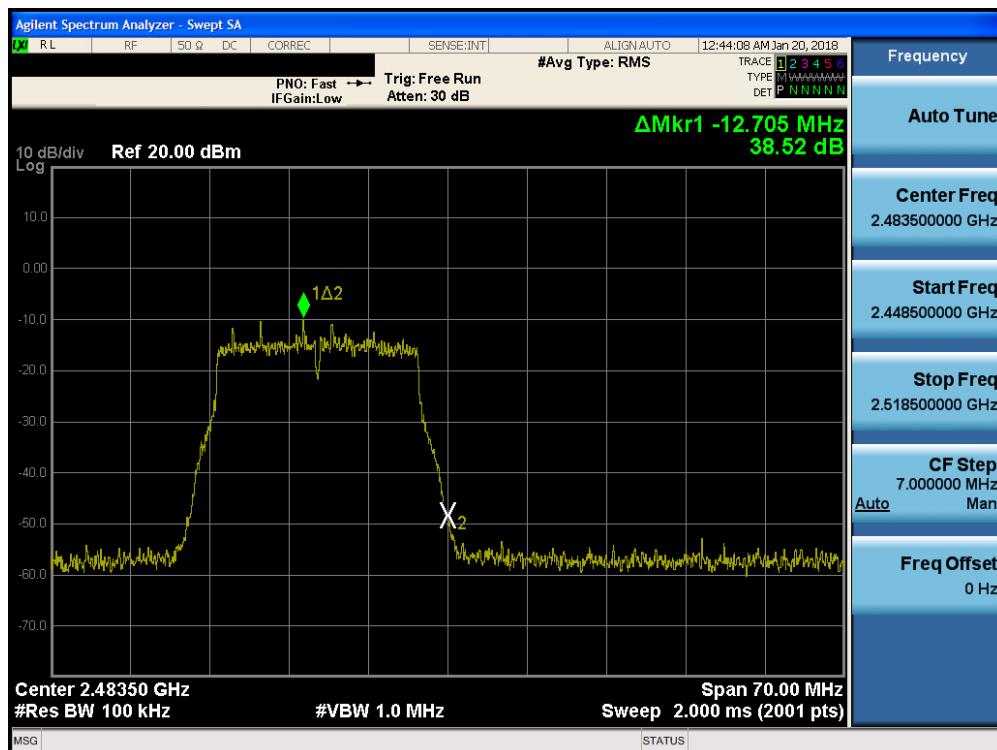


Plot 7-104. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	 <b>PCTEST®</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 78 of 173

## Antenna-2 Conducted Emissions at the Band Edge

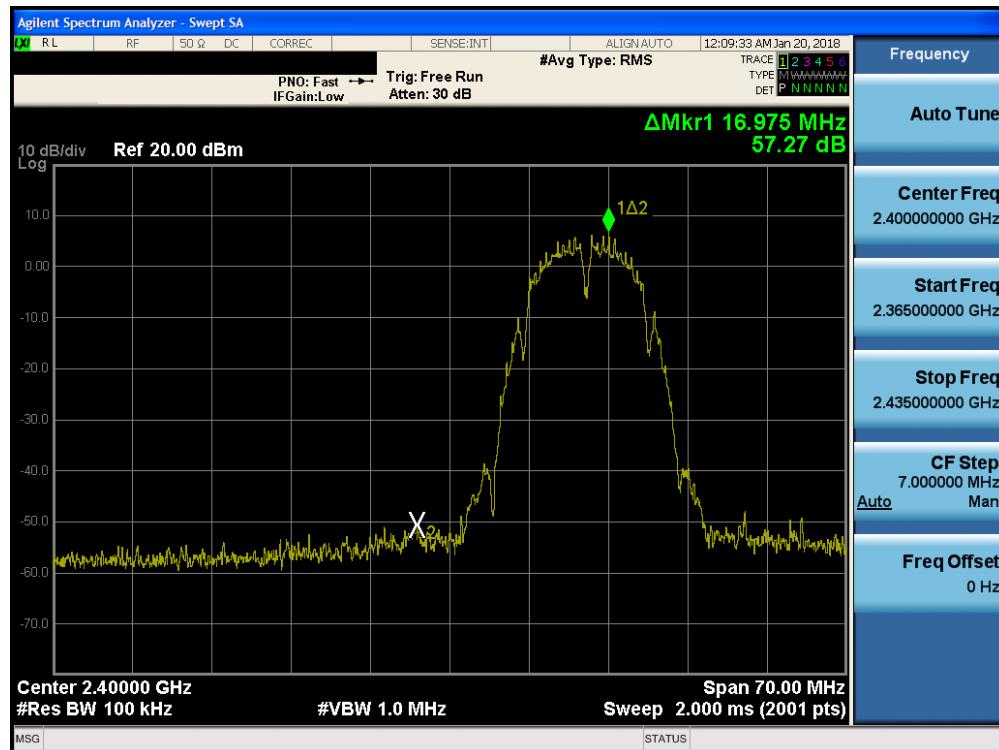


Plot 7-105. Band Edge Plot SISO ANT2 (802.11b – Ch. 1)

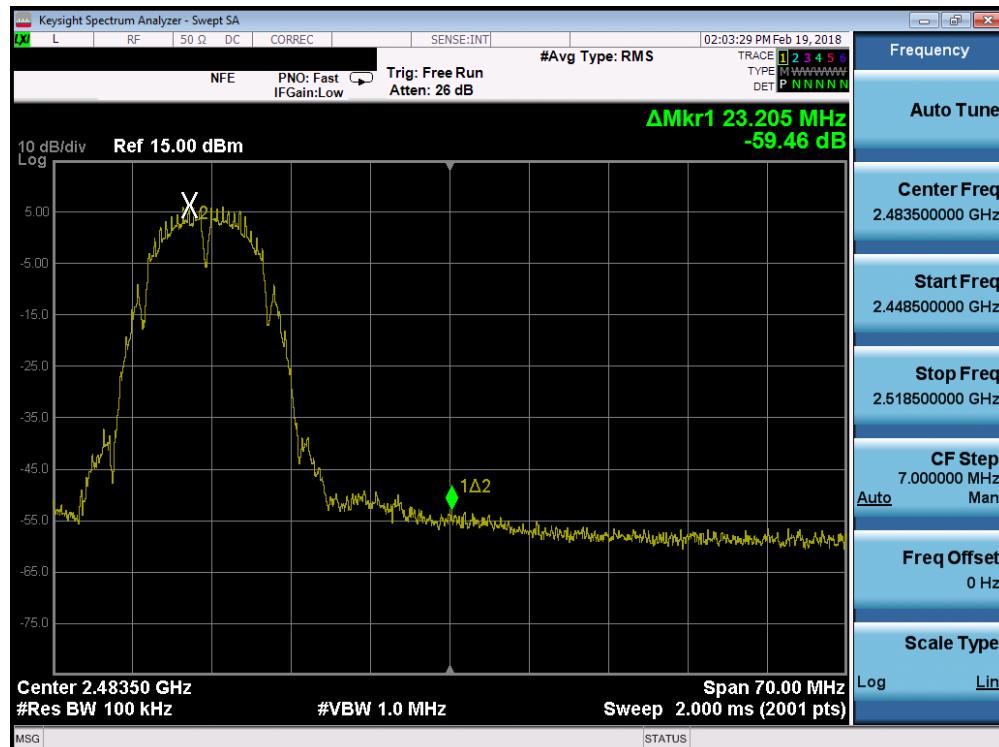


Plot 7-106. Band Edge Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: BCGA1893	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 79 of 173

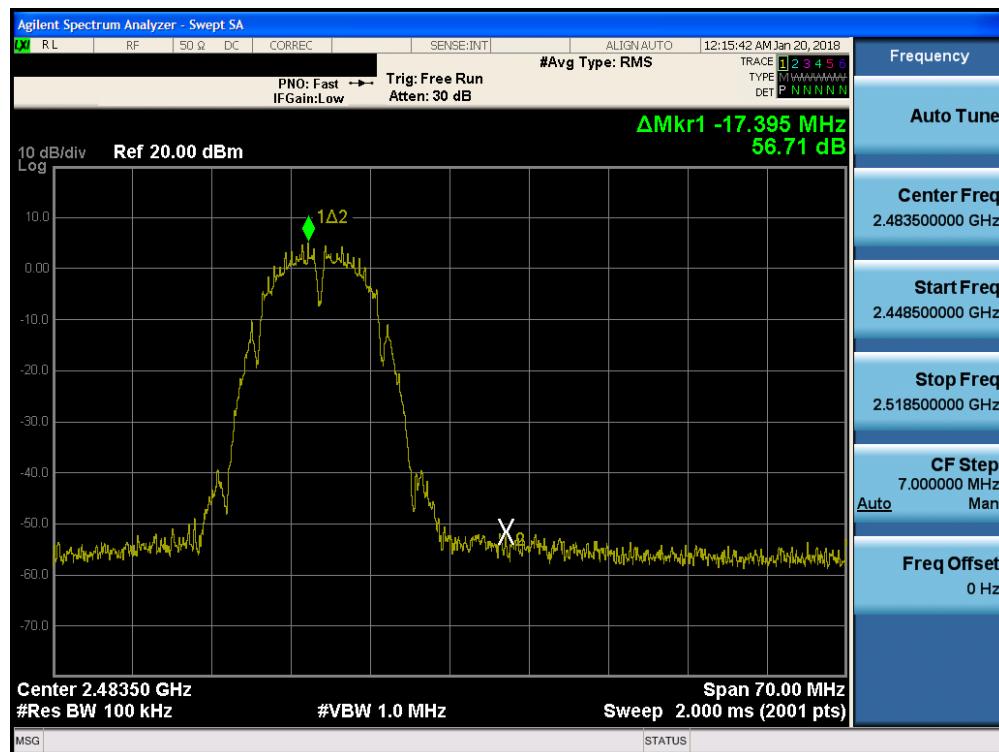


Plot 7-107. Band Edge Plot SISO ANT2 (802.11b – Ch. 13)

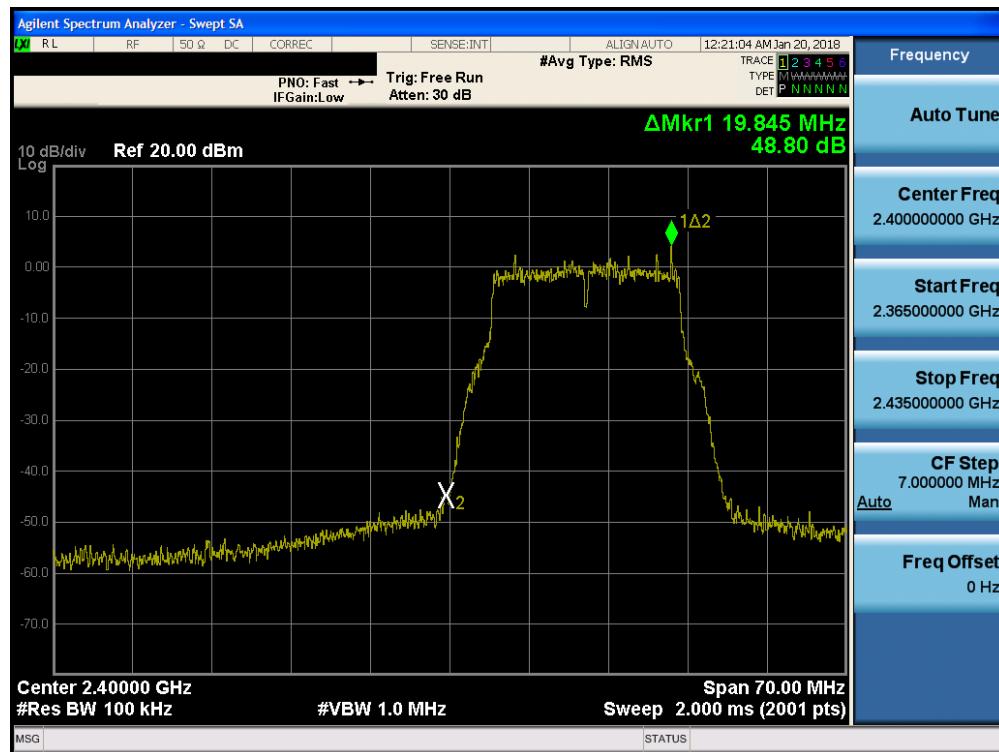


Plot 7-108. Band Edge Plot SISO ANT2 (802.11g– Ch. 1)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 80 of 173

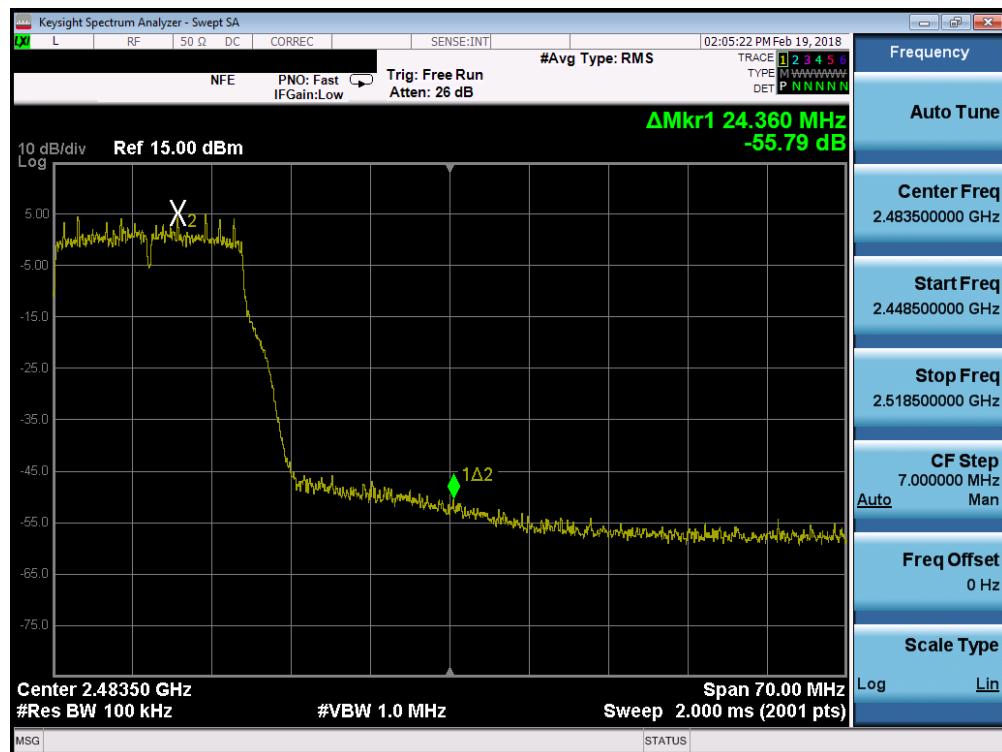


Plot 7-109. Band Edge Plot SISO ANT2 (802.11g – Ch. 10)

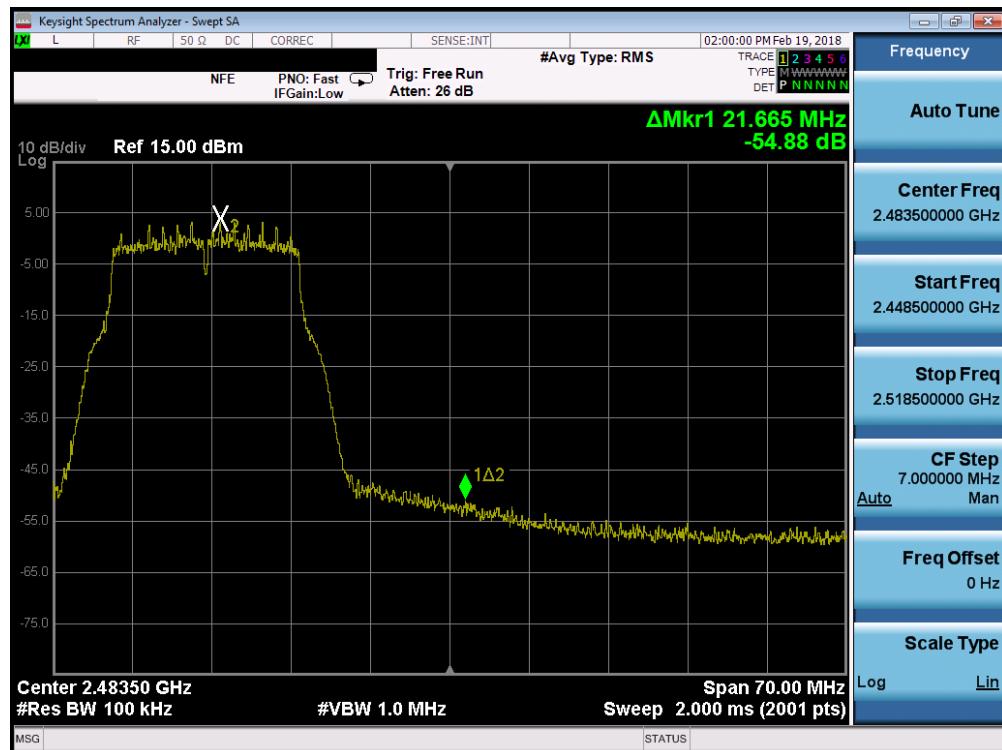


Plot 7-110. Band Edge Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 81 of 173

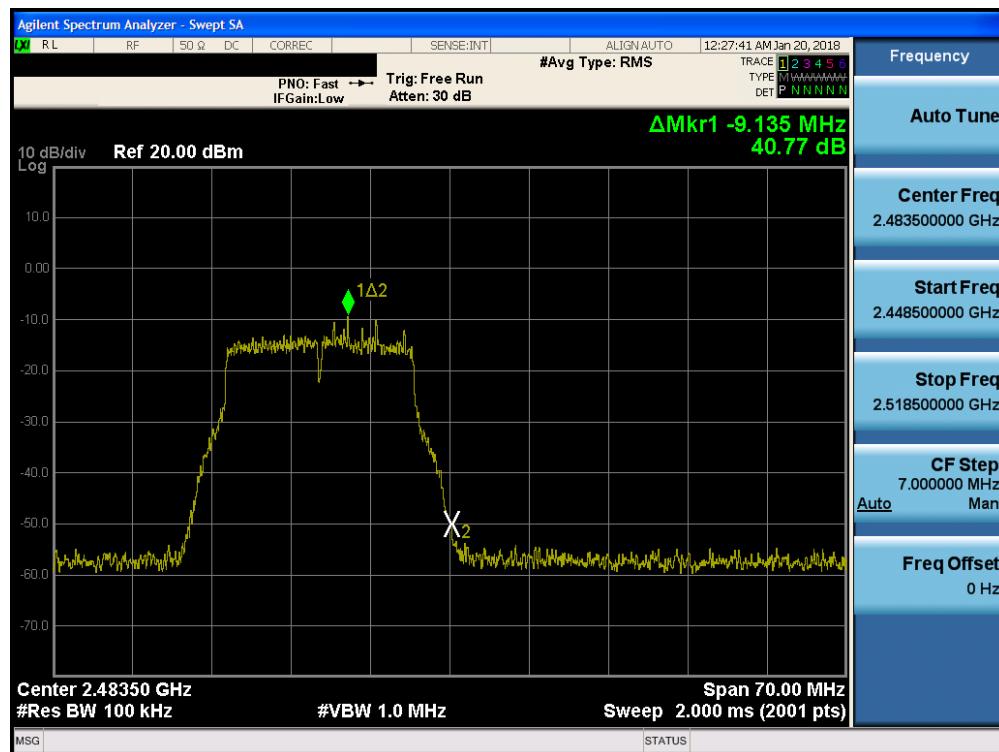


Plot 7-111. Band Edge Plot SISO ANT2 (802.11g – Ch. 13)

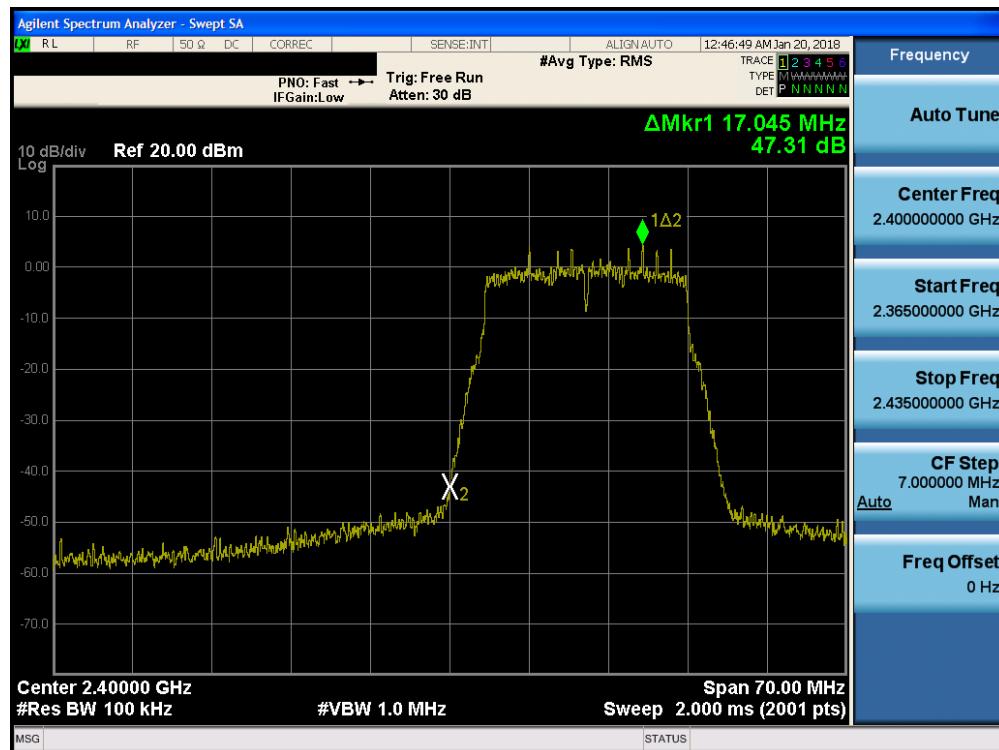


Plot 7-112. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 82 of 173

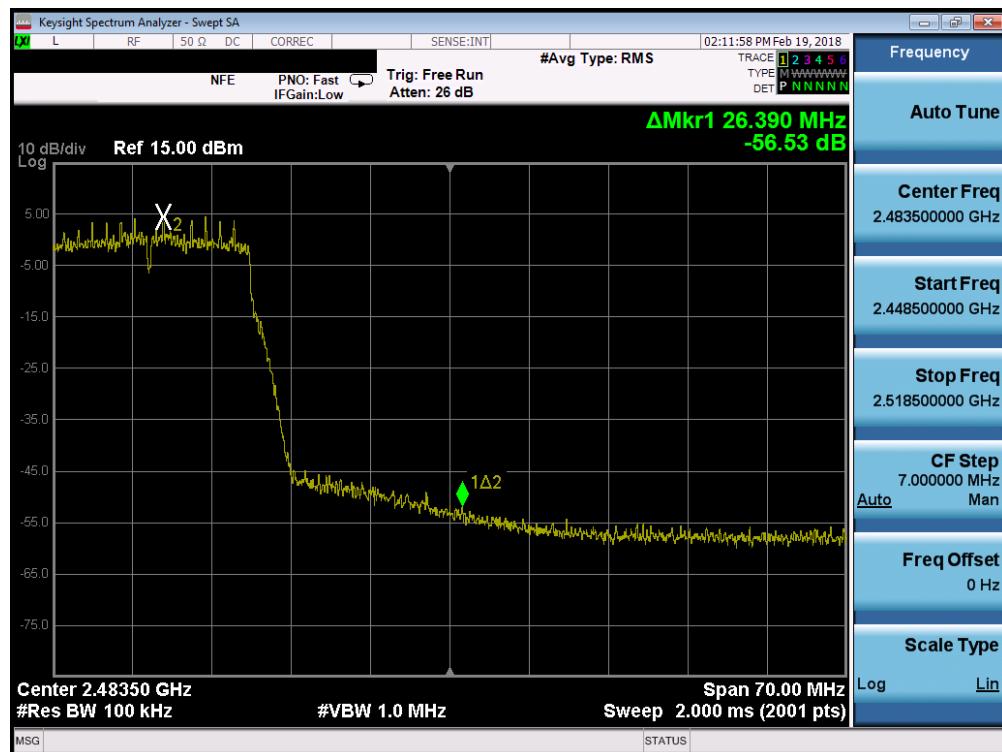


Plot 7-113. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 10)

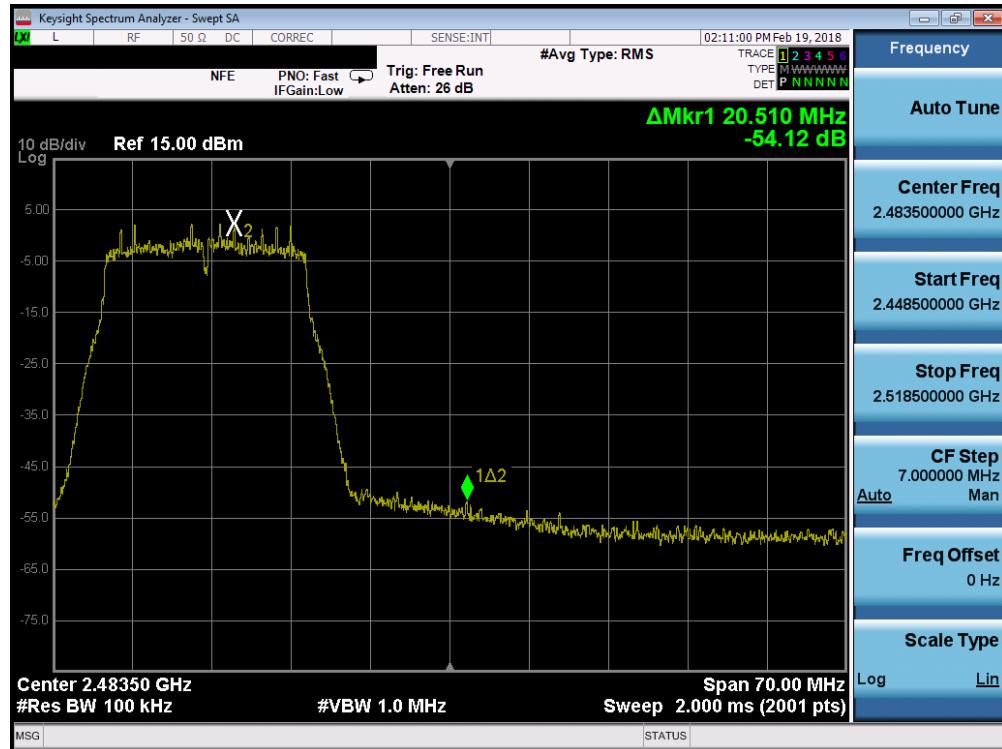

Plot 7-114. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)


FCC ID: BCGA1893	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 83 of 173

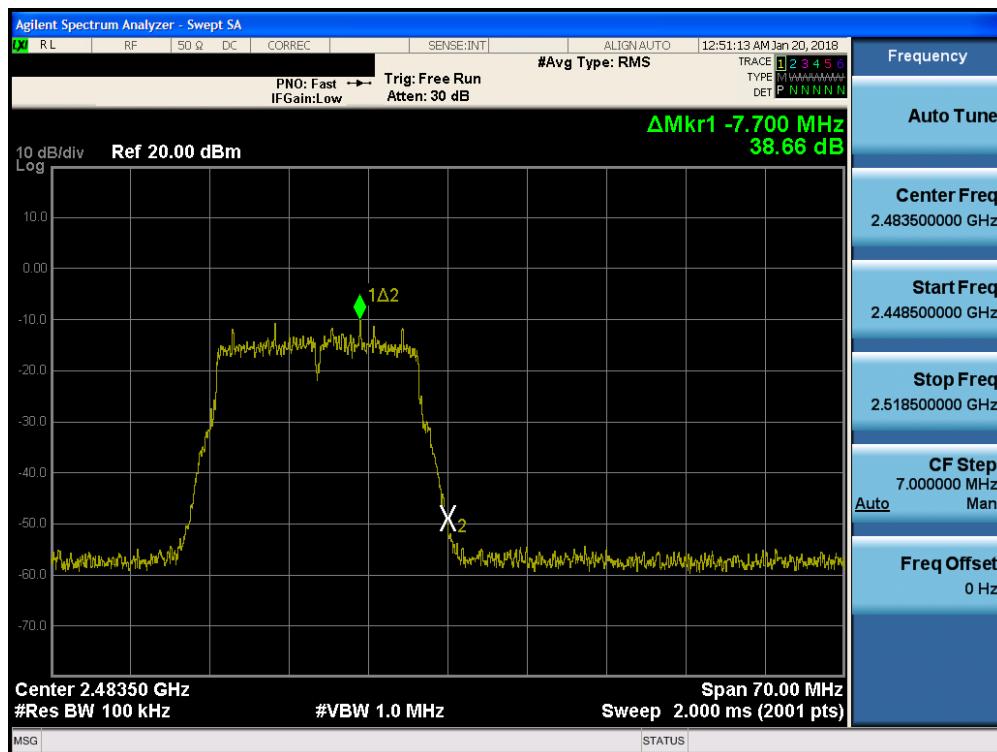


Plot 7-115. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA1893	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 84 of 173

## MIMO Conducted Emissions at the Band Edge

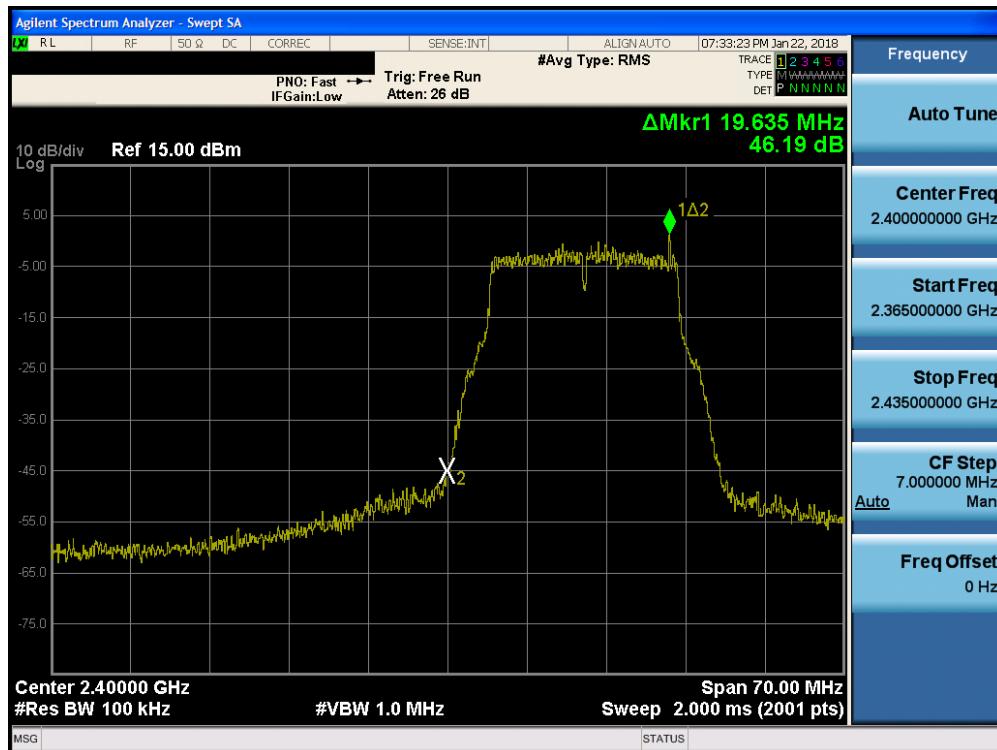

Plot 7-116. Band Edge Plot MIMO ANT1 (802.11g- Ch. 1)

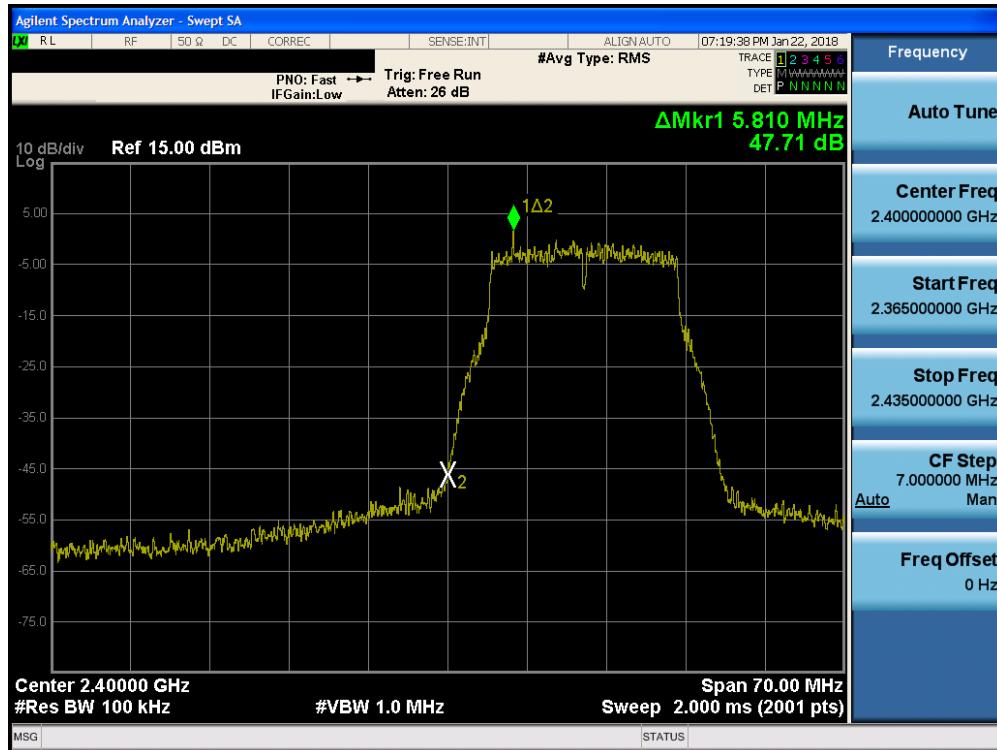

Plot 7-117. Band Edge Plot MIMO ANT2 (802.11g- Ch. 1)

FCC ID: BCGA1893	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060005-02-R1.BCG	Test Dates: 10/31-2/19/2018	EUT Type: Tablet Device	Page 85 of 173