

**MEASUREMENT REPORT**
FCC Part 90**Applicant Name:**Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States**Date of Testing:**

07/27/2018-10/07/2018

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1806050012-04.BCG

FCC ID:**BCGA2013****APPLICANT:****Apple Inc.****Application Type:**

Certification

Model:

A2013

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:


§90(S), §90(R)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 1 of 63

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	5
2.4	Test Support Equipment.....	5
2.5	Test Configuration	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	23
7.4	Band Edge Emissions at Antenna Terminal	32
7.5	Conducted Power Output Data	41
7.6	Radiated Power (ERP)	46
7.7	Radiated Spurious Emissions Measurements	48
7.7.1	ANT 3 (Port A) Radiated Spurious Emissions Measurements	50
7.7.2	ANT 1 (Port B) Radiated Spurious Emissions Measurements	55
7.8	Frequency Stability / Temperature Variation	58
8.0	CONCLUSION.....	63

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 2 of 63



MEASUREMENT REPORT

FCC Part 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Emission Designator	Modulation
LTE Band 14	790.5 - 795.5	ERP	0.124	20.95	4M53G7W	QPSK
LTE Band 14	790.5 - 795.5	ERP	0.108	20.32	4M53G7W	16-QAM
LTE Band 14	790.5 - 795.5	ERP	0.096	19.83	4M55D7W	64-QAM
LTE Band 14	793	ERP	0.111	20.44	9M07G7W	QPSK
LTE Band 14	793	ERP	0.099	19.94	9M04G7W	16-QAM
LTE Band 14	793	ERP	0.094	19.75	9M06D7W	64-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.355	25.50	1M09G7W	QPSK
LTE Band 26	814.7 - 823.3	Conducted	0.305	24.85	1M08D7W	16-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.245	23.90	1M08D7W	64-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.354	25.49	2M70G7W	QPSK
LTE Band 26	815.5 - 822.5	Conducted	0.303	24.81	2M70D7W	16-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.238	23.77	2M71D7W	64-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.342	25.34	4M51G7W	QPSK
LTE Band 26	816.5 - 821.5	Conducted	0.291	24.64	4M51D7W	16-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.243	23.85	4M52D7W	64-QAM
LTE Band 26	819	Conducted	0.352	25.47	9M01G7W	QPSK
LTE Band 26	819	Conducted	0.303	24.81	9M02D7W	16-QAM
LTE Band 26	819	Conducted	0.252	24.01	9M03D7W	64-QAM

EUT Overview

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 3 of 63

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 4 of 63

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2013**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90(R) and 90(S).

Test Device Serial No.: DLXX4040KR54, DLXX4036KR54, DLXWX006KR50

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [MHz]	Antennas	
	Port A	Port B
700-800	ANT 3	ANT 1
820-960		

Table 2-1. Antennas vs Ports


Frequency [MHz]	Antenna Gain (dBi)	
	Port A	Port B
700-800	-2.1	-4.2
820-960	-0.6	-2.9

Table 2-2. Antenna Peak Gain

2.4 Test Support Equipment

1	Apple MacBook	Model: A1398	S/N: C2QKP008F6F3
	w/AC/DC Adapter	Model: A1435	S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 300C44
3	USB-C Cable	Model: A146	S/N: N/A
	w/ AC Adapter	Model: A1720	S/N: C3D8257A2EPGKVP2C
4	USB-C to 3.5mm Aux Adapter	Model: A2049	S/N: DWH413100GJJLT12
5	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-3. Test Support Equipment Used

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 5 of 63

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 6 of 63

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

\$2.1053, \$90.635, \$90(S), \$90(R)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} [\text{Watts}])$ specified in 90(S) and 90(R).

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 7 of 63

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 8 of 63

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/13/2018	Annual	3/13/2019	T058601-02
COM-POWER	LIN-120A	LISN	3/7/2018	Annual	3/7/2019	241296
ESPEC	SU-241	Temperature Chamber	8/10/2018	Annual	8/10/2019	92009574
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	2/27/2018	Annual	2/27/2019	MY49430244
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/6/2018	Annual	2/6/2019	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	12/20/2017	Annual	12/20/2018	101668
Rohde & Schwarz	ESW44	EMI Test Receiver	11/16/2017	Annual	11/16/2018	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/11/2018	Annual	6/11/2019	161675
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/16/2018	Annual	4/16/2019	161617
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/8/2017	Annual	12/8/2018	164175
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	9/11/2017	Annual	9/11/2018	102132
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	12/11/2017	Annual	12/11/2018	102136
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/11/2018	Annual	6/11/2019	100051
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/25/2018	Annual	1/25/2019	102333
Rohde & Schwarz	HL562E	Ultra Broadband Antenna (30MHz - 6GHz)	6/8/2018	Annual	6/8/2019	100810
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna(400MHz-18GHz)	11/13/2017	Annual	11/13/2018	101057
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/29/2017	Annual	11/29/2018	101063

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 9 of 63

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 10 of 63

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2013
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE
 Band: Band 26 / Band 14

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691(a) 90.543(e)	Conducted Band Edge / Spurious Emissions	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10\log(P)$ dB. > $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
90.542(a)(7)	Effective Radiated Power (Band 14)	< 3 Watts max. ERP		PASS	Section 7.6
2.1053 90.691(a) 90.543(e)	Radiated Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	RADIATED	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 11 of 63

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.
- 5) All ports were investigated and only the worst case data was reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 12 of 63

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

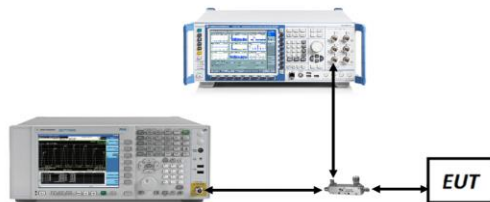


Figure 7-1. Test Instrument & Measurement Setup

Test Notes


1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 13 of 63

LTE Band 26




Plot 7-1. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– Low Channel)

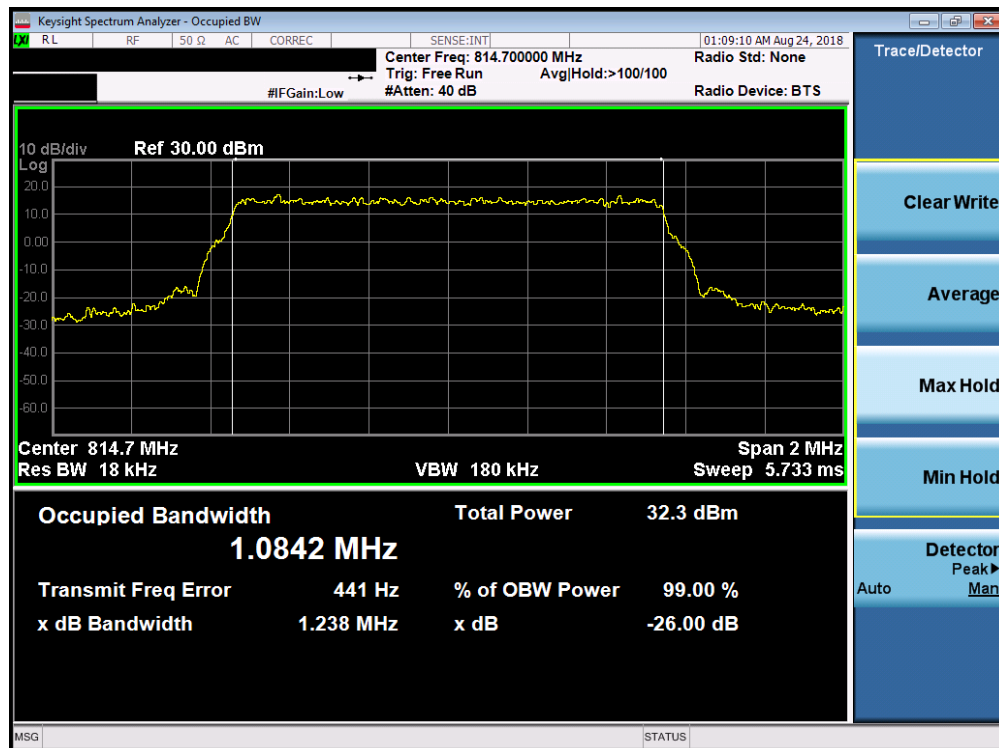


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 16-QAM – RB Size 6– Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 14 of 63

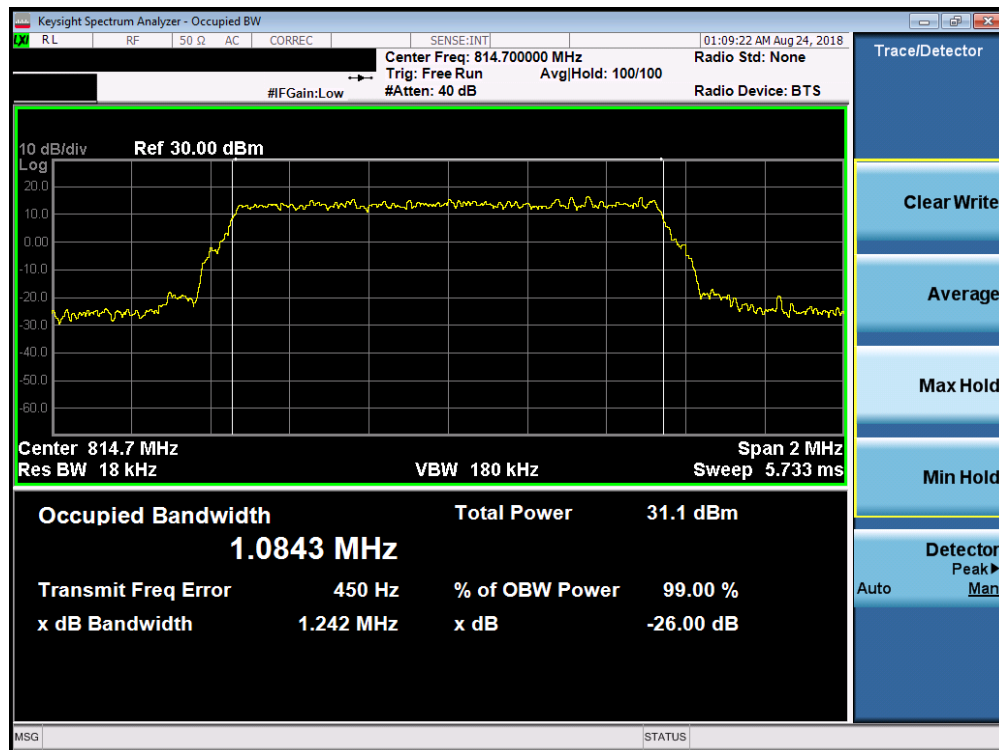


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 64-QAM – RB Size 6– Low Channel)

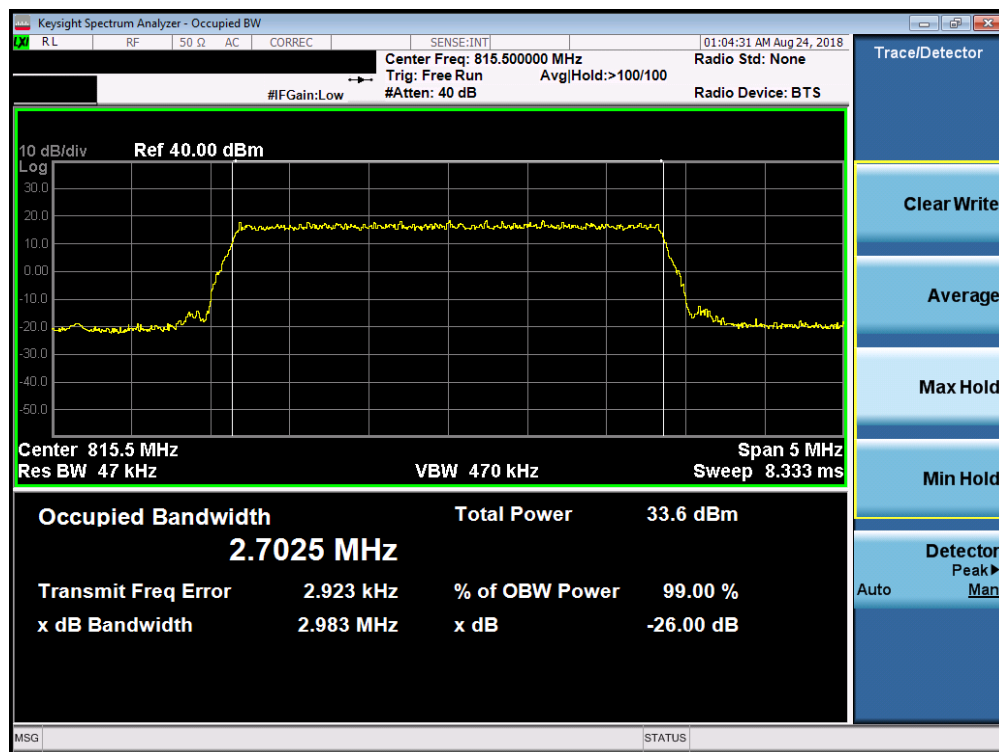


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 15 of 63

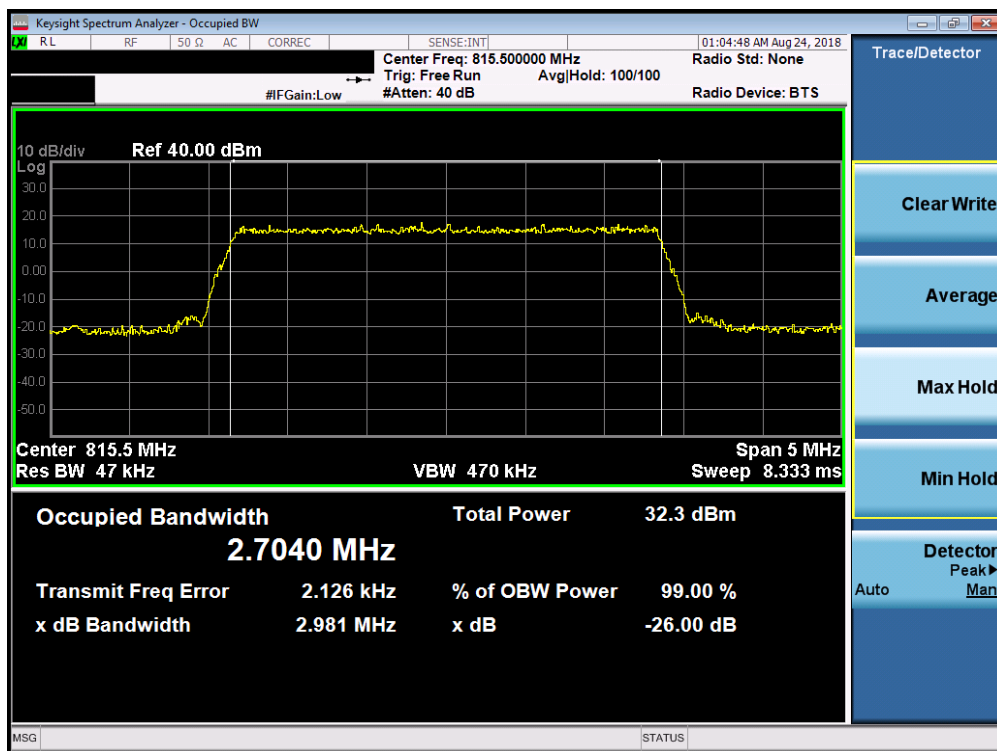


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26, 3MHz 16-QAM – RB Size 15– Low Channel)

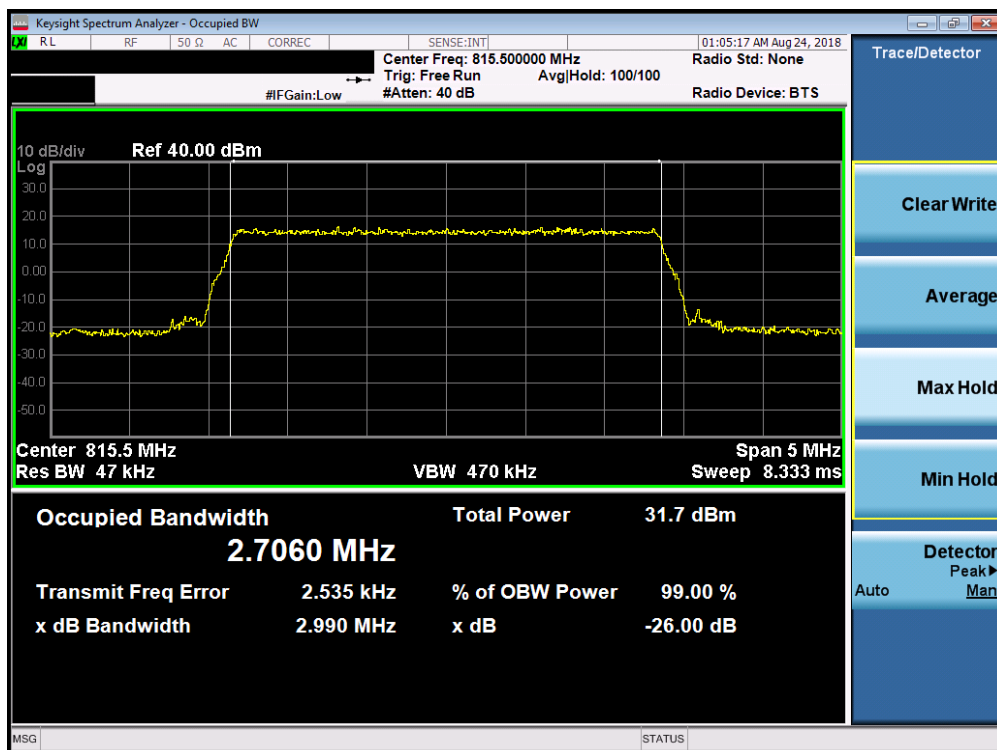


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26, 3MHz 64-QAM – RB Size 15– Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 16 of 63

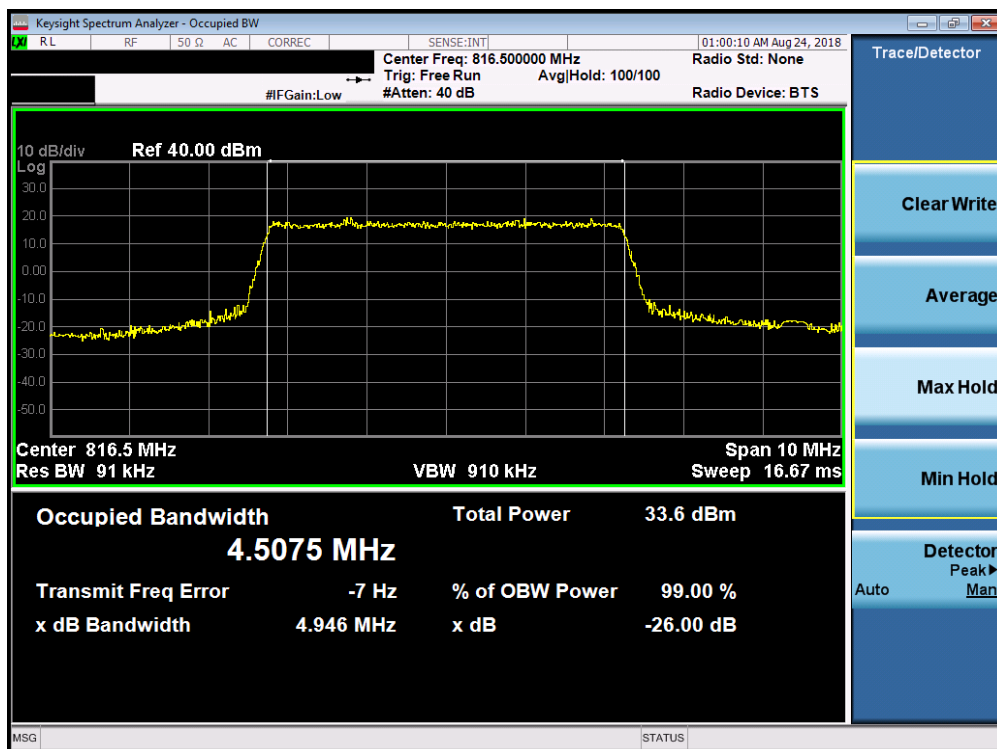


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

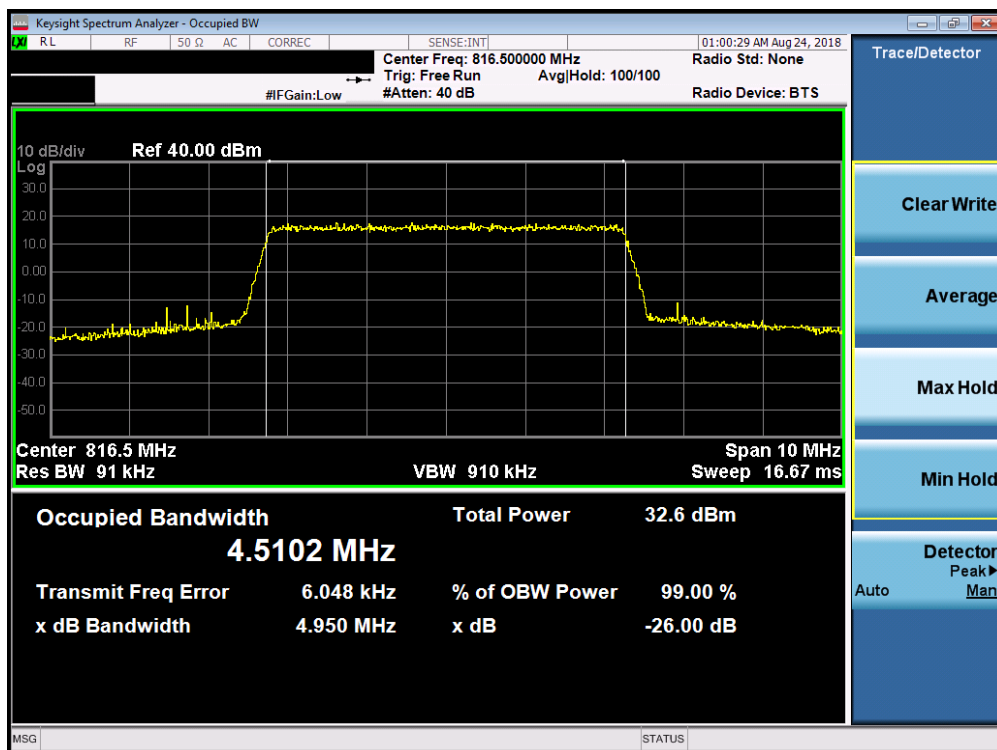

Plot 7-8. Occupied Bandwidth Plot (LTE Band 26, 5MHz 16-QAM – RB Size 25– Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 17 of 63

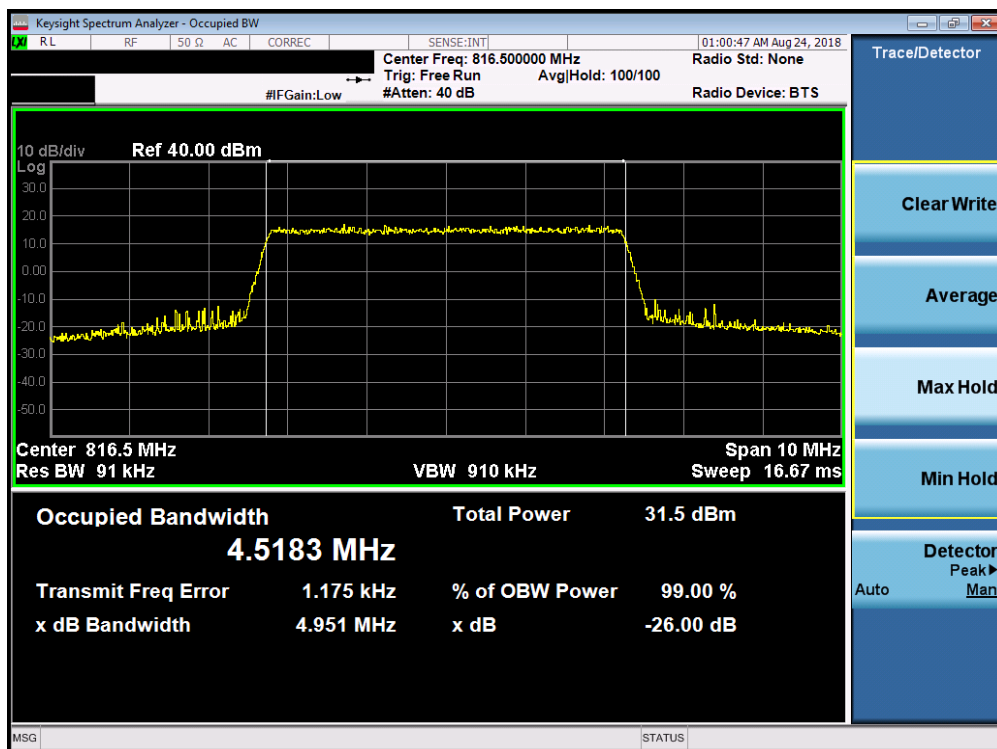


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26, 5MHz 64-QAM – RB Size 25– Low Channel)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 18 of 63

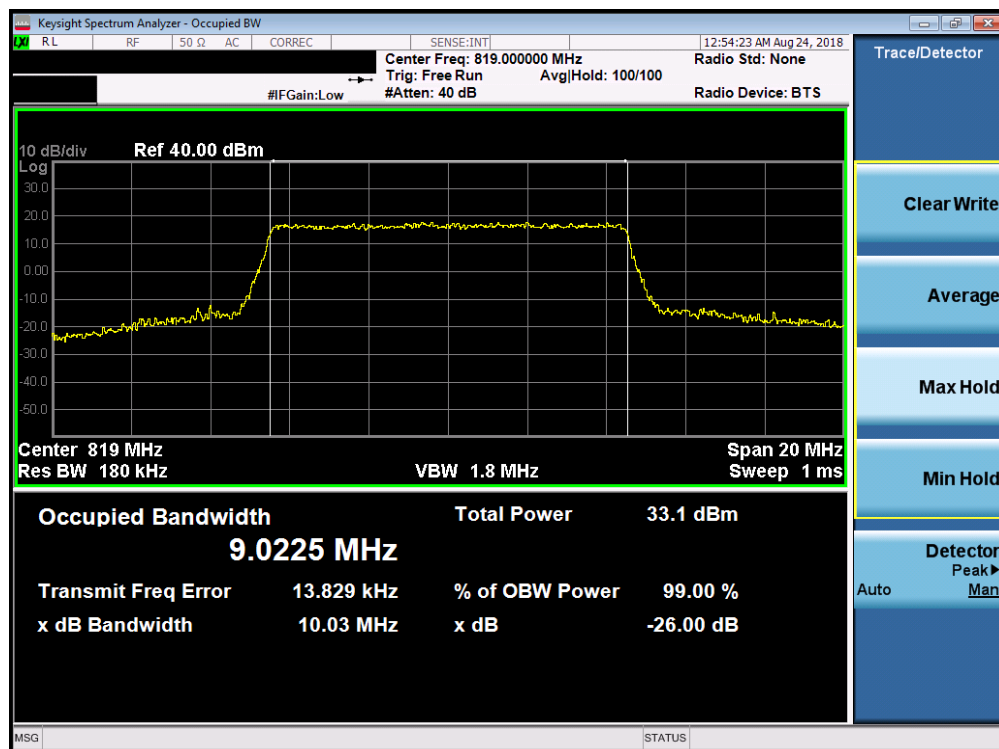


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26, 10MHz 16-QAM – RB Size 50)

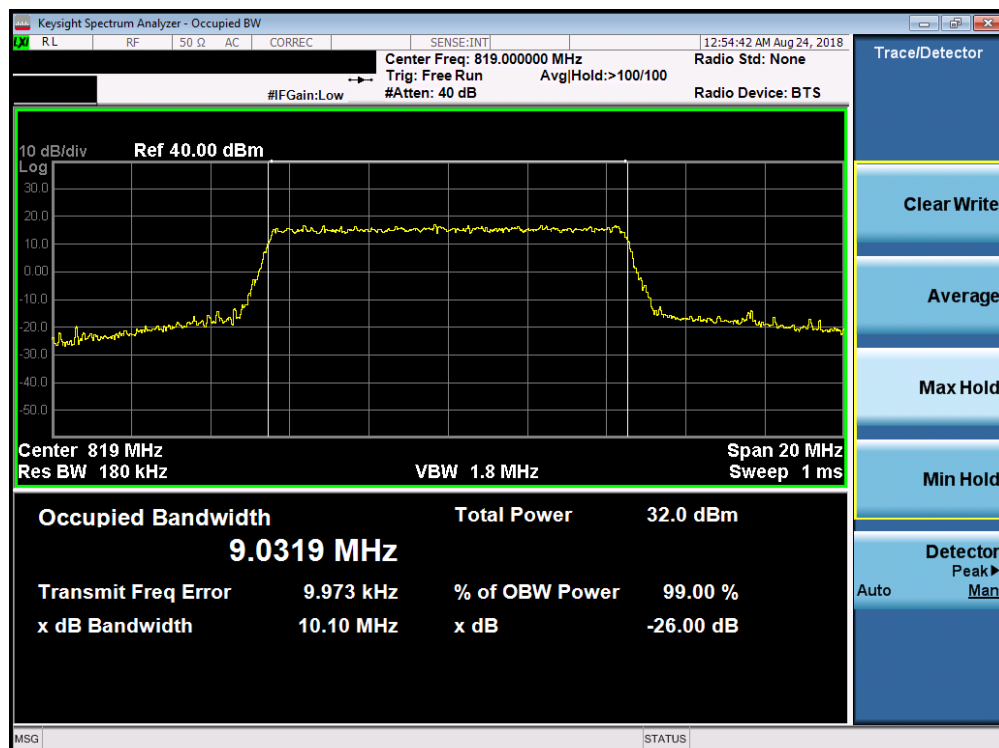


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26, 10MHz 64-QAM – RB Size 50)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 19 of 63

LTE Band 14

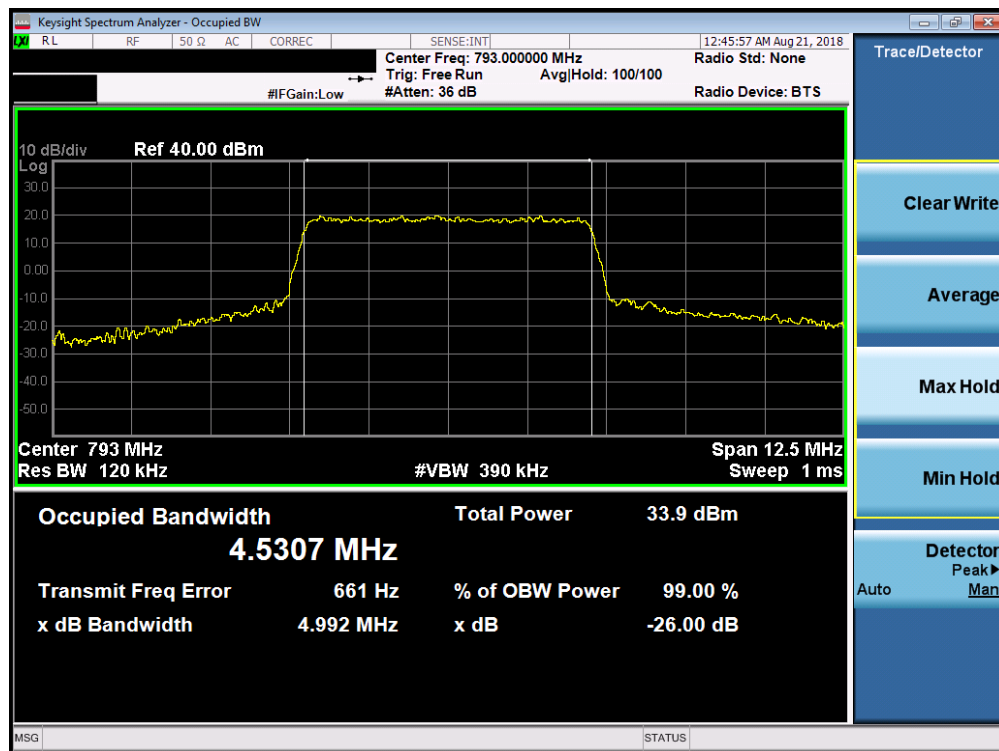


Plot 7-13. Occupied Bandwidth Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

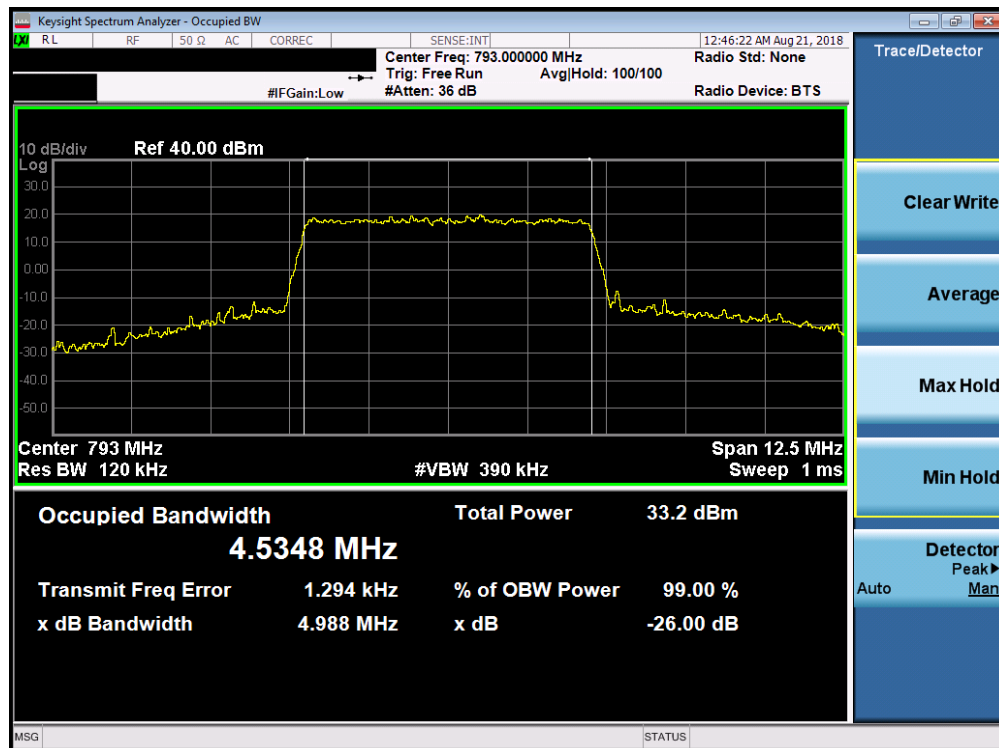


Plot 7-14. Occupied Bandwidth Plot (LTE Band 14, 5MHz 16-QAM – RB Size 25)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 20 of 63

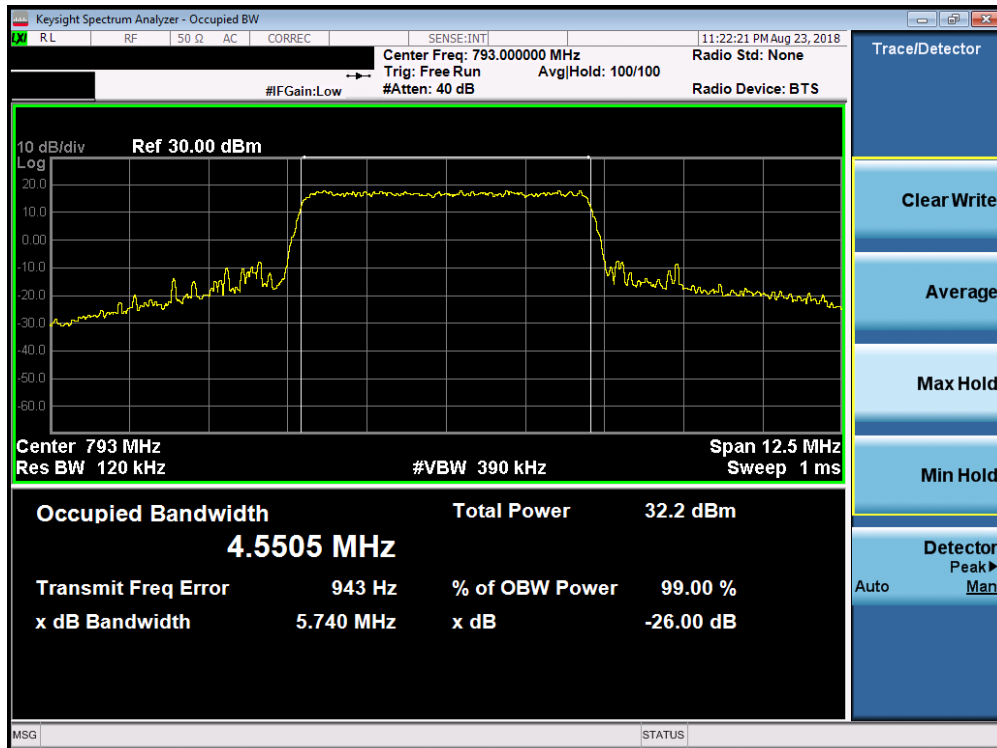


Plot 7-15. Occupied Bandwidth Plot (LTE Band 14, 5MHz 64-QAM – RB Size 25)

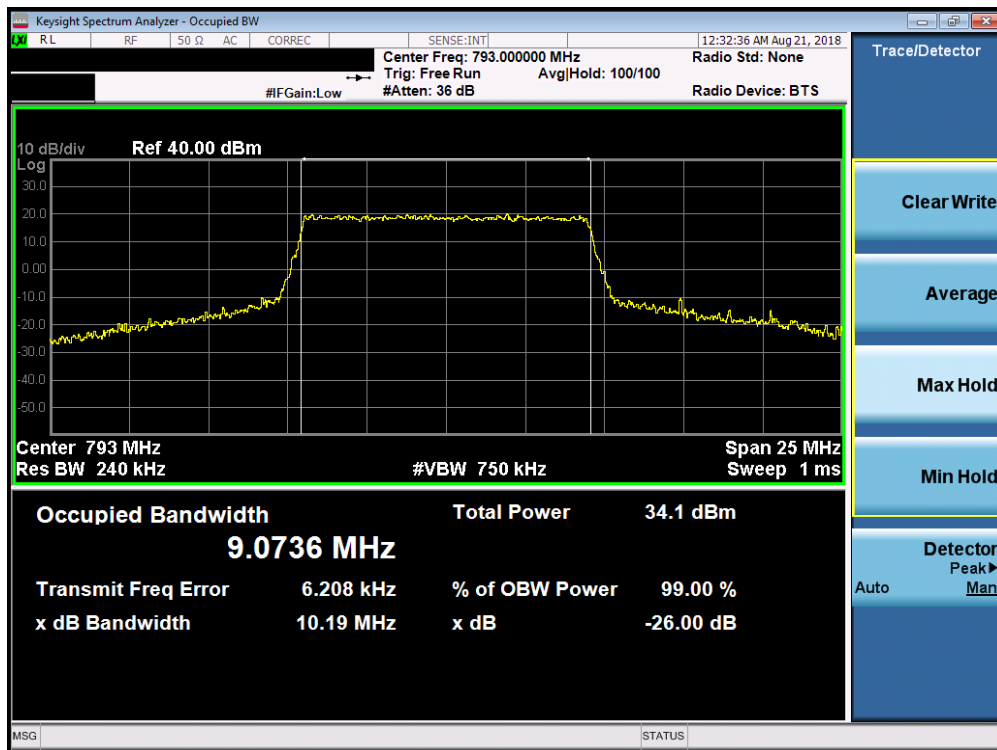


Plot 7-16. Occupied Bandwidth Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 21 of 63

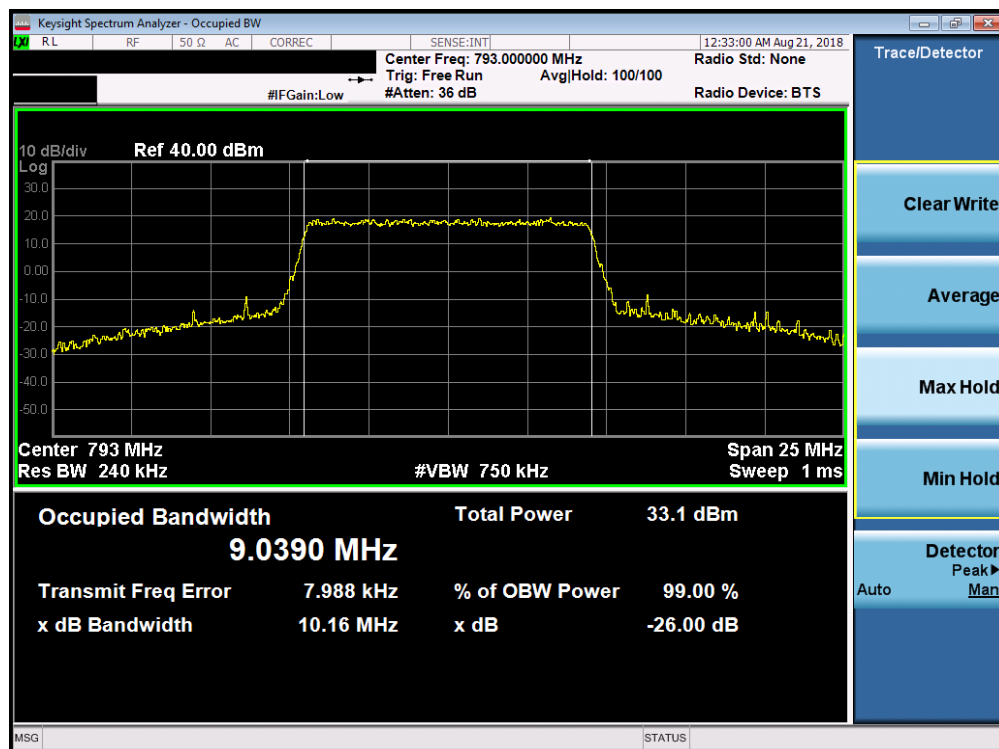

Plot 7-17. Occupied Bandwidth Plot (LTE Band 14, 10MHz 16-QAM – RB Size 50)

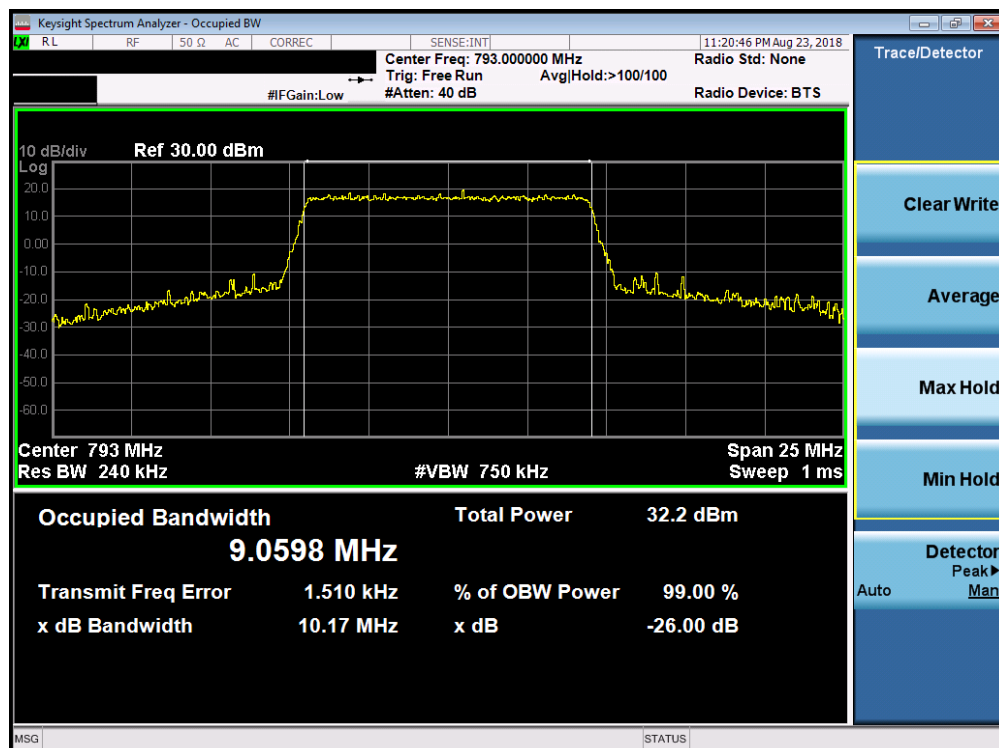

Plot 7-18. Occupied Bandwidth Plot (LTE Band 14, 10MHz 64-QAM – RB Size 50)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 22 of 63

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691(a)§90.543(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 1MHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

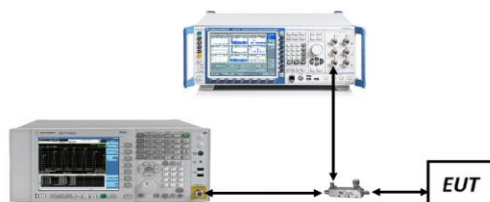



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 90. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 23 of 63

LTE Band 26

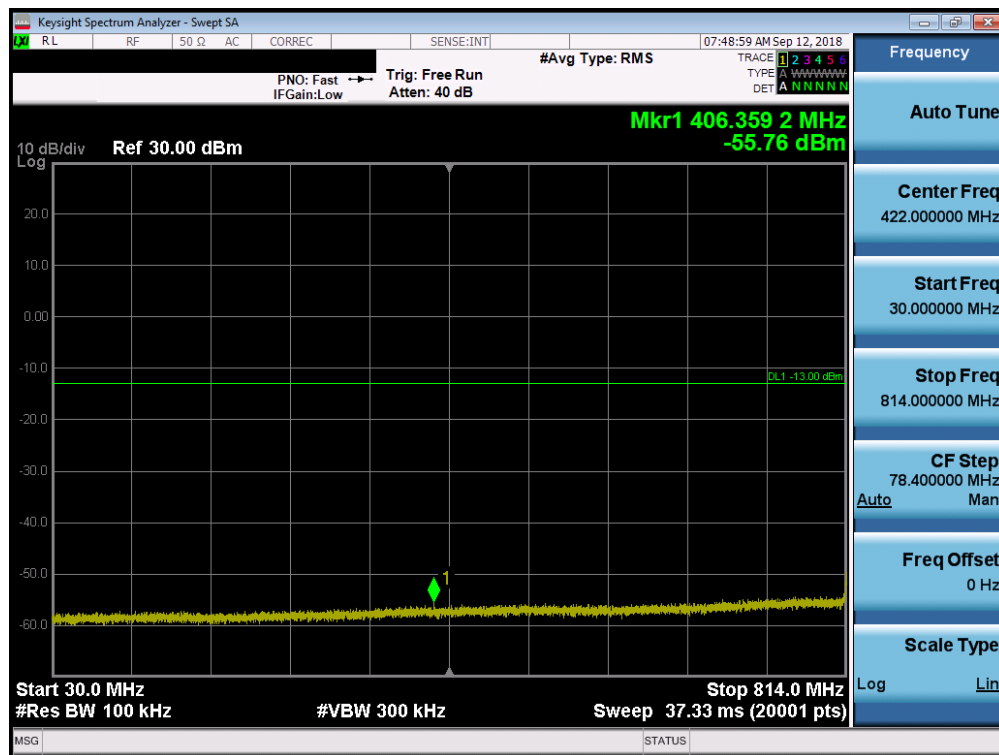


Plot 7-19. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

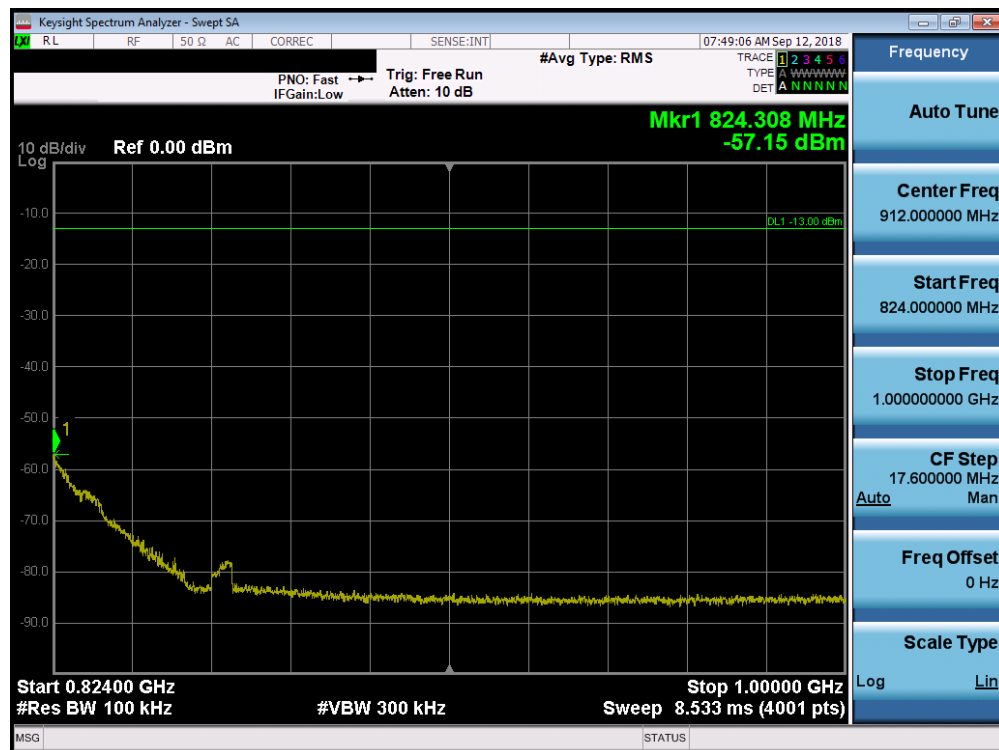


Plot 7-20. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 24 of 63

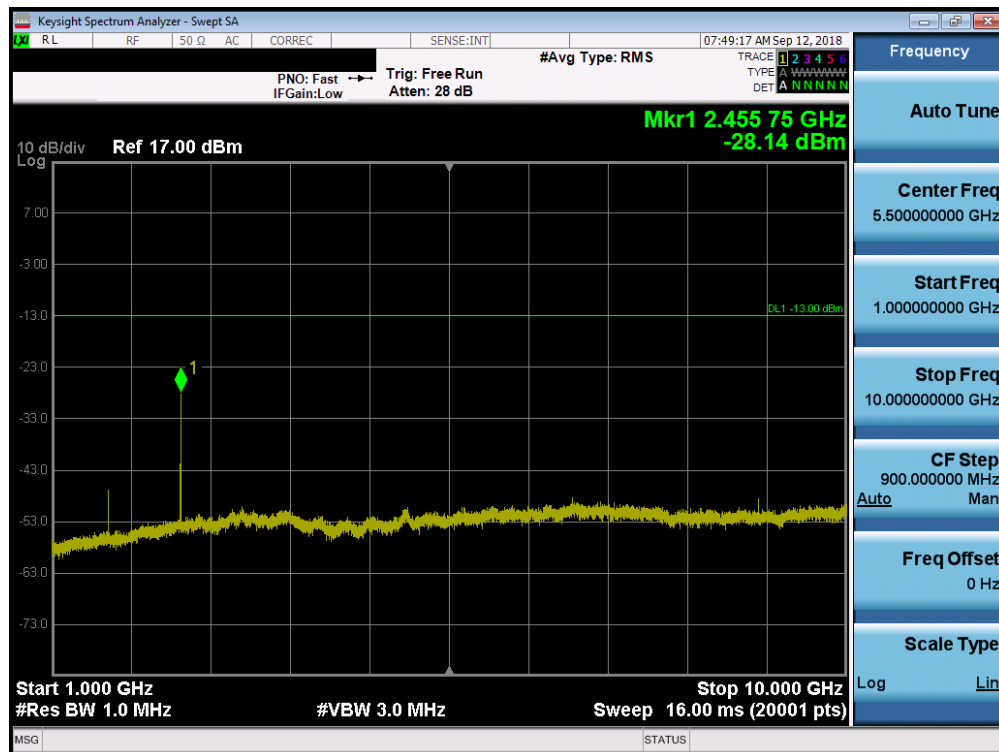


Plot 7-21. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

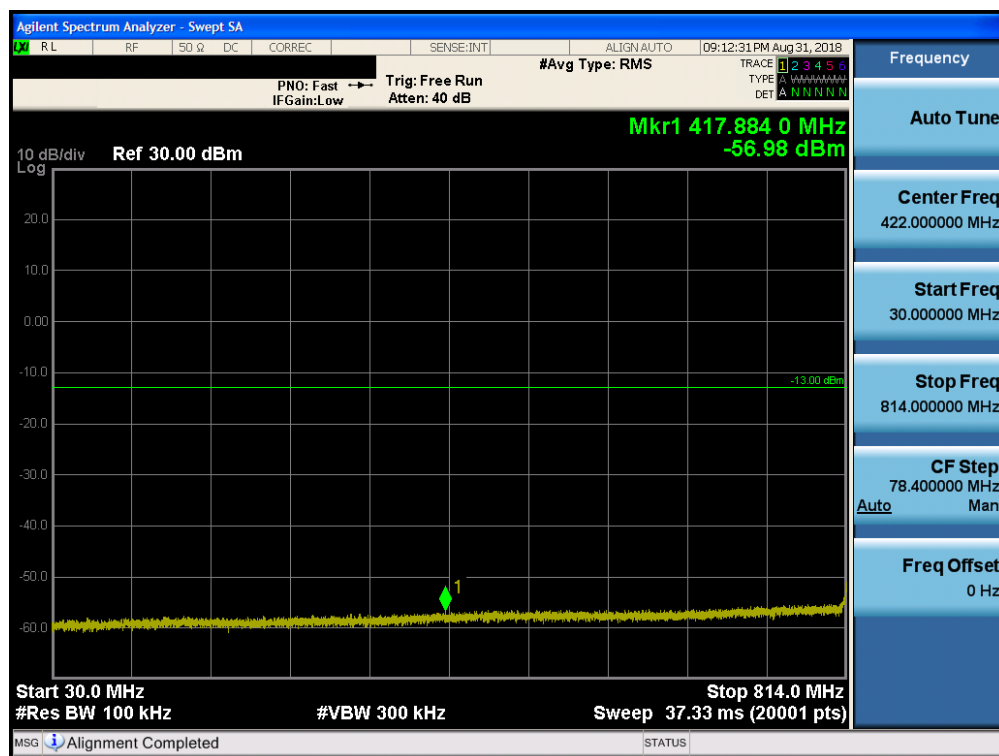


Plot 7-22. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 25 of 63

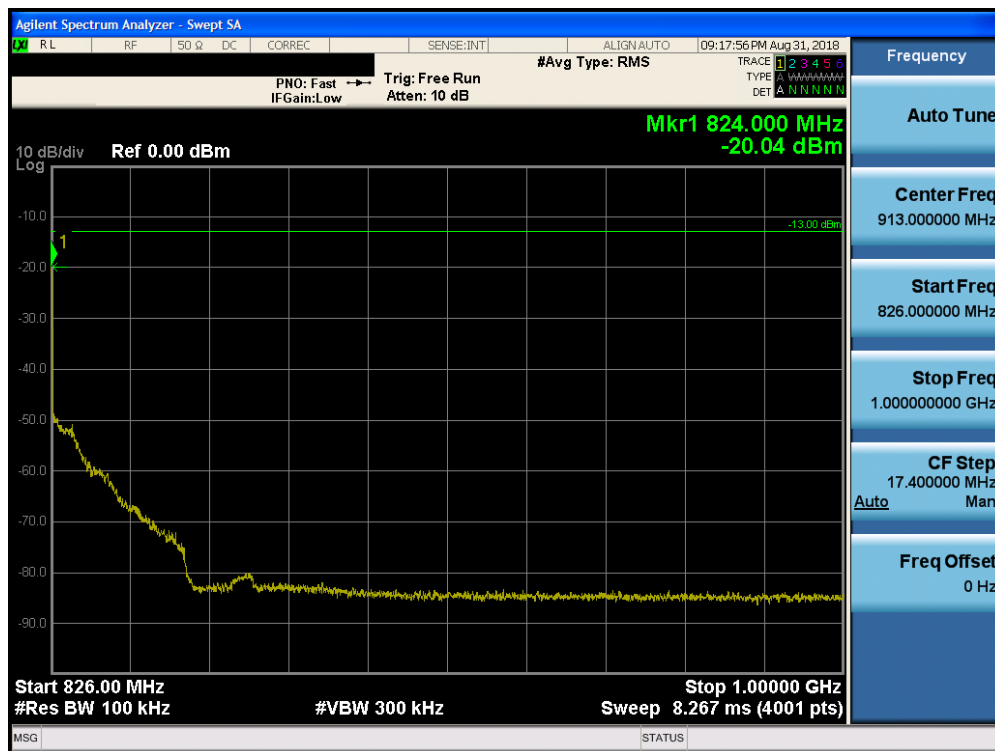


Plot 7-23. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

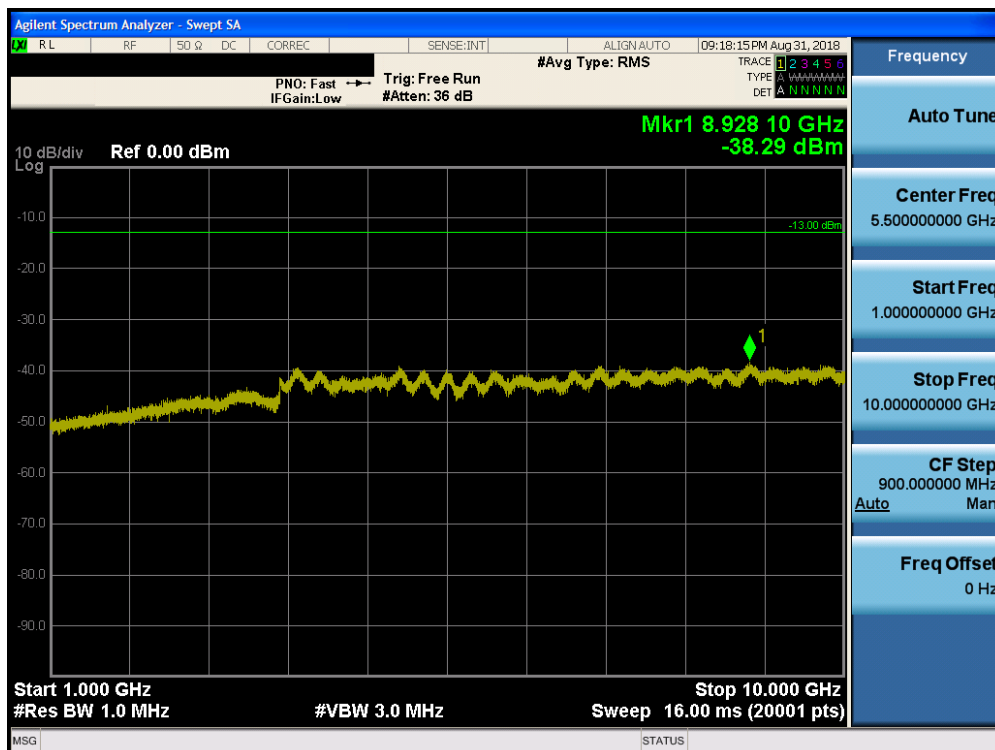


Plot 7-24. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 26 of 63

LTE Band 14

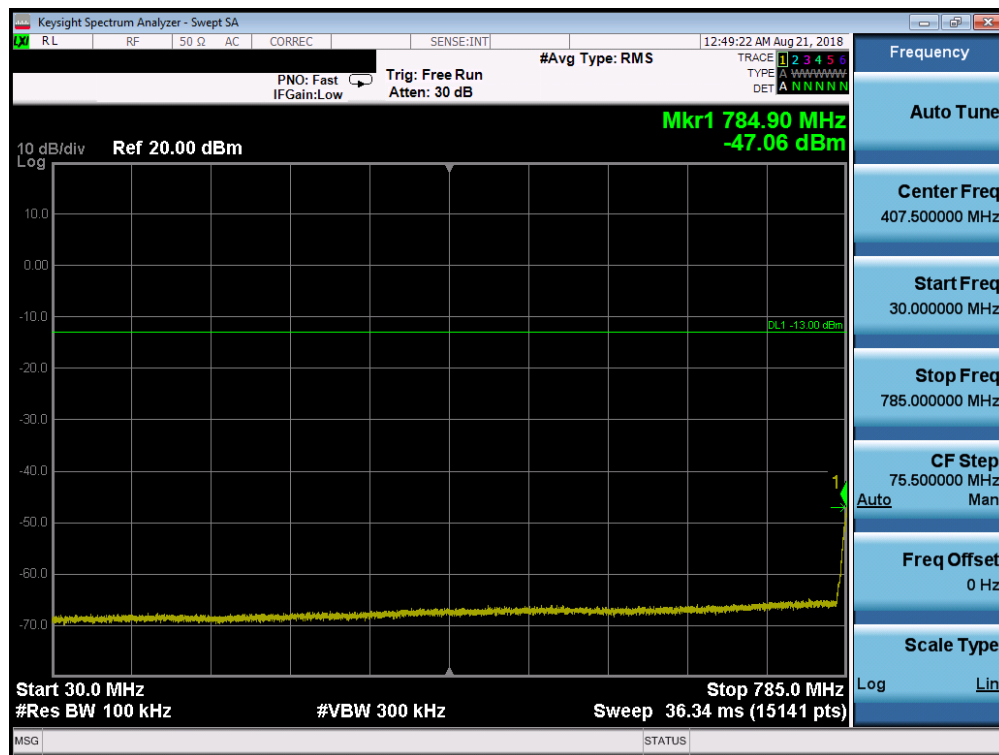


Plot 7-25. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

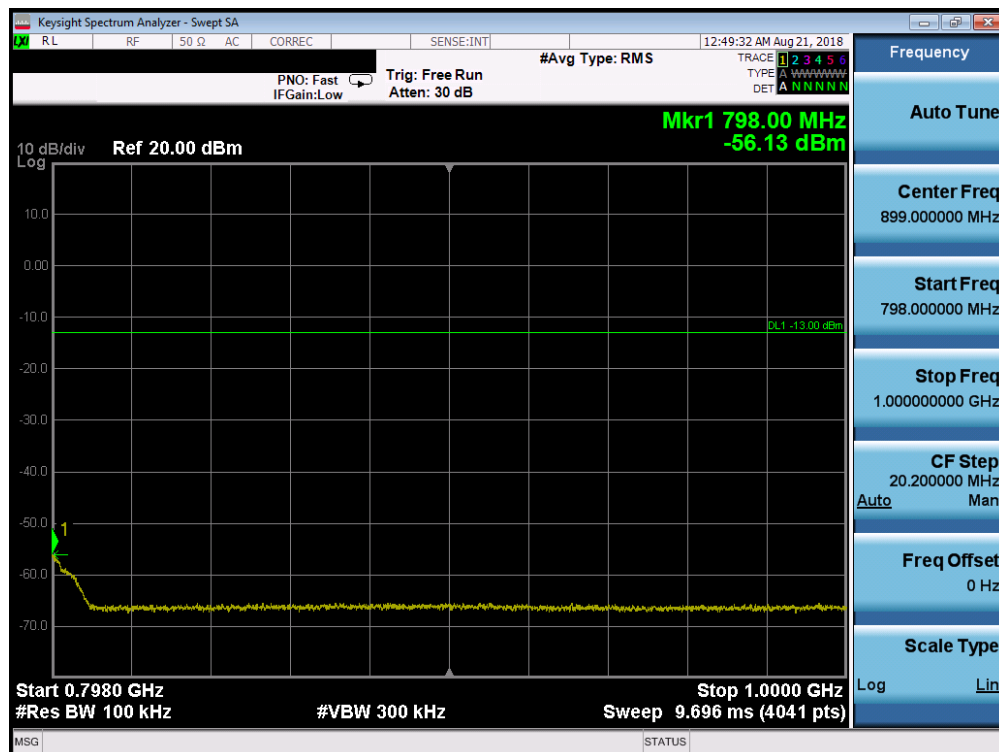


Plot 7-26. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 27 of 63

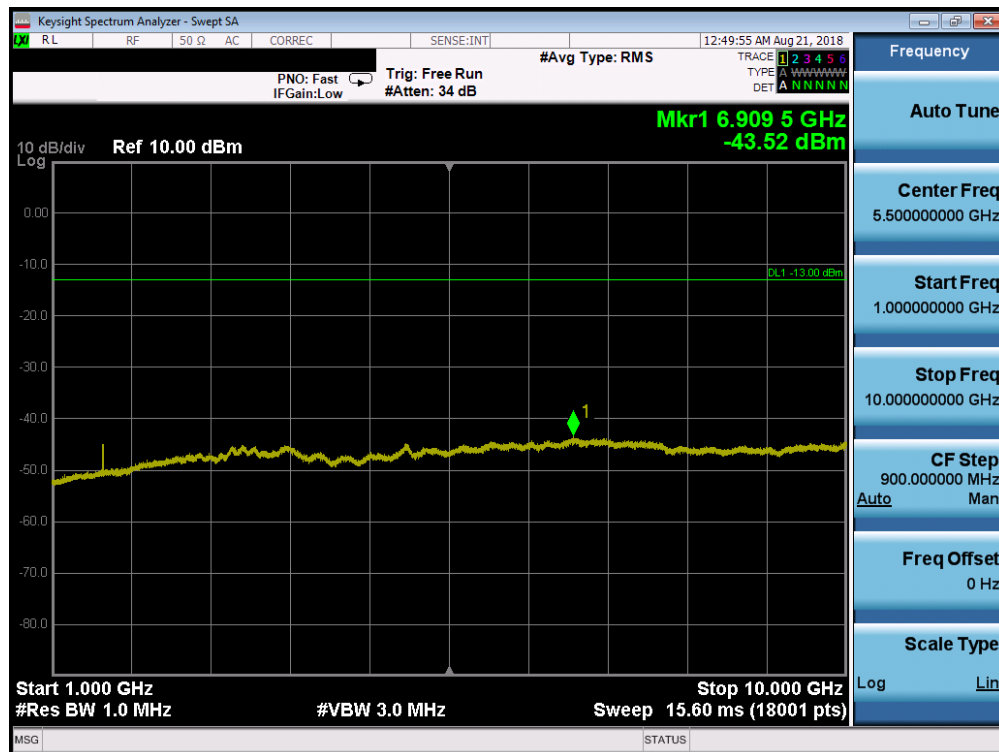


Plot 7-27. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

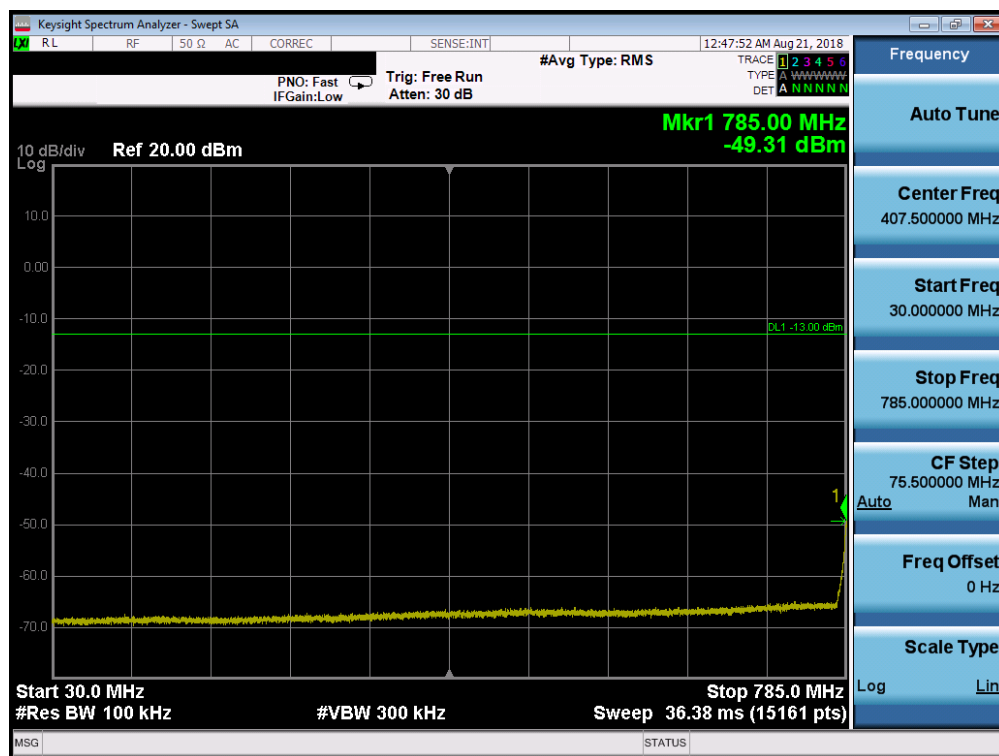


Plot 7-28. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 28 of 63

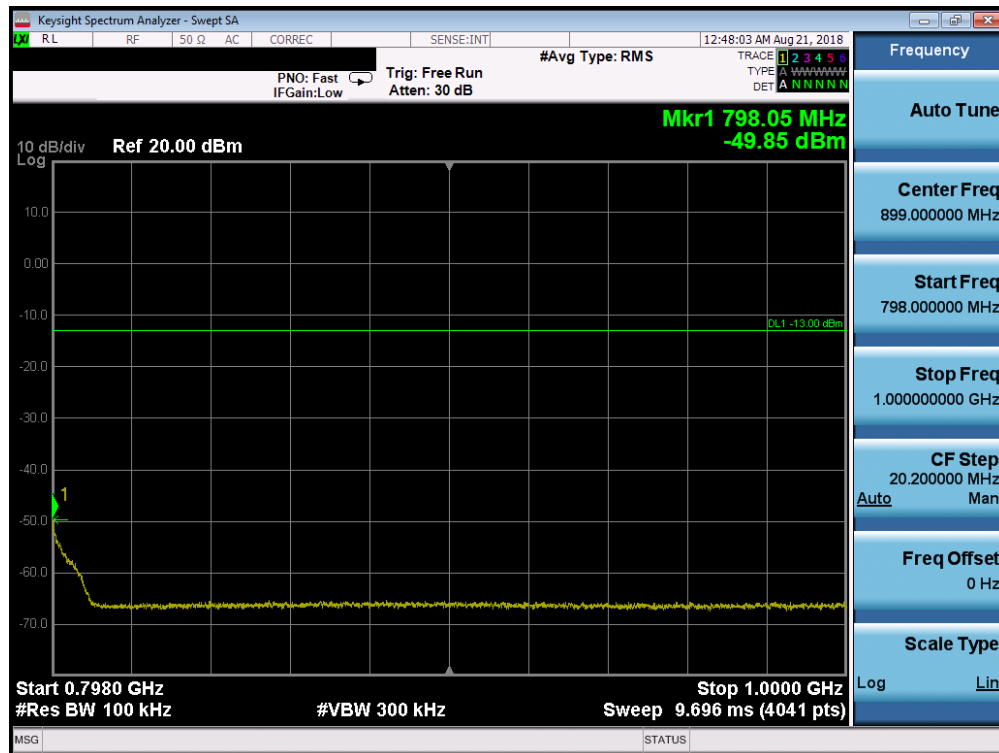

Plot 7-29. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

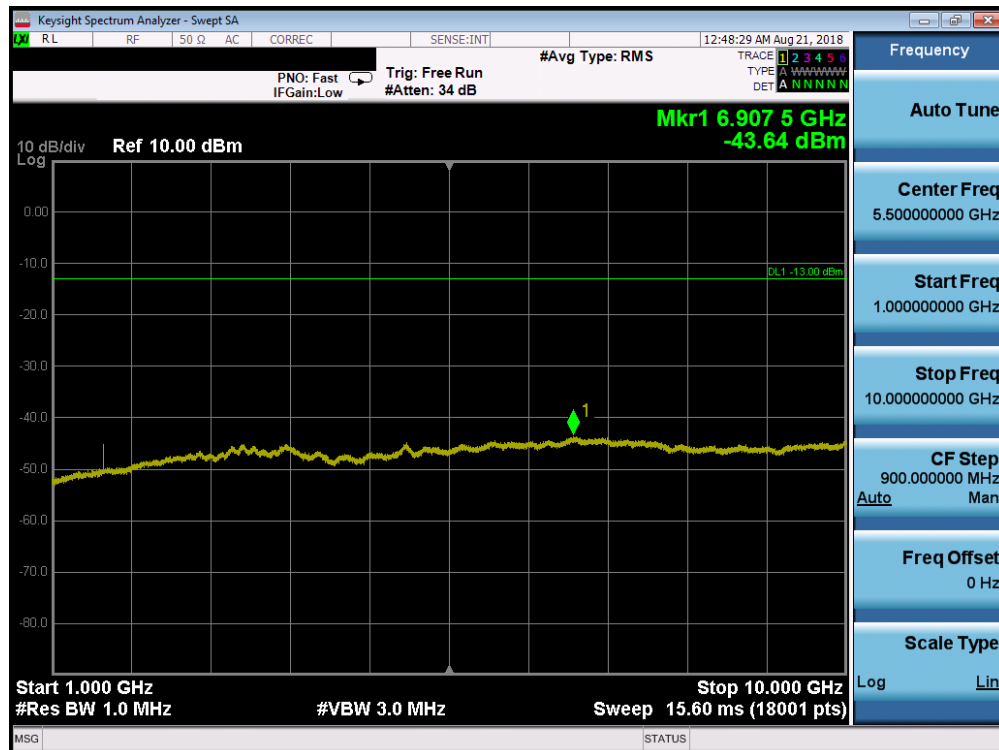


Plot 7-30. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 29 of 63




Plot 7-31. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

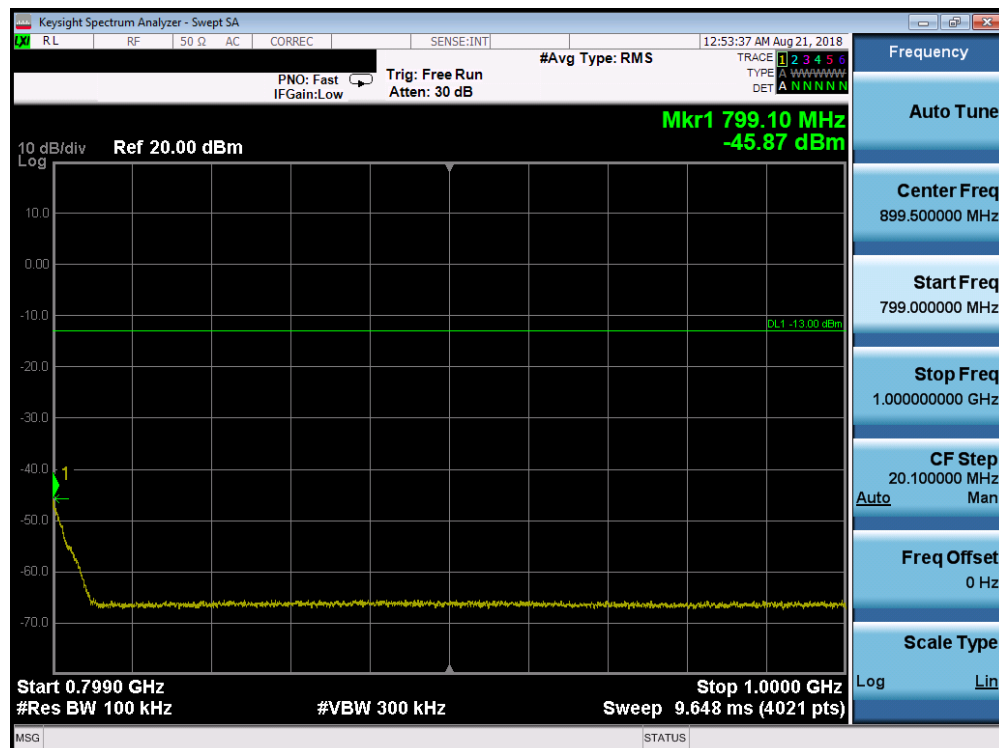

Plot 7-32. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 30 of 63

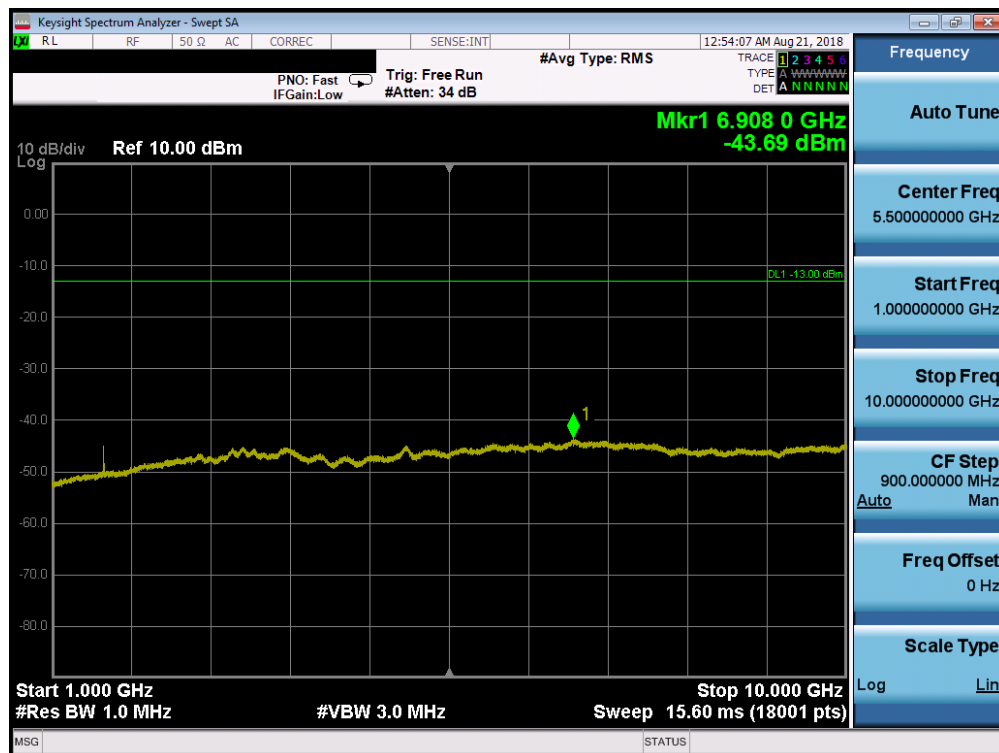

Plot 7-33. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 31 of 63

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90(S) §90(R)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


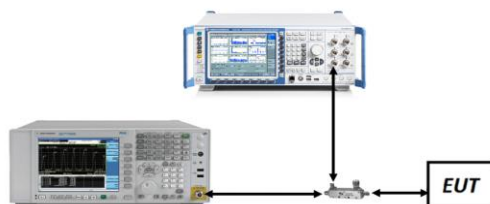


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

1. For channel edge emission, the signal analyzer's "ACP" measurement capability is used.
2. Per Part 90, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
3. All ports were tested and only the worst case data were reported.
4. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 32 of 63

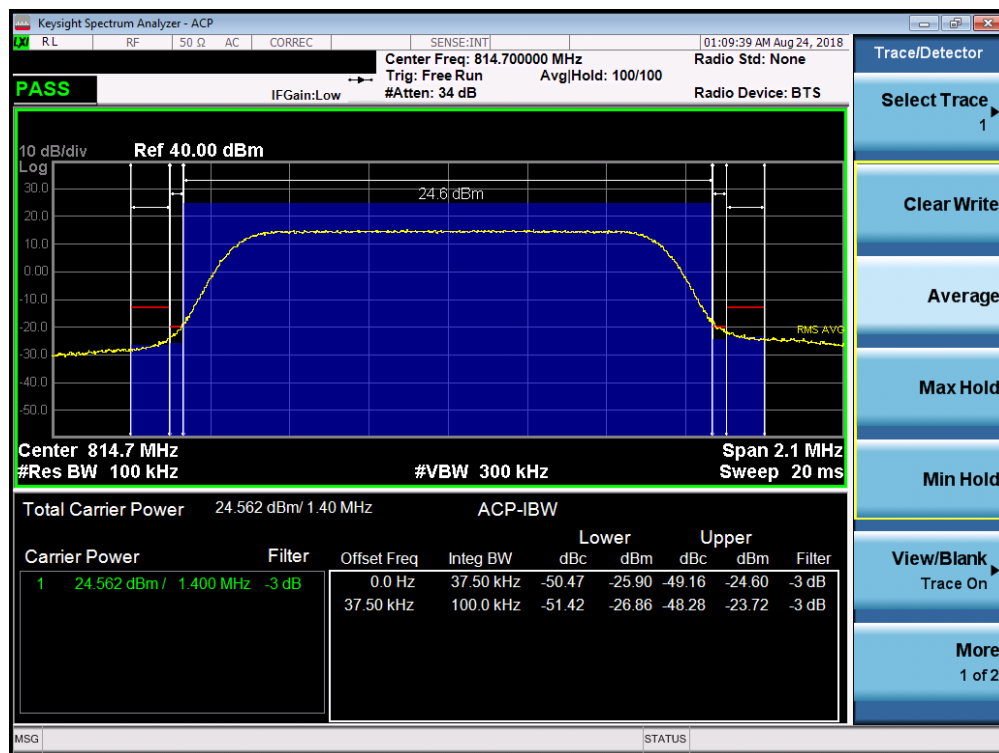


Plot 7-34. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– Low Channel)

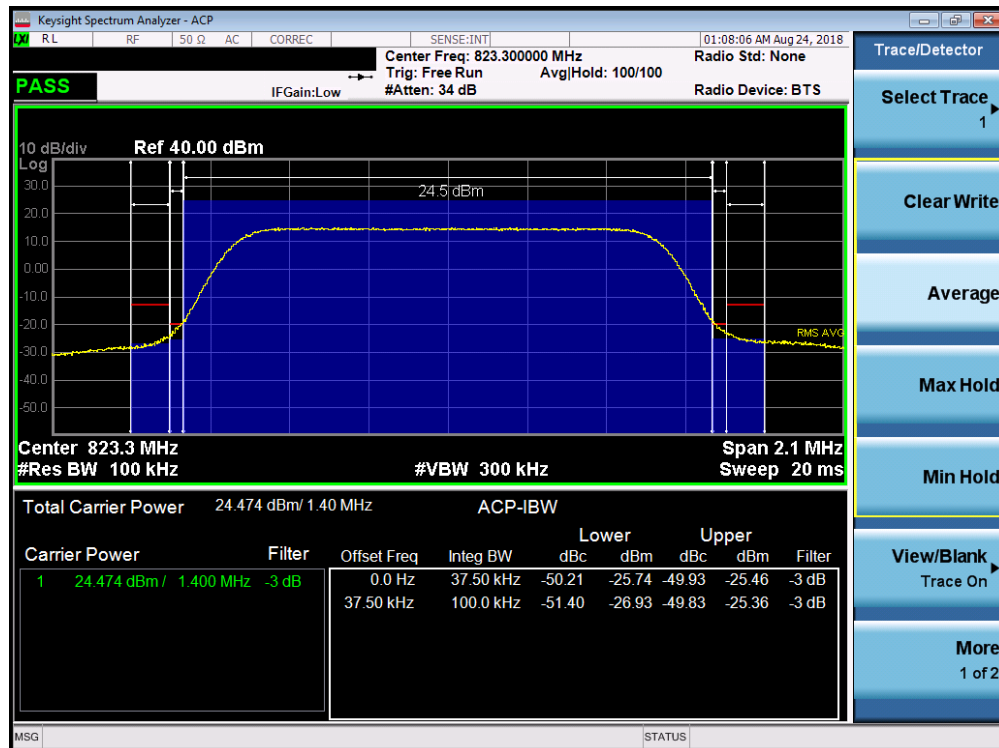


Plot 7-35. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6 – High Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 33 of 63

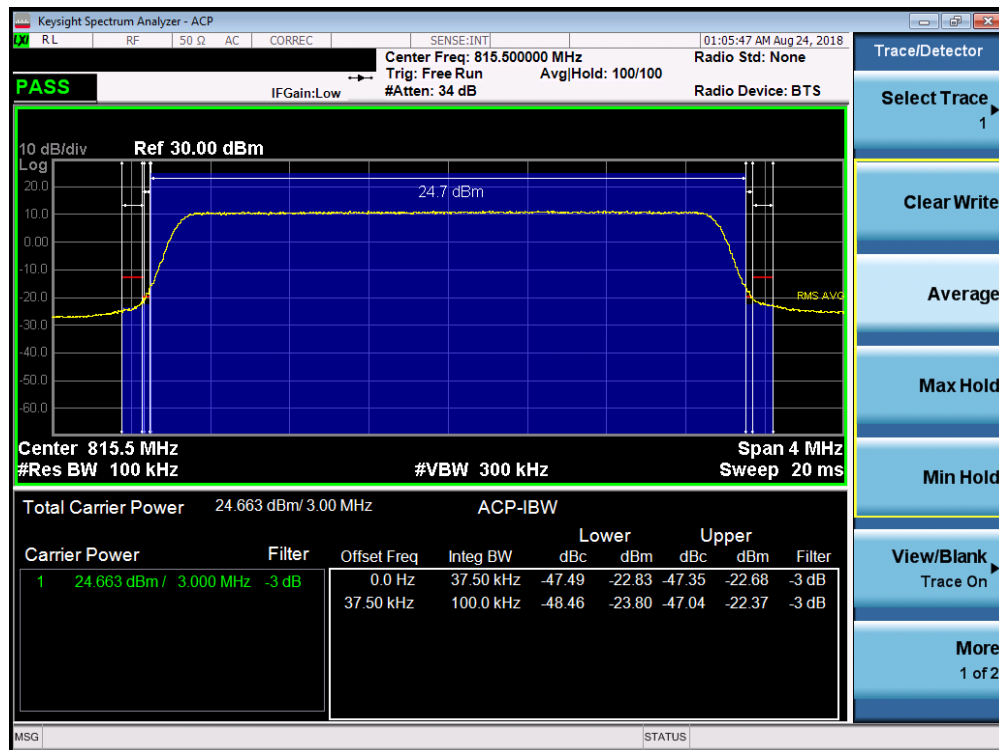


Plot 7-36. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

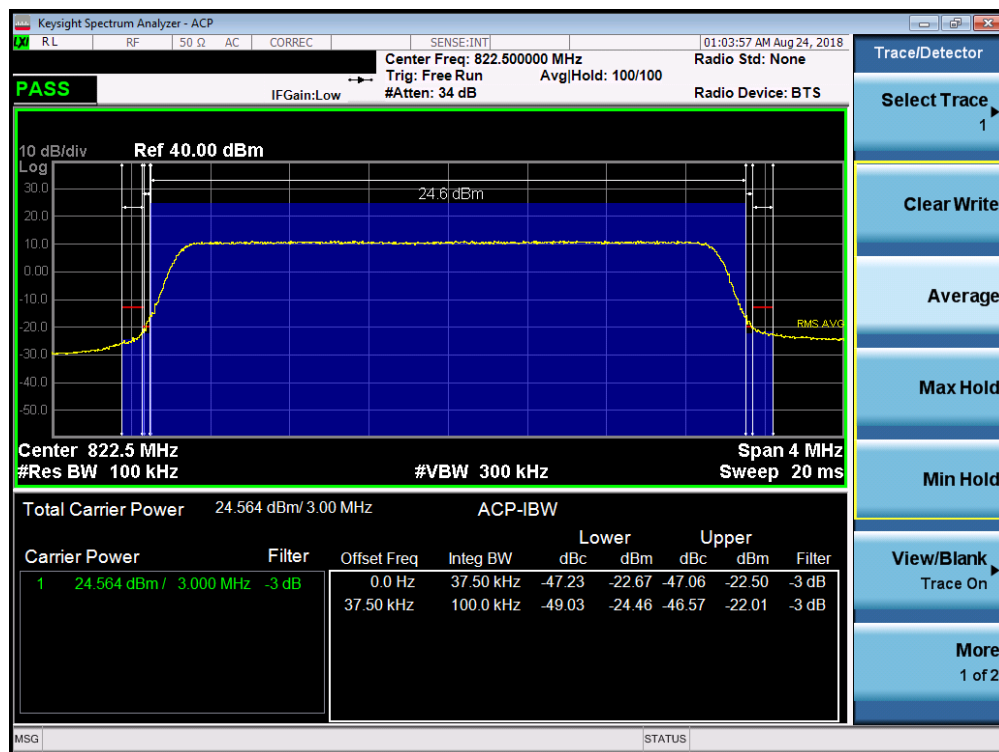


Plot 7-37. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15 – High Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 34 of 63

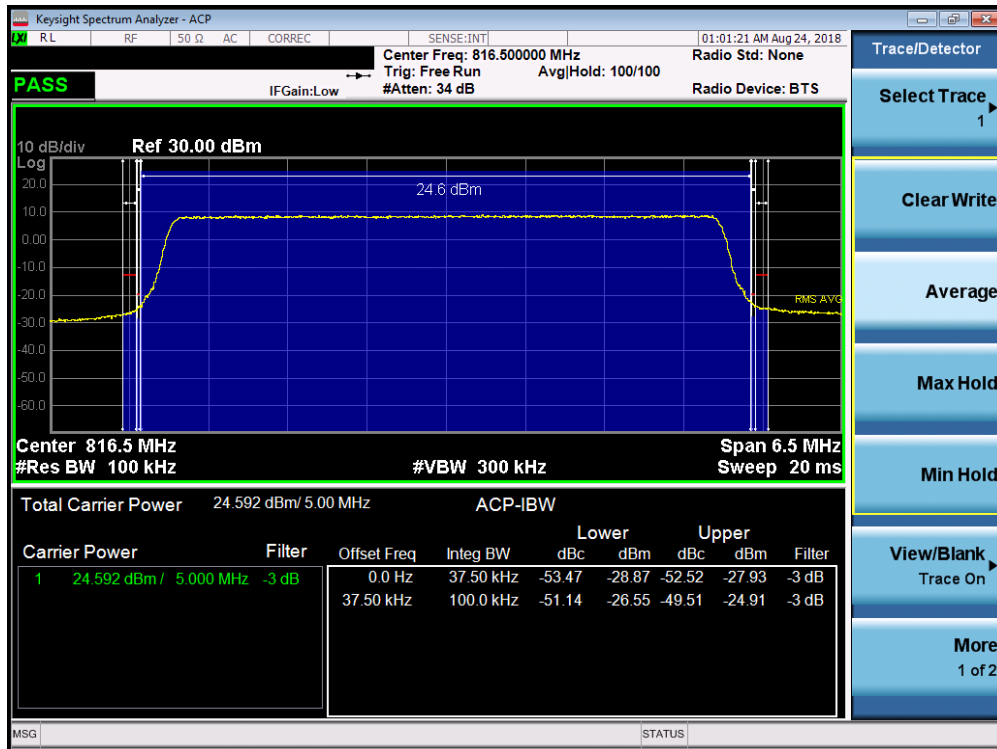


Plot 7-38. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

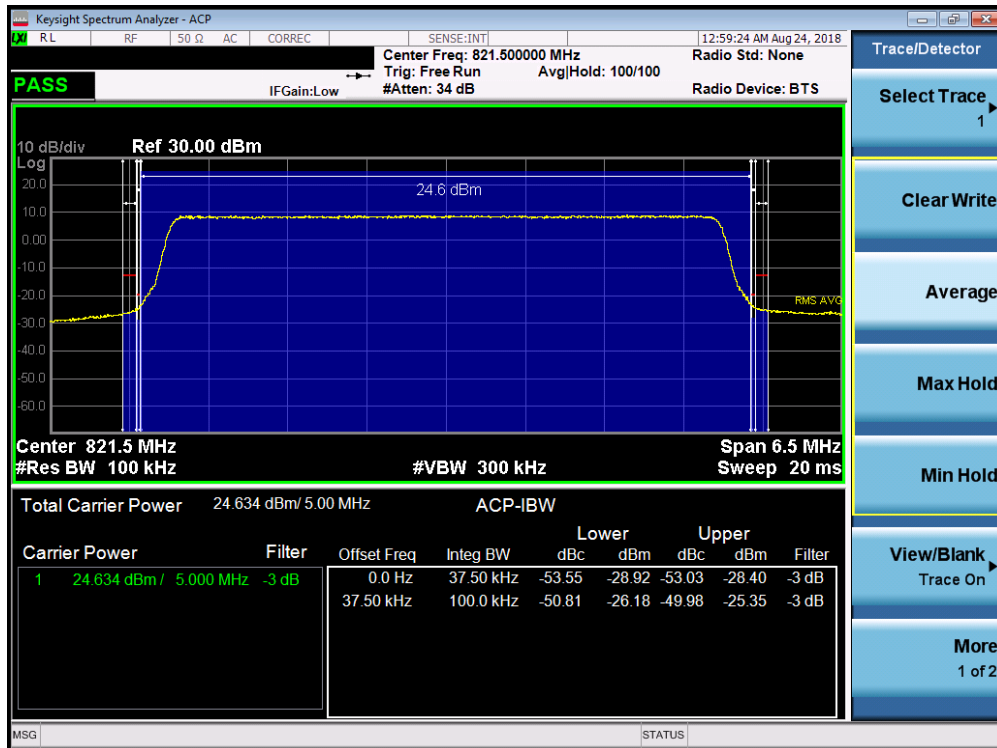


Plot 7-39. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25 – High Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 35 of 63

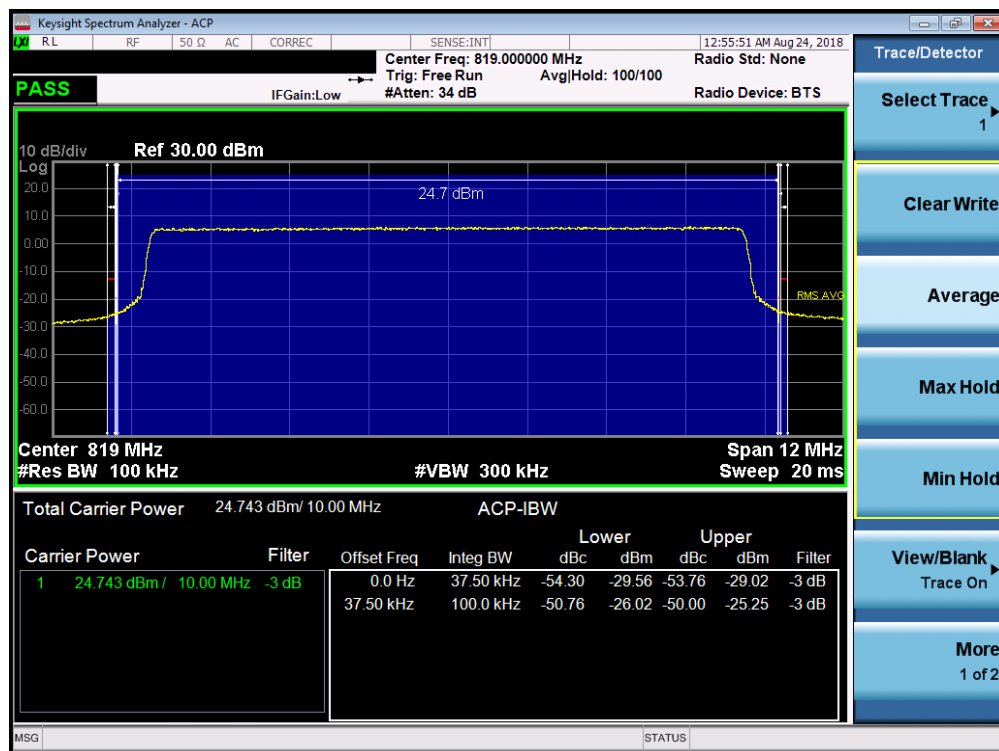


Plot 7-40. Channel Edge Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

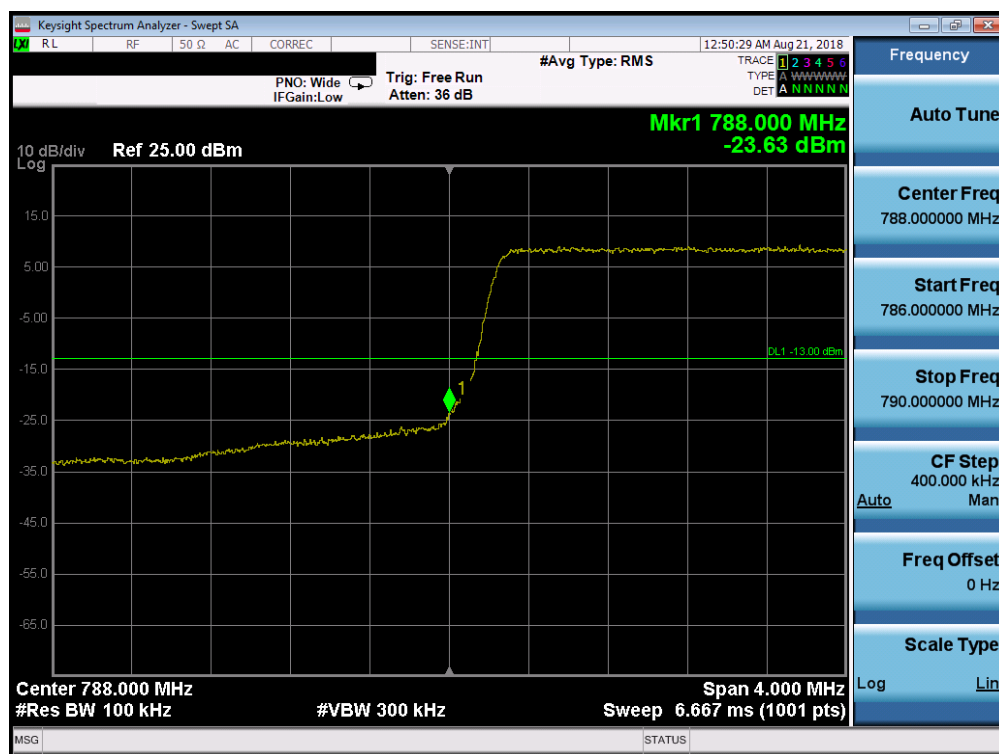


Plot 7-41. Lower Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 36 of 63

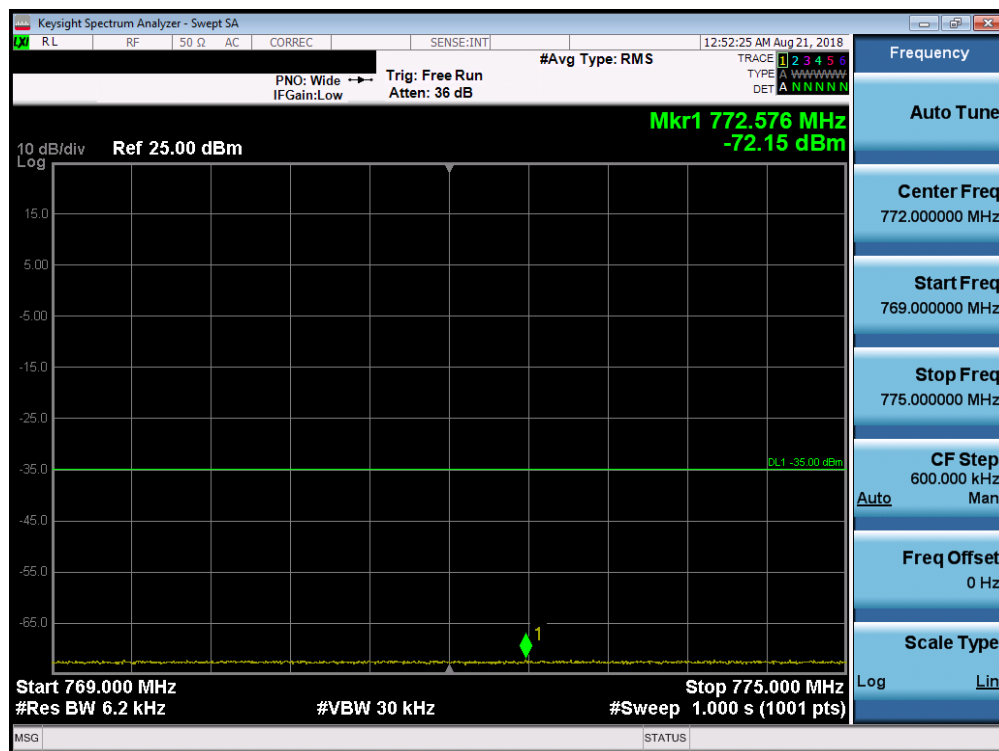


Plot 7-42. Lower Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

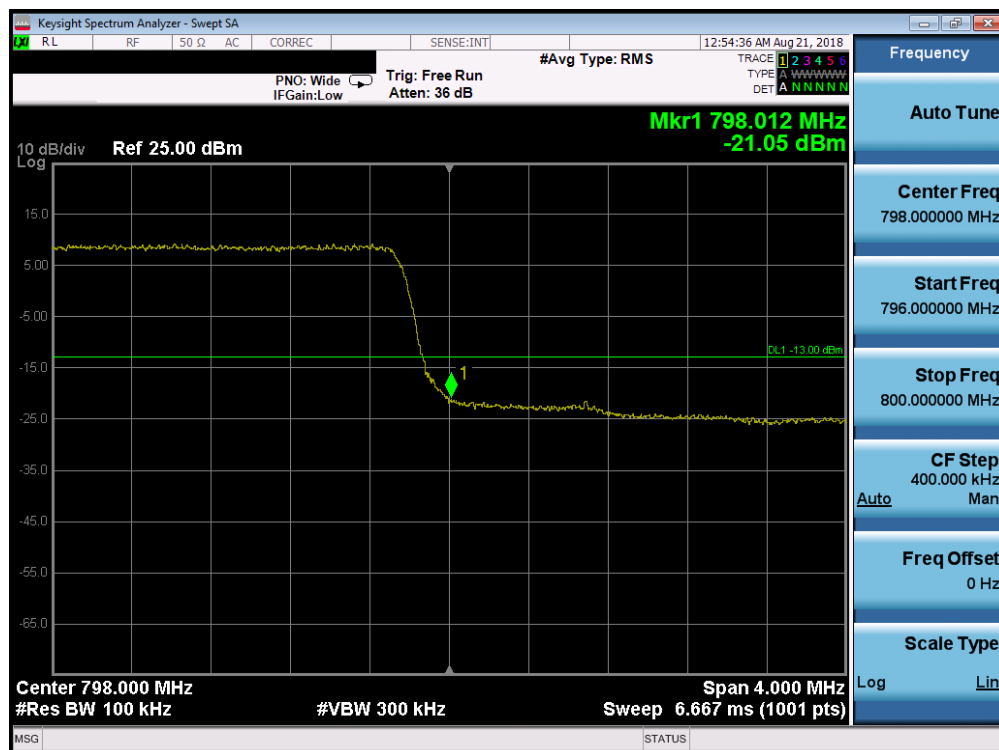


Plot 7-43. Upper Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 37 of 63

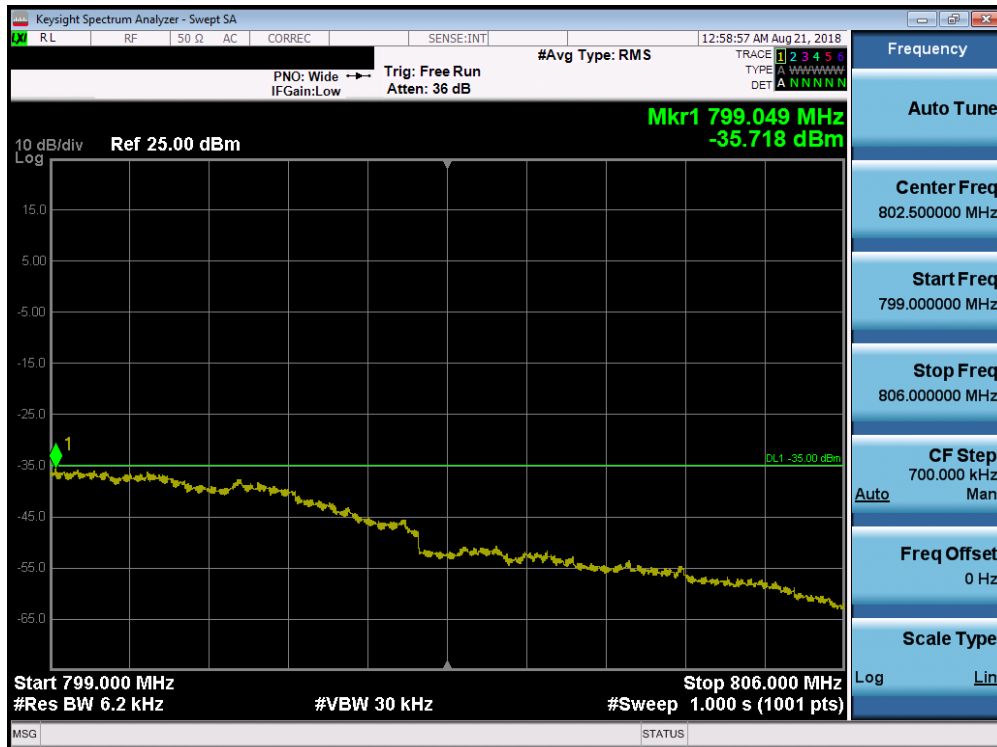


Plot 7-44. Upper Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

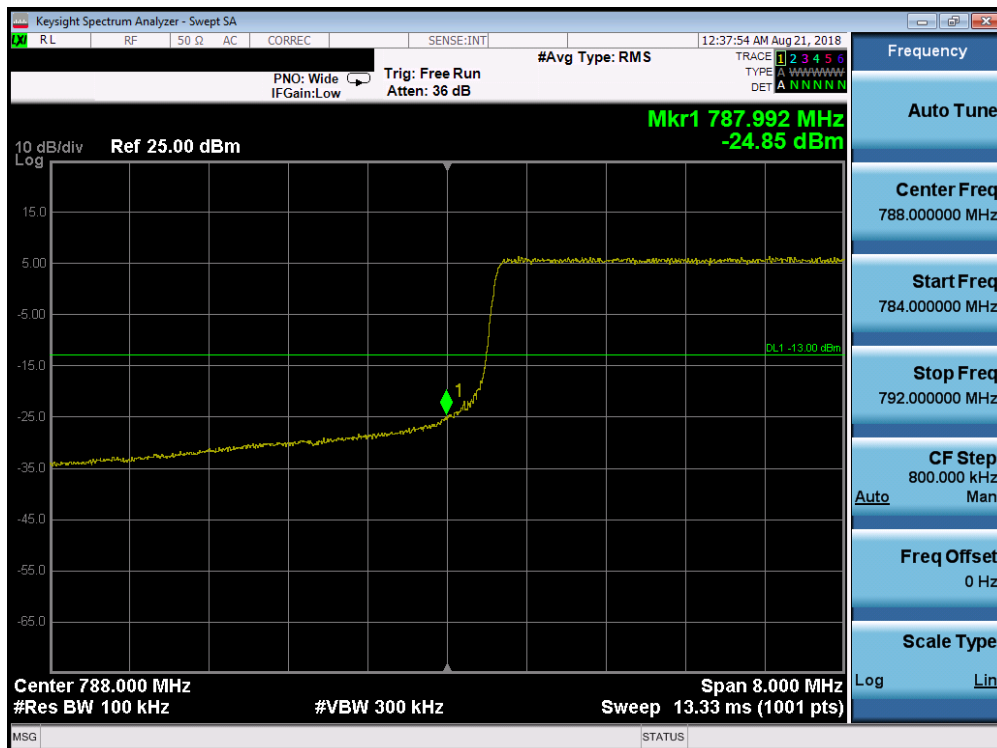


Plot 7-45. Lower Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 38 of 63

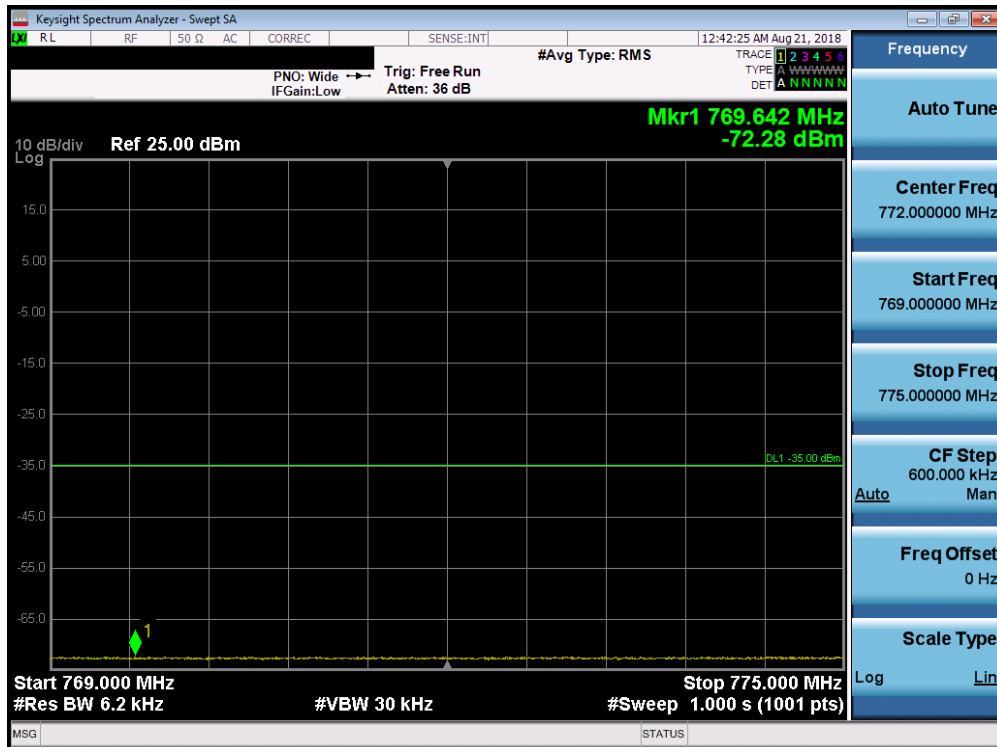

Plot 7-46. Lower Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

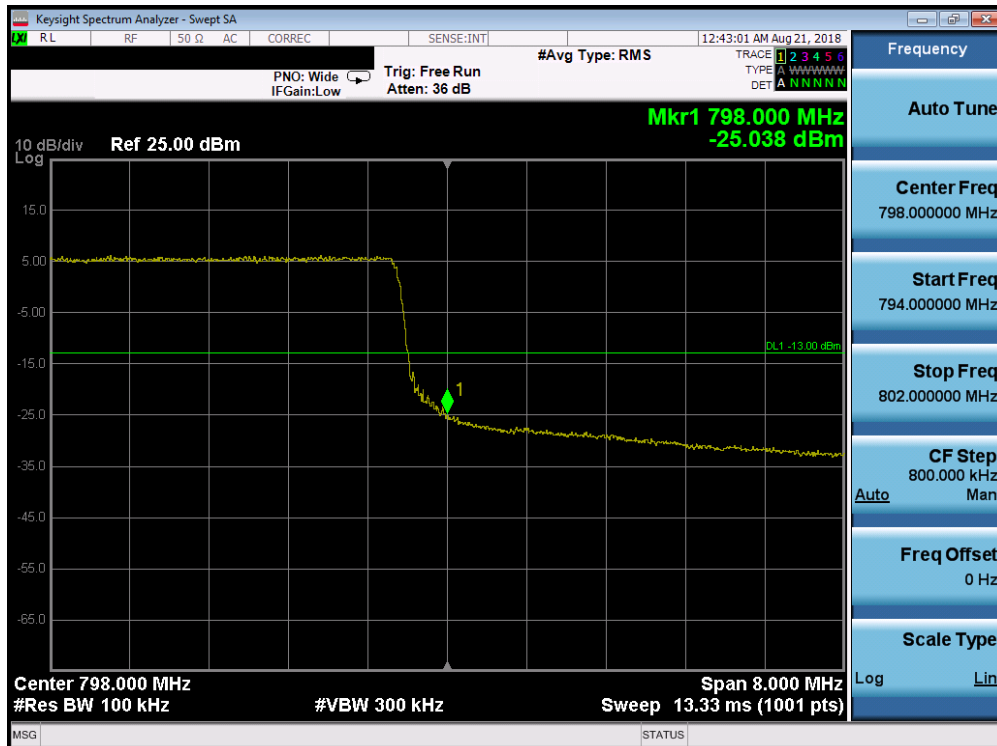

Plot 7-47. Upper Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 39 of 63



Plot 7-48. Upper Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 40 of 63

7.5 Conducted Power Output Data

\$2.1046 \$90.635

Test Overview

Conducted power measurements are performed to measure the average output power of the EUT. The averaging is to be performed only over duration of active transmissions at maximum output power level. The average measurements do not include averaging over periods when the transmitter is quiescent or when operating at reduced power level.

Test Procedures Used

KDB 971168 D01 v03

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Conducted Power Measurement Setup

Test Notes

- 1) The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 41 of 63

Port A

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	1 / 0	25.50	0.355	50.00	-24.50
823.30	1.4	QPSK	1 / 0	25.42	0.348	50.00	-24.58
814.70	1.4	16-QAM	1 / 3	24.85	0.305	50.00	-25.15
823.30	1.4	16-QAM	1 / 5	24.75	0.299	50.00	-25.25
814.70	1.4	64-QAM	1 / 0	23.90	0.245	50.00	-26.10
823.30	1.4	64-QAM	1 / 0	23.86	0.243	50.00	-26.14
815.50	3	QPSK	1 / 7	25.49	0.354	50.00	-24.51
822.50	3	QPSK	1 / 7	25.29	0.338	50.00	-24.71
815.50	3	16-QAM	1 / 7	24.79	0.301	50.00	-25.21
822.50	3	16-QAM	1 / 7	24.81	0.303	50.00	-25.19
815.50	3	64-QAM	1 / 14	23.77	0.238	50.00	-26.23
822.50	3	64-QAM	1 / 7	23.73	0.236	50.00	-26.27
816.50	5	QPSK	1 / 0	24.46	0.279	50.00	-25.54
821.50	5	QPSK	1 / 24	25.34	0.342	50.00	-24.66
816.50	5	16-QAM	1 / 0	24.63	0.290	50.00	-25.37
821.50	5	16-QAM	1 / 0	24.64	0.291	50.00	-25.36
816.50	5	64-QAM	1 / 24	23.85	0.243	50.00	-26.15
821.50	5	64-QAM	1 / 0	23.69	0.234	50.00	-26.31
819.00	10	QPSK	1 / 0	25.47	0.352	50.00	-24.53
819.00	10	16-QAM	1 / 25	24.81	0.303	50.00	-25.19
819.00	10	64-QAM	1 / 0	24.01	0.252	50.00	-25.99

Table 7-2. LTE Band 26 Conducted Power Output Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 42 of 63

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
790.50	5	QPSK	25.20	0.331	50.00	-24.80
793.00	5	QPSK	24.69	0.294	50.00	-25.31
795.50	5	QPSK	24.79	0.301	50.00	-25.21
790.50	5	16-QAM	24.57	0.286	50.00	-25.43
793.00	5	16-QAM	24.39	0.275	50.00	-25.61
795.50	5	16-QAM	24.30	0.269	50.00	-25.70
790.50	5	64-QAM	24.02	0.252	50.00	-25.98
793.00	5	64-QAM	24.04	0.254	50.00	-25.96
795.50	5	64-QAM	24.08	0.256	50.00	-25.92
793.00	10	QPSK	24.69	0.294	50.00	-25.31
793.00	10	16-QAM	24.19	0.262	50.00	-25.81
793.00	10	64-QAM	24.00	0.251	50.00	-26.00

Table 7-3. LTE Band 14 Conducted Power Output Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 43 of 63

Port B

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	1 / 0	23.63	0.231	50.00	-26.37
823.30	1.4	QPSK	1 / 3	23.72	0.236	50.00	-26.28
814.70	1.4	16-QAM	1 / 0	22.67	0.185	50.00	-27.33
823.30	1.4	16-QAM	1 / 0	23.02	0.200	50.00	-26.98
814.70	1.4	64-QAM	1 / 0	22.14	0.164	50.00	-27.86
823.30	1.4	64-QAM	1 / 5	22.24	0.167	50.00	-27.76
815.50	3	QPSK	1 / 7	23.46	0.222	50.00	-26.54
822.50	3	QPSK	1 / 7	23.75	0.237	50.00	-26.25
815.50	3	16-QAM	1 / 7	22.79	0.190	50.00	-27.21
822.50	3	16-QAM	1 / 14	23.07	0.203	50.00	-26.93
815.50	3	64-QAM	1 / 0	22.13	0.163	50.00	-27.87
822.50	3	64-QAM	1 / 7	22.13	0.163	50.00	-27.87
816.50	5	QPSK	1 / 0	23.53	0.225	50.00	-26.47
821.50	5	QPSK	1 / 24	23.68	0.233	50.00	-26.32
816.50	5	16-QAM	1 / 24	23.17	0.207	50.00	-26.83
821.50	5	16-QAM	1 / 0	23.01	0.200	50.00	-26.99
816.50	5	64-QAM	1 / 12	22.25	0.168	50.00	-27.75
821.50	5	64-QAM	1 / 24	22.25	0.168	50.00	-27.75
819.00	10	QPSK	1 / 49	23.66	0.232	50.00	-26.34
819.00	10	16-QAM	1 / 0	23.11	0.205	50.00	-26.89
819.00	10	64-QAM	1 / 0	22.12	0.163	50.00	-27.88

Table 7-4. LTE Band 26 Conducted Power Output Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 44 of 63

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
790.50	5	QPSK	23.83	0.242	50.00	-26.17
793.00	5	QPSK	23.41	0.219	50.00	-26.59
795.50	5	QPSK	23.49	0.223	50.00	-26.51
790.50	5	16-QAM	22.85	0.193	50.00	-27.15
793.00	5	16-QAM	22.91	0.195	50.00	-27.09
795.50	5	16-QAM	22.84	0.192	50.00	-27.16
790.50	5	64-QAM	22.27	0.169	50.00	-27.73
793.00	5	64-QAM	22.32	0.171	50.00	-27.68
795.50	5	64-QAM	22.37	0.173	50.00	-27.63
793.00	10	QPSK	23.59	0.229	50.00	-26.41
793.00	10	16-QAM	23.88	0.244	50.00	-26.12
793.00	10	64-QAM	22.23	0.167	50.00	-27.77

Table 7-5. LTE Band 14 Conducted Power Output Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 45 of 63

7.6 Radiated Power (ERP)

§90.542(a)(7)

Effective Radiated Power (ERP) is specified when the operating frequency is less than or equal to 1 GHz and Equivalent Isotropic Radiated Power (EIRP) is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.6

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 46 of 63

Port A

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
790.50	5	QPSK	1 / 0	25.20	-2.10	20.95	0.124	34.77	-13.82
793.00	5	QPSK	1 / 0	24.69	-2.10	20.44	0.111	34.77	-14.34
795.50	5	QPSK	1 / 0	24.79	-2.10	20.54	0.113	34.77	-14.23
790.50	5	16-QAM	1 / 0	24.57	-2.10	20.32	0.108	34.77	-14.45
795.50	5	64-QAM	1 / 0	24.08	-2.10	19.83	0.096	34.77	-14.94
793.00	10	QPSK	1 / 0	24.69	-2.10	20.44	0.111	34.77	-14.34
793.00	10	16-QAM	1 / 49	24.19	-2.10	19.94	0.099	34.77	-14.83
793.00	10	64-QAM	1 / 25	24.00	-2.10	19.75	0.094	34.77	-15.02

Table 7-49. ERP Data (Band 14)

Port B

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
790.50	5	QPSK	1 / 24	23.83	-4.20	17.48	0.056	34.77	-17.29
793.00	5	QPSK	1 / 24	23.41	-4.20	17.06	0.051	34.77	-17.71
795.50	5	QPSK	1 / 12	23.49	-4.20	17.14	0.052	34.77	-17.63
790.50	5	16-QAM	1 / 24	22.85	-4.20	16.50	0.045	34.77	-18.27
790.50	5	64-QAM	1 / 24	22.27	-4.20	15.92	0.039	34.77	-18.85
793.00	10	QPSK	1 / 25	23.64	-4.20	17.29	0.054	34.77	-17.48
793.00	10	16-QAM	1 / 0	22.89	-4.20	16.54	0.045	34.77	-18.23
793.00	10	64-QAM	1 / 25	22.17	-4.20	15.82	0.038	34.77	-18.95

Table 7-50. ERP Data (Band 14)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 47 of 63

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691(a) §90.543(e)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 48 of 63

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

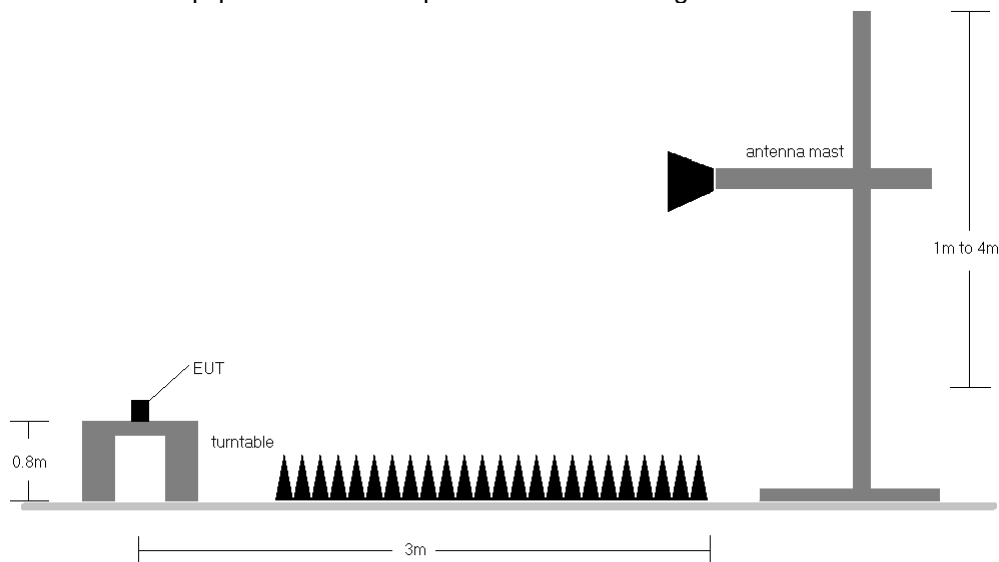



Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
4. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
5. Per 90.543(f), emissions in the 1559 – 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals. These emission measurements are shown in this section below.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 49 of 63

7.7.1 ANT 3 (Port A) Radiated Spurious Emissions Measurements

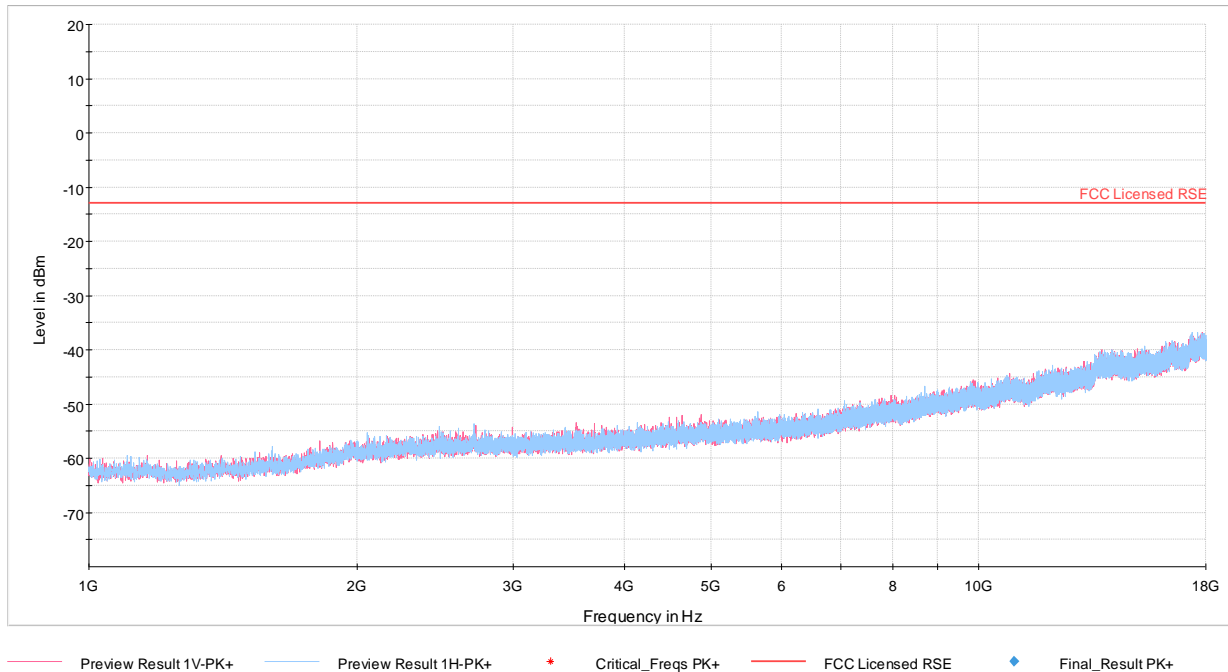

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 26697
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	-	-	-71.62	4.49	-67.13	-54.1
2444.10	H	117	178	-65.51	5.56	-59.95	-47.0
3258.80	H	-	-	-70.08	7.20	-62.88	-49.9
4073.50	H	-	-	-69.47	7.81	-61.66	-48.7

Table 7-6. Radiated Spurious Data (LTE Band 26 – Low Channel)


FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 50 of 63

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	-	-	-71.73	4.48	-67.25	-54.3
2469.90	H	102	341	-63.29	5.58	-57.72	-44.7
3293.20	H	-	-	-69.89	7.22	-62.67	-49.7
4116.50	H	-	-	-69.55	7.76	-61.80	-48.8

Table 7-7. Radiated Spurious Data (LTE Band 26 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 51 of 63

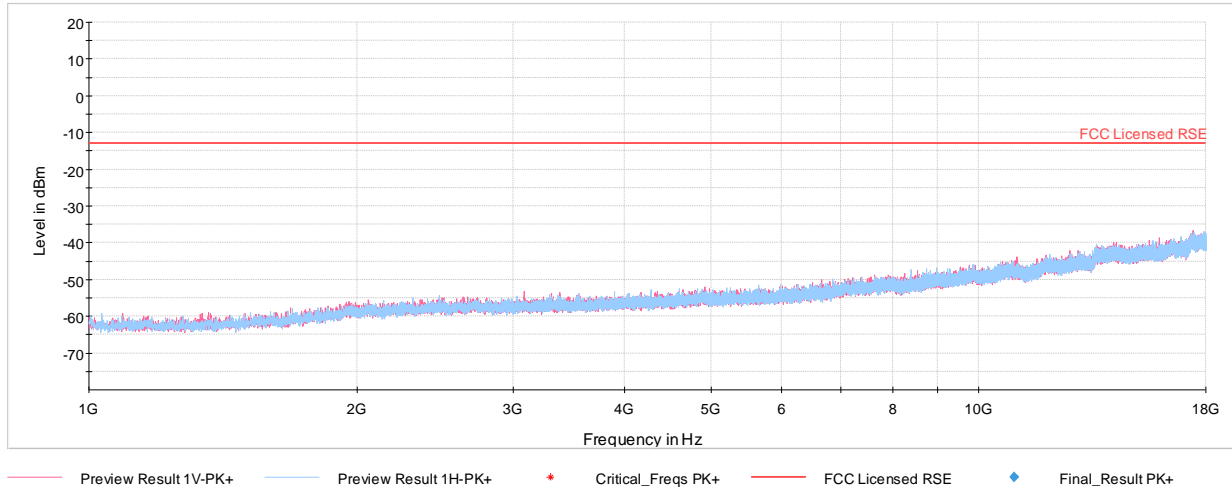

Plot 7-52. Radiated Spurious Plot above 1GHz (Band 14)

OPERATING FREQUENCY: 790.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	220	354	-71.23	4.53	-66.70	-53.7
2371.50	H	195	359	-68.97	5.50	-63.47	-50.5
3162.00	H	-	-	-70.15	6.82	-63.32	-50.3
3952.50	H	-	-	-70.54	7.77	-62.77	-49.8
4743.00	H	-	-	-69.21	7.71	-61.50	-48.5

Table 7-8. Radiated Spurious Data (LTE Band 14 – Low Channel)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 52 of 63

OPERATING FREQUENCY: 793.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1586.00	H	268	175	-71.55	4.53	-67.02	-54.0
2379.00	H	-	-	-68.83	5.51	-63.32	-50.3
3172.00	H	-	-	-69.22	6.87	-62.35	-49.4
3965.00	H	-	-	-70.18	7.80	-62.37	-49.4

Table 7-9. Radiated Spurious Data (LTE Band 14 – Mid Channel)

OPERATING FREQUENCY: 795.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1591.00	H	175	360	-70.82	4.52	-66.30	-53.3
2386.50	H	244	368	-69.40	5.51	-63.89	-50.9
3182.00	H	-	-	-69.91	6.91	-63.00	-50.0
3977.50	H	-	-	-70.53	7.84	-62.69	-49.7
4773.00	H	-	-	-69.18	7.75	-61.44	-48.4

Table 7-10. Radiated Spurious Data (LTE Band 14 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 53 of 63

MODULATION SIGNAL:	QPSK
BANDWIDTH:	5.00 MHz
DISTANCE:	3 meters
NARROWBAND EMISSION LIMIT:	-50 dBm
WIDEBAND EMISSION LIMIT:	-40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	220	354	-71.23	4.53	-66.70	-26.7
1586.00	H	268	175	-71.55	4.53	-67.02	-27.0
1591.00	H	244	368	-72.64	4.52	-68.12	-28.1

Table 7-11. Radiated Spurious Data (Band 14 – 1559-1610MHz Band)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 54 of 63

7.7.2 ANT 1 (Port B) Radiated Spurious Emissions Measurements

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 34837
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	-	-	-71.79	4.49	-67.30	-54.3
2444.10	H	102	354	-62.67	5.56	-57.11	-44.1
3258.80	H	-	-	-70.16	7.20	-62.96	-50.0
4073.50	H	-	-	-69.73	7.81	-61.92	-48.9

Table 7-12. Radiated Spurious Data (LTE Band 26 – Low Channel)

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	-	-	-71.39	4.48	-66.91	-53.9
2469.90	H	-	-	-69.00	5.58	-63.43	-50.4
3293.20	H	-	-	-70.14	7.22	-62.92	-49.9

Table 7-13. Radiated Spurious Data (LTE Band 26 – High Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 55 of 63

OPERATING FREQUENCY: 790.50 MHz
 CHANNEL: 23305
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	-	-	-71.54	4.53	-67.01	-54.0
2371.50	H	103	348	-67.16	5.50	-61.66	-48.7
3162.00	H	-	-	-69.61	6.82	-62.78	-49.8
3952.50	H	-	-	-70.14	7.77	-62.37	-49.4

Table 7-14. Radiated Spurious Data (LTE Band 14 – Low Channel)

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1586.00	H	-	-	-71.33	4.53	-66.80	-53.8
2379.00	H	-	-	-68.93	5.51	-63.42	-50.4
3172.00	H	-	-	-71.19	6.87	-64.32	-51.3

Table 7-15. Radiated Spurious Data (LTE Band 14 – Mid Channel)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 56 of 63

OPERATING FREQUENCY: 795.50 MHz
 CHANNEL: 23355
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1591.00	H	-	-	-71.42	4.52	-66.90	-53.9
2386.50	H	154	351	-67.41	5.51	-61.90	-48.9
3182.00	H	-	-	-69.70	6.91	-62.79	-49.8
3977.50	H	-	-	-70.10	7.84	-62.26	-49.3

Table 7-16. Radiated Spurious Data (LTE Band 14 – High Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	-	-	-71.54	4.53	-67.01	-27.0
1586.00	H	-	-	-71.33	4.53	-66.80	-26.8
1591.00	H	-	-	-71.42	4.52	-66.90	-26.9

Table 7-17. Radiated Spurious Data (Band 14 – 1559-1610MHz Band)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 57 of 63

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 58 of 63

Frequency Stability / Temperature Variation

\$2.1055

OPERATING FREQUENCY:	819,000,000	Hz
CHANNEL:	26740	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	818,999,973	-27	-0.0000033
100 %		- 20	819,000,020	20	0.0000024
100 %		- 10	818,999,962	-38	-0.0000047
100 %		0	818,999,961	-40	-0.0000048
100 %		+ 10	819,000,032	32	0.0000038
100 %		+ 20	819,000,025	25	0.0000031
100 %		+ 30	819,000,038	38	0.0000047
100 %		+ 40	819,000,006	6	0.0000008
100 %		+ 50	819,000,032	32	0.0000038
BATT. ENDPOINT	3.40	+ 20	819,000,005	5	0.0000007

Table 7-18. LTE Band 26 Frequency Stability Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 59 of 63

Frequency Stability / Temperature Variation

\$2.1055

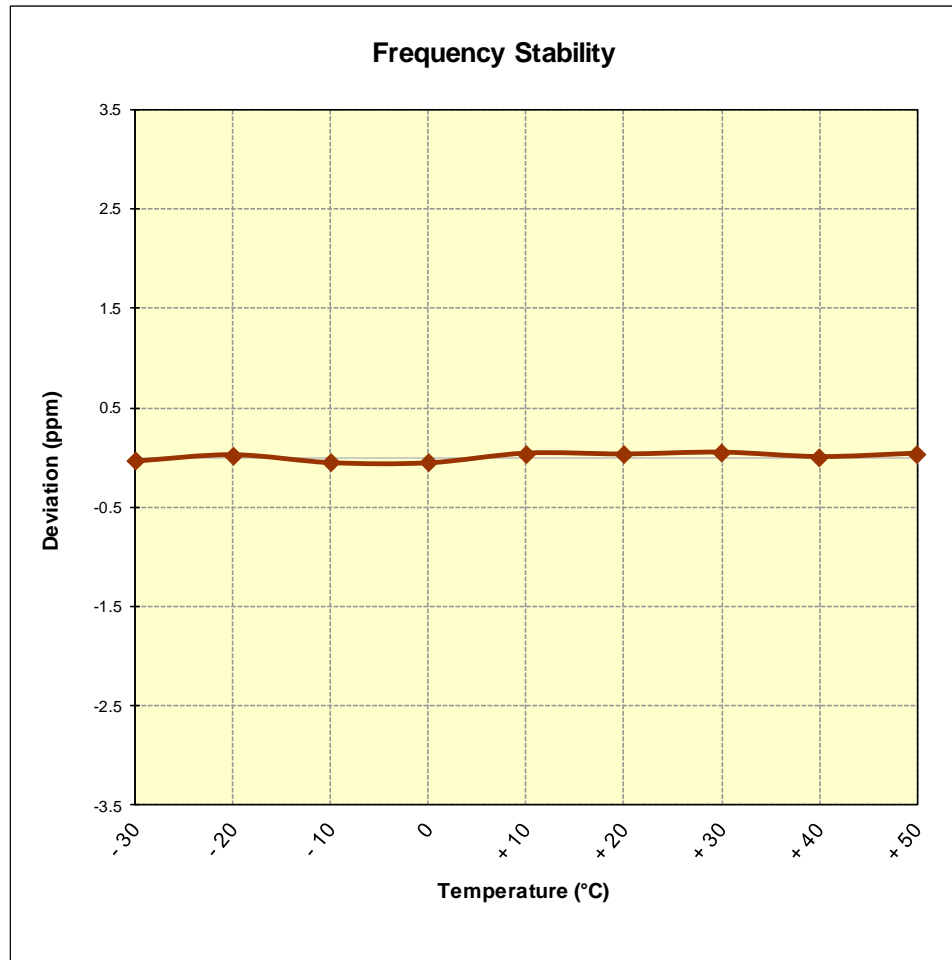


Table 7-19. LTE Band 26 Frequency Stability Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 60 of 63

Frequency Stability / Temperature Variation

\$2.1055, \$90.213

OPERATING FREQUENCY:	793,000,000	Hz
CHANNEL:	23330	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	793,000,008	8	0.0000010
100 %		- 20	793,000,008	8	0.0000010
100 %		- 10	793,000,008	8	0.0000010
100 %		0	793,000,007	7	0.0000009
100 %		+ 10	793,000,013	13	0.0000017
100 %		+ 20	793,000,009	9	0.0000011
100 %		+ 30	793,000,021	21	0.0000026
100 %		+ 40	793,000,008	8	0.0000010
100 %		+ 50	793,000,020	20	0.0000025
BATT. ENDPOINT	3.40	+ 20	793,000,021	21	0.0000026

Table 7-20. LTE Band 14 Frequency Stability Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 61 of 63

Frequency Stability / Temperature Variation

\$2.1055, \$90.213

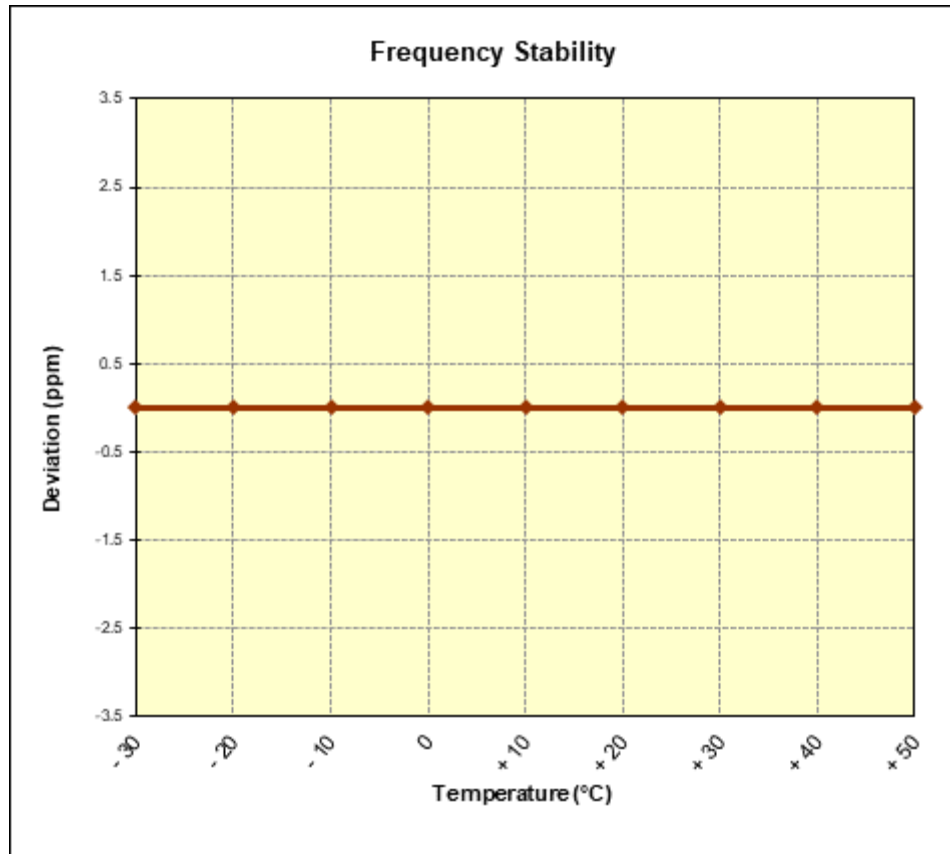


Table 7-21. LTE Band 14 Frequency Stability Data

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 62 of 63

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2013** complies with all the requirements of Part 90 of the FCC rules.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-04.BCG	Test Dates: 07/27/2018-10/07/2018	EUT Type: Tablet Device	Page 63 of 63