



7.7.1 SISO Core-0 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

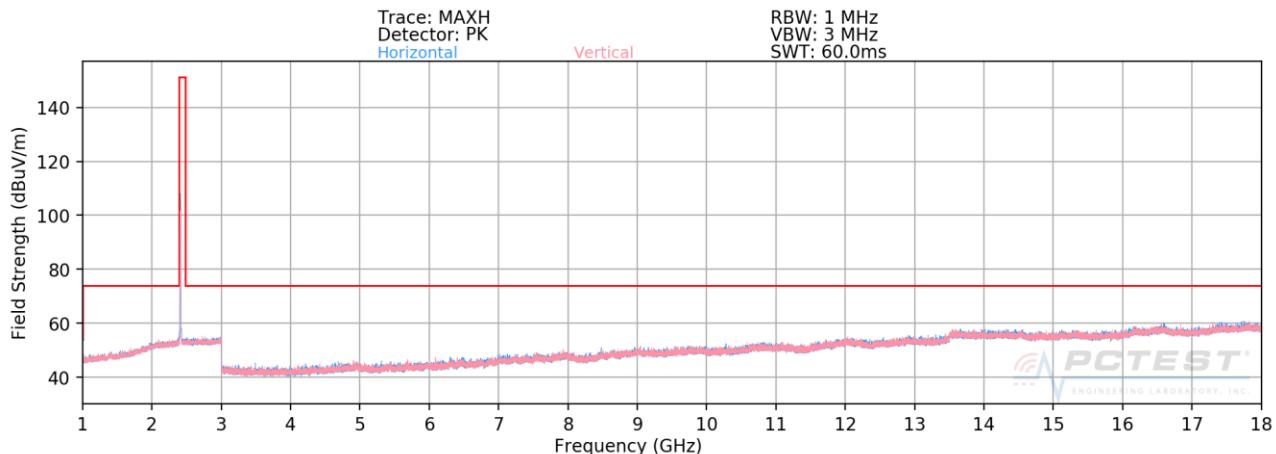

Plot 7-85. Radiated Spurious Plot above 1GHz SISO CORE 0 (802.11b – Ch. 1)

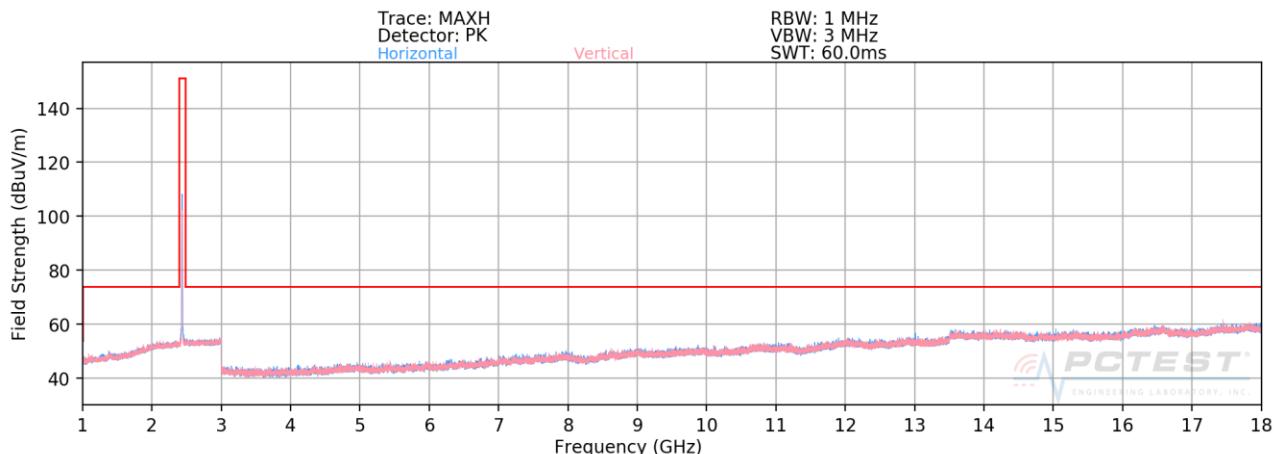

Plot 7-86. Radiated Spurious Plot above 1GHz SISO CORE 0 (802.11b – Ch. 6)

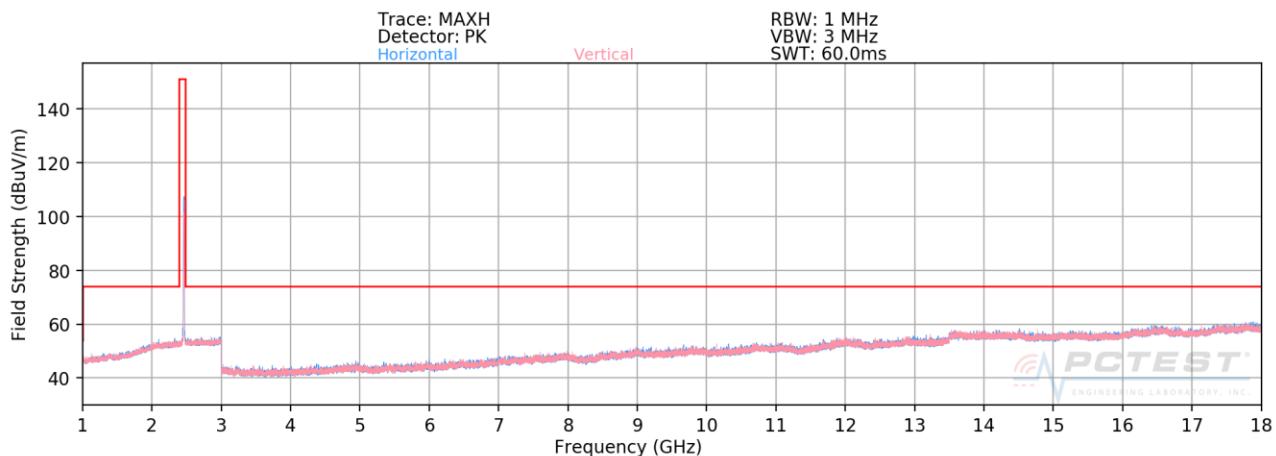

Plot 7-87. Radiated Spurious Plot above 1GHz SISO CORE 0 (802.11b – Ch. 11)

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 76 of 108	

SISO Core-0 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.39	6.67	34.28	53.98	-19.70
4824.00	Peak	H	-	-	-67.51	6.67	46.16	73.98	-27.82
12060.00	Avg	H	-	-	-81.48	17.97	43.49	53.98	-10.49
12060.00	Peak	H	-	-	-70.46	17.97	54.51	73.98	-19.47

Table 7-16. Radiated Measurements SISO CORE 0

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.50	6.76	34.26	53.98	-19.72
4874.00	Peak	H	-	-	-68.03	6.76	45.73	73.98	-28.25
7311.00	Avg	H	-	-	-81.02	11.07	37.05	53.98	-16.92
7311.00	Peak	H	-	-	-69.52	11.07	48.55	73.98	-25.42
12185.00	Avg	H	-	-	-81.43	18.09	43.66	53.98	-10.32
12185.00	Peak	H	-	-	-70.32	18.09	54.77	73.98	-19.21

Table 7-17. Radiated Measurements SISO CORE 0

FCC ID: BCGA2197		MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device				

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.75	7.32	34.57	53.98	-19.41
4924.00	Peak	H	-	-	-68.44	7.32	45.88	73.98	-28.10
7386.00	Avg	H	-	-	-81.09	11.78	37.69	53.98	-16.29
7386.00	Peak	H	-	-	-69.62	11.78	49.16	73.98	-24.82
12310.00	Avg	H	-	-	-82.35	18.14	42.79	53.98	-11.19
12310.00	Peak	H	-	-	-70.81	18.14	54.33	73.98	-19.65

Table 7-18. Radiated Measurements SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 78 of 108	

7.7.2 SISO Core-1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

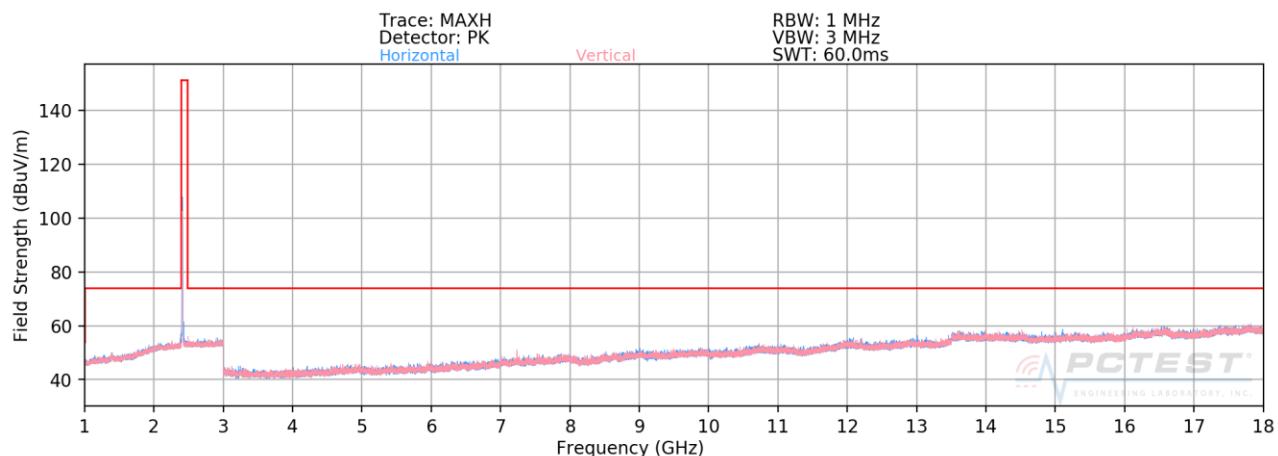

Plot 7-88. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 1)

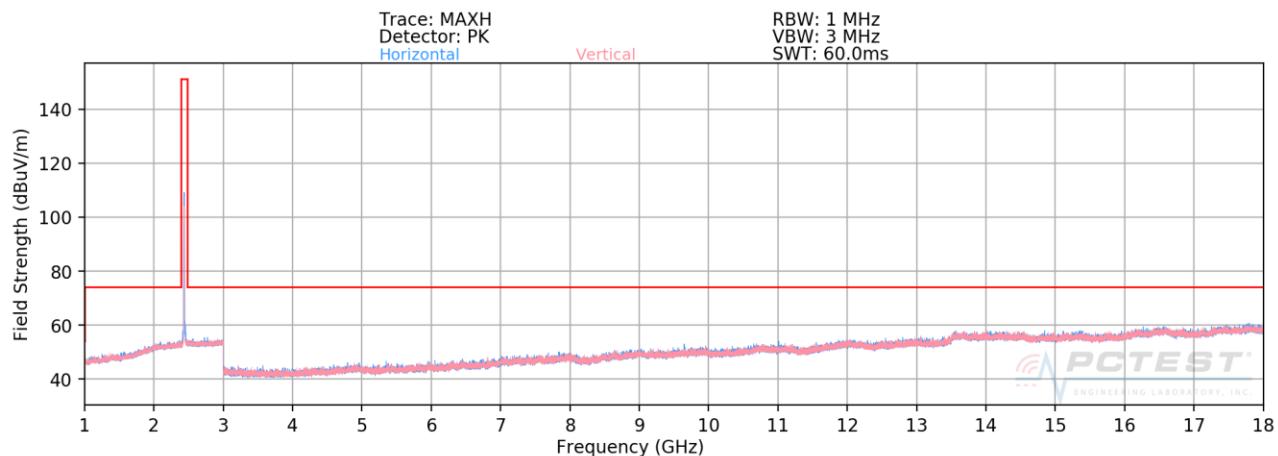

Plot 7-89. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 6)

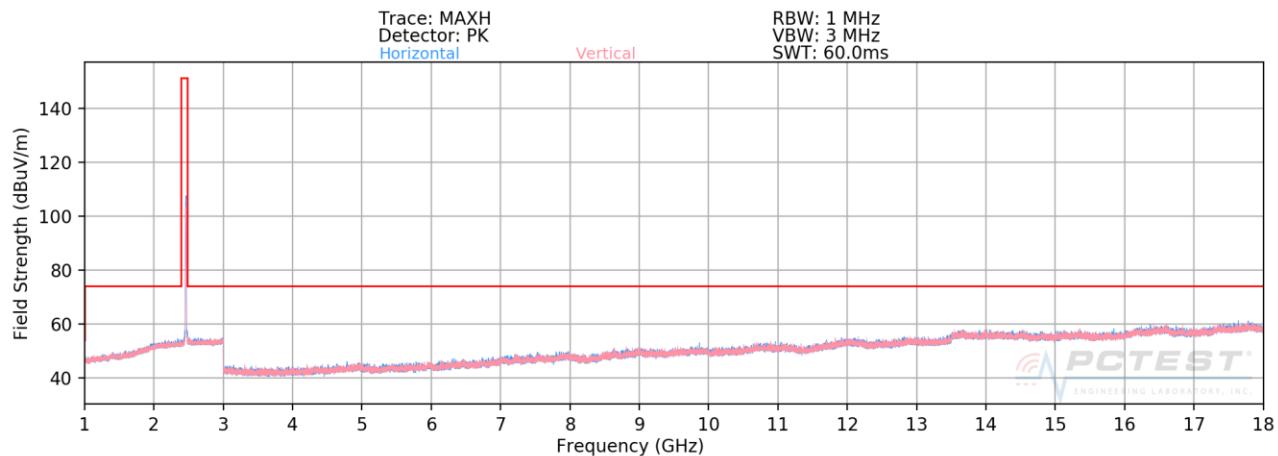

Plot 7-90. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 11)

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 79 of 108

SISO Core-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.13	6.67	34.54	53.98	-19.44
4824.00	Peak	H	-	-	-67.66	6.67	46.01	73.98	-27.97
12060.00	Avg	H	-	-	-81.69	17.97	43.28	53.98	-10.70
12060.00	Peak	H	-	-	-70.79	17.97	54.18	73.98	-19.80

Table 7-19. Radiated Measurements SISO CORE 1

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	151	129	-76.15	6.76	37.61	53.98	-16.37
4874.00	Peak	H	151	129	-67.64	6.76	46.12	73.98	-27.86
7311.00	Avg	H	-	-	-79.79	11.07	38.28	53.98	-15.69
7311.00	Peak	H	-	-	-69.06	11.07	49.01	73.98	-24.96
12185.00	Avg	H	-	-	-81.59	18.09	43.50	53.98	-10.48
12185.00	Peak	H	-	-	-70.12	18.09	54.97	73.98	-19.01

Table 7-20. Radiated Measurements SISO CORE 1

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device			Page 80 of 108

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	321	77	-79.80	7.32	34.52	53.98	-19.46
4924.00	Peak	H	321	77	-67.90	7.32	46.42	73.98	-27.56
7386.00	Avg	H	130	171	-79.99	11.78	38.79	53.98	-15.19
7386.00	Peak	H	130	171	-69.47	11.78	49.31	73.98	-24.67
12310.00	Avg	H	-	-	-82.34	18.14	42.80	53.98	-11.18
12310.00	Peak	H	-	-	-71.23	18.14	53.91	73.98	-20.07

Table 7-21. Radiated Measurements SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 81 of 108	

7.7.3 CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

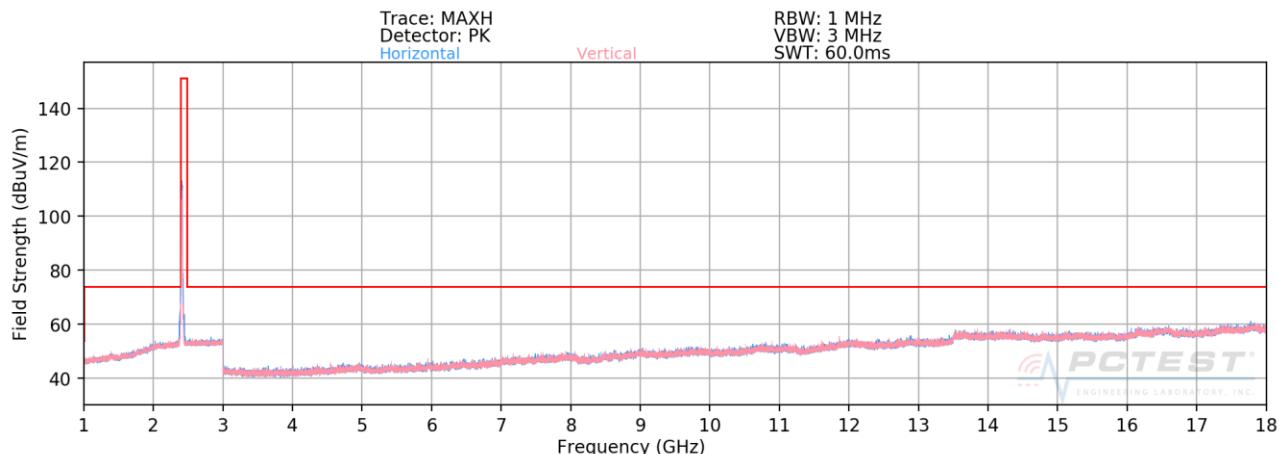

Plot 7-91. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 1)

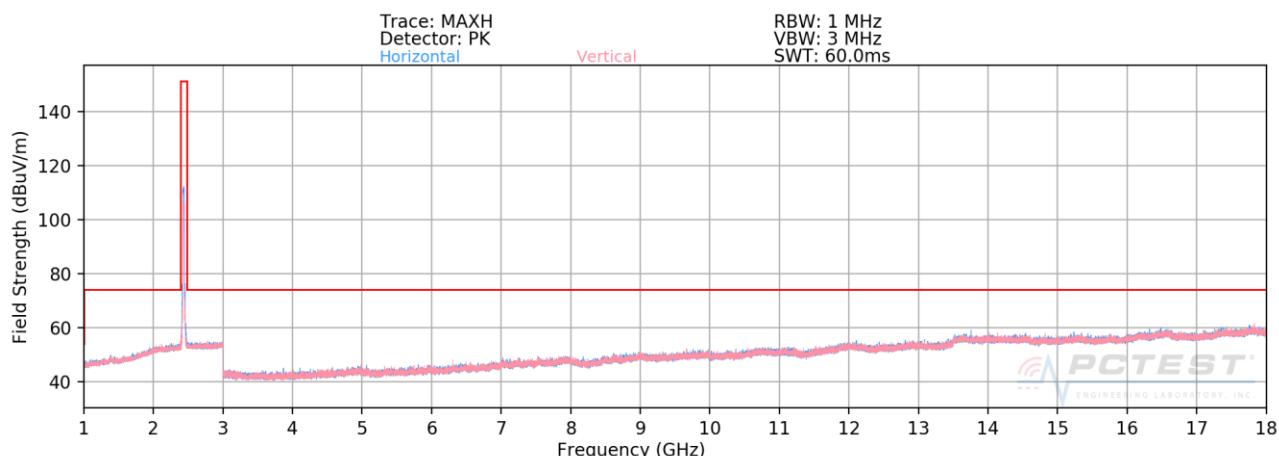

Plot 7-92. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 6)

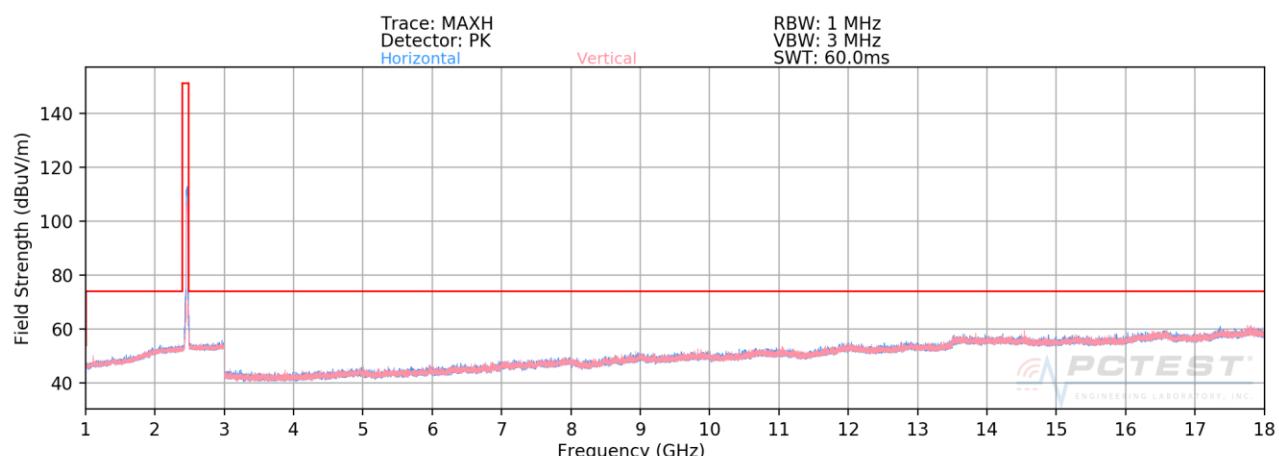

Plot 7-93. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 11)

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 82 of 108

CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.18	6.67	34.49	53.98	-19.49
4824.00	Peak	H	-	-	-68.44	6.67	45.23	73.98	-28.75
12060.00	Avg	H	-	-	-82.09	17.97	42.88	53.98	-11.10
12060.00	Peak	H	-	-	-70.31	17.97	54.66	73.98	-19.32

Table 7-22. Radiated Measurements CDD

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.40	6.76	34.36	53.98	-19.62
4874.00	Peak	H	-	-	-68.04	6.76	45.72	73.98	-28.26
7311.00	Avg	H	-	-	-81.10	11.07	36.97	53.98	-17.00
7311.00	Peak	H	-	-	-69.56	11.07	48.51	73.98	-25.46
12185.00	Avg	H	-	-	-81.51	18.09	43.58	53.98	-10.40
12185.00	Peak	H	-	-	-70.13	18.09	54.96	73.98	-19.02

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device			Page 83 of 108

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.78	7.32	34.54	53.98	-19.44
4924.00	Peak	H	-	-	-68.41	7.32	45.91	73.98	-28.07
7386.00	Avg	H	-	-	-81.23	11.78	37.55	53.98	-16.43
7386.00	Peak	H	-	-	-69.72	11.78	49.06	73.98	-24.92
12310.00	Avg	H	-	-	-82.32	18.14	42.82	53.98	-11.16
12310.00	Peak	H	-	-	-71.14	18.14	54.00	73.98	-19.98

Table 7-24. Radiated Measurements CDD


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 84 of 108	

CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

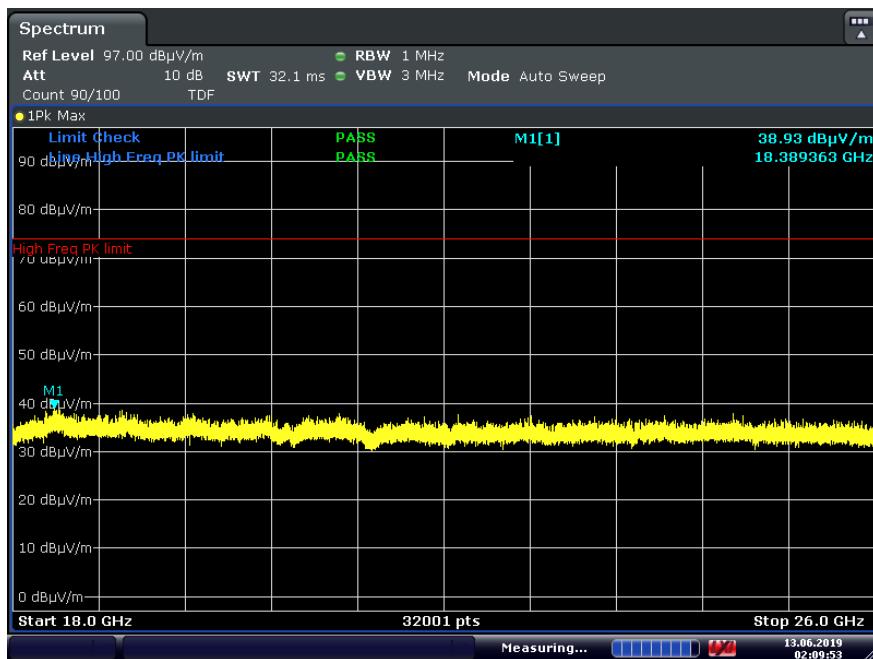

Plot 7-94. Radiated Spurious Plot above 18GHz CDD (802.11n – Ch.6, Pol H)

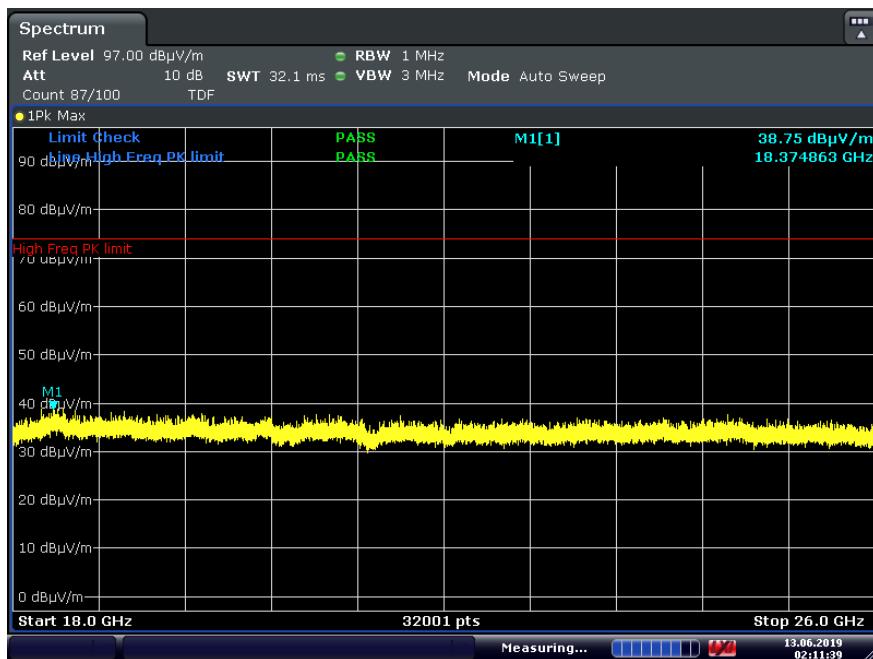

Plot 7-95. Radiated Spurious Plot above 18GHz CDD (802.11n – Ch.6, Pol V)


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 85 of 108

7.7.4 SISO Core-0 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

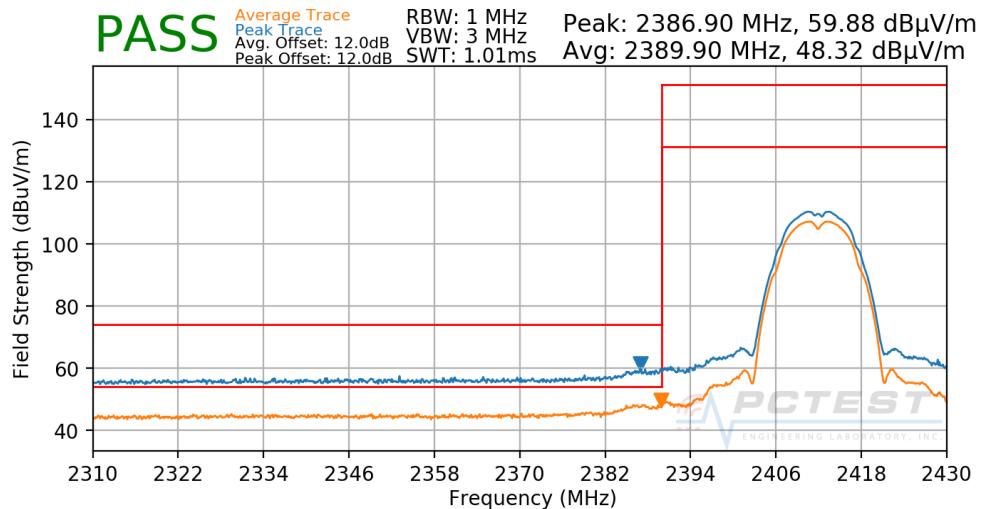

Plot 7-96. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 86 of 108	

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

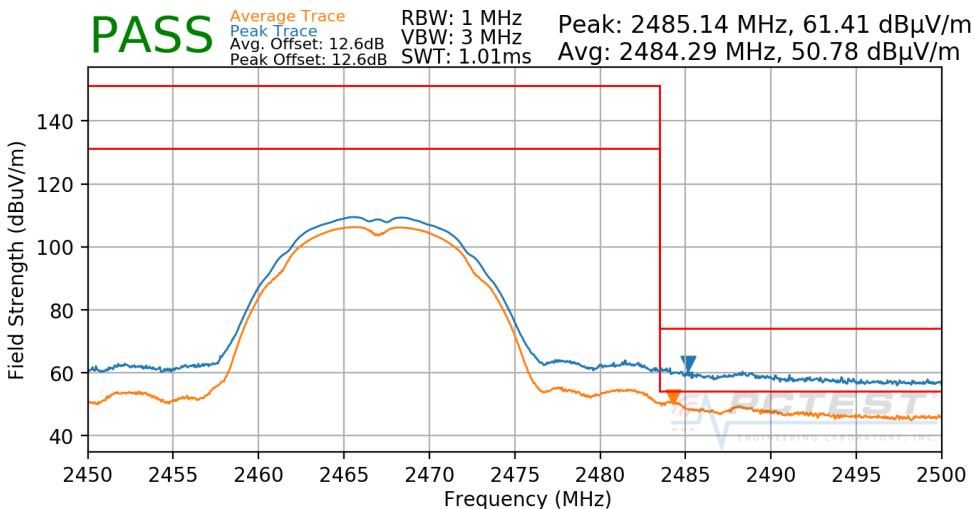

Plot 7-97. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

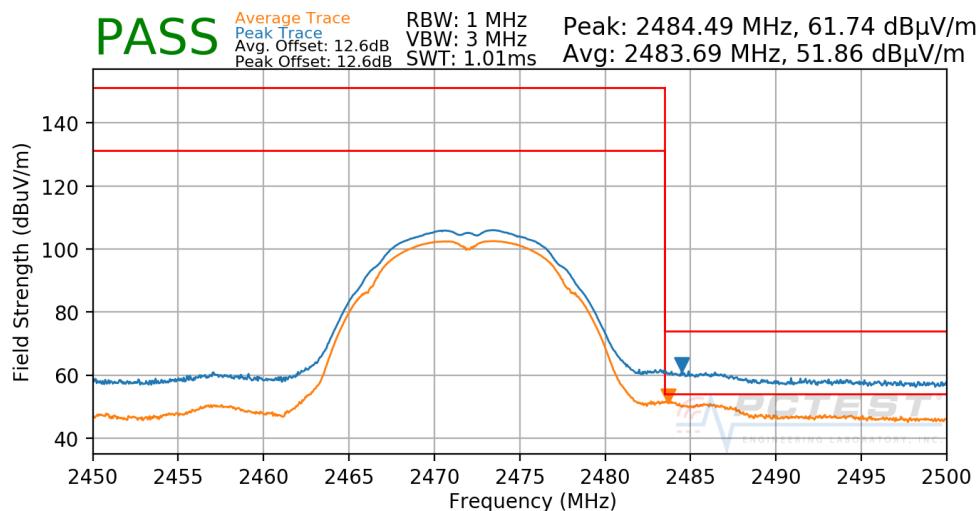

Plot 7-98. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 87 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

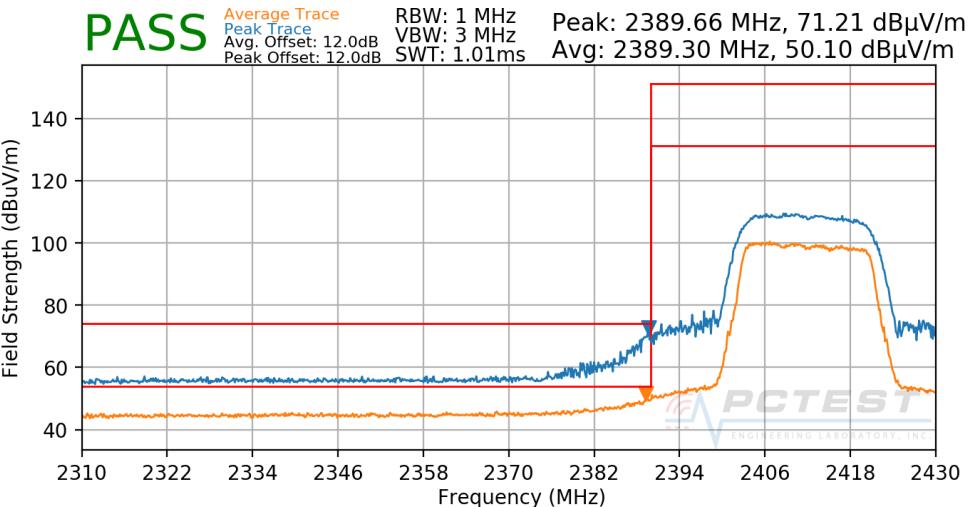

Plot 7-99. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

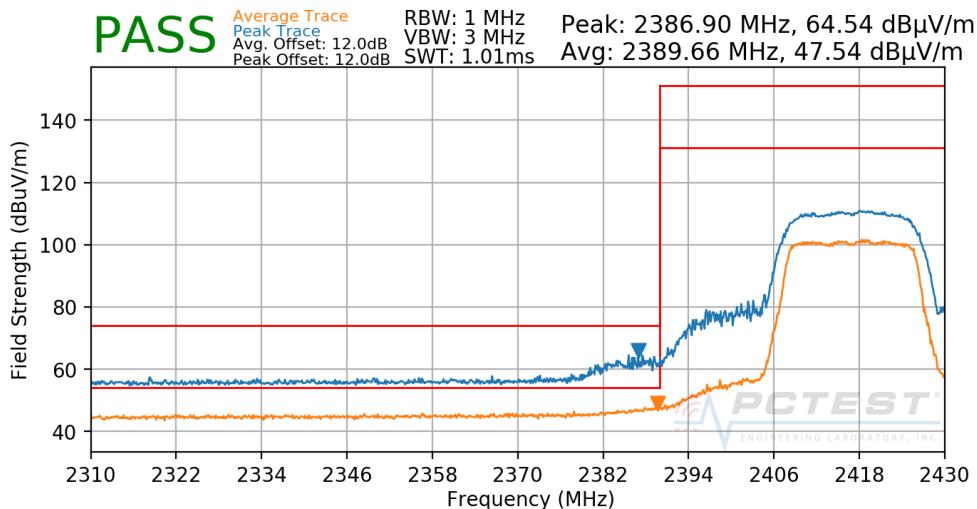

Plot 7-100. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 88 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

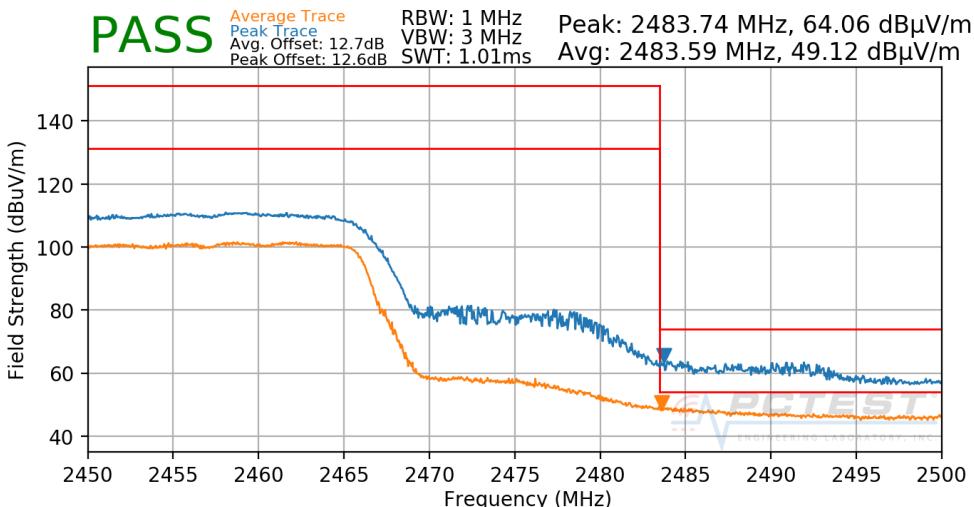

Plot 7-101. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

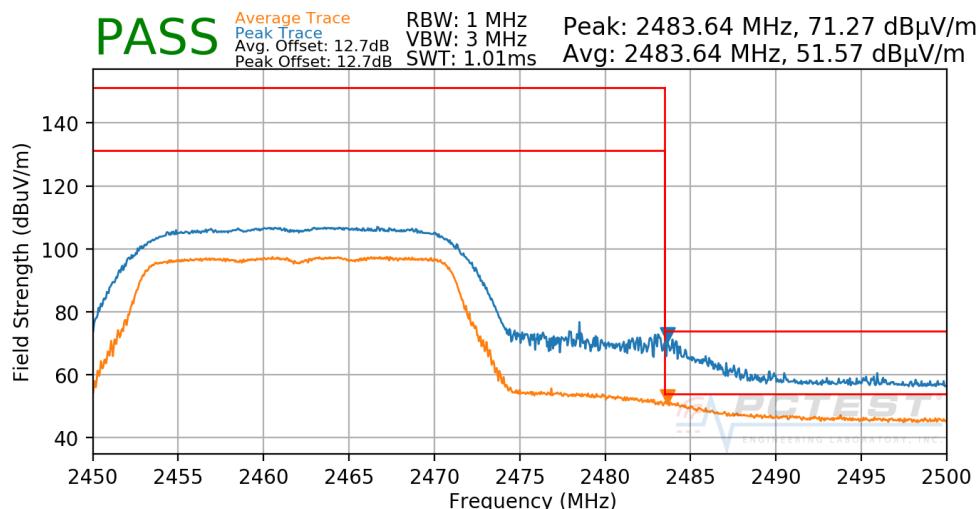

Plot 7-102. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 89 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

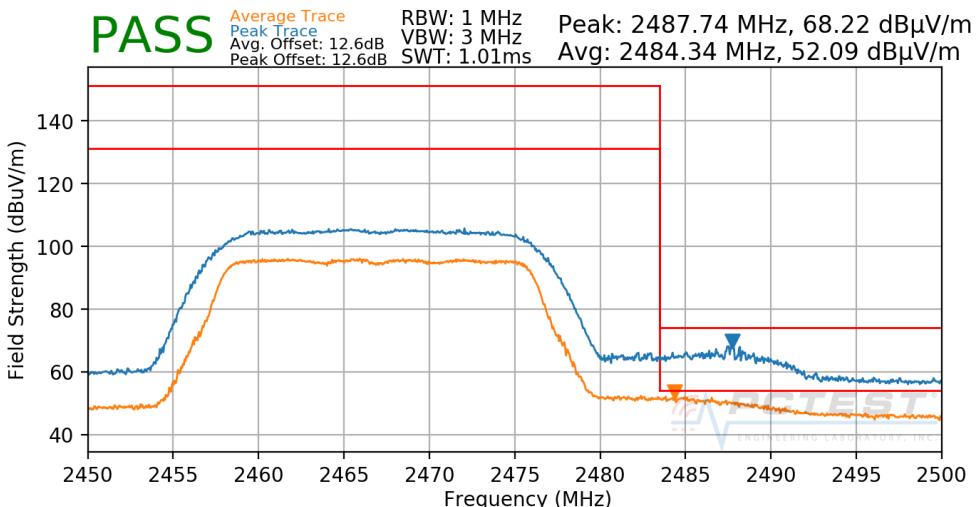

Plot 7-103. Radiated Restricted Upper Band Edge Measurement SISO CORE 0

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

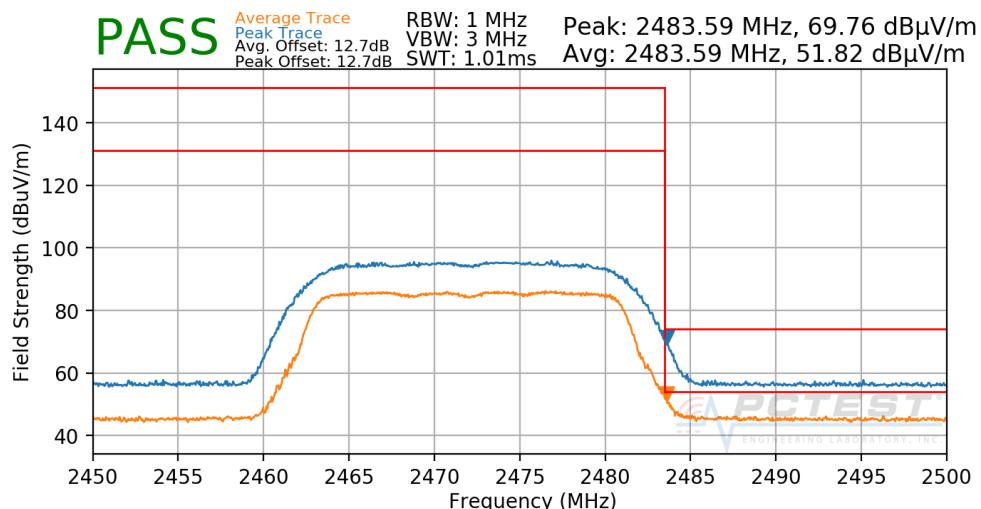

Plot 7-104. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 90 of 108

7.7.5 SISO Core-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

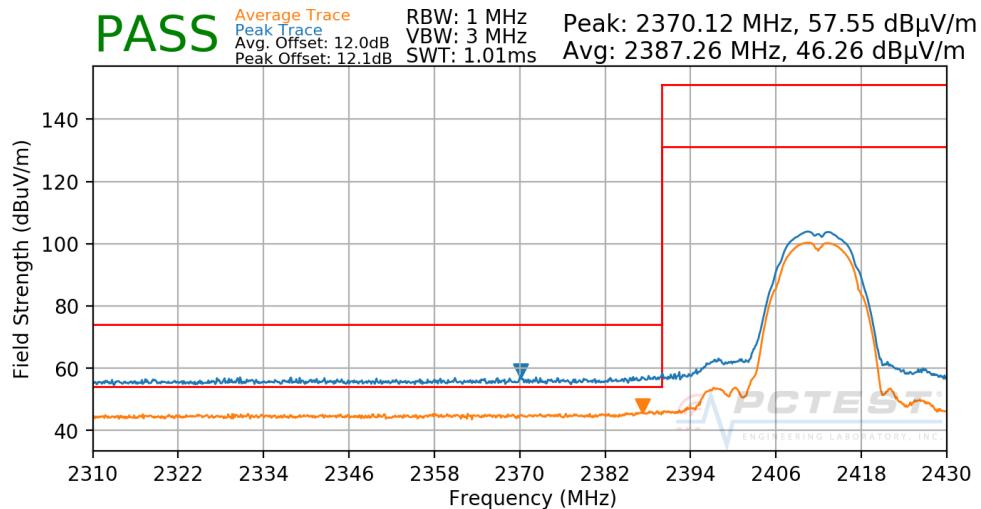

Plot 7-105. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 91 of 108

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

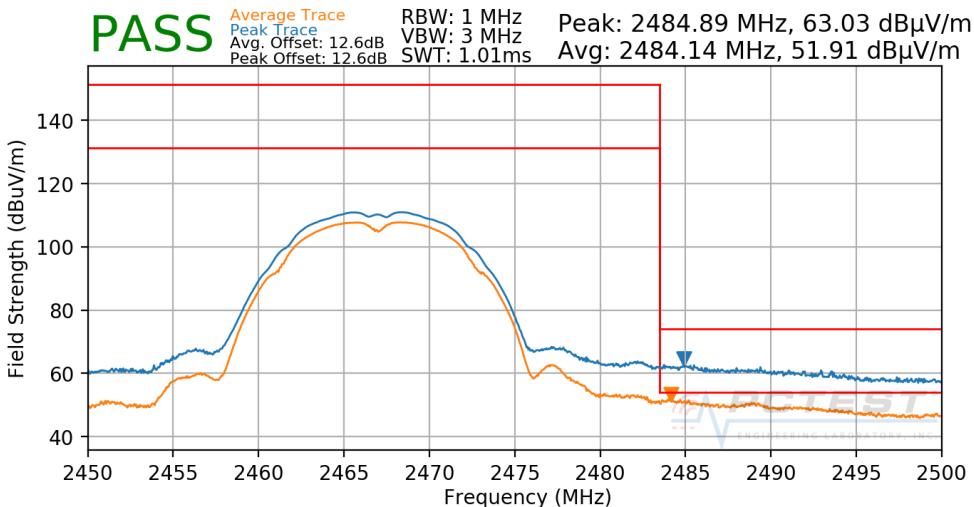

Plot 7-106. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

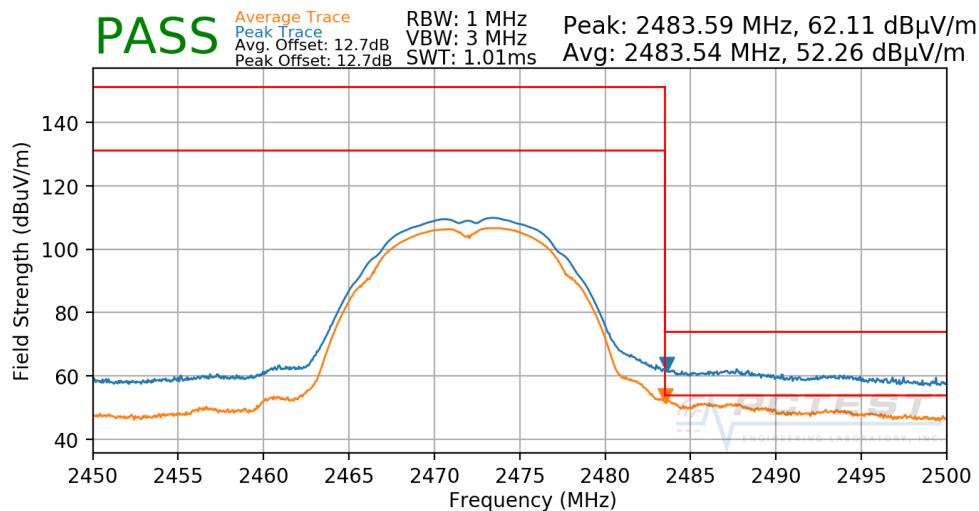

Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 92 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

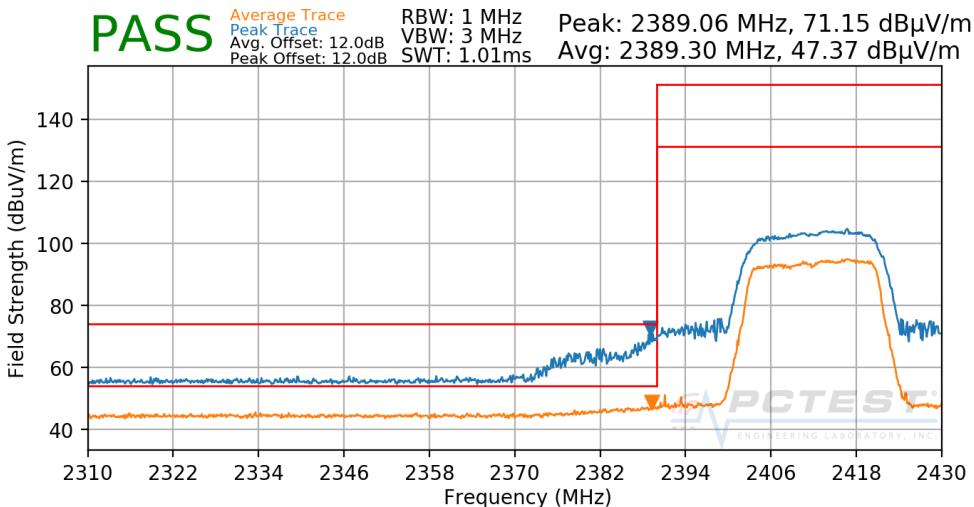

Plot 7-108. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

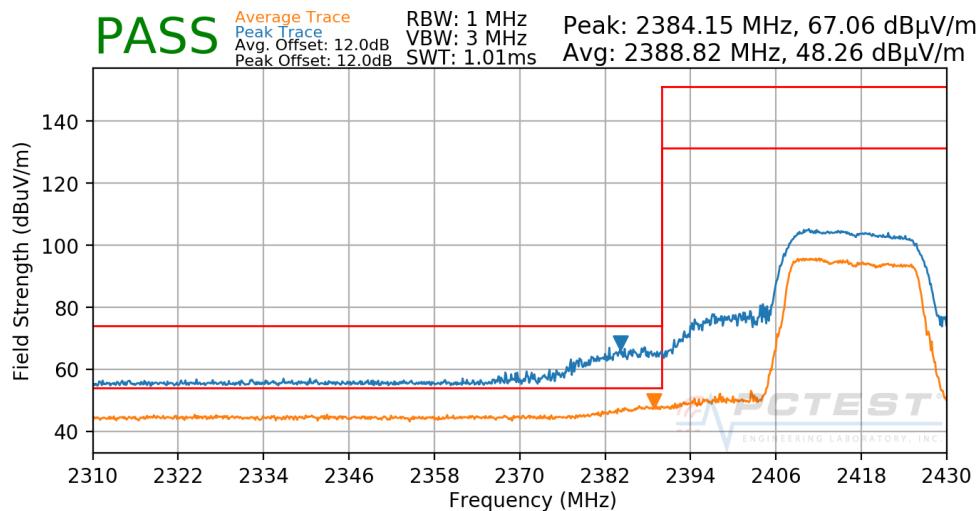

Plot 7-109. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 93 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

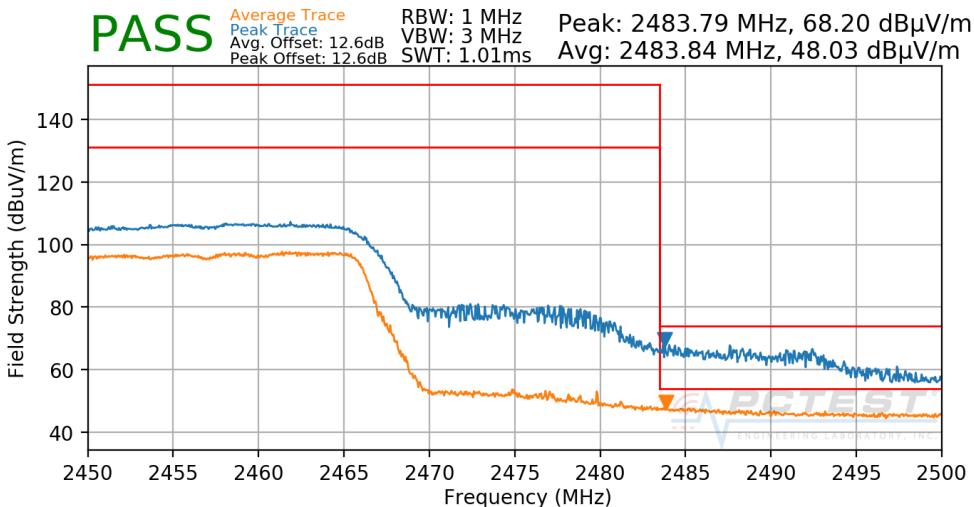

Plot 7-110. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

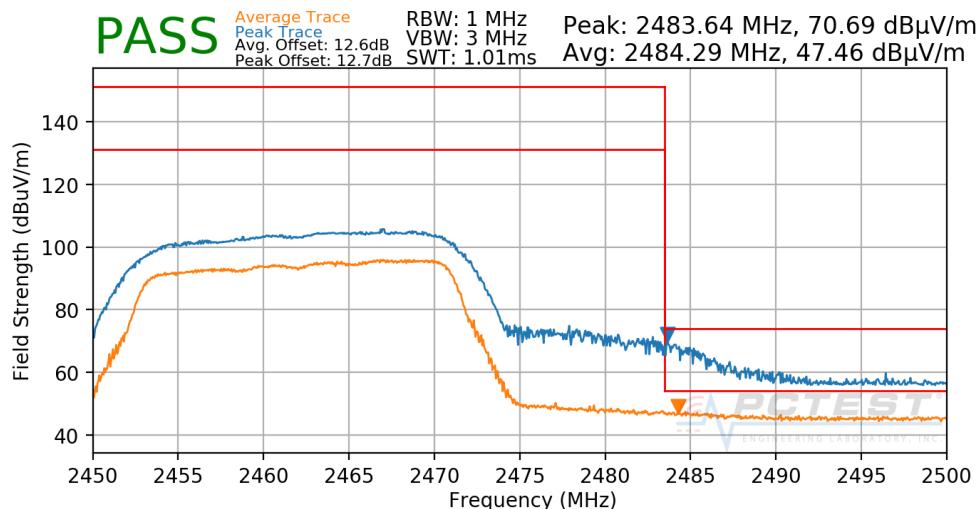

Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 94 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

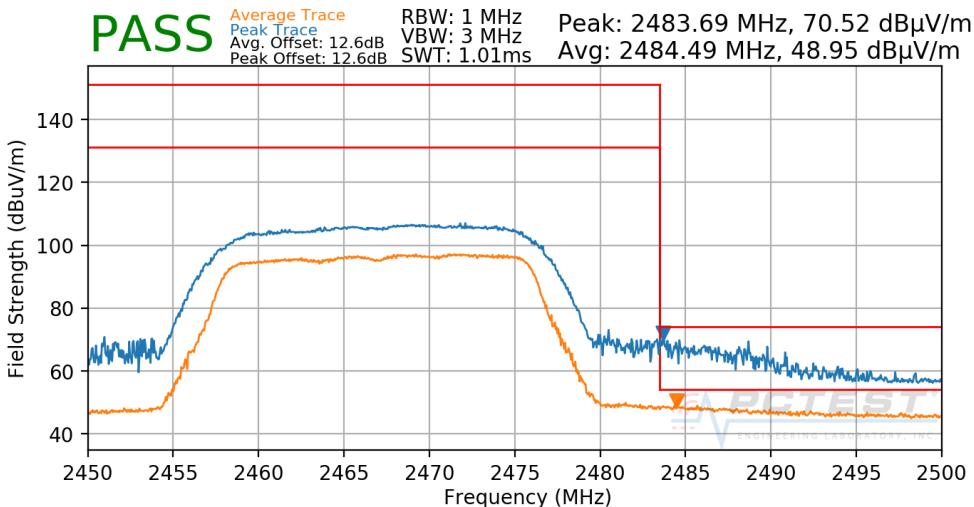

Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO CORE 1

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

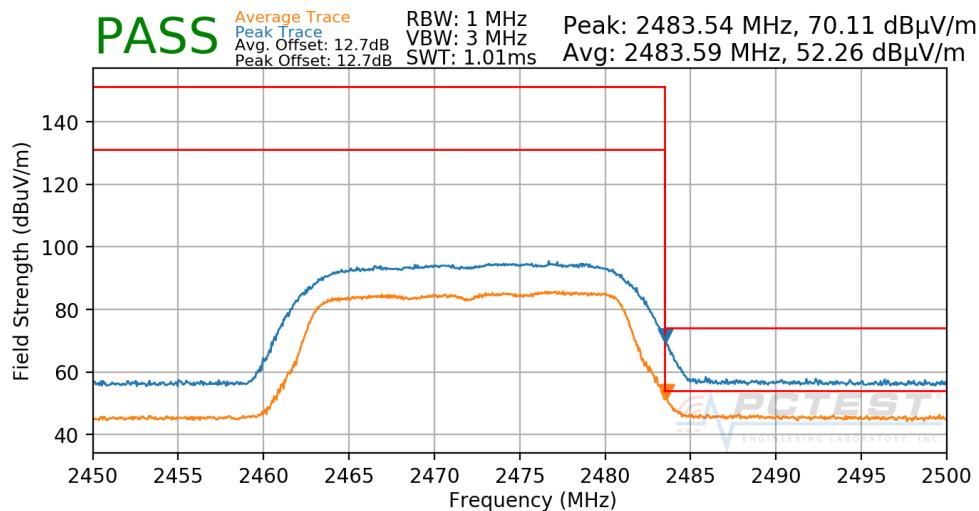

Plot 7-113. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 95 of 108

7.7.6 CDD Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

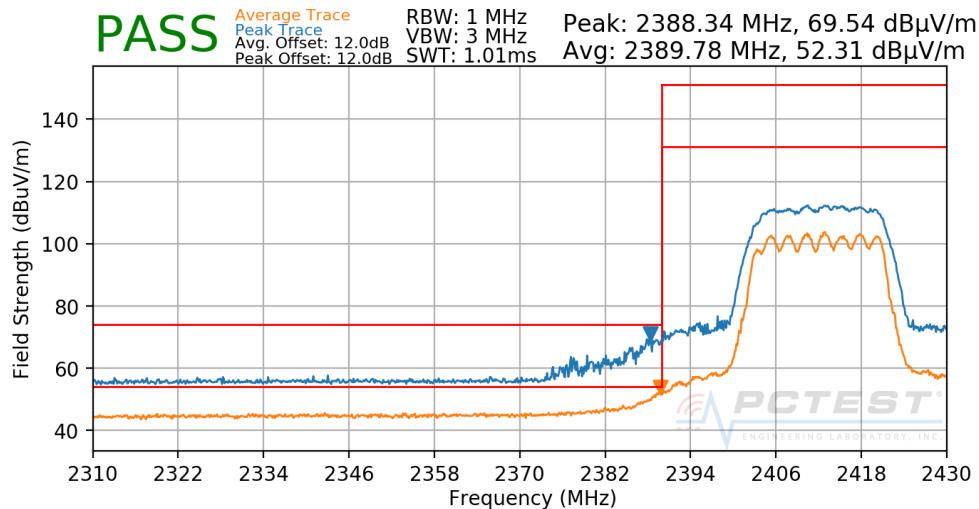

Plot 7-114. Radiated Restricted Lower Band Edge Measurement CDD


FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 96 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

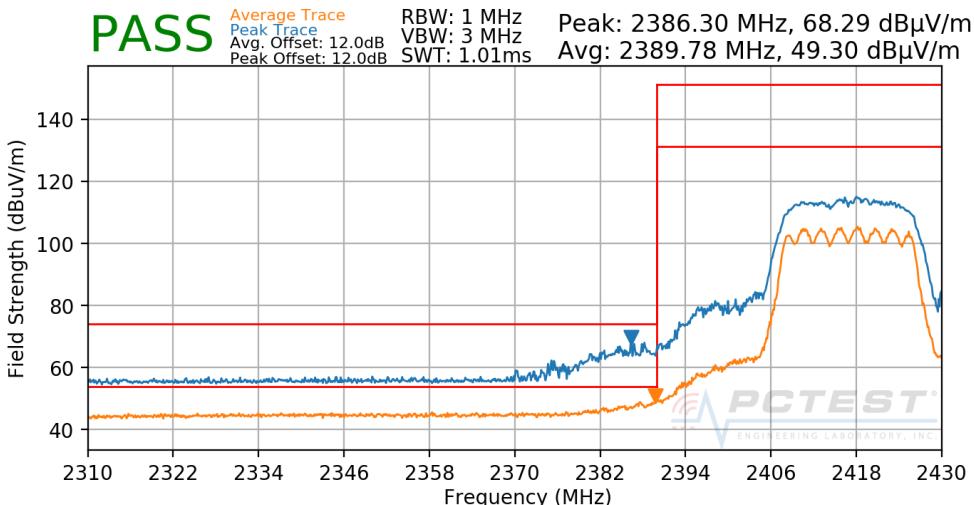

Plot 7-115. Radiated Restricted Lower Band Edge Measurement CDD


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

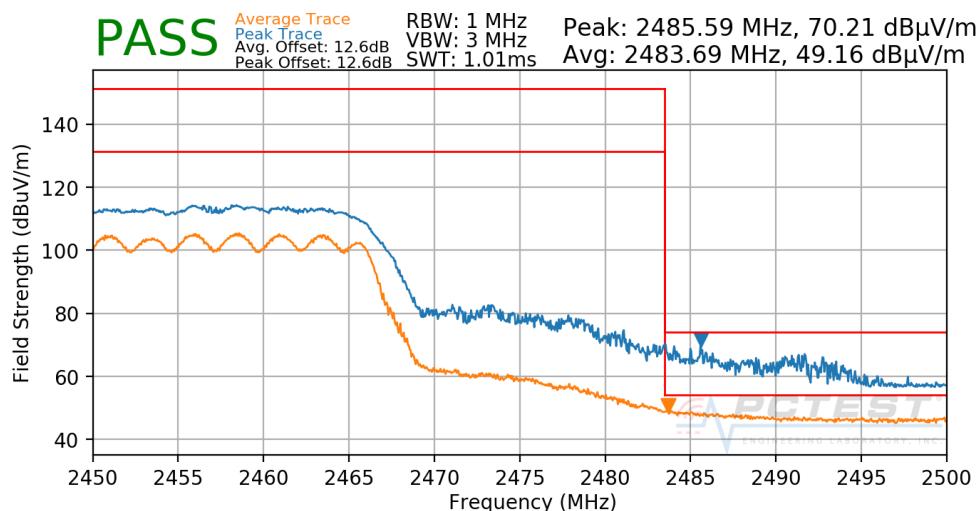

Plot 7-116. Radiated Restricted Upper Band Edge Measurement CDD


FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 97 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

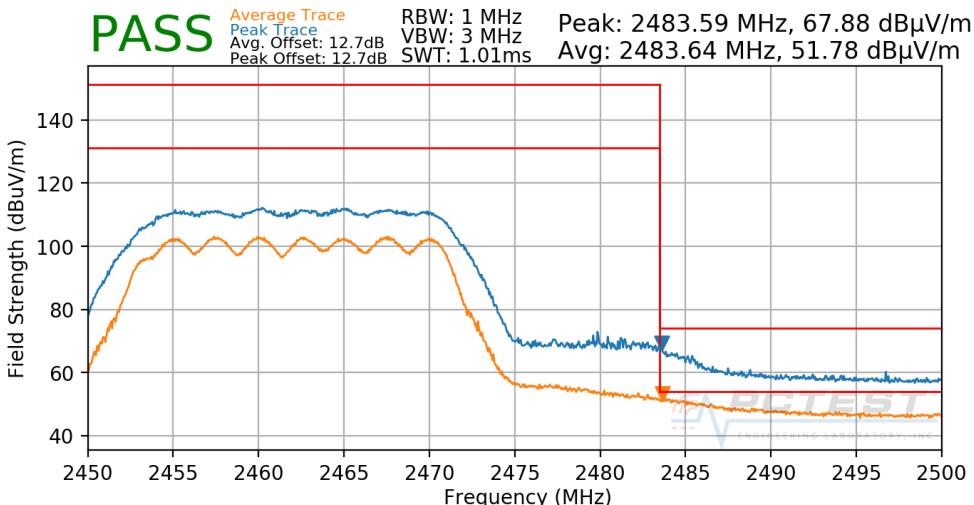

Plot 7-117. Radiated Restricted Upper Band Edge Measurement CDD


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

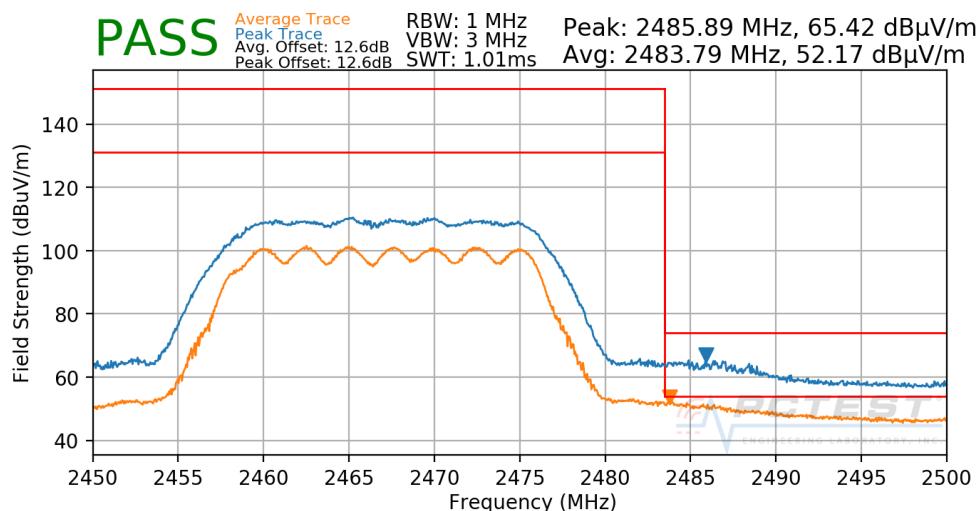

Plot 7-118. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 98 of 108

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

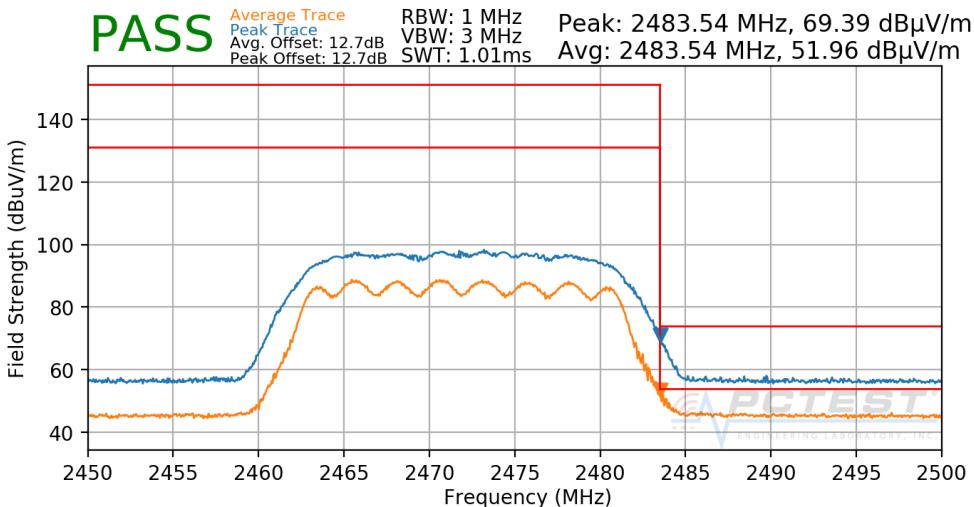

Plot 7-119. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 99 of 108	

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 100 of 108

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

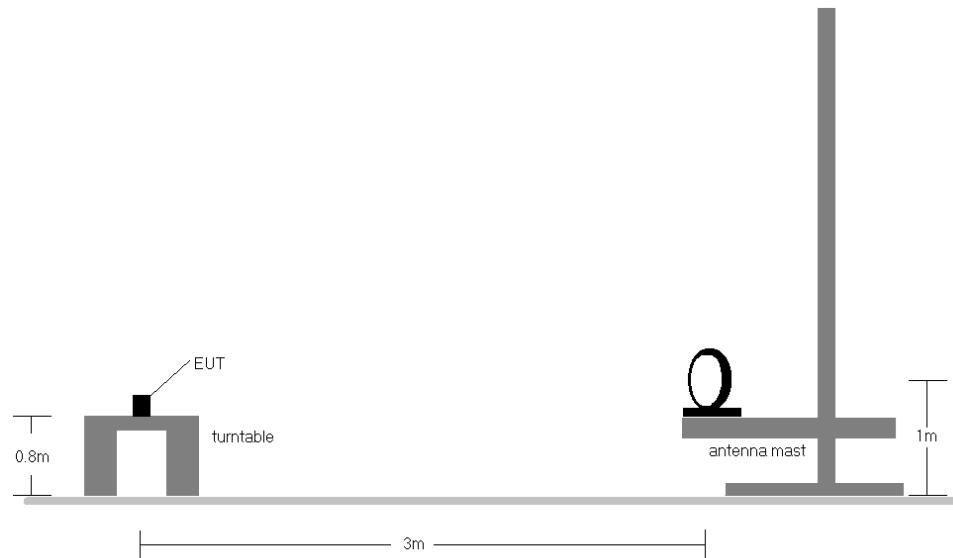


Figure 7-7. Radiated Test Setup < 30Mhz

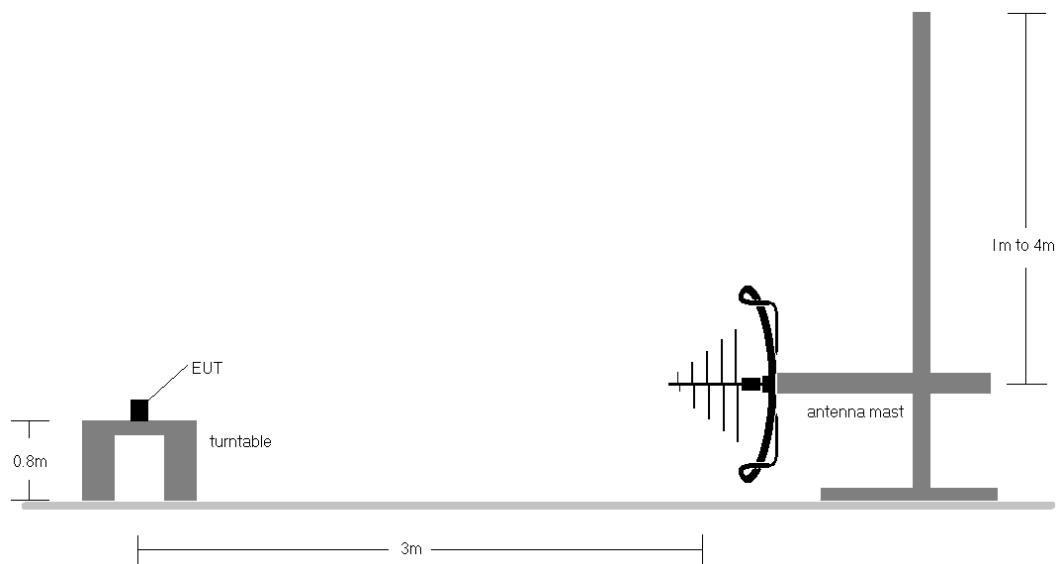


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 101 of 108


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. All antenna configs were investigated and only the worst case is reported.

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 102 of 108

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

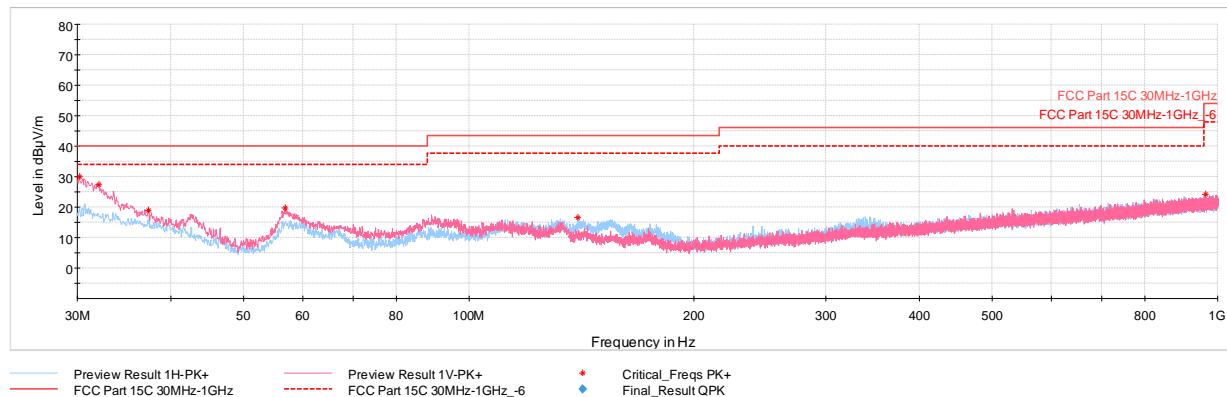

Plot 7-120. Radiated Spurious Plot below 1GHz CDD Ch.6, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
30.19	Max-Peak	V	100	357	-68.09	-8.98	29.93	40.00	-10.07
32.04	Max-Peak	V	100	58	-69.52	-10.19	27.29	40.00	-12.71
37.37	Max-Peak	V	100	85	-75.34	-12.64	19.02	40.00	-20.98
56.82	Max-Peak	V	250	229	-64.08	-23.25	19.67	40.00	-20.33
139.76	Max-Peak	H	250	206	-71.87	-18.67	16.46	43.52	-27.06
962.61	Max-Peak	H	100	64	-78.95	-3.82	24.23	53.98	-29.75

Table 7-26. Radiated Spurious Emissions below 1GHz CDD Ch.6, with AC/DC Adapter

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 103 of 108	

7.9 AC Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 104 of 108

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


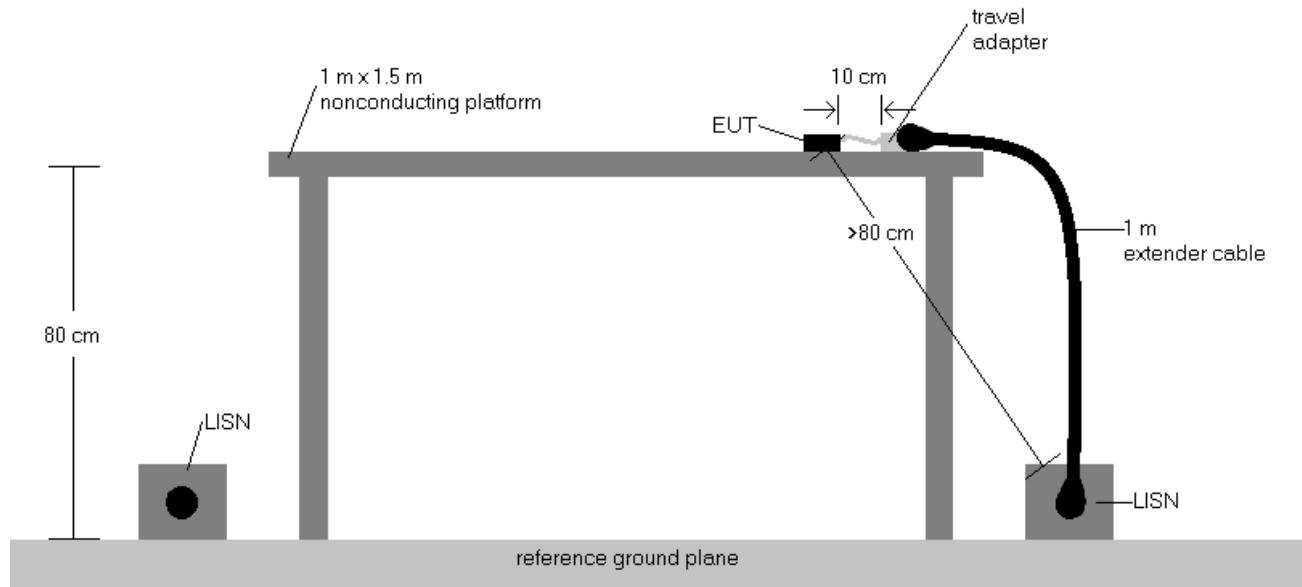


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. The traces on the plots were measured with a quasi-peak and average detectors.
7. Deviations to the Specifications: None.

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		Page 105 of 108

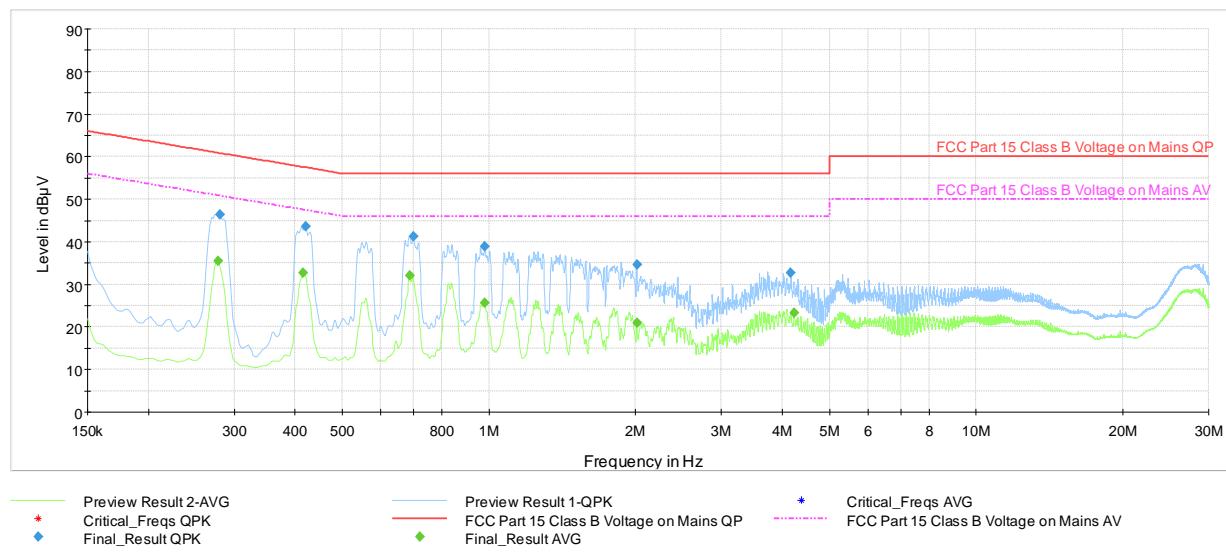


Plot 7-121. AC Line Conducted Plot with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.278	FINAL	—	35.50	50.87	-15.37	L1	GND
0.281	FINAL	46.3	—	60.80	-14.47	L1	GND
0.416	FINAL	—	32.63	47.54	-14.91	L1	GND
0.420	FINAL	43.6	—	57.45	-13.86	L1	GND
0.688	FINAL	—	32.12	46.00	-13.88	L1	GND
0.699	FINAL	41.3	—	56.00	-14.73	L1	GND
0.980	FINAL	39.0	—	56.00	-16.99	L1	GND
0.980	FINAL	—	25.74	46.00	-20.26	L1	GND
2.011	FINAL	34.7	—	56.00	-21.26	L1	GND
2.011	FINAL	—	20.92	46.00	-25.08	L1	GND
4.164	FINAL	32.8	—	56.00	-23.23	L1	GND
4.229	FINAL	—	23.38	46.00	-22.62	L1	GND

Table 7-28. AC Line Conducted Measurements with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA2197	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device		

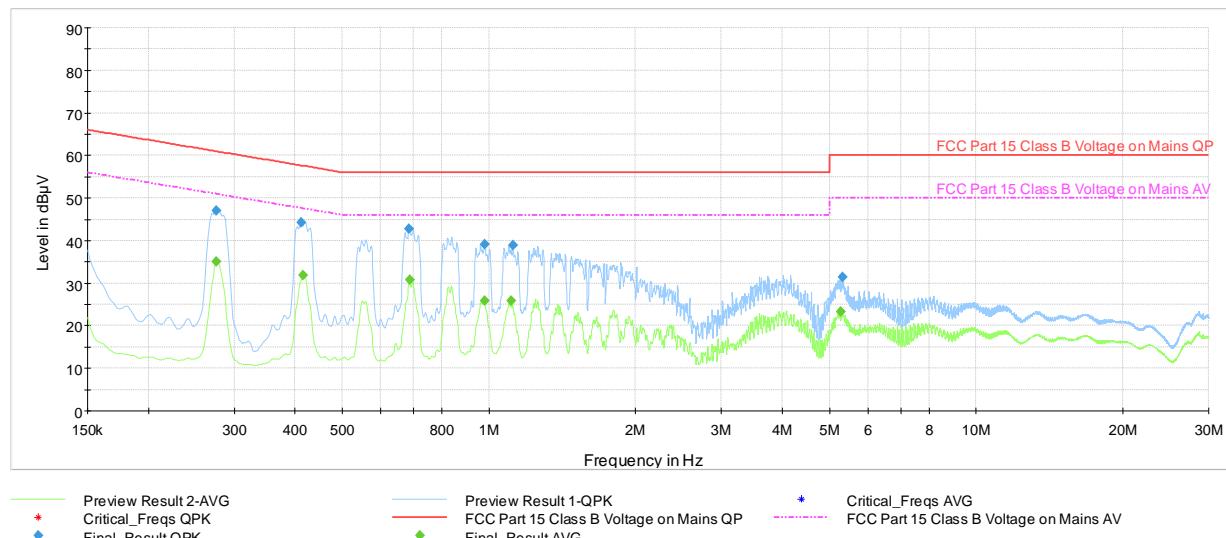

Plot 7-122. AC Line Conducted Plot with 802.11n CDD Ch.6 (N, WITH AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.276	FINAL	—	35.08	50.94	-15.85	N	GND
0.276	FINAL	46.9	—	60.94	-14.01	N	GND
0.411	FINAL	44.2	—	57.63	-13.42	N	GND
0.416	FINAL	—	31.77	47.54	-15.77	N	GND
0.686	FINAL	42.8	—	56.00	-13.20	N	GND
0.688	FINAL	—	30.73	46.00	-15.27	N	GND
0.980	FINAL	39.2	—	56.00	-16.79	N	GND
0.980	FINAL	—	25.78	46.00	-20.22	N	GND
1.109	FINAL	—	25.80	46.00	-20.20	N	GND
1.120	FINAL	38.8	—	56.00	-17.18	N	GND
5.282	FINAL	—	23.26	50.00	-26.74	N	GND
5.314	FINAL	31.4	—	60.00	-28.57	N	GND

Table 7-29. AC Line Conducted Measurements with 802.11n CDD Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 107 of 108	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2197** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2197	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1901280002-02.BCG	Test Dates: 05/01/2019-07/15/2019	EUT Type: Tablet Device	Page 108 of 108